

#01_WLAN2.4GHz_802.11b 1Mbps_Bottom of Laptop_0mm_Ch6;Ant 1


Communication System: 802.11b ; Frequency: 2437 MHz;Duty Cycle: 1:1
 Medium: HSL_2450_200626 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.823$ S/m; $\epsilon_r = 38.711$;
 $\rho = 1000$ kg/m³
 Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3642;ConvF(7.11, 7.11, 7.11) @ 2437 MHz;Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: ELI V5.0; Type: QD OVA 002 Ax; Serial: 1191
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 0.656 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 7.836 V/m; Power Drift = -0.03 dB
 Peak SAR (extrapolated) = 0.786 W/kg
SAR(1 g) = 0.422 W/kg; SAR(10 g) = 0.226 W/kg
 Maximum value of SAR (measured) = 0.648 W/kg

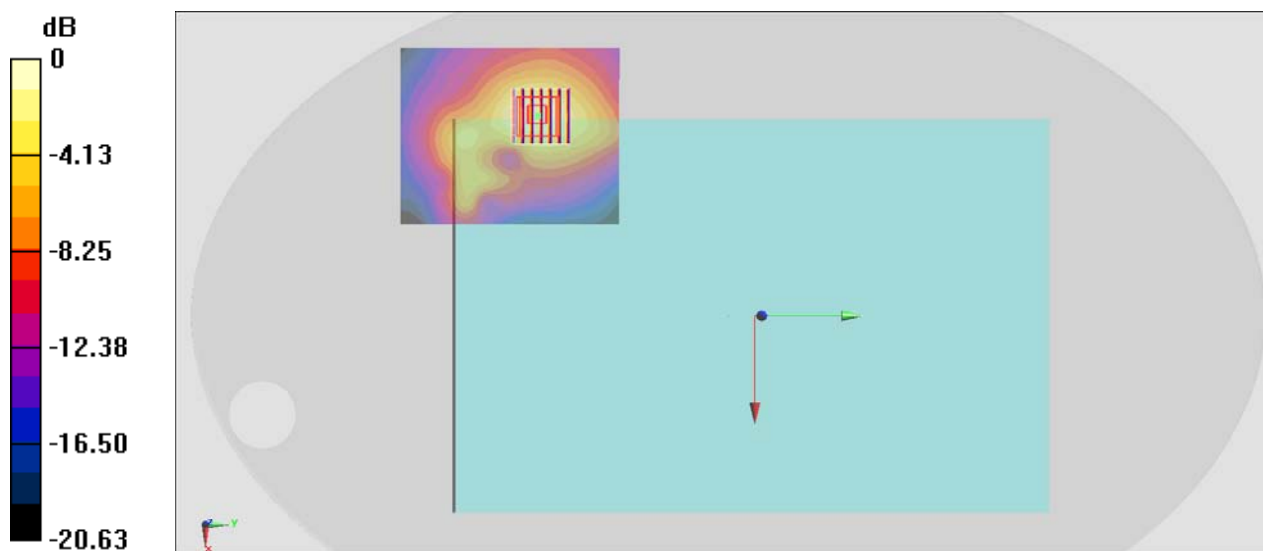

0 dB = 0.648 W/kg = -1.88 dBW/kg

#02_WLAN5GHz_802.11a 6Mbps_Bottom of Laptop_0mm_Ch56;Ant 1

Communication System:802.11a ; Frequency: 5280 MHz;Duty Cycle: 1:1.021

Medium: HSL_5G_200626 Medium parameters used: $f = 5280$ MHz; $\sigma = 4.589$ S/m; $\epsilon_r = 36.063$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3642;ConvF(4.43, 4.43, 4.43) @ 5280 MHz;Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: ELI V5.0; Type: QD OVA 002 Ax; Serial: 1191
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.303 W/kg


Zoom Scan (9x10x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 7.091 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.603 W/kg

SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.383 W/kg

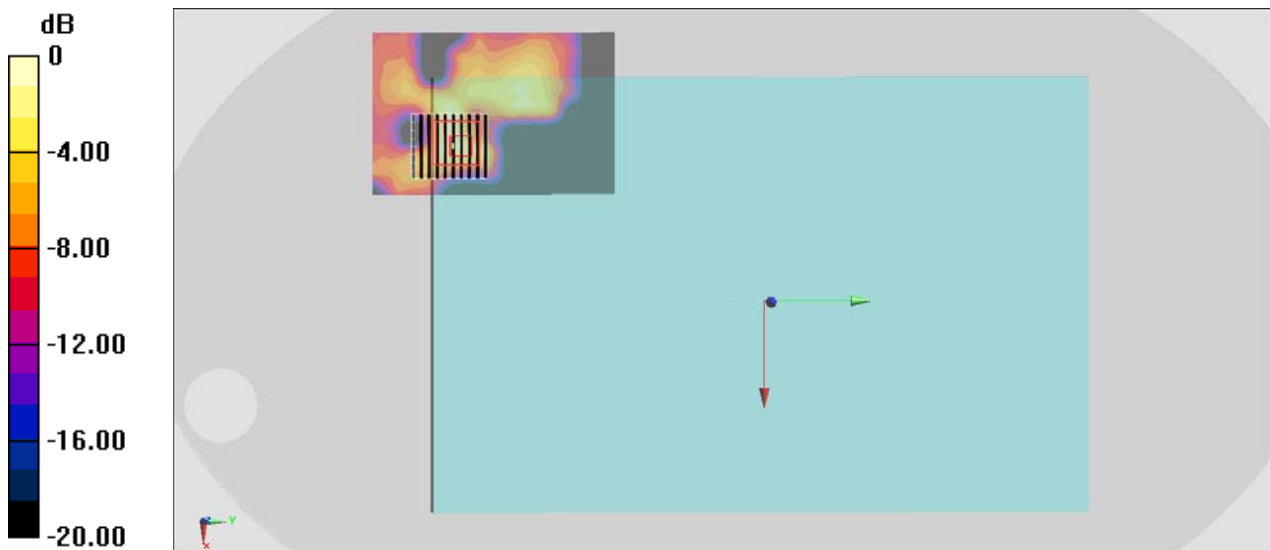

0 dB = 0.383 W/kg = -4.17 dBW/kg

#03_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom of Laptop_0mm_Ch106;Ant 1


Communication System: 802.11ac ; Frequency: 5530 MHz;Duty Cycle: 1:1.013
Medium: HSL_5G_200626 Medium parameters used : $f = 5530$ MHz; $\sigma = 4.831$ S/m; $\epsilon_r = 35.769$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3642;ConvF(4.19, 4.19, 4.19) @ 5530 MHz;Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: ELI V5.0; Type: QD OVA 002 Ax; Serial: 1191
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.756 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 6.005 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.640 W/kg
SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.042 W/kg
Maximum value of SAR (measured) = 0.415 W/kg

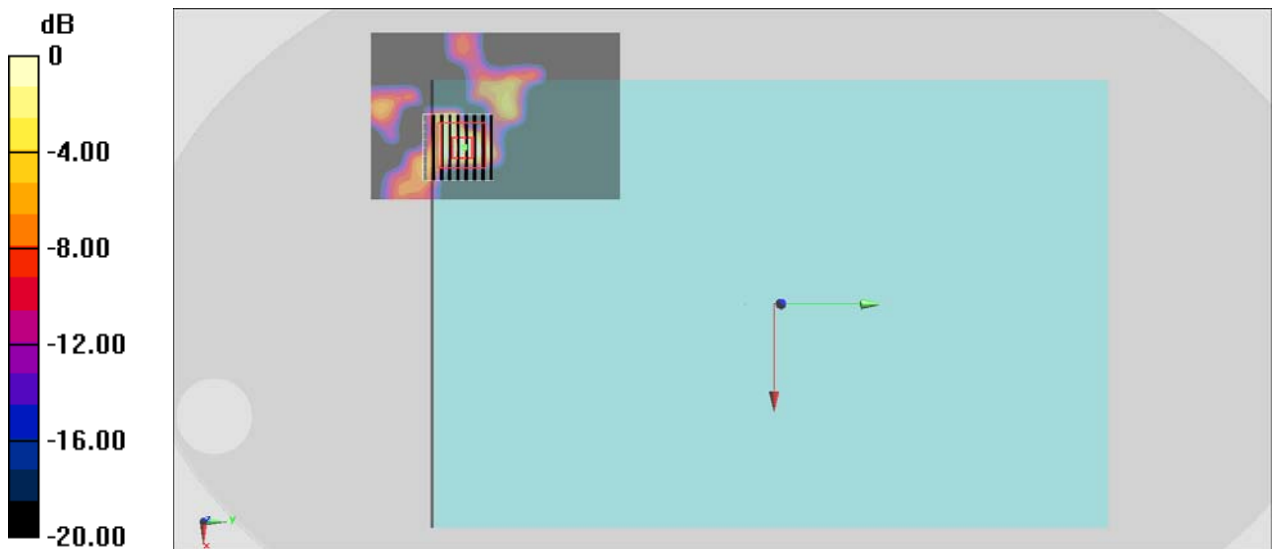

0 dB = 0.415 W/kg = -3.82 dBW/kg

#04_WLAN5GHz_802.11n-HT40 MCS0_Bottom of Laptop_0mm_Ch151;Ant 1


Communication System: 802.11n ; Frequency: 5755 MHz;Duty Cycle: 1:1.019
Medium: HSL_5G_200626 Medium parameters used : $f = 5755$ MHz; $\sigma = 5.075$ S/m; $\epsilon_r = 35.409$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3642;ConvF(4.17, 4.17, 4.17) @ 5755 MHz;Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: ELI V5.0; Type: QD OVA 002 Ax; Serial: 1191
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.543 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 4.950 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.428 W/kg
SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.023 W/kg
Maximum value of SAR (measured) = 0.266 W/kg

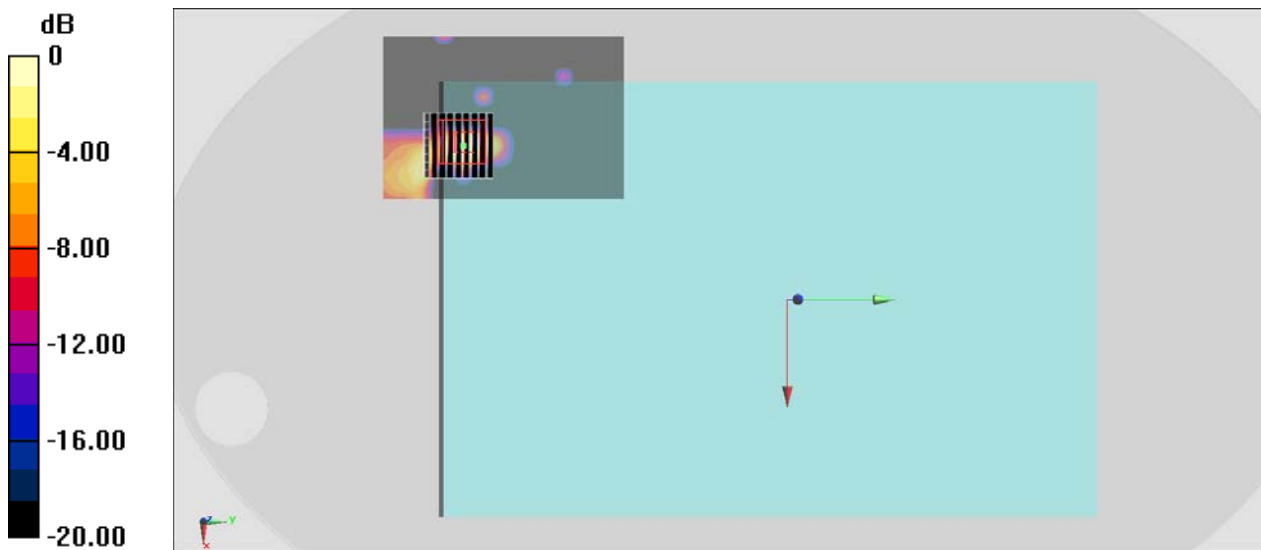

0 dB = 0.266 W/kg = -5.75 dBW/kg

#05_Bluetooth_1Mbps_Bottom of Laptop_0mm_Ch78;Ant 1

Communication System: Bluetooth ; Frequency: 2480 MHz;Duty Cycle: 1:1.297
Medium: HSL_2450_200626 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.873$ S/m; $\epsilon_r = 38.531$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3642;ConvF(7.11, 7.11, 7.11) @ 2480 MHz;Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2019/8/27
- Phantom: ELI V5.0; Type: QD OVA 002 Ax; Serial: 1191
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0471 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.706 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.0840 W/kg
SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.00809 W/kg
Maximum value of SAR (measured) = 0.0327 W/kg

