SAR TEST REPORT

The following samples were submitted and identified on behalf of the client as:

Product Name	Notebook Computer
Brand Name	acer
Model No.	N19Q5
Prepared for	Acer Incorporated
Company Address	8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi, New Taipei City 22181, Taiwan (R.O.C)
Standards	IEEE/ANSI C95.1-1992, IEEE 1528-2013, KDB248227D01v02r02,KDB865664D01v01r04, KDB865664D02v01r02,KDB447498D01v06, KDB616217D04v01r02,
FCC ID	HLZAX201D2
Date of Receipt	May. 12, 2020
Date of Test(s)	May. 17, 2020 ~ May. 21, 2020
Date of Issue	May. 26, 2020

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Electronic & Communication Laboratory or testing done by SGS Taiwan Electronic & Communication Laboratory in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Electronic & Communication Laboratory in writing.

Signed on behalf of SGS

Clerk / Ruby Ou	Engineer / Bond Tsai	Asst. Manager / John Yeh
Ruby Ou	Bond Tsai	John Yeh

Date: May. 26, 2020

Revision History

Report Number	Revision	Description	Issue Date
E5/2020/50006	Rev.00	Initial creation of document	May. 26, 2020

Contents

1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd. Central RF Lab	
No. 2, Keji 1st Rd., Guishan Township, Taoyuan County, 33383, Taiwan	
Tel	+886-2-2299-3279
Fax	+886-2-2298-0488
Internet	http://www.tw.sgs.com/

1.2 Details of Applicant

Company Name	Acer Incorporated
Company Address	8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi, New Taipei City 22181, Taiwan (R.O.C)

1.3 Description of EUT

General Information of Host:

Equipment Under Test	Notebook Computer	
Brand Name	acer	
Model No.	N19Q5	
Integrated Module	Brand Name : Intel Model Name : AX201D2W	
FCC ID	HLZAX201D2	
Mode of Operation	☒WLAN802.11 a/b/g/n/ac/ax(20M/40M/80M/160M) ☒Bluetooth	
Duty Cycle	WLAN802.11 a/b/g/n/ac/ax(20M/40M/80M/160M)	Refer to page 36-42
	Bluetooth	76.8%
TX Frequency Range (MHz)	WLAN802.11 b/g/n/ax(20M)	2412 ~ 2462
	WLAN802.11 n/ax(40M)	2422 ~ 2452
	WLAN802.11 a/n/ac/ax(20M) 5.2G	5180 ~ 5240
	WLAN802.11 n/ac/ax(40M) 5.2G	5190 ~ 5230
	WLAN802.11 ac/ax(80M) 5.2G	5210
	WLAN802.11 ac/ax(160M) 5.2G	5250
	WLAN802.11 a/n/ac/ax(20M) 5.3G	5260 ~ 5320
	WLAN802.11 n/ac/ax(40M) 5.3G	5270 ~ 5310
	WLAN802.11 ac/ax(80M) 5.3G	5290
	WLAN802.11 a/n/ac/ax(20M) 5.6G	5500 ~ 5720
	WLAN802.11 n/ac/ax(40M) 5.6G	5510 ~ 5710
	WLAN802.11 ac/ax(80M) 5.6G	5530 ~ 5690
	WLAN802.11 ac/ax(160M) 5.6G	5570
	WLAN802.11 a/n/ac/ax(20M) 5.8G	5745 ~ 5825
	WLAN802.11 n/ac/ax(40M) 5.8G	5755 ~ 5795

TX Frequency Range (MHz)	WLAN802.11 ac/ax(80M) 5.8G	5775		
	Bluetooth	2402	—	2480
Channel Number (ARFCN)	WLAN802.11 b/g/n/ax(20M)	1	—	11
	WLAN802.11 n/ax(40M)	3	—	9
	WLAN802.11 a/n/ac/ax(20M) 5.2G	36	—	48
	WLAN802.11 n/ac/ax(40M) 5.2G	38	—	46
	WLAN802.11 ac/ax(80M) 5.2G	42		
	WLAN802.11 ac/ax(160M) 5.2G	50		
	WLAN802.11 a/n/ac/ax(20M) 5.3G	52	—	64
	WLAN802.11 n/ac/ax(40M) 5.3G	54	—	62
	WLAN802.11 ac/ax(80M) 5.3G	58		
	WLAN802.11 a/n/ac/ax(20M) 5.6G	100	—	144
	WLAN802.11 n/ac/ax(40M) 5.6G	102	—	142
	WLAN802.11 ac/ax(80M) 5.6G	106	—	138
	WLAN802.11 ac/ax(160M) 5.6G	114		
	WLAN802.11 a/n/ac/ax(20M) 5.8G	149	—	165
	WLAN802.11 n/ac/ax(40M) 5.8G	151	—	159
	WLAN802.11 ac/ax(80M) 5.8G	155		
	Bluetooth	0	—	78

Tablet mode

Max. SAR (1g) (Unit: W/Kg)					
Antenna	Band	Measured	Reported	Channel	Position
Main	WLAN 802.11b	0.75	0.77	6	Back side
	WLAN 802.11ac(80M) 5.2G	1.08	1.11	42	Back side
	WLAN 802.11ac(160M) 5.2G	1.07	1.10	50	Back side
	WLAN 802.11n(40M) 5.3G	1.01	1.02	62	Back side
	WLAN 802.11ac(80M) 5.3G	0.99	1.01	58	Back side
	WLAN 802.11ac(80M) 5.6G	0.93	0.96	138	Back side
	WLAN 802.11ac(160M) 5.6G	0.93	0.96	114	Back side
	WLAN 802.11n(40M) 5.8G	1.03	1.04	151	Back side
	WLAN 802.11ac(80M) 5.8G	1.03	1.06	155	Back side
Aux	WLAN 802.11b	0.83	0.84	6	Back side
	Bluetooth(GFSK)	0.17	0.28	78	Back side
	WLAN 802.11ac(80M) 5.2G	0.97	0.98	42	Back side
	WLAN 802.11ac(160M) 5.2G	0.97	0.99	50	Back side
	WLAN 802.11n(40M) 5.3G	1.09	1.10	62	Back side
	WLAN 802.11ac(80M) 5.3G	1.03	1.05	58	Back side
	WLAN 802.11ac(80M) 5.6G	0.94	0.96	106	Back side
	WLAN 802.11ac(160M) 5.6G	0.95	0.98	114	Back side
	WLAN 802.11n(40M) 5.8G	1.04	1.05	159	Back side
	WLAN 802.11ac(80M) 5.8G	1.02	1.04	155	Back side

Notebook mode

Max. SAR (1g) (Unit: W/Kg)					
Antenna	Band	Measured	Reported	Channel	Position
Main	WLAN 802.11b	0.04	0.04	10	Bottom side
	WLAN 802.11n(40M) 5.2G	0.06	0.06	46	Bottom side
	WLAN 802.11a 5.3G	0.06	0.06	52	Bottom side
	WLAN 802.11ax(80M) 5.6G	0.08	0.08	138	Bottom side
	WLAN 802.11n(40M) 5.8G	0.06	0.06	151	Bottom side
Aux	WLAN 802.11b	0.04	0.05	10	Bottom side
	WLAN 802.11g	0.05	0.05	2	Bottom side
	Bluetooth(GFSK)	0.00	0.01	78	Bottom side
	WLAN 802.11n(40M) 5.2G	0.14	0.14	46	Bottom side
	WLAN 802.11a 5.3G	0.06	0.06	56	Bottom side
	WLAN 802.11ac(80M) 5.6G	0.06	0.06	138	Bottom side
	WLAN 802.11n(40M) 5.8G	0.06	0.06	159	Bottom side

Antenna Information

Vendor	WNC									
Notebook mode										
Antenna	Main (PIFA)					Aux (PIFA)				
Frequency	2400-2500	5150-5250	5250-5350	5470-5725	5725-5850	2400-2500	5150-5250	5250-5350	5470-5725	5725-5850
Gain (dBi)	-2.46	1.22	1.22	-0.22	0.97	-2.89	-1.58	-2.70	-2.65	-2.62
Tablet mode										
Antenna	Main (PIFA)					Aux (PIFA)				
Frequency	2400-2500	5150-5250	5250-5350	5470-5725	5725-5850	2400-2500	5150-5250	5250-5350	5470-5725	5725-5850
Gain (dBi)	-3.26	-0.58	0.87	0.80	0.85	-3.87	-1.61	-1.61	-1.63	-2.37

WLAN802.11 a/b/g/n(20M/40M)/ac/ax(20M/40M/80M/160M) conducted power table:

Band \ Antenna	SISO		MIMO
	Main	Aux	Main + Aux
WLAN802.11b	V	V	-
WLAN802.11g	V	V	-
WLAN802.11n(20M)	V	V	V
WLAN802.11n(40M)	V	V	V
WLAN802.11ax(20M)	V	V	V
WLAN802.11ax(40M)	V	V	V
WLAN802.11a	V	V	-
WLAN802.11n(20M) 5G	V	V	V
WLAN802.11n(40M) 5G	V	V	V
WLAN802.11ac(20M) 5G	V	V	V
WLAN802.11ac(40M) 5G	V	V	V
WLAN802.11ac(80M) 5G	V	V	V
WLAN802.11ac(160M) 5G	V	V	V
WLAN802.11ax(20M) 5G	V	V	V
WLAN802.11ax(40M) 5G	V	V	V
WLAN802.11ax(80M) 5G	V	V	V
WLAN802.11ax(160M) 5G	V	V	V

Tablet mode

Main antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
2450 MHz	802.11b	1	2412	1Mbps	19.00	18.92
		2	2417		20.00	19.94
		6	2437		20.00	19.95
		10	2457		20.00	19.93
		11	2462		20.00	19.88
	802.11g	1	2412	6Mbps	17.00	16.92
		2	2417		20.00	19.92
		6	2437		20.00	19.91
		10	2457		20.00	19.89
		11	2462		17.00	16.92
	802.11n20-HT0	1	2412	MCS0	17.00	16.95
		6	2437		20.00	19.94
		11	2462		15.50	15.43
	802.11ax20-HE0	1	2412		17.00	16.96
		6	2437		20.00	19.93
		11	2462		15.50	15.44
	802.11n40-HT0	3	2422	MCS0	16.50	16.46
		6	2437		15.50	15.43
		9	2452		16.00	15.95
	802.11ax40-HE0	3	2422		16.50	16.44
		6	2437		16.50	16.49
		9	2452		16.50	16.46

Main antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.15-5.25 GHz	802.11a	36	5180	6Mbps	11.50	11.39
		40	5200		11.50	11.41
		44	5220		11.50	11.42
		48	5240		11.50	11.38
	802.11n20-HT0	36	5180	MCS0	11.50	11.41
		40	5200		11.50	11.37
		44	5220		11.50	11.42
		48	5240		11.50	11.42
	802.11ac20-VHT0	36	5180	MCS0	11.50	11.32
		40	5200		11.50	11.38
		44	5220		11.50	11.33
		48	5240		11.50	11.36
	802.11ax20-HE0	36	5180	MCS0	11.50	11.41
		40	5200		11.50	11.42
		44	5220		11.50	11.36
		48	5240		11.50	11.33
	802.11n40-HT0	38	5190	MCS0	11.50	11.41
		46	5230		11.50	11.42
	802.11ac40-VHT0	38	5190	MCS0	11.50	11.32
		46	5230		11.50	11.36
	802.11ax40-HE0	38	5190	MCS0	11.50	11.41
		46	5230		11.50	11.38
	802.11ac80-VHT0	42	5210	MCS0	11.50	11.43
	802.11ax80-HE0	42	5210	MCS0	11.50	11.36
	802.11ac160-VHT0	50	5250	MCS0	11.50	11.44
	802.11ax160-HE0	50	5250	MCS0	11.50	11.42

Main antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.25-5.35 GHz	802.11a	52	5260	6Mbps	11.50	11.42
		56	5280		11.50	11.44
		60	5300		11.50	11.39
		64	5320		11.50	11.47
	802.11n20-HT0	52	5260	MCS0	11.50	11.42
		56	5280		11.50	11.48
		60	5300		11.50	11.48
		64	5320		11.50	11.45
	802.11ac20-VHT0	52	5260	MCS0	11.50	11.39
		56	5280		11.50	11.46
		60	5300		11.50	11.42
		64	5320		11.50	11.48
	802.11ax20-HE0	52	5260	MCS0	11.50	11.41
		56	5280		11.50	11.37
		60	5300		11.50	11.46
		64	5320		11.50	11.42
	802.11n40-HT0	54	5270	MCS0	11.50	11.48
		62	5310		11.50	11.49
	802.11ac40-VHT0	54	5270	MCS0	11.50	11.43
		62	5310		11.50	11.37
	802.11ax40-HE0	54	5270	MCS0	11.50	11.44
		62	5310		11.50	11.46
	802.11ac80-VHT0	58	5290	MCS0	11.50	11.47
	802.11ax80-HE0	58	5290	MCS0	11.50	11.42

Main antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5600 MHz	802.11a	100	5500	6Mbps	11.00	10.92
		104	5520		11.00	10.91
		116	5580		11.00	10.89
		120	5600		11.00	10.92
		136	5680		11.00	10.94
		140	5700		11.00	10.92
		144	5720		11.00	10.88
	802.11n20-HT0	100	5500	MCS0	11.00	10.85
		104	5520		11.00	10.91
		116	5580		11.00	10.94
		120	5600		11.00	10.96
		136	5680		11.00	10.93
		140	5700		11.00	10.89
		144	5720		11.00	10.91
	802.11ac20-VHT0	100	5500	MCS0	11.00	10.93
		104	5520		11.00	10.94
		116	5580		11.00	10.96
		120	5600		11.00	10.92
		136	5680		11.00	10.94
		140	5700		11.00	10.90
		144	5720		11.00	10.88
	802.11ax20-HE0	100	5500	MCS0	11.00	10.94
		104	5520		11.00	10.96
		116	5580		11.00	10.93
		120	5600		11.00	10.86
		136	5680		11.00	10.93
		140	5700		11.00	10.95
		144	5720		11.00	10.93

Main antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5600 MHz	802.11n40-HT0	102	5510	MCS0	11.00	10.89
		110	5550		11.00	10.85
		118	5590		11.00	10.92
		134	5670		11.00	10.93
		142	5710		11.00	10.95
	802.11ac40-VHT0	102	5510	MCS0	11.00	10.88
		110	5550		11.00	10.92
		118	5590		11.00	10.91
		134	5670		11.00	10.87
		142	5710		11.00	10.95
	802.11ax40-HE0	102	5510	MCS0	11.00	10.96
		110	5550		11.00	10.92
		118	5590		11.00	10.91
		134	5670		11.00	10.87
		142	5710		11.00	10.96
	802.11ac80-VHT0	106	5530	MCS0	11.00	10.98
		122	5610		11.00	10.90
		138	5690		11.00	10.94
	802.11ax80-HE0	106	5530	MCS0	11.00	10.94
		122	5610		11.00	10.93
		138	5690		11.00	10.91
	802.11ac160-VHT0	114	5570	MCS0	11.00	10.93
	802.11ax160-HE0	114	5570	MCS0	11.00	10.92

Main antenna						
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5800 MHz	802.11a	149	5745	6Mbps	12.00	11.92
		157	5785		12.00	11.92
		165	5825		12.00	11.89
	802.11n20-HT0	149	5745	MCS0	12.00	11.95
		157	5785		12.00	11.92
		165	5825		12.00	11.88
	802.11ac20-VHT0	149	5745	MCS0	12.00	11.96
		157	5785		12.00	11.94
		165	5825		12.00	11.91
	802.11ax20-HE0	149	5745	MCS0	12.00	11.87
		157	5785		12.00	11.94
		165	5825		12.00	11.91
	802.11n40-HT0	151	5755	MCS0	12.00	11.99
		159	5795		12.00	11.96
	802.11ac40-VHT0	151	5755	MCS0	12.00	11.95
		159	5795		12.00	11.89
	802.11ax40-HE0	151	5755	MCS0	12.00	11.94
		159	5795		12.00	11.91
	802.11ac80-VHT0	155	5775	MCS0	12.00	11.92
	802.11ax80-HE0	155	5775	MCS0	12.00	11.93

Aux antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
2450 MHz	802.11b	1	2412	1Mbps	15.50	15.47
		2	2417		15.50	15.43
		6	2437		15.50	15.49
		10	2457		15.50	15.48
		11	2462		15.50	15.42
	802.11g	1	2412	6Mbps	15.50	15.44
		2	2417		15.50	15.39
		6	2437		15.50	15.36
		10	2457		15.50	15.41
		11	2462		15.50	15.46
	802.11n20-HT0	1	2412	MCS0	15.50	15.45
		6	2437		15.50	15.42
		11	2462		15.50	15.43
	802.11ax20-HE0	1	2412		15.50	15.41
		6	2437		15.50	15.39
		11	2462		15.50	15.47
	802.11n40-HT0	3	2422	MCS0	15.50	15.47
		6	2437		15.50	15.43
		9	2452		14.50	14.45
	802.11ax40-HE0	3	2422		15.50	15.43
		6	2437		15.50	15.44
		9	2452		15.00	14.97

Aux antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.15-5.25 GHz	802.11a	36	5180	6Mbps	13.00	12.93
		40	5200		13.00	12.95
		44	5220		13.00	12.89
		48	5240		13.00	12.92
	802.11n20-HT0	36	5180	MCS0	13.00	12.95
		40	5200		13.00	12.89
		44	5220		13.00	12.95
		48	5240		13.00	12.97
	802.11ac20-VHT0	36	5180	MCS0	13.00	12.94
		40	5200		13.00	12.92
		44	5220		13.00	12.88
		48	5240		13.00	12.91
	802.11ax20-HE0	36	5180	MCS0	13.00	12.95
		40	5200		13.00	12.93
		44	5220		13.00	12.95
		48	5240		13.00	12.89
	802.11n40-HT0	38	5190	MCS0	13.00	12.95
		46	5230		13.00	12.92
	802.11ac40-VHT0	38	5190	MCS0	13.00	12.93
		46	5230		13.00	12.97
	802.11ax40-HE0	38	5190	MCS0	13.00	12.89
		46	5230		13.00	12.93
	802.11ac80-VHT0	42	5210	MCS0	13.00	12.98
	802.11ax80-HE0	42	5210	MCS0	13.00	12.95
	802.11ac160-VHT0	50	5250	MCS0	13.00	12.95
	802.11ax160-HE0	50	5250	MCS0	13.00	12.91

Aux antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.25-5.35 GHz	802.11a	52	5260	6Mbps	13.00	12.94
		56	5280		13.00	12.91
		60	5300		13.00	12.89
		64	5320		13.00	12.92
	802.11n20-HT0	52	5260	MCS0	13.00	12.95
		56	5280		13.00	12.92
		60	5300		13.00	12.96
		64	5320		13.00	12.91
	802.11ac20-VHT0	52	5260	MCS0	13.00	12.89
		56	5280		13.00	12.96
		60	5300		13.00	12.98
		64	5320		13.00	12.92
	802.11ax20-HE0	52	5260	MCS0	13.00	12.94
		56	5280		13.00	12.89
		60	5300		13.00	12.91
		64	5320		13.00	12.93
	802.11n40-HT0	54	5270	MCS0	13.00	12.97
		62	5310		13.00	12.99
	802.11ac40-VHT0	54	5270	MCS0	13.00	12.92
		62	5310		13.00	12.97
	802.11ax40-HE0	54	5270	MCS0	13.00	12.92
		62	5310		13.00	12.94
	802.11ac80-VHT0	58	5290	MCS0	13.00	12.95
	802.11ax80-HE0	58	5290	MCS0	13.00	12.91

Aux antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5600 MHz	802.11a	100	5500	6Mbps	12.00	11.95
		104	5520		12.00	11.93
		116	5580		12.00	11.89
		120	5600		12.00	11.96
		136	5680		12.00	11.95
		140	5700		12.00	11.91
		144	5720		12.00	11.92
	802.11n20-HT0	100	5500	MCS0	12.00	11.87
		104	5520		12.00	11.92
		116	5580		12.00	11.88
		120	5600		12.00	11.97
		136	5680		12.00	11.93
		140	5700		12.00	11.91
		144	5720		12.00	11.85
	802.11ac20-VHT0	100	5500	MCS0	12.00	11.88
		104	5520		12.00	11.92
		116	5580		12.00	11.98
		120	5600		12.00	11.92
		136	5680		12.00	11.94
		140	5700		12.00	11.92
		144	5720		12.00	11.96
	802.11ax20-HE0	100	5500	MCS0	12.00	11.89
		104	5520		12.00	11.91
		116	5580		12.00	11.88
		120	5600		12.00	11.84
		136	5680		12.00	11.96
		140	5700		12.00	11.92
		144	5720		12.00	11.98

Aux antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5600 MHz	802.11n40-HT0	102	5510	MCS0	12.00	11.89
		110	5550		12.00	11.92
		118	5590		12.00	11.95
		134	5670		12.00	11.97
		142	5710		12.00	11.87
	802.11ac40-VHT0	102	5510	MCS0	12.00	11.93
		110	5550		12.00	11.92
		118	5590		12.00	11.94
		134	5670		12.00	11.92
		142	5710		12.00	11.96
	802.11ax40-HE0	102	5510	MCS0	12.00	11.91
		110	5550		12.00	11.89
		118	5590		12.00	11.93
		134	5670		12.00	11.92
		142	5710		12.00	11.95
	802.11ac80-VHT0	106	5530	MCS0	12.00	11.95
		122	5610		12.00	11.93
		138	5690		12.00	11.99
	802.11ax80-HE0	106	5530	MCS0	12.00	11.92
		122	5610		12.00	11.89
		138	5690		12.00	11.94
	802.11ac160-VHT0	114	5570	MCS0	12.00	11.92
	802.11ax160-HE0	114	5570	MCS0	12.00	11.97

Aux antenna						
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5800 MHz	802.11a	149	5745	6Mbps	12.50	12.35
		157	5785		12.50	12.39
		165	5825		12.50	12.42
	802.11n20-HT0	149	5745	MCS0	12.50	12.42
		157	5785		12.50	12.43
		165	5825		12.50	12.36
	802.11ac20-VHT0	149	5745	MCS0	12.50	12.39
		157	5785		12.50	12.45
		165	5825		12.50	12.44
	802.11ax20-HE0	149	5745	MCS0	12.50	12.39
		157	5785		12.50	12.46
		165	5825		12.50	12.41
	802.11n40-HT0	151	5755	MCS0	12.50	12.48
		159	5795		12.50	12.49
	802.11ac40-VHT0	151	5755	MCS0	12.50	12.37
		159	5795		12.50	12.42
	802.11ax40-HE0	151	5755	MCS0	12.50	12.36
		159	5795		12.50	12.44
	802.11ac80-VHT0	155	5775	MCS0	12.50	12.46
	802.11ax80-HE0	155	5775	MCS0	12.50	12.45

Notebook mode

Main antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
2450 MHz	802.11b	1	2412	1Mbps	19.00	18.94
		2	2417		21.00	20.96
		6	2437		21.00	20.95
		10	2457		21.00	20.98
		11	2462		20.00	19.95
	802.11g	1	2412	6Mbps	17.00	16.89
		2	2417		21.00	20.94
		6	2437		21.00	20.93
		10	2457		21.00	20.91
		11	2462		17.00	16.95
	802.11n20-HT0	1	2412	MCS0	17.00	16.93
		6	2437		21.00	20.96
		11	2462		15.50	15.44
	802.11ax20-HE0	1	2412		17.00	16.92
		6	2437		20.00	19.97
		11	2462		15.50	15.45
	802.11n40-HT0	3	2422	MCS0	16.50	16.43
		6	2437		15.50	15.48
		9	2452		16.00	15.96
	802.11ax40-HE0	3	2422		16.50	16.48
		6	2437		16.50	16.43
		9	2452		16.50	16.47

Main antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.15-5.25 GHz	802.11a	36	5180	6Mbps	19.50	19.47
		40	5200		20.00	19.98
		44	5220		21.00	20.99
		48	5240		21.00	20.94
	802.11n20-HT0	36	5180	MCS0	19.00	18.92
		40	5200		19.50	19.44
		44	5220		21.00	20.94
		48	5240		21.00	20.96
	802.11ac20-VHT0	36	5180	MCS0	19.00	18.95
		40	5200		20.00	19.92
		44	5220		21.00	20.89
		48	5240		21.00	20.91
	802.11ax20-HE0	36	5180	MCS0	19.00	18.92
		40	5200		20.00	19.96
		44	5220		21.00	20.95
		48	5240		21.00	20.96
	802.11n40-HT0	38	5190	MCS0	18.50	18.47
		46	5230		21.00	20.96
	802.11ac40-VHT0	38	5190	MCS0	19.00	18.92
		46	5230		21.00	20.91
	802.11ax40-HE0	38	5190	MCS0	19.00	18.94
		46	5230		21.00	20.96
	802.11ac80-VHT0	42	5210	MCS0	18.50	18.42
	802.11ax80-HE0	42	5210	MCS0	18.50	18.44
	802.11ac160-VHT0	50	5250	MCS0	15.00	14.97
	802.11ax160-HE0	50	5250	MCS0	15.00	14.92

Main antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.25-5.35 GHz	802.11a	52	5260	6Mbps	21.00	20.99
		56	5280		21.00	20.96
		60	5300		21.00	20.94
		64	5320		18.50	18.44
	802.11n20-HT0	52	5260	MCS0	21.00	20.94
		56	5280		21.00	20.91
		60	5300		21.00	20.98
		64	5320		18.50	18.48
	802.11ac20-VHT0	52	5260	MCS0	21.00	20.91
		56	5280		21.00	20.89
		60	5300		21.00	20.93
		64	5320		18.50	18.43
	802.11ax20-HE0	52	5260	MCS0	21.00	20.93
		56	5280		21.00	20.98
		60	5300		21.00	20.95
		64	5320		18.50	18.44
	802.11n40-HT0	54	5270	MCS0	20.50	20.41
		62	5310		17.50	17.48
	802.11ac40-VHT0	54	5270	MCS0	20.50	20.44
		62	5310		17.50	17.39
	802.11ax40-HE0	54	5270	MCS0	20.50	20.47
		62	5310		17.50	17.45
	802.11ac80-VHT0	58	5290	MCS0	15.50	15.45
	802.11ax80-HE0	58	5290	MCS0	15.00	14.98

Main antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5600 MHz	802.11a	100	5500	6Mbps	19.50	19.46
		104	5520		21.00	20.92
		116	5580		21.00	20.89
		120	5600		21.00	20.91
		136	5680		21.00	20.86
		140	5700		21.00	20.91
		144	5720		21.00	20.93
	802.11n20-HT0	100	5500	MCS0	19.00	18.92
		104	5520		21.00	20.91
		116	5580		21.00	20.86
		120	5600		21.00	20.89
		136	5680		21.00	20.86
		140	5700		21.00	20.91
		144	5720		21.00	20.89
	802.11ac20-VHT0	100	5500	MCS0	19.00	18.97
		104	5520		21.00	20.92
		116	5580		21.00	20.91
		120	5600		21.00	20.85
		136	5680		21.00	20.89
		140	5700		21.00	20.93
		144	5720		21.00	20.93
	802.11ax20-HE0	100	5500	MCS0	19.00	18.99
		104	5520		21.00	20.94
		116	5580		21.00	20.91
		120	5600		21.00	20.92
		136	5680		21.00	20.89
		140	5700		21.00	20.85
		144	5720		21.00	20.91

Main antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5600 MHz	802.11n40-HT0	102	5510	MCS0	18.50	18.46
		110	5550		21.00	20.95
		118	5590		21.00	20.91
		134	5670		19.50	19.46
		142	5710		21.00	20.94
	802.11ac40-VHT0	102	5510	MCS0	18.50	18.41
		110	5550		21.00	20.94
		118	5590		21.00	20.91
		134	5670		19.00	18.89
		142	5710		21.00	20.89
	802.11ax40-HE0	102	5510	MCS0	18.50	18.45
		110	5550		21.00	20.92
		118	5590		21.00	20.93
		134	5670		19.00	18.97
		142	5710		21.00	20.87
	802.11ac80-VHT0	106	5530	MCS0	19.00	18.93
		122	5610		20.00	19.95
		138	5690		20.50	20.46
	802.11ax80-HE0	106	5530	MCS0	19.00	18.93
		122	5610		19.50	19.48
		138	5690		21.00	20.96
	802.11ac160-VHT0	114	5570	MCS0	14.50	14.42
	802.11ax160-HE0	114	5570	MCS0	14.50	14.44

Main antenna						
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5800 MHz	802.11a	149	5745	6Mbps	21.00	20.94
		157	5785		21.00	20.97
		165	5825		21.00	20.89
	802.11n20-HT0	149	5745	MCS0	21.00	20.92
		157	5785		21.00	20.95
		165	5825		21.00	20.91
	802.11ac20-VHT0	149	5745	MCS0	21.00	20.98
		157	5785		21.00	20.94
		165	5825		21.00	20.89
	802.11ax20-HE0	149	5745	MCS0	21.00	20.93
		157	5785		21.00	20.96
		165	5825		21.00	20.91
	802.11n40-HT0	151	5755	MCS0	21.00	20.99
		159	5795		21.00	20.95
	802.11ac40-VHT0	151	5755	MCS0	21.00	20.94
		159	5795		21.00	20.89
	802.11ax40-HE0	151	5755	MCS0	20.50	20.47
		159	5795		21.00	20.94
	802.11ac80-VHT0	155	5775	MCS0	18.50	18.44
	802.11ax80-HE0	155	5775	MCS0	18.50	18.46

Aux antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
2450 MHz	802.11b	1	2412	1Mbps	19.50	19.43
		2	2417		20.50	20.47
		6	2437		20.50	20.42
		10	2457		20.50	20.49
		11	2462		19.50	19.47
	802.11g	1	2412	6Mbps	17.00	16.97
		2	2417		21.00	20.99
		6	2437		21.00	20.95
		10	2457		21.00	20.93
		11	2462		17.00	16.92
	802.11n20-HT0	1	2412	MCS0	17.00	16.92
		6	2437		21.00	20.95
		11	2462		15.50	15.48
	802.11ax20-HE0	1	2412		17.00	16.96
		6	2437		20.00	19.92
		11	2462		15.50	15.42
	802.11n40-HT0	3	2422	MCS0	16.50	15.46
		6	2437		15.50	15.48
		9	2452		14.50	14.41
	802.11ax40-HE0	3	2422		16.50	16.39
		6	2437		15.50	15.47
		9	2452		15.00	14.96

Aux antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.15-5.25 GHz	802.11a	36	5180	6Mbps	19.00	18.93
		40	5200		19.50	19.49
		44	5220		21.00	20.99
		48	5240		21.00	20.93
	802.11n20-HT0	36	5180	MCS0	18.50	18.45
		40	5200		19.50	19.47
		44	5220		21.00	20.95
		48	5240		20.50	20.43
	802.11ac20-VHT0	36	5180	MCS0	19.00	18.94
		40	5200		20.00	19.99
		44	5220		21.00	20.94
		48	5240		21.00	20.89
	802.11ax20-HE0	36	5180	MCS0	19.00	18.95
		40	5200		20.00	19.97
		44	5220		21.00	20.93
		48	5240		21.00	20.96
	802.11n40-HT0	38	5190	MCS0	18.50	18.44
		46	5230		21.00	20.95
	802.11ac40-VHT0	38	5190	MCS0	18.50	18.45
		46	5230		21.00	20.92
	802.11ax40-HE0	38	5190	MCS0	18.50	18.42
		46	5230		20.50	20.48
	802.11ac80-VHT0	42	5210	MCS0	18.50	18.43
	802.11ax80-HE0	42	5210	MCS0	18.50	18.49
	802.11ac160-VHT0	50	5250	MCS0	15.00	14.45
	802.11ax160-HE0	50	5250	MCS0	15.00	14.41

Aux antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.25-5.35 GHz	802.11a	52	5260	6Mbps	21.00	20.98
		56	5280		21.00	20.99
		60	5300		21.00	20.91
		64	5320		18.50	18.44
	802.11n20-HT0	52	5260	MCS0	21.00	20.92
		56	5280		21.00	20.93
		60	5300		21.00	20.91
		64	5320		18.50	18.48
	802.11ac20-VHT0	52	5260	MCS0	21.00	20.93
		56	5280		21.00	20.91
		60	5300		21.00	20.95
		64	5320		18.00	17.92
	802.11ax20-HE0	52	5260	MCS0	21.00	20.96
		56	5280		21.00	20.92
		60	5300		21.00	20.89
		64	5320		18.00	17.96
	802.11n40-HT0	54	5270	MCS0	20.50	20.45
		62	5310		17.50	17.47
	802.11ac40-VHT0	54	5270	MCS0	20.50	20.47
		62	5310		17.50	17.42
	802.11ax40-HE0	54	5270	MCS0	20.50	20.43
		62	5310		17.50	17.44
	802.11ac80-VHT0	58	5290	MCS0	15.00	14.96
	802.11ax80-HE0	58	5290	MCS0	15.00	14.92

Aux antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5600 MHz	802.11a	100	5500	6Mbps	19.00	18.92
		104	5520		21.00	20.94
		116	5580		21.00	20.92
		120	5600		21.00	20.95
		136	5680		21.00	20.89
		140	5700		21.00	20.91
		144	5720		21.00	20.96
	802.11n20-HT0	100	5500	MCS0	19.00	18.96
		104	5520		21.00	20.92
		116	5580		21.00	20.92
		120	5600		21.00	20.96
		136	5680		21.00	20.87
		140	5700		21.00	20.92
		144	5720		21.00	20.96
	802.11ac20-VHT0	100	5500	MCS0	19.00	18.98
		104	5520		21.00	20.89
		116	5580		21.00	20.91
		120	5600		21.00	20.93
		136	5680		21.00	20.98
		140	5700		21.00	20.89
		144	5720		21.00	20.93
	802.11ax20-HE0	100	5500	MCS0	19.00	18.96
		104	5520		21.00	20.93
		116	5580		21.00	20.93
		120	5600		21.00	20.89
		136	5680		21.00	20.85
		140	5700		21.00	20.96
		144	5720		21.00	20.93

Aux antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5600 MHz	802.11n40-HT0	102	5510	MCS0	18.50	18.47
		110	5550		21.00	20.97
		118	5590		21.00	20.89
		134	5670		19.50	19.47
		142	5710		21.00	20.99
	802.11ac40-VHT0	102	5510	MCS0	18.50	18.45
		110	5550		21.00	20.91
		118	5590		21.00	20.89
		134	5670		19.00	18.96
		142	5710		21.00	20.97
	802.11ax40-HE0	102	5510	MCS0	18.50	18.44
		110	5550		21.00	20.94
		118	5590		21.00	20.91
		134	5670		19.00	18.93
		142	5710		21.00	20.96
	802.11ac80-VHT0	106	5530	MCS0	19.00	18.97
		122	5610		20.00	19.96
		138	5690		21.00	20.92
	802.11ax80-HE0	106	5530	MCS0	19.00	18.97
		122	5610		19.50	19.43
		138	5690		21.00	20.91
	802.11ac160-VHT0	114	5570	MCS0	14.50	14.46
	802.11ax160-HE0	114	5570	MCS0	14.50	14.43

Aux antenna						
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5800 MHz	802.11a	149	5745	6Mbps	21.00	20.93
		157	5785		21.00	20.89
		165	5825		21.00	20.96
	802.11n20-HT0	149	5745	MCS0	21.00	20.91
		157	5785		21.00	20.92
		165	5825		21.00	20.88
	802.11ac20-VHT0	149	5745	MCS0	21.00	20.96
		157	5785		21.00	20.93
		165	5825		21.00	20.91
	802.11ax20-HE0	149	5745	MCS0	21.00	20.93
		157	5785		21.00	20.88
		165	5825		21.00	20.84
	802.11n40-HT0	151	5755	MCS0	21.00	20.95
		159	5795		21.00	20.99
	802.11ac40-VHT0	151	5755	MCS0	21.00	20.93
		159	5795		21.00	20.89
	802.11ax40-HE0	151	5755	MCS0	21.00	20.94
		159	5795		21.00	20.91
	802.11ac80-VHT0	155	5775	MCS0	19.00	18.93
	802.11ax80-HE0	155	5775	MCS0	19.00	18.98

Bluetooth conducted power table:

Mode	Channel	Frequency (MHz)	1Mbps		2Mbps		3Mbps	
			Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
BR/EDR	CH 00	2402	10.50	8.51	10.00	7.03	10.00	6.98
	CH 39	2441		9.02		7.52		7.55
	CH 78	2480		9.42		7.74		7.65

Mode	Channel	Frequency (MHz)	GFSK	
			Max. Rated Avg.Power + Max. Tolerance (dBm)	Average Output Power (dBm)
LE	CH 00	2402	9	7.54
	CH 19	2440		7.85
	CH 39	2480		8.14

BT 2.88/3.75=0.768

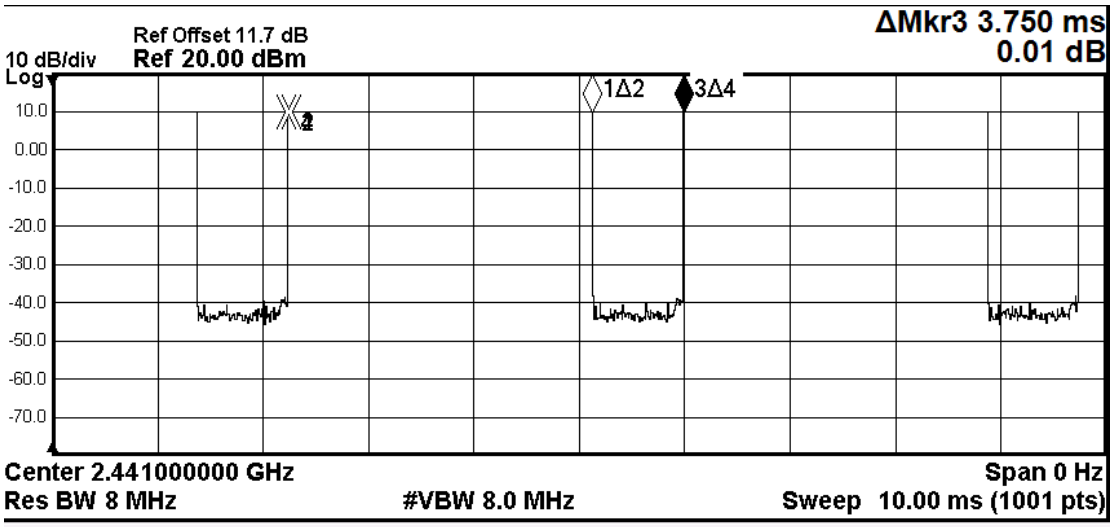

MKR	MODE	TRC	SCL	X		Y		FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ2	1	t	(Δ)	2.880 ms	(Δ)	-0.06 dB			
2	F	1	t		2.240 ms		9.75 dBm			
3	Δ4	1	t	(Δ)	3.750 ms	(Δ)	0.01 dB			
4	F	1	t		2.240 ms		9.75 dBm			
5										
6										
7										
8										
9										
10										
11										

Wifi b 8.36/8.4=0.995

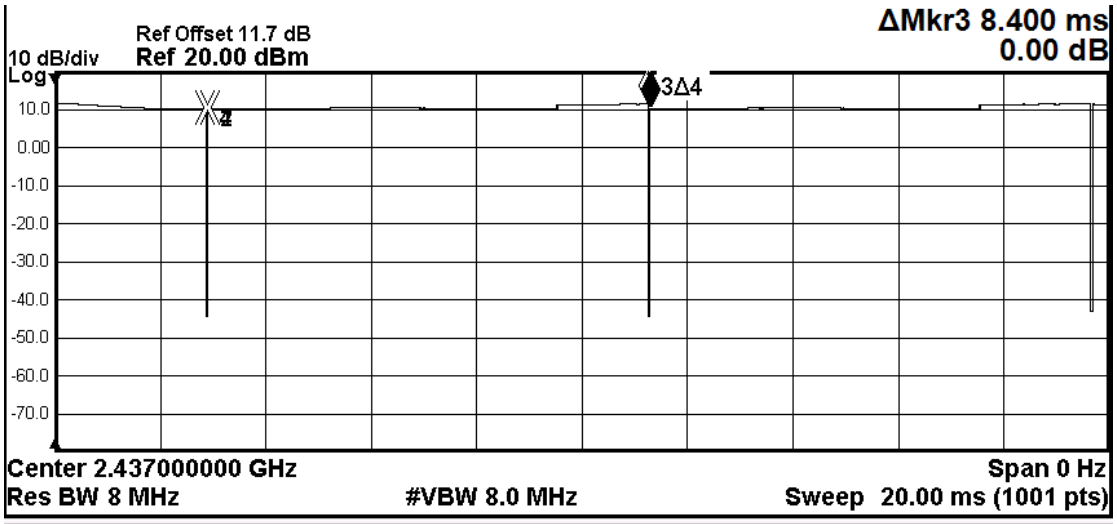

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ2	1	t	(Δ) 8.360 ms	(Δ) 1.11 dB			
2	F	1	t	2.900 ms	10.30 dBm			
3	Δ4	1	t	(Δ) 8.400 ms	(Δ) 0.00 dB			
4	F	1	t	2.900 ms	10.30 dBm			
5								
6								
7								
8								
9								
10								
11								

Wifi g 2.09/2.135=0.979

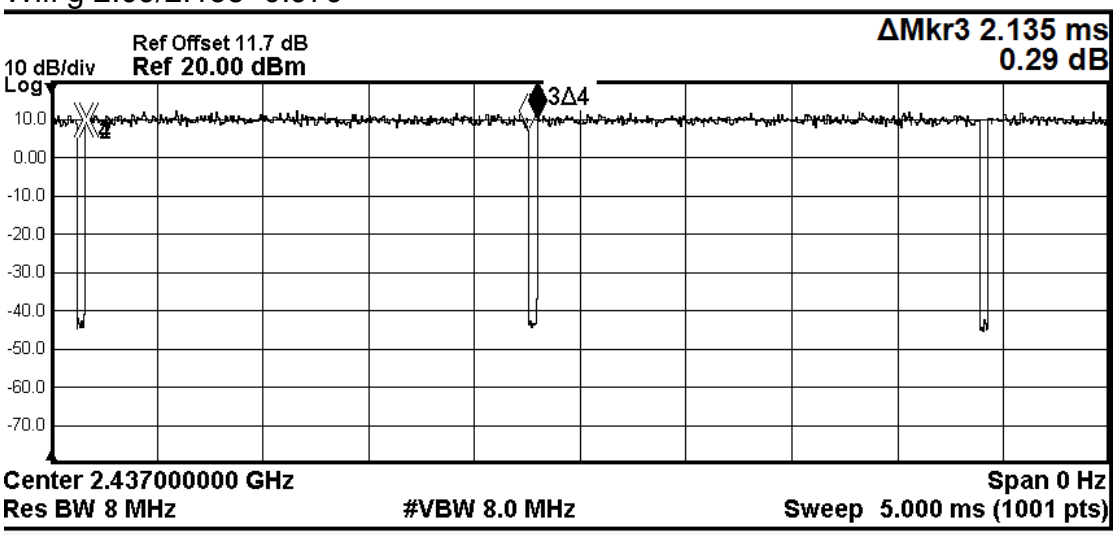

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ2	1	t	(Δ) 2.090 ms	(Δ) -2.57 dB			
2	F	1	t	165.0 µs	9.82 dBm			
3	Δ4	1	t	(Δ) 2.135 ms	(Δ) 0.29 dB			
4	F	1	t	165.0 µs	9.82 dBm			
5								
6								
7								
8								
9								
10								
11								

Wifi a 5G 2.09/2.135=0.979

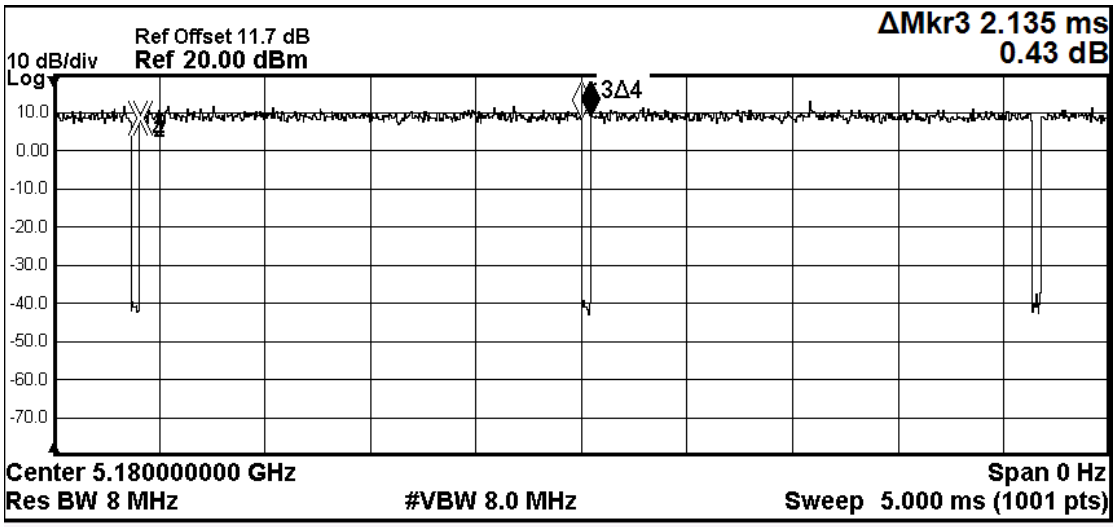

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ2	1	t	(Δ) 2.090 ms	(Δ) -0.14 dB			
2	F	1	t	410.0 µs	8.33 dBm			
3	Δ4	1	t	(Δ) 2.135 ms	(Δ) 0.43 dB			
4	F	1	t	410.0 µs	8.33 dBm			
5								
6								
7								
8								
9								
10								
11								

Wifi n40 5G 3.97/4.01=0.99

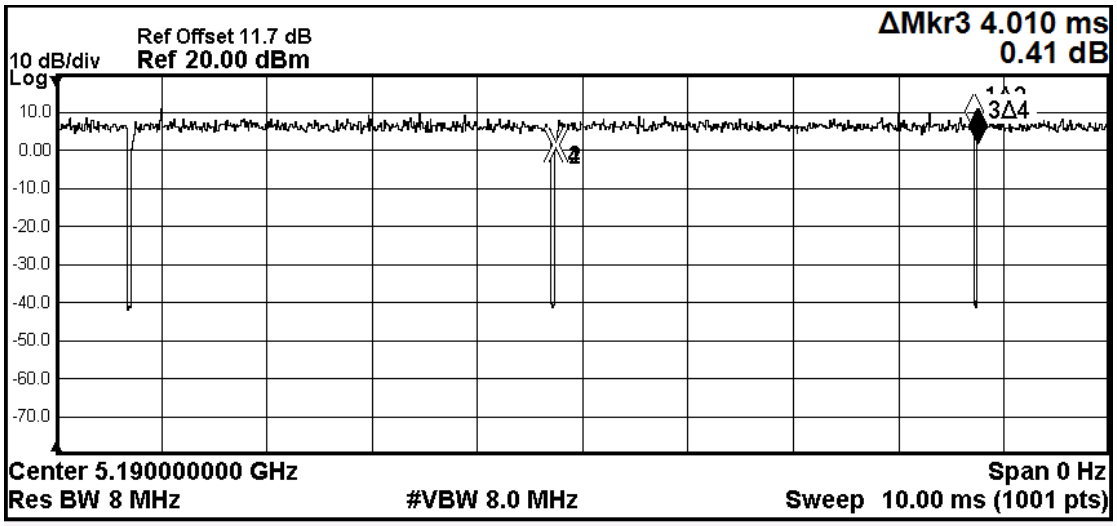

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ2	1	t	(Δ) 3.970 ms	(Δ) 3.94 dB			
2	F	1	t	4.740 ms	1.27 dBm			
3	Δ4	1	t	(Δ) 4.010 ms	(Δ) 0.41 dB			
4	F	1	t	4.740 ms	1.27 dBm			
5								
6								
7								
8								
9								
10								
11								

Wifi ac 80 5G 3.97/4.01=0.99

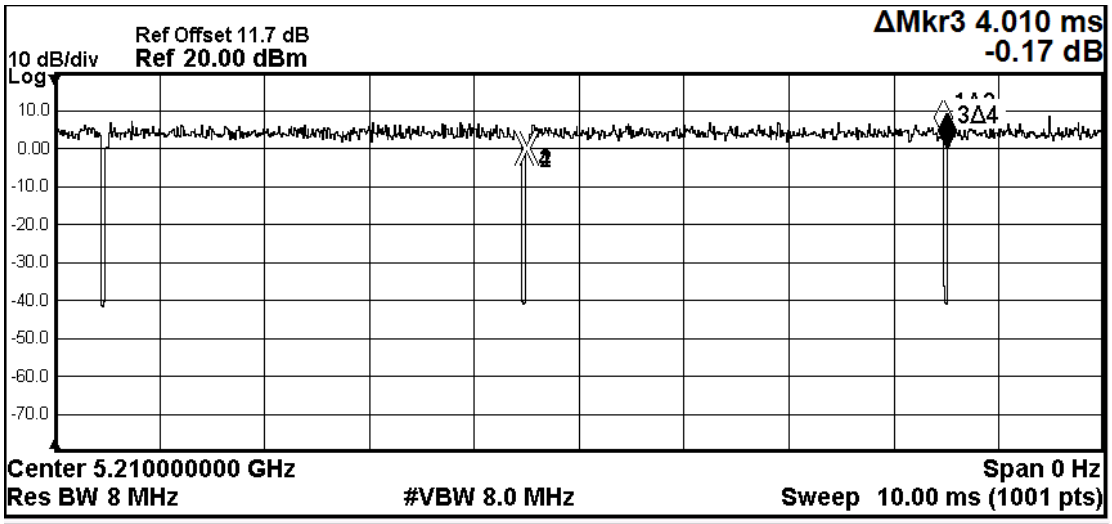

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ2	1	t	(Δ) 3.970 ms	(Δ) 3.34 dB			
2	F	1	t	4.500 ms	-0.04 dBm			
3	Δ4	1	t	(Δ) 4.010 ms	(Δ) -0.17 dB			
4	F	1	t	4.500 ms	-0.04 dBm			
5								
6								
7								
8								
9								
10								
11								

Wifi ax80 5G 3.96/4=0.99

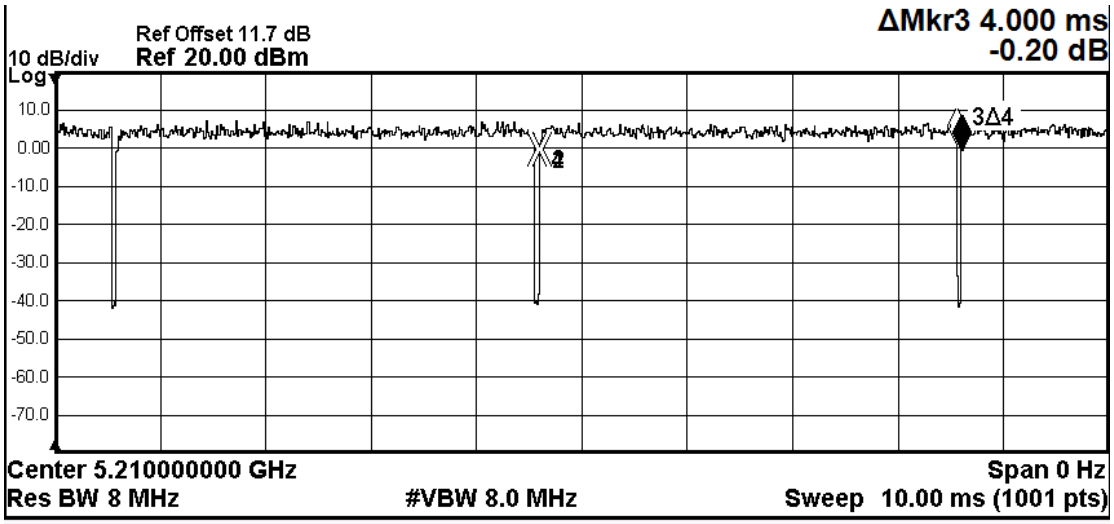

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ2	1	t	(Δ) 3.960 ms	(Δ) 1.47 dB			
2	F	1	t	4.600 ms	-0.50 dBm			
3	Δ4	1	t	(Δ) 4.000 ms	(Δ) -0.20 dB			
4	F	1	t	4.600 ms	-0.50 dBm			
5								
6								
7								
8								
9								
10								
11								

Wifi ac160 5G 3.96/4.01=0.988

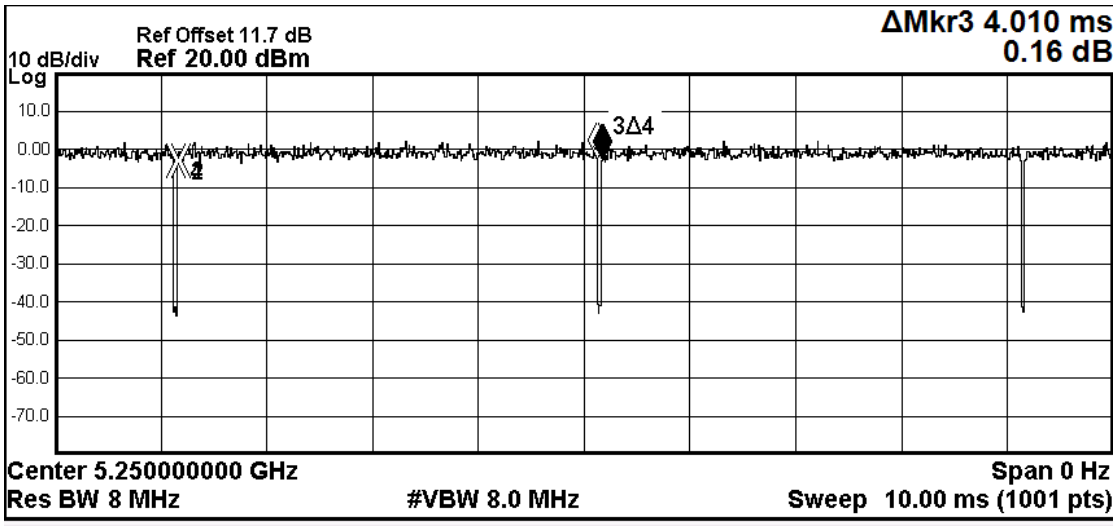

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ2	1	t	(Δ) 3.960 ms	(Δ) 0.64 dB			
2	F	1	t	1.160 ms	-3.10 dBm			
3	Δ4	1	t	(Δ) 4.010 ms	(Δ) 0.16 dB			
4	F	1	t	1.160 ms	-3.10 dBm			
5								
6								
7								
8								
9								
10								
11								

1.4 Test Environment

Ambient Temperature: 22±2° C
Tissue Simulating Liquid: 22±2° C

1.5 Operation Description

Use chipset specific software to control the EUT, and makes it transmit in maximum power. Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s). The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.

The device is a convertible laptop computer with RF feature. The device will adjust the maximum output power for different user scenario and EUT was tested as below based on FCC guidance.

Tablet mode

Back/edges_0mm.

Laptop mode

Keyboard bottom touch against the flat phantom.

Note:

802.11b DSSS SAR Test Requirements:

1. SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.

2. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

802.11g/n OFDM SAR Test Exclusion Requirements:

3. SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Initial Test Configuration:

4. An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band.

5. SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

6. Since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for subsequent test configuration.

7. BT and WLAN Aux use the same antenna path, but they can't transmit at the same time.
8. According to KDB447498 D01, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is ≤ 0.8 W/kg, when the transmission band is ≤ 100 MHz.
9. According to KDB865664 D01, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~10% from the 1-g SAR limit)
10. Based on FCC guidance, general principles of KDB248227D01 can be applied to 802.11ax to determine initial test configuration with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency band.

1.6 Operating modes validation by power measurement

The device is a convertible laptop computer with predefined single fixed power to each device modes.
For the operating modes validation, the measured conducted output power is monitored qualitatively to identify the triggering characteristics and recorded quantitatively.

DUT operating mode	Lid Angle Range	TX Power
Lid Close	0° ≤ Lid angle < 45 ° (Lid Hall Sensor Trigger)	No TX Transmission
Notebook	45° ≤ Lid angle < 200° (Lid Hall Sensor Release)	Full Power Level
Tablet mode	200° ≤ Lid angle ≤ 360°	Reduced Power Level

1.6.1 Results and conclusion

Based on 2019-11 TCB workshop guidance, the measured output power versus lid angle is tabulated in the following table, and the triggering verification complies with the device mode / power level declared by the manufacturer.

Operating mode validation by power measurement

Main Antenna

Antenna	Operation mode	Lid angle(°)	802.11b	802.11ac(160M) 5.2G	802.11n(40M) 5.2G	802.11ac(80M) 5.3G	802.11a 5.3G	802.11ac(160M) 5.6G	802.11ax(80M) 5.6G	802.11ac(80M) 5.8G	802.11n(40M) 5.8G
Main	Lid	0	na	na	na	na	na	na	na	na	na
		10	na	na	na	na	na	na	na	na	na
		20	na	na	na	na	na	na	na	na	na
		30	na	na	na	na	na	na	na	na	na
		40	na	na	na	na	na	na	na	na	na
	NB	50	20.96	14.66	21.00	15.36	20.71	14.26	20.91	18.23	20.51
		45	20.66	14.81	20.85	15.35	20.77	14.31	20.74	18.28	20.76
	Lid	40	na	na	na	na	na	na	na	na	na
		41	na	na	na	na	na	na	na	na	na
		42	na	na	na	na	na	na	na	na	na
		43	na	na	na	na	na	na	na	na	na
		44	na	na	na	na	na	na	na	na	na
	NB	45	20.62	14.82	20.81	15.11	20.92	14.42	20.78	18.20	20.60
		46	20.94	14.74	20.95	15.41	20.80	14.32	20.76	18.37	20.73
		47	20.73	14.96	20.80	15.36	20.85	14.47	20.73	18.21	20.86
		48	20.80	14.78	20.69	15.21	20.73	14.40	20.80	18.34	20.81
		49	20.67	14.86	20.61	15.29	20.73	14.15	20.99	18.40	20.91
		50	20.62	14.67	20.72	15.39	20.98	14.26	20.87	18.15	20.63
		60	20.53	14.97	20.85	15.47	20.70	14.45	20.77	18.37	20.62
		70	20.65	14.84	20.93	15.42	20.66	14.45	20.83	18.19	20.71
		80	20.75	14.91	20.89	15.46	20.99	14.25	20.61	18.30	20.83
		90	20.58	14.78	20.64	15.44	20.73	14.24	20.72	18.28	20.91
		100	20.99	14.99	20.93	15.22	20.79	14.46	20.87	18.24	20.70
		110	21.00	14.99	20.63	15.21	20.70	14.48	20.76	18.33	20.88
		120	20.70	14.70	20.88	15.28	20.87	14.22	20.91	18.46	20.69
		130	20.96	14.76	20.89	15.15	20.64	14.23	20.88	18.23	20.97
		140	20.79	14.73	20.85	15.33	20.61	14.39	20.95	18.27	20.62
		150	20.68	14.92	20.80	15.41	20.84	14.27	20.62	18.10	20.52
		160	20.88	14.73	20.72	15.28	20.91	14.16	20.76	18.41	20.89
		170	20.70	14.65	20.85	15.47	20.79	14.41	20.66	18.30	20.53
		180	20.83	14.66	20.73	15.38	20.88	14.23	20.61	18.32	20.55
		190	20.85	14.99	20.78	15.12	20.82	14.10	20.70	18.18	20.85
		200	20.98	14.88	20.81	15.49	20.73	14.49	20.63	18.35	20.60
		210	20.79	14.69	20.80	15.30	20.95	14.13	20.80	18.42	20.65
		205	20.90	14.80	20.66	15.21	20.74	14.15	20.93	18.23	20.89
		200	20.64	14.75	20.89	15.35	20.94	14.39	20.94	18.46	20.72
		195	20.84	14.83	20.93	15.47	20.95	14.25	20.88	18.29	20.70
		196	20.59	14.92	20.63	15.48	20.63	14.10	20.60	18.34	20.89
		197	20.97	14.75	20.83	15.37	20.71	14.25	20.92	18.46	20.89
		198	20.58	14.79	20.94	15.38	20.79	14.34	20.87	18.45	20.86
		199	20.84	14.88	20.78	15.41	20.83	14.42	20.86	18.33	20.58

Antenna	Operation mode	Lid angle(°)	802.11b	802.11ac(160M) 5.2G	802.11n(40M) 5.2G	802.11ac(80M) 5.3G	802.11a 5.3G	802.11ac(160M) 5.6G	802.11ax(80M) 5.6G	802.11ac(80M) 5.8G	802.11n(40M) 5.8G
Main	Tablet	200	19.91	11.11	11.38	11.37	11.12	10.91	10.97	11.76	11.66
		201	19.92	11.47	11.29	11.47	11.26	10.86	10.99	11.79	11.90
		202	19.69	11.11	11.16	11.11	11.31	10.96	10.81	11.90	11.80
		203	19.51	11.12	11.22	11.18	11.26	10.70	10.61	11.75	11.89
		204	19.53	11.22	11.32	11.13	11.26	10.73	10.64	11.57	11.84
		205	19.51	11.25	11.49	11.41	11.15	10.98	10.70	11.65	11.67
		215	19.97	11.26	11.26	11.27	11.23	10.84	10.96	11.59	11.86
		225	19.80	11.33	11.43	11.16	11.20	10.50	10.96	11.93	11.75
		235	19.76	11.42	11.26	11.44	11.45	10.98	10.95	11.53	11.61
		245	19.63	11.41	11.25	11.44	11.24	10.95	10.66	11.90	11.64
		255	19.73	11.20	11.14	11.08	11.28	10.97	10.74	11.64	11.70
		265	19.61	11.42	11.44	11.01	11.42	10.53	11.00	11.82	11.78
		275	19.79	11.20	11.17	11.42	11.36	10.54	10.64	11.70	11.70
		285	19.79	11.02	11.20	11.36	11.36	10.77	10.91	11.89	11.91
		295	19.52	11.24	11.12	11.28	11.16	10.93	10.77	11.66	11.96
		305	19.72	11.40	11.27	11.19	11.50	10.95	10.73	11.52	11.68
		315	19.52	11.23	11.33	11.12	11.45	10.62	10.85	11.90	11.82
		325	19.88	11.12	11.36	11.09	11.22	10.92	10.86	11.58	11.67
		335	19.51	11.27	11.25	11.24	11.43	10.92	10.99	11.78	11.76
		345	19.73	11.17	11.28	11.03	11.16	10.66	10.80	11.65	11.72
		355	19.97	11.26	11.47	11.12	11.26	10.82	10.99	11.56	11.93
		360	19.94	11.20	11.43	11.12	11.25	10.56	10.70	11.96	11.69
		350	19.75	11.47	11.21	11.35	11.42	10.84	10.98	11.76	11.62
		340	19.68	11.37	11.25	11.14	11.33	10.98	10.68	11.84	11.72
		330	19.85	11.41	11.26	11.11	11.49	10.63	10.87	11.95	11.95
		320	19.84	11.28	11.49	11.46	11.23	10.93	10.66	11.69	11.63
		310	19.81	11.49	11.19	11.38	11.39	10.62	10.91	11.58	11.82
		300	19.61	11.25	11.28	11.10	11.43	10.74	10.81	11.69	11.71
		290	19.57	11.39	11.38	11.34	11.38	10.63	10.63	11.92	11.61
		280	19.80	11.40	11.29	11.28	11.37	10.89	10.83	11.75	11.71
		270	19.98	11.08	11.49	11.33	11.11	10.89	10.72	11.62	11.94
		260	19.96	11.38	11.25	11.05	11.42	10.82	10.63	11.73	12.00
		250	19.85	11.32	11.31	11.14	11.41	10.81	10.82	11.86	11.89
		240	19.69	11.14	11.47	11.20	11.35	10.64	10.97	11.75	11.88
		230	19.77	11.33	11.42	11.07	11.22	10.59	10.87	11.56	11.74
		220	19.86	11.45	11.41	11.41	11.36	10.52	10.80	11.53	11.85
		210	19.59	11.17	11.24	11.24	11.49	10.74	10.62	11.97	11.65
		200	19.79	11.43	11.13	11.14	11.48	10.89	10.69	11.82	11.71
	NB	190	20.56	14.82	20.78	15.16	20.70	20.61	20.62	18.29	20.67
		195	20.98	14.99	20.69	15.49	20.90	20.80	20.67	18.15	20.91
	Tablet	200	19.81	11.35	11.36	11.29	11.13	10.65	10.65	11.63	11.61
		205	19.92	11.49	11.31	11.39	11.48	10.94	10.69	11.64	11.85
		204	19.86	11.13	11.14	11.07	11.41	10.79	10.79	11.57	11.78
		203	19.63	11.41	11.40	11.09	11.26	10.55	10.88	11.71	11.86
		202	19.72	11.16	11.30	11.38	11.42	10.76	10.60	11.65	11.77
		201	19.82	11.32	11.29	11.23	11.24	10.73	10.88	11.94	11.93
		200	19.79	11.37	11.49	11.44	11.24	10.64	10.73	11.84	11.85
	NB	199	20.73	14.63	20.67	15.20	20.81	14.24	20.86	18.33	20.80
		198	20.72	14.60	20.69	15.47	20.91	14.45	20.81	18.12	20.86
		197	20.78	14.98	20.88	15.31	20.83	14.16	20.71	18.43	20.66
		196	20.77	15.00	20.64	15.20	20.93	14.33	20.73	18.32	20.93
		195	20.50	14.72	20.85	15.16	20.72	14.31	20.83	18.38	20.82
		185	20.90	14.67	20.73	15.10	20.67	14.18	20.79	18.34	20.53
		175	20.70	14.71	20.90	15.27	20.78	14.45	20.95	18.15	20.92
		165	20.93	14.88	20.78	15.46	20.75	14.48	20.80	18.28	20.70
		155	20.56	14.77	20.93	15.22	20.67	14.40	20.99	18.22	20.89
		145	20.73	14.89	20.75	15.29	20.62	14.40	20.82	18.50	20.86
		135	20.85	14.69	20.75	15.17	20.90	14.40	20.98	18.27	20.61
		125	20.73	14.66	20.79	15.30	20.67	14.17	20.61	18.11	20.55
		115	20.50	14.68	20.93	15.45	20.83	14.41	20.96	18.17	20.82
		105	20.90	14.67	20.72	15.30	20.89	14.38	20.68	18.35	20.67
		95	20.62	14.82	20.95	15.43	20.78	14.36	20.83	18.50	20.58
		85	20.61	14.81	20.71	15.12	20.67	14.24	20.68	18.35	20.84
		75	20.85	14.67	20.66	15.12	20.72	14.41	20.61	18.41	20.94
		65	20.56	14.65	20.64	15.25	20.93	14.39	20.61	18.14	20.65
		55	20.93	14.95	20.74	15.23	20.83	14.40	20.80	18.46	20.98
		45	20.62	14.92	20.97	15.48	20.88	14.48	20.73	18.27	20.55
	Lid	35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	NB	45	20.55	14.88	20.90	15.26	20.66	14.39	20.91	18.22	20.81
		50	20.69	14.91	20.85	15.16	20.65	14.25	20.71	18.23	20.74
		49	20.67	14.91	20.70	15.31	20.86	14.46	20.67	18.41	20.59
		48	20.71	14.69	20.74	15.31	20.76	14.19	20.71	18.39	20.76
		47	20.68	14.88	20.95	15.28	20.75	14.14	20.98	18.19	20.61
		46	20.92	14.63	20.67	15.15	20.93	14.47	20.70	18.35	20.50
		45	20.67	14.85	20.95	15.29	20.77	14.35	20.93	18.12	20.58
	Lid	44	na	na	na	na	na	na	na	na	na
		43	na	na	na	na	na	na	na	na	na
		42	na	na	na	na	na	na	na	na	na
		41	na	na	na	na	na	na	na	na	na
		40	na	na	na	na	na	na	na	na	na
		30	na	na	na	na	na	na	na	na	na
		20	na	na	na	na	na	na	na	na	na
		10	na	na	na	na	na	na	na	na	na
		0	na	na	na	na	na	na	na	na	na

Aux Antenna

Antenna	Operation mode	Lid angle(°)	802.11g	802.11g	802.11ac(160M) 5.2G	802.11n(40M) 5.2G	802.11ac(80M) 5.3G	802.11a 5.3G	802.11ac(160M) 5.6G	802.11ac(80M) 5.6G	802.11ac(80M) 5.8G	802.11n(40M) 5.8G
Aux	Lid	0	na	na	na	na	na	na	na	na	na	na
		10	na	na	na	na	na	na	na	na	na	na
		20	na	na	na	na	na	na	na	na	na	na
		30	na	na	na	na	na	na	na	na	na	na
		40	na	na	na	na	na	na	na	na	na	na
	NB	50	20.19	20.88	14.79	20.59	14.91	20.98	14.16	20.79	18.74	20.52
		45	20.11	20.86	14.99	20.87	14.87	20.97	14.49	20.68	19.00	20.76
	Lid	40	na	na	na	na	na	na	na	na	na	na
		41	na	na	na	na	na	na	na	na	na	na
		42	na	na	na	na	na	na	na	na	na	na
		43	na	na	na	na	na	na	na	na	na	na
		44	na	na	na	na	na	na	na	na	na	na
	NB	45	20.19	20.99	14.85	20.71	15.00	21.00	14.28	20.80	18.99	20.91
		46	20.15	20.95	14.85	20.69	14.82	20.76	14.27	20.79	18.93	20.57
		47	20.22	20.68	14.99	20.79	14.82	20.92	14.40	20.71	18.62	20.98
		48	20.21	20.71	14.88	20.69	14.65	20.79	14.31	20.59	18.76	20.65
		49	20.11	20.92	14.72	20.55	14.76	20.73	14.25	20.78	18.79	20.83
		50	20.10	20.82	14.63	20.53	14.60	20.78	14.32	20.78	18.94	20.80
		60	20.19	20.84	14.77	20.81	14.96	20.77	14.26	20.85	18.65	20.53
		70	20.21	20.90	14.93	20.99	14.61	20.90	14.21	20.52	18.66	20.75
		80	20.17	20.63	14.72	20.75	14.76	20.70	14.32	20.65	18.95	20.51
		90	20.27	20.92	14.93	20.99	14.74	20.77	14.33	20.97	18.74	20.53
		100	20.16	20.97	14.95	20.54	14.71	20.91	14.33	20.67	18.65	20.92
		110	20.25	20.97	14.98	20.90	14.92	20.78	14.47	20.75	18.89	20.88
		120	20.31	20.63	14.75	20.99	14.91	20.75	14.27	20.64	18.92	20.98
		130	20.15	20.71	14.61	20.52	14.86	20.57	14.40	20.86	18.87	20.68
		140	20.27	20.76	14.66	20.97	14.77	20.78	14.34	20.71	18.83	20.86
		150	20.13	20.91	14.68	20.71	14.84	20.67	14.21	20.56	18.83	20.98
		160	20.48	20.87	14.63	20.93	14.82	20.84	14.15	20.95	18.90	20.58
		170	20.23	20.81	14.65	20.92	14.91	20.90	14.22	20.51	18.83	20.78
		180	20.45	20.71	14.82	20.59	14.84	20.95	14.28	20.85	18.79	20.51
		190	20.21	20.94	14.65	20.70	14.99	20.61	14.19	20.90	18.72	20.97
		200	20.26	20.94	14.97	20.94	14.71	20.93	14.16	20.56	18.69	20.61
		210	20.12	20.64	14.63	20.57	14.66	20.52	14.23	20.53	18.76	20.51
		205	20.42	20.66	14.92	20.51	14.81	20.67	14.21	20.91	18.60	20.86
		200	20.22	20.73	15.00	20.71	14.77	20.91	14.21	20.90	18.75	20.94
		195	20.11	20.93	14.70	20.92	14.84	20.73	14.17	20.94	18.94	20.95
		196	20.16	20.89	14.90	20.74	14.60	20.57	14.24	20.58	18.67	20.90
		197	20.37	20.72	14.89	20.72	14.78	20.85	14.36	20.56	18.96	20.96
		198	20.32	21.00	14.64	20.91	14.92	20.87	14.33	20.62	18.81	20.98
		199	20.16	20.85	14.64	20.67	14.78	20.62	14.44	20.79	18.62	20.50

Antenna	Operation mode	Lid angle(°)	802.11g	802.11g	802.11ac(160M) 5.2G	802.11n(40M) 5.2G	802.11ac(80M) 5.3G	802.11a 5.3G	802.11ac(160M) 5.6G	802.11ac(80M) 5.6G	802.11ac(80M) 5.8G	802.11n(40M) 5.8G
Aux	Tablet	200	15.14	15.49	12.50	12.71	12.51	12.78	11.89	11.79	12.33	12.33
		201	15.18	15.33	12.92	12.62	12.78	12.66	11.88	11.82	12.05	12.26
		202	15.15	15.18	12.73	12.90	12.97	12.92	11.64	11.88	12.18	12.14
		203	15.48	15.10	12.81	12.95	12.91	12.75	11.51	11.99	12.09	12.13
		204	15.33	15.30	12.86	12.66	12.87	12.88	11.57	11.70	12.43	12.24
		205	15.05	15.35	12.84	12.81	12.86	12.69	11.56	11.62	12.04	12.17
		215	15.00	15.19	12.78	12.72	12.89	12.68	11.96	11.66	12.45	12.23
		225	15.05	15.28	12.89	12.86	12.91	12.75	11.72	11.71	12.11	12.42
		235	15.30	15.16	12.80	12.64	12.72	12.61	11.58	11.67	12.45	12.16
		245	15.15	15.22	12.73	12.96	12.85	12.70	11.66	11.89	12.33	12.35
		255	15.40	15.23	12.53	12.76	12.66	12.72	11.86	11.97	12.50	12.47
		265	15.05	15.14	12.71	12.65	12.75	12.74	11.56	11.98	12.30	12.37
		275	15.20	15.34	12.87	12.63	12.55	12.73	11.60	11.88	12.41	12.14
		285	15.21	15.23	12.99	12.71	12.64	12.93	11.81	11.89	12.42	12.24
		295	15.28	15.17	13.00	12.82	12.87	12.71	11.76	11.71	12.11	12.34
		305	15.20	15.40	12.97	12.89	12.52	12.81	11.78	11.77	12.20	12.31
		315	15.01	15.38	12.98	12.80	12.82	12.64	11.71	11.73	12.08	12.15
		325	15.11	15.28	12.74	12.62	12.93	12.69	11.65	11.71	12.06	12.12
		335	15.02	15.45	12.75	12.91	12.67	12.80	11.70	11.82	12.48	12.26
		345	15.24	15.19	12.85	12.85	12.77	12.75	11.72	11.61	12.40	12.29
		355	15.07	15.22	12.88	12.86	12.77	12.95	11.74	11.68	12.25	12.22
		360	15.17	15.16	12.61	12.88	12.59	12.82	11.81	11.75	12.23	12.29
		350	15.45	15.28	12.97	12.71	12.79	12.71	11.84	11.82	12.05	12.11
		340	15.48	15.29	12.59	12.85	12.98	12.95	11.60	11.96	12.36	12.17
		330	15.04	15.42	12.70	12.83	12.79	12.96	11.75	11.87	12.13	12.50
		320	15.23	15.21	12.50	12.83	12.98	12.74	11.64	11.81	12.29	12.32
		310	15.39	15.11	12.62	12.86	12.85	12.98	11.78	11.98	12.36	12.34
		300	15.29	15.31	12.83	12.98	12.84	12.78	11.73	11.82	12.06	12.13
		290	15.30	15.23	12.57	12.79	12.57	12.91	11.62	11.96	12.49	12.31
		280	15.31	15.29	12.94	12.89	12.85	12.84	11.92	11.69	12.00	12.19
		270	15.23	15.36	12.77	12.71	12.96	12.92	11.80	11.87	12.32	12.20
		260	15.33	15.18	12.92	12.85	12.64	12.97	11.60	11.68	12.38	12.35
		250	15.20	15.11	12.66	12.88	12.54	12.61	11.61	11.76	12.50	12.11
		240	15.15	15.38	12.98	12.75	12.94	12.77	11.65	11.95	12.03	12.49
		230	15.08	15.44	12.53	12.65	12.58	12.86	11.61	11.68	12.44	12.32
		220	15.46	15.30	12.54	13.00	12.90	12.71	11.68	11.84	12.04	12.43
		210	15.26	15.27	12.80	12.91	12.63	12.96	11.81	11.65	12.18	12.29
		200	15.35	15.21	12.95	12.79	12.99	12.84	11.52	11.95	12.23	12.44
	NB	190	20.49	20.62	14.70	20.71	14.65	20.77	14.30	20.74	18.77	20.81
		195	20.49	20.74	14.67	20.72	14.87	20.67	14.12	20.88	18.93	20.90
	Tablet	200	15.43	15.34	12.96	12.84	12.59	12.89	11.77	11.75	12.27	12.35
		205	15.20	15.15	12.75	12.63	12.78	12.91	11.82	11.88	12.01	12.14
		204	15.34	15.24	12.88	12.74	12.72	12.64	11.83	11.67	12.11	12.49
		203	15.30	15.46	12.57	12.88	12.68	12.94	11.61	11.81	12.48	12.25
		202	15.44	15.31	12.63	12.93	12.95	12.63	11.79	11.76	12.35	12.32
		201	15.27	15.15	12.64	12.78	12.66	12.74	11.57	11.97	12.42	12.38
		200	15.30	15.39	12.64	12.69	12.68	12.80	11.91	11.75	12.01	12.18
	NB	199	20.20	20.95	14.67	20.62	14.79	20.95	14.44	20.75	18.83	20.82
		198	20.40	20.70	14.83	20.59	14.99	20.57	14.22	20.75	18.74	20.95
		197	20.16	20.79	14.75	20.72	14.89	20.76	14.30	20.52	18.77	20.75
		196	20.46	20.98	14.74	20.88	14.91	20.73	14.31	20.87	18.78	20.97
		195	20.30	20.69	14.82	20.71	14.84	20.53	14.35	20.63	18.63	20.51
		185	20.25	21.00	14.74	20.73	14.60	20.91	14.30	20.65	18.94	20.93
		175	20.20	20.66	14.61	20.64	14.67	20.68	14.17	20.53	18.99	20.84
		165	20.25	20.93	14.63	20.68	14.87	20.53	14.25	20.91	18.97	20.92
		155	20.44	20.65	14.98	20.59	14.95	20.58	14.43	20.99	18.92	20.79
		145	20.41	20.86	14.80	20.51	14.70	20.58	14.26	20.97	18.63	20.91
		135	20.31	20.83	14.94	20.78	14.97	20.91	14.29	20.71	18.66	20.62
		125	20.32	20.77	14.94	20.56	14.93	20.87	14.11	20.72	18.98	20.79
		115	20.37	20.67	14.85	20.89	15.00	20.82	14.40	20.50	18.99	20.71
		105	20.47	20.83	14.83	20.62	14.72	20.86	14.34	20.66	18.83	20.83
		95	20.45	20.95	14.67	20.75	14.62	20.50	14.24	20.59	18.64	20.62
		85	20.11	20.89	14.85	20.63	14.76	20.69	14.15	20.71	18.79	20.90
		75	20.29	20.61	14.95	20.84	14.62	20.80	14.17	20.54	18.70	20.89
		65	20.41	20.80	14.88	20.61	14.88	20.91	14.37	20.53	18.64	20.70
		55	20.50	20.80	14.93	20.73	14.74	20.56	14.30	20.67	18.83	20.52
		45	20.38	20.76	14.91	20.52	14.64	20.85	14.33	20.83	18.63	20.99
	Lid	35	na	na	na	na	na	na	na	na	na	na
		40	na	na	na	na	na	na	na	na	na	na
	NB	45	20.28	20.62	14.96	20.77	14.72	20.76	14.24	20.95	18.96	20.51
		50	20.37	20.86	14.93	20.75	14.85	20.54	14.14	20.61	18.88	20.68
		49	20.30	20.76	14.94	20.65	14.80	20.71	14.24	20.82	18.79	20.86
		48	20.30	20.97	14.99	20.55	14.74	20.85	14.29	20.53	18.98	20.62
		47	20.39	20.96	14.82	20.73	14.61	20.68	14.29	20.70	18.62	20.66
		46	20.50	20.64	14.79	20.87	14.67	20.98	14.26	20.52	18.60	20.81
		45	20.13	20.93	14.96	20.86	14.78	20.87	14.16	20.94	18.99	20.90
	Lid	44	na	na	na	na	na	na	na	na	na	na
		43	na	na	na	na	na	na	na	na	na	na
		42	na	na	na	na	na	na	na	na	na	na
		41	na	na	na	na	na	na	na	na	na	na
		40	na	na	na	na	na	na	na	na	na	na
		30	na	na	na	na	na	na	na	na	na	na
		20	na	na	na	na	na	na	na	na	na	na
		10	na	na	na	na	na	na	na	na	na	na
		0	na	na	na	na	na	na	na	na	na	na

1.7 The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR= σ ($|Ei|^2$)/ ρ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY 5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage intissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

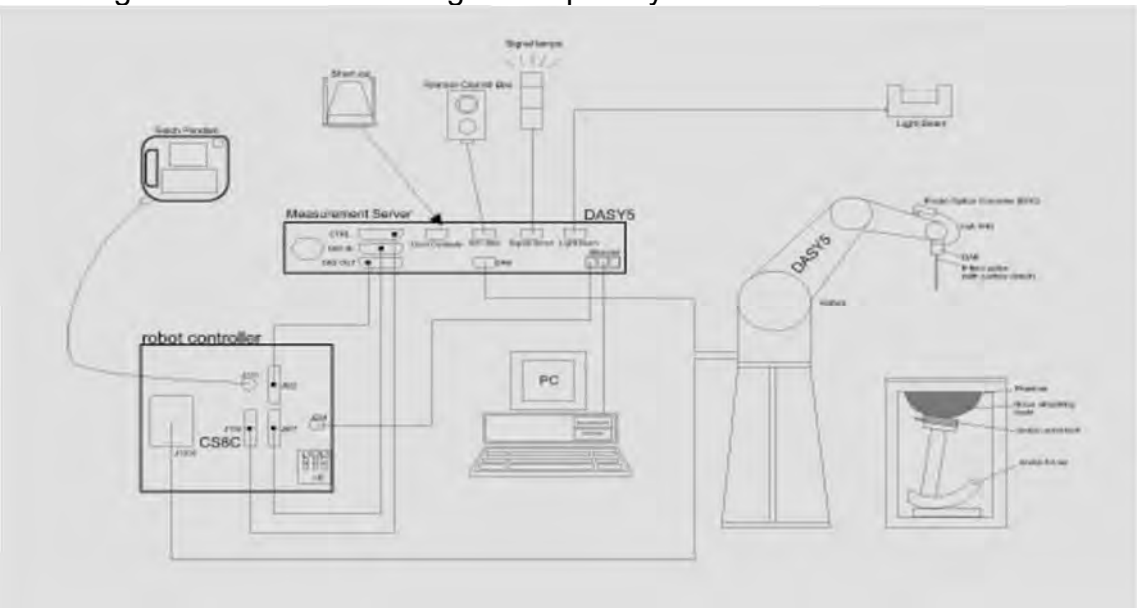

Fig. a The block diagram of SAR system

4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
7. A computer operating Windows 7.
8. DASY 5 software.
9. Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
10. Tissue simulating liquid mixed according to the given recipes.
11. Validation dipole kits allowing to validate the proper functioning of the system.

1.8 System Components

EX3DV4 E-Field Probe

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 2450/5200/5300/5600/5800 MHz Additional CF for other liquids and frequencies upon request	
Frequency	10 MHz to > 6 GHz	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 µW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 µW/g)	
Dimensions	Tip diameter: 2.5 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.	

PHANTOM

Model	ELI
Construction	The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.
Shell Thickness	2 ± 0.2 mm
Filling Volume	Approx. 30 liters
Dimensions	Major axis: 600 mm Minor axis: 400 mm

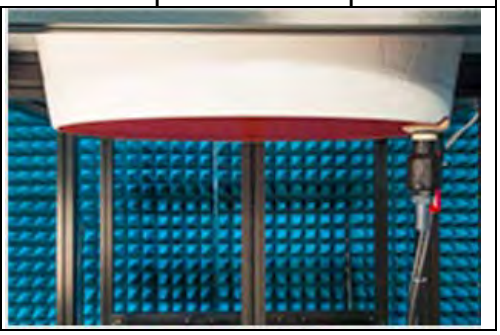

DEVICE HOLDER

Construction	The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin) , which is non-metal and non-conductive. The height can be adjusted to fit varies kind of notebooks.

Device Holder

1.9 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. These tests were done at 2450/5200/5300/5600/5800 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the liquid depth above the ear reference points was ≥ 15 cm ± 5 mm (frequency ≤ 3 GHz) or ≥ 10 cm ± 5 mm (frequency > 3 G Hz) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

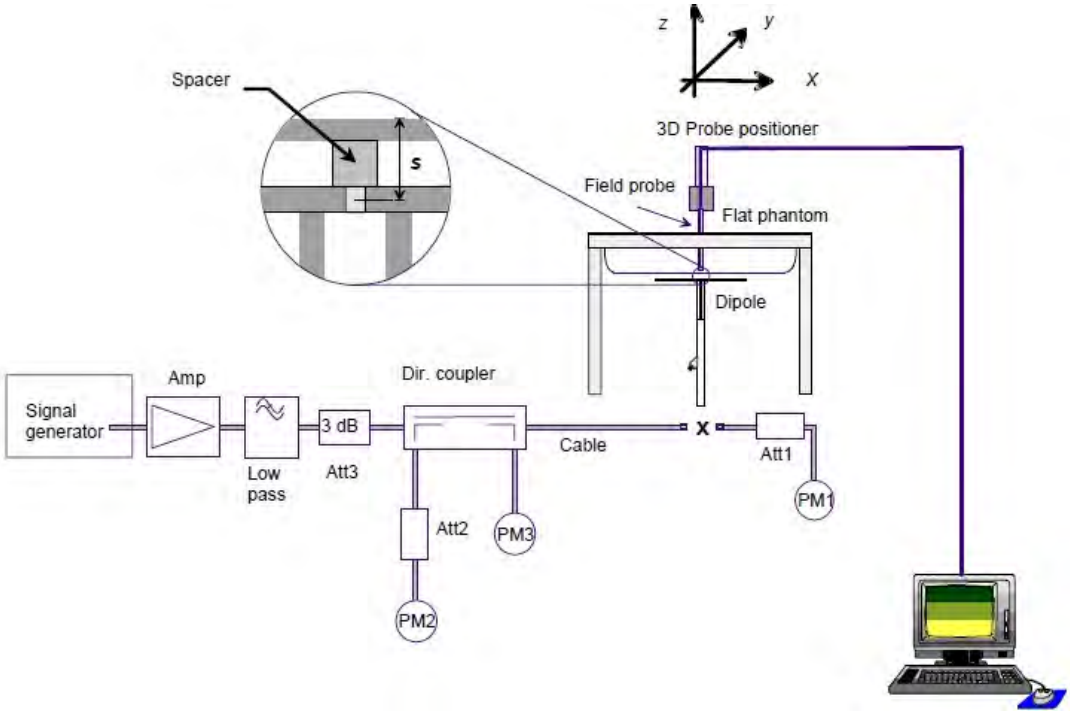

Fig. b The block diagram of system verification

Validation Kit	S/N	Frequency (MHz)		1W Target SAR-1g (mW/g)	pin=250mW Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date
D2450V2	727	2450	Head	52.6	13.40	53.6	1.90%	May. 17, 2020
Validation Kit	S/N	Frequency (MHz)		1W Target SAR-1g (mW/g)	Pin=100mW Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date
D5GHzV2	1023	5200	Head	80.1	8.02	80.2	0.12%	May. 18, 2020
		5300	Head	82.8	8.35	83.5	0.85%	May. 19, 2020
		5600	Head	83.1	8.33	83.3	0.24%	May. 20, 2020
		5800	Head	81.4	8.11	81.1	-0.37%	May. 21, 2020

Table 1. Results of system validation

1.10 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this Head-simulant fluid were measured by using the Agilent Model 85070E Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Network Analyzer.
All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The measured conductivity and permittivity are all within ± 5% of the target values.
The depth of the tissue simulant in the flat section of the phantom was ≥ 15 cm ± 5 mm (Frequency ≤3G) or ≥ 10 cm ± 5 mm (Frequency >3G) during all tests. (Fig. 2)

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev εr	% dev σ
Head	2020/5/17	2402	39.285	1.757	40.189	1.749	2.30%	-0.47%
		2417	39.259	1.771	40.142	1.762	2.25%	-0.49%
		2437	39.223	1.788	40.145	1.780	2.35%	-0.47%
		2441	39.216	1.792	40.122	1.783	2.31%	-0.50%
		2450	39.200	1.800	40.086	1.790	2.26%	-0.56%
		2457	39.191	1.808	40.077	1.798	2.26%	-0.53%
		2480	39.162	1.827	40.070	1.818	2.32%	-0.47%
	2020/5/18	5180	36.009	4.635	36.714	4.570	1.96%	-1.39%
		5190	35.997	4.645	36.731	4.579	2.04%	-1.42%
		5200	35.986	4.655	36.705	4.591	2.00%	-1.37%
		5210	35.974	4.665	36.694	4.601	2.00%	-1.38%
		5220	35.963	4.676	36.693	4.610	2.03%	-1.40%
		5230	35.951	4.686	36.670	4.622	2.00%	-1.36%
		5240	35.940	4.696	36.652	4.630	1.98%	-1.41%
		5250	35.929	4.706	36.665	4.642	2.05%	-1.37%
	2020/5/19	5260	35.917	4.717	36.373	4.645	1.27%	-1.52%
		5270	35.906	4.727	36.369	4.653	1.29%	-1.56%
		5280	35.894	4.737	36.350	4.662	1.27%	-1.58%
		5290	35.883	4.747	36.353	4.672	1.31%	-1.59%
		5300	35.871	4.758	36.338	4.683	1.30%	-1.57%
		5310	35.860	4.768	36.330	4.691	1.31%	-1.61%
	2020/5/20	5530	35.609	4.993	35.779	4.866	0.48%	-2.55%
		5550	35.586	5.014	35.757	4.887	0.48%	-2.53%
		5570	35.563	5.034	35.741	4.910	0.50%	-2.47%
		5590	35.540	5.055	35.725	4.926	0.52%	-2.55%
		5600	35.529	5.065	35.720	4.937	0.54%	-2.53%
		5610	35.517	5.075	35.712	4.950	0.55%	-2.47%
		5690	35.426	5.157	35.589	5.029	0.46%	-2.49%
		5710	35.403	5.178	35.590	5.048	0.53%	-2.51%
	2020/5/21	5755	35.351	5.224	35.641	5.074	0.82%	-2.87%
		5775	35.329	5.244	35.601	5.095	0.77%	-2.85%
		5795	35.306	5.265	35.602	5.111	0.84%	-2.92%
		5800	35.300	5.270	35.579	5.119	0.79%	-2.87%

Table 2. Dielectric Parameters of Tissue Simulant Fluid

The composition of the tissue simulating liquid:

Frequency (MHz)	Mode	Ingredient						Total amount
		DGMBE	Water	Salt	Preventol D-7	Cellulose	Sugar	
2450	Head	550ml	450ml	—	—	—	—	1.0L(Kg)

Simulating Liquids for 5 GHz, Manufactured by SPEAG:

Ingredients	Water	Esters, Emulsifiers, Inhibitors	Sodium and Salt
(% by weight)	60-80	20-40	0-1.5

Table 3. Recipes for Tissue Simulating Liquid

1.11 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. The extraction of the measured data (grid and values) from the Zoom Scan.
2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. The generation of a high-resolution mesh within the measured volume
4. The interpolation of all measured values from the measurement grid to the high-resolution grid
5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within –2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements.

The measured volume of 30x30x30mm contains about 30g of tissue.

The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D

interpolation to get all points within the measured volume. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

1.12 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

1.12.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field (E) and the temperature gradient ($\delta T / \delta t$) in the liquid.

$$SAR = C \frac{\delta T}{\delta t},$$

whereby σ is the conductivity, ρ the density and c the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

- The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the thermal equilibrium in the liquid. With a careful setup these errors can be kept small.
- The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.
- The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures (~ 2% for c; much better for ρ) , there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed ±5%.
- Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about ±10% (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is ±5% (RSS) when the same liquid is used for the calibration and for actual measurements and ±7-9% (RSS) when not, which is in good agreement with the estimates given in [2].

1.12.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids.
When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

- The setup must enable accurate determination of the incident power.
- The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.
- Due to the small wavelength in liquids with high permittivity, even small

setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

References

1. N. Kuster, Q. Balzano, and J.C. Lin, Eds., *Mobile Communications Safety*, Chapman & Hall, London, 1997.
2. K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, \Broadband calibration of E-field probes in lossy media", *IEEE Transactions on Microwave Theory and Techniques*, vol. 44, no. 10, pp. 1954{1962, Oct. 1996.
3. K. Jokela, P. Hyysalo, and L. Puranen, \Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", *IEEE Transactions on Instrumentation and Measurements*, vol. 47, no. 2, pp. 432{438, Apr. 1998.

1.13 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (‘‘SAR’’) in Section 4.2 of ‘‘IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz,’’ ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in ‘‘Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields,’’ NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

(1) Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube).

(2) Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

(3) Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer

devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section. (Table 4.)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR (Brain)	1.60 W/kg	8.00 W/kg
Spatial Average SAR (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Table 4. RF exposure limits

Notes:
1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

2. Summary of Results

2.1 Decision rules

Reported measurement data comply with IEEE 1528-2013:
Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.2 Summary of Results

Tablet mode

WLAN Main Antenna

Antenna	Mode	Position	Distance (mm)	CH	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		Plot page
										Measured	Reported	
Main	WLAN 802.11b	Back side	0	6	2437	20	19.95	1.01	101.16%	0.753	0.766	75
		Top side	0	6	2437	20	19.95	1.01	101.16%	0.002	0.002	-
		Bottom side	0	6	2437	20	19.95	1.01	101.16%	0.004	0.004	-
		Right side	0	6	2437	20	19.95	1.01	101.16%	0.075	0.076	-
		Left side	0	6	2437	20	19.95	1.01	101.16%	0.037	0.037	-
	WLAN 802.11ac(80M) 5.2G	Back side	0	42	5210	11.5	11.43	1.01	101.62%	1.080	1.109	76
		Back side*	0	42	5210	11.5	11.43	1.01	101.62%	1.060	1.088	-
		Top side	0	42	5210	11.5	11.43	1.01	101.62%	0.013	0.013	-
		Bottom side	0	42	5210	11.5	11.43	1.01	101.62%	0.002	0.002	-
		Right side	0	42	5210	11.5	11.43	1.01	101.62%	0.131	0.134	-
		Left side	0	42	5210	11.5	11.43	1.01	101.62%	0.007	0.008	-
	WLAN 802.11ac(160M) 5.2G	Back side	0	50	5250	11.5	11.44	1.01	101.39%	1.070	1.099	77
		Back side*	0	50	5250	11.5	11.44	1.01	101.39%	1.050	1.078	-
		Top side	0	50	5250	11.5	11.44	1.01	101.39%	0.013	0.014	-
		Bottom side	0	50	5250	11.5	11.44	1.01	101.39%	0.002	0.002	-
		Right side	0	50	5250	11.5	11.44	1.01	101.39%	0.130	0.133	-
		Left side	0	50	5250	11.5	11.44	1.01	101.39%	0.007	0.008	-
	WLAN 802.11n(40M) 5.3G	Back side	0	54	5270	11.5	11.48	1.01	100.46%	0.976	0.990	-
		Back side	0	62	5310	11.5	11.49	1.01	100.23%	1.010	1.023	78
		Back side*	0	62	5310	11.5	11.49	1.01	100.23%	0.985	0.997	-
		Top side	0	62	5310	11.5	11.49	1.01	100.23%	0.012	0.012	-
		Bottom side	0	62	5310	11.5	11.49	1.01	100.23%	0.001	0.001	-
		Right side	0	62	5310	11.5	11.49	1.01	100.23%	0.125	0.127	-
		Left side	0	62	5310	11.5	11.49	1.01	100.23%	0.006	0.006	-
	WLAN 802.11ac(80M) 5.3G	Back side	0	58	5290	11.5	11.47	1.01	100.69%	0.992	1.009	79
		Back side*	0	58	5290	11.5	11.47	1.01	100.69%	0.986	1.003	-
		Top side	0	58	5290	11.5	11.47	1.01	100.69%	0.012	0.012	-
		Bottom side	0	58	5290	11.5	11.47	1.01	100.69%	0.003	0.003	-
		Right side	0	58	5290	11.5	11.47	1.01	100.69%	0.121	0.123	-
		Left side	0	58	5290	11.5	11.47	1.01	100.69%	0.008	0.008	-

* - repeated at the highest SAR measurement according to the KDB 865664 D01

Antenna	Mode	Position	Distance (mm)	CH	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		Plot page
										Measured	Reported	
Main	WLAN 802.11ac(80M) 5.6G	Back side	0	106	5530	11	10.98	1.01	100.46%	0.856	0.869	-
		Back side	0	138	5690	11	10.94	1.01	101.39%	0.933	0.956	80
		Back side*	0	138	5690	11	10.94	1.01	101.39%	0.910	0.932	-
		Top side	0	106	5530	11	10.98	1.01	100.46%	0.010	0.010	-
		Bottom side	0	106	5530	11	10.98	1.01	100.46%	0.003	0.003	-
		Right side	0	106	5530	11	10.98	1.01	100.46%	0.110	0.112	-
		Left side	0	106	5530	11	10.98	1.01	100.46%	0.006	0.006	-
	WLAN 802.11ac(160M) 5.6G	Back side	0	114	5570	11	10.93	1.01	101.62%	0.929	0.956	81
		Back side*	0	114	5570	11	10.93	1.01	101.62%	0.908	0.934	-
		Top side	0	114	5570	11	10.93	1.01	101.62%	0.011	0.011	-
		Bottom side	0	114	5570	11	10.93	1.01	101.62%	0.003	0.003	-
		Right side	0	114	5570	11	10.93	1.01	101.62%	0.113	0.116	-
		Left side	0	114	5570	11	10.93	1.01	101.62%	0.007	0.007	-
	WLAN 802.11n(40M) 5.8G	Back side	0	151	5755	12	11.99	1.01	100.23%	1.030	1.043	82
		Back side*	0	151	5755	12	11.99	1.01	100.23%	1.020	1.033	-
		Back side	0	159	5795	12	11.96	1.01	100.93%	1.010	1.030	-
		Top side	0	151	5755	12	11.99	1.01	100.23%	0.012	0.012	-
		Bottom side	0	151	5755	12	11.99	1.01	100.23%	0.002	0.002	-
		Right side	0	151	5755	12	11.99	1.01	100.23%	0.119	0.120	-
		Left side	0	151	5755	12	11.99	1.01	100.23%	0.005	0.005	-
	WLAN 802.11ac(80M) 5.8G	Back side	0	155	5775	12	11.92	1.01	101.86%	1.030	1.060	83
		Back side*	0	155	5775	12	11.92	1.01	101.86%	1.020	1.049	-
		Top side	0	155	5775	12	11.92	1.01	101.86%	0.013	0.013	-
		Bottom side	0	155	5775	12	11.92	1.01	101.86%	0.002	0.002	-
		Right side	0	155	5775	12	11.92	1.01	101.86%	0.125	0.129	-
		Left side	0	155	5775	12	11.92	1.01	101.86%	0.007	0.008	-

* - repeated at the highest SAR measurement according to the KDB 865664 D01

WLAN Aux Antenna

Antenna	Mode	Position	Distance (mm)	CH	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		Plot page
										Measured	Reported	
Aux	WLAN 802.11b	Back side	0	2	2417	15.5	15.43	1.00	101.62%	0.811	0.828	-
		Back side	0	6	2437	15.5	15.49	1.00	100.23%	0.830	0.836	84
		Back side*	0	6	2437	15.5	15.49	1.00	100.23%	0.822	0.828	-
		Back side	0	10	2457	15.5	15.48	1.00	100.46%	0.728	0.735	-
		Top side	0	6	2437	15.5	15.49	1.00	100.23%	0.002	0.002	-
		Bottom side	0	6	2437	15.5	15.49	1.00	100.23%	0.004	0.004	-
		Right side	0	6	2437	15.5	15.49	1.00	100.23%	0.002	0.002	-
		Left side	0	6	2437	15.5	15.49	1.00	100.23%	0.003	0.003	-
	Bluetooth (GFSK)	Back side	0	78	2480	10.5	9.42	1.30	128.23%	0.166	0.277	85
		Top side	0	78	2480	10.5	9.42	1.30	128.23%	0.001	0.002	-
		Bottom side	0	78	2480	10.5	9.42	1.30	128.23%	0.001	0.002	-
		Right side	0	78	2480	10.5	9.42	1.30	128.23%	0.001	0.002	-
		Left side	0	78	2480	10.5	9.42	1.30	128.23%	0.001	0.002	-
	WLAN 802.11ac(80M) 5.2G	Back side	0	42	5210	13	12.98	1.01	100.46%	0.966	0.980	86
		Back side*	0	42	5210	13	12.98	1.01	100.46%	0.954	0.968	-
		Top side	0	42	5210	13	12.98	1.01	100.46%	0.013	0.013	-
		Bottom side	0	42	5210	13	12.98	1.01	100.46%	0.001	0.001	-
		Right side	0	42	5210	13	12.98	1.01	100.46%	0.001	0.001	-
		Left side	0	42	5210	13	12.98	1.01	100.46%	0.071	0.072	-
	WLAN 802.11ac(160M) 5.2G	Back side	0	50	5250	13	12.95	1.01	101.16%	0.966	0.990	87
		Back side*	0	50	5250	13	12.95	1.01	101.16%	0.957	0.980	-
		Top side	0	50	5250	13	12.95	1.01	101.16%	0.012	0.012	-
		Bottom side	0	50	5250	13	12.95	1.01	101.16%	0.001	0.001	-
		Right side	0	50	5250	13	12.95	1.01	101.16%	0.001	0.001	-
		Left side	0	50	5250	13	12.95	1.01	101.16%	0.070	0.072	-
	WLAN 802.11n(40M) 5.3G	Back side	0	54	5270	13	12.97	1.01	100.69%	0.941	0.957	-
		Back side	0	62	5310	13	12.99	1.01	100.23%	1.090	1.104	88
		Back side*	0	62	5310	13	12.99	1.01	100.23%	1.060	1.073	-
		Top side	0	62	5310	13	12.99	1.01	100.23%	0.015	0.015	-
		Bottom side	0	62	5310	13	12.99	1.01	100.23%	0.001	0.001	-
		Right side	0	62	5310	13	12.99	1.01	100.23%	0.001	0.001	-
		Left side	0	62	5310	13	12.99	1.01	100.23%	0.077	0.078	-
	WLAN 802.11ac(80M) 5.3G	Back side	0	58	5290	13	12.95	1.01	101.16%	1.030	1.052	89
		Back side*	0	58	5290	13	12.95	1.01	101.16%	1.020	1.042	-
		Top side	0	58	5290	13	12.95	1.01	101.16%	0.014	0.014	-
		Bottom side	0	58	5290	13	12.95	1.01	101.16%	0.001	0.001	-
		Right side	0	58	5290	13	12.95	1.01	101.16%	0.001	0.001	-
		Left side	0	58	5290	13	12.95	1.01	101.16%	0.076	0.078	-
	WLAN 802.11ac(80M) 5.6G	Back side	0	106	5530	12	11.95	1.01	101.16%	0.938	0.958	90
		Back side*	0	106	5530	12	11.95	1.01	101.16%	0.931	0.951	-
		Back side	0	138	5690	12	11.99	1.01	100.23%	0.909	0.920	-
		Top side	0	138	5690	12	11.99	1.01	100.23%	0.011	0.011	-
		Bottom side	0	138	5690	12	11.99	1.01	100.23%	0.001	0.001	-
		Right side	0	138	5690	12	11.99	1.01	100.23%	0.001	0.001	-
		Left side	0	138	5690	12	11.99	1.01	100.23%	0.066	0.067	-
	WLAN 802.11ac(160M) 5.6G	Back side	0	114	5570	12	11.92	1.01	101.86%	0.949	0.979	91
		Back side*	0	114	5570	12	11.92	1.01	101.86%	0.948	0.978	-
		Top side	0	114	5570	12	11.92	1.01	101.86%	0.013	0.013	-
		Bottom side	0	114	5570	12	11.92	1.01	101.86%	0.001	0.001	-
		Right side	0	114	5570	12	11.92	1.01	101.86%	0.001	0.001	-
		Left side	0	114	5570	12	11.92	1.01	101.86%	0.069	0.071	-
	WLAN 802.11n(40M) 5.8G	Back side	0	151	5755	12.5	12.48	1.01	100.46%	1.020	1.035	-
		Back side	0	159	5795	12.5	12.49	1.01	100.23%	1.040	1.053	92
		Back side*	0	159	5795	12.5	12.49	1.01	100.23%	1.030	1.043	-
		Top side	0	159	5795	12.5	12.49	1.01	100.23%	0.015	0.015	-
		Bottom side	0	159	5795	12.5	12.49	1.01	100.23%	0.001	0.001	-
		Right side	0	159	5795	12.5	12.49	1.01	100.23%	0.001	0.001	-
		Left side	0	159	5795	12.5	12.49	1.01	100.23%	0.076	0.077	-
	WLAN 802.11ac(80M) 5.8G	Back side	0	155	5775	12.5	12.46	1.01	100.93%	1.020	1.040	93
		Back side*	0	155	5775	12.5	12.46	1.01	100.93%	1.020	1.040	-
		Top side	0	155	5775	12.5	12.46	1.01	100.93%	0.014	0.014	-
		Bottom side	0	155	5775	12.5	12.46	1.01	100.93%	0.001	0.001	-
		Right side	0	155	5775	12.5	12.46	1.01	100.93%	0.001	0.001	-
		Left side	0	155	5775	12.5	12.46	1.01	100.93%	0.075	0.076	-

* - repeated at the highest SAR measurement according to the KDB 865664 D01

Notebook mode

WLAN Main Antenna

Antenna	Mode	Position	Distance (mm)	CH	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		Plot page
										Measured	Reported	
Main	WLAN 802.11b	Bottom side	0	10	2457	21	20.98	1.00	100.46%	0.036	0.036	94
	WLAN 802.11n(40M) 5.2G	Bottom side	0	46	5230	21	20.96	1.01	100.93%	0.057	0.058	95
	WLAN 802.11a 5.3G	Bottom side	0	52	5260	21	20.99	1.02	100.23%	0.059	0.060	96
	WLAN 802.11ax(80M) 5.6G	Bottom side	0	138	5690	21	20.96	1.01	100.93%	0.076	0.077	97
	WLAN 802.11n(40M) 5.8G	Bottom side	0	151	5755	21	20.99	1.01	100.23%	0.057	0.057	98

WLAN Aux Antenna

Antenna	Mode	Position	Distance (mm)	CH	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		Plot page
										Measured	Reported	
Aux	WLAN 802.11b	Bottom side	0	2	2417	20.5	20.47	1.00	100.69%	0.039	0.039	-
		Bottom side	0	6	2437	20.5	20.42	1.00	101.86%	0.041	0.042	-
		Bottom side	0	10	2457	20.5	20.49	1.00	100.23%	0.044	0.045	99
	WLAN 802.11g	Bottom side	0	2	2417	21	20.99	1.02	100.23%	0.053	0.054	100
	Bluetooth (GFSK)	Bottom side	0	78	2480	10.5	9.42	1.30	128.23%	0.004	0.007	101
	WLAN 802.11n(40M) 5.2G	Bottom side	0	38	5190	18.5	18.44	1.01	101.39%	0.122	0.125	-
		Bottom side	0	46	5230	21	20.95	1.01	101.16%	0.136	0.139	102
	WLAN 802.11a 5.3G	Bottom side	0	56	5280	21	20.99	1.02	100.23%	0.058	0.059	103
	WLAN 802.11ac(80M) 5.6G	Bottom side	0	138	5690	21	20.92	1.01	101.86%	0.058	0.059	104
	WLAN 802.11n(40M) 5.8G	Bottom side	0	159	5795	21	20.99	1.01	100.23%	0.059	0.060	105

Note:

Scaling = $\frac{\text{reported SAR}}{\text{measured SAR}} = \frac{\text{P2(mW)}}{\text{P1(mW)}} = 10^{\left(\frac{\text{P2}-\text{P1}}{10}\right)(\text{dBm})}$

Reported SAR = measured SAR * (scaling)

Where P2 is maximum specified power, P1 is measured conducted power

2.3 Reporting statements of conformity

The conformity statement in this report is based solely on the test results, measurement uncertainty is excluded.

3. Simultaneous Transmission Analysis

Simultaneous Transmission Scenarios:

Simultaneous Transmit Configurations	Body
2.4GHz WLAN MIMO	Yes
5GHz WLAN MIMO	Yes
BT + 2.4GHz WLAN Main	Yes
BT + 5GHz WLAN Main	Yes

Note:
1. Bluetooth and WLAN Aux share the same antenna path, and BT can transmit with WLAN Main simultaneously.
2. For 2.4/5GHz WLAN Main and Aux antennas, the maximum output power of each antenna during simultaneous transmission is less than that used in standalone transmission, and we used the sum of standalone 1-g SAR provision in KDB447498D01 to exclude the simultaneous transmitted SAR measurement.

3.1 Estimated SAR calculation

According to KDB447498 D01v06 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$\text{Estimated SAR} = \frac{\text{Max. tune up power (mW)}}{\text{Min. test separation distance(mm)}} \times \frac{\sqrt{\text{f(GHz)}}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

3.2 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by **(SAR1 + SAR2)^1.5/Ri**, rounded to two decimal digits, and must be **≤ 0.04** for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Tablet mode

2.4 GHz WLAN MIMO

No.	Conditions	Position	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
1	2.4 GHz WLAN Main + WLAN Aux	Back side	0.766	0.836	**1.602**	Analyzed as below
		Top side	0.002	0.002	0.004	ΣSAR<1.6, Not required
		Bottom side	0.004	0.004	0.008	ΣSAR<1.6, Not required
		Right side	0.076	0.002	0.078	ΣSAR<1.6, Not required
		Left side	0.037	0.003	0.040	ΣSAR<1.6, Not required

2.4 GHz WLAN MIMO

Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance (mm)	SPLSR	Simultaneous Transmission SAR Test
			x	y	z				
WLAN Main	Back side	0.766	4.70	14.10	-0.32	1.602	263.51	0.008	SPLSR<0.04, Not required
WLAN Aux		0.836	5.46	-12.24	-0.33				

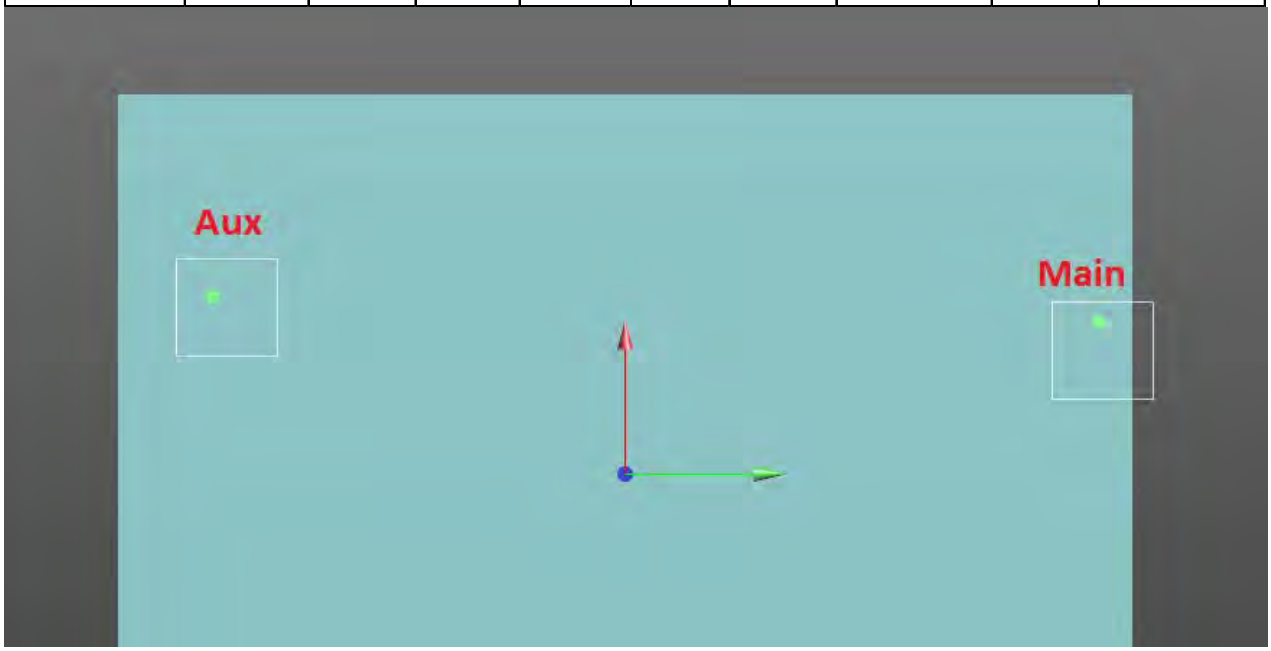

5 GHz WLAN MIMO

No.	Conditions	Position	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
2	5 GHz WLAN Main + WLAN Aux	Back side	1.109	1.104	**2.213**	Analyzed as below
		Top side	0.014	0.015	0.029	ΣSAR<1.6, Not required
		Bottom side	0.003	0.001	0.004	ΣSAR<1.6, Not required
		Right side	0.134	0.001	0.135	ΣSAR<1.6, Not required
		Left side	0.008	0.078	0.086	ΣSAR<1.6, Not required

5 GHz WLAN MIMO

Conditions	Position	SAR Value (W/kg)	Coordinates (cm)			ΣSAR (W/kg)	Peak Location Separation Distance (mm)	SPLSR	Simultaneous Transmission SAR Test
			x	y	z				
WLAN Main	Back side	1.109	3.56	14.34	-0.33	2.213	271.68	0.012	SPLSR<0.04, Not required
WLAN Aux		1.104	4.80	-12.80	-0.35				

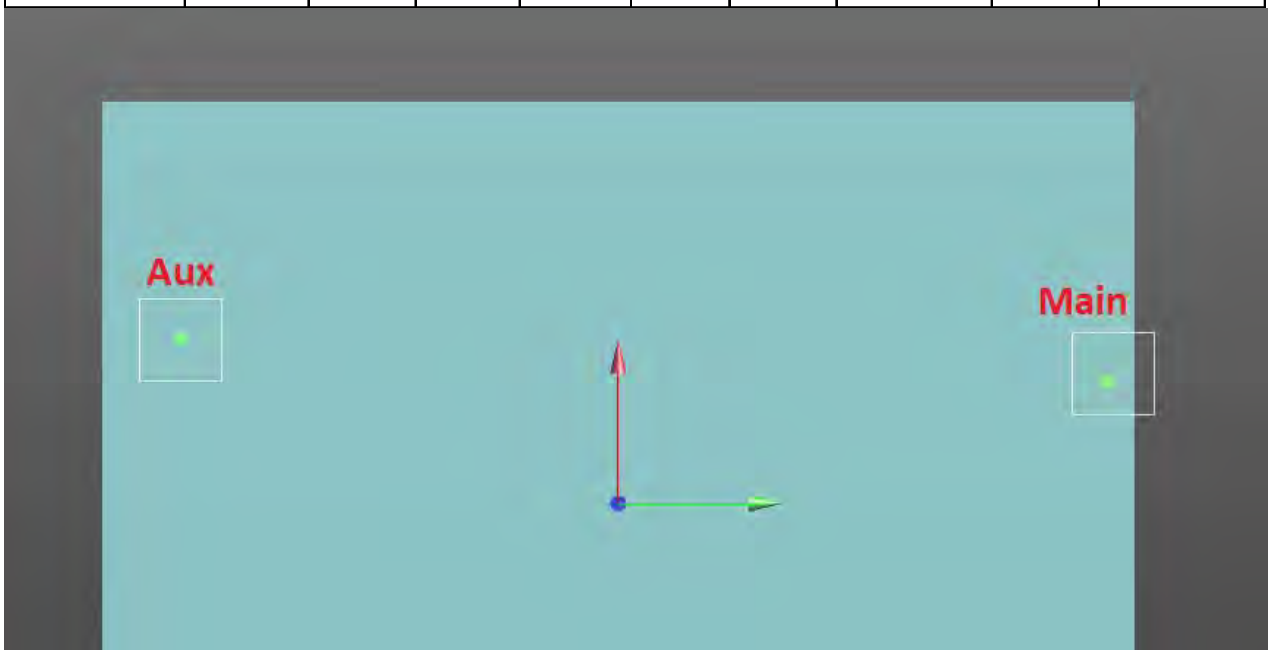

BT+ 2.4GHz WLAN Main

No.	Conditions	Position	Max. WLAN Main	BT	SAR Sum	SPLSR
3	2.4 GHz WLAN Main + BT	Back side	0.766	0.277	1.043	ΣSAR<1.6, Not required
		Top side	0.002	0.002	0.004	ΣSAR<1.6, Not required
		Bottom side	0.004	0.002	0.006	ΣSAR<1.6, Not required
		Right side	0.076	0.002	0.078	ΣSAR<1.6, Not required
		Left side	0.037	0.002	0.039	ΣSAR<1.6, Not required

BT+ 5GHz WLAN Main

No.	Conditions	Position	Max. WLAN Main	BT	SAR Sum	SPLSR
4	5 GHz WLAN Main + BT	Back side	1.109	0.277	1.386	ΣSAR<1.6, Not required
		Top side	0.014	0.002	0.016	ΣSAR<1.6, Not required
		Bottom side	0.003	0.002	0.005	ΣSAR<1.6, Not required
		Right side	0.134	0.002	0.136	ΣSAR<1.6, Not required
		Left side	0.008	0.002	0.010	ΣSAR<1.6, Not required

Notebook mode

2.4 GHz WLAN MIMO

No.	Conditions	Position	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
1	2.4 GHz WLAN Main + WLAN Aux	Bottom side	0.036	0.045	0.081	ΣSAR<1.6, Not required

5 GHz WLAN MIMO

No.	Conditions	Position	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
2	5 GHz WLAN Main + WLAN Aux	Bottom side	0.161	0.139	0.300	ΣSAR<1.6, Not required

BT+ 2.4GHz WLAN Main

No.	Conditions	Position	Max. WLAN Main	BT	SAR Sum	SPLSR
3	2.4 GHz WLAN Main + BT	Bottom side	0.036	0.007	0.043	ΣSAR<1.6, Not required

BT+ 5GHz WLAN Main

No.	Conditions	Position	Max. WLAN Main	BT	SAR Sum	SPLSR
4	5 GHz WLAN Main + WLAN Aux	Bottom side	0.161	0.007	0.168	ΣSAR<1.6, Not required

4. Instruments List

Manufacturer	Device	Type	Serial number	Date of last calibration	Date of next calibration
SPEAG	Dosimetric E-Field Probe	EX3DV4	3938	Feb.27,2020	Feb.26,2021
SPEAG	System Validation Dipole	D2450V2	727	Apr.22,2020	Apr.21,2021
		D5GHzV2	1023	Jan.28,2020	Jan.27,2021
SPEAG	Data acquisition Electronics	DAE4	1336	Aug.27,2019	Aug.26,2020
SPEAG	Software	DASY 52 52.10.3	N/A	Calibration not required	Calibration not required
SPEAG	Phantom	ELI	N/A	Calibration not required	Calibration not required
Agilent	Network Analyzer	E5071C	MY46100433	Dec.13,2019	Dec.12,2020
Agilent	Dielectric Probe Kit	85070E	MY44300677	Calibration not required	Calibration not required
Agilent	Dual-directional coupler	772D	MY46151242	Jul.30,2019	Jul.29,2020
		778D	MY48220468	Jul.30,2019	Jul.29,2020
Agilent	Signal Generator	N5181A	MY50144142	Dec.12,2019	Dec.11,2020
Agilent	Power Meter	ML2496A	1337004	Sep.19,2019	Sep.18,2020
Agilent	Power Sensor	MA2411B	1306052	Sep.19,2019	Sep.18,2020
TECPEL	Digital thermometer	DTM-303A	TP190085	Dec.16,2019	Dec.15,2020

5. Measurements

Date: 2020/5/17

Report No. : E5202050006
WLAN 802.11b_Body_Back side_CH 6_0mm_Main

Communication System: WLAN 2.45G; Frequency: 2437 MHz; Duty Cycle: 1:0.995
Medium parameters used: f = 2437 MHz; σ = 1.78 S/m; ε_r = 40.145; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.59, 7.59, 7.59); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (71x81x1): Interpolated grid: dx=12 mm, dy=12 mm
Maximum value of SAR (interpolated) = 1.47 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.478 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.76 W/kg
SAR(1 g) = 0.753 W/kg; SAR(10 g) = 0.384 W/kg
Smallest distance from peaks to all points 3 dB below = 10 mm
Ratio of SAR at M2 to SAR at M1 = 41%
Maximum value of SAR (measured) = 1.22 W/kg

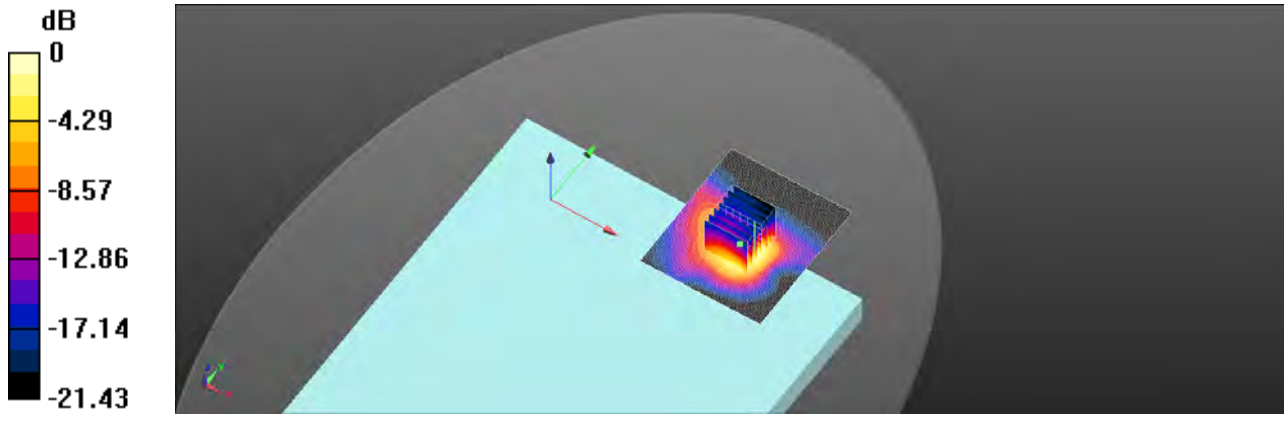

0 dB = 1.22 W/kg = 0.86 dBW/kg

Date: 2020/5/18

Report No. : E5202050006
WLAN 802.11ac(80M) 5.2G_Body_Back side_CH 42_0mm_Main
Communication System: WLAN 5G; Frequency: 5210 MHz; Duty Cycle: 1:0.99
Medium parameters used: f = 5210 MHz; σ = 4.601 S/m; ε_r = 36.694; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.9°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(5, 5, 5); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x91x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 1.98 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.5810 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 5.20 W/kg
SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.308 W/kg
Smallest distance from peaks to all points 3 dB below = 5.7 mm
Ratio of SAR at M2 to SAR at M1 = 50.3%
Maximum value of SAR (measured) = 2.17 W/kg

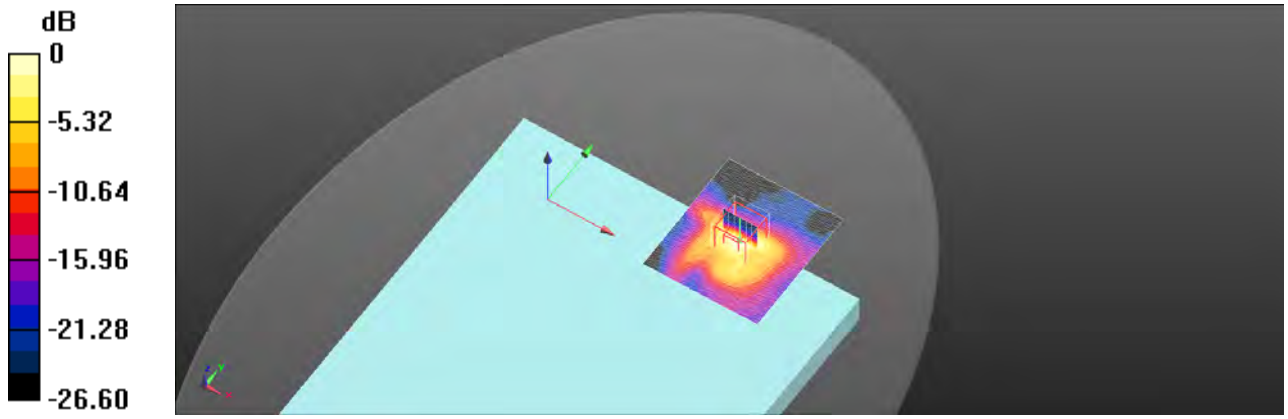

0 dB = 2.17 W/kg = 3.36 dBW/kg

Date: 2020/5/18

Report No. : E5202050006

WLAN 802.11ac(160M) 5.2G_Body_Back side_CH 50_0mm_Main

Communication System: WLAN 5G; Frequency: 5250 MHz; Duty Cycle: 1:0.988
Medium parameters used: f = 5250 MHz; σ = 4.642 S/m; ε_r = 36.665; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.9°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(5, 5, 5); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x91x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 1.91 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.9540 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 5.03 W/kg
SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.300 W/kg
Smallest distance from peaks to all points 3 dB below = 6.1 mm
Ratio of SAR at M2 to SAR at M1 = 51.3%
Maximum value of SAR (measured) = 2.17 W/kg

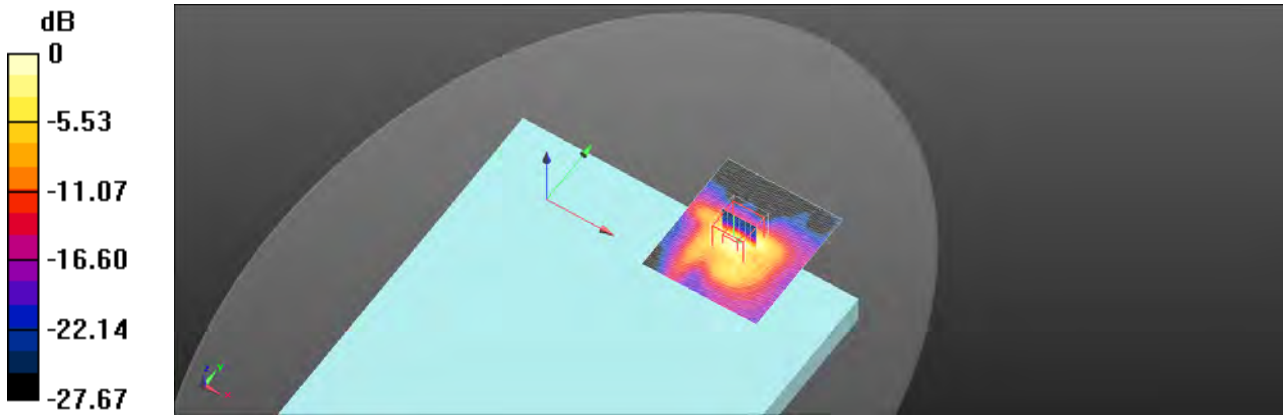

0 dB = 2.17 W/kg = 3.37 dBW/kg

Date: 2020/5/19

Report No. : E5202050006
WLAN 802.11n(40M) 5.3G_Body_Back side_CH 62_0mm_Main
Communication System: WLAN 5G; Frequency: 5310 MHz; Duty Cycle: 1:0.99
Medium parameters used: f = 5310 MHz; σ = 4.691 S/m; ε_r = 36.33; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(5, 5, 5); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x91x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 1.87 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.5930 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 5.05 W/kg
SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.278 W/kg
Smallest distance from peaks to all points 3 dB below = 6.1 mm
Ratio of SAR at M2 to SAR at M1 = 50.4%
Maximum value of SAR (measured) = 2.12 W/kg

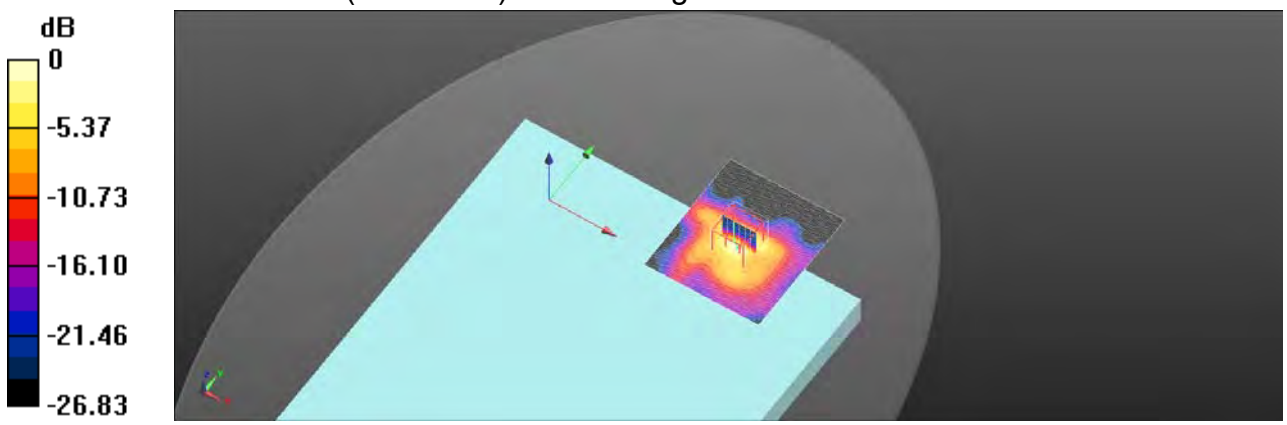

0 dB = 2.12 W/kg = 3.26 dBW/kg

Date: 2020/5/19

Report No. : E5202050006
WLAN 802.11ac(80M) 5.3G_Body_Back side_CH 58_0mm_Main
Communication System: WLAN 5G; Frequency: 5290 MHz; Duty Cycle: 1:0.99
Medium parameters used: f = 5290 MHz; σ = 4.672 S/m; ε_r = 36.353; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(5, 5, 5); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x91x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 1.86 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.7920 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 4.80 W/kg
SAR(1 g) = 0.992 W/kg; SAR(10 g) = 0.276 W/kg
Smallest distance from peaks to all points 3 dB below = 6.1 mm
Ratio of SAR at M2 to SAR at M1 = 50.7%
Maximum value of SAR (measured) = 2.10 W/kg

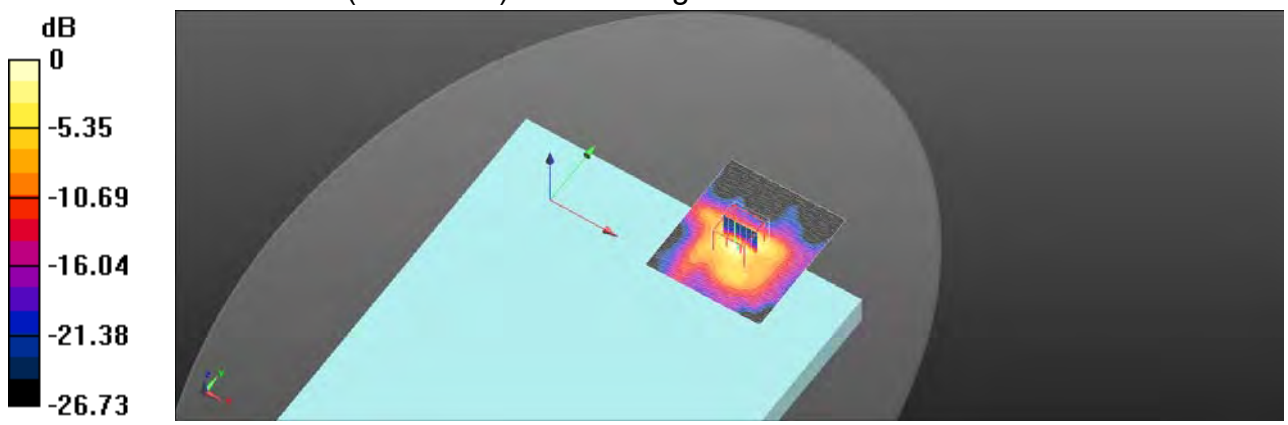

0 dB = 2.10 W/kg = 3.23 dBW/kg

Date: 2020/5/20

Report No. : E5202050006

WLAN 802.11ac(80M) 5.6G_Body_Back side_CH 138_0mm_Main

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty Cycle: 1:0.99
Medium parameters used: f = 5690 MHz; σ = 5.029 S/m; ε_r = 35.589; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.9°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(4.75, 4.75, 4.75); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x91x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 1.74 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.200 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 5.09 W/kg
SAR(1 g) = 0.933 W/kg; SAR(10 g) = 0.240 W/kg
Smallest distance from peaks to all points 3 dB below = 5.4 mm
Ratio of SAR at M2 to SAR at M1 = 48.1%
Maximum value of SAR (measured) = 2.04 W/kg

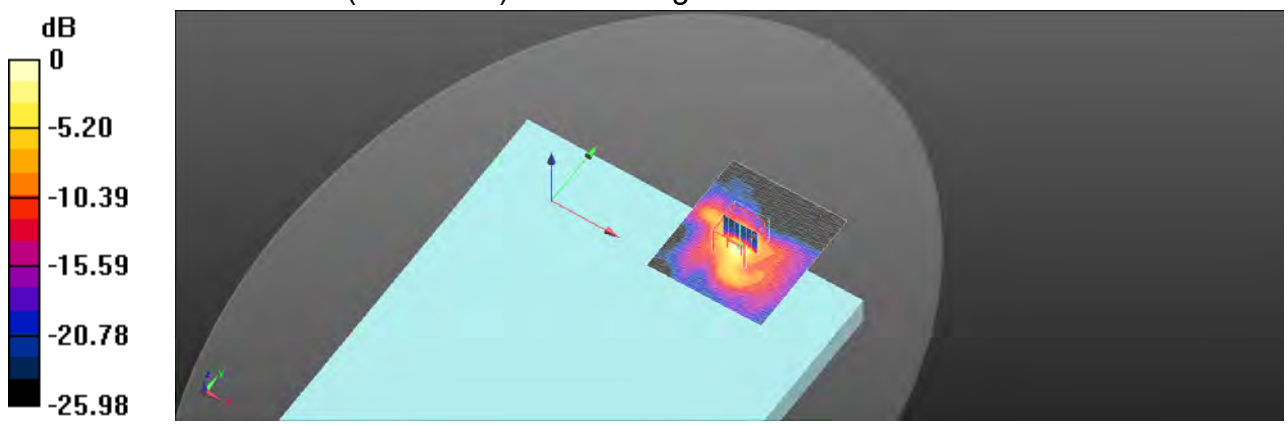

0 dB = 2.04 W/kg = 3.09 dBW/kg

Date: 2020/5/20

Report No. : E5202050006

WLAN 802.11ac(160M) 5.6G_Body_Back side_CH 114_0mm_Main

Communication System: WLAN 5G; Frequency: 5570 MHz; Duty Cycle: 1:0.988
Medium parameters used: f = 5570 MHz; σ = 4.91 S/m; ε_r = 35.741; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.9°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(4.7, 4.7, 4.7); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x91x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 1.76 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.6430 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 4.90 W/kg
SAR(1 g) = 0.929 W/kg; SAR(10 g) = 0.249 W/kg
Smallest distance from peaks to all points 3 dB below = 5.4 mm
Ratio of SAR at M2 to SAR at M1 = 49.2%
Maximum value of SAR (measured) = 1.99 W/kg

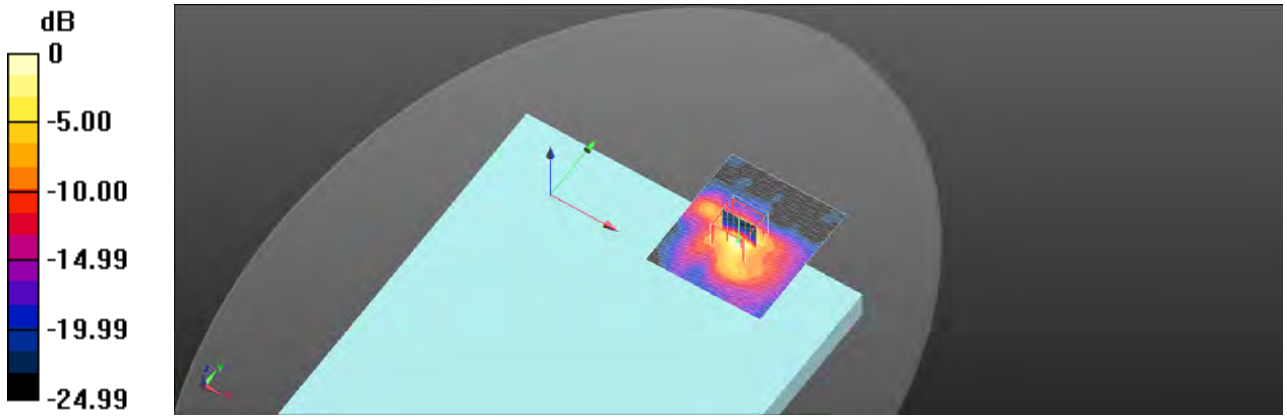

0 dB = 1.99 W/kg = 3.00 dBW/kg

Date: 2020/5/21

Report No. : E5202050006
WLAN 802.11n(40M) 5.8G_Body_Back side_CH 151_0mm_Main
Communication System: WLAN 5G; Frequency: 5755 MHz; Duty Cycle: 1:0.99
Medium parameters used: f = 5755 MHz; σ = 5.074 S/m; ε_r = 35.641; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(4.75, 4.75, 4.75); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x91x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 1.92 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.9580 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 5.79 W/kg
SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.267 W/kg
Smallest distance from peaks to all points 3 dB below = 5.7 mm
Ratio of SAR at M2 to SAR at M1 = 46.6%
Maximum value of SAR (measured) = 2.21 W/kg

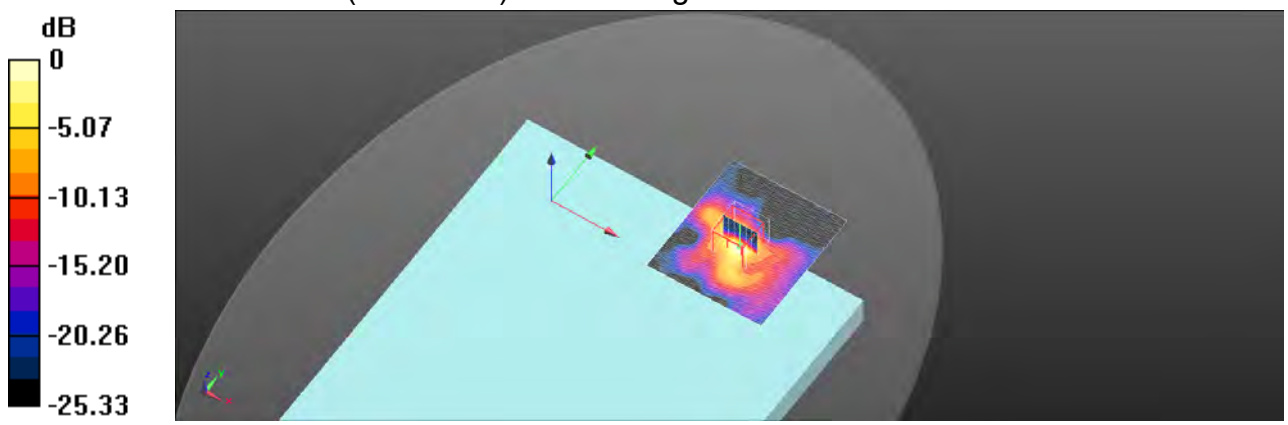

0 dB = 2.21 W/kg = 3.45 dBW/kg

Date: 2020/5/21

Report No. : E5202050006

WLAN 802.11ac(80M) 5.8G_Body_Back side_CH 155_0mm_Main

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty Cycle: 1:0.99
Medium parameters used: f = 5775 MHz; σ = 5.095 S/m; ε_r = 35.601; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(4.75, 4.75, 4.75); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x91x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 1.95 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.8030 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 5.94 W/kg
SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.265 W/kg
Smallest distance from peaks to all points 3 dB below = 4.9 mm
Ratio of SAR at M2 to SAR at M1 = 46.1%
Maximum value of SAR (measured) = 2.20 W/kg

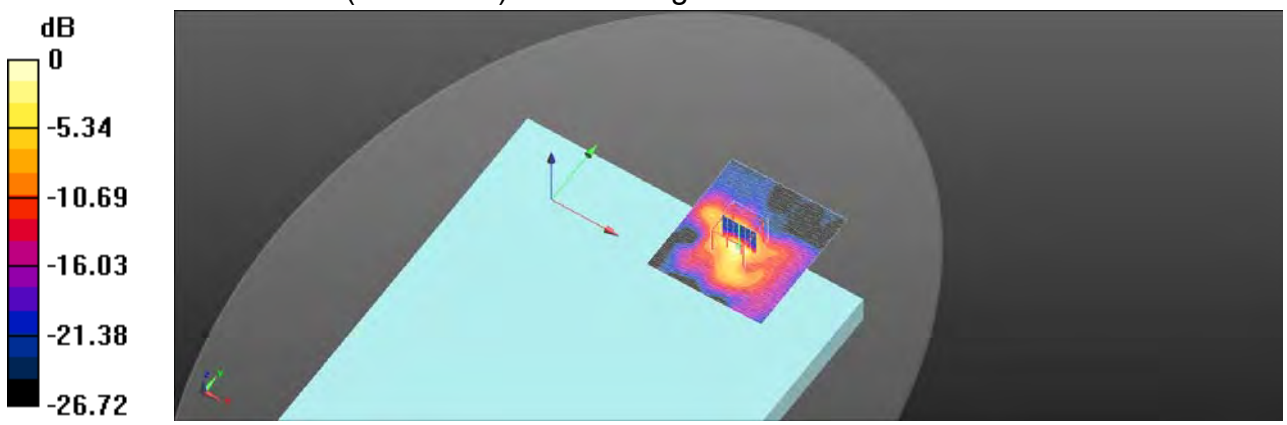

0 dB = 2.20 W/kg = 3.43 dBW/kg

Date: 2020/5/17

Report No. : E5202050006
WLAN 802.11b_Body_Back side_CH 6_0mm_Aux
Communication System: WLAN 2.45G; Frequency: 2437 MHz; Duty Cycle: 1:0.995
Medium parameters used: f = 2437 MHz; σ = 1.78 S/m; ε_r = 40.145; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.59, 7.59, 7.59); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (71x81x1): Interpolated grid: dx=12 mm, dy=12 mm
Maximum value of SAR (interpolated) = 1.34 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.953 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.63 W/kg
SAR(1 g) = 0.830 W/kg; SAR(10 g) = 0.373 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 56.5%
Maximum value of SAR (measured) = 1.18 W/kg

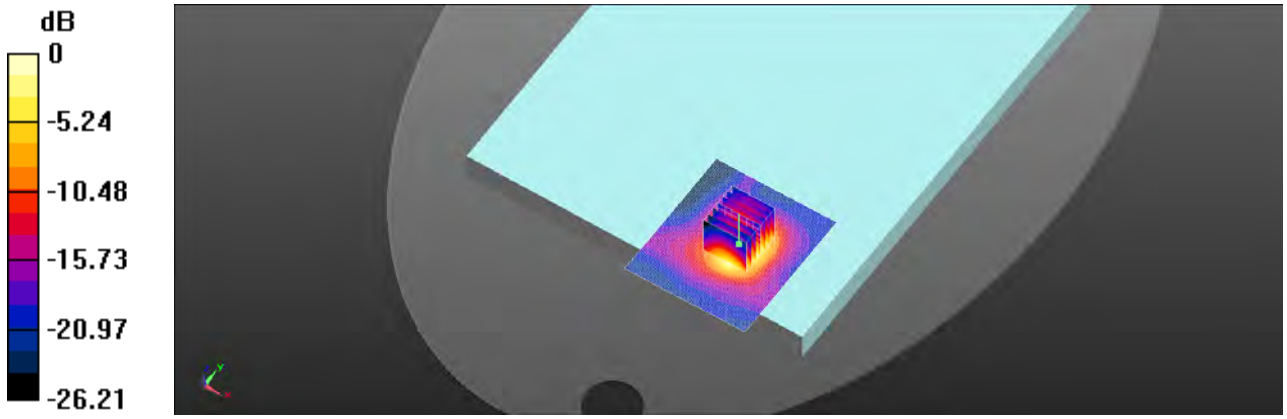

0 dB = 1.18 W/kg = 0.71 dBW/kg

Date: 2020/5/17

Report No. : E5202050006
Bluetooth(GFSK)_Body_Back side_CH 78_0mm_Aux
Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:0.768
Medium parameters used: f = 2480 MHz; σ = 1.818 S/m; ε_r = 40.07; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.59, 7.59, 7.59); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (71x81x1): Interpolated grid: dx=12 mm, dy=12 mm
Maximum value of SAR (interpolated) = 0.285 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.683 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.324 W/kg
SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.077 W/kg
Smallest distance from peaks to all points 3 dB below = 9.8 mm
Ratio of SAR at M2 to SAR at M1 = 52.6%
Maximum value of SAR (measured) = 0.235 W/kg

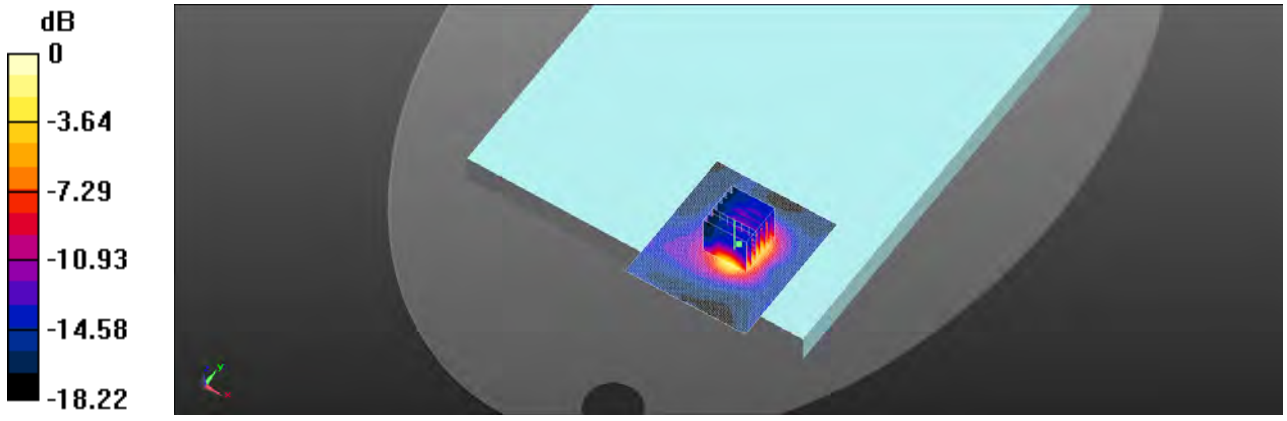

0 dB = 0.235 W/kg = -6.29 dBW/kg

Date: 2020/5/18

Report No. : E5202050006
WLAN 802.11ac(80M) 5.2G_Body_Back side_CH 42_0mm_Aux
Communication System: WLAN 5G; Frequency: 5210 MHz; Duty Cycle: 1:0.99
Medium parameters used: f = 5210 MHz; σ = 4.601 S/m; ε_r = 36.694; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.9°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(5, 5, 5); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x91x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 2.14 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.7030 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 4.63 W/kg
SAR(1 g) = 0.966 W/kg; SAR(10 g) = 0.263 W/kg
Smallest distance from peaks to all points 3 dB below = 6.4 mm
Ratio of SAR at M2 to SAR at M1 = 50.3%
Maximum value of SAR (measured) = 2.13 W/kg

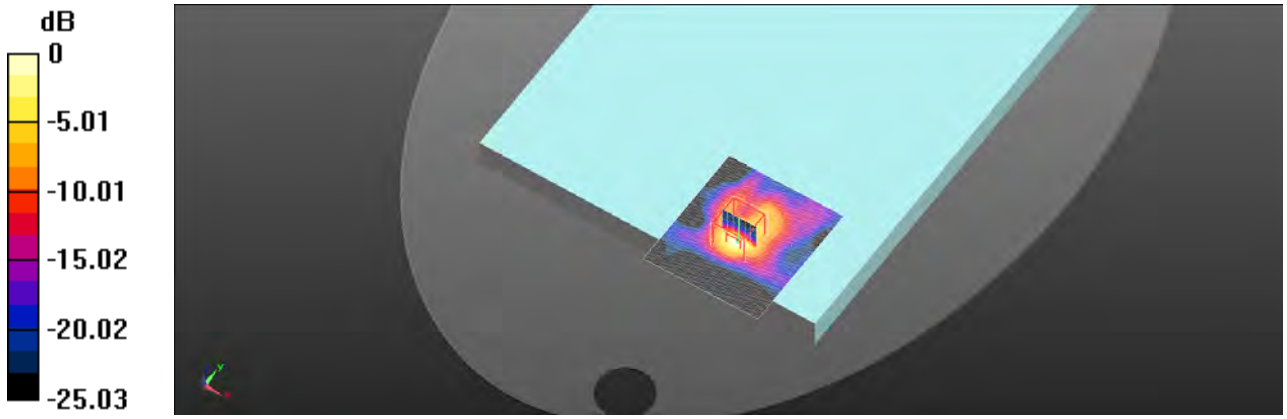

0 dB = 2.13 W/kg = 3.29 dBW/kg

Date: 2020/5/18

Report No. : E5202050006
WLAN 802.11ac(160M) 5.2G_Body_Back side_CH 50_0mm_Aux
Communication System: WLAN 5G; Frequency: 5250 MHz; Duty Cycle: 1:0.988
Medium parameters used: f = 5250 MHz; σ = 4.642 S/m; ε_r = 36.665; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.9°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(5, 5, 5); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x91x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 2.18 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.9430 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 4.84 W/kg
SAR(1 g) = 0.966 W/kg; SAR(10 g) = 0.261 W/kg
Smallest distance from peaks to all points 3 dB below = 6.1 mm
Ratio of SAR at M2 to SAR at M1 = 49.2%
Maximum value of SAR (measured) = 2.17 W/kg

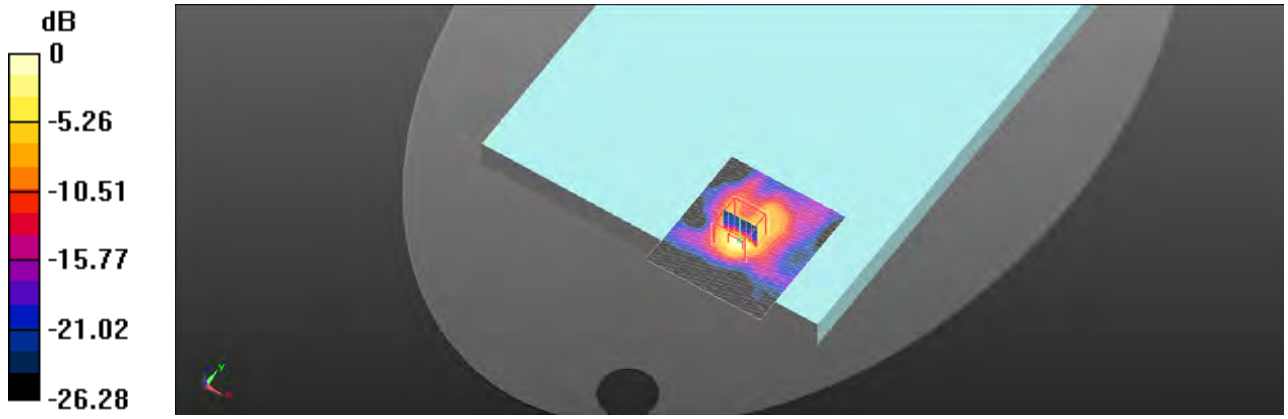

0 dB = 2.17 W/kg = 3.37 dBW/kg

Date: 2020/5/19

Report No. : E5202050006
WLAN 802.11n(40M) 5.3G_Body_Back side_CH 62_0mm_Aux
Communication System: WLAN 5G; Frequency: 5310 MHz; Duty Cycle: 1:0.99
Medium parameters used: f = 5310 MHz; σ = 4.691 S/m; ε_r = 36.33; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(5, 5, 5); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x91x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 2.49 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.5680 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 5.55 W/kg
SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.295 W/kg
Smallest distance from peaks to all points 3 dB below = 5.8 mm
Ratio of SAR at M2 to SAR at M1 = 48.7%
Maximum value of SAR (measured) = 2.45 W/kg

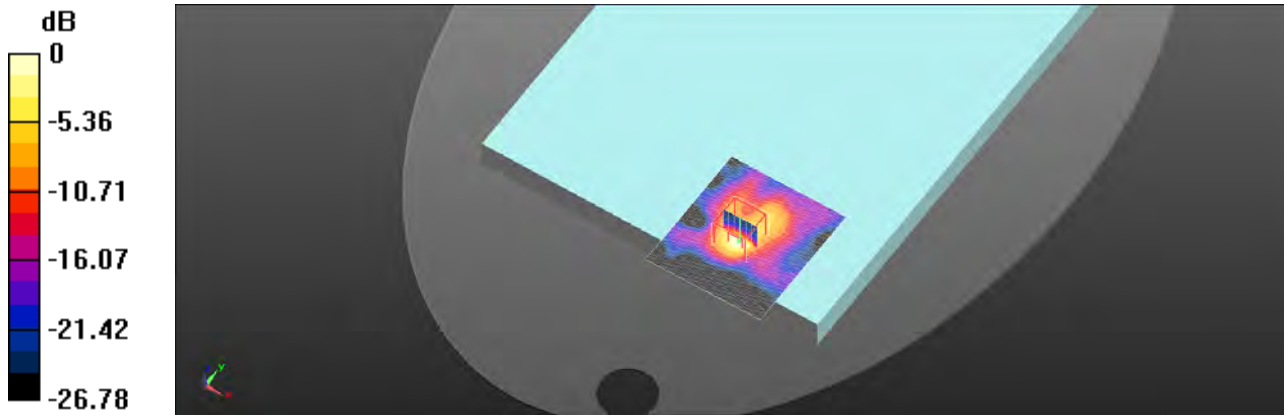

0 dB = 2.45 W/kg = 3.88 dBW/kg

Date: 2020/5/19

Report No. : E5202050006
WLAN 802.11ac(80M) 5.3G_Body_Back side_CH 58_0mm_Aux
Communication System: WLAN 5G; Frequency: 5290 MHz; Duty Cycle: 1:0.99
Medium parameters used: f = 5290 MHz; σ = 4.672 S/m; ε_r = 36.353; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(5, 5, 5); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x91x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 2.49 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.8040 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 5.14 W/kg
SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.275 W/kg
Smallest distance from peaks to all points 3 dB below = 5.8 mm
Ratio of SAR at M2 to SAR at M1 = 49.2%
Maximum value of SAR (measured) = 2.31 W/kg

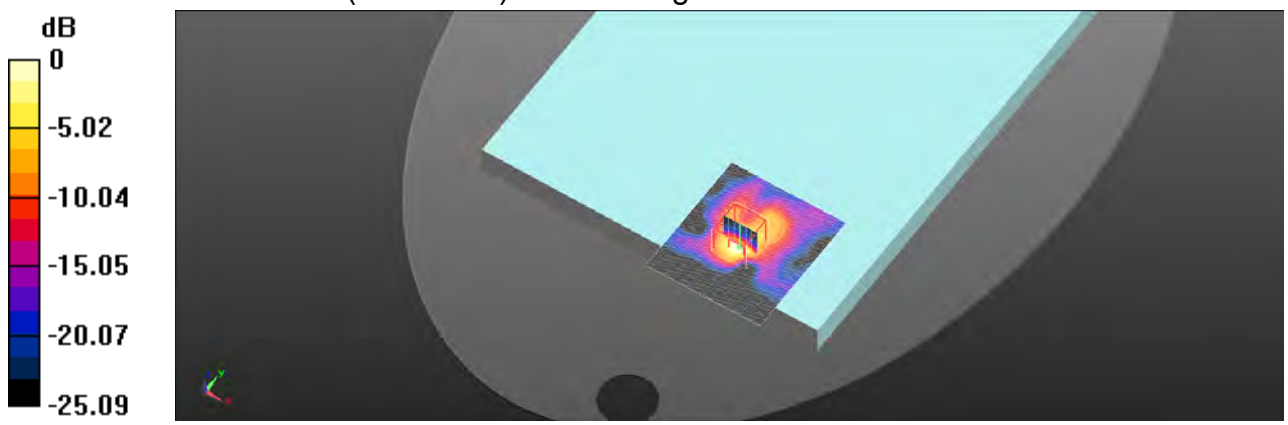

0 dB = 2.31 W/kg = 3.63 dBW/kg

Date: 2020/5/20

Report No. : E5202050006
WLAN 802.11ac(80M) 5.6G_Body_Back side_CH 106_0mm_Aux
Communication System: WLAN 5G; Frequency: 5530 MHz; Duty Cycle: 1:0.99
Medium parameters used: f = 5530 MHz; σ = 4.866 S/m; ε_r = 35.779; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.9°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(4.7, 4.7, 4.7); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x91x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 2.15 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.4660 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 4.93 W/kg
SAR(1 g) = 0.938 W/kg; SAR(10 g) = 0.272 W/kg
Smallest distance from peaks to all points 3 dB below = 5.7 mm
Ratio of SAR at M2 to SAR at M1 = 48.6%
Maximum value of SAR (measured) = 2.02 W/kg

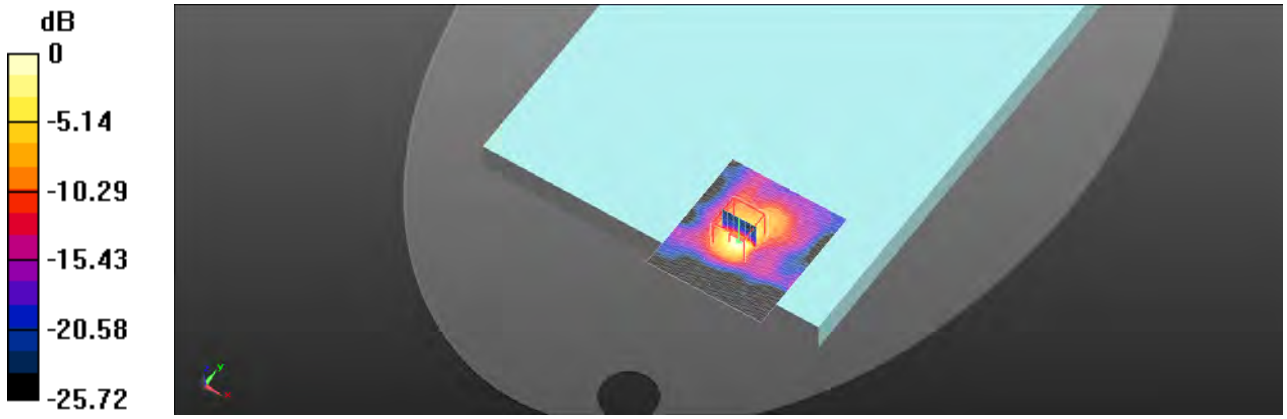

0 dB = 2.02 W/kg = 3.06 dBW/kg

Date: 2020/5/20

Report No. : E5202050006

WLAN 802.11ac(160M) 5.6G_Body_Back side_CH 114_0mm_Aux

Communication System: WLAN 5G; Frequency: 5570 MHz; Duty Cycle: 1:0.988
Medium parameters used: f = 5570 MHz; σ = 4.91 S/m; ε_r = 35.741; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.9°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(4.7, 4.7, 4.7); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x91x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 2.20 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.3655 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 5.10 W/kg
SAR(1 g) = 0.949 W/kg; SAR(10 g) = 0.277 W/kg
Smallest distance from peaks to all points 3 dB below = 5.6 mm
Ratio of SAR at M2 to SAR at M1 = 46.9%
Maximum value of SAR (measured) = 2.05 W/kg

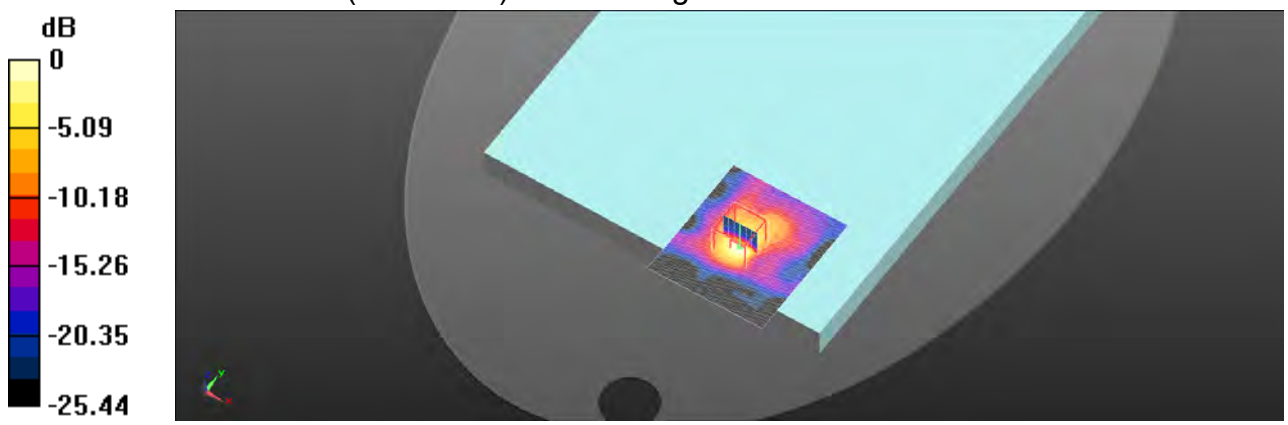

0 dB = 2.05 W/kg = 3.11 dBW/kg

Date: 2020/5/21

Report No. : E5202050006
WLAN 802.11n(40M) 5.8G_Body_Back side_CH 159_0mm_Aux
Communication System: WLAN 5G; Frequency: 5795 MHz; Duty Cycle: 1:0.99
Medium parameters used: f = 5795 MHz; σ = 5.111 S/m; ε_r = 35.602; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(4.75, 4.75, 4.75); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x91x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 2.23 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.7040 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 5.89 W/kg
SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.307 W/kg
Smallest distance from peaks to all points 3 dB below = 6.6 mm
Ratio of SAR at M2 to SAR at M1 = 44.7%
Maximum value of SAR (measured) = 2.31 W/kg

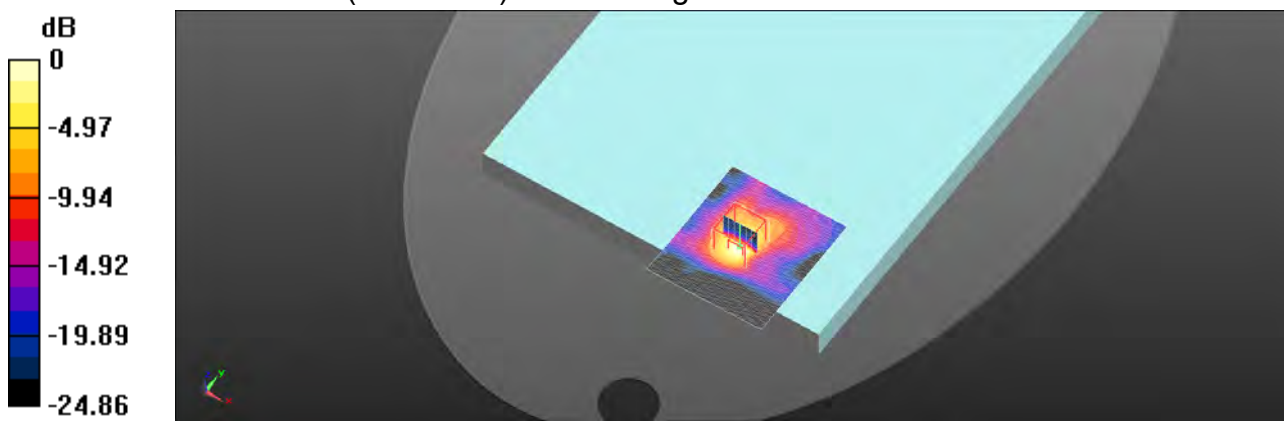

0 dB = 2.31 W/kg = 3.64 dBW/kg

Date: 2020/5/21

Report No. : E5202050006

WLAN 802.11ac(80M) 5.8G_Body_Back side_CH 155_0mm_Aux

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty Cycle: 1:0.99
Medium parameters used: f = 5775 MHz; σ = 5.095 S/m; ε_r = 35.601; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(4.75, 4.75, 4.75); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x91x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 2.26 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.7270 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 5.70 W/kg
SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.303 W/kg
Smallest distance from peaks to all points 3 dB below = 6.6 mm
Ratio of SAR at M2 to SAR at M1 = 45.8%
Maximum value of SAR (measured) = 2.26 W/kg

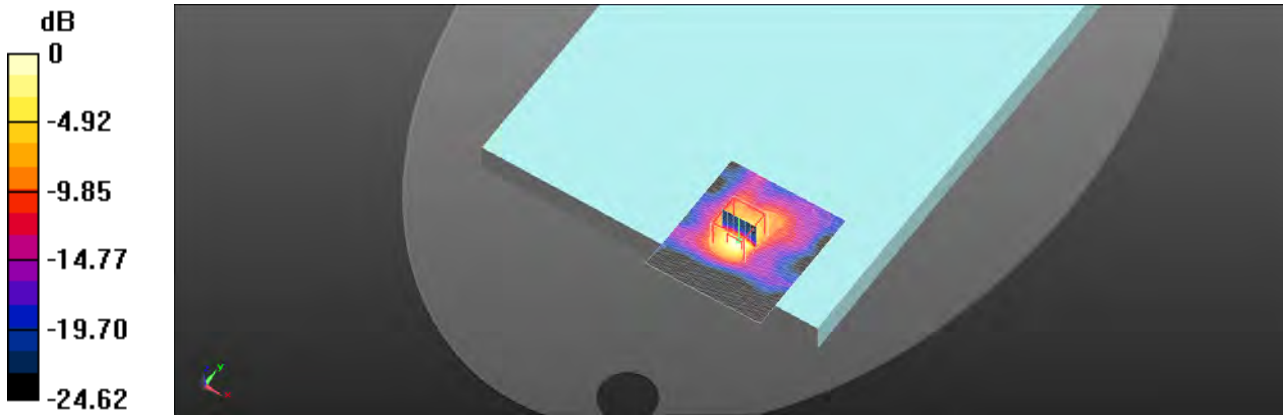

0 dB = 2.26 W/kg = 3.55 dBW/kg

Date: 2020/5/17

Report No. : E5202050006
WLAN 802.11b_Body_Bottom side_CH 10_0mm_Main
Communication System: WLAN 2.45G; Frequency: 2457 MHz; Duty Cycle: 1:0.995
Medium parameters used: f = 2457 MHz; σ = 1.798 S/m; ε_r = 40.077; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.59, 7.59, 7.59); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x71x1): Interpolated grid: dx=12 mm, dy=12 mm
Maximum value of SAR (interpolated) = 0.0519 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.3330 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.0710 W/kg
SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.019 W/kg
Smallest distance from peaks to all points 3 dB below = 5.3 mm
Ratio of SAR at M2 to SAR at M1 = 46.4%
Maximum value of SAR (measured) = 0.0516 W/kg

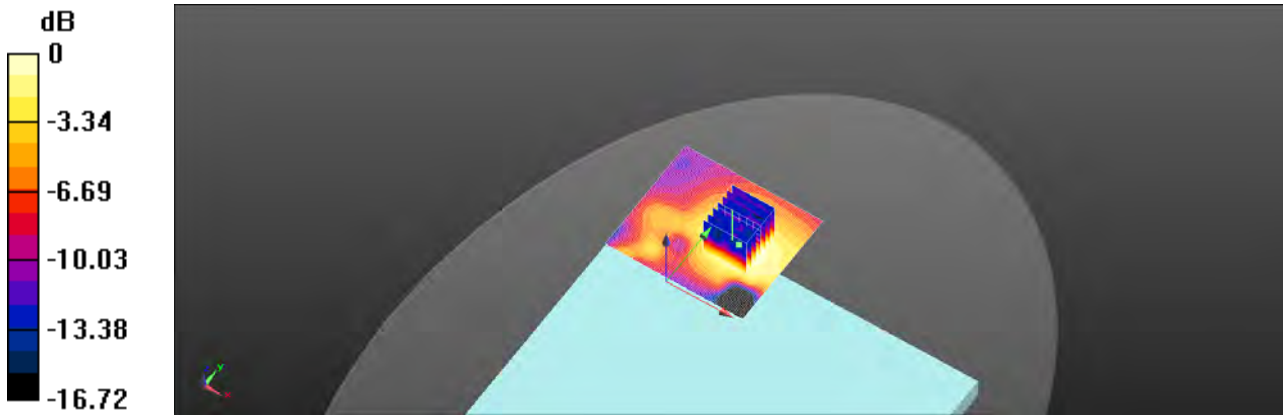

0 dB = 0.0516 W/kg = -12.87 dBW/kg

Date: 2020/5/18

Report No. : E5202050006
WLAN 802.11n(40M) 5.2G_Body_Bottom side_CH 46_0mm_Main
Communication System: WLAN 5G; Frequency: 5230 MHz; Duty Cycle: 1:0.99
Medium parameters used: f = 5230 MHz; σ = 4.622 S/m; ε_r = 36.67; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.9°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(5, 5, 5); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (91x71x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.113 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.7460 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.273 W/kg
SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.027 W/kg
Smallest distance from peaks to all points 3 dB below = 5.7 mm
Ratio of SAR at M2 to SAR at M1 = 49.9%
Maximum value of SAR (measured) = 0.101 W/kg

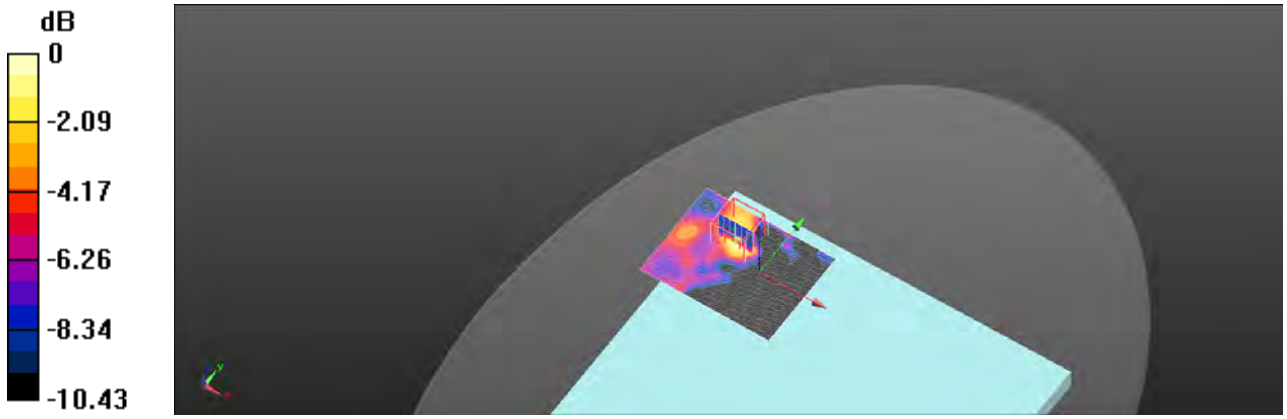

0 dB = 0.101 W/kg = -9.97 dBW/kg

Date: 2020/5/19

Report No. : E5202050006
WLAN 802.11a 5.3G_Body_Bottom side_CH 52_0mm_Main
Communication System: WLAN 5G; Frequency: 5260 MHz; Duty Cycle: 1:0.979
Medium parameters used: f = 5260 MHz; σ = 4.645 S/m; ε_r = 36.373; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(5, 5, 5); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x71x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.0966 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.6520 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.318 W/kg
SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.028 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 55.2%
Maximum value of SAR (measured) = 0.103 W/kg

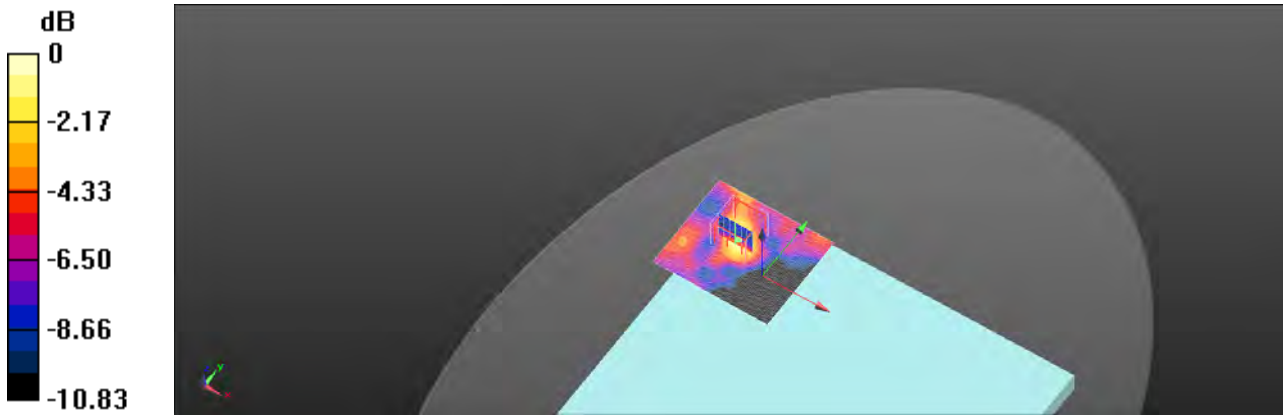

0 dB = 0.103 W/kg = -9.85 dBW/kg

Date: 2020/5/20

Report No. : E5202050006
WLAN 802.11ax(80M) 5.6G_Body_Bottom side_CH 138_0mm_Main
Communication System: WLAN 5G; Frequency: 5690 MHz; Duty Cycle: 1:0.99
Medium parameters used: f = 5690 MHz; σ = 5.029 S/m; ε_r = 35.589; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.9°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(4.75, 4.75, 4.75); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x71x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.124 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.4485 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.718 W/kg
SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.032 W/kg
Smallest distance from peaks to all points 3 dB below = 5.4 mm
Ratio of SAR at M2 to SAR at M1 = 45.2%
Maximum value of SAR (measured) = 0.136 W/kg

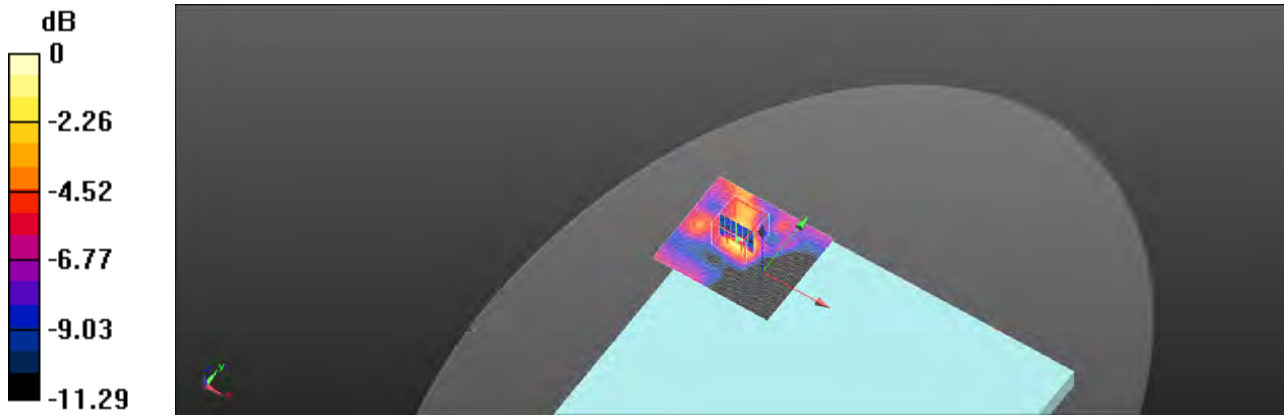

0 dB = 0.136 W/kg = -8.67 dBW/kg

Date: 2020/5/21

Report No. : E5202050006
WLAN 802.11n(40M) 5.8G_Body_Bottom side_CH 151_0mm_Main
Communication System: WLAN 5G; Frequency: 5755 MHz; Duty Cycle: 1:0.99
Medium parameters used: f = 5755 MHz; σ = 5.074 S/m; ε_r = 35.641; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(4.75, 4.75, 4.75); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x71x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.0955 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.7290 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.294 W/kg
SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.025 W/kg
Smallest distance from peaks to all points 3 dB below = 6.1 mm
Ratio of SAR at M2 to SAR at M1 = 53.4%
Maximum value of SAR (measured) = 0.104 W/kg

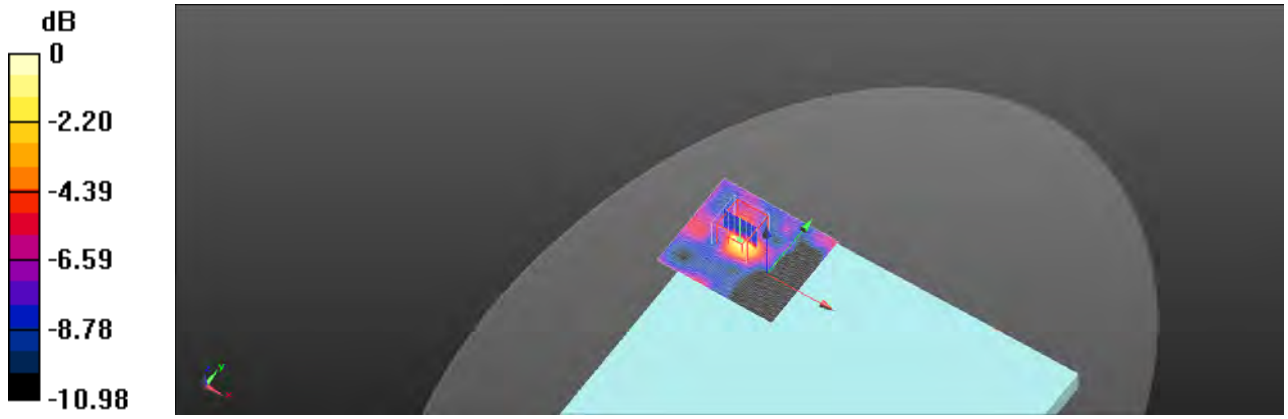

0 dB = 0.104 W/kg = -9.81 dBW/kg

Date: 2020/5/17

Report No. : E5202050006
WLAN 802.11b_Body_Bottom side_CH 10_0mm_Aux
Communication System: WLAN 2.45G; Frequency: 2457 MHz; Duty Cycle: 1:0.995
Medium parameters used: f = 2457 MHz; σ = 1.798 S/m; ε_r = 40.077; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.59, 7.59, 7.59); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x71x1): Interpolated grid: dx=12 mm, dy=12 mm
Maximum value of SAR (interpolated) = 0.0673 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.7430 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.115 W/kg
SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.018 W/kg
Smallest distance from peaks to all points 3 dB below = 5.9 mm
Ratio of SAR at M2 to SAR at M1 = 42.6%
Maximum value of SAR (measured) = 0.0722 W/kg

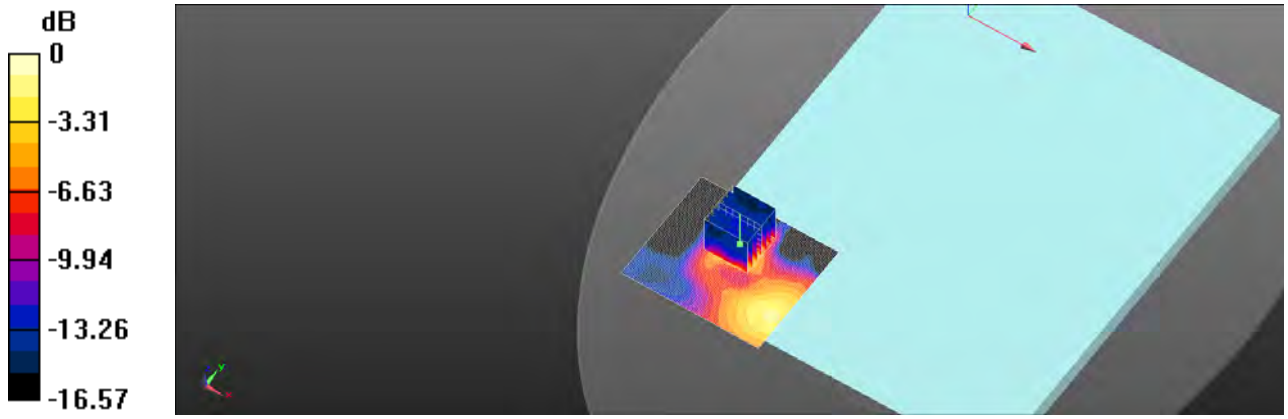

0 dB = 0.0722 W/kg = -11.41 dBW/kg

Date: 2020/5/17

Report No. : E5202050006
WLAN 802.11g_Body_Bottom side_CH 2_0mm_Aux
Communication System: WLAN 2.45G; Frequency: 2417 MHz; Duty Cycle: 1:0.979
Medium parameters used: f = 2417 MHz; σ = 1.762 S/m; ε_r = 40.142; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.59, 7.59, 7.59); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x71x1): Interpolated grid: dx=12 mm, dy=12 mm
Maximum value of SAR (interpolated) = 0.0832 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.6470 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.127 W/kg
SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.022 W/kg
Smallest distance from peaks to all points 3 dB below = 5.4 mm
Ratio of SAR at M2 to SAR at M1 = 45.3%
Maximum value of SAR (measured) = 0.0835 W/kg

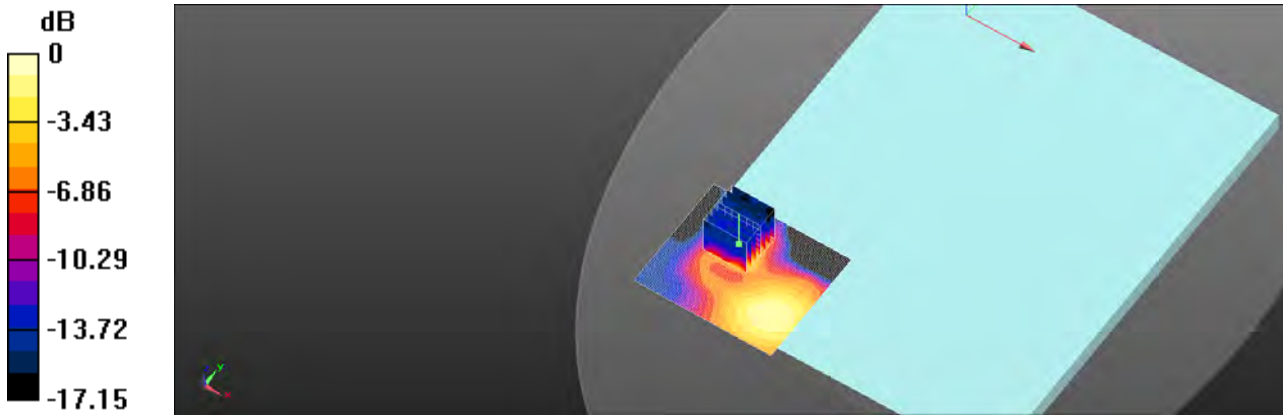

0 dB = 0.0835 W/kg = -10.78 dBW/kg

Date: 2020/5/17

Report No. : E5202050006
Bluetooth(GFSK)_Body_Bottom side_CH 78_0mm_Aux
Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:0.768
Medium parameters used: f = 2480 MHz; σ = 1.818 S/m; ε_r = 40.07; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.59, 7.59, 7.59); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x71x1): Interpolated grid: dx=12 mm, dy=12 mm
Maximum value of SAR (interpolated) = 0.00560 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.5250 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.00836 W/kg
SAR(1 g) = 0.00426 W/kg; SAR(10 g) = 0.00142 W/kg
Smallest distance from peaks to all points 3 dB below = 5.3 mm
Ratio of SAR at M2 to SAR at M1 = 61.9%
Maximum value of SAR (measured) = 0.00594 W/kg

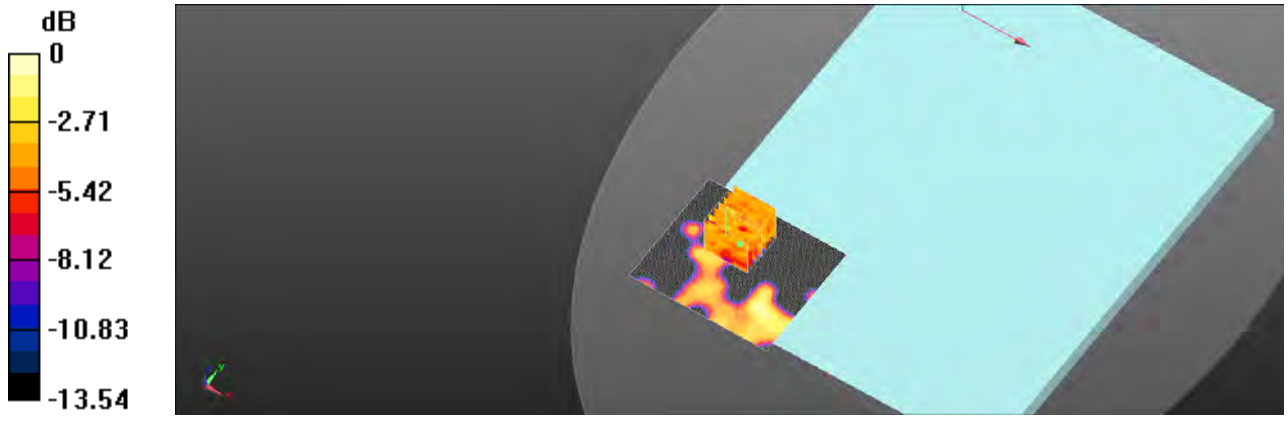

0 dB = 0.00594 W/kg = -22.26 dBW/kg

Date: 2020/5/18

Report No. : E5202050006

WLAN 802.11n(40M) 5.2G_Body_Bottom side_CH 46_0mm_Aux

Communication System: WLAN 5G; Frequency: 5230 MHz; Duty Cycle: 1:0.99
Medium parameters used: f = 5230 MHz; σ = 4.622 S/m; ε_r = 36.67; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.9°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(5, 5, 5); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (91x81x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.253 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.668 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.819 W/kg
SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.044 W/kg
Smallest distance from peaks to all points 3 dB below = 4.6 mm
Ratio of SAR at M2 to SAR at M1 = 50.8%
Maximum value of SAR (measured) = 0.285 W/kg

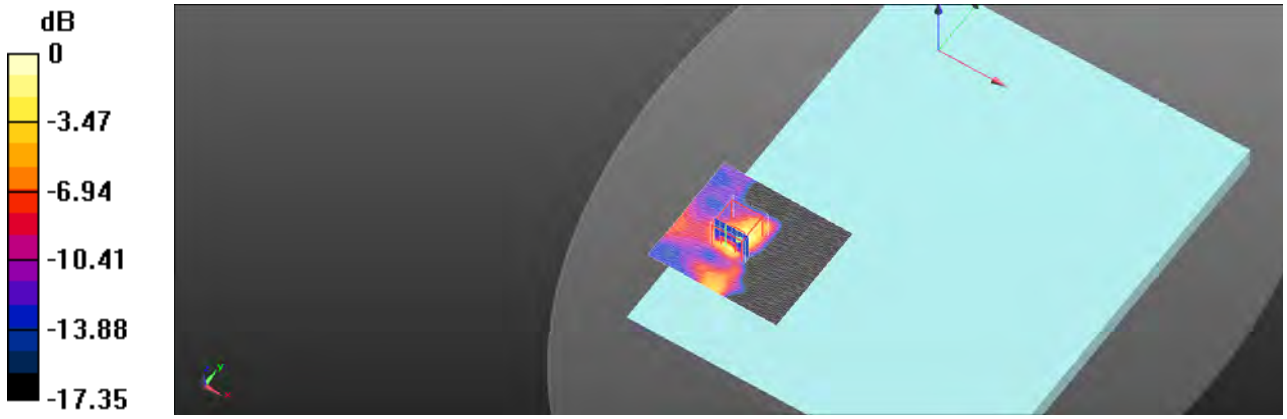

0 dB = 0.285 W/kg = -5.46 dBW/kg

Date: 2020/5/19

Report No. : E5202050006
WLAN 802.11a 5.3G_Body_Bottom side_CH 56_0mm_Aux
Communication System: WLAN 5G; Frequency: 5280 MHz; Duty Cycle: 1:0.979
Medium parameters used: f = 5280 MHz; σ = 4.662 S/m; ε_r = 36.35; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(5, 5, 5); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (91x81x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.104 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.3850 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.244 W/kg
SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.023 W/kg
Smallest distance from peaks to all points 3 dB below = 4.8 mm
Ratio of SAR at M2 to SAR at M1 = 49.1%
Maximum value of SAR (measured) = 0.117 W/kg

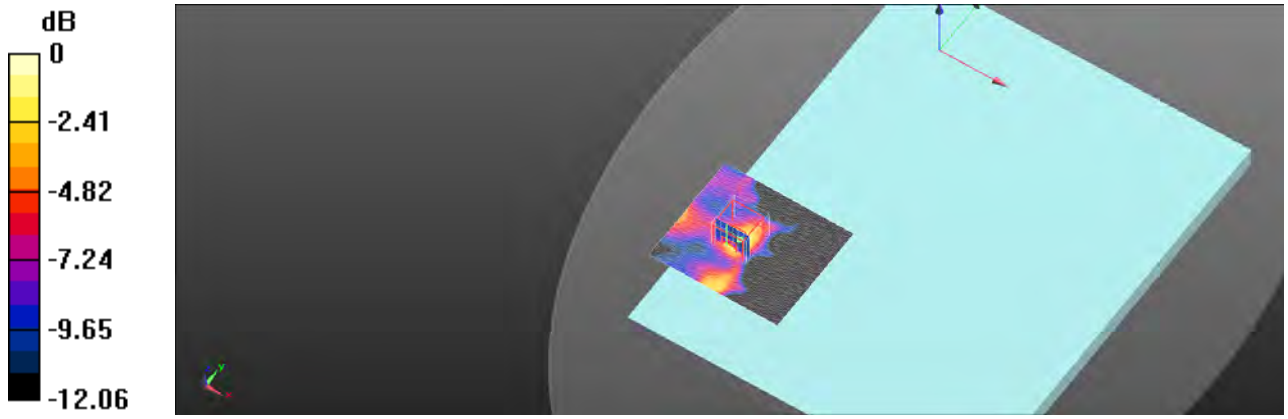

0 dB = 0.117 W/kg = -9.30 dBW/kg

Date: 2020/5/20

Report No. : E5202050006
WLAN 802.11ac(80M) 5.6G_Body_Bottom side_CH 138_0mm_Aux
Communication System: WLAN 5G; Frequency: 5690 MHz; Duty Cycle: 1:0.99
Medium parameters used: f = 5690 MHz; σ = 5.029 S/m; ε_r = 35.589; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.9°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(4.75, 4.75, 4.75); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x81x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.113 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.3210 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.223 W/kg
SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.027 W/kg
Smallest distance from peaks to all points 3 dB below = 6.8 mm
Ratio of SAR at M2 to SAR at M1 = 48.1%
Maximum value of SAR (measured) = 0.108 W/kg

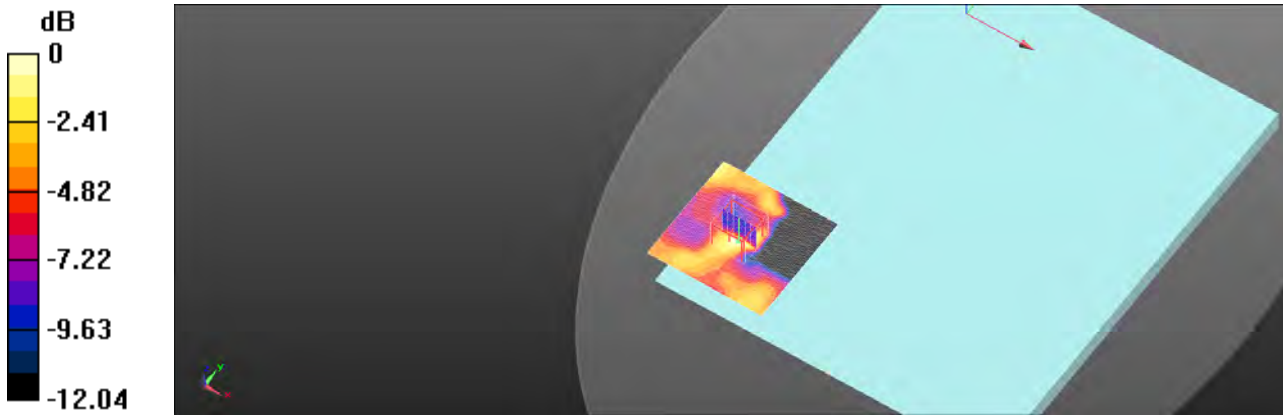

0 dB = 0.108 W/kg = -9.66 dBW/kg

Date: 2020/5/21

Report No. : E5202050006

WLAN 802.11n(40M) 5.8G_Body_Bottom side_CH 159_0mm_Aux

Communication System: WLAN 5G; Frequency: 5795 MHz; Duty Cycle: 1:0.99
Medium parameters used: f = 5795 MHz; σ = 5.111 S/m; ε_r = 35.602; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(4.75, 4.75, 4.75); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x81x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.108 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.6010 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.283 W/kg
SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.027 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 49.1%
Maximum value of SAR (measured) = 0.107 W/kg

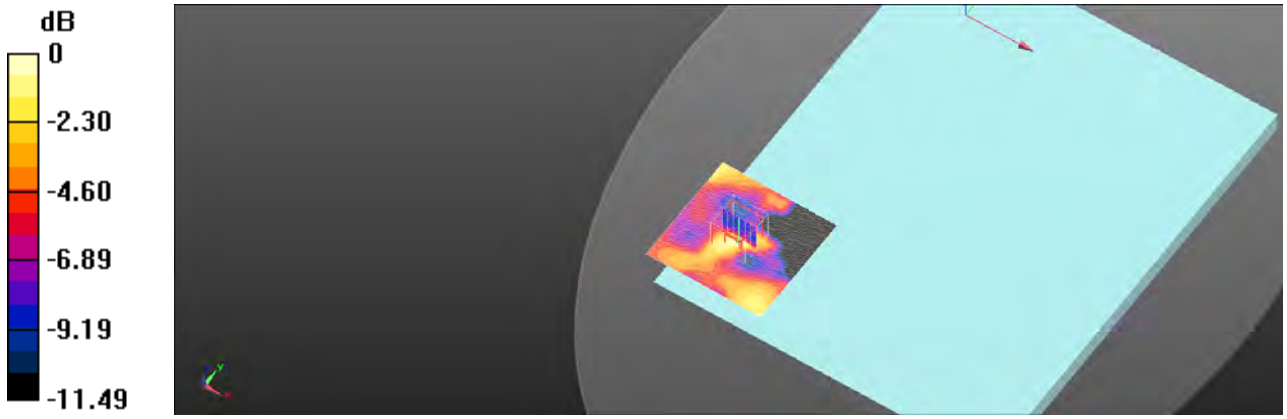

0 dB = 0.107 W/kg = -9.72 dBW/kg

6. SAR System Performance Verification

Date: 2020/5/17

Report No. : E5202050006
Dipole 2450 MHz_SN:727
Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: f = 2450 MHz; σ = 1.79 S/m; ε_r = 40.086; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.59, 7.59, 7.59); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (71x91x1): Interpolated grid: dx=12 mm, dy=12 mm
Maximum value of SAR (interpolated) = 26.6 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 118.0 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 36.7 W/kg
SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.28 W/kg
Smallest distance from peaks to all points 3 dB below = 9.8 mm
Ratio of SAR at M2 to SAR at M1 = 44.2%
Maximum value of SAR (measured) = 26.1 W/kg

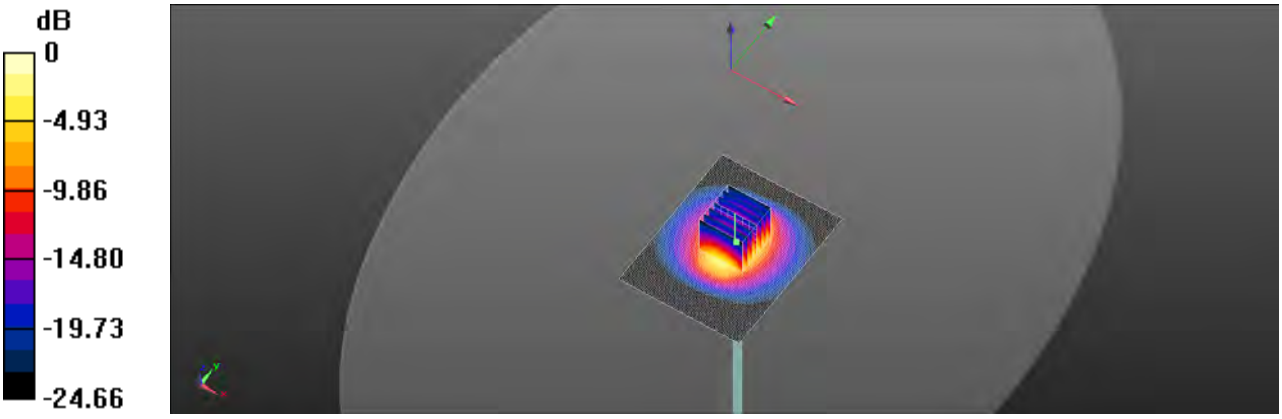

0 dB = 26.1 W/kg = 14.16 dBW/kg

Date: 2020/5/18

Report No. : E5202050006
Dipole 5200 MHz_SN:1023
Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5200 MHz; σ = 4.591 S/m; ε_r = 36.705; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.9°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(5, 5, 5); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (61x81x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 25.4 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 70.90 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 50.7 W/kg
SAR(1 g) = 8.02 W/kg; SAR(10 g) = 2.22 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 50.9%
Maximum value of SAR (measured) = 24.1 W/kg

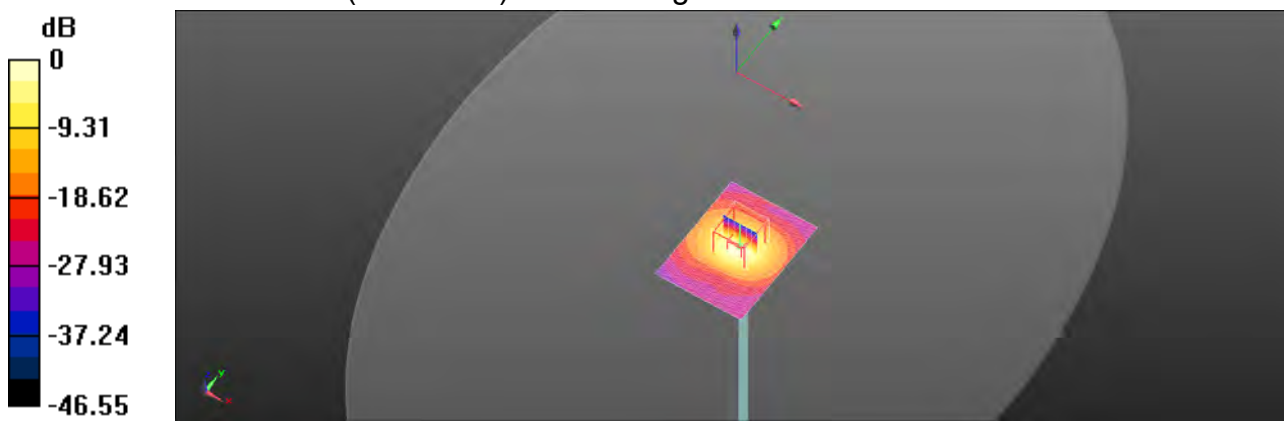

0 dB = 24.1 W/kg = 13.81 dBW/kg

Date: 2020/5/19

Report No. : E5202050006
Dipole 5300 MHz_SN:1023
Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5300 MHz; σ = 4.683 S/m; ε_r = 36.338; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(5, 5, 5); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (61x81x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 24.1 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 64.14 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 47.8 W/kg
SAR(1 g) = 8.35 W/kg; SAR(10 g) = 2.35 W/kg
Smallest distance from peaks to all points 3 dB below = 7.5 mm
Ratio of SAR at M2 to SAR at M1 = 50.5%
Maximum value of SAR (measured) = 22.5 W/kg

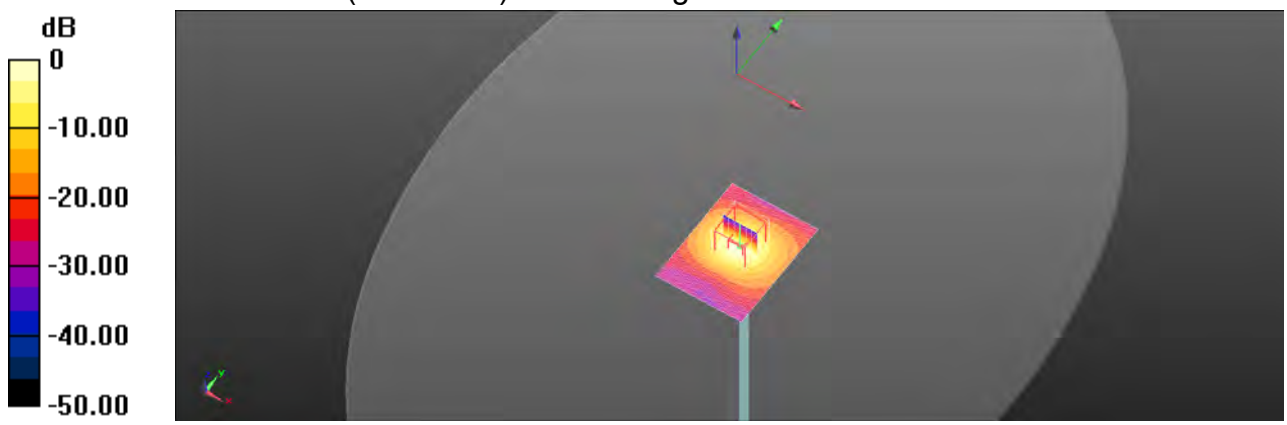

0 dB = 22.5 W/kg = 13.52 dBW/kg

Date: 2020/5/20

Report No. : E5202050006
Dipole 5600 MHz_SN:1023
Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5600 MHz; σ = 4.937 S/m; ε_r = 35.72; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.9°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(4.7, 4.7, 4.7); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (61x81x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 22.1 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 70.99 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 48.0 W/kg
SAR(1 g) = 8.33 W/kg; SAR(10 g) = 2.38 W/kg
Smallest distance from peaks to all points 3 dB below = 7.6 mm
Ratio of SAR at M2 to SAR at M1 = 49.3%
Maximum value of SAR (measured) = 22.1 W/kg

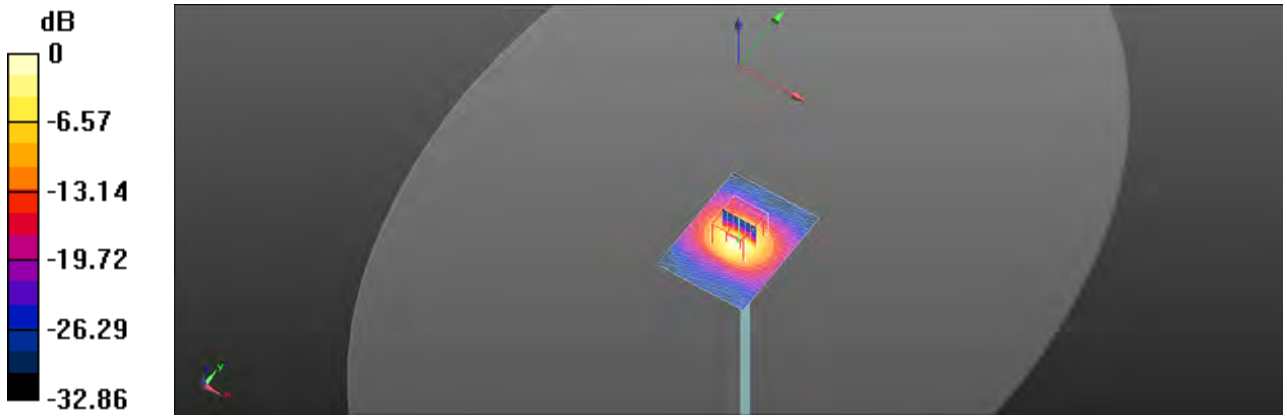

0 dB = 22.1 W/kg = 13.44 dBW/kg

Date: 2020/5/21

Report No. : E5202050006
Dipole 5800 MHz_SN:1023
Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5800 MHz; σ = 5.119 S/m; ε_r = 35.579; ρ = 1000 kg/m^3
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(4.75, 4.75, 4.75); Calibrated: 2020/2/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2019/8/27
- Phantom: ELI
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (61x81x1): Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 26.1 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 62.77 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 56.7 W/kg
SAR(1 g) = 8.11 W/kg; SAR(10 g) = 2.29 W/kg
Smallest distance from peaks to all points 3 dB below = 7.6 mm
Ratio of SAR at M2 to SAR at M1 = 46%
Maximum value of SAR (measured) = 23.9 W/kg

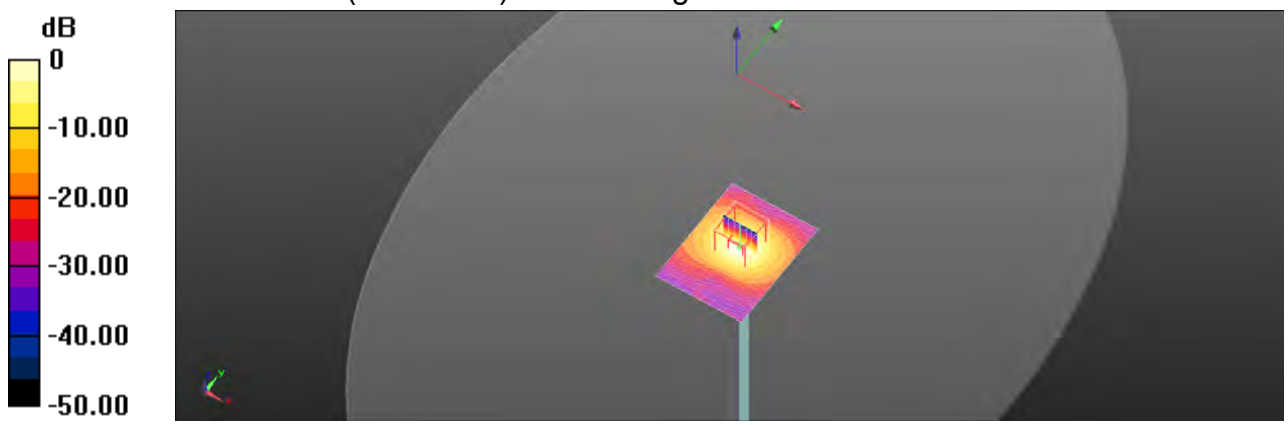

0 dB = 23.9 W/kg = 13.78 dBW/kg

7. Uncertainty Budget

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

A	c	D	e		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	∞
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	2.05%	N	1	1	0.64	0.43	1.31%	0.88%	M
Liquid Conductivity (mea.)	2.92%	N	1	1	0.6	0.49	1.75%	1.43%	M
Combined standard uncertainty		RSS					11.92%	11.83%	
Expant uncertainty (95% confidence interval), K=2							23.84%	23.65%	

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

A	c	D	e		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	∞
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	2.35%	N	1	1	0.64	0.43	1.50%	1.01%	M
Liquid Conductivity (mea.)	0.56%	N	1	1	0.6	0.49	0.34%	0.27%	M
Combined standard uncertainty		RSS					11.52%	11.46%	
Expant uncertainty (95% confidence interval), K=2							23.04%	22.91%	

Appendixes

Refer to separated files for the following appendixes.

E5202050006 SAR_Appendix A Photographs

E5202050006 SAR_Appendix B DAE & Probe Cal. Certificate

E5202050006 SAR_Appendix C Phantom Description & Dipole Cal. Certificate

- End of report -