

Page: 1 of 129

RF Exposure report





The following samples were submitted and identified on behalf of the client as:

Product Name Notebook Computer

Brand Name acer
Model No. N20Q10

Applicant Acer Incorporated

8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi, New Taipei City

22181, Taiwan (R.O.C)

Standards IEEE/ANSI C95.1-1992, IEEE 1528-2013

FCC ID HLZAX211D2

Date of EUT Receipt Nov. 07, 2022

Date of Test(s) Nov. 20, 2022 ~ Nov. 26, 2022

Date of Issue Feb. 01, 2023

In the configuration tested, the EUT complied with the standards specified above.

Remarks

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Ltd. Central RF Lab or testing done by SGS Taiwan Ltd. Central RF Lab in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Ltd. Central RF Lab in writing.

Signed on behalf of SGS

Clerk / Cindy Chou	PM / Tom Chiang	Approved By / John Yeh
Cindy Chou	Tom Chiang	John Teh
		D. (. F. b. 04 0000

Date: Feb. 01, 2023

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除业只有约明,此程生处用度外侧经少量,同时此类早度内向的工,大规生土领土公司事富统司,不可如公海侧。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 2 of 129

Revision History

Report Number	Revision	Description	Issue Date	Revised By	Remark
TESA2211000463E5	00	Initial creation of document	Dec. 16, 2022	Cindy Chou	*
TESA2211000463E5	01	Modify Co-SAR	Feb. 01, 2023	Cindy Chou	

N	Oto.	
IN	OLE	

1. The mark " * " is the revised version of the report due to comments submitted by the certification.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有验证,他就是结果成果的证明,不可能以推翻。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 3 of 129

Contents

1	GENERAL INFORMATION	5
	1.1 Test Methodology	5
	1.2 Description of EUT	6
	1.3 Maximum value	6
2	MEASUREMENT SYSTEM	7
	2.1 Test Facility	7
	2.2 SAR System	8
	2.3 PD system	.11
3	SAR SYSTEM VERIFICATION	.13
	3.1 Tissue Simulating Liquid	.13
	3.2 Tissue Simulant Liquid measurement	.13
	3.3 Measurement results of Tissue Simulant Liquid	.13
	3.4 The composition of the tissue simulating liquid:	.14
	3.5 System check	
	3.6 System check results	.15
4	PD SYSTEM VERIFICATION	.16
	4.1 System check	
	4.2 System check result	.17
5	TEST CONFIGURATIONS	.18
	5.1 Test Environment	.18
	5.2 Test Note	.18
	5.3 Test position	.20
	5.4 Power verification of device mode	.22
	5.5 Test limit	.25
6	MAXIMUM OUTPUT POWER	.28
	6.1 WLAN	.28
	6.2 WIFI 6E	.40
	6.3 Bluetooth	.48
	6.4 BLE	.48
7	DUTY CYCLE	
8	SUMMARY OF RESULTS	.53
	8.1 Decision rules	.53
	8.2 Summary of SAR Results	.53
	8.3 Summary of PD Results	
	8.4 Reporting statements of conformity	.57
9	SIMULTANEOUS TRANSMISSION ANALYSIS	.58
	9.1 Simultaneous Transmission Scenarios:	.58
	9.2 Estimated SAR calculation	.59
	9.3 SPLSR evaluation and analysis	
	9.4 Conclusion	
10	INSTRUMENTS LIST	
11	UNCERTAINTY BUDGET	
12	SAR MEASUREMENT RESULTS	.65
13		112

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless onerwise stated the results snown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. We ## heat prosecuted to the fullest extent of the law.



Page: 4 of 129

14	SA	R SYSTEM CHECK RESULTS	122
15		SYSTEM CHECK RESULTS	
16	AP	PENDIXES	129
	16.1	SAR Appendix A Photographs	129
		SAR_Appendix B DAE & Probe Cal. Certificate	
		SAR Appendix C Phantom Description & Dipole Cal. Certificate	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be responsible to the full extent of the low. prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



Page: 5 of 129

GENERAL INFORMATION

1.1 Test Methodology

The SAR testing method and procedure for this device is in accordance with the following standards:

IEEE/ANSI C95.1-1992

IEEE 1528-2013

KDB447498D01v06

KDB865664D01v01r04

KDB865664D02v01r02

KDB616217D04v01r02

KDB248227D01v02r01

IEC/IEEE 62209-1528:2020

SPEAG DASY6 System Handbook

SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)

IEC TR 63170:2018

IEC 62479:2010

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 6 of 129

Description of EUT

Product Name	Notebook Computer		
Brand Name	acer		
Model No.	N20Q10		
FCC ID	HLZAX211D2		
Integrated WLAN Module	Brand Name: Intel® Wi-Fi 6E AX211 Model Name: AX211D2W		
Mode	WLAN: 802.11a/b/g/n/ac/ax HT20/HT40 /VHT80/VHT160/HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE		
Duty Cyclo	WLAN802.11	Please refer to section 7	
Duty Cycle	Bluetooth	Please refer to section 7	
	802.11 b/g/n/ax	2.4GHz (2400.0 – 2483.5 MHz)	
Supported radios (TV	802.11a/n/ac/ax	5.2GHz (5150.0 –5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5850.0 MHz)	
Supported radios (TX Frequency Range, MHz)	802.11ax	6.2GHz (5925.0 – 6425.0 MHz) 6.5GHz (6425.0 – 6525.0 MHz) 6.7GHz (6525.0 – 6875.0 MHz) 7.0GHz (6875.0 – 7125.0 MHz)	
	Bluetooth 5.2	2.4GHz (2400.0 – 2483.5 MHz)	

1.3 Maximum value

Summary of Maximum SAR and Power Density Value			
Mode	Highest SAR 1g Body (W/kg)	Highest APD (W/m^2)	Highest PD (W/m^2)
Bluetooth(GFSK)	0.2	N/A	N/A
2.4G WLAN	1.03	N/A	N/A
5G WLAN	1.18	N/A	N/A
6G WLAN	0.79	5.56	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 7 of 129

2 MEASUREMENT SYSTEM

2.1 Test Facility

Laboratory	Test Site Address	Test Site Name	FCC Designation number	IC CAB identifier
	1F, No. 8, Alley 15, Lane 120, Sec. 1, NeiHu Road, Neihu	SAR 2	TW0029	
	District, Taipei City, 11493, Taiwan.	SAR 6		
	No. 2, Keji 1st Rd., Guishan	SAR 1		
	Township, Taoyuan County, 33383, Taiwan	SAR 4	TW0028	TW3702
	No.134, Wu Kung Road, New Taipei Industrial Park, Wuku	SAR 3		
District, New Taipei City, Taiwan		SAR 7	TW0027	

Note: Test site name is remarked on the equipment list in each section of this report as an indication where measurements occurred in specific test site and address.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此数华红用摄影测过之样只有景,同时此样只属是例如子。太极生土概太公司电荷实可,因可如公指制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.




Page: 8 of 129

SAR System

Block Diagram (DASY6)

The DASY system used for performing compliance tests consists of the following items:

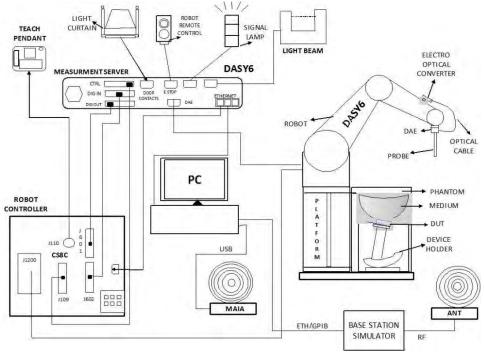

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Windows 10 and the DASY6 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 9 of 129

EX3DV4 E-Field Probe

LX3D V4 L-I		
Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 2450/5250/5600/5750/6500/7000 MHz Additional CF for other liquids and frequencies upon request	
Frequency	10 MHz to > 6 GHz	
Directivity	± 0.3 dB in HSL (rotation around probe axis)	
	± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic	10 μ W/g to > 100 mW/g	
Range	Linearity: ± 0.2 dB (noise: typically < 1 μW/g)	
Dimensions	Tip diameter: 2.5 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



Page: 10 of 129

PHANTOM (ELI)

PHANTOW (E	LI)	
Model	ELI	
Construction	The ELI phantom is used for compliance testing of handheld and body mounted wireless devices in the frequency range of 30 MHz to 6 GHz ELI is fully compatible with the IEC 62209-2 standard and all know tissue simulating liquids. ELI has been optimized regarding in performance and can be integrated into our standard phantom tables, cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefine phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	z. n ts A e
Shell	2 ± 0.2 mm	
Thickness		
Filling Volume	Approx. 30 liters	
Dimensions	Major axis: 600 mm	
	Minor axis: 400 mm	

DEVICE HOLDER (ELI)

DEVICE HOLDE	-1	
Construction	The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin), which is non-metal and non-conductive. The height can be adjusted to fit varies kind of notebooks.	
	· · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有验证,他就是结果成果的证明,不可能以推翻。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw




Page: 11 of 129

PD system


Block Diagram (DASY6)

Power density measurements for mmWave frequencies were performed using SPEAG DASY6 with cDASY6 5G module. The DASY6 included a high precision robotics system (Staubli), robot controller, desktop computer, near-field probe, probe alignment sensor, and the 5G phantom cover.

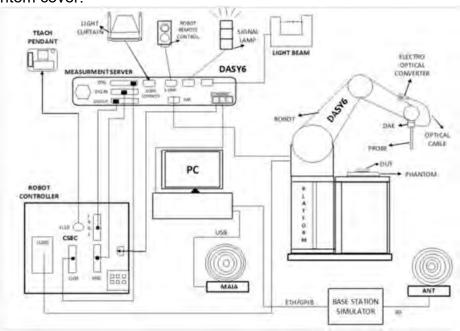

EUmmWVx probe

The EUmmWVx probe is based on the pseudo-vector probe design, which not only measures the field magnitude but also derives its polarization ellipse. The design entails two small 0.8mm dipole sensors mechanically protected by high-density foam, printed on both sides of a 0.9mm wide and 0.12mm thick glass substrate. The body of the probe is specifically constructed to minimize distortion by the scattered fields. The probe consist of two sensors with different angles (1 and 2) arranged in the same plane in the probe axis. Three or more measurements of the two sensors are taken for different probe rotational angles to derive the amplitude and polarization information. The probe design allows measurements at distances as small as 2mm from the sensors to the surface of the device under test (DUT). The typical sensor to probe tip distance is 1.5 mm. The exact distance is calibrated.

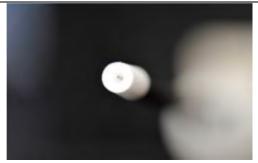

Two dipoles optimally arranged to obtain pseudovector information.Minimum 3 measurements/ point, 120° rotated around probe axis.

Sensors (0.8mm length) printed on glass substrate protected by high density foam.Low perturbation of the measured field. Requires positioner which can do accurate probe rotation.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 12 of 129

Francisco Danas	750 MHz 440 OH-
Frequency Range	750 MHz – 110 GHz
Dynamic Range	< 20 V/m - 10,000 V/m with PRE-10 (min <
	50 V/m - 3000 V/m)
Position Precision	< 0.2 mm (DASY6)
Dimensions	Overall length: 337 mm (tip: 20 mm)
	Tip diameter: encapsulation 8 mm
	(internal sensor < 1mm)
	Distance from probe tip to dipole centers:
	< 2 mm. Sensor displacement to probe's
	calibration point: < 0.3 mm
Applications	E-field measurements of 5G devices and
	other mm-wave transmitters operating
	above 10GHz in < 2 mm distance from
	device (free-space).Power density, H-field
	and far-field analysis using total field
	reconstruction (cDASY6 5G module
SPBSOT	required)
1,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	
7	
device	
Compatibility	cDASY6 + 5G-Module SW1.0 and higher

mmWave Phantom

The mmWave Phantom approximates free-space conditions, allowing for the evaluation of the antenna side of the device and the front (screen) side or any opposite-radiating side of wireless devices operating above 10 GHz without distorting the RF field. It consists of a 40mm thick Rohacell plate used as a test bed, which has a loss tangent (tan δ) \leq 0.05 and a relative permittivity (ϵ r) \leq 1.2. High-performance RF absorbers are placed below the foam.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,他都是好用魔影测验之样只有害,同时他接见魔鬼匆匆子。木都些主领大八司事而验可,不可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

JOJ Idiwali Eta.



Page: 13 of 129

SAR SYSTEM VERIFICATION

Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with homogeneous tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm.

3.2 **Tissue Simulant Liquid measurement**

The dielectric properties for this Head-simulant fluid were measured by using the SPEAG Dielectric Assessment Kit (DAKS-3.5)

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The measured conductivity and permittivity are all within ± 5% of the target values.

3.3 Measurement results of Tissue Simulant Liquid

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev εr	% dev σ
		2412	39.268	1.766	40.593	1.821	3.37%	3.10%
		2437	39.223	1.788	40.548	1.858	3.38%	3.89%
	Nov, 24. 2022	2450	39.200	1.800	40.525	1.863	3.38%	3.50%
		2462	39.185	1.813	40.510	1.880	3.38%	3.69%
		2480	39.162	1.827	40.487	1.894	3.38%	3.69%
		5210	35.974	4.665	37.299	4.862	3.68%	4.22%
		5230	35.951	4.686	37.276	4.883	3.69%	4.21%
	Nov, 25. 2022	5250	35.929	4.706	37.254	4.904	3.69%	4.21%
	NOV, 25. 2022	5270	35.906	4.727	37.231	4.926	3.69%	4.21%
		5290	35.883	4.747	37.208	4.947	3.69%	4.21%
		5310	35.860	4.768	37.160	4.945	3.63%	3.71%
		5530	35.609	4.993	36.934	5.203	3.72%	4.21%
		5570	35.563	5.034	36.888	5.246	3.73%	4.20%
Head		5600	35.529	5.065	36.854	5.277	3.73%	4.19%
riodd	Nov, 26. 2022	5690	35.426	5.157	36.751	5.373	3.74%	4.18%
	1400, 20. 2022	5750	35.306	5.265	36.682	5.436	3.90%	3.26%
		5755	35.351	5.224	36.676	5.442	3.75%	4.17%
		5775	35.329	5.244	36.654	5.463	3.75%	4.17%
		5795	35.306	5.265	36.631	5.484	3.75%	4.17%
		6025	35.070	5.510	36.366	5.730	3.70%	4.01%
		6185	34.878	5.698	36.174	5.903	3.72%	3.59%
		6345	34.686	5.887	35.982	6.076	3.74%	3.21%
		6500	34.500	6.070	35.796	6.245	3.76%	2.89%
	Nov, 21. 2022	6505	34.494	6.076	35.790	6.251	3.76%	2.88%
		6665	34.302	6.261	35.598	6.426	3.78%	2.63%
		6825	34.110	6.447	35.406	6.603	3.80%	2.42%
		6985	33.918	6.633	35.214	6.781	3.82%	2.23%
		7000	33.900	6.650	35.196	6.797	3.82%	2.21%

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 14 of 129

The composition of the tissue simulating liquid:

Simulating Liquids for 600 MHz -10 GHz. Manufactured by SPEAG:


enmanating Enganae	101 000 1111 12 10 0	2. 12, 111di ididi di di 2, 12, 131	
Broad-band hea	SPEAG	Frequency range (MHz)	Main Ingredients
tissue simulating	Product	r requericy rarige (ivii iz)	Main ingredients
liquids	HBBL600-	600 - 10000	Water, Oil
liquius	10000V6	000 - 10000	vvaler, On

3.5 System check

The microwave circuit arrangement for system check is sketched in below. The daily system accuracy verification occurs within the flat section of the SAM phantom and ELI phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target

The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed with SAR values normalized to 1W forward power delivered to the dipole.

During the tests, the liquid depth from the center of the flat phantom to the liquid top surface was 15 cm above in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

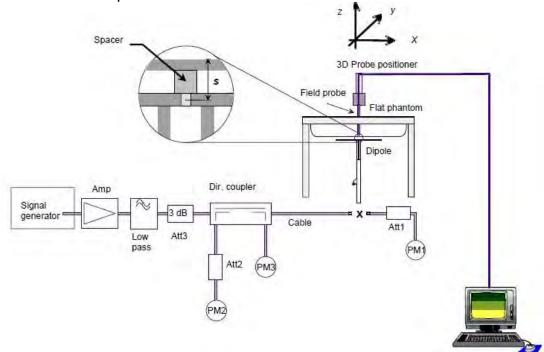

The block diagram of system check

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 15 of 129

System check results

Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=250mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D2450V2	727	2450	52.8	12.8	51.2	-3.03	± 10%	Nov.24,2022
Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=100mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D5GHzV2	1023	5250	81	8.11	81.1	0.12	± 10%	Nov.25,2022
D5GHzV2	1023	5600	84.4	7.97	79.7	-5.57	± 10%	Nov.26,2022
D5GHzV2	1023	5750	81	8.16	81.6	0.74	± 10%	Nov.26,2022
Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=100mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D6.5GHzV2	1006	6500	292	28.2	282	-3.42	± 10%	Nov.21,2022
D7GHzV2	1007	7000	278	27	270	-2.88	± 10%	Nov.21,2022
Validation Kit	S/N	Frequency (MHz)	1W Target APD (W/m^2) (4cm^2)	pin=100mW Measured APD (W/m^2) (4cm^2)	Normalized to 1W APD (W/m^2) (4cm^2)	Deviation (%)	Limit	Measurement Date
D6.5GHzV2	1006	6500	1320	129	1290	-2.27	± 10%	Nov.21,2022
D7GHzV2	1007	7000	1210	119	1190	-1.65	± 10%	Nov.21,2022

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 16 of 129

PD SYSTEM VERIFICATION

System check

The system was verified to be within ±0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check.

The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

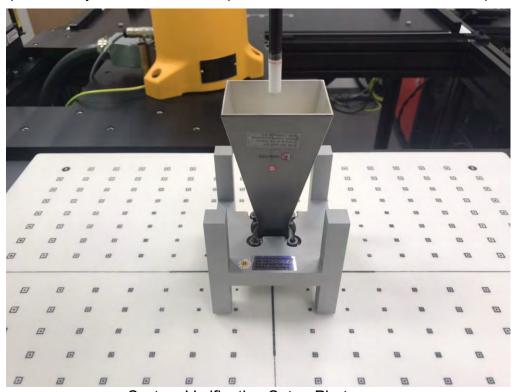

System Verification Setup Photo

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 17 of 129

4.2 System check result

The system was verified to be within ±0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check. The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

Frequency (MHz)	PD Verification Source (MHz)	Probe S/N	DAE S/N	Distance (mm)	Prad (mW)	Measured 4cm^2 (W/m^2)	Target 4cm^2 (W/m^2)	Deviation (dB)	Date
10000	10000	9616	1751	10	86.1	47.9	51.7	-0.33	Nov.21,2022

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報华结甲攝影測建立幾只有著,同時世輕早歷歷初的主。大報华主極大公司書面對可,不可可以推測。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 18 of 129

TEST CONFIGURATIONS

5.1 **Test Environment**

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

5.2 **Test Note**

- General: Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s).
- **General:** The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.
- General: During the SAR testing, the DASY system checks power drift by comparing the e-field strength of one specific location measured at the beginning with that measured at the end of the SAR testing.
- **General:** According to KDB447498D01v06, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is ≤ 0.8 W/kg, when the transmission band is ≤ 100 MHz.
- **General:** According to KDB865664D01v01r04, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is \geq 1.45 W/kg (\sim 10% from the 1-g SAR limit).
- WLAN 2.4GHz: 802.11b DSSS SAR Test Requirements: SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
- WLAN 2.4GHz: 802.11g/n OFDM SAR Test Exclusion Requirements: SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- WLAN 5GHz: Initial Test Configuration: An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. Since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 19 of 129

specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for subsequent test configuration.

- WLAN 5GHz: Based on FCC guidance, general principles of KDB248227D01 can be applied to 802.11ax to determine initial test configuration with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency band.
- WLAN 6GHz: Per October 2020 & April 2021 TCB Workshop Interim procedures and FCC guidance, start instead with a minimum of 5 test channels across the full band, then adapt and apply conducted power and SAR test reduction procedures of KDB Pub. 248227 v02r02. WIFI 6E SAR is measured by using 6-7GHz parameters per IEC/IEEE62209- 1528:2020 and report also estimated absorbed PD (for reference purposes only, not specifically for compliance). For the highest SAR test configurations also measure incident PD (total) using mmW near-field probe and total-field/power-density reconstruction method.
- WLAN 6GHz: Per equipment manufacturer guidance, power density was measured at d=2mm with the grid step (0.0625 λ) for determining compliance at d=2mm.
- WLAN 6GHz: According to October 2020 TCB Workshop Interim procedures, power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty > 30%. Total expanded uncertainty of 2.67 dB (85%) was used to determine the psPD measurement scaling factor.
- WLAN 6GHz: Per FCC guidance, for simultaneous transmission evaluation, using SAR sum and SPLSR for simultaneous transmit exclusion analyses and evaluations.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此数些结甲磺胺别对对格里名含,同时此样具属是例如于。大数型主流统大河电流统计,不可如必通制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 20 of 129

5.3 Test position

Laptop mode SAR test position (0mm)

For laptop PC, according to KDB 616217 D04, SAR evaluation is required for the bottom surface of the keyboard. This EUT was tested in the base of EUT directly against the flat phantom. The required minimum test separation distance for incorporating transmitters and antennas into laptop computer display is determined with the display screen opened at an angle of 90° to the keyboard compartment.

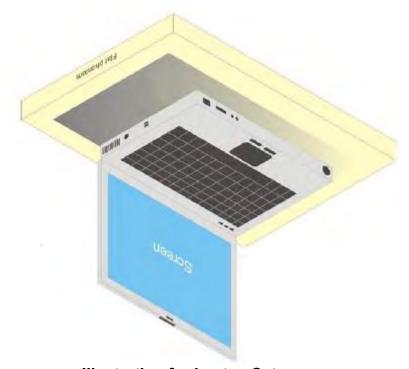


Illustration for Laptop Setup

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. _I No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 21 of 129

Tablet mode SAR test position (0mm)

For full-size tablet, according to KDB 616217 D04, SAR evaluation is required for back surface and edges of the devices. The back surface and edges of the tablet are tested with the tablet touching the phantom. Exposures from antennas through the front surface of the display section of a tablet are generally limited to the user's hands. Exposures to hands for typical consumer transmitters used in tablets are not expected to exceed the extremity SAR limit; therefore, SAR evaluation for the front surface of tablet display screens are generally not necessary. When voice mode is supported on a tablet and it is limited to speaker mode or headset operations only, additional SAR testing for this type of voice use is not required.

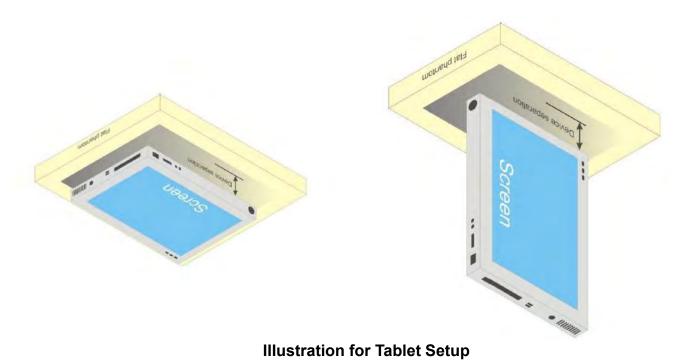

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除北只有铅明,此起华红用陈彤测过了薛里看来,同时此楼里陈尼阿四千。大起华土德大八司里看来可,不可测心掉剩。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

JOJ Talwari Eta.



Page: 22 of 129

Power verification of device mode

The device is a convertible laptop computer with predefined single fixed power to each device modes. For the device modes verification, the measured conducted output power is monitored qualitatively to identify the triggering characteristics and recorded quantitatively.

Device Mode	Lid Open Angle description Lid Close → Laptop → Tablet	Lid Open Angle description Tablet → Laptop → Lid Close	Mode Reported to OS
Lid Close	0° ≤ Lid angle <30° (GMR Sensor Trigger)	0° ≤ Lid angle <30° (GMR Sensor Trigger)	Standby
Laptop	30° ≤ Lid angle < 200° (G-Sensor Trigger)	30° ≤ Lid angle < 200° (G-Sensor Trigger)	Notebook
Tablet	200° ≤ Lid angle ≤ 360° (G-Sensor Trigger)	200° ≤ Lid angle ≤ 360° (G-Sensor Trigger)	Non-notebook

Results and conclusion

The measured output power versus lid angle is tabulated in the following table based on the guidance from 2019-11 TCB workshop, and the triggering verification complies with the device mode / power level declared by the manufacturer.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

t (886-2) 2299-3279



Page: 23 of 129

Device mode verification by power measurement

			iicatioii	by por	vei illea	sureme	111				
Antenna	Operation mode	Lid angle 0°	802.11b 0.00	WLAN 802.11n(40M) 5.20 0.00	VLAN 802.11ac(80M) 5.20 0.00	VLAN 802.11ac(160M) 5.2 0.00	WLAN 802.11n(40M) 5.3G 0.00	VLAN 802.11ac(80M) 5.3 0.00	OVLAN 802.11ac(80M) 5.6 0.00	60/LAN 802.11ac(160M) 5.6 0.00	VLAN 802.11ac(80M 0.00
	Lid close	10° 20°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Laptop	30°	20.99	20.98	18.41	14.42	20.99	17.36	20.96	15.31	20.99
		25° 26°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Lid close	27°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		28° 29°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		30°	20.85	20.88	18.32	14.23	20.88	17.19	20.94	15.28	20.87
		31° 32°	20.92 20.79	20.80 20.93	18.36 18.32	14.32 14.31	20.78 20.84	17.26 17.17	20.81 20.86	15.13 15.21	20.87 20.84
		33° 34°	20.88 20.81	20.90 20.80	18.23 18.22	14.27 14.23	20.86 20.79	17.16 17.20	20.75 20.89	15.20 15.21	20.89
		35°	20.89	20.90	18.22	14.40	20.79	17.33	20.85	15.15	20.88
		45° 55°	20.97 20.89	20.90 20.79	18.37 18.26	14.33 14.31	20.87 20.94	17.24 17.33	20.83 20.87	15.26 15.18	20.92
		65°	20.77	20.93	18.35	14.25	20.81	17.31	20.87	15.18	20.84
		75° 85°	20.87 20.91	20.84 20.84	18.22 18.22	14.33 14.29	20.79 20.84	17.18 17.27	20.86 20.82	15.15 15.10	20.95 20.92
	Laptop	95°	20.86	20.91	18.30	14.24	20.94	17.24	20.92	15.23	20.84
		105° 115°	20.85 20.84	20.91 20.76	18.20 18.24	14.32 14.24	20.80 20.83	17.32 17.19	20.78 20.82	15.13 15.25	20.89 20.80
		125° 135°	20.81 20.91	20.84 20.87	18.22 18.34	14.27 14.24	20.90 20.78	17.14 17.27	20.80 20.76	15.16 15.21	20.83 20.78
		145°	20.78	20.85	18.33	14.37	20.96	17.19	20.83	15.23	20.97
		155° 165°	20.91 20.79	20.79	18.22 18.35	14.36 14.33	20.80	17.30 17.21	20.83	15.10 15.18	20.86
		175°	20.90	20.87	18.32	14.27	20.90	17.15	20.80	15.14	20.91
		185° 195°	20.80 20.88	20.93 20.85	18.34 18.24	14.22 14.35	20.96 20.86	17.15 17.16	20.76	15.24 15.22	20.97
	Tablet	205°	16.49	12.10	12.47	12.49	13.48	13.49	14.47	14.49	14.99
		195° 196°	20.83 20.89	20.87 20.79	18.28 18.35	14.39 14.31	20.93 20.81	17.19 17.33	20.85 20.85	15.14 15.24	20.88 20.91
	Laptop	197°	20.84	20.84	18.23	14.33	20.89	17.16	20.84	15.17	20.79
		198° 199°	20.94 20.86	20.78 20.77	18.38 18.21	14.22 14.33	20.80 20.88	17.28 17.31	20.84 20.80	15.16 15.25	20.84 20.78
		200° 201°	16.32 16.37	12.05 11.99	12.29 12.43	12.30 12.31	13.41 13.36	13.27 13.44	14.38 14.33	14.45 14.46	14.87
		202°	16.27	11.99	12.39	12.46	13.30	13.33	14.35	14.37	14.90
		203° 204°	16.45 16.47	11.94 11.89	12.32 12.42	12.30 12.35	13.33 13.34	13.36 13.31	14.28 14.36	14.39 14.39	14.78 14.96
		205°	16.40	12.03	12.37	12.31	13.39	13.35	14.27	14.41	14.82
		215° 225°	16.38 16.39	11.91 12.07	12.27 12.30	12.29 12.33	13.31 13.46	13.31 13.34	14.35 14.27	14.31 14.33	14.86 14.77
		235° 245°	16.42	11.99	12.26	12.43	13.33	13.28	14.42	14.40	14.97
	Ŧ	245°	16.35 16.34	12.02 11.94	12.42 12.35	12.35 12.35	13.39 13.36	13.30 13.44	14.41 14.41	14.35 14.38	14.86 14.93
	Tablet	265° 275°	16.39 16.47	11.95	12.42 12.35	12.29	13.37	13.45 13.33	14.33	14.42 14.47	14.86 14.78
		285°	16.32	12.01 11.90	12.35	12.37 12.43	13.42 13.30	13.33	14.29 14.42	14.47	14.78
		295° 305°	16.38 16.31	11.94 11.98	12.45 12.29	12.40 12.38	13.35 13.37	13.46 13.43	14.44 14.32	14.46 14.44	14.95 14.94
		315°	16.29	11.93	12.31	12.30	13.29	13.31	14.33	14.45	14.78
		325° 335°	16.34 16.32	11.98 12.07	12.34 12.26	12.32 12.40	13.39 13.28	13.36 13.35	14.38 14.43	14.45 14.42	14.84 14.88
		345°	16.41	12.07	12.42	12.37	13.31	13.39	14.25	14.42	14.87
		355° 360°	16.37 16.40	11.89 11.96	12.30 12.40	12.44 12.38	13.31 13.29	13.31 13.40	14.44 14.43	14.41 14.27	14.95 14.84
Main		350°	16.39	11.97	12.29	12.41	13.33	13.41	14.34	14.36	14.81
maii		340° 330°	16.30 16.46	11.95 12.05	12.37 12.33	12.42 12.28	13.42 13.44	13.34 13.34	14.35 14.34	14.45 14.32	14.80 14.83
		320°	16.38	12.07	12.25	12.28	13.38	13.42	14.40	14.28	14.85
		310°	16.45 16.46	11.99 12.05	12.27 12.33	12.47 12.33	13.30 13.46	13.42 13.43	14.27 14.37	14.42 14.34	14.83 14.86
		290° 280°	16.43 16.36	12.01 11.98	12.34 12.38	12.31 12.27	13.27 13.29	13.42 13.36	14.28 14.30	14.32 14.47	14.93 14.79
	Tablet	270°	16.45	12.08	12.29	12.33	13.27	13.34	14.42	14.37	14.78
		260° 250°	16.28 16.46	11.96 11.91	12.38 12.41	12.35 12.31	13.39 13.40	13.35 13.38	14.32 14.33	14.33 14.30	14.79 14.81
		240°	16.37	12.08	12.42	12.43	13.29	13.37	14.29	14.41	14.87
		230° 220°	16.27 16.40	12.08 11.98	12.33 12.33	12.30 12.35	13.35 13.29	13.47 13.42	14.43 14.31	14.32 14.27	14.80 14.87
		210°	16.43	11.90	12.36	12.28	13.28	13.29	14.43	14.33	14.90
	1	200° 190°	16.37 20.84	11.99 20.77	12.35 18.31	12.33 14.29	13.44 20.85	13.29 17.20	14.29 20.93	14.44 15.15	14.94 20.92
	Laptop Tablet	195° 200°	20.82 16.48	20.82 12.07	18.37 12.44	14.28 12.49	20.80 13.48	17.24 13.49	20.86 14.47	15.23	20.88 14.99
	rablet	199°	20.80	20.96	18.24	14.30	20.89	17.31	20.83	14.49 15.11	20.96
		198° 197°	20.89 20.83	20.90 20.81	18.21 18.36	14.36 14.37	20.90 20.93	17.26 17.17	20.85 20.84	15.18 15.13	20.95 20.77
		196°	20.85	20.88	18.37	14.24	20.90	17.26	20.87	15.26	20.83
		195° 194°	20.90 20.89	20.80 20.76	18.24 18.26	14.40 14.34	20.92 20.87	17.28 17.25	20.83 20.78	15.19 15.17	20.88 20.93
		193°	20.85	20.78	18.30	14.33	20.82	17.24	20.86	15.28	20.87
		192° 191°	20.89 20.77	20.92 20.84	18.36 18.36	14.23 14.27	20.80 20.81	17.24 17.25	20.94 20.87	15.25 15.27	20.86 20.92
		190°	20.93	20.88	18.27	14.21	20.85	17.29	20.75	15.13	20.92
		180° 170°	20.95 20.80	20.91 20.79	18.39 18.37	14.38 14.40	20.90 20.83	17.15 17.33	20.86 20.81	15.10 15.15	20.86 20.93
	Laptop	160°	20.96	20.79	18.26	14.27	20.88	17.28	20.89	15.15	20.84
		150° 140°	20.78 20.87	20.93 20.82	18.19 18.23	14.25 14.37	20.89 20.79	17.14 17.17	20.89 20.83	15.17 15.20	20.78 20.80
		130°	20.86	20.86	18.36	14.26	20.81	17.28	20.84	15.23	20.88
		120° 110°	20.90 20.81	20.81 20.77	18.20 18.25	14.39 14.38	20.81 20.78	17.16 17.29	20.78 20.88	15.13 15.18	20.87
		100°	20.90	20.82	18.23	14.34	20.82	17.24	20.84	15.25	20.92
		90°	20.81 20.96	20.77 20.81	18.32 18.25	14.29 14.34	20.82	17.27 17.18	20.75 20.76	15.24 15.22	20.91 20.88
		70°	20.93	20.86	18.33	14.20	20.77	17.26	20.84	15.20	20.81
		60° 50°	20.79 20.79	20.89 20.87	18.32 18.20	14.28 14.30	20.83 20.79	17.19 17.28	20.94 20.74	15.21 15.17	20.84 20.97
		40°	20.95	20.89	18.38	14.35	20.85	17.14	20.88	15.29	20.92
		30° 20°	20.85 0.00	20.89	18.30 0.00	14.22 0.00	20.78 0.00	17.17 0.00	20.93	15.19 0.00	20.87
	Lid close	25°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Laptop	30° 29°	20.80	20.95 0.00	18.38 0.00	14.31 0.00	20.90 0.00	17.17 0.00	20.81	15.10 0.00	20.92
		28°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		27° 26°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		25°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Lid close	24° 23°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		22°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		21° 20°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
							0.00	0.00	0.00	0.00	0.00
		10° 0°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 24 of 129

Antenna	Operation mode	Lid angle	802.11b	WI AN 802 11n(40M) 5 2G	VI AN 802 11ac(80M) 5 20	VI AN 802 11ac(160M) 5.2	NWI AN 802 11n(40M) 5 3G	VI AN 802 11ac(80M) 5.3	3d WLAN 802 11ac(80M) 5 6G	WLAN 802.11ac(160M) 5.6G	WLAN 802.11ac(80M) 5.8G	WLAN 802.11n(40M) 5.8G
Pancing		0°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Lid close	10° 20°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Laptop	30°	20.99	20.98	18.27	13.88	20.91	17.52	20.98	15.47	20.10	20.99
		25° 26°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Lid close	20°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		28° 29°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		30°	20.96	20.83	18.24	13.70	20.81	17.37	20.76	15.26	19.96	20.89
		31° 32°	20.89 20.82	20.86 20.81	18.24 18.13	13.81 13.75	20.77 20.71	17.49 17.46	20.92 20.80	15.39 15.43	19.95 20.00	20.87 20.88
		33°	20.85	20.81	18.08	13.78	20.71	17.46	20.80	15.43	20.00	20.83
		34°	20.81	20.90	18.15	13.80	20.81	17.36	20.84	15.26	20.05	20.95
		35° 45°	20.95	20.86 20.82	18.05 18.21	13.77 13.86	20.80	17.40 17.50	20.96	15.45 15.29	20.01	20.94 20.88
		55°	20.90	20.81	18.07	13.75	20.75	17.39	20.87	15.29	19.95	20.82
		65° 75°	20.93	20.89 20.80	18.08 18.23	13.69 13.80	20.80 20.78	17.36 17.32	20.79 20.77	15.42 15.34	19.93 20.00	20.95 20.82
	Laptop	85°	20.78	20.86	18.05	13.78	20.88	17.35	20.77	15.44	19.99	20.96
	Laptop	95° 105°	20.94 20.84	20.96 20.94	18.09 18.05	13.73 13.79	20.78	17.41 17.45	20.80	15.26 15.44	20.07 19.94	20.97
		115°	20.80	20.94	18.18	13.81	20.84 20.80	17.40	20.87 20.77	15.36	19.92	20.83 20.90
		125°	20.84	20.79	18.17	13.74	20.87	17.41	20.90	15.43	20.05	20.80
		135° 145°	20.88 20.80	20.84 20.82	18.25 18.15	13.74 13.80	20.83 20.72	17.38 17.43	20.90 20.90	15.30 15.32	19.90 19.89	20.92 20.80
		155°	20.78	20.81	18.14	13.80	20.84	17.33	20.86	15.44	19.92	20.96
		165° 175°	20.78 20.96	20.86 20.94	18.17 18.18	13.80 13.78	20.78 20.79	17.39 17.32	20.89 20.87	15.37 15.33	20.02 19.93	20.92 20.96
		185°	20.86	20.86	18.14	13.72	20.80	17.31	20.95	15.42	19.88	20.97
		195°	20.84	20.87	18.15	13.78	20.76	17.50	20.86	15.33	20.02	20.81
1	Tablet	205° 195°	17.99 20.95	13.57 20.84	13.98 18.19	13.99 13.81	13.48 20.71	13.43 17.46	14.99 20.92	14.93 15.26	14.49 20.06	14.46 20.96
1	1 .	196°	20.89	20.92	18.08	13.70	20.77	17.43	20.84	15.27	20.03	20.96
1	Laptop	197° 198°	20.92 20.95	20.81 20.79	18.06 18.10	13.82 13.73	20.81 20.86	17.34 17.44	20.86 20.80	15.29 15.38	20.00 20.05	20.89 20.87
1		199°	20.84	20.80	18.18	13.83	20.83	17.34	20.83	15.26	20.06	20.83
1		200° 201°	17.95 17.88	13.54 13.36	13.83 13.87	13.89 13.83	13.30 13.41	13.31 13.29	14.80 14.93	14.74 14.84	14.32 14.47	14.30 14.41
		202°	17.95	13.40	13.87	13.90	13.33	13.22	14.80	14.90	14.29	14.25
1		203° 204°	17.83 17.83	13.37 13.42	13.87 13.85	13.77 13.85	13.28 13.43	13.33 13.31	14.84 14.95	14.71 14.86	14.46 14.46	14.38 14.25
1		205°	17.88	13.54	13.91	13.96	13.36	13.37	14.90	14.82	14.39	14.41
1		215°	17.93	13.41	13.84	13.94	13.39	13.24	14.90	14.74	14.33	14.38 14.41
1		225° 235°	17.80 17.95	13.44 13.41	13.92 13.93	13.84 13.85	13.45 13.39	13.34 13.34	14.86 14.77	14.84 14.71	14.28 14.34	14.41 14.30
		245°	17.96	13.48	13.80	13.80	13.29	13.31	14.93	14.86	14.39	14.31
	Tablet	255° 265°	17.78 17.85	13.35 13.47	13.78 13.84	13.95 13.91	13.45 13.40	13.37 13.32	14.84 14.78	14.74 14.81	14.46 14.28	14.24 14.36
		275°	17.97	13.44	13.93	13.81	13.27	13.33	14.85	14.75	14.29	14.34
		285° 295°	17.97 17.77	13.54 13.51	13.84 13.76	13.86 13.97	13.32 13.33	13.28 13.35	14.78 14.91	14.81 14.77	14.34 14.33	14.27 14.42
		305°	17.84	13.47	13.80	13.92	13.27	13.35	14.87	14.71	14.28	14.28
		315° 325°	17.78 17.80	13.38 13.49	13.79 13.83	13.92 13.96	13.36 13.41	13.26 13.24	14.79 14.79	14.84 14.90	14.43 14.42	14.25 14.31
		335°	17.79	13.39	13.82	13.93	13.35	13.35	14.94	14.83	14.28	14.35
		345° 355°	17.85 17.84	13.42 13.52	13.90 13.80	13.95 13.95	13.32 13.42	13.29 13.25	14.90 14.79	14.72 14.77	14.37 14.47	14.30 14.27
		360°	17.87	13.52	13.87	13.90	13.36	13.35	14.80	14.75	14.33	14.39
Aux		350° 340°	17.94 17.83	13.40 13.40	13.78 13.85	13.95 13.83	13.41 13.40	13.40 13.28	14.88 14.84	14.77 14.74	14.40 14.42	14.41 14.38
		330°	17.82	13.44	13.96	13.89	13.40	13.21	14.94	14.84	14.42	14.43
		320°	17.89	13.49	13.79	13.82	13.42	13.30	14.94	14.89	14.47	14.28
		310° 300°	17.77	13.46 13.49	13.90 13.92	13.92 13.95	13.40 13.29	13.31 13.28	14.92 14.80	14.90 14.74	14.32 14.40	14.40 14.35
		290°	17.95	13.55	13.79	13.97	13.32	13.32	14.93	14.86	14.38	14.39
	Tablet	280° 270°	17.80 17.88	13.50 13.47	13.92 13.79	13.93 13.81	13.29 13.39	13.31 13.25	14.94	14.88 14.89	14.28 14.34	14.26 14.30
		260°	17.93	13.41	13.93	13.96	13.26	13.36	14.86	14.73	14.30	14.39
		250° 240°	17.96 17.89	13.44	13.94 13.76	13.86 13.90	13.45 13.32	13.33 13.30	14.95 14.96	14.84	14.35 14.31	14.31 14.38
		230°	17.93	13.37	13.87	13.83	13.32	13.41	14.90	14.83	14.44	14.39
		220° 210°	17.92 17.92	13.40 13.45	13.80 13.81	13.80 13.88	13.27 13.32	13.35 13.38	14.95 14.81	14.78 14.73	14.38 14.34	14.35 14.32
		200°	17.85	13.46	13.82	13.95	13.38	13.36	14.77	14.77	14.36	14.40
1	Laptop	190° 195°	20.84 20.96	20.78 20.86	18.13 18.19	13.74 13.73	20.77 20.82	17.38 17.46	20.79 20.88	15.39 15.34	19.90 20.00	20.96 20.88
1	Tablet	200°	17.84	13.49	13.87	13.97	13.45	13.31	14.96	14.90	14.32	14.40
1		199° 198°	20.92 20.84	20.83 20.84	18.17 18.23	13.70 13.82	20.79 20.88	17.46 17.36	20.92 20.79	15.27 15.42	19.98 19.98	20.95 20.83
1		198°	20.95	20.89	18.23	13.78	20.88	17.48	20.79	15.42 15.45	19.89	20.83
		196°	20.94	20.83	18.23	13.76	20.81	17.40	20.86	15.35	19.97	20.93
		195° 194°	20.91 20.87	20.90 20.96	18.16 18.15	13.86 13.86	20.77	17.43 17.34	20.79	15.36 15.38	19.92 19.88	20.80 20.83
		193°	20.81	20.92	18.05	13.77	20.71	17.43	20.90	15.34	19.95	20.80
		192°	20.78	20.83 20.86	18.07 18.17	13.80 13.79	20.75	17.40 17.35	20.77	15.36 15.40	19.95 19.92	20.93 20.94
		191°	20.84	20.88	18.17	13.79	20.89	17.49	20.95	15.34	19.92 20.05	20.94
		180°	20.90	20.87	18.16	13.72	20.74	17.47	20.83	15.43	19.98	20.90
		170° 160°	20.78 20.80	20.78 20.82	18.13 18.10	13.68 13.71	20.84 20.81	17.31 17.31	20.92 20.92	15.42 15.26	20.06 19.90	20.77 20.93
	Laptop	150°	20.80	20.84	18.09	13.68	20.82	17.36	20.94	15.28	19.93	20.83
		140°	20.81	20.94	18.16	13.73	20.71	17.32	20.90	15.40	20.03	20.95
		130° 120°	20.96 20.83	20.93 20.83	18.15 18.08	13.66 13.81	20.73 20.79	17.38 17.45	20.94 20.82	15.29 15.34	19.93 19.90	20.83 20.84
		110°	20.79	20.82	18.13	13.81	20.86	17.38	20.84	15.30	19.93	20.95
		100°	20.88 20.97	20.78 20.86	18.21 18.20	13.72 13.73	20.81 20.88	17.34 17.40	20.80 20.94	15.27 15.26	19.88 19.88	20.80 20.90
		80°	20.87	20.95	18.15	13.70	20.74	17.37	20.86	15.29	20.05	20.77
		70°	20.81	20.79	18.13	13.68	20.86	17.34	20.95	15.38	19.89	20.88
		60°	20.91	20.85 20.89	18.05 18.20	13.77 13.79	20.82	17.42 17.41	20.95 20.82	15.31 15.34	19.97 19.93	20.82 20.89
		40°	20.84	20.88	18.24	13.83	20.87	17.34	20.87	15.30	20.01	20.95
	———	30° 20°	20.80 0.00	20.88 0.00	18.07 0.00	13.84	20.82 0.00	17.49 0.00	20.90	15.36 0.00	19.96 0.00	20.81
	Lid close	25°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Laptop	30° 29°	20.92	20.87	18.14 0.00	13.81	20.84	17.32 0.00	20.78	15.36 0.00	19.94	20.83 0.00
		28°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		27°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		26° 25°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Lid close	24°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		23° 22°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1		21°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	1	20°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
						0.00	0.00	0.00	0.00	0.00	U.UU	0.00
		10° 0°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,他都是结果做到的这种,他就是结果的。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 25 of 129

5.5 Test limit

§ 2.1093(d)(1)

Applications for equipment authorization of portable RF sources subject to routine environmental evaluation must contain a statement confirming compliance with the limits specified in § 1.1310 as part of their application. Technical information showing the basis for this statement must be submitted to the Commission upon request. The SAR limits specified in § 1.1310(a) through (c) of this chapter shall be used for evaluation of portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz shall be evaluated in terms of the MPE limits specified in Table 1 to § 1.1310(e)(1). A minimum separation distance applicable to the operating configurations and exposure conditions of the device shall be used for the evaluation. In general, maximum time-averaged power levels must be used for evaluation. All unlicensed personal communications service (PCS) devices and unlicensed NII devices shall be subject to the limits for general population/uncontrolled exposure. Radiofrequency radiation exposure limits.

§ 1.1310(a)

Specific absorption rate (SAR) shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in § 1.1307(b) within the frequency range of 100 kHz to 6 GHz (inclusive).

§ 1.1310(b)

The SAR limits for occupational/controlled exposure are 0.4 W/kg, as averaged over the whole body, and a peak spatial-average SAR of 8 W/kg, averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the parts of the human body treated as extremities, such as hands, wrists, feet, ankles, and pinnae, where the peak spatial-average SAR limit for occupational/controlled exposure is 20 W/kg, averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). Exposure may be averaged over a time period not to exceed 6 minutes to determine compliance with occupational/controlled SAR limits. 8 1 1310(c)

The SAR limits for general population/uncontrolled exposure are 0.08 W/kg, as averaged over the whole body, and a peak spatial-average SAR of 1.6 W/kg, averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the parts of the human body treated as extremities, such as hands, wrists, feet, ankles, and pinnae, where the peak spatial-average SAR limit is 4 W/kg, averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). Exposure may be averaged over a time period not to exceed 30 minutes to determine compliance with general population/uncontrolled SAR limits.

Note to paragraphs (a) through (c):

SAR is a measure of the rate of energy absorption due to exposure to RF electromagnetic energy. These SAR limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized SAR in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE Std C95.1-1992, copyright 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radiofrequency

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之缘具负责,同时此模具做是例如于。木型生产领土人司事而统可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

JOJ Idiwali Eta.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw



Page: 26 of 129

Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5, copyright 1986 by NCRP, Bethesda, Maryland 20814. Limits for whole body SAR and peak spatial-average SAR are based on recommendations made in both of these documents. The MPE limits in Table 1 are based generally on criteria published by the NCRP in "Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," NCRP Report No. 86, Sections 17.4.1, 17.4.1.1, 17.4.2 and 17.4.3, copyright 1986 by NCRP, Bethesda, Maryland 20814. In the frequency range from 100 MHz to 1500 MHz, these MPE exposure limits for field strength and power density are also generally based on criteria recommended by the ANSI in Section 4.1 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE Std C95.1-1992, copyright 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.

Portable devices that transmit at frequencies above 6 GHz shall be evaluated in terms of the MPE limits specified in Table 1 to § 1.1310(e)(1).

According to ANSI/IEEE C95.1-1992, the criteria listed in the following Table shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310.

Peak Spatially Averaged Power Density was evaluated over a circular area of 4cm2 per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報华结甲攝影測建立幾只有著,同時世輕早歷歷初的主。大報华主極大公司書面對可,不可可以推測。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 27 of 129

Frequency	Electric field	Magnetic field	Power	Averaging
range (MHz)	strength (V/m)	strength (A/m)	density (mW/cm ²)	time (minutes)
	(i) Limits for Oc	cupational/Controlled Ex	posure	
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1,500			f/300	<6
1,500- 100,000			5	<6
	(ii) Limits for Genera	l Population/Uncontrolle	d Exposure	
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1,500			f/1500	<30
1,500- 100,000			1.0	<30

f = frequency in MHz. * = Plane-wave equivalent power density. Table 1 to $\S 1.1310(e)(1)$ - Limits for Maximum Permissible Exposure (MPE)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之缘具负责,同时此模具做是例如于。木型生产领土人司事而统可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 28 of 129

MAXIMUM OUTPUT POWER

6.1 **WLAN**

Notehook Mode

Notebook Wode						
			Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		21.00	20.99
	802.11b	6	2437	1Mbps	21.00	20.98
		11	2462		21.00	20.92
	802.11g	1	2412]	20.00	19.49
		6	2437	6Mbps	21.00	20.48
		11	2462		18.50	17.94
	802.11n20-HT0	1	2412	MCS0	20.00	19.44
		6	2437		21.00	20.42
2.45GHz		11	2462		18.50	17.95
2.430112		1	2412]	20.00	19.46
	802.11ax20-HE0	6	2437	MCS0	21.00	20.35
		11	2462		18.50	17.92
		3	2422]	16.00	15.38
	802.11n40-HT0	6	2437	MCS0	21.00	20.36
		9	2452		16.00	15.36
		3	2422		16.00	15.45
	802.11ax40-HE0	6	2437	MCS0	21.00	20.38
		9	2452		16.00	15.38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 29 of 129

Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		20.00	19.35
	802.11a	40	5200	GMb no	21.00	20.95
	802.11a	44	5220	6Mbps	21.00	20.96
		48	5240]	21.00	20.92
		36	5180		20.00	19.42
	900 11500 UTO	40	5200	MCS0	21.00	20.50
	802.11n20-HT0	44	5220	IVICSU	21.00	20.40
		48	5240]	21.00	20.42
		36	5180		20.00	19.34
E 1E E 0E OL I-	000 11av20 LIF0	40	5200	MCS0	21.00	20.37
5.15-5.25 GHz	802.11ax20-HE0	44	5220	IVICSU	21.00	20.43
		48	5240]	21.00	20.34
	000 44 - 40 LITO	38	5190	14000	18.25	17.70
	802.11n40-HT0	46	5230	MCS0	21.00	20.98
	000 44 40 1150	38	5190	14000	18.25	17.56
	802.11ax40-HE0	46	5230	MCS0	21.00	20.31
	802.11ac80-VHT0	42	5210	MCS0	19.00	18.41
	802.11ax80-HE0	42	5210	MCS0	19.00	18.33
	802.11ac160-VHT0	50	5250	MCS0	15.00	14.42
	802.11ax160-HE0	50	5250	MCS0	15.00	14.43
	<u>.</u>		Vlain	<u> </u>	,	
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		21.00	20.95
	000.44 -	56	5280	CN/II	21.00	20.99
	802.11a	60	5300	6Mbps	21.00	20.91
		64	5320	1	21.00	20.92
		52	5260		21.00	20.33
				†	21.00	20.38
	802.11n20-HT0	l 56	5280	MCSO	Z 1.00	ZU.30
	802.11n20-HT0	56 60	5280 5300	MCS0		
	802.11n20-HT0	60	5300	MCS0	21.00	20.37
	802.11n20-HT0	60 64	5300 5320	MCS0	21.00 21.00	20.37 20.41
5.25-5.35 GHz		60 64 52	5300 5320 5260		21.00 21.00 21.00	20.37 20.41 20.43
5.25-5.35 GHz	802.11n20-HT0 802.11ax20-HE0	60 64 52 56	5300 5320 5260 5280	MCS0 MCS0	21.00 21.00 21.00 21.00	20.37 20.41 20.43 20.47
5.25-5.35 GHz		60 64 52 56 60	5300 5320 5260 5280 5300		21.00 21.00 21.00 21.00 21.00	20.37 20.41 20.43 20.47 20.44
5.25-5.35 GHz	802.11ax20-HE0	60 64 52 56 60 64	5300 5320 5260 5280 5300 5320	MCS0	21.00 21.00 21.00 21.00 21.00 21.00	20.37 20.41 20.43 20.47 20.44 20.50
5.25-5.35 GHz		60 64 52 56 60 64 54	5300 5320 5260 5280 5300 5320 5270		21.00 21.00 21.00 21.00 21.00 21.00 21.00	20.37 20.41 20.43 20.47 20.44 20.50 20.99
5.25-5.35 GHz	802.11ax20-HE0 802.11n40-HT0	60 64 52 56 60 64 54	5300 5320 5260 5280 5300 5320 5270 5310	MCS0 - MCS0	21.00 21.00 21.00 21.00 21.00 21.00 21.00 18.00	20.37 20.41 20.43 20.47 20.44 20.50 20.99 17.35
5.25-5.35 GHz	802.11ax20-HE0	60 64 52 56 60 64 54 62 54	5300 5320 5260 5280 5300 5320 5270 5310 5270	MCS0	21.00 21.00 21.00 21.00 21.00 21.00 21.00 18.00 21.00	20.37 20.41 20.43 20.47 20.44 20.50 20.99 17.35 20.33
5.25-5.35 GHz	802.11ax20-HE0 802.11n40-HT0	60 64 52 56 60 64 54	5300 5320 5260 5280 5300 5320 5270 5310	MCS0 - MCS0	21.00 21.00 21.00 21.00 21.00 21.00 21.00 18.00	20.37 20.41 20.43 20.47 20.44 20.50 20.99 17.35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 30 of 129

			Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		21.00	20.42
	802.11a	120	5600	6Mbps	21.00	20.38
		140	5700	'	20.75	20.11
		100	5500		21.00	20.47
	802.11n20-HT0	120	5600	MCS0	21.00	20.42
		140	5700		20.75	20.09
		100	5500		21.00	20.32
	802.11ax20-HE0	120	5600	MCS0	21.00	20.42
		140	5700	1	20.75	20.13
		102	5510		20.25	19.75
		118	5590	†	21.00	20.50
	802.11n40-HT0	134	5670	MCS0	21.00	20.91
5.6GHz		142	5710	_	21.00	20.94
0.00112		102	5510		20.25	19.65
		118	5590	_	21.00	20.38
	802.11ax40-HE0	134		MCS0	21.00	20.39
			5670	_		
		142	5710		21.00	20.42
	000 4400 1/1/T0	106	5530	MOSO	19.00	18.38
	802.11ac80-VHT0	122	5610	MCS0	21.00	20.73
		138	5690		21.00	20.96
	000 44 00 1150	106	5530		19.25	18.65
	802.11ax80-HE0	122	5610	MCS0	21.00	20.38
		138	5690		21.00	20.38
	802.11ac160-VHT0	114	5570	MCS0	16.00	15.31
	802.11ax160-HE0	114	5570	MCS0	16.00	15.32
Mode	Mode	Channel	Main Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
	902.116	149	5745	6Mbpc	21.00	20.44
	802.11a	157	5785	6Mbps	21.00	20.48
		165	5825		21.00	20.41
	000 44-00 1170	149	5745	1 1000	21.00	20.37
	802.11n20-HT0	157	5785	MCS0	21.00	20.36
		165	5825		21.00	20.42
5 oc	000 44 00 :==	149	5745		21.00	20.37
5.8GHz	802.11ax20-HE0	157	5785	MCS0	21.00	20.39
		165	5825		21.00	20.45
	802.11n40-HT0	151	5755	MCS0	21.00	20.98
	332.1111101110	159	5795		21.00	20.97
	802.11ax40-HE0	151	5755	MCS0	21.00	20.34
		159	5795		21.00	20.49
	802.11ac80-VHT0	155	5775	MCS0	21.00	20.99
	802.11ax80-HE0	155	5775	MCS0	21.00	20.31

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此想华红用魔影测验之缘具色素,同时此缘只属是2000子。太想华土领太公司事面纯可,不可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 31 of 129

			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		21.00	20.97
	802.11b	6	2437	1Mbps	21.00	20.92
		11	2462	1 1	21.00	20.99
		1	2412		19.75	19.27
	802.11g	6	2437	6Mbps	21.00	20.55
		11	2462		18.75	18.22
		1	2412		19.75	19.16
	802.11n20-HT0	6	2437	MCS0	21.00	20.54
2.45GHz		11	2462		18.75	18.23
2.43GHZ		1	2412]	19.75	19.22
	802.11ax20-HE0	6	2437	MCS0	21.00	20.48
		11	2462		18.75	18.11
	802.11n40-HT0	3	2422]	16.25	15.67
		6	2437	MCS0	21.00	20.48
		9	2452		17.50	16.95
		3	2422		16.25	15.61
	802.11ax40-HE0	6	2437	MCS0	21.00	20.46
		9	2452		17.50	16.85
			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		20.00	19.42
		40	5200	1	21.00	20.97
	802.11a	44	5220	6Mbps	21.00	20.98
		48	5240	†	21.00	20.95
		36	5180		20.00	19.43
		40	5200	1	21.00	20.45
	802.11n20-HT0	44	5220	MCS0	21.00	20.52
		48	5240	1	21.00	20.47
		36	5180		20.00	19.53
		40	5200	†	21.00	20.50
5.15-5.25 GHz	802.11ax20-HE0	44	5220	MCS0	21.00	20.52
		48	5240	†	21.00	20.49
		38	5190		19.25	18.74
		JO		MCS0		
	802.11n40-HT0			IVICOU	21.00	20.98
		46	5230		21.00 19.25	20.98 18.65
	802.11n40-HT0 802.11ax40-HE0	46 38	5230 5190	MCS0	19.25	18.65
	802.11ax40-HE0	46 38 46	5230 5190 5230	MCS0	19.25 21.00	18.65 20.43
	802.11ax40-HE0 802.11ac80-VHT0	46 38 46 42	5230 5190 5230 5210	MCS0	19.25 21.00 18.75	18.65 20.43 18.27
	802.11ax40-HE0	46 38 46	5230 5190 5230	MCS0	19.25 21.00	18.65 20.43

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 32 of 129

			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		21.00	20.97
	802.11a	56	5280	6Mbps	21.00	20.95
	002.11a	60	5300	Olvibps	21.00	20.98
		64	5320		21.00	20.99
	802.11n20-HT0	52	5260	MCS0	21.00	20.35
		56	5280		21.00	20.38
		60	5300		21.00	20.39
		64	5320		21.00	20.40
5.25-5.35 GHz	802.11ax20-HE0	52	5260	MCS0	21.00	20.45
0.20 0.00 01 12		56	5280		21.00	20.53
		60	5300		21.00	20.54
		64	5320		21.00	20.44
	802.11n40-HT0	54	5270	MCS0	21.00	20.91
	002.1111 4 0 - Π10	62	5310		18.00	17.52
	802.11ax40-HE0	54	5270	MCS0	21.00	20.36
		62	5310		18.00	17.45
	802.11ac80-VHT0	58	5290	MCS0	18.00	17.52
	802.11ax80-HE0	58	5290	MCS0	18.00	17.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報华结甲攝影測建立幾只有著,同時此幾乎攝展例の干。大報华主德大公司書面對可,不可可以推測。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 33 of 129

	<u> </u>		Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		21.00	20.50
	802.11a	120	5600	6Mbps	21.00	20.41
		140	5700	† '	20.75	20.27
		100	5500		21.00	20.55
	802.11n20-HT0	120	5600	MCS0	21.00	20.38
		140	5700	1	20.75	20.24
		100	5500		21.00	20.51
	802.11ax20-HE0	120	5600	MCS0	21.00	20.51
		140	5700] [20.75	20.13
		102	5510		20.75	20.11
	802.11n40-HT0	118	5590	MCS0	21.00	20.75
	0UZ. I III4U-П I U	134	5670		21.00	20.95
5.6GHz		142	5710	<u>] </u>	21.00	20.99
		102	5510		20.75	20.25
	000 4440 UE0	118	5590	1	21.00	20.39
	802.11ax40-HE0	134	5670	MCS0	21.00	20.36
		142	5710	1	21.00	20.39
		106	5530		19.25	18.62
	802.11ac80-VHT0	122	5610	MCS0	21.00	20.79
		138	5690	1	21.00	20.98
		106	5530		19.00	18.49
	802.11ax80-HE0	122	5610	MCS0	21.00	20.42
	İ	138	5690	1	21.00	20.36
	802.11ac160-VHT0	114	5570	MCS0	16.00	15.47
	802.11ax160-HE0	114	5570	MCS0	16.00	15.37
			Aux			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		21.00	20.40
	802.11a	157	5785	6Mbps	21.00	20.46
		165	5825		21.00	20.36
		149	5745	, T	21.00	20.35
	802.11n20-HT0	157	5785	MCS0	21.00	20.40
		165	5825		21.00	20.47
		149	5745	MCS0	21.00	20.37
5.8GHz	802.11ax20-HE0	157	5785		21.00	20.48
		165	5825		21.00	20.36
	802.11n40-HT0	151	5755	MCS0	21.00	20.99
	002.111 4 0-1110	159	5795		21.00	20.98
	802.11ax40-HE0	151	5755	MCS0	21.00	20.45
	002.11dX40-NEU	159	5795	IVICOU	21.00	20.54
	802.11ac80-VHT0	155	5775	MCS0	20.75	20.10
	0021110000 111110					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be responsible to the full extent of the low. prosecuted to the fullest extent of the law.



Page: 34 of 129

Tablet Mode

Tablet Wode			Vlain			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		16.50	16.45
	802.11b	6	2437	1Mbps	16.50	16.48
		11	2462	1	16.50	16.49
		1	2412		16.50	16.08
	802.11g	6	2437	6Mbps	16.50	16.10
		11	2462		16.50	16.04
		1	2412]	16.50	16.06
	802.11n20-HT0	6	2437	MCS0	16.50	16.15
2.45GHz		11	2462		16.50	16.22
2.400112		1	2412]	16.50	16.14
	802.11ax20-HE0	6	2437	MCS0	16.50	16.05
		11	2462		16.50	16.17
		3	2422]	16.00	15.68
	802.11n40-HT0	6	2437	MCS0	16.50	16.10
		9	2452		16.00	15.54
	802.11ax40-HE0	3	2422	MCS0	16.00	15.59
		6	2437		16.50	16.17
		9	2452		16.00	15.62
			<u>Main</u>			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		12.50	12.08
	000 44 -	40	5200	6Mbps	12.50	12.06
	802.11a	44	5220		12.50	12.19
		48	5240		12.50	12.21
	802.11n20-HT0	36	5180	MCS0	12.50	12.04
		40	5200		12.50	12.02
		44	5220		12.50	12.21
		48	5240		12.50	12.03
		36	5180	MCS0	12.50	12.06
5.15-5.25 GHz	802.11ax20-HE0	40	5200		12.50	12.03
5. 15-5.25 GHZ		44	5220		12.50	12.04
		48	5240		12.50	12.14
	802.11n40-HT0	38	5190	MCS0	12.50	12.05
	002.1111401110	46	5230		12.50	12.10
	802.11ax40-HE0	38	5190	MCS0	12.50	12.09
		46	5230		12.50	12.14
	802.11ac80-VHT0	42	5210	MCS0	12.50	12.47
	802.11ax80-HE0	42	5210	MCS0	12.50	12.14
	802.11ac160-VHT0	50	5250	MCS0	12.50	12.49
	802.11ax160-HE0	50	5250	MCS0	12.50	12.12

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 35 of 129

		1	<u>Main</u>			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		13.50	13.15
	802.11a	56	5280	6Mbps	13.50	13.03
		60	5300		13.50	13.03
		64	5320		13.50	13.03
	802.11n20-HT0	52	5260	MCS0	13.50	13.10
		56	5280		13.50	13.08
		60	5300		13.50	13.21
		64	5320		13.50	13.17
5.25-5.35 GHz	802.11ax20-HE0	52	5260	MCS0	13.50	13.10
3.23-3.33 GHZ		56	5280		13.50	13.22
		60	5300		13.50	13.20
		64	5320		13.50	13.04
	802.11n40-HT0	54	5270	MCS0	13.50	13.46
		62	5310		13.50	13.48
	802.11ax40-HE0	54	5270	MCS0	13.50	13.06
		62	5310		13.50	13.03
	802.11ac80-VHT0	58	5290	MCS0	13.50	13.49
	802.11ax80-HE0	58	5290	MCS0	13.50	13.14

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 36 of 129

			Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		14.50	14.07
	802.11a	120	5600	6Mbps	14.50	14.08
		140	5700		14.50	14.13
		100	5500		14.50	14.13
	802.11n20-HT0	120	5600	MCS0	14.50	14.21
		140	5700		14.50	14.06
		100	5500		14.50	14.16
	802.11ax20-HE0	120	5600	MCS0	14.50	14.16
		140	5700		14.50	14.21
		102	5510		14.50	14.19
	802.11n40-HT0	118	5590	MCS0	14.50	14.03
	002.1111 1 0-1110	134	5670	1,1000	14.50	14.05
5.6GHz		142	5710		14.50	14.21
		102	5510		14.50	14.20
	802.11ax40-HE0	118	5590	MCS0	14.50	14.18
	002.11ax40-11L0	134	5670	IVICSO	14.50	14.18
		142	5710		14.50	14.17
		106	5530		14.50	14.47
	802.11ac80-VHT0	122	5610	MCS0	14.50	14.22
		138	5690		14.50	14.41
		106	5530	MCS0	14.50	14.05
	802.11ax80-HE0	122	5610		14.50	14.18
		138	5690		14.50	14.08
	802.11ac160-VHT0	114	5570	MCS0	14.50	14.49
	802.11ax160-HE0	114	5570	MCS0	14.50	14.20
			Main T			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		15.00	14.58
	802.11a	157	5785	6Mbps	15.00	14.63
		165	5825		15.00	14.66
		149	5745		15.00	14.65
	802.11n20-HT0	157	5785	MCS0	15.00	14.68
		165	5825		15.00	14.66
5.8GHz		149	5745	MCS0	15.00	14.71
	802.11ax20-HE0	157	5785		15.00	14.67
		165	5825		15.00	14.56
	802.11n40-HT0	151	5755	MCS0	15.00	14.97
	002.1111 1 0-1110	159	5795		15.00	14.99
	802.11ax40-HE0	151	5755	MCS0	15.00	14.63
		159	5795		15.00	14.60
	802.11ac80-VHT0	155	5775	MCS0	15.00	14.99
	802.11ax80-HE0	155	5775	MCS0	15.00	14.55

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be responsible to the full extent of the low. prosecuted to the fullest extent of the law.



Page: 37 of 129

			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		18.00	17.98
	802.11b	6	2437	1Mbps	18.00	17.98
		11	2462	1	18.00	17.99
		1	2412		18.00	17.54
	802.11g	6	2437	6Mbps	18.00	17.48
		11	2462		18.00	17.47
		1	2412]	18.00	17.63
	802.11n20-HT0	6	2437	MCS0	18.00	17.59
2.45GHz		11	2462		18.00	17.50
2.400112		1	2412	1	18.00	17.63
	802.11ax20-HE0	6	2437	MCS0	18.00	17.59
		11	2462		18.00	17.55
		3	2422]	16.25	15.70
	802.11n40-HT0	6	2437	MCS0	18.00	17.49
		9	2452		17.50	16.96
		3	2422]	16.25	15.86
	802.11ax40-HE0	6	2437	MCS0	18.00	17.45
		9	2452		17.50	16.99
			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		14.00	13.58
		40	5200	†	14.00	13.57
	802.11a	44	5220	6Mbps	14.00	13.53
		48	5240	†	14.00	13.46
		36	5180		14.00	13.60
		40	5200	†	14.00	13.47
	802.11n20-HT0	44	5220	MCS0	14.00	13.44
		48	5240	†	14.00	13.51
		36	5180		14.00	13.59
		40	5200	†	14.00	13.56
5.15-5.25 GHz	802.11ax20-HE0	44	5220	MCS0	14.00	13.53
		48	5240	†	14.00	13.62
	000 11 12 12	38	5190	14655	14.00	13.51
	802.11n40-HT0	46	5230	MCS0	14.00	13.61
	000 44 40 1150	38	5190	14000	14.00	13.52
	802.11ax40-HE0	46	5230	MCS0	14.00	13.57
	802.11ac80-VHT0	42	5210	MCS0	14.00	13.98
-		42	5210	MCS0	14.00	13.64
	802.11ax80-HE0	42	J 3210	I IVICCO I	17.00	
	802.11ax80-HE0 802.11ac160-VHT0	50	5250	MCS0	14.00	13.99

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 38 of 129

			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260]	13.50	13.13
	802.11a	56	5280	6Mbps	13.50	13.00
	002.114	60	5300	Olvibbs	13.50	13.09
		64	5320		13.50	13.13
	802.11n20-HT0	52	5260]	13.50	12.96
		56	5280	MCS0	13.50	13.04
		60	5300	IVIOGO	13.50	13.10
		64	5320		13.50	12.99
5.25-5.35 GHz		52	5260]	13.50	13.12
3.23-3.33 GHZ	802.11ax20-HE0	56	5280	MCS0	13.50	12.95
	002.11ax20-11L0	60	5300	IVICOU	13.50	13.01
		64	5320		13.50	13.08
	802.11n40-HT0	54	5270	MCS0	13.50	13.48
	002.111140-1110	62	5310	IVICOU	13.50	13.47
	802.11ax40-HE0	54	5270	MCS0	13.50	13.07
	OUZ. I IANTO-I ILU	62	5310	IVICOU	13.50	13.09
	802.11ac80-VHT0	58	5290	MCS0	13.50	13.43
	802.11ax80-HE0	58	5290	MCS0	13.50	13.07

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 39 of 129

			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		15.00	14.54
	802.11a	120	5600	6Mbps	15.00	14.64
		140	5700	† · ·	15.00	14.63
		100	5500		15.00	14.52
	802.11n20-HT0	120	5600	MCS0	15.00	14.56
		140	5700	1	15.00	14.55
		100	5500		15.00	14.48
	802.11ax20-HE0	120	5600	MCS0	15.00	14.49
		140	5700		15.00	14.44
		102	5510		15.00	14.57
	802.11n40-HT0	118	5590	MCS0	15.00	14.62
	802.111140-H10	134	5670	IVICSU	15.00	14.45
5.6GHz		142	5710		15.00	14.46
		102	5510]	15.00	14.58
	802.11ax40-HE0	118	5590	MCS0	15.00	14.60
	002.11ax40-11L0	134	5670	IVICOU	15.00	14.53
		142	5710		15.00	14.48
		106	5530]	15.00	14.98
	802.11ac80-VHT0	122	5610	MCS0	15.00	14.89
		138	5690		15.00	14.99
		106	5530]	15.00	14.44
	802.11ax80-HE0	122	5610	MCS0	15.00	14.53
		138	5690		15.00	14.51
	802.11ac160-VHT0	114	5570	MCS0	15.00	14.93
	802.11ax160-HE0	114	5570	MCS0	15.00	14.46
			Aux I			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		14.50	13.98
	802.11a	157	5785	6Mbps	14.50	14.06
		165	5825		14.50	14.06
		149	5745	<u> </u>	14.50	13.95
	802.11n20-HT0	157	5785	MCS0	14.50	14.07
		165	5825		14.50	14.09
		149	5745	<u> </u>	14.50	14.08
5.8GHz	802.11ax20-HE0	157	5785	MCS0	14.50	14.04
		165	5825	ļ	14.50	14.13
	802.11n40-HT0	151	5755	MCS0	14.50	14.41
	002.111170 1110	159	5795		14.50	14.46
	802.11ax40-HE0	151	5755	MCS0	14.50	14.06
		159	5795		14.50	13.96
	802.11ac80-VHT0	155	5775	MCS0	14.50	14.49
	802.11ax80-HE0	155	5775	MCS0	14.50	14.02

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 40 of 129

WIFI 6E 6.2

Notebook N	Mode					
			Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	5955		7.00	6.37
	802.11ax20-HE0	45	6175	MCS0	7.00	6.49
		93	6415		7.00	6.40
		3	5965		10.00	9.47
	802.11ax40-HE0	43	6165	MCS0	10.00	9.45
U-NII-5		91	6405		10.00	9.33
6.2GHz		7	5985		13.00	12.46
	802.11ax80-HE0	39	6145	MCS0	13.00	12.38
		87	6385		13.00	12.49
		15	6025		13.50	13.44
	802.11ax160-HE0	47	6185	MCS0	13.50	13.48
		79	6345		13.50	13.37
			Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		97	6435		7.00	6.31
	802.11ax20-HE0	105	6475	MCS0	7.00	6.49
		113	6515		7.00	6.36
U-NII-6	802.11ax40-HE0	99	6445	MCS0	10.00	9.37
6.5GHz	002.11dX4U-NEU	107	6485	IVICOU	10.00	9.34
	802.11ax80-HE0	103	6465	MCS0	13.00	12.37
	OUZ. I TAXOU-FIEU	119	6545	IVICOU	13.00	12.32
	802.11ax160-HE0	111	6505	MCS0	13.50	13.47

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 41 of 129

			Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		117	6535		7.00	6.31
	802.11ax20-HE0	149	6695	MCS0	7.00	6.33
		181	6855		7.00	6.43
		115	6525		10.00	9.48
U-NII-7	802.11ax40-HE0	147	6685	MCS0	10.00	9.35
6.7GHz		179	6845		10.00	9.38
0.7 GHZ	802.11ax80-HE0	135	6625	<u> </u>	13.00	12.36
		151	6705	MCS0	13.00	12.41
		167	6785		13.00	12.31
	802.11ax160-HE0	143	6665	MCS0	13.50	13.48
	002.11ax100-11L0	175	6825	IVICOU	13.50	13.39
			Main			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		185	6875		7.00	6.48
	802.11ax20-HE0	209	6995	MCS0	7.00	6.34
		233	7115		7.00	6.44
U-NII-8	802.11ax40-HE0	187	6885	MCS0	10.00	9.37
7.0GHz	OUZ. I TAXTO-I ILU	227	7085	IVICCO	10.00	9.43
7.001 12		183	6865		13.00	12.43
	802.11ax80-HE0	199	6945	MCS0	13.00	12.38
		215	7025		13.00	12.45
	802.11ax160-HE0	207	6985	MCS0	13.50	13.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有给明,此想华廷用魔影测验之缘具色素,同时此楼里属是2000年。太想华主领太公司事面统可,不可如公道测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 42 of 129

			Δ			
	1	т	Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	5955		7.00	6.54
	802.11ax20-HE0	45	6175	MCS0	7.00	6.35
		93	6415	1	7.00	6.54
	802.11ax40-HE0	3	5965		10.00	9.52
		43	6165	MCS0	10.00	9.54
U-NII-5		91	6405		10.00	9.51
6.2GHz		7	5985		13.00	12.43
	802.11ax80-HE0	39	6145	MCS0	13.00	12.48
		87	6385		13.00	12.38
		15	6025		13.50	13.49
	802.11ax160-HE0	47	6185	MCS0	13.50	13.46
		79	6345		13.50	13.48
			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		97	6435		7.00	6.45
	802.11ax20-HE0	105	6475	MCS0	7.00	6.50
		113	6515		7.00	6.46
U-NII-6	802.11ax40-HE0	99	6445	MCS0	10.00	9.45
6.5GHz	002.11dX4U-ΠΕU	107	6485	IVICSU	10.00	9.51
	802.11ax80-HE0	103	6465	MCS0	13.00	12.40
	OUZ. I IdXOU-MEU	119	6545	IVICSU	13.00	12.52
	802.11ax160-HE0	111	6505	MCS0	13.50	13.49

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 43 of 129

			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		117	6535		7.00	6.37
	802.11ax20-HE0	149	6695	MCS0	7.00	6.55
		181	6855		7.00	6.50
		115	6525		10.00	9.41
U-NII-7	802.11ax40-HE0	147	6685	MCS0	10.00	9.49
_	6.7GHz	179	6845		10.00	9.48
0.7 GHZ	802.11ax80-HE0	135	6625		13.00	12.41
		151	6705	MCS0	13.00	12.44
		167	6785		13.00	12.46
	802.11ax160-HE0	143	6665	MCS0	13.50	13.44
	002.11ax100-HE0	175	6825	IVICSU	13.50	13.49
			Aux			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		185	6875	<u> </u>	7.00	6.42
	802.11ax20-HE0	209	6995	MCS0	7.00	6.46
		233	7115		7.00	6.46
U-NII-8	802.11ax40-HE0	187	6885	MCS0	10.00	9.47
7.0GHz	OUZ. I TANHU-I ILU	227	7085	IVICOU	10.00	9.48
7.0012		183	6865	1	13.00	12.37
	802.11ax80-HE0	199	6945	MCS0	13.00	12.49
		215	7025		13.00	12.48
	802.11ax160-HE0	207	6985	MCS0	13.50	13.47

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有验证,他就是结果成果的证明,不可能以推翻。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 44 of 129

Notehook Mode

Notebook IV	1040		Main			
			IVIAITI			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	5955		7.00	6.33
	802.11ax20-HE0	45	6175	MCS0	7.00	6.32
		93	6415	1	7.00	6.35
		3	5965		10.00	9.44
	802.11ax40-HE0	43	6165	MCS0	10.00	9.38
U-NII-5		91	6405		10.00	9.34
6.2GHz		7	5985		13.00	12.43
	802.11ax80-HE0	39	6145	MCS0	13.00	12.34
		87	6385		13.00	12.45
		15	6025		13.00	12.93
	802.11ax160-HE0	47	6185	MCS0	13.00	12.97
		79	6345		13.00	12.98
			Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		97	6435		7.00	6.37
	802.11ax20-HE0	105	6475	MCS0	7.00	6.45
		113	6515		7.00	6.32
U-NII-6	802.11ax40-HE0	99	6445	MCS0	10.00	9.41
6.5GHz	UUZ. I IAA4U-I ILU	107	6485	IVICOU	10.00	9.37
	802.11ax80-HE0	103	6465	MCS0	13.00	12.44
	802.11ax80-HE0	119	6545	IVICOU	13.00	12.45
	802.11ax160-HE0	111	6505	MCS0	13.00	12.99

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 45 of 129

			Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		117	6535		7.00	6.37
	802.11ax20-HE0	149	6695	MCS0	7.00	6.43
		181	6855		7.00	6.45
		115	6525		10.00	9.46
U-NII-7	802.11ax40-HE0	147	6685	MCS0	10.00	9.38
_	6.7GHz	179	6845		10.00	9.33
0.7GHZ	802.11ax80-HE0	135	6625		13.00	12.31
		151	6705	MCS0	13.00	12.32
		167	6785		13.00	12.43
	802.11ax160-HE0	143	6665	MCS0	13.00	12.99
	002.11ax100-⊓⊑0	175	6825	IVICSU	13.00	12.96
			Main			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		185	6875	<u> </u>	7.00	6.41
	802.11ax20-HE0	209	6995	MCS0	7.00	6.48
		233	7115		7.00	6.38
U-NII-8	802.11ax40-HE0	187	6885	MCS0	10.00	9.45
7.0GHz	JUZ. I IUATU-I ILU	227	7085	IVIOOU	10.00	9.48
7.00112		183	6865]	13.00	12.43
	802.11ax80-HE0	199	6945	MCS0	13.00	12.44
		215	7025		13.00	12.32
	802.11ax160-HE0	207	6985	MCS0	13.00	12.99

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 46 of 129

			Δ.			
	1	т	Aux	1 1		T
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	5955		7.00	6.38
	802.11ax20-HE0	45	6175	MCS0	7.00	6.53
		93	6415	1	7.00	6.54
		3	5965		10.00	9.50
	802.11ax40-HE0	43	6165	MCS0	10.00	9.42
U-NII-5		91	6405		10.00	9.48
6.2GHz		7	5985		12.50	11.92
	802.11ax80-HE0	39	6145	MCS0	12.50	11.89
		87	6385		12.50	11.94
		15	6025		12.50	12.49
	802.11ax160-HE0	47	6185	MCS0	12.50	12.47
		79	6345		12.50	12.41
			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		97	6435		7.00	6.51
	802.11ax20-HE0	105	6475	MCS0	7.00	6.36
		113	6515		7.00	6.54
U-NII-6	802.11ax40-HE0	99	6445	MCS0	10.00	9.55
6.5GHz	002.11ax40-11EU	107	6485	IVICSU	10.00	9.39
	802.11ax80-HE0	103	6465	MCS0	12.50	11.94
	002.11ax00-HEU	119	6545	IVICOU	12.50	12.04
	802.11ax160-HE0	111	6505	MCS0	12.50	12.49

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 47 of 129

			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		117	6535		7.00	6.41
	802.11ax20-HE0	149	6695	MCS0	7.00	6.45
		181	6855		7.00	6.35
		115	6525		10.00	9.45
U-NII-7	802.11ax40-HE0	147	6685	MCS0	10.00	9.49
6.7GHz		179	6845		10.00	9.49
0.7 GHZ	802.11ax80-HE0	135	6625		12.50	11.96
		151	6705	MCS0	12.50	11.98
		167	6785		12.50	11.86
	802.11ax160-HE0	143	6665	MCS0	12.50	12.44
	002.11ax100-HE0	175	6825	IVICSU	12.50	12.49
			Aux			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		185	6875		7.00	6.54
	802.11ax20-HE0	209	6995	MCS0	7.00	6.44
		233	7115		7.00	6.44
U-NII-8	802.11ax40-HE0	187	6885	MCS0	10.00	9.50
7.0GHz	OUZ. I TANHU-I ILU	227	7085	IVICOU	10.00	9.36
7.00112		183	6865		12.50	11.96
	802.11ax80-HE0	199	6945	MCS0	12.50	12.02
		215	7025		12.50	11.85
	802.11ax160-HE0	207	6985	MCS0	12.50	12.41

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 48 of 129

6.3 **Bluetooth**

			1Mbps		2Mbps		3Mbps	
Mode	Channel	Frequency (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
	CH 00	2402		9.56		7.92		7.94
BR/EDR	CH 39	2441	10.50	10.07	9.50	8.31	9.50	8.33
	CH 78	2480		10.22		8.46		8.57

6.4 **BLE**

Mode	Channel	Frequency		GFSK
Mode	Charmer	(MHz)	Max. Rated Avg.Power + Max. Tolerance (dBm)	Average Output Power (dBm)
	CH 00	2402		7.54
BLE_1M	CH 19	2440	9	7.96
	CH 39	2480		8.42
Mode	Channel	Frequency	(GFSK
Mode	Charine	(MHz)	Max. Rated Avg.Power + Max. Tolerance (dBm)	Average Output Power (dBm)
	CH 00	2402		4.81
			•	
BLE_2M	CH 19	2440	9	5.23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 49 of 129

7 DUTY CYCLE

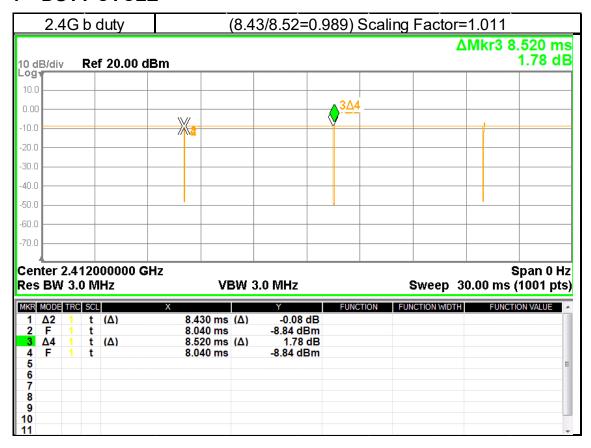


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有验明,此就是结果保护证明,是我们就是一个企业,因此让我们的证明,但我们就是一个企业,因此让我们的证明,但我们就可以证明。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 50 of 129

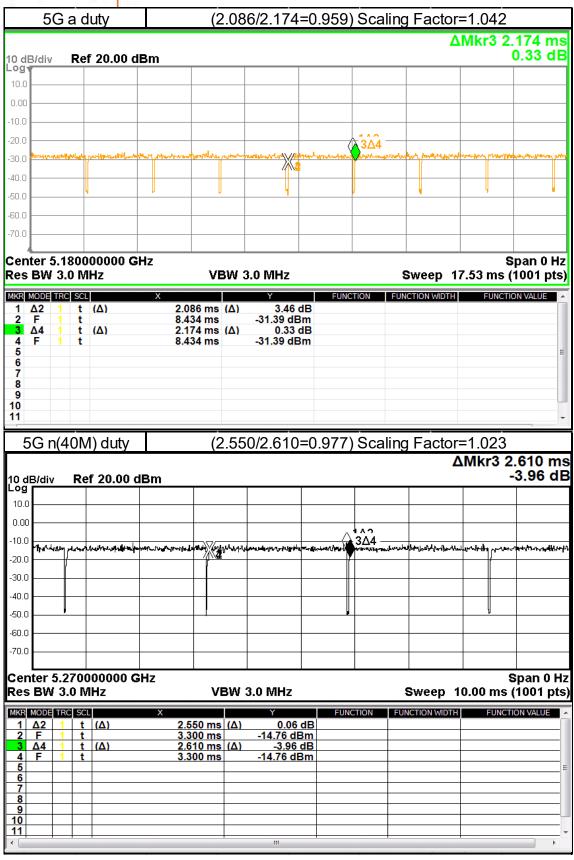

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除北只方的时,此起先处田居卧御建了梯口色表,同时此样里居见窗内不正,我也是上颌大八司隶吊选可,因可知处海剿。


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Talwan Ltd.) No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Page: 51 of 129

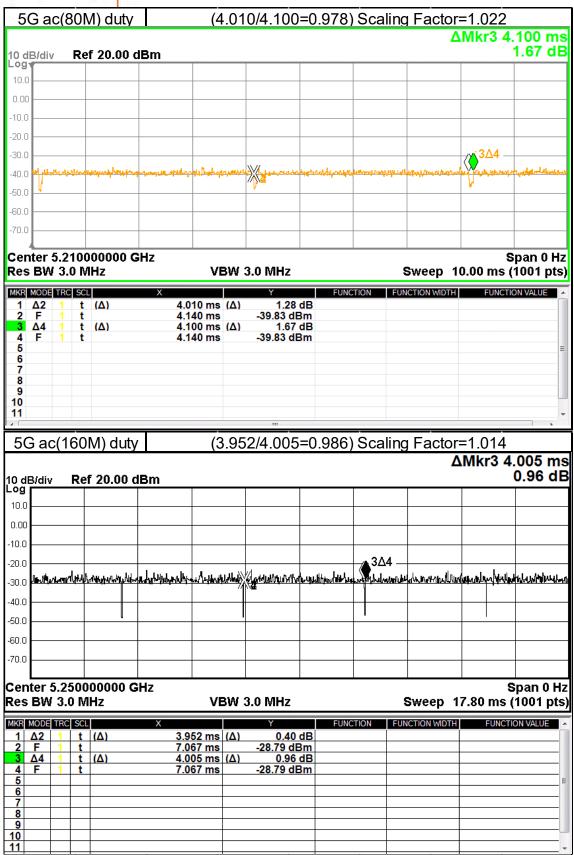

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Page: 52 of 129

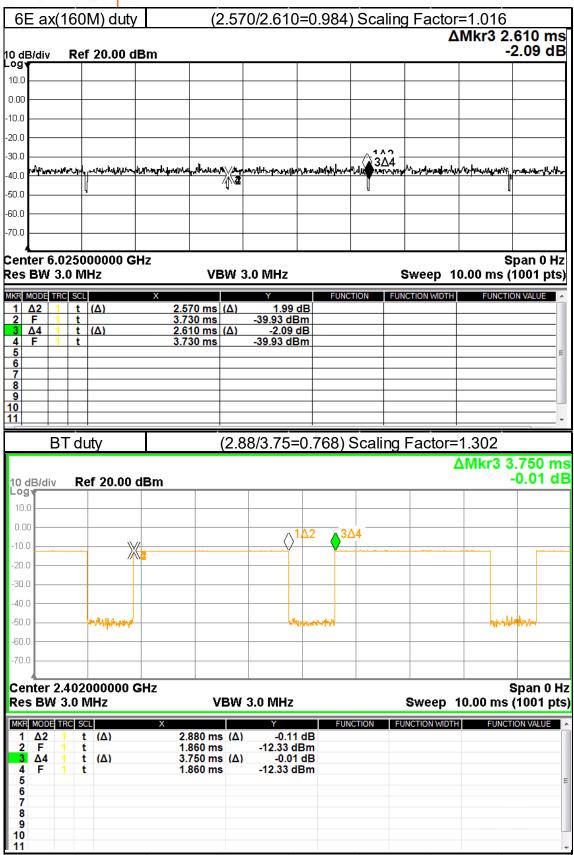

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 53 of 129

8 SUMMARY OF RESULTS

8.1 Decision rules

Reported measurement data comply with Test Methodology in section 1.1. Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

8.2 Summary of SAR Results

Notebook Mode

Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	ID
			(111111)		(IVITIZ)	Tolerance (dBm)	(dBm)	scaling	scanny	Measured	Reported	
WLAN 802.11b	Main	Bottom Surface	0	1	2412	21.00	20.99	1.011	100.23%	0.187	0.189	001
WLAN 802.11b	Main	Bottom Surface	0	6	2437	21.00	20.98	1.011	100.46%	0.174	0.177	-
WLAN 802.11b	Main	Bottom Surface	0	11	2462	21.00	20.92	1.011	101.86%	0.161	0.166	-
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling		over 1g (W/kg)	ID
			` ′		` ′	Tolerance (dBm)	(dBm)	ŭ	ŭ	Measured	Reported	
WLAN 802.11n(40M) 5.2G	Main	Bottom Surface	0	46	5230	21.00	20.98	1.023	100.46%	0.510	0.524	002
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg) Reported	ID
WLAN 802.11n(40M) 5.3G	Main	Bottom Surface	0	54	5270	21.00	20.99	1.023	100.23%	0.476	0.488	003
WEAR 802.111(40W) 5.3G	IVIAIII	Bottom Surface	U	54	5270	Max. Rated Avg.	Measured	1.023	100.23%			003
Mode	Antenna	Position	Distance	Channel	Freq.	Power + Max.	Avg. Power	Duty cycle	Power	Averaged SAR	over 1g (W/kg)	ID
			(mm)		(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	
WLAN 802.11ac(80M) 5.6G	Main	Bottom Surface	0	138	5690	21.00	20.96	1.022	100.93%	0.558	0.576	004
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	ID
			(11111)		(IVITZ)	Tolerance (dBm)	(dBm)	scanny	scanny	Measured	Reported	
WLAN 802.11ac(80M) 5.8G	Main	Bottom Surface	0	155	5775	21.00	20.99	1.022	100.23%	0.716	0.733	005
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	ID
WLAN 802.11b	Aux	Bottom Surface	0	11	2462	21.00	20.99	1.011	100.23%	0.143	Reported 0.145	006
WLAN 802.11B	Aux	Bottom Surface	U	11	2462			1.011	100.23%	0.143	0.145	006
Mode	Antenna	Position	Distance	Channel	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle	Power	Averaged SAR	over 1g (W/kg)	ID
			(mm)		(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	
Bluetooth(GFSK)	Aux	Bottom Surface	0	78	2480	10.50	10.22	1.302	106.66%	0.016	0.022	007
			Distance		Freq.	Max. Rated Avg.	Measured	Duty cycle	Power		AR over 1g	
Mode	Antenna	Position	(mm)	Channel	(MHz)	Power + Max.	Avg. Power	scaling	scaling	(W		ID
			` '		` ′	Tolerance (dBm)	(dBm)	3	ŭ	Measured	Reported	
WLAN 802.11n(40M) 5.2G	Aux	Bottom Surface	0	46	5230	21.00	20.98	1.023	100.46%	0.161	0.165	800
Mada		D44	Distance	Oh	Freq.	Max. Rated Avg. Power + Max.	Measured	Duty cycle	Power	Averaged SAR	over 1g (W/kg)	ID
Mode	Antenna	Position	(mm)	Channel	(MHz)	Tolerance (dBm)	Avg. Power (dBm)	scaling	scaling	Measured	Reported	ID.
WLAN 802.11n(40M) 5.3G	Aux	Bottom Surface	0	54	5270	21.00	20.91	1.023	102.09%	0.175	0.183	009
The street of th			-			Max. Rated Avg.	Measured					
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Power + Max.	Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	ID
			(11111)		(IVIFIZ)	Tolerance (dBm)	(dBm)	Scalling	scanny	Measured	Reported	
WLAN 802.11ac(80M) 5.6G	Aux	Bottom Surface	0	138	5690	21.00	20.98	1.022	100.46%	0.495	0.508	010
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	ID
WLAN 802.11n(40M) 5.8G	Aux	Bottom Surface	0	151	5755	21.00	20.99	1.023	100.23%	0.547	0.561	011
VVLAIN 002.1111(40M) 5.8G	AUX	DOLLOTTI SUTTACE	U	101	3/33	∠1.00	20.99	1.023	100.23%	0.547	0.001	011

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,他都是好用魔影测验之样只有害,同时他接见魔鬼匆匆子。木都些主领大八司事而验可,不可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

303 Idiwan Etd. 110.1



Page: 54 of 129

Tablet Mode

Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling		over 1g (W/kg)	ID
			` ′		` ′	Tolerance (dBm)	(dBm)	Ů	-	Measured	Reported	
WLAN 802.11b	Main	Back Surface	0	11	2462	16.50	16.49	1.011	100.23%	0.247	0.250	-
WLAN 802.11b	Main	Top Edge	0	11	2462	16.50	16.49	1.011	100.23%	0.001	0.001	-
WLAN 802.11b	Main	Right Edge	0	1	2412	16.50	16.45	1.011	101.16%	0.824	0.843	-
WLAN 802.11b	Main	Right Edge	0	6	2437	16.50	16.48	1.011	100.46%	0.832	0.845	-
WLAN 802.11b	Main	Right Edge	0	11	2462	16.50	16.49	1.011	100.23%	0.839	0.850	01
Repeated	Main	Right Edge	0	11	2462	16.50	16.49	1.011	100.23%	0.811	0.822	-
Mada		D#i	Distance	06	Freq.	Max. Rated Avg.	Measured	Duty cycle	Power	Averaged SAR	over 1g (W/kg)	ID
Mode	Antenna	Position	(mm)	Channel	(MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)	scaling	scaling	Measured	Reported	IL
WLAN 802.11ac(80M) 5.2G	Main	Back Surface	0	42	5210	12.50	12.47	1.022	100.69%	0.158	0.163	-
WLAN 802.11ac(80M) 5.2G	Main	Top Edge	0	42	5210	12.50	12.47	1.022	100.69%	0.033	0.034	-
WLAN 802.11ac(80M) 5.2G	Main	Right Edge	0	42	5210	12.50	12.47	1.022	100.69%	0.817	0.841	01
Repeated	Main	Right Edge	0	42	5210	12.50	12.47	1.022	100.69%	0.802	0.825	
WLAN 802.11ac(160M) 5.2G	Main	Back Surface	0	50	5250	12.50	12.49	1.014	100.23%	0.162	0.165	
WLAN 802.11ac(160M) 5.2G	Main	Top Edge	0	50	5250	12.50	12.49	1.014	100.23%	0.046	0.047	-
WLAN 802.11ac(160M) 5.2G	Main	Right Edge	0	50	5250	12.50	12.49	1.014	100.23%	0.957	0.973	01
Repeated	Main	Right Edge	0	50	5250	12.50	12.49	1.014	100.23%	0.911	0.926	
Mode	Antenna	Position	Distance	Channel	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle	Power	Averaged SAR	over 1g (W/kg)	II
	7411011110	1 0010011	(mm)	Ondinion	(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	
WLAN 802.11n(40M) 5.3G	Main	Back Surface	0	62	5310	13.50	13.48	1.023	100.46%	0.229	0.235	_
WLAN 802.11n(40M) 5.3G	Main	Top Edge	0	62	5310	13.50	13.48	1.023	100.46%	0.039	0.040	
WLAN 802.11n(40M) 5.3G	Main	Right Edge	0	54	5270	13.50	13.46	1.023	100.93%	1.100	1.136	
WLAN 802.11n(40M) 5.3G	Main	Right Edge	0	62	5310	13.50	13.48	1.023	100.46%	1.150	1.182	01
Repeated	Main	Right Edge	0	62	5310	13.50	13.48	1.023	100.46%	1.090	1.120	
WLAN 802.11ac(80M) 5.3G	Main	Back Surface	0	58	5290	13.50	13.49	1.023	100.40%	0.220	0.225	
WLAN 802.11ac(80M) 5.3G WLAN 802.11ac(80M) 5.3G	Main	Top Edge	0	58	5290	13.50	13.49	1.022	100.23%	0.220	0.223	
WLAN 802.11ac(80M) 5.3G	Main	Right Edge	0	58	5290	13.50	13.49	1.022	100.23%	1.140	1.168	0.
Repeated	Main	Right Edge	0	58	5290	13.50	13.49	1.022	100.23%	1.095	1.122	
Repeated	IVIdII1	Rigiti Eage	U	56	5290	Max. Rated Avg.		1.022	100.23%			
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg) Reported	II
WLAN 802.11ac(80M) 5.6G	Main	Back Surface	0	106	5530	14.50	14.47	1.022	100.69%	0.278	0.286	
WLAN 802.11ac(80M) 5.6G	Main	Top Edge	0	106	5530	14.50	14.47	1.022	100.69%	0.276	0.200	
WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G	Main	Right Edge	0	106	5530	14.50	14.47	1.022	100.69%	0.031	0.032	01
			0	138	5690	14.50	14.41	1.022	102.09%	0.646	0.811	
WLAN 802.11ac(80M) 5.6G	Main Main	Right Edge	0	138		14.50	14.41	1.022			0.811	
Repeated		Right Edge			5530				100.69%	0.821		
WLAN 802.11ac(160M) 5.6G	Main	Back Surface	0	114	5570	14.50	14.49	1.014	100.23%	0.285	0.290	
WLAN 802.11ac(160M) 5.6G	Main	Top Edge	0	114	5570	14.50	14.49	1.014	100.23%	0.039	0.040	
WLAN 802.11ac(160M) 5.6G	Main	Right Edge	0	114	5570	14.50	14.49	1.014	100.23%	0.799	0.812	01
Repeated	Main	Right Edge	0	114	5570	14.50	14.49	1.014	100.23%	0.788	0.801	
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	10
M/I ANI 902 41n/40M) E 92	Main	Dook Curfoos	0	159	5795	15.00	14.99	1.023	100.23%	0.235	0.241	
WLAN 802.11n(40M) 5.8G	Main Main	Back Surface	0		5795				100.23%		0.052	
WLAN 802.11n(40M) 5.8G WLAN 802.11n(40M) 5.8G	Main	Top Edge Right Edge	0	159 151	5795 5755	15.00 15.00	14.99 14.97	1.023	100.23%	0.051 0.885	0.052	
			0									
WLAN 802.11n(40M) 5.8G	Main	Right Edge		159	5795	15.00	14.99	1.023	100.23%	0.887	0.909	01
Repeated	Main	Right Edge	0	159	5795	15.00	14.99	1.023	100.23%	0.865	0.887	
WLAN 802.11ac(80M) 5.8G	Main	Back Surface	0	155	5775	15.00	14.99	1.022	100.23%	0.279	0.286	
WLAN 802.11ac(80M) 5.8G	Main	Top Edge	0	155	5775	15.00	14.99	1.022	100.23%	0.055	0.056	
WLAN 802.11ac(80M) 5.8G	Main	Right Edge	0	155	5775	15.00	14.99	1.022	100.23%	0.887	0.909	02
Repeated	Main	Right Edge	0	155	5775	15.00	14.99	1.022	100.23%	0.856	0.877	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有验证,他就是结果成果的证明,不可能以推翻。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 55 of 129

Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling		over 1g (W/kg)	ID
			(11111)		(IVITZ)	Tolerance (dBm)	(dBm)	scaling	scanny	Measured	Reported	
WLAN 802.11b	Aux	Back Surface	0	11	2462	18.00	17.99	1.011	100.23%	0.130	0.132	-
WLAN 802.11b	Aux	Top Edge	0	11	2462	18.00	17.99	1.011	100.23%	0.001	0.001	-
WLAN 802.11b	Aux	Left Edge	0	1	2412	18.00	17.98	1.011	100.46%	0.926	0.941	-
WLAN 802.11b	Aux	Left Edge	0	6	2437	18.00	17.98	1.011	100.46%	0.964	0.979	-
WLAN 802.11b	Aux	Left Edge	0	11	2462	18.00	17.99	1.011	100.23%	1.020	1.034	021
Repeated		Left Edge	0	11	2462	18.00	17.99	1.011	100.23%	0.983	0.996	
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	ID
Bluetooth(GFSK)	Aux	Back Surface	0	78	2480	10.50	10.22	1.302	106.66%	0.001	0.001	
Bluetooth(GFSK)	Aux	Top Edge	0	78	2480	10.50	10.22	1.302	106.66%	0.001	0.001	
, ,	Aux	, ,	0	78 78	2480	10.50	10.22			0.001	0.001	
Bluetooth(GFSK)	Aux	Left Edge	U	78	2480			1.302	106.66%	0.146 Averaged S		02:
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	(W. Measured		ID
WLAN 802.11ac(80M) 5.2G	Aux	Back Surface	0	42	5210	14.00	13.98	1.022	100.46%	0.111	0.114	
WLAN 802.11ac(80M) 5.2G	Aux	Top Edge	0	42	5210	14.00	13.98	1.022	100.46%	0.018	0.018	
WLAN 802.11ac(80M) 5.2G	Aux	Left Edge	0	42	5210	14.00	13.98	1.022	100.46%	0.884	0.908	02
Repeated	7.62	Left Edge	0	42	5210	14.00	13.98	1.022	100.46%	0.862	0.885	
WLAN 802.11ac(160M) 5.2G	Aux	Back Surface	0	50	5250	14.00	13.99	1.014	100.40%	0.171	0.174	
WLAN 802.11ac(160M) 5.2G	Aux	Top Edge	0	50	5250	14.00	13.99	1.014	100.23%	0.026	0.026	
WLAN 802.11ac(160M) 5.2G	Aux	Left Edge	0	50	5250	14.00	13.99	1.014	100.23%	0.020	0.020	02
Repeated	Aux	Left Edge	0	50	5250	14.00	13.99	1.014	100.23%	0.905	0.920	02
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling		over 1g (W/kg)	ID
			(11111)		(IVII IZ)	Tolerance (dBm)	(dBm)	scaling	scanny	Measured	Reported	
WLAN 802.11ac(80M) 5.3G	Aux	Back Surface	0	58	5290	13.50	13.43	1.022	101.62%	0.149	0.155	-
WLAN 802.11ac(80M) 5.3G	Aux	Top Edge	0	58	5290	13.50	13.43	1.022	101.62%	0.043	0.045	-
WLAN 802.11ac(80M) 5.3G	Aux	Left Edge	0	58	5290	13.50	13.43	1.022	101.62%	0.762	0.791	02
			Distance		Freq.	Max. Rated Avg.	Measured	Duty cycle	Power	Averaged SAR	over 1a (W/ka)	
Mode	Antenna	Position	(mm)	Channel	(MHz)	Power + Max.	Avg. Power	scaling	scaling			11
			(mm)		(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	
WLAN 802.11ac(80M) 5.6G	Aux	Back Surface	(mm) 0	138	(MHz) 5690	Tolerance (dBm) 15.00	(dBm) 14.99	scaling 1.022	scaling 100.23%	Measured 0.212	Reported 0.217	
WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G	Aux Aux	Back Surface Top Edge	(mm) 0 0	138 138	(MHz) 5690 5690	Tolerance (dBm) 15.00 15.00	(dBm) 14.99 14.99	1.022 1.022	scaling 100.23% 100.23%	Measured 0.212 0.032	Reported 0.217 0.033	
WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G	Aux Aux Aux	Back Surface Top Edge Left Edge	(mm) 0 0 0	138 138 106	(MHz) 5690 5690 5530	Tolerance (dBm) 15.00 15.00 15.00	(dBm) 14.99 14.99 14.98	1.022 1.022 1.022	scaling 100.23% 100.23% 100.46%	Measured 0.212 0.032 0.832	Reported 0.217 0.033 0.854	02
WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G	Aux Aux	Back Surface Top Edge Left Edge Left Edge	(mm) 0 0 0 0	138 138 106 138	5690 5690 5530 5690	Tolerance (dBm) 15.00 15.00 15.00 15.00	(dBm) 14.99 14.99 14.98 14.99	1.022 1.022 1.022 1.022	scaling 100.23% 100.23% 100.46% 100.23%	Measured 0.212 0.032 0.832 0.783	Reported 0.217 0.033 0.854 0.802	02
WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G Repeated	Aux Aux Aux Aux	Back Surface Top Edge Left Edge Left Edge Left Edge	(mm) 0 0 0 0	138 138 106 138 106	(MHz) 5690 5690 5530 5690 5530	Tolerance (dBm) 15.00 15.00 15.00 15.00 15.00 15.00	(dBm) 14.99 14.99 14.98 14.99 14.98	1.022 1.022 1.022 1.022 1.022	scaling 100.23% 100.23% 100.46% 100.23% 100.46%	Measured 0.212 0.032 0.832 0.783 0.798	Reported 0.217 0.033 0.854 0.802 0.819	02
WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G Repeated WLAN 802.11ac(160M) 5.6G	Aux Aux Aux Aux	Back Surface Top Edge Left Edge Left Edge Left Edge Left Edge Back Surface	(mm) 0 0 0 0 0 0 0 0	138 138 106 138 106 114	(MHz) 5690 5690 5530 5690 5530 5570	Tolerance (dBm) 15.00 15.00 15.00 15.00 15.00 15.00 15.00	(dBm) 14.99 14.99 14.98 14.99 14.98 14.98 14.93	1.022 1.022 1.022 1.022 1.022 1.022 1.022	scaling 100.23% 100.23% 100.46% 100.23% 100.46% 101.62%	Measured 0.212 0.032 0.832 0.783 0.798 0.268	Reported 0.217 0.033 0.854 0.802 0.819 0.276	02
WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(160M) 5.6G Repeated WLAN 802.11ac(160M) 5.6G WLAN 802.11ac(160M) 5.6G	Aux Aux Aux Aux Aux	Back Surface Top Edge Left Edge Left Edge Left Edge Back Surface Top Edge	(mm) 0 0 0 0 0 0 0 0 0 0	138 138 106 138 106 114	(MHz) 5690 5690 5530 5690 5530 5570 5570	Tolerance (dBm) 15.00 15.00 15.00 15.00 15.00 15.00 15.00 15.00	(dBm) 14.99 14.99 14.98 14.99 14.98 14.98 14.93	1.022 1.022 1.022 1.022 1.022 1.022 1.014 1.014	scaling 100.23% 100.23% 100.46% 100.23% 100.46% 101.62%	Measured 0.212 0.032 0.832 0.783 0.798 0.268 0.037	Reported 0.217 0.033 0.854 0.802 0.819 0.276 0.038	0:
WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G Repeated WLAN 802.11ac(160M) 5.6G WLAN 802.11ac(160M) 5.6G WLAN 802.11ac(160M) 5.6G	Aux Aux Aux Aux Aux Aux Aux Aux	Back Surface Top Edge Left Edge Left Edge Left Edge Back Surface Top Edge Left Edge	(mm) 0 0 0 0 0 0 0 0 0 0 0 0 0	138 138 106 138 106 114 114 114	(MHz) 5690 5690 5530 5690 5530 5690 5570 5570	Tolerance (dBm) 15.00 15.00 15.00 15.00 15.00 15.00 15.00 15.00 15.00 15.00	(dBm) 14.99 14.99 14.98 14.99 14.98 14.93 14.93	scaling 1.022 1.022 1.022 1.022 1.022 1.022 1.014 1.014 1.014	scaling 100.23% 100.23% 100.46% 100.23% 100.46% 101.62% 101.62%	Measured 0.212 0.032 0.832 0.783 0.798 0.268 0.037 0.836	Reported 0.217 0.033 0.854 0.802 0.819 0.276 0.038 0.861	0:
WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(160M) 5.6G Repeated WLAN 802.11ac(160M) 5.6G WLAN 802.11ac(160M) 5.6G	Aux Aux Aux Aux Aux	Back Surface Top Edge Left Edge Left Edge Left Edge Back Surface Top Edge	(mm) 0 0 0 0 0 0 0 0 0 0	138 138 106 138 106 114	(MHz) 5690 5690 5530 5690 5530 5570 5570	Tolerance (dBm) 15.00 15.00 15.00 15.00 15.00 15.00 15.00 15.00	(dBm) 14.99 14.99 14.98 14.99 14.98 14.98 14.93	1.022 1.022 1.022 1.022 1.022 1.022 1.014 1.014	scaling 100.23% 100.23% 100.46% 100.23% 100.46% 101.62%	Measured 0.212 0.032 0.832 0.783 0.798 0.268 0.037	Reported 0.217 0.033 0.854 0.802 0.819 0.276 0.038	0:
WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G Repeated WLAN 802.11ac(160M) 5.6G WLAN 802.11ac(160M) 5.6G WLAN 802.11ac(160M) 5.6G	Aux Aux Aux Aux Aux Aux Aux Aux	Back Surface Top Edge Left Edge Left Edge Left Edge Back Surface Top Edge Left Edge	(mm) 0 0 0 0 0 0 0 0 0 0 0 0 0	138 138 106 138 106 114 114 114	(MHz) 5690 5690 5530 5690 5530 5690 5570 5570	Tolerance (dBm) 15.00 15.00 15.00 15.00 15.00 15.00 15.00 15.00 Max. Rated Avg. Power + Max.	(dBm) 14.99 14.99 14.98 14.98 14.93 14.93 14.93 14.93 Measured Avg. Power	scaling 1.022 1.022 1.022 1.022 1.022 1.022 1.014 1.014 1.014	scaling 100.23% 100.23% 100.46% 100.23% 100.46% 101.62% 101.62%	Measured 0.212 0.032 0.832 0.783 0.783 0.798 0.268 0.037 0.836 0.803 Averaged SAR	Reported 0.217 0.033 0.854 0.802 0.819 0.276 0.038 0.861 0.827 over 1g (W/kg)	02
WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G Repeated WLAN 802.11ac(160M) 5.6G WLAN 802.11ac(160M) 5.6G WLAN 802.11ac(160M) 5.6G WLAN 802.11ac(160M) 5.6G MLAN 802.11ac(160M) 5.6G WLAN 802.11ac(160M) 5.6G	Aux	Back Surface Top Edge Left Edge Left Edge Left Edge Back Surface Top Edge Left Edge Left Edge Position	(mm) 0 0 0 0 0 0 0 0 0 0 0 Distance (mm)	138 138 106 138 106 114 114 114 114 114 Channel	(MHz) 5690 5690 5690 5530 5690 5570 5570 5570 Freq. (MHz)	Tolerance (dBm) 15.00 15.00 15.00 15.00 15.00 15.00 15.00 15.00 15.00 Max. Rated Avg. Power + Max. Tolerance (dBm)	(dBm) 14.99 14.99 14.98 14.99 14.98 14.93 14.93 14.93 Measured Avg. Power (dBm)	scaling 1.022 1.022 1.022 1.022 1.022 1.022 1.014 1.014 1.014 Duty cycle scaling	scaling 100.23% 100.23% 100.46% 100.46% 100.46% 101.62% 101.62% Power scaling	Measured 0.212 0.032 0.832 0.783 0.798 0.268 0.037 0.836 0.803 Averaged SAR Measured	Reported 0.217 0.033 0.854 0.802 0.819 0.276 0.038 0.861 0.827 over 1g (W/kg) Reported	02 - - - - 02
WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G WLAN 802.11ac(80M) 5.6G Repeated WLAN 802.11ac(160M) 5.6G WLAN 802.11ac(160M) 5.6G WLAN 802.11ac(160M) 5.6G Repeated	Aux	Back Surface Top Edge Left Edge Left Edge Left Edge Back Surface Top Edge Left Edge Left Edge	(mm) 0 0 0 0 0 0 0 0 0 0 0 0 Distance	138 138 106 138 106 114 114 114 114	(MHz) 5690 5690 5530 5690 5530 5570 5570 5570 Freq.	Tolerance (dBm) 15.00 15.00 15.00 15.00 15.00 15.00 15.00 15.00 Max. Rated Avg. Power + Max.	(dBm) 14.99 14.99 14.98 14.99 14.98 14.93 14.93 14.93 14.93 Measured Avg. Power	scaling 1.022 1.022 1.022 1.022 1.022 1.022 1.014 1.014 1.014 1.014 Duty cycle	scaling 100.23% 100.23% 100.46% 100.23% 100.46% 101.62% 101.62% 101.62% Power	Measured 0.212 0.032 0.832 0.783 0.783 0.798 0.268 0.037 0.836 0.803 Averaged SAR	Reported 0.217 0.033 0.854 0.802 0.819 0.276 0.038 0.861 0.827 over 1g (W/kg)	- 02

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format This document is issued by the Company subject to its General Conditions of Service prime developed, available of request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 56 of 129

WIFI 6E Notebook Mode

Mode	Antenna	Position	Distance (mm)	Channel	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated APD	W/m^2 (4cm^2)	ID
			()		(111112)	Tolerance (dBm)	(dBm)	Journal	Journa	Measured	Reported	Measured	Reported	
U-NII-5 6.2GHz802.11ax(160M)	Main	Bottom Surface	0	15	6025	13.50	13.44	1.016	101.39%	0.115	0.118	1.040	1.071	029
U-NII-5 6.2GHz802.11ax(160M)	Main	Bottom Surface	0	47	6185	13.50	13.48	1.016	100.46%	0.107	0.109	0.950	0.970	030
Mode	Antenna	Position	Distance (mm)	Channel	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated APD	W/m^2 (4cm^2)	ID
			` ′		` '	Tolerance (dBm)	(dBm)	ŭ	ŭ	Measured	Reported	Measured	Reported	
U-NII-6 6.5GHz802.11ax(160M)	Main	Bottom Surface	0	111	6505	13.50	13.47	1.016	100.69%	0.123	0.126	1.090	1.115	031
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated APD	W/m^2 (4cm^2)	ID
			()		(Tolerance (dBm)	(dBm)			Measured	Reported	Measured	Reported	
U-NII-7 6.7GHz802.11ax(160M)	Main	Bottom Surface	0	143	6665	13.50	13.48	1.016	100.46%	0.201	0.205	1.830	1.868	032
Mode	Antenna	Position	Distance (mm)	Channel	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated APD	W/m^2 (4cm^2)	ID
			(11111)		(IVII IZ)	Tolerance (dBm)	(dBm)	Scaling	Scaling	Measured	Reported	Measured	Reported	
U-NII-8 7.0GHz 802.11ax (160M)	Main	Bottom Surface	0	207	6985	13.50	13.48	1.011	100.46%	0.156	0.158	1.380	1.402	033
Mode	Antenna	Position	Distance (mm)	Channel	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated APD	W/m^2 (4cm^2)	ID
			()		(111.12)	Tolerance (dBm)	(dBm)	Journal	Journa	Measured	Reported	Measured	Reported	
U-NII-5 6.2GHz802.11ax(160M)	Aux	Bottom Surface	0	15	6025	13.50	13.49	1.016	100.23%	0.066	0.067	0.614	0.625	-
U-NII-5 6.2GHz802.11ax(160M)	Aux	Bottom Surface	0	79	6345	13.50	13.48	1.016	100.46%	0.082	0.084	0.753	0.769	034
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated APD	W/m^2 (4cm^2)	ID
			(11111)		(IVITIZ)	Tolerance (dBm)	(dBm)	Scaling	Scaling	Measured	Reported	Measured	Reported	
U-NII-6 6.5GHz802.11ax(160M)	Aux	Bottom Surface	0	111	6505	13.50	13.49	1.016	100.23%	0.092	0.094	0.812	0.827	035
Mode	Antenna	Position	Distance (mm)	Channel	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated APD	W/m^2 (4cm^2)	ID
			(11111)		(IVITIZ)	Tolerance (dBm)	(dBm)	Scalling	Scalling	Measured	Reported	Measured	Reported	
U-NII-7 6.7GHz802.11ax(160M)	Aux	Bottom Surface	0	175	6825	13.50	13.49	1.016	100.23%	0.107	0.109	0.928	0.945	036
Mode	Antenna	Position	Distance (mm)	Channel	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated APD	W/m^2 (4cm^2)	ID
			,,		,,	Tolerance (dBm)	(dBm)	9	9	Measured	Reported	Measured	Reported	
U-NII-8 7.0GHz 802.11ax (160M)	Aux	Bottom Surface	0	207	6985	13.50	13.47	1.011	100.69%	0.085	0.087	0.646	0.658	037

Tablet Mode

Mode	Antenna	Position	Distance (mm)	Channel	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated APD	W/m^2 (4cm^2)	D
			()		(**** 127	Tolerance (dBm)	(dBm)	Journal	bouning	Measured	Reported	Measured	Reported	
U-NII-5 6.2GHz802.11ax(160M)	Main	Back Surface	0	15	6025	13.00	12.93	1.02	101.62%	0.159	0.164	1.191	1.230	-
U-NII-5 6.2GHz802.11ax(160M)	Main	Back Surface	0	47	6185	13.00	12.97	1.016	100.69%	0.166	0.170	1.240	1.269	-
U-NII-5 6.2GHz802.11ax(160M)	Main	Back Surface	0	79	6345	13.00	12.98	1.016	100.46%	0.171	0.175	1.290	1.317	-
U-NII-5 6.2GHz802.11ax(160M)	Main	Top Edge	0	15	6025	13.00	12.93	1.016	101.62%	0.026	0.027	0.193	0.199	-
U-NII-5 6.2GHz802.11ax(160M)	Main	Top Edge	0	47	6185	13.00	12.97	1.016	100.69%	0.031	0.032	0.231	0.236	-
U-NII-5 6.2GHz802.11ax(160M)	Main	Top Edge	0	79	6345	13.00	12.98	1.016	100.46%	0.028	0.029	0.210	0.214	-
U-NII-5 6.2GHz802.11ax(160M)	Main	Right Edge	0	15	6025	13.00	12.93	1.016	101.62%	0.578	0.597	4.635	4.786	-
U-NII-5 6.2GHz802.11ax(160M)	Main	Right Edge	0	47	6185	13.00	12.97	1.016	100.69%	0.591	0.605	4.740	4.849	038
U-NII-5 6.2GHz802.11ax(160M)	Main	Right Edge	0	79	6345	13.00	12.98	1.016	100.46%	0.646	0.659	4.870	4.971	039
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated APD	W/m^2 (4cm^2)	ID
			(11111)		(1411 12)	Tolerance (dBm)	(dBm)	Scaling	Joanny	Measured	Reported	Measured	Reported	
U-NII-6 6.5GHz802.11ax(160M)	Main	Back Surface	0	111	6505	13.00	12.99	1.016	100.23%	0.159	0.162	1.150	1.171	-
U-NII-6 6.5GHz802.11ax(160M)	Main	Top Edge	0	111	6505	13.00	12.99	1.016	100.23%	0.051	0.052	0.370	0.377	-
U-NII-6 6.5GHz802.11ax(160M)	Main	Right Edge	0	111	6505	13.00	12.99	1.016	100.23%	0.748	0.762	5.440	5.540	040
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated APD	W/m^2 (4cm^2)	ID
			()		(111112)	Tolerance (dBm)	(dBm)	odanig	bouning	Measured	Reported	Measured	Reported	
U-NII-7 6.7GHz802.11ax(160M)	Main	Back Surface	0	143	6665	13.00	12.99	1.016	100.23%	0.167	0.170	1.200	1.222	-
U-NII-7 6.7GHz802.11ax(160M)	Main	Top Edge	0	143	6665	13.00	12.99	1.016	100.23%	0.038	0.039	0.274	0.279	-
U-NII-7 6.7GHz802.11ax(160M)	Main	Right Edge	0	143	6665	13.00	12.99	1.016	100.23%	0.772	0.786	5.560	5.662	041
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated APD	W/m^2 (4cm^2)	ID
			·····/		(Tolerance (dBm)	(dBm)			Measured	Reported	Measured	Reported	
U-NII-8 7.0GHz 802.11ax (160M)	Main	Back Surface	0	207	6985	13.00	12.99	1.011	100.23%	0.175	0.177	1.309	1.326	-
U-NII-8 7.0GHz 802.11ax (160M)	Main	Top Edge	0	207	6985	13.00	12.99	1.011	100.23%	0.043	0.044	0.322	0.326	-
U-NII-8 7.0GHz 802.11ax (160M)	Main	Right Edge	0	207	6985	13.00	12.99	1.011	100.23%	0.684	0.693	5.120	5.188	042

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 57 of 129

Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated APD	W/m^2 (4cm^2)	ID
			(111111)		(IVITIZ)	Tolerance (dBm)	(dBm)	Scalling	Scalling	Measured	Reported	Measured	Reported	
U-NII-5 6.2GHz802.11ax(160M)	Aux	Back Surface	0	15	6025	12.50	12.49	1.016	100.23%	0.141	0.144	1.109	1.129	-
U-NII-5 6.2GHz802.11ax(160M)	Aux	Back Surface	0	47	6185	12.50	12.47	1.016	100.69%	0.137	0.140	1.077	1.102	-
U-NII-5 6.2GHz802.11ax(160M)	Aux	Top Edge	0	15	6025	12.50	12.49	1.016	100.23%	0.021	0.021	0.165	0.168	-
U-NII-5 6.2GHz802.11ax(160M)	Aux	Top Edge	0	47	6185	12.50	12.47	1.016	100.69%	0.031	0.032	0.243	0.249	-
U-NII-5 6.2GHz802.11ax(160M)	Aux	Left Edge	0	15	6025	12.50	12.49	1.016	100.23%	0.519	0.529	3.950	4.022	043
U-NII-5 6.2GHz802.11ax(160M)	Aux	Left Edge	0	47	6185	12.50	12.47	1.016	100.69%	0.529	0.541	4.160	4.256	044
Mode	Antenna	Position	Distance (mm)	Channel	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated APD	W/m^2 (4cm^2)	ID
			(111111)		(IVITIZ)	Tolerance (dBm)	(dBm)	Scalling	Scalling	Measured	Reported	Measured	Reported	
U-NII-6 6.5GHz802.11ax(160M)	Aux	Back Surface	0	111	6505	12.50	12.49	1.016	100.23%	0.172	0.175	1.258	1.281	-
U-NII-6 6.5GHz802.11ax(160M)	Aux	Top Edge	0	111	6505	12.50	12.49	1.016	100.23%	0.057	0.058	0.417	0.425	-
U-NII-6 6.5GHz802.11ax(160M)	Aux	Left Edge	0	111	6505	12.50	12.49	1.016	100.23%	0.614	0.625	4.490	4.572	045
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated APD	W/m^2 (4cm^2)	ID
			(11111)		(IVII IZ)	Tolerance (dBm)	(dBm)	Scaling	Scaling	Measured	Reported	Measured	Reported	
U-NII-7 6.7GHz802.11ax(160M)	Aux	Back Surface	0	175	6825	12.50	12.49	1.016	100.23%	0.161	0.164	1.149	1.170	-
U-NII-7 6.7GHz802.11ax(160M)	Aux	Top Edge	0	175	6825	12.50	12.49	1.016	100.23%	0.053	0.054	0.378	0.385	-
U-NII-7 6.7GHz802.11ax(160M)	Aux	Left Edge	0	175	6825	12.50	12.49	1.016	100.23%	0.678	0.690	4.840	4.929	046
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated APD	W/m^2 (4cm^2)	ID
			()		(141112)	Tolerance (dBm)	(dBm)	Southing	country	Measured	Reported	Measured	Reported	
U-NII-8 7.0GHz 802.11ax (160M)	Aux	Back Surface	0	207	6985	12.50	12.41	1.011	102.09%	0.155	0.160	1.124	1.160	-
U-NII-8 7.0GHz 802.11ax (160M)	Aux	Top Edge	0	207	6985	12.50	12.41	1.011	102.09%	0.028	0.029	0.203	0.210	-
U-NII-8 7.0GHz 802.11ax (160M)	Aux	Left Edge	0	207	6985	12.50	12.41	1.011	102.09%	0.616	0.636	4.470	4.614	047

Note:

Reported SAR = measured SAR * Power scaling * Duty cycle scaling Reported APD = measured APD * Power scaling * Duty cycle scaling

8.3 **Summary of PD Results**

			Distance		Freg.	Max. Rated Avg.	Measured	Tune-up	Duty cycle	Measurement		PD resi	ult(4cm)		
Mode	Antenna	Position	(mm)	Channel	(MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)	Scaling Scaling	scaling	uncertainty	Measured Total psPD (W/m^2)	Reported Total psPD (W/m^2)	Measured Normal psPD (W/m^2)	Reported Normal psPD (W/m^2)	ID
WLAN 6E 802.11ax(160M)	Main	Right Edge	2	15	6025	13.00	12.93	101.62%	1.016	1.55	4.960	7.938	2.680	4.289	048
U-NII-5	Main	Right Edge	2	47	6185	13.00	12.97	100.69%	1.016	1.55	5.420	8.595	2.660	4.218	049
WLAN 6E 802.11ax(160M) U-NII-6	Main	Right Edge	2	111	6505	13.00	12.99	100.23%	1.016	1.55	4.840	7.640	3.200	5.051	050
WLAN 6E 802.11ax(160M) U-NII-7	Main	Right Edge	2	143	6665	13.00	12.99	100.23%	1.016	1.55	5.980	9.439	3.880	6.124	051
WLAN 6E 802.11ax(160M) U-NII-8	Main	Right Edge	2	207	6985	13.00	12.99	100.23%	1.016	1.55	3.310	5.225	1.800	2.841	052
			Distance		Freg.	Max. Rated Avg.	Measured			Measurement		PD resi	ult(4cm)		
Mode															
mode	Antenna	Position	(mm)	Channel	(MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)	Tune-up Scaling	Duty cycle scaling	uncertainty	Measured Total psPD (W/m^2)	Reported Total psPD (W/m^2)	Measured Normal psPD (W/m^2)	Reported Normal psPD (W/m^2)	ID
WLAN 6E 802.11ax(160M)	Antenna	Position Left Edge		Channel 15							Total psPD	Total psPD	Normal psPD	Normal psPD	053
			(mm)		(MHz)	Tolerance (dBm)	(dBm)	Scaling	scaling	uncertainty	Total psPD (W/m^2)	Total psPD (W/m^2)	Normal psPD (W/m^2)	Normal psPD (W/m^2)	
WLAN 6E 802.11ax(160M)	Aux	Left Edge	(mm) 2	15	(MHz) 6025	Tolerance (dBm)	(dBm) 12.49	Scaling 100.23%	scaling 1.016	uncertainty 1.55	Total psPD (W/m^2) 5.510	Total psPD (W/m^2) 8.697	Normal psPD (W/m^2) 2.800	Normal psPD (W/m^2) 4.420	053
WLAN 6E 802.11ax(160M) U-NII-5 WLAN 6E 802.11ax(160M)	Aux	Left Edge	(mm) 2 2	15 79	(MHz) 6025 6345	Tolerance (dBm) 12.50 12.50	(dBm) 12.49 12.41	Scaling 100.23% 102.09%	1.016 1.016	1.55 1.55	Total psPD (W/m^2) 5.510 4.390	Total psPD (W/m^2) 8.697 7.058	Normal psPD (W/m^2) 2.800 2.560	Normal psPD (W/m^2) 4.420 4.116	053 054

Note:

Reported PD = measured PD * Power scaling * Duty cycle scaling * Uncertainty scaling

8.4 Reporting statements of conformity

The conformity statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations up and the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 58 of 129

9 SIMULTANEOUS TRANSMISSION ANALYSIS

9.1 Simultaneous Transmission Scenarios:

Simultaneous Transmit Configurations	Body
WLAN 2.4GHz Main + BT Aux	Yes
WLAN 2.4GHz Main + WLAN 2.4GHz Aux	Yes
WLAN 5GHz Main + BT Aux	Yes
WLAN 5GHz Main + WLAN 5GHz Aux	Yes
WLAN 5GHz Main + WLAN 5GHz Aux + BT Aux	Yes
WLAN 6GHz Main + BT Aux	Yes
WLAN 6GHz Main + WLAN 6GHz Aux	Yes
WLAN 6GHz Main + WLAN 6GHz Aux + BT Aux	Yes

Note:

- 1. Bluetooth and WLAN Aux share the same antenna path, and BT can transmit with WLAN Main simultaneously.
- 2. For 2.4/5GHz WLAN Main and Aux antennas, the maximum output power of each antenna during simultaneous transmission is the same with or less than that used in standalone transmission, and we used the sum of 1-g SAR provision in KDB447498D01 to exclude the simultaneous transmitted SAR measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之缘具负责,同时此模具做是例如于。木型生产概率公司事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 59 of 129

Estimated SAR calculation

According to KDB447498 D01v06 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

Estimated SAR =
$$\frac{\text{Max.tune up power (mW)}}{\text{Min. test separation distance(mm)}} \times \frac{\sqrt{\text{f(GHz)}}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

9.3 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by (SAR1 + SAR2)^1.5/Ri, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Simultaneous Transmission Combination

					FCC Reported SAR	1			Scenario1	Scenario2	Scenario3	Scenario4	Scenario5	Scenario6	Scenario7	Scenario8
		2	3	4	5	7	8	9	2+7	2+3	4+7	4+5	4+5+7	7+8	8+9	7+8+9
Exposure Pos	ition	2.4GHz WLAN Main	2.4GHz WLAN Aux	5GHz WLAN Main	5GHz WLAN Aux	Bluetooth Aux	6GHz WLAN Main	6GHz WLAN Aux	Summed							
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
Bottom Surface	0	0.189	0.145	0.733	0.561	0.022	0.205	0.109	0.211	0.334	0.755	1.294	1.316	0.227	0.314	0.336
Back Surface	0	0.250	0.132	0.290	0.276	0.001	0.177	0.175	0.251	0.382	0.291	0.566	0.567	0.178	0.352	0.353
Top Edge	0	0.001	0.001	0.056	0.045	0.001	0.052	0.058	0.002	0.002	0.057	0.101	0.102	0.053	0.110	0.111
Left Edge	0	-	1.034	-	0.946	0.203	-	0.690	0.203	1.034	0.203	0.946	1.149	0.203	0.690	0.893
Right Edge	0	0.850	-	1.182	-	-	0.786	-	0.850	0.850	1.182	1.182	1.182	0.786	0.786	0.786

9.4 Conclusion

The simultaneous transmission is compliant because both SAR sum and/or SPLSR are less than their corresponding criteria.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 60 of 129

10 INSTRUMENTS LIST

		Equi	pment List		
Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
SPEAG	Data acquisition Electronics	DAE4	1751	Oct/10/2022	Oct/09/2023
SPEAG	Dosimetric E-Field Probe	EX3DV4	7712	Mar/21/2022	Mar/20/2023
SPEAG	Dosimetric E-Field Probe	EX3DV4	7642	Mar/02/2022	Mar/01/2023
SPEAG	E-field Probe for Near Field Application	EUmmWV4	9616	Mar/20/2022	Mar/19/2023
SPEAG	System Validation Dipole	D2450V2	727	Apr/25/2022	Apr/24/2023
SPEAG	System Validation Dipole	D5GHzV2	1023	Jan/27/2022	Jan/26/2023
SPEAG	System Validation Dipole	D6.5GHzV2	1006	Aug/23/2022	Aug/22/2023
SPEAG	System Validation Dipole	D7GHzV2	1007	Aug/24/2022	Aug/23/2023
SPEAG	5G Verification Source 10GHz	5G-Veri10	1021	Jan/24/2022	Jan/23/2023
SPEAG	Dielectric Assessment Kit	DAKS-3.5	1053	Feb/28/2022	Feb/27/2023
Agilent	MXG Analog Signal Generator	N5181A	MY50144143	May/19/2022	May/18/2023
Agilent	Dual-directional coupler	772D	MY52180142	Oct/19/2022	Oct/18/2023
Agilent	Dual-directional coupler	778D	MY52180302	Oct/19/2022	Oct/18/2023
EMCI	Amplifier	ZHL-42	980189	Calibration not required	Calibration not required
EMCI	Amplifier	ZVE-8G	980190	Calibration not required	Calibration not required
R&S	Power Sensor	NRP18S	101973	Jan/22/2022	Jan/21/2023
R&S	Power Meter	NRX	102191	Jan/22/2022	Jan/21/2023
R&S	Power Sensor	NRP18S	101358	Jan/22/2022	Jan/21/2023
SPEAG	Software	DASY 8 V16.0.2.83	N/A	Calibration not required	Calibration not required
SPEAG	Phantom	ELI	N/A	Calibration not required	Calibration not required
SPEAG	Phantom	mmWave Phantom	N/A	Calibration not required	Calibration not required
LKM	Digital thermometer	DTM3000	EC14010603	Sep/27/2022	Sep/26/2023
TECPEL	Digital thermometer	DTM-303A	TP130077	Sep/29/2022	Sep/28/2023

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 61 of 129

11 UNCERTAINTY BUDGET

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	œ
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	œ
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	œ
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	œ
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	00
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	œ
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	œ
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	œ
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	œ
RF ambient condition -	3.00%	R	√3	1.732	1	1	1.73%	1.73%	œ
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	œ
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	œ
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	œ
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	80
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	00
T40									
Test Sample related	0.000/						0.000/	0.000/	
Test sample positioning	2.90%	N	1	1	1	1			M-1
Device Holder Uncertainty	3.60%	N	1	1	1				M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	00
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	œ
Liquid permittivity (mea.)	3.90%	N	1	1	0.64	0.43	2.50%	1.68%	М
Liquid Conductivity (mea.)	4.22%	N	1	1	0.6	0.49	2.53%	2.07%	М
Combined standard uncertainty		RSS					12.24%	12.01%	
Expant uncertainty (95% confidence interval), K=2			_		_		24.49%	24.01%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 62 of 129

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	∞
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	8
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	~
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	~
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	~
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	~
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	~
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	~
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	~
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	~
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	~
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	3.38%	N	1	1	0.64	0.43	2.16%	1.45%	М
Liquid Conductivity (mea.)	3.89%	N	1	1	0.6	0.49	2.33%	1.91%	М
Combined standard uncertainty		RSS					11.85%	11.66%	
Expant uncertainty (95% confidence interval), K=2							23.71%	23.31%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除此只有验明,此就是结果既是为键与合善,同时此键与原况如何工,才就是主领于八司事而统可,不可如应编制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 63 of 129

DASY6 Uncertainty Budget According to IEC/IEEE 62209-1528 (Frequency band: 6GHz - 10GHz range)

a b c d e e f=b*e/d f=b*e/d f=b*e Source of Uncertainty Value (±%) Uncertainty Value (±%) Probability Distribution Div. Value (ci) (ci) (ci) (1g) (±%) Std. uncertainty (10g) (±%) Std. uncertainty Std. uncertainty (10g) (±%) 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 <th></th>	
Value (±%) Distribution DIV. DIV. Value 1g 10g (1g) (±%) (10g) (±%)	'd
Probe calibration 18.6 N 2 2 1 1 9.3 9.3 Probe Calibration Drift 1.7 R √3 1.732 1 1 1.0 1.0 Probe Linearity 4.7 R √3 1.732 1 1 2.7 2.7 Broadband Signal 2.8 R √3 1.732 1 1 1.6 1.6 Probe Isotropy 7.6 R √3 1.732 1 1 4.4 4.4 Data Acquisition 0.3 N 1 1 1 1 0.3 0.3 RF Ambient 1.8 N 1 1 1 1 1.8 1.8 Probe positioning 0.2 N 1 1 0.67 0.67 0.1 0.1 Data Processing 3.5 N 1 1 1 1 3.5 3.5 Phantom and device errors Conductivit	
Probe Calibration Drift 1.7 R √3 1.732 1 1 1.0 1.0 Probe Linearity 4.7 R √3 1.732 1 1 2.7 2.7 Broadband Signal 2.8 R √3 1.732 1 1 1.6 1.6 Probe Isotropy 7.6 R √3 1.732 1 1 4.4 4.4 Data Acquisition 0.3 N 1 1 1 1 0.3 0.3 RF Ambient 1.8 N 1 1 1 1 1.8 1.8 Probe positioning 0.2 N 1 1 1 1 1 3.5 3.5 Phantom and device errors 2.5 N 1 1 0.78 0.71 2.0 1.8	
Probe Linearity 4.7 R √3 1.732 1 1 2.7 2.7 Broadband Signal 2.8 R √3 1.732 1 1 1.6 1.6 Probe Isotropy 7.6 R √3 1.732 1 1 4.4 4.4 Data Acquisition 0.3 N 1 1 1 1 0.3 0.3 RF Ambient 1.8 N 1 1 1 1 1.8 1.8 Probe positioning 0.2 N 1 1 0.67 0.67 0.1 0.1 Data Processing 3.5 N 1 1 1 1 3.5 3.5 Phantom and device errors Conductivity (meas.)DAK 2.5 N 1 1 0.78 0.71 2.0 1.8	
Broadband Signal 2.8 R √3 1.732 1 1 1.6 1.6 Probe Isotropy 7.6 R √3 1.732 1 1 4.4 4.4 Data Acquisition 0.3 N 1 1 1 1 0.3 0.3 RF Ambient 1.8 N 1 1 1 1 1.8 1.8 Probe positioning 0.2 N 1 1 0.67 0.67 0.1 0.1 Data Processing 3.5 N 1 1 1 1 3.5 3.5 Phantom and device errors Conductivity (meas.)DAK 2.5 N 1 1 0.78 0.71 2.0 1.8	
Probe Isotropy 7.6 R √3 1.732 1 1 4.4 4.4 Data Acquisition 0.3 N 1 1 1 1 0.3 0.3 RF Ambient 1.8 N 1 1 1 1 1.8 1.8 Probe positioning 0.2 N 1 1 0.67 0.67 0.1 0.1 Data Processing 3.5 N 1 1 1 1 3.5 3.5 Phantom and device errors Conductivity (meas.)DAK 2.5 N 1 1 0.78 0.71 2.0 1.8	
Data Acquisition 0.3 N 1 1 1 1 1 0.3 0.3 RF Ambient 1.8 N 1 1 1 1 1.8 1.8 Probe positioning 0.2 N 1 1 0.67 0.67 0.1 0.1 Data Processing 3.5 N 1 1 1 1 3.5 3.5 Phantom and device errors Conductivity (meas.)DAK 2.5 N 1 1 0.78 0.71 2.0 1.8	
RF Ambient 1.8 N 1 1 1 1 1.8 1.8 Probe positioning 0.2 N 1 1 0.67 0.67 0.1 0.1 Data Processing 3.5 N 1 1 1 1 3.5 3.5 Phantom and device errors Conductivity (meas.)DAK 2.5 N 1 1 0.78 0.71 2.0 1.8	
Probe positioning 0.2 N 1 1 0.67 0.67 0.1 0.1 Data Processing 3.5 N 1 1 1 1 1 3.5 3.5 Phantom and device errors Conductivity (meas.)DAK 2.5 N 1 1 0.78 0.71 2.0 1.8	
Data Processing 3.5 N 1 1 1 1 3.5 3.5 Phantom and device errors Conductivity (meas.)DAK 2.5 N 1 1 0.78 0.71 2.0 1.8	
Phantom and device errors Conductivity (meas.)DAK 2.5 N 1 1 0.78 0.71 2.0 1.8	
Conductivity (meas.)DAK 2.5 N 1 1 0.78 0.71 2.0 1.8	
Conductivity (form) VDD 2.4 D (2 4.722 0.79 0.74 1.4 4.0	
Conductivity (temp.)BB 2.4 R √3 1.732 0.78 0.71 1.1 1.0	
Phantom Permittivity 14.0 R √3 1.732 0.5 0.5 4.0 4.0	
Distance DUT - TSL 2.0 N 1 1 2 2 4.0 4.0	
Device Positioning (±0.5mm) 1.0 N 1 1 1 1 1.0 1.0	
Device Holder 3.6 N 1 1 1 1 3.6 3.6	
DUT Modulationm 2.4 R √3 1.732 1 1 1.4 1.4	
Time-average SAR 0.0 R √3 1.732 1 1 0.0 0.0	
DUT drift 2.5 N 1 1 1 1 2.5 2.5	
Val Antenna Unc. 0.0 N 1 1 1 1 0.0 0.0	
Unc. Input Power 0.0 N 1 1 1 1 0.0 0.0	
Correction to the SAR results	
Deviation to Target 1.90 N 1 1 1 0.84 1.9 1.6	
SAR scaling 0.076 R √3 1.732 1 1 0.0 0.0	
Combined Std. uncertainty 14.0 13.9	
Expanded Std. uncertainty (95% confidence interval), K=2 28.0 27.8	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 64 of 129

cDASY6 Module mmWave Uncertainty Budget for PD Evaluation Distances to the Antennas $\geq \lambda / 5$ In Compliance with IEC/IEEE 63195

а	b	С	d		е	f=b * e / d	g
Source of Uncertainty	Uncertainty Value (+-dB)	Probability Distribution	Div.	Div. Value	ci	Std. uncertainty (+-dB)	(vi) Veff
Uncertainty terms dependent on the	e measurement	system					
Probe calibration	0.49	N	1	1	1	0.49	∞
Probe correction	0.00	R	√3	1.732	1	0.00	∞
Frequency response (BW ≦1GHz)	0.20	R	√3	1.732	1	0.12	œ
Sensor cross coupling	0.00	R	√3	1.732	1	0.00	œ
Isotropy	0.50	R	√3	1.732	1	0.29	œ
Linearity	0.20	R	√3	1.732	1	0.12	∞
Probe scattering	0.00	R	√3	1.732	1	0.00	œ
Probe positioning offset	0.30	R	√3	1.732	1	0.17	œ
Probe positioning repeatability	0.04	R	√3	1.732	1	0.02	œ
Sensor mechanical offset	0.00	R	√3	1.732	1	0.00	00
Probe spatial resolution	0.00	R	√3	1.732	1	0.00	00
Field impedance dependance	0.00	R	√3	1.732	1	0.00	00
Amplitude and phase drift	0.00	R	√3	1.732	1	0.00	00
Amplitude and phase noise	0.04	R	√3	1.732	1	0.02	00
Measurement area truncation	0.00	R	√3	1.732	1	0.00	00
Data acquisition	0.03	N	1	1	1	0.03	œ
Sampling	0.00	R	√3	1	1	0.00	oc oc
Field reconstruction	2.00	R	√3	1.732	1	1.15	œ
Forward transformation	0.00	R	√3	1.732	1	0.00	œ
Power density scaling	-	R	√3	1.732	1	-	œ
Spatial averaging	0.10	R	√3	1.732	1	0.06	œ
System detection limit	0.04	R	√3	1.732	1	0.02	œ
Uncertainty terms dependent on the	e DUT and envir	onmental facto	ors				
Probe coupling with DUT	0.00	R	√3	1.732	1	0.00	œ
Modulation response	0.40	R	√3	1.732	1	0.23	œ
Integration time	0.00	R	√3	1.732	1	0.00	œ
Response time	0.00	R	√3	1.732	1	0.00	œ
Device holder influence	0.10	R	√3	1.732	1	0.06	œ
DUT alignment	0.00	R	√3	1.732	1	0.00	00
RF ambient conditions	0.04	R	√3	1.732	1	0.02	œ
Ambient reflections	0.04	R	√3	1.732	1	0.02	œ
Immunity / secondary reception	0.00	R	√3	1.732	1	0.00	00
Drift of the DUT	-	R	√3	1.732	1	-	œ
Combined Std. uncertainty						1.33	
Expanded Std. uncertainty (95% confidence interval), K=2						2.67	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 65 of 129

12 SAR MEASUREMENT RESULTS

ID: 001

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11b_Body_Bottom Surface_CH 1_0mm_Main

Ambient temperature: 22.4°C; Liquid temperature: 20.3°C

Exposure Conditions

PI TS	,	Position, Test Distance [mm]	Frequency [MHz], Channel Number		TSL Conductivity [S/m]	TSL Permittivity
FI	at, HSL	Bottom Surface, 0.00	2412.0, 1	8.16	1.821	40.593

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 SN1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan				
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0				
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0				
Sensor Surface [mm]	3.0	1.4				

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-24	2022-11-24
psSAR1g [W/kg]	0.168	0.187
psSAR8g [W/kg]	0.091	0.101
psSAR10g [W/kg]	0.083	0.092
Power Drift [dB]	0.01	0.05
M2/M1 [%]		58.1
Dist 3dB Peak [mm]		12.9

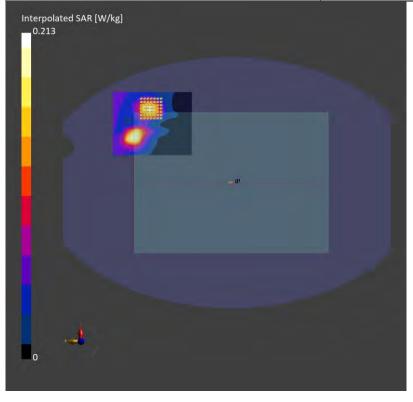

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之缘具负责,同时此模具做是例如于。木型生产概率公司事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 66 of 129

ID: 002

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11n(40M) 5.2G_Body_Bottom Surface_CH 46_0mm_Main

Ambient temperature: 22.1°C; Liquid temperature: 20.2°C

Exposure Conditions

´	Position, Test Distance [mm]				TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5230.0, 46	5.94	4.883	37.276

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 SN1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-25	2022-11-25
psSAR1g [W/kg]	0.412	0.510
psSAR8g [W/kg]	0.190	0.199
psSAR10g [W/kg]	0.173	0.145
Power Drift [dB]	0.02	0.05
M2/M1 [%]		61.8
Dist 3dB Peak [mm]		16.5

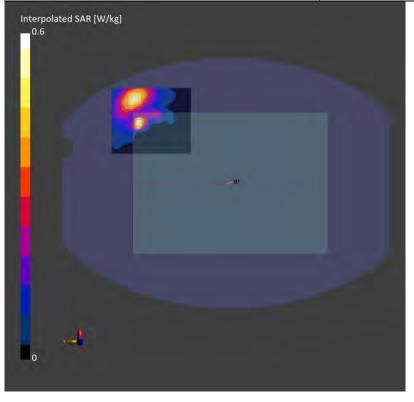

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之缘具负责,同时此模具做是例如于。木型生产概率公司事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

303 falwari Eta.



Page: 67 of 129

ID: 003

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11n(40M) 5.3G_Body_Bottom Surface_CH 54_0mm_Main

Ambient temperature: 22.1°C; Liquid temperature: 20.2°C

Exposure Conditions

´	Position, Test Distance [mm]		-	,	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5270.0, 54	5.94	4.926	37.231

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 SN1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan	
Grid Extents [mm]	80.0 x 120.0	24.0 x 24.0 x 22.0	
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0	
Sensor Surface [mm]	3.0	1.4	

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-25	2022-11-25
psSAR1g [W/kg]	0.423	0.476
psSAR8g [W/kg]	0.203	0.155
psSAR10g [W/kg]	0.185	0.136
Power Drift [dB]	-0.06	0.03
M2/M1 [%]		61.3
Dist 3dB Peak [mm]		13.9

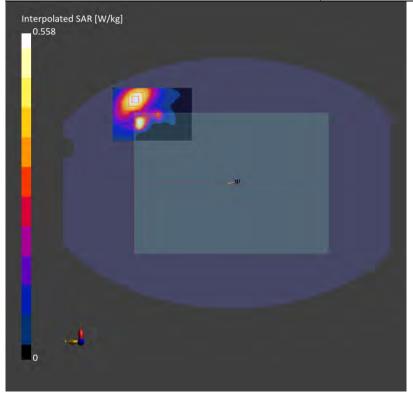

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

台灣檢驗科技股份有限公司



Page: 68 of 129

ID: 004

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11ac(80M) 5.6G_Body_Bottom Surface_CH 138_0mm_Main

Ambient temperature: 22.6°C; Liquid temperature: 20.6°C

Exposure Conditions

′	Position, Test Distance [mm]			-	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5690.0, 138	5.45	5.373	36.751

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 SN1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-26	2022-11-26
psSAR1g [W/kg]	0.554	0.558
psSAR8g [W/kg]	0.260	0.271
psSAR10g [W/kg]	0.238	0.247
Power Drift [dB]	0.03	-0.01
M2/M1 [%]		59.9
Dist 3dB Peak [mm]		14.8

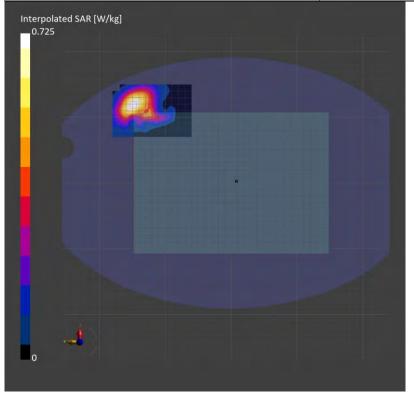

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 69 of 129

ID: 005

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11ac(80M) 5.8G_Body_Bottom Surface_CH 155_0mm_Main

Ambient temperature: 22.6°C; Liquid temperature: 20.6°C

Exposure Conditions

´	Position, Test Distance [mm]				TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5775.0, 155	5.45	5.463	36.654

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 SN1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-26	2022-11-26
psSAR1g [W/kg]	0.714	0.716
psSAR8g [W/kg]	0.332	0.343
psSAR10g [W/kg]	0.303	0.312
Power Drift [dB]	0.03	0.02
M2/M1 [%]		58.9
Dist 3dB Peak [mm]		16.5

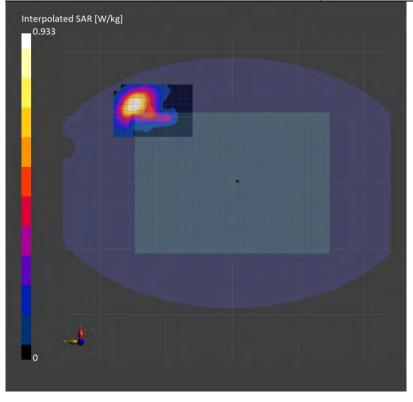

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 70 of 129

ID: 006

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11b_Body_Bottom Surface_CH 11_0mm_Aux

Ambient temperature: 22.4°C; Liquid temperature: 20.3°C

Exposure Conditions

′	Position, Test Distance [mm]			TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	2462.0, 11	8.16	1.88	40.51

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 SN1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-24	2022-11-24
psSAR1g [W/kg]	0.112	0.143
psSAR8g [W/kg]	0.064	0.080
psSAR10g [W/kg]	0.059	0.074
Power Drift [dB]	-0.03	0.04
M2/M1 [%]		57.3
Dist 3dB Peak [mm]		13.5

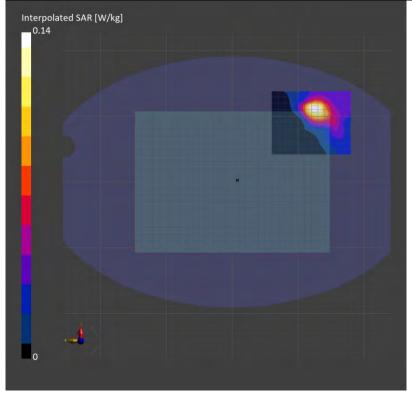

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之缘具负责,同时此模具做是例如于。木型生产概率公司事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw



Page: 71 of 129

ID: 007

Report No.: TESA2211000463E5

Measurement Report for N20Q10, Bluetooth(GFSK)_Body_Bottom Edge_CH 78_0mm_Aux

Ambient temperature: 22.4°C; Liquid temperature: 20.3°C

Exposure Conditions

′	Position, Test Distance [mm]			-	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	2480.0, 78	8.16	1.894	40.487

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 SN1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 144.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-24	2022-11-11
psSAR1g [W/kg]	0.015	0.016
psSAR8g [W/kg]	0.014	0.015
psSAR10g [W/kg]	0.008	0.007
Power Drift [dB]	-0.02	0.03
M2/M1 [%]		58.5
Dist 3dB Peak [mm]		13.5

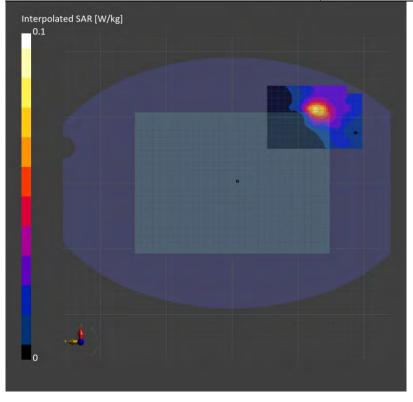

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報华结甲攝影測建立幾只有著,同時世操具攝風內內干。大報华主權大公司書面對可,不可可以推測。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw



Page: 72 of 129

ID: 008

Report No. :TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11n(40M) 5.2G_Body_Bottom Surface_CH 11_0mm_Aux

Ambient temperature: 22.1°C; Liquid temperature: 20.2°C

Exposure Conditions

	Position, Test Distance [mm]	, , , , , , , , , , , , , , , , , , ,	-	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5230.0, 46	5.94	4.883	37.276

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 SN1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan	
Grid Extents [mm]	80.0 x 120.0	24.0 x 24.0 x 22.0	
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0	
Sensor Surface [mm]	3.0	1.4	

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-25	2022-11-25
psSAR1g [W/kg]	0.163	0.161
psSAR8g [W/kg]	0.079	0.080
psSAR10g [W/kg]	0.072	0.073
Power Drift [dB]	-0.01	0.02
M2/M1 [%]		65.8
Dist 3dB Peak [mm]		14.4

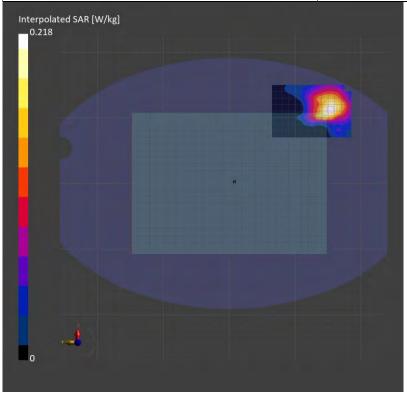

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 73 of 129

ID: 009

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11n(40M) 5.3G_Body_Bottom Surface_CH 54_0mm_Aux

Ambient temperature: 22.1°C; Liquid temperature: 20.2°C

Exposure Conditions

′	Position, Test Distance [mm]			-	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5270.0, 46	5.94	4.926	37.231

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 SN1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-25	2022-11-25
psSAR1g [W/kg]	0.170	0.175
psSAR8g [W/kg]	0.081	0.086
psSAR10g [W/kg]	0.074	0.078
Power Drift [dB]	-0.04	0.05
M2/M1 [%]		66.3
Dist 3dB Peak [mm]		13.6

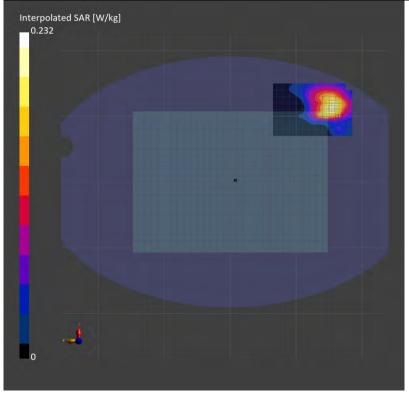

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

台灣檢驗科技股份有限公司



Page: 74 of 129

ID: 010

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11ac(80M) 5.6G_Body_Bottom Surface_CH 138_0mm_Aux

Ambient temperature: 22.6°C; Liquid temperature: 20.6°C

Exposure Conditions

´	Position, Test Distance [mm]		-	-	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5690.0, 46	5.45	5.373	36.751

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-02-10	DAE4 SN1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-26	2022-11-26
psSAR1g [W/kg]	0.465	0.495
psSAR8g [W/kg]	0.215	0.233
psSAR10g [W/kg]	0.195	0.211
Power Drift [dB]	-0.05	0.06
M2/M1 [%]		60.3
Dist 3dB Peak [mm]		15.5

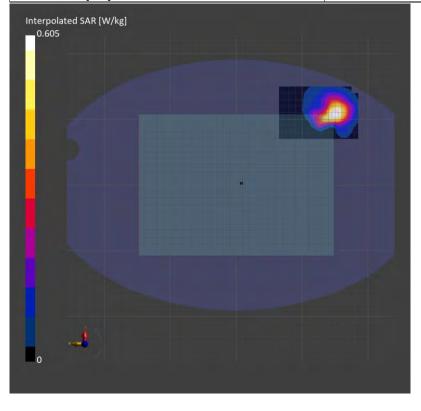

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報华结甲攝影測建立幾只有著,同時世操具攝風內內干。大報华主權大公司書面對可,不可可以推測。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 75 of 129

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11n(40M) 5.8G_Body_Bottom Surface_CH 151_0mm_Aux

Ambient temperature: 22.6°C; Liquid temperature: 20.6°C

Exposure Conditions

′	Position, Test Distance [mm]			-	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5755.0, 151	5.45	5.442	36.676

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 SN1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-26	2022-11-26
psSAR1g [W/kg]	0.527	0.547
psSAR8g [W/kg]	0.240	0.252
psSAR10g [W/kg]	0.217	0.228
Power Drift [dB]	-0.03	0.06
M2/M1 [%]		61.6
Dist 3dB Peak [mm]		11.9

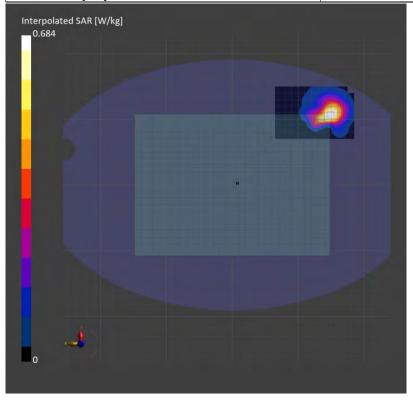

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

台灣檢驗科技股份有限公司



Page: 76 of 129

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11b_Body_Right Edge_CH 11_0mm_Main

Ambient temperature: 22.4°C; Liquid temperature: 20.3°C;

Exposure Conditions

Phantom Section,	Position, Test Distance	Frequency [MHz], Channel	Conversion	TSL Conductivity	TSL
TSL	[mm]	Number	Factor	[S/m]	Permittivity
Flat, HSL	Right Edge, 0.00	2462.0, 11	8.16	1.88	40.51

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 144.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-24	2022-11-24
psSAR1g [W/kg]	0.729	0.839
psSAR8g [W/kg]	0.380	0.400
psSAR10g [W/kg]	0.346	0.362
Power Drift [dB]	-0.04	0.02
M2/M1 [%]		47.3
Dist 3dB Peak [mm]		13.3

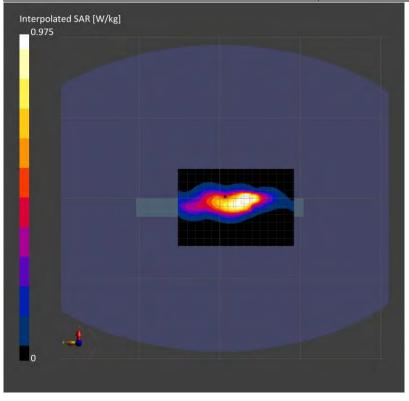

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 77 of 129

ID: 013

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11ac(80M) 5.2G_Body_Right Edge_CH 42_0mm_Main

Ambient temperature: 22.1°C; Liquid temperature: 20.2°C

Exposure Conditions

	Position, Test Distance [mm]		-	,	TSL Permittivity
Flat, HSL	Right Edge, 0.00	5210.0, 42	5.94	4.862	37.299

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 140.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-25	2022-11-25
psSAR1g [W/kg]	0.750	0.817
psSAR8g [W/kg]	0.242	0.259
psSAR10g [W/kg]	0.211	0.223
Power Drift [dB]	0.03	-0.03
M2/M1 [%]		62.3
Dist 3dB Peak [mm]		13.6

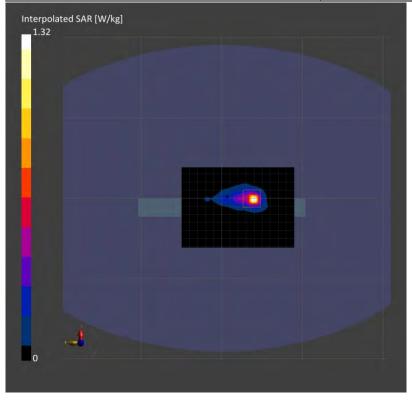

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報华结甲攝影測建立幾只有著,同時世操具攝風內內干。大報华主權大公司書面對可,不可可以推測。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw



Page: 78 of 129

ID: 014

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11ac(160M) 5.2G_Body_Right Edge_CH 50_0mm_Main

Ambient temperature: 22.1°C; Liquid temperature: 20.2°C

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]			TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Right Edge, 0.00	5250.0, 50	5.94	4.904	37.254

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan	
Grid Extents [mm]	100.0 x 140.0	24.0 x 24.0 x 22.0	
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0	
Sensor Surface [mm]	3.0	1.4	

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-25	2022-11-25
psSAR1g [W/kg]	0.843	0.957
psSAR8g [W/kg]	0.274	0.305
psSAR10g [W/kg]	0.238	0.263
Power Drift [dB]	0.02	-0.01
M2/M1 [%]		62.0
Dist 3dB Peak [mm]		15.7

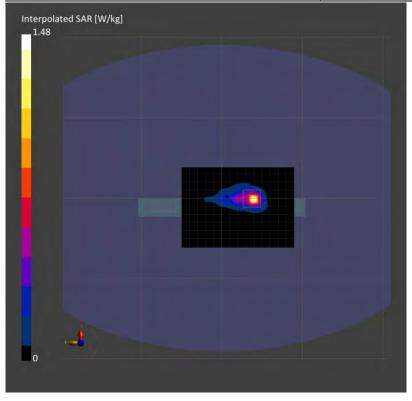

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 79 of 129

ID: 015

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11n(40M) 5.3G_Body_Right Edge_CH 62_0mm_Main

Ambient temperature: 22.1°C; Liquid temperature: 20.2°C

Exposure Conditions

′	Position, Test Distance [mm]			TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Right Edge, 0.00	5310.0, 62	5.94	4.945	37.160

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 140.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-25	2022-11-25
psSAR1g [W/kg]	1.03	1.15
psSAR8g [W/kg]	0.335	0.368
psSAR10g [W/kg]	0.292	0.319
Power Drift [dB]	-0.05	-0.01
M2/M1 [%]		61.1
Dist 3dB Peak [mm]		15.6

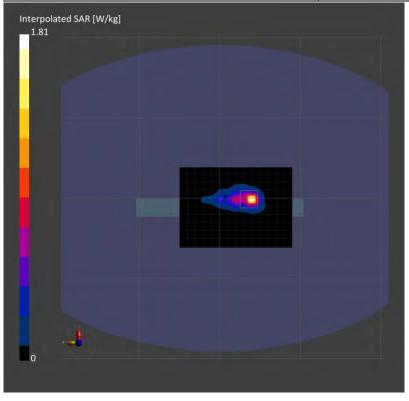

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之缘具负责,同时此模具做是例如于。木型生产概率从同事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw



Page: 80 of 129

ID: 016

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11ac(80M) 5.3G_Body_Right Edge_CH 58_0mm_Main

Ambient temperature: 22.1°C; Liquid temperature: 20.2°C

Exposure Conditions

´	Position, Test Distance [mm]		-	,	TSL Permittivity
Flat, HSL	Right Edge, 0.00	5290.0, 58	5.94	4.947	37.208

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 140.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-25	2022-11-25
psSAR1g [W/kg]	1.02	1.14
psSAR8g [W/kg]	0.330	0.360
psSAR10g [W/kg]	0.288	0.311
Power Drift [dB]	0.06	-0.05
M2/M1 [%]		60.6
Dist 3dB Peak [mm]		15.6

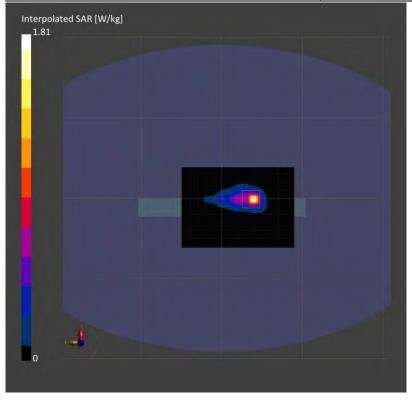

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 81 of 129

ID: 017

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11ac(80M) 5.6G_Body_Right Edge_CH 106_0mm_Main

Ambient temperature: 22.6°C; Liquid temperature: 20.6°C

Exposure Conditions

′	Position, Test Distance [mm]			TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Right Edge, 0.00	5530.0, 106	5.29	5.203	36.934

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 140.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-26	2022-11-26
psSAR1g [W/kg]	0.756	0.848
psSAR8g [W/kg]	0.307	0.322
psSAR10g [W/kg]	0.276	0.289
Power Drift [dB]	0.04	0.01
M2/M1 [%]		59.1
Dist 3dB Peak [mm]		12.1

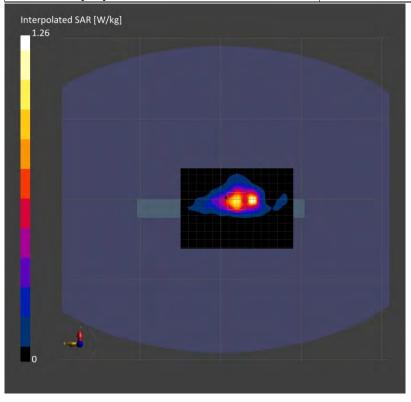

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除此只有验明,此就是结果既是为键与合善,同时此键与原况如何工,才就是主领于八司事而统可,不可如应编制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

Member of SGS Group



Page: 82 of 129

ID: 018

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11ac(160M) 5.6G_Body_Right Edge_CH 106_0mm_Main

Ambient temperature: 22.6°C; Liquid temperature: 20.6°C

Exposure Conditions

′	Position, Test Distance [mm]			TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Right Edge, 0.00	5570.0, 106	5.29	5.246	36.888

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 140.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-26	2022-11-26
psSAR1g [W/kg]	0.729	0.799
psSAR8g [W/kg]	0.310	0.323
psSAR10g [W/kg]	0.278	0.288
Power Drift [dB]	0.01	0.06
M2/M1 [%]		55.6
Dist 3dB Peak [mm]		11.6

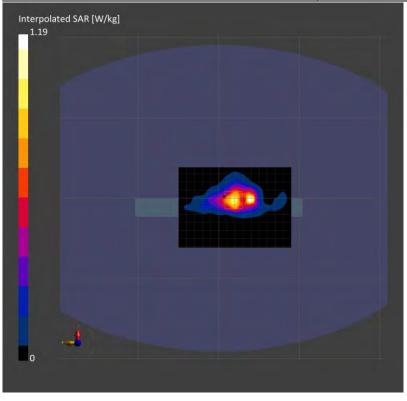

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 83 of 129

ID: 019

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11n(40M) 5.8G_Body_Right Edge_CH 159_0mm_Main

Ambient temperature: 22.6°C; Liquid temperature: 20.6°C

Exposure Conditions

′	Position, Test Distance [mm]			TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Right Edge, 0.00	5795.0, 159	5.45	5.484	36.631

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan	
Grid Extents [mm]	100.0 x 140.0	24.0 x 24.0 x 22.0	
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0	
Sensor Surface [mm]	3.0	1.4	

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-26	2022-11-26
psSAR1g [W/kg]	0.801	0.887
psSAR8g [W/kg]	0.344	0.332
psSAR10g [W/kg]	0.308	0.295
Power Drift [dB]	0.02	-0.01
M2/M1 [%]		58.9
Dist 3dB Peak [mm]		18.9

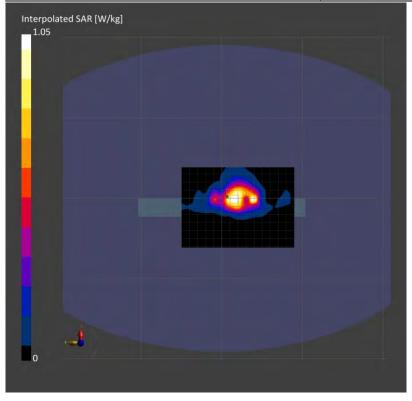

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 84 of 129

ID: 020

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11ac(80M) 5.8G_Body_Right Edge_CH 155_0mm_Main

Ambient temperature: 22.6°C; Liquid temperature: 20.6°C

Exposure Conditions

	mpoodio o onationo				
Phantom Section,	Position, Test Distance	Frequency [MHz], Channel	Conversion	TSL Conductivity	TSL
TSL	[mm]	Number	Factor	[S/m]	Permittivity
Flat, HSL	Right Edge, 0.00	5775.0, 155	5.45	5.463	36.654

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 140.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-26	2022-11-26
psSAR1g [W/kg]	0.829	0.887
psSAR8g [W/kg]	0.352	0.343
psSAR10g [W/kg]	0.316	0.305
Power Drift [dB]	0.03	-0.02
M2/M1 [%]		60.6
Dist 3dB Peak [mm]		18.9

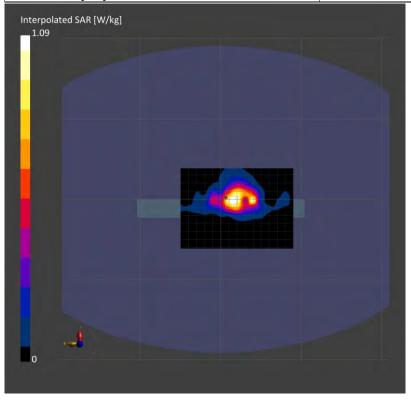

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之缘具负责,同时此模具做是例如于。木型生产概率从同事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 85 of 129

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11b_Body_Right Left_CH 11_0mm_Aux

Ambient temperature: 22.4°C; Liquid temperature: 20.3°C;

Exposure Conditions

Phantom Section,	Position, Test Distance	Frequency [MHz], Channel	Conversion	TSL Conductivity	TSL
TSL	[mm]	Number	Factor	[S/m]	Permittivity
Flat, HSL	Left Edge, 0.00	2462.0, 11	8.16	1.88	40.51

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 144.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-24	2022-11-24
psSAR1g [W/kg]	0.939	1.02
psSAR8g [W/kg]	0.468	0.471
psSAR10g [W/kg]	0.421	0.424
Power Drift [dB]	-0.03	-0.05
M2/M1 [%]		58.2
Dist 3dB Peak [mm]		16.0

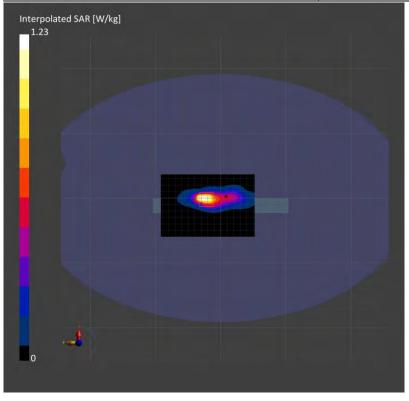

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 86 of 129

ID: 022

Report No. :TESA2211000463E5

Measurement Report for N20Q10, Bluetooth(GFSK)_Body_Left Edge_CH 78_0mm_Aux

Ambient temperature: 22.4°C; Liquid temperature: 20.3°C;

Exposure Conditions

′	Position, Test Distance [mm]			TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Left Edge, 0.00	2480.0, 78	8.16	1.894	40.487

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 144.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Coon	Zoom Scan
	Area Scan	Zoom Scan
Date	2022-11-24	2022-11-24
psSAR1g [W/kg]	0.130	0.146
psSAR8g [W/kg]	0.065	0.066
psSAR10g [W/kg]	0.058	0.059
Power Drift [dB]	0.01	-0.04
M2/M1 [%]		58.3
Dist 3dB Peak [mm]		16.0

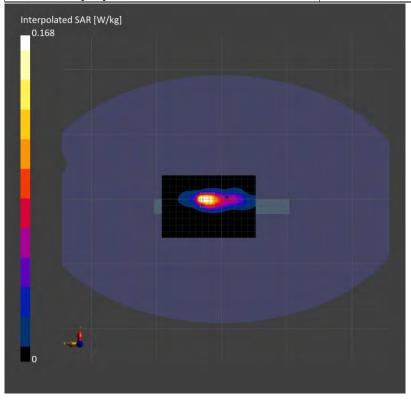

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之缘具负责,同时此模具做是例如于。木型生产概率从同事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Talwan Ltd. _| No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 87 of 129

ID: 023

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11ac(80M) 5.2G_Body_Left Edge_CH 42_0mm_Aux

Ambient temperature: 22.1°C; Liquid temperature: 20.2°C

Exposure Conditions

´	Position, Test Distance [mm]				TSL Permittivity
Flat, HSL	Left Edge, 0.00	5210.0, 42	5.94	4.862	37.299

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 140.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-25	2022-11-25
psSAR1g [W/kg]	0.756	0.884
psSAR8g [W/kg]	0.281	0.292
psSAR10g [W/kg]	0.245	0.251
Power Drift [dB]	-0.10	-0.03
M2/M1 [%]		56.1
Dist 3dB Peak [mm]		16.4

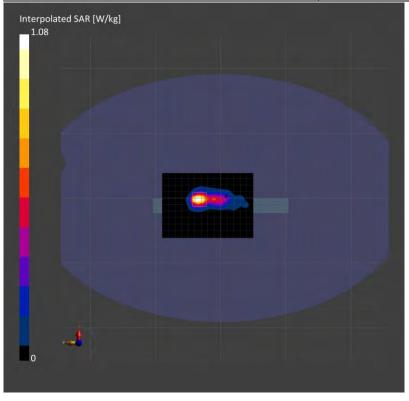

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

台灣檢驗科技股份有限公司



Page: 88 of 129

ID: 024

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11ac(160M) 5.2G_Body_Left Edge_CH 50_0mm_Aux

Ambient temperature: 22.1°C; Liquid temperature: 20.2°C

Exposure Conditions

´	Position, Test Distance [mm]				TSL Permittivity
Flat, HSL	Left Edge, 0.00	5250.0, 50	5.94	4.904	37.254

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 140.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-25	2022-11-25
psSAR1g [W/kg]	0.788	0.931
psSAR8g [W/kg]	0.296	0.310
psSAR10g [W/kg]	0.259	0.268
Power Drift [dB]	-0.05	-0.06
M2/M1 [%]		55.8
Dist 3dB Peak [mm]		16.4

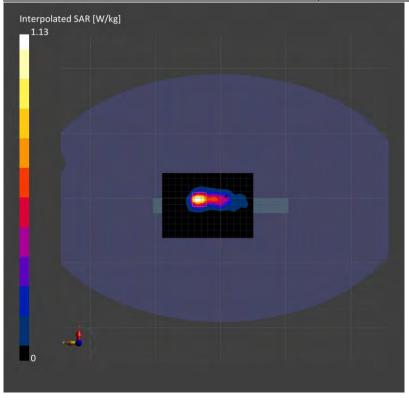

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 89 of 129

ID: 025

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11ac(80M) 5.3G_Body_Left Edge_CH 58_0mm_Aux

Ambient temperature: 22.1°C; Liquid temperature: 20.2°C

Exposure Conditions

Phantom Section,	Position, Test Distance	Frequency [MHz], Channel	Conversion	TSL Conductivity	TSL
TSL	[mm]	Number	Factor	[S/m]	Permittivity
Flat, HSL	Left Edge, 0.00	5290.0, 58	5.94	4.947	37.208

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 140.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
	Alea Scall	Zooni Scan
Date	2022-11-25	2022-11-25
psSAR1g [W/kg]	0.647	0.762
psSAR8g [W/kg]	0.246	0.176
psSAR10g [W/kg]	0.216	0.223
Power Drift [dB]	-0.02	-0.02
M2/M1 [%]		55.2
Dist 3dB Peak [mm]		16.9

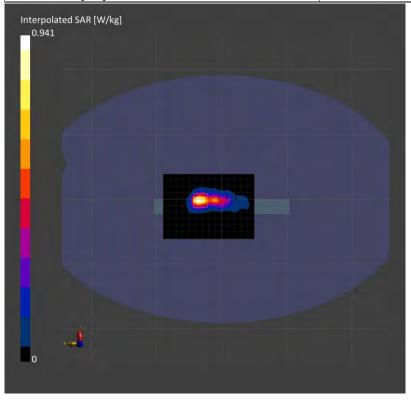

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 90 of 129

ID: 026

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11ac(80M) 5.6G_Body_Left Edge_CH 106_0mm_Aux

Ambient temperature: 22.6°C; Liquid temperature: 20.6°C

Exposure Conditions

´	Position, Test Distance [mm]		-	,	TSL Permittivity
Flat, HSL	Left Edge, 0.00	5530.0, 106	5.29	5.203	36.934

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 140.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-26	2022-11-26
psSAR1g [W/kg]	0.746	0.832
psSAR8g [W/kg]	0.281	0.279
psSAR10g [W/kg]	0.250	0.264
Power Drift [dB]	-0.02	-0.01
M2/M1 [%]		52.8
Dist 3dB Peak [mm]		17.2

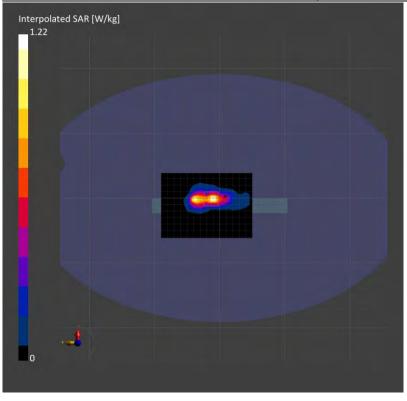

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 91 of 129

ID: 027

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11ac(160M) 5.6G_Body_Left Edge_CH 114_0mm_Aux

Ambient temperature: 22.6°C; Liquid temperature: 20.6°C

Exposure Conditions

´	Position, Test Distance [mm]		-	,	TSL Permittivity
Flat, HSL	Left Edge, 0.00	5570.0, 114	5.29	5.246	36.888

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 140.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-26	2022-11-26
psSAR1g [W/kg]	0.767	0.836
psSAR8g [W/kg]	0.285	0.276
psSAR10g [W/kg]	0.253	0.268
Power Drift [dB]	-0.02	0.02
M2/M1 [%]		52.4
Dist 3dB Peak [mm]		16.8

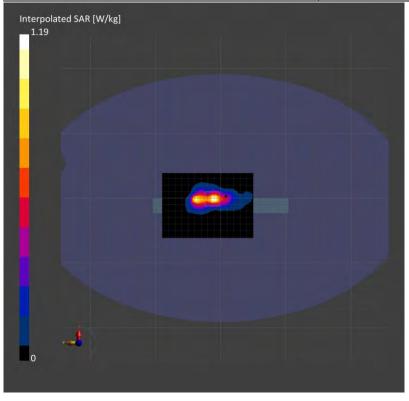

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 92 of 129

ID: 028

Report No.: TESA2211000463E5

Measurement Report for N20Q10, WLAN 802.11ac(80M) 5.8G_Body_Left Edge_CH 155_0mm_Aux

Ambient temperature: 22.6°C; Liquid temperature: 20.6°C

Exposure Conditions

Phantom Section,	Position, Test Distance	Frequency [MHz], Channel	Conversion	TSL Conductivity	TSL
TSL	[mm]	Number	Factor	[S/m]	Permittivity
Flat, HSL	Left Edge, 0.00	5775.0, 155	5.45	5.463	36.654

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 140.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-26	2022-11-26
psSAR1g [W/kg]	0.723	0.743
psSAR8g [W/kg]	0.273	0.226
psSAR10g [W/kg]	0.241	0.248
Power Drift [dB]	-0.02	0.04
M2/M1 [%]		51.5
Dist 3dB Peak [mm]		16.4

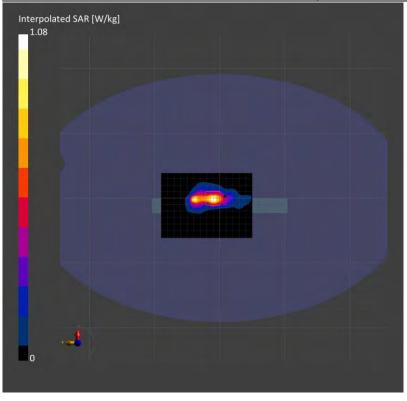

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 93 of 129

ID: 029

Report No.: TESA2211000463E5

Measurement Report for N20Q10,U-NII-5 6.2G 802.11ax(160M)_Body_Bottom Surface_CH 15_0mm_Main

Ambient temperature: 21.4°C; Liquid temperature: 20.4°C

Exposure Conditions

′	Position, Test Distance [mm]			TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	6025.0, 15	5.8	5.73	36.366

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 119.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-21	2022-11-21
psSAR1g [W/kg]	0.110	0.115
psSAR8g [W/kg]	0.049	0.052
psSAR10g [W/kg]	0.044	0.047
psPDab (4.0cm2, sq) [W/m2]		1.04
Power Drift [dB]	0.04	0.05
M2/M1 [%]		61.6
Dist 3dB Peak [mm]		13.2

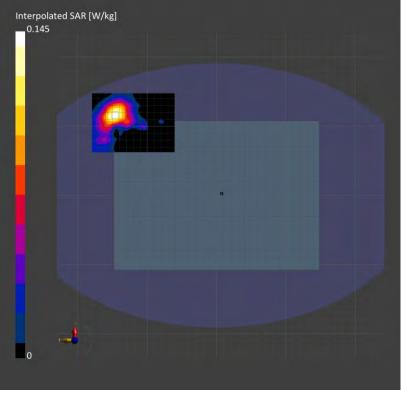

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除此只有验明,此就是结果既是为键与合善,同时此键与原况如何工,才就是主领于八司事而统可,不可如应编制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 94 of 129

ID: 030

Report No.: TESA2211000463E5

Measurement Report for N20Q10,U-NII-5 6.2G 802.11ax(160M)_Body_Bottom Surface_CH 47_0mm_Main

Ambient temperature: 21.4°C; Liquid temperature: 20.4°C

Exposure Conditions

′	Position, Test Distance [mm]			TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	6185.0, 47	5.8	5.903	36.174

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 119.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-21	2022-11-21
psSAR1g [W/kg]	0.104	0.107
psSAR8g [W/kg]	0.046	0.047
psSAR10g [W/kg]	0.041	0.043
psPDab (4.0cm2, sq) [W/m2]		0.95
Power Drift [dB]	0.02	0.01
M2/M1 [%]		60.9
Dist 3dB Peak [mm]		9.7

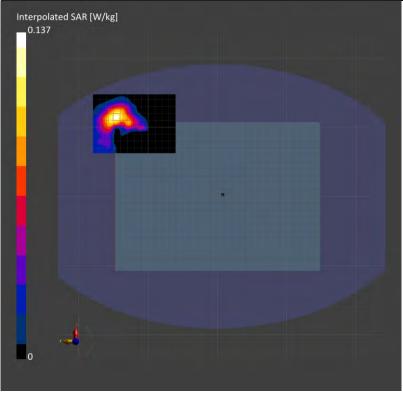

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除业只有约明,此程生处用度外侧经少量,同时此类早度内向的工,大规生土领土公司事富统司,不可如公海侧。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

JOJ Idiwali Eta.



Page: 95 of 129

ID: 031

Report No.: TESA2211000463E5

Measurement Report for N20Q10,U-NII-6 6.5G 802.11ax(160M)_Body_Bottom Surface_CH 111_0mm_Main

Ambient temperature: 21.4°C; Liquid temperature: 20.4°C

Exposure Conditions

´	Position, Test Distance [mm]		-		TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	6505.0, 111	5.8	6.251	35.79

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 119.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-21	2022-11-21
psSAR1g [W/kg]	0.122	0.123
psSAR8g [W/kg]	0.054	0.055
psSAR10g [W/kg]	0.049	0.049
psPDab (4.0cm2, sq) [W/m2]		1.09
Power Drift [dB]	-0.03	0.06
M2/M1 [%]		61.8
Dist 3dB Peak [mm]		11.1

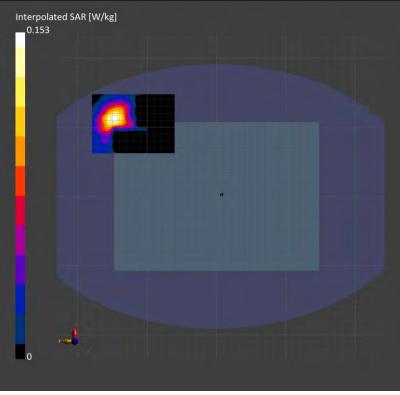

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司

www.sqs.com.tw



Page: 96 of 129

ID: 032

Report No.: TESA2211000463E5

Measurement Report for N20Q10,U-NII-7 6.7G 802.11ax(160M)_Body_Bottom Surface_CH 143_0mm_Main

Ambient temperature: 21.4°C; Liquid temperature: 20.4°C

Exposure Conditions

´	Position, Test Distance [mm]			-	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	6665.0, 143	5.8	6.426	35.598

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 119.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-21	2022-11-21
psSAR1g [W/kg]	0.202	0.201
psSAR8g [W/kg]	0.089	0.091
psSAR10g [W/kg]	0.081	0.082
psPDab (4.0cm2, sq) [W/m2]		1.83
Power Drift [dB]	0.04	0.02
M2/M1 [%]		60.2
Dist 3dB Peak [mm]		10.2

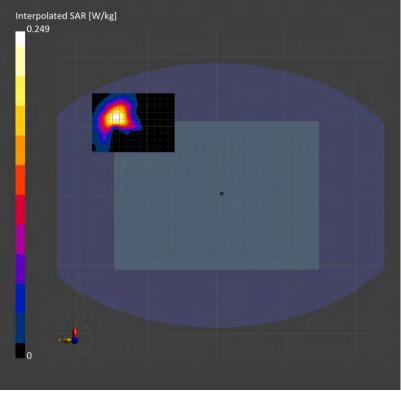

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司

www.sqs.com.tw



Page: 97 of 129

ID: 033

Report No. :TESA2211000463E5

Measurement Report for N20Q10,U-NII-8 7.0G 802.11ax(160M)_Body_Bottom Surface_CH 207_0mm_Main

Ambient temperature: 21.4°C; Liquid temperature: 20.4°C

Exposure Conditions

<i>′</i>	Position, Test Distance [mm]		-	-	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	6985.0, 207	5.7	6.781	35.214

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7642 2022-03-02	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 119.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-21	2022-11-21
psSAR1g [W/kg]	0.153	0.156
psSAR8g [W/kg]	0.067	0.069
psSAR10g [W/kg]	0.061	0.062
psPDab (4.0cm2, sq) [W/m2]		1.38
Power Drift [dB]	0.01	0.03
M2/M1 [%]		54.3
Dist 3dB Peak [mm]		8.6

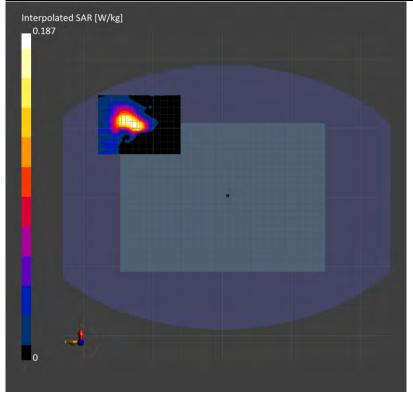

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報华结甲攝影測建立幾只有著,同時世操具攝風內內干。大報华主權大公司書面對可,不可可以推測。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

JOS Idiwan Eta.



Page: 98 of 129

ID: 034

Report No.: TESA2211000463E5

Measurement Report for N20Q10,U-NII-5 6.2G 802.11ax(160M)_Body_Bottom Surface_CH 79_0mm_Aux

Ambient temperature: 21.4°C; Liquid temperature: 20.4°C

Exposure Conditions

<i>′</i>	Position, Test Distance [mm]		-	-	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	6345.0, 79	5.8	6.076	35.982

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 119.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-21	2022-11-21
psSAR1g [W/kg]	0.080	0.082
psSAR8g [W/kg]	0.035	0.038
psSAR10g [W/kg]	0.032	0.034
psPDab (4.0cm2, sq) [W/m2]		0.753
Power Drift [dB]	0.03	0.03
M2/M1 [%]		59.3
Dist 3dB Peak [mm]		9.9

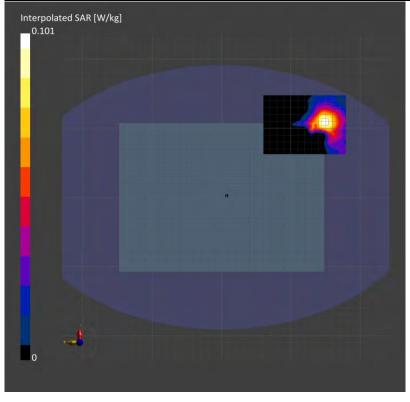

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報华结甲攝影測建立幾只有著,同時世操具攝風內內干。大報华主權大公司書面對可,不可可以推測。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 99 of 129

ID: 035

Report No.: TESA2211000463E5

Measurement Report for N20Q10,U-NII-6 6.5G 802.11ax(160M)_Body_Bottom Surface_CH 111_0mm_Aux

Ambient temperature: 21.4°C; Liquid temperature: 20.4°C

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]		Conversion Factor	-	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	6505.0, 111	5.8	6.251	35.79

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 119.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-21	2022-11-21
psSAR1g [W/kg]	0.086	0.092
psSAR8g [W/kg]	0.037	0.041
psSAR10g [W/kg]	0.034	0.037
psPDab (4.0cm2, sq) [W/m2]		0.812
Power Drift [dB]	0.04	0.01
M2/M1 [%]		61.2
Dist 3dB Peak [mm]		9.6

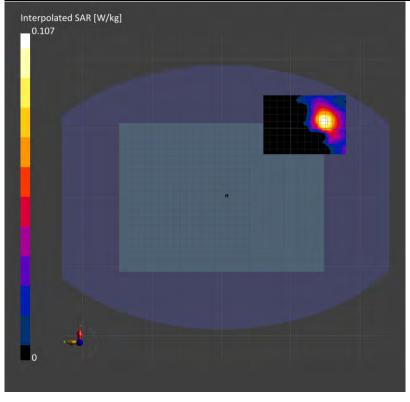

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 100 of 129

ID: 036

Report No.: TESA2211000463E5

Measurement Report for N20Q10,U-NII-7 6.7G 802.11ax(160M)_Body_Bottom Surface_CH 111_0mm_Aux

Ambient temperature: 21.4°C; Liquid temperature: 20.4°C

Exposure Conditions

<i>′</i>	Position, Test Distance [mm]		-	-	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	6825.0, 175	5.8	6.603	35.406

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7642 2022-03-02	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 119.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-21	2022-11-21
psSAR1g [W/kg]	0.103	0.107
psSAR8g [W/kg]	0.045	0.046
psSAR10g [W/kg]	0.040	0.042
psPDab (4.0cm2, sq) [W/m2]		0.928
Power Drift [dB]	-0.05	0.01
M2/M1 [%]		57.0
Dist 3dB Peak [mm]		9.0

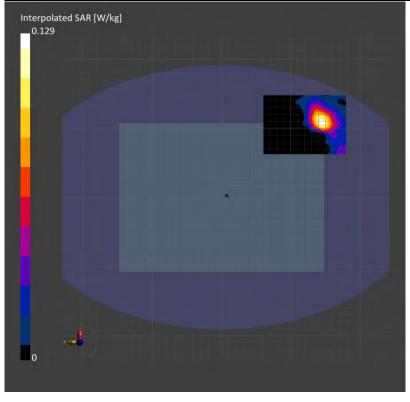

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 101 of 129

ID: 037

Report No.: TESA2211000463E5

Measurement Report for N20Q10,U-NII-8 7.0G 802.11ax(160M)_Body_Bottom Surface_CH 207_0mm_Aux Ambient temperature: 21.4°C; Liquid temperature: 20.4°C

Exposure Conditions

<i>′</i>	Position, Test Distance [mm]		-	-	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	6985.0, 207	5.8	6.781	35.214

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 119.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-21	2022-11-21
psSAR1g [W/kg]	0.084	0.085
psSAR8g [W/kg]	0.036	0.032
psSAR10g [W/kg]	0.032	0.028
psPDab (4.0cm2, sq) [W/m2]		0.646
Power Drift [dB]	0.02	0.05
M2/M1 [%]		59.2
Dist 3dB Peak [mm]		10.3

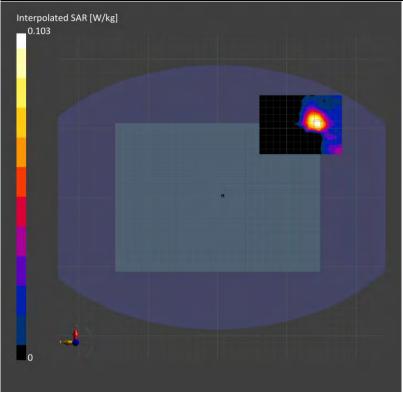

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.sqs.com.tw



Page: 102 of 129

ID: 038

Report No.: TESA2211000463E5

Measurement Report for N20Q10, U-NII-5, 6.2G 802.11ax(160M)_Body_Right Edge_CH 47_0mm_Main

Ambient temperature: 21.4°C; Liquid temperature: 20.4°C

Exposure Conditions

<i>′</i>	Position, Test Distance [mm]		-	,	TSL Permittivity
Flat, HSL	Right Edge, 0.00	6185.0, 47	5.8	5.903	36.174

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1751, 2022-10-10

Scans Setup

•	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Edge [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-21	2022-11-21
psSAR1g [W/kg]	0.531	0.591
psSAR8g [W/kg]	0.218	0.234
psSAR10g [W/kg]	0.195	0.212
psPDab (4.0cm2, sq) [W/m2]		4.74
Power Drift [dB]	-0.03	0.01
M2/M1 [%]		58.5
Dist 3dB Peak [mm]		9.4

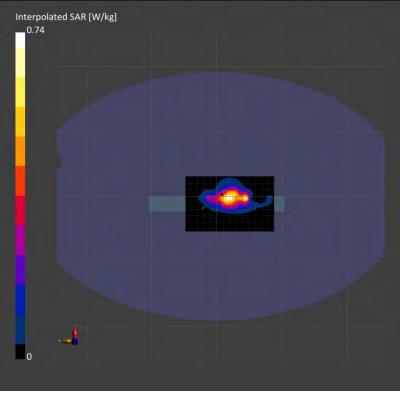

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 103 of 129

ID: 039

Report No.: TESA2211000463E5

Measurement Report for N20Q10, U-NII-5 6.2G 802.11ax(160M)_Body_Right Edge_CH 79_0mm_Main

Ambient temperature: 21.4°C; Liquid temperature: 20.4°C

Exposure Conditions

	mpoodi o o onditiono				
Phantom Section,	Position, Test Distance	Frequency [MHz], Channel	Conversion	TSL Conductivity	TSL
TSL	[mm]	Number	Factor	[S/m]	Permittivity
Flat, HSL	Right Edge, 0.00	6345.0, 79	5.8	6.076	35.982

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Edge [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-21	2022-11-21
psSAR1g [W/kg]	0.599	0.646
psSAR8g [W/kg]	0.231	0.243
psSAR10g [W/kg]	0.204	0.215
psPDab (4.0cm2, sq) [W/m2]		4.87
Power Drift [dB]	-0.01	0.05
M2/M1 [%]		55.2
Dist 3dB Peak [mm]		10.6

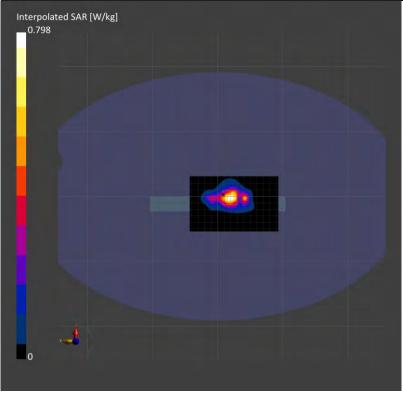

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除此只有验明,此就是结果既是为键与合善,同时此键与原况如何工,才就是主领于八司事而统可,不可如应编制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司 t



Page: 104 of 129

ID: 040

Report No.: TESA2211000463E5

Measurement Report for N20Q10, U-NII-6 6.5G 802.11ax(160M)_Body_Right Edge_CH 111_0mm_Main

Ambient temperature: 21.4°C; Liquid temperature: 20.4°C

Exposure Conditions

´	Position, Test Distance [mm]		-	,	TSL Permittivity
Flat, HSL	Right Edge, 0.00	6505.0, 111	5.8	6.251	35.79

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Edge [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-21	2022-11-21
psSAR1g [W/kg]	0.695	0.748
psSAR8g [W/kg]	0.262	0.272
psSAR10g [W/kg]	0.231	0.239
psPDab (4.0cm2, sq) [W/m2]		5.44
Power Drift [dB]	0.05	0.03
M2/M1 [%]		55.7
Dist 3dB Peak [mm]		11.0

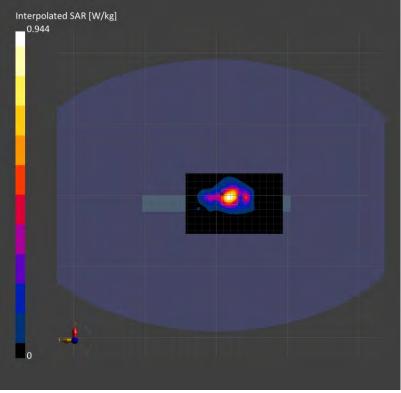

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之缘具负责,同时此模具做是例如于。木型生产概率从同事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 105 of 129

ID: 041

Report No.: TESA2211000463E5

Measurement Report for N20Q10, U-NII-7 6.7G 802.11ax(160M)_Body_Right Edge_CH 143_0mm_Main

Ambient temperature: 21.4°C; Liquid temperature: 20.4°C

Exposure Conditions

′	Position, Test Distance [mm]			TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Right Edge, 0.00	6665.0, 143	5.8	6.426	35.598

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1751, 2022-10-10

Scans Setup

•	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Edge [mm]	3.0	1.4

Measurement Results

mode di cinoni i tocalto		
	Area Scan	Zoom Scan
Date	2022-11-21	2022-11-21
psSAR1g [W/kg]	0.728	0.772
psSAR8g [W/kg]	0.263	0.278
psSAR10g [W/kg]	0.231	0.243
psPDab (4.0cm2, sq) [W/m2]		5.56
Power Drift [dB]	-0.02	-0.06
M2/M1 [%]		53.7
Dist 3dB Peak [mm]		9.7

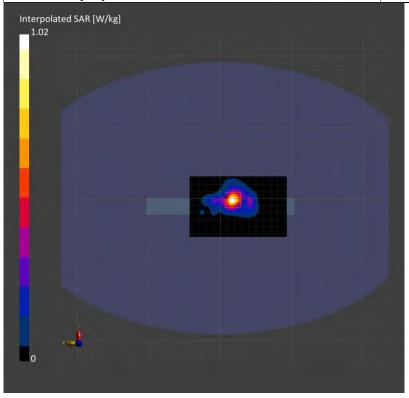

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

台灣檢驗科技股份有限公司



Page: 106 of 129

ID: 042

Report No.: TESA2211000463E5

Measurement Report for N20Q10, U-NII-8 7.0G 802.11ax(160M)_Body_Right Edge_CH 207_0mm_Main

Ambient temperature: 21.4°C; Liquid temperature: 20.4°C

Exposure Conditions

′	Position, Test Distance [mm]			TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Right Edge, 0.00	6985.0, 207	5.7	6.781	35.214

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1751, 2022-10-10

Scans Setup

•	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Edge [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-21	2022-11-21
psSAR1g [W/kg]	0.702	0.684
psSAR8g [W/kg]	0.258	0.256
psSAR10g [W/kg]	0.227	0.224
psPDab (4.0cm2, sq) [W/m2]		5.12
Power Drift [dB]	0.04	0.06
M2/M1 [%]		52.5
Dist 3dB Peak [mm]		9.2

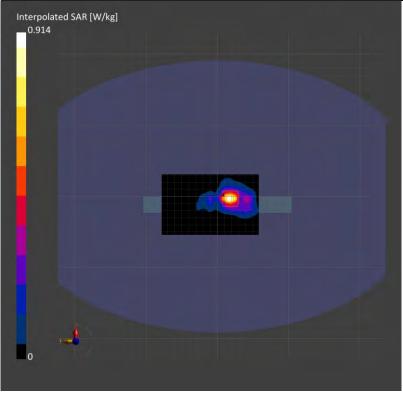

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之缘具负责,同时此模具做是例如于。木型生产概率从同事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 107 of 129

ID: 043

Report No.: TESA2211000463E5

Measurement Report for N20Q10, U-NII-5 6.2G 802.11ax(160M)_Body_Left Edge_CH 15_0mm_Aux

Ambient temperature: 21.4°C; Liquid temperature: 20.4°C

Exposure Conditions

´	Position, Test Distance [mm]		-	-	TSL Permittivity
Flat, HSL	Left Edge, 0.00	6025.0, 15	5.8	5.73	36.366

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Edge [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-21	2022-11-21
psSAR1g [W/kg]	0.468	0.519
psSAR8g [W/kg]	0.176	0.131
psSAR10g [W/kg]	0.156	0.173
psPDab (4.0cm2, sq) [W/m2]		3.95
Power Drift [dB]	-0.02	-0.04
M2/M1 [%]		60.4
Dist 3dB Peak [mm]		9.3

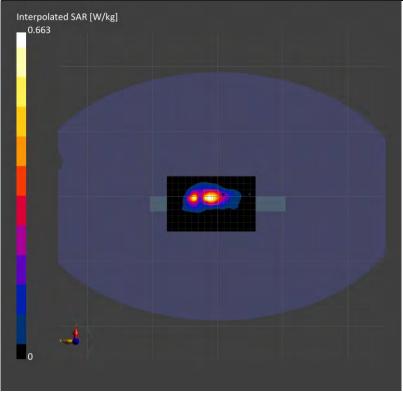

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.sqs.com.tw



Page: 108 of 129

ID: 044

Report No.: TESA2211000463E5

Measurement Report for N20Q10, U-NII-5 6.5G 802.11ax(160M)_Body_Left Edge_CH 47_0mm_Aux

Ambient temperature: 21.4°C; Liquid temperature: 20.4°C

Exposure Conditions

´	Position, Test Distance [mm]		-	-	TSL Permittivity
Flat, HSL	Left Edge, 0.00	6185.0, 47	5.8	5.903	36.174

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Edge [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-21	2022-11-21
psSAR1g [W/kg]	0.477	0.529
psSAR8g [W/kg]	0.185	0.208
psSAR10g [W/kg]	0.164	0.183
psPDab (4.0cm2, sq) [W/m2]		4.16
Power Drift [dB]	-0.01	0.04
M2/M1 [%]		61.6
Dist 3dB Peak [mm]		7.5

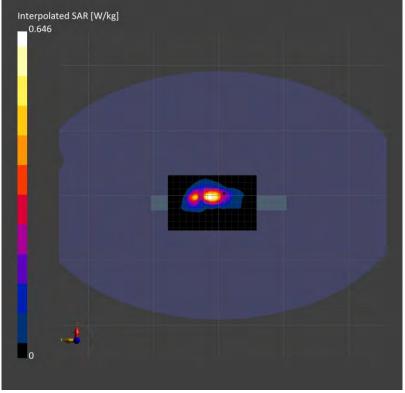

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報华结甲攝影測建立幾只有著,同時世操具攝風內內干。大報华主權大公司書面對可,不可可以推測。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 109 of 129

ID: 045

Report No.: TESA2211000463E5

Measurement Report for N20Q10, U-NII-6 6.5G 802.11ax(160M)_Body_Left Edge_CH 111_0mm_Aux

Ambient temperature: 21.4°C; Liquid temperature: 20.4°C

Exposure Conditions

´	Position, Test Distance [mm]			-	TSL Permittivity
Flat, HSL	Left Edge, 0.00	6505.0, 111	5.8	6.251	35.79

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1751, 2022-10-10

Scans Setup

•	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Edge [mm]	3.0	1.4

Measurement Results

Date 2022-11-21 2022-11-21 2022-11-21 2022-11-21 2022-11-21 2022-11-21 2022-11-21 0.6 0.6 0.6 0.563 0.6 0.207 0.2 0.2 0.2 0.2 0.2 0.2 0.183 0.1 0.1 0.1 0.1 0.1 0.1 0.1 0.1 0.1 0.1 0.0 0.	nous and the resource				
psSAR1g [W/kg] 0.563 0.6 psSAR8g [W/kg] 0.207 0.2 psSAR10g [W/kg] 0.183 0.1 psPDab (4.0cm2, sq) [W/m2] 4. Power Drift [dB] -0.03 0. M2/M1 [%] 59		Area Scan	Zoom Scan		
psSAR8g [W/kg] 0.207 0.2 psSAR10g [W/kg] 0.183 0.1 psPDab (4.0cm2, sq) [W/m2] 4. Power Drift [dB] -0.03 0. M2/M1 [%] 59	Date	2022-11-21	2022-11-21		
psSAR10g [W/kg] 0.183 0.1 psPDab (4.0cm2, sq) [W/m2] 4. Power Drift [dB] -0.03 0. M2/M1 [%] 59	psSAR1g [W/kg]	0.563	0.614		
psPDab (4.0cm2, sq) [W/m2] 4. Power Drift [dB] -0.03 0. M2/M1 [%] 59	psSAR8g [W/kg]	0.207	0.225		
Power Drift [dB] -0.03 0. M2/M1 [%] 59	psSAR10g [W/kg]	0.183	0.197		
M2/M1 [%] 59	psPDab (4.0cm2, sq) [W/m2]		4.49		
	Power Drift [dB]	-0.03	0.01		
Dist 3dB Peak [mm]	M2/M1 [%]		59.4		
	Dist 3dB Peak [mm]		6.9		

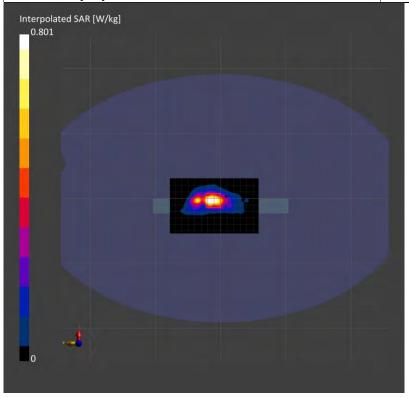

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報华结甲攝影測建立幾只有著,同時世輕早歷歷初的主。大報华主極大公司書面對可,不可可以推測。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

台灣檢驗科技股份有限公司



Page: 110 of 129

ID: 046

Report No.: TESA2211000463E5

Measurement Report for N20Q10, U-NII-7 6.7G 802.11ax(160M)_Body_Left Edge_CH 175_0mm_Aux

Ambient temperature: 21.4°C; Liquid temperature: 20.4°C

Exposure Conditions

′	Position, Test Distance [mm]			TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Left Edge, 0.00	6825.0, 175	5.8	6.603	35.406

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Edge [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-21	2022-11-21,
psSAR1g [W/kg]	0.642	0.678
psSAR8g [W/kg]	0.229	0.242
psSAR10g [W/kg]	0.201	0.211
psPDab (4.0cm2, sq) [W/m2]		4.84
Power Drift [dB]	0.06	0.01
M2/M1 [%]		57.9
Dist 3dB Peak [mm]		6.5

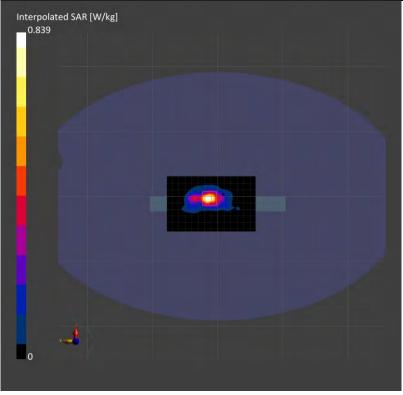

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,他都是好用魔影测验之样只有害,同时他接见魔鬼匆匆子。木都些主领大八司事而验证,太可如心海测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw



Page: 111 of 129

ID: 047

Report No.: TESA2211000463E5

Measurement Report for N20Q10, U-NII-8 7.0G 802.11ax(160M)_Body_Left Edge_CH 207_0mm_Aux

Ambient temperature: 21.4°C; Liquid temperature: 20.4°C

Exposure Conditions

´	Position, Test Distance [mm]		-	-	TSL Permittivity
Flat, HSL	Left Edge, 0.00	6985.0, 207	5.7	6.781	35.214

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1751, 2022-10-10

Scans Setup

•	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Edge [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-21	2022-11-21
psSAR1g [W/kg]	0.591	0.616
psSAR8g [W/kg]	0.210	0.221
psSAR10g [W/kg]	0.184	0.195
psPDab (4.0cm2, sq) [W/m2]		4.47
Power Drift [dB]	0.01	0.02
M2/M1 [%]		58.4
Dist 3dB Peak [mm]		6.7

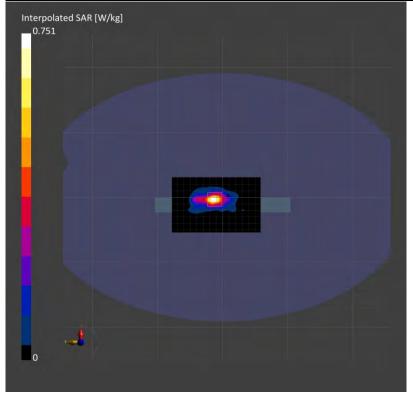

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

台灣檢驗科技股份有限公司



Page: 112 of 129

13 PD MEASUREMENT RESULTS

ID: 048

Report No.: TESA2211000463E5

Measurement Report for N20Q10, Right Edge, U-NII-5,

IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 15 (6025.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor
5G, Air	Right Edge, 2.00	1.0

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1096	EUmmWV4 - SN9616_F1-55GHz, 2022-03-20	DAE4 Sn1751, 2022-10-10

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-11-22
Avg. Area [cm²]	4.00
psPDn+ [W/m ²]	2.68
psPDtot+ [W/m²]	4.96
psPDmod+ [W/m²]	7.59
E _{max} [V/m]	82.7
Power Drift [dB]	0.06

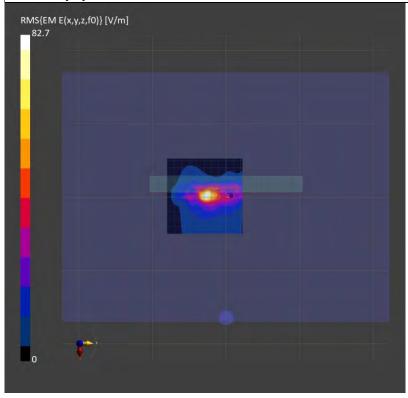

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,此想生红用魔影测验之缘具色素,同时此缘里属是2000年。太想生主领太八司事面纯可,不可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw



Page: 113 of 129

ID: 049

Report No.: TESA2211000463E5

Measurement Report for N20Q10, Right Edge, U-NII-5,

IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 47 (6185.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor
5G, Air	Right Edge, 2.00	1.0

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1096	EUmmWV4 - SN9616_F1-55GHz, 2022-03-20	DAE4 Sn1719, 2022-03-25

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-11-22
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	2.66
psPDtot+ [W/m²]	5.42
psPDmod+ [W/m²]	7.16
E _{max} [V/m]	85.6
Power Drift [dB]	0.02

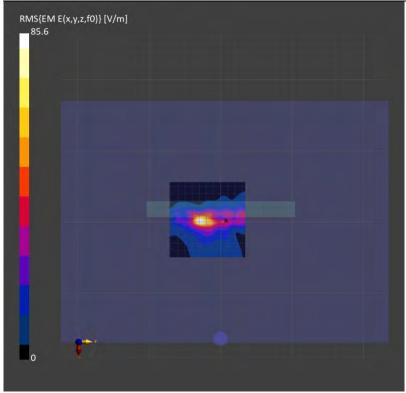

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,此想生红用魔影测验之缘具色素,同时此缘里属是2000年。太想生主领太八司事面纯可,不可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 114 of 129

ID: 050

Report No.: TESA2211000463E5

Measurement Report for N20Q10, Right Edge, U-NII-6,

IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 111 (6505.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor
5G, Air	Right Edge, 2.00	1.0

Har	dware	Setup
-----	-------	-------


Phantom	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1096	EUmmWV4 - SN9616_F1-55GHz, 2022-03-20	DAE4 Sn1719, 2022-03-25

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-11-22
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	3.20
psPDtot+ [W/m²]	4.84
psPDmod+ [W/m²]	6.12
E _{max} [V/m]	63.7
Power Drift [dB]	-0.05

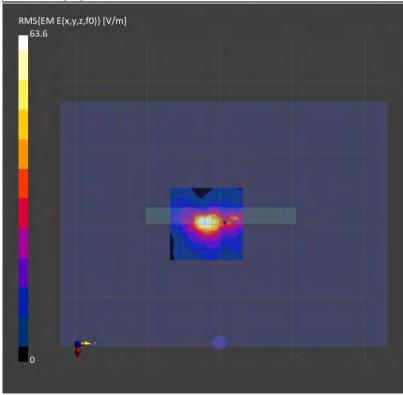

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,他都是好用魔影测验之样只有害,同时他接见魔鬼匆匆子。木都些主领大八司事而验证,太可如心海测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司 t (886

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw



Page: 115 of 129

ID: 051

Report No.: TESA2211000463E5

Measurement Report for N20Q10, Right Edge, U-NII-7,

IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 143 (6665.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor
5G, Air	Right Edge, 2.00	1.0

Har	dware	Setup
-----	-------	-------


Phantom	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1096	EUmmWV4 - SN9616_F1-55GHz, 2022-03-20	DAE4 Sn1719, 2022-03-25

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-11-22
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	3.88
psPDtot+ [W/m²]	5.98
psPDmod+ [W/m²]	7.21
E _{max} [V/m]	64.7
Power Drift [dB]	-0.04

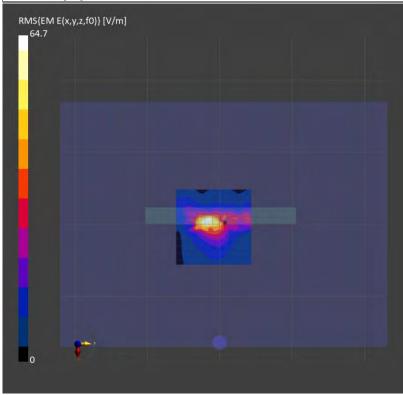

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 116 of 129

ID: 052

Report No.: TESA2211000463E5

Measurement Report for N20Q10, Right Edge, U-NII-8,

IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 207 (6985.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor
5G, Air	Right Edge, 2.00	1.0

Hardware	Setup)
----------	-------	---


Phantom	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1096	EUmmWV4 - SN9616_F1-55GHz, 2022-03-20	DAE4 Sn1719, 2022-03-25

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

mode di oni oni i recourte	
Scan Type	5G Scan
Date	2022-11-22
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	1.80
psPDtot+ [W/m²]	3.31
psPDmod+ [W/m²]	4.79
E _{max} [V/m]	53.6
Power Drift [dB]	0.11

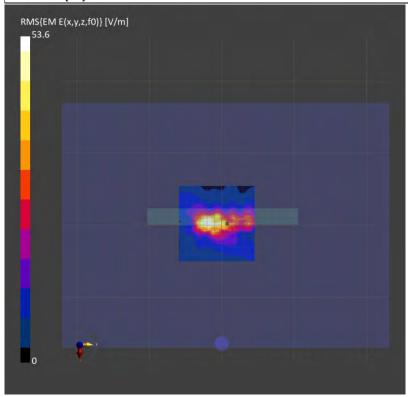

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 117 of 129

ID: 053

Report No.: TESA2211000463E5

Measurement Report for N20Q10, Left Edge, U-NII-5,

IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 15 (6025.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor
5G, Air	Left Edge, 2.00	1.0

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1096	EUmmWV4 - SN9616_F1-55GHz, 2022-03-20	DAE4 Sn1719, 2022-03-25

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-11-23
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.80
psPDtot+ [W/m²]	5.51
psPDmod+ [W/m²]	6.79
E _{max} [V/m]	63.8
Power Drift [dB]	-0.03

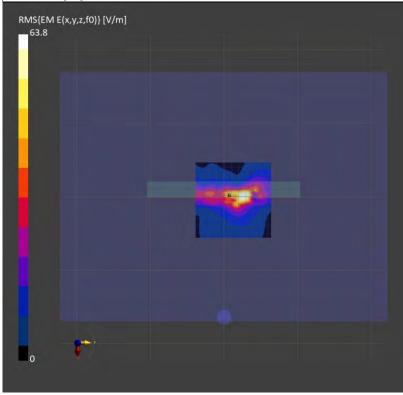

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 118 of 129

ID: 054

Report No.: TESA2211000463E5

Measurement Report for N20Q10, Left Edge, U-NII-5,

IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 79 (6345.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor
5G, Air	Left Edge, 2.00	1.0

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1096	EUmmWV4 - SN9616_F1-55GHz, 2022-03-20	DAE4 Sn1719, 2022-03-25

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-11-23
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.56
psPDtot+ [W/m²]	4.39
psPDmod+ [W/m²]	5.29
E _{max} [V/m]	57.0
Power Drift [dB]	-0.03

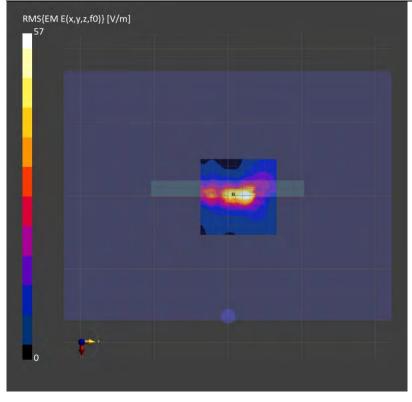

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 119 of 129

ID: 055

Report No.: TESA2211000463E5

Measurement Report for N20Q10, Left Edge, U-NII-6,

IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 111 (6505.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor
5G, Air	Left Edge, 2.00	1.0

Ha	rdw	are	Se	tu	n
ı ıa	IUV	aıc	v	LU	v


Phantom	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1096	EUmmWV4 - SN9616_F1-55GHz, 2022-03-20	DAE4 Sn1719, 2022-03-25

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-11-23
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.58
psPDtot+ [W/m²]	4.02
psPDmod+ [W/m²]	4.85
E _{max} [V/m]	59.9
Power Drift [dB]	-0.06

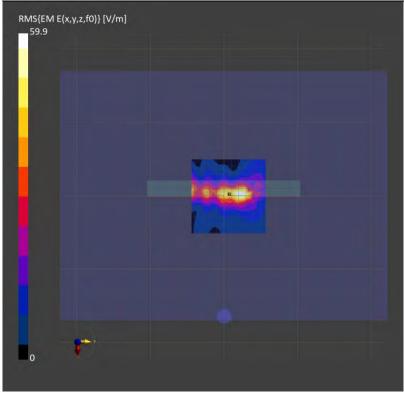

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,他都是好用魔影测验之样只有害,同时他接见魔鬼匆匆子。木都些主领大八司事而验证,太可如心海测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. | N

台灣檢驗科技股份有限公司



Page: 120 of 129

ID: 056

Report No.: TESA2211000463E5

Measurement Report for N20Q10,Left Edge, U-NII-7,

IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 175 (6825.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor
5G, Air	Left Edge, 2.00	1.0

Ha	rdw	are	Se	tu	n
ı ıa	IUV	aıc	v	LU	v


Phantom	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1096	EUmmWV4 - SN9616_F1-55GHz, 2022-03-20	DAE4 Sn1719, 2022-03-25

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-11-23
Avg. Area [cm ²]	4.00
psPDn+ [W/m²]	1.81
psPDtot+ [W/m²]	2.96
psPDmod+ [W/m²]	3.23
E_{max} [V/m]	58.3
Power Drift [dB]	-0.03

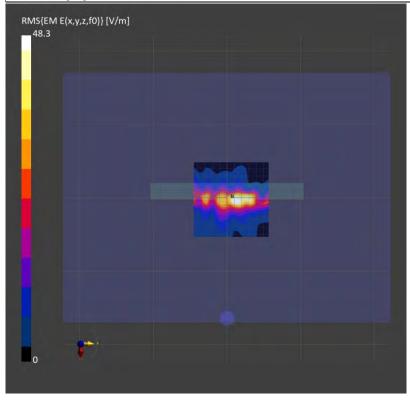

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 121 of 129

ID: 057

Report No.: TESA2211000463E5

Measurement Report for N20Q10, Left Edge, U-NII-8,

IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 207 (6985.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor
5G, Air	Left Edge, 2.00	1.0

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1096	EUmmWV4 - SN9616_F1-55GHz, 2022-03-20	DAE4 Sn1719, 2022-03-25

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-11-23
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	3.35
psPDtot+ [W/m²]	5.24
psPDmod+ [W/m²]	5.99
E _{max} [V/m]	55.8
Power Drift [dB]	-0.05

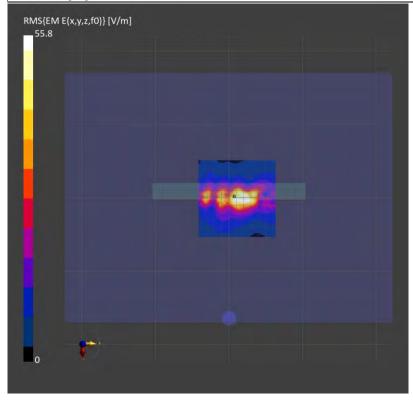

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 122 of 129

14 SAR SYSTEM CHECK RESULTS

Report No.: TESA2211000463E5

Measurement Report for Device, FRONT, D2450,

CW, Channel 2450 (2450.0 MHz), SN:727

Ambient temperature: 22.4°C; Liquid temperature: 20.3°C

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 10.00	8.16	1.863	40.525

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan	
Grid Extents [mm]	96.0 x 96.0	30.0 x 30.0 x 30.0	
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	
Sensor Surface [mm]	3.0	1.4	

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-24	2022-11-24
psSAR1g [W/kg]	12.6	12.8
psSAR8g [W/kg]	6.46	6.58
psSAR10g [W/kg]	5.83	5.96
Power Drift [dB]	-0.02	-0.01
M2/M1 [%]		59.8
Dist 3dB Peak [mm]		6.0

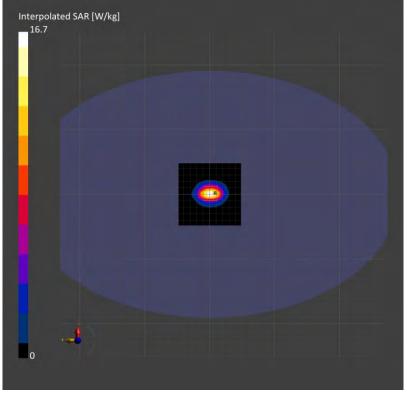

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 123 of 129

Report No.: TESA2211000463E5

Measurement Report for Device, FRONT, D5GHz,

CW, Channel 5250 (5250.0 MHz), SN:1023

Ambient temperature: 22.1°C; Liquid temperature: 20.2

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 10.00	5.94	4.904	37.254

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 160.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	60.0 x 80.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-25	2022-11-25
psSAR1g [W/kg]	5.98	8.11
psSAR8g [W/kg]	3.03	2.72
psSAR10g [W/kg]	2.80	2.33
Power Drift [dB]	-0.05	0.01
M2/M1 [%]		55.1
Dist 3dB Peak [mm]		7.2

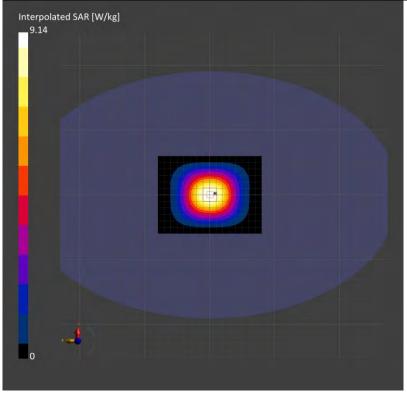

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報华结甲攝影測建立幾只有著,同時世輕早歷歷初的主。大報华主極大公司書面對可,不可可以推測。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 124 of 129

Report No.: TESA2211000463E5

Measurement Report for Device, FRONT, D5GHz,

CW, Channel 5600 (5600.0 MHz), SN:1023

Ambient temperature: 22.6°C; Liquid temperature: 20.6°C

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 10.00	5.29	5.277	36.854

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 160.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-26	2022-11-26
psSAR1g [W/kg]	7.26	7.97
psSAR8g [W/kg]	2.57	2.65
psSAR10g [W/kg]	2.22	2.28
Power Drift [dB]	0.01	-0.05
M2/M1 [%]		51.6
Dist 3dB Peak [mm]		7.4

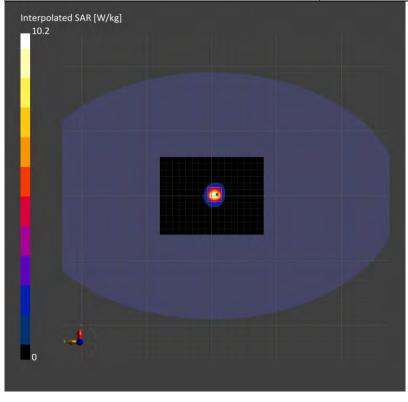

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

台灣檢驗科技股份有限公司



Page: 125 of 129

Report No.: TESA2211000463E5

Measurement Report for Device, FRONT, D5GHz,

CW, Channel 5750 (5750.0 MHz), SN:1023

Ambient temperature: 22.6°C; Liquid temperature: 20.6°C

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 10.00	5.45	5.436	36.682

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7712, 2022-03-21	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 160.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-26	2022-11-26
psSAR1g [W/kg]	7.01	8.16
psSAR8g [W/kg]	2.52	2.72
psSAR10g [W/kg]	2.18	2.34
Power Drift [dB]	0.01	-0.02
M2/M1 [%]		50.4
Dist 3dB Peak [mm]		8.1

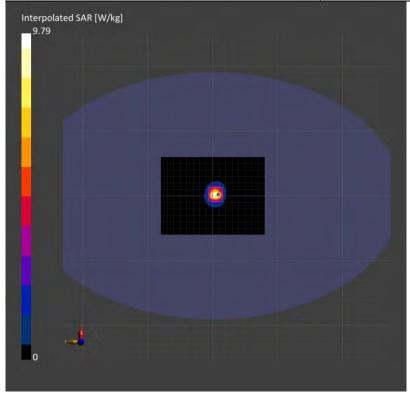

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,此想生红用魔影测验之缘具色素,同时此缘里属是2000年。太想生主领太八司事面纯可,不可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

JOJ Talwari Eta.



Page: 126 of 129

Report No.: TESA2211000463E5

Measurement Report for Device, FRONT, Validation band,

CW, Channel 6500 (6500.0 MHz), SN:1006

Ambient temperature: 22.4°C; Liquid temperature: 20.4°C

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 5.00	5.8	6.245	35.796

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 119.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	6.0 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-21	2022-11-21
psSAR1g [W/kg]	22.2	28.2
psSAR8g [W/kg]	5.81	6.47
psSAR10g [W/kg]	4.81	5.32
psPDab (4.0cm2, sq) [W/m2]		129
Power Drift [dB]	0.01	0.04
M2/M1 [%]		55.7
Dist 3dB Peak [mm]		6.8

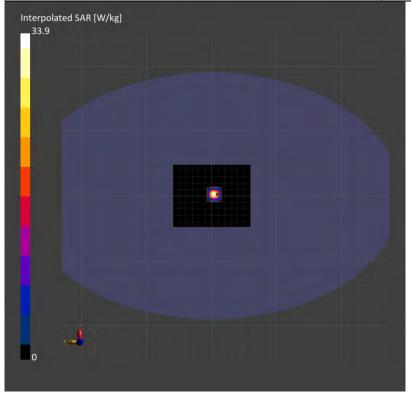

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 127 of 129

Report No.: TESA2211000463E5

Measurement Report for Device, FRONT, Validation band,

CW, Channel 7000 (7000.0 MHz), SN:1007

Ambient temperature: 22.4°C; Liquid temperature: 20.4°C

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 5.00	5.7	6.797	35.196

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1751, 2022-10-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-11-21	2022-11-21
psSAR1g [W/kg]	20.7	27.0
psSAR8g [W/kg]	5.46	5.96
psSAR10g [W/kg]	4.54	4.89
psPDab (4.0cm2, sq) [W/m2]		119
Power Drift [dB]	0.04	0.04
M2/M1 [%]		51.5
Dist 3dB Peak [mm]		7.6

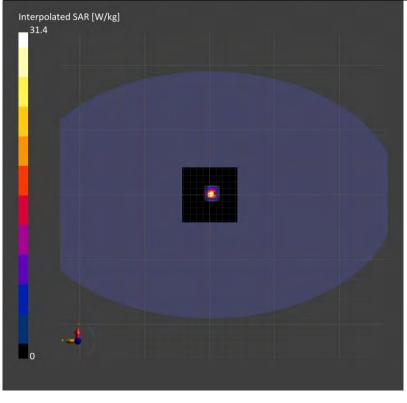

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 128 of 129

15 PD SYSTEM CHECK RESULTS

Report No.: TESA2211000463E5

Measurement Report for Device, FRONT, Validation band,

CW, Channel 10000 (10000.0 MHz), SN:1021

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor
5G, Air	FRONT, 10.00	1.0

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1096	EUmmWV4 - SN9616_F1-55GHz, 2022-03-20	DAE4 Sn1751, 2022-10-10

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0

Measurement Results

Measurement results	
Scan Type	5G Scan
Date	2022-11-21
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	47.7
psPDtot+ [W/m²]	47.9
psPDmod+ [W/m²]	48.2
E _{max} [V/m]	144
Power Drift [dB]	0.04

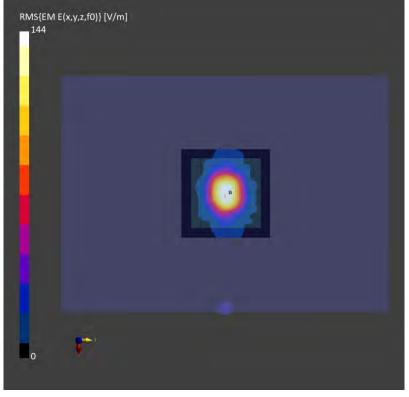

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 129 of 129

Refer to separated files for the following appendixes.

- 16.1 SAR_Appendix A Photographs
- 16.2 SAR Appendix B DAE & Probe Cal. Certificate
- 16.3 SAR_Appendix C Phantom Description & Dipole Cal. Certificate

- End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報华结甲攝影測建立幾只有著,同時世輕早歷歷初的主。大報华主極大公司書面對可,不可可以推測。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.