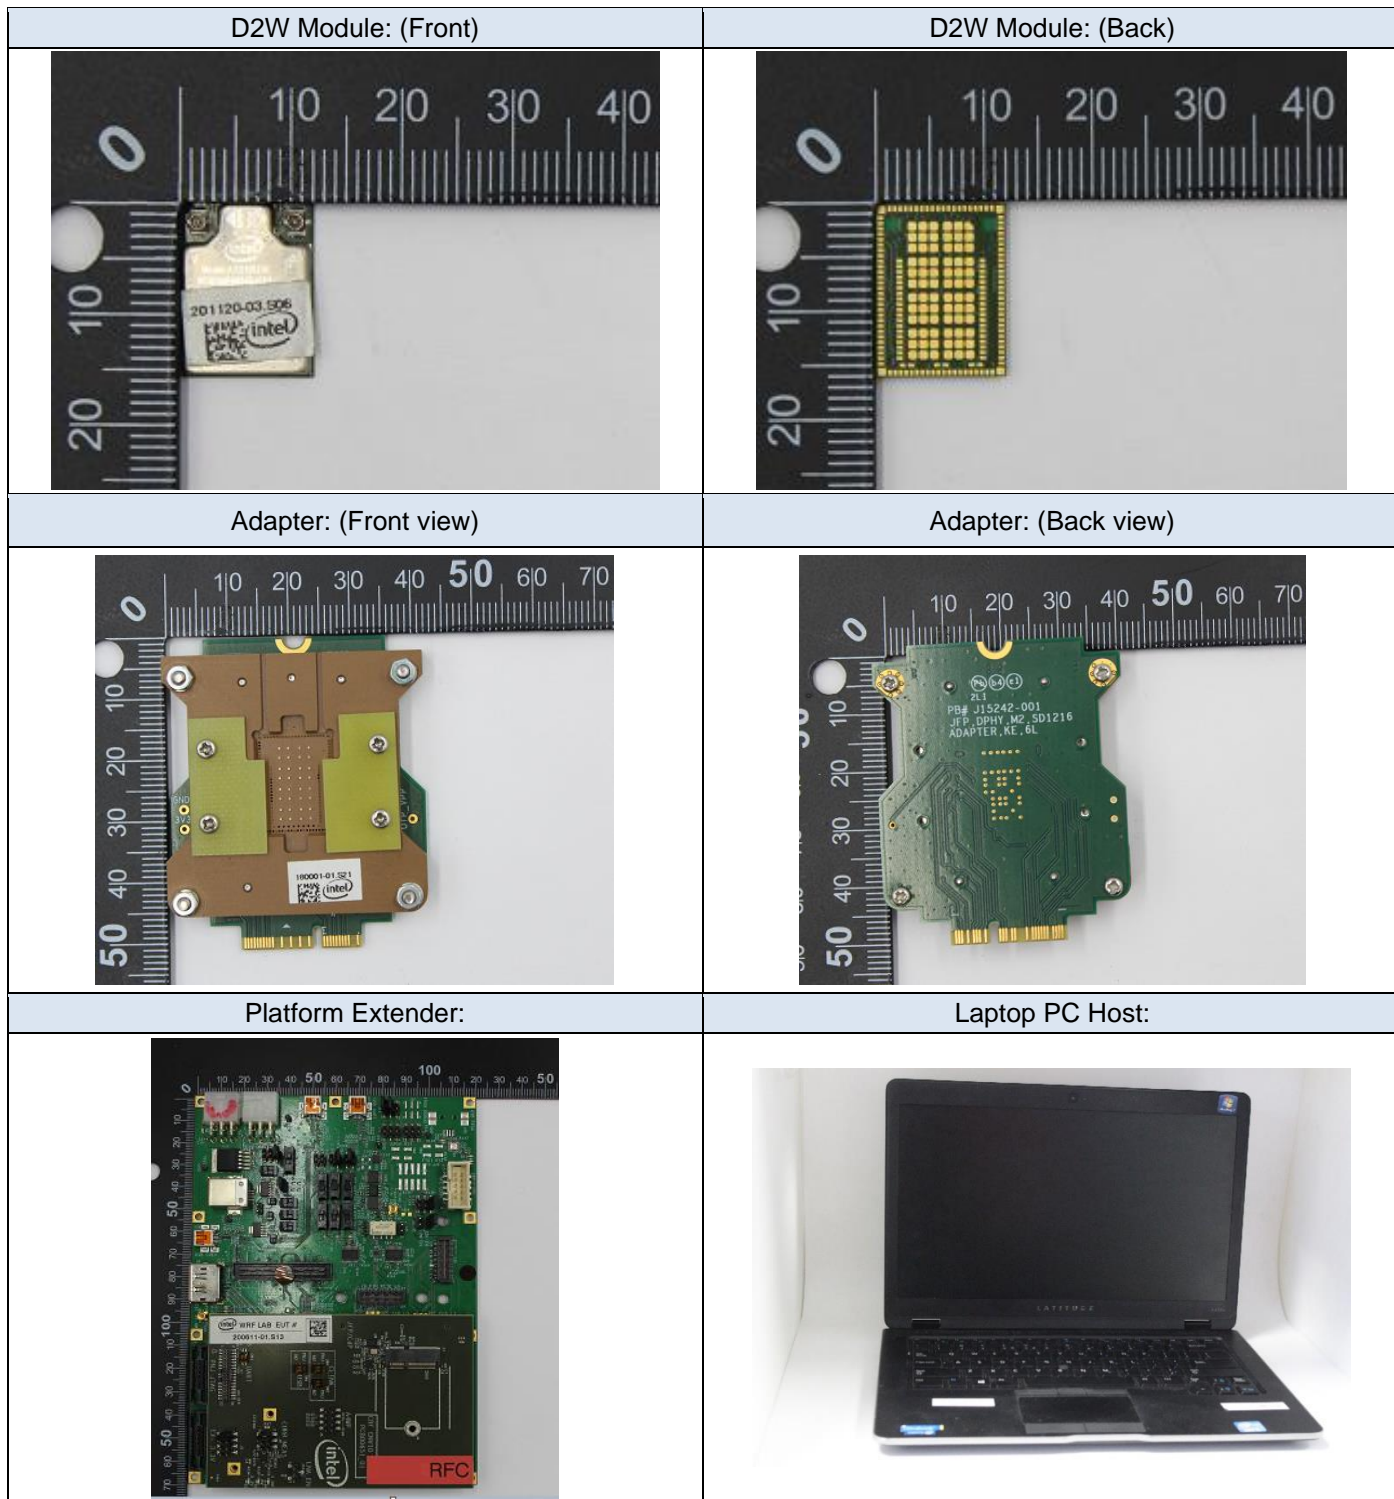
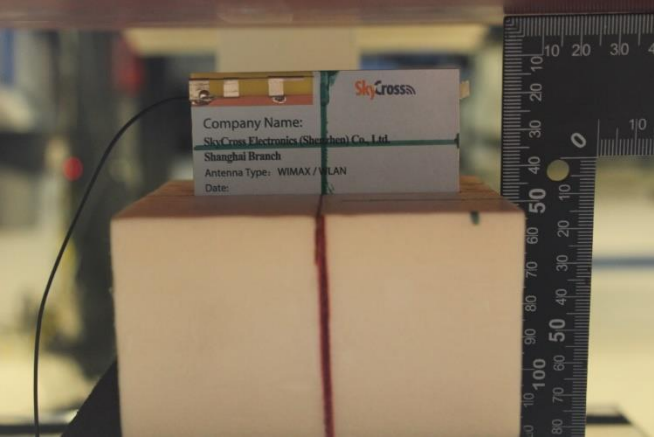

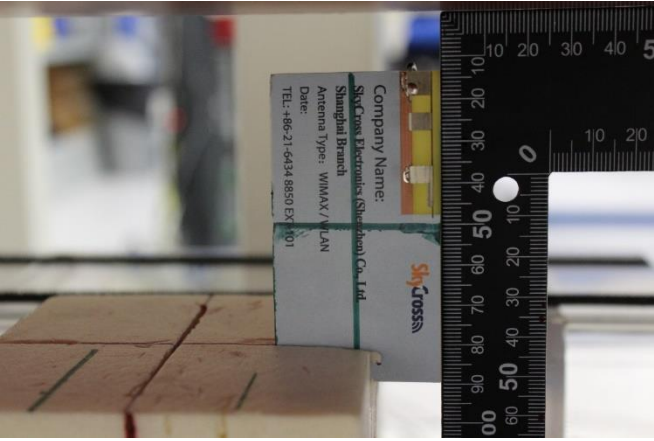
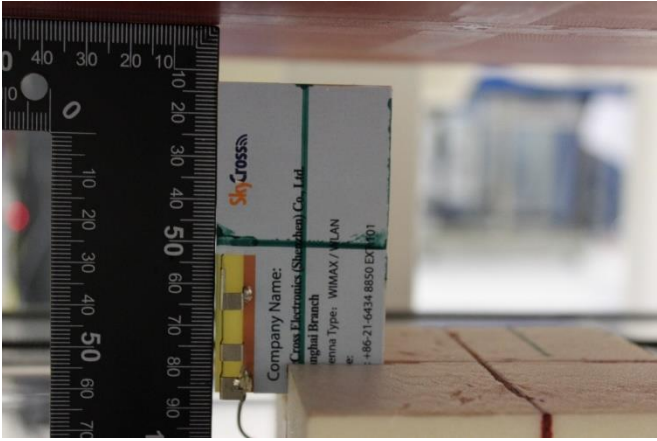
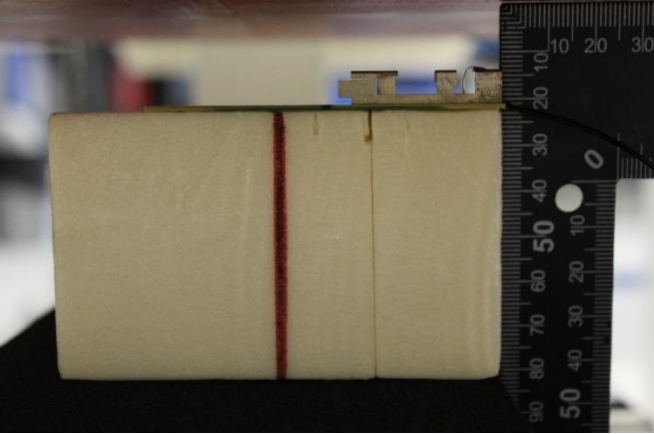
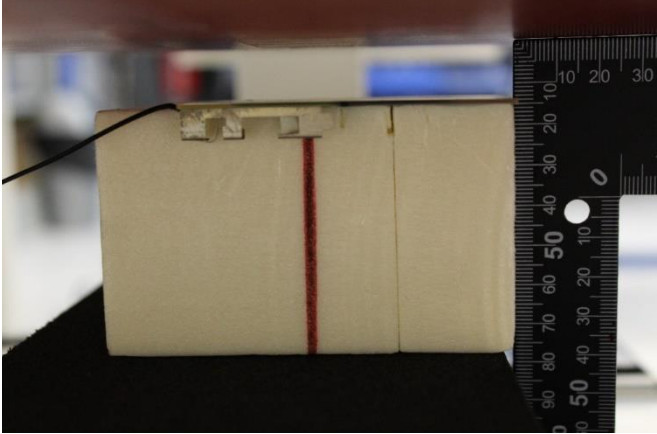


Annex F. Photographs


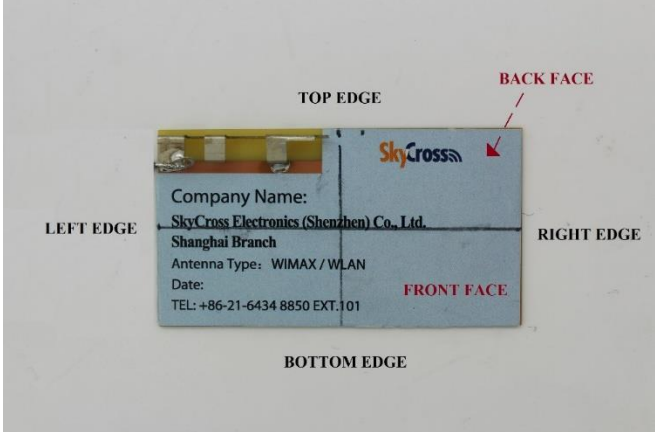
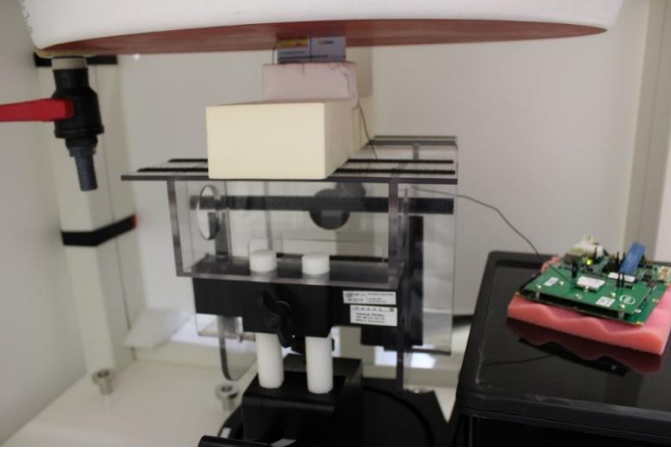
F.1 Test Sample



F.2 Test positions

Top Edge (14mm)	Bottom Edge (14mm)
	
Left Edge (14mm)	Right Edge (14mm)
	
Front Face(14mm)	Back Face(14mm)
	

F.3 Antenna host platform location and adjacent edge positions relative to the body

Antenna Front View	Antenna Positions
 <p>A photograph showing the front view of the antenna host platform. A black ruler is placed above the device for scale, with markings in centimeters. The device is a light blue rectangular board with a yellow antenna connector at the top. A white label is affixed to the board with the following text: "Company Name: SkyCross Electronics (Shenzhen) Co., Ltd. Shanghai Branch", "Antenna Type: WIMAX / WLAN", "Date:", and "TEL: +86-21-6434 8850 EXT.101". The SkyCross logo is visible on the board.</p>	 <p>A photograph of the antenna host platform with red arrows and text labels indicating its edges and faces. The labels are: "TOP EDGE" at the top, "BOTTOM EDGE" at the bottom, "LEFT EDGE" on the left, and "RIGHT EDGE" on the right. A red arrow points to the top surface, labeled "BACK FACE", and another red arrow points to the bottom surface, labeled "FRONT FACE". The same white label from the front view is visible on the board.</p>
General Setup	
 <p>A photograph of the general test setup. It shows a laboratory environment with a black metal frame holding various components. A green printed circuit board (PCB) is mounted on a red surface on the right. A white box is visible in the background, and a red cable is connected to the setup.</p>	

F.4 Phantom liquid level during measurements

ELI phantom Body liquid SAR Dasy SPEAG MBBL600-6000V6 Batch -191014-02



End of the report

This page is intentionally left blank and marks the last page of the test report.