

#01 GSM850_Right Cheek_Ch189

DUT: 972007-01

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_850_090925 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.921$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$

kg/m³

Ambient Temperature : 22.5 ; Liquid Temperature : 21.2

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.26, 6.26, 6.26); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2009/6/23
- Phantom: SAM - Front; Type: SAM; Serial: TP-1446
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch189/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.762 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.89 V/m; Power Drift = -0.162 dB

Peak SAR (extrapolated) = 0.856 W/kg

SAR(1 g) = 0.695 mW/g; SAR(10 g) = 0.521 mW/g

Maximum value of SAR (measured) = 0.724 mW/g

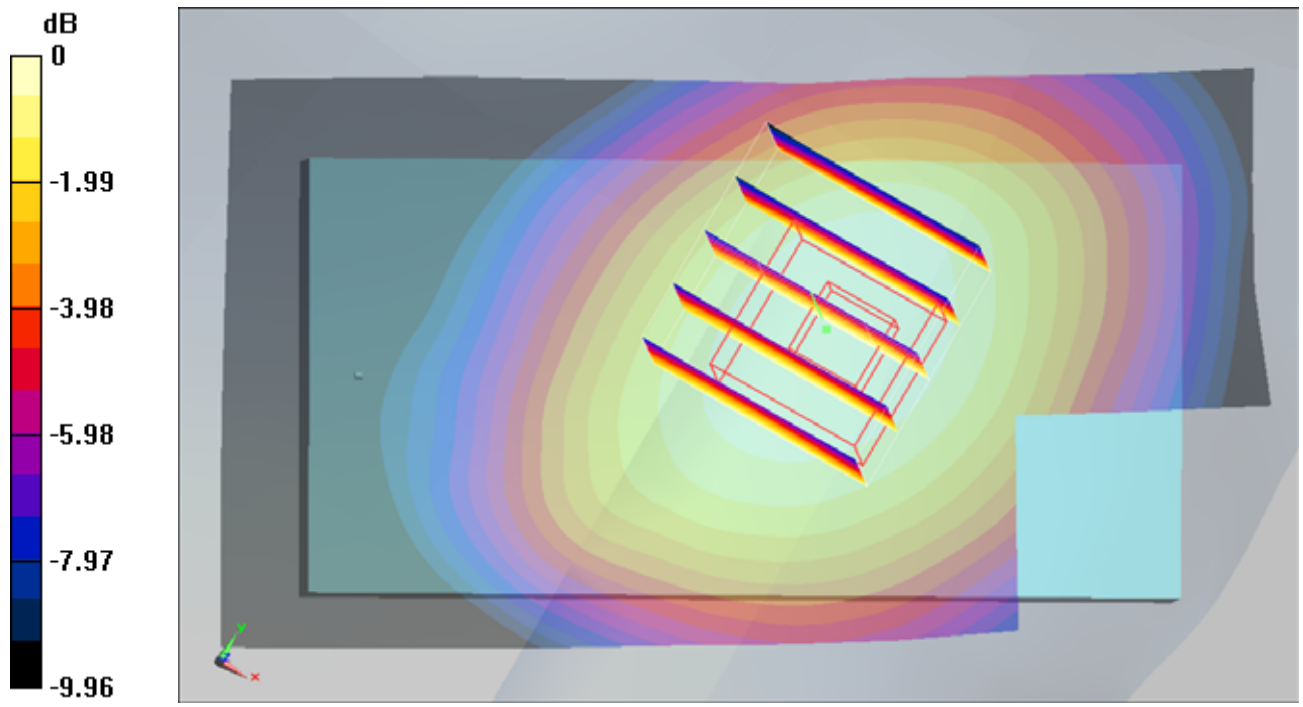

0 dB = 0.724mW/g

#02 GSM850_Right Tilted_Ch189

DUT: 972007-01

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_850_090925 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.921$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$

kg/m³

Ambient Temperature : 22.5 ; Liquid Temperature : 21.2

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.26, 6.26, 6.26); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2009/6/23
- Phantom: SAM - Front; Type: SAM; Serial: TP-1446
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch189/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.487 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.7 V/m; Power Drift = -0.045 dB

Peak SAR (extrapolated) = 0.566 W/kg

SAR(1 g) = 0.461 mW/g; SAR(10 g) = 0.346 mW/g

Maximum value of SAR (measured) = 0.486 mW/g

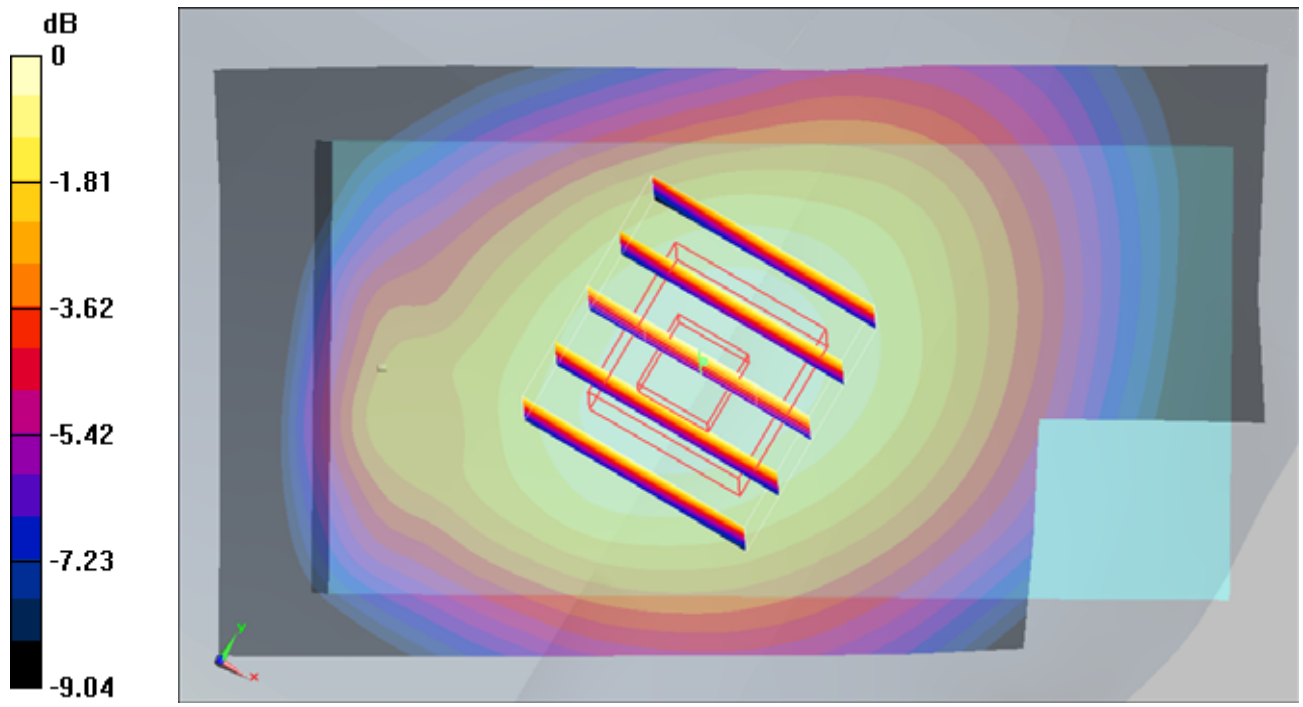

0 dB = 0.486mW/g

#03 GSM850_Left Cheek_Ch189

DUT: 972007-01

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_850_090925 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.921$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$

kg/m³

Ambient Temperature : 22.5 ; Liquid Temperature : 21.2

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.26, 6.26, 6.26); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2009/6/23
- Phantom: SAM - Front; Type: SAM; Serial: TP-1446
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch189/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.809 mW/g



Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.84 V/m; Power Drift = -0.117 dB

Peak SAR (extrapolated) = 0.946 W/kg

SAR(1 g) = 0.737 mW/g; SAR(10 g) = 0.536 mW/g

Maximum value of SAR (measured) = 0.765 mW/g

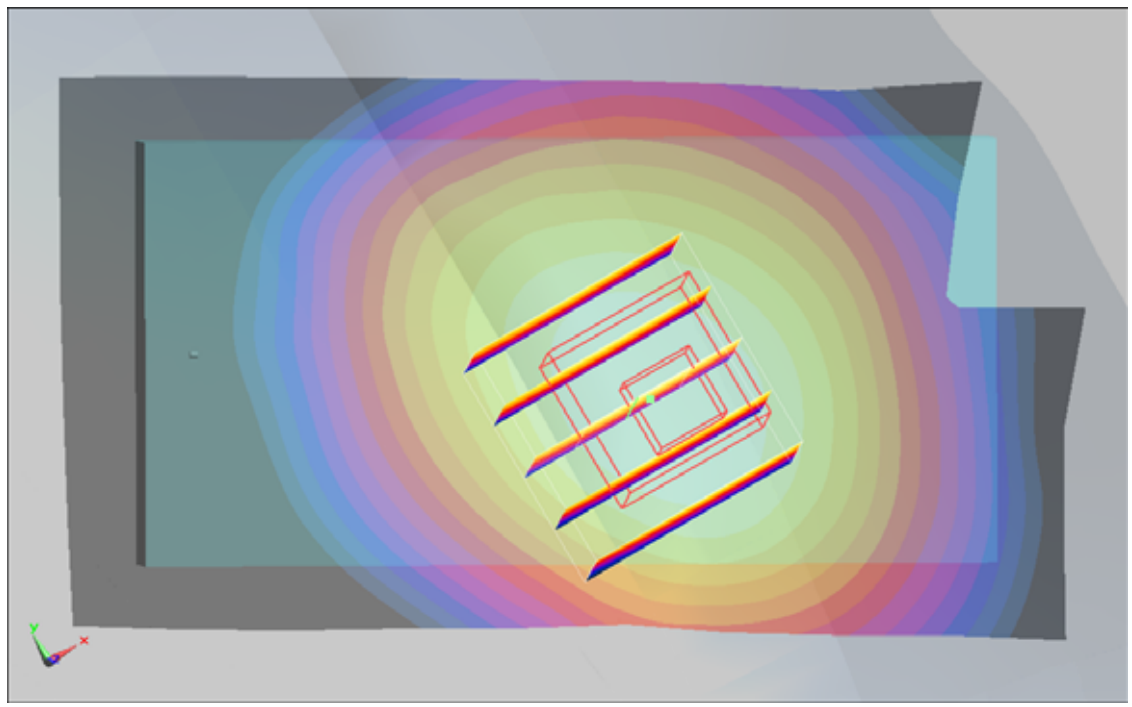

0 dB = 0.765mW/g

#03 GSM850_Left Cheek_Ch189_2D

DUT: 972007-01

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_850_090925 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.921$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.26, 6.26, 6.26); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2009/6/23
- Phantom: SAM - Front; Type: SAM; Serial: TP-1446
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch189/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.809 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.84 V/m; Power Drift = -0.117 dB

Peak SAR (extrapolated) = 0.946 W/kg

SAR(1 g) = 0.737 mW/g; SAR(10 g) = 0.536 mW/g

Maximum value of SAR (measured) = 0.765 mW/g

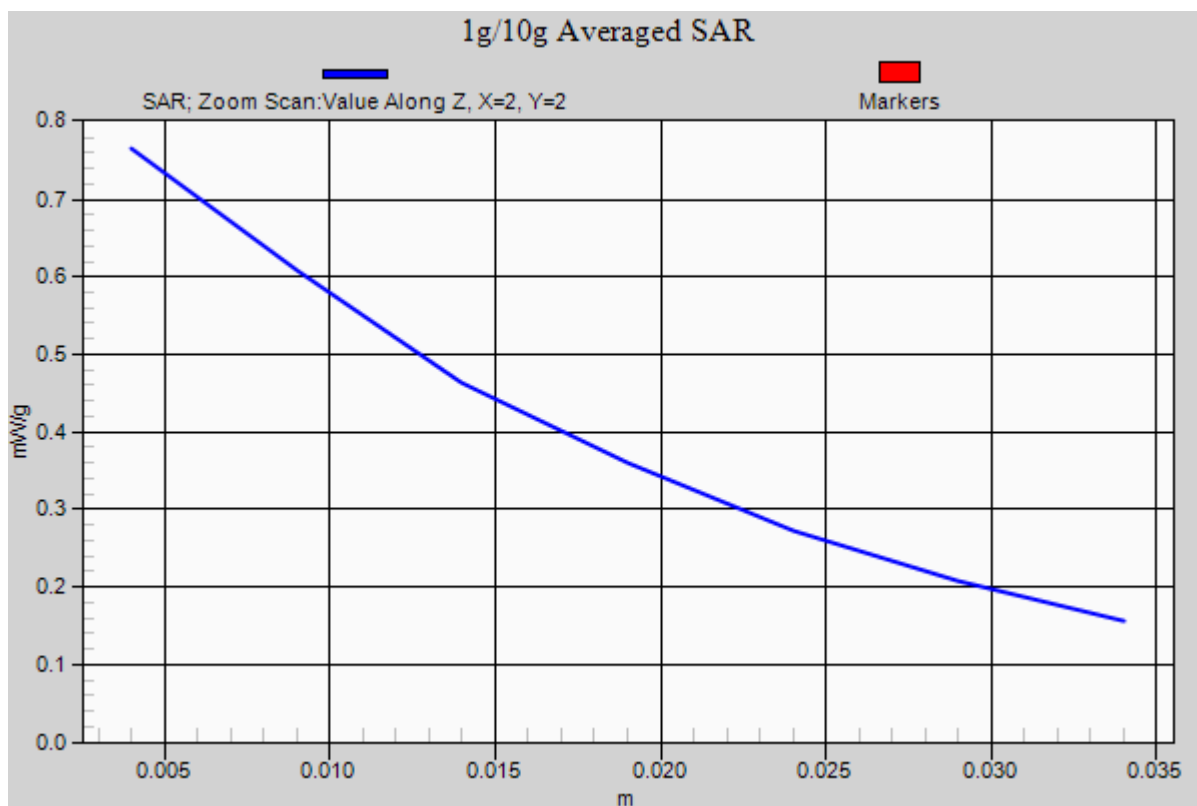

#04 GSM850_Left Tilted_Ch189

DUT: 972007-01

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_850_090925 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.921$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$

kg/m³

Ambient Temperature : 22.5 ; Liquid Temperature : 21.2

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.26, 6.26, 6.26); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2009/6/23
- Phantom: SAM - Front; Type: SAM; Serial: TP-1446
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch189/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.454 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.9 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 0.535 W/kg

SAR(1 g) = 0.433 mW/g; SAR(10 g) = 0.323 mW/g

Maximum value of SAR (measured) = 0.457 mW/g

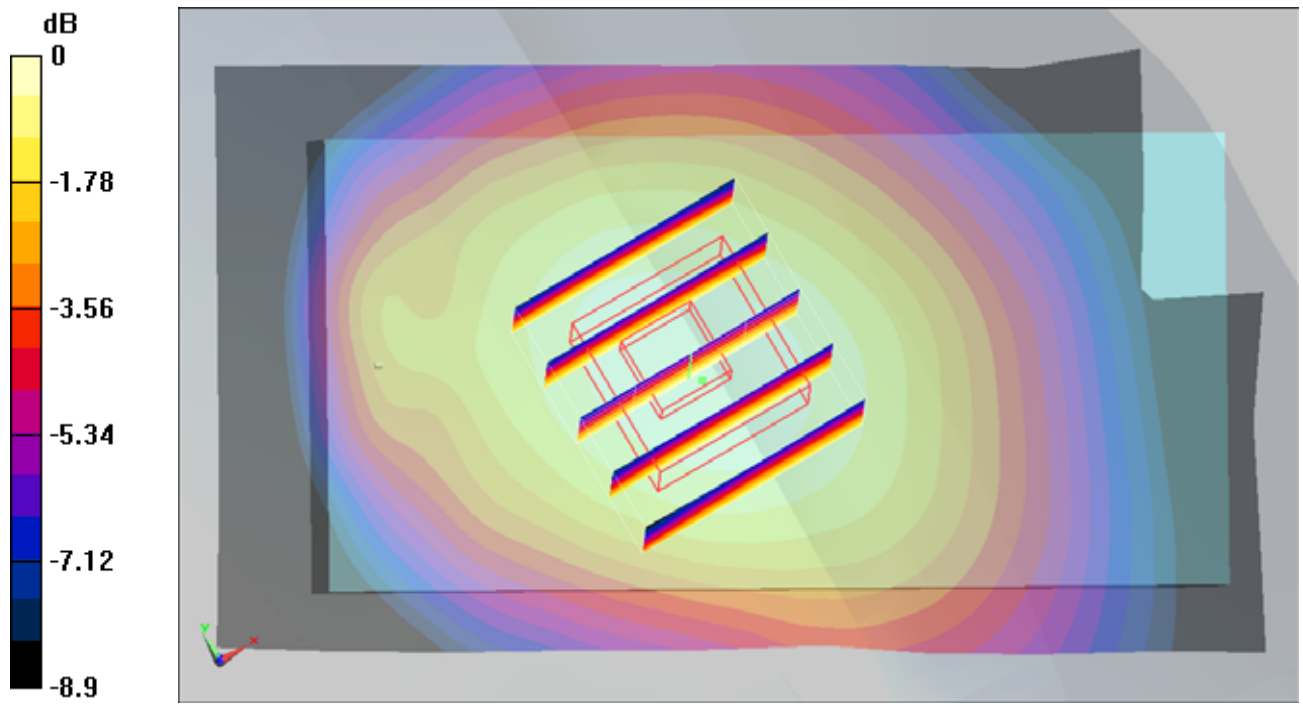

0 dB = 0.457mW/g

#11 GSM1900 Right Cheek_Ch512

DUT: 972007-01

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_090929 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 38.9$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.9 ; Liquid Temperature : 21.4

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.63, 4.63, 4.63); Calibrated: 2009/6/22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.394 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.20 V/m; Power Drift = 0.136 dB

Peak SAR (extrapolated) = 0.551 W/kg

SAR(1 g) = 0.348 mW/g; SAR(10 g) = 0.201 mW/g

Maximum value of SAR (measured) = 0.377 mW/g

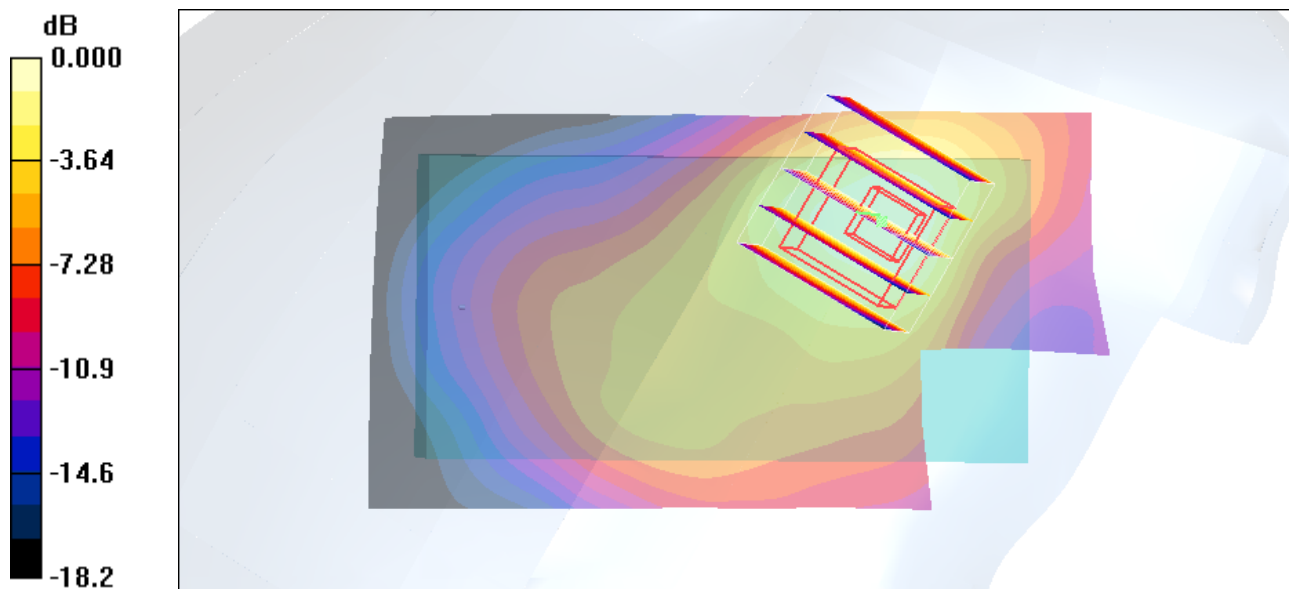

0 dB = 0.377mW/g

#11 GSM1900 Right Cheek_Ch512_2D

DUT: 972007-01

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_090929 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.9$;

$\rho = 1000$ kg/m³

Ambient Temperature : 22.9 ; Liquid Temperature : 21.4

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.63, 4.63, 4.63); Calibrated: 2009/6/22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.394 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.20 V/m; Power Drift = 0.136 dB

Peak SAR (extrapolated) = 0.551 W/kg

SAR(1 g) = 0.348 mW/g; SAR(10 g) = 0.201 mW/g

Maximum value of SAR (measured) = 0.377 mW/g

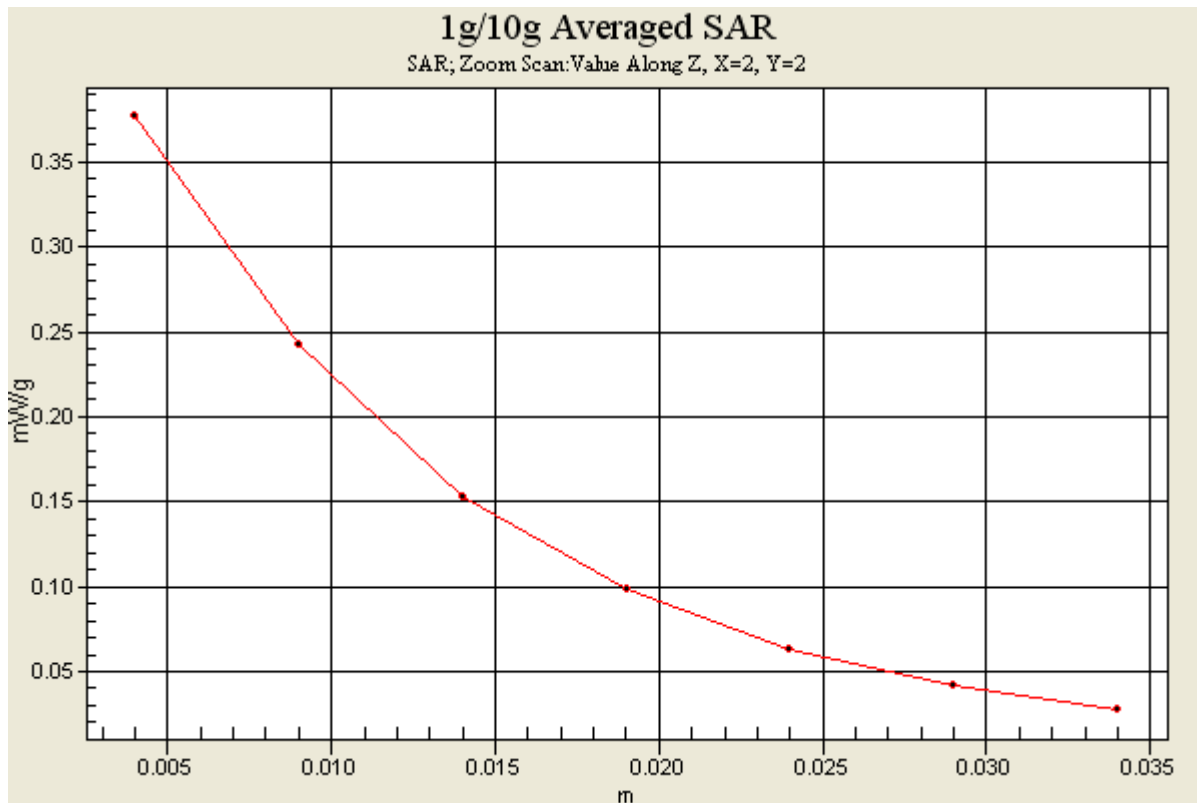

#08 GSM1900 Right Tilted_Ch661

DUT: 972007-01

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_090929 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.9 ; Liquid Temperature : 21.4

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.63, 4.63, 4.63); Calibrated: 2009/6/22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch661/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.100 mW/g


Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.29 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 0.128 W/kg

SAR(1 g) = 0.086 mW/g; SAR(10 g) = 0.054 mW/g

Maximum value of SAR (measured) = 0.094 mW/g

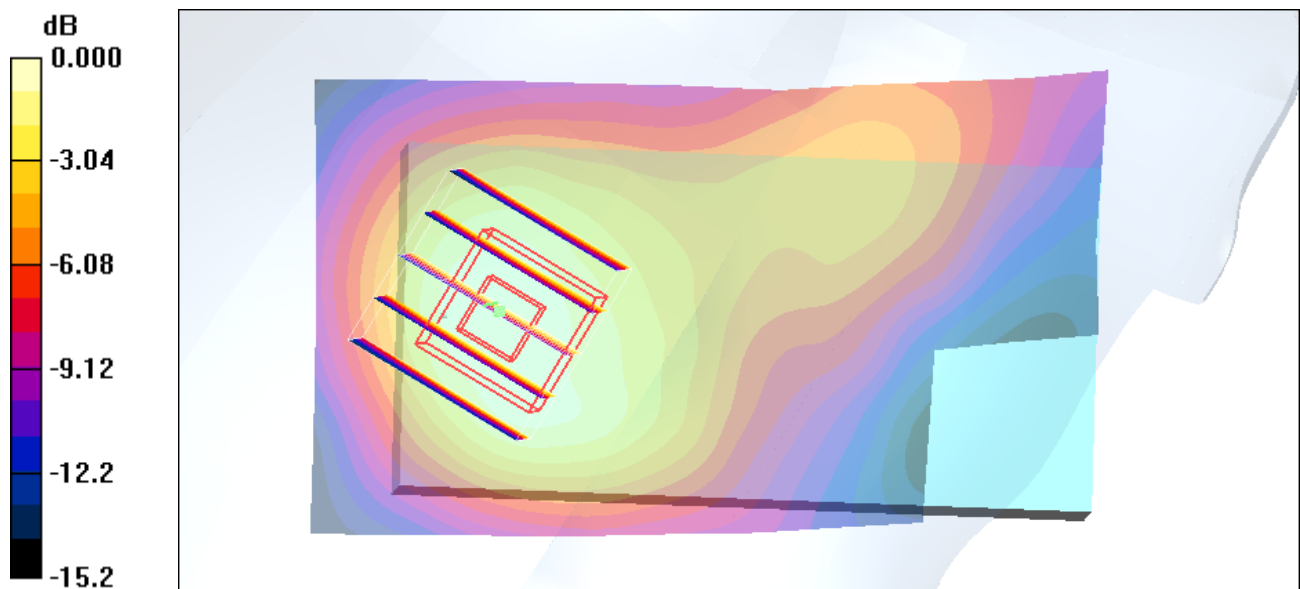

0 dB = 0.094mW/g

#09 GSM1900 Left Cheek_Ch661

DUT: 972007-01

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_090929 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 ; Liquid Temperature : 21.4

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.63, 4.63, 4.63); Calibrated: 2009/6/22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch661/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.137 mW/g


Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.27 V/m; Power Drift = -0.144 dB

Peak SAR (extrapolated) = 0.192 W/kg

SAR(1 g) = 0.125 mW/g; SAR(10 g) = 0.076 mW/g

Maximum value of SAR (measured) = 0.135 mW/g

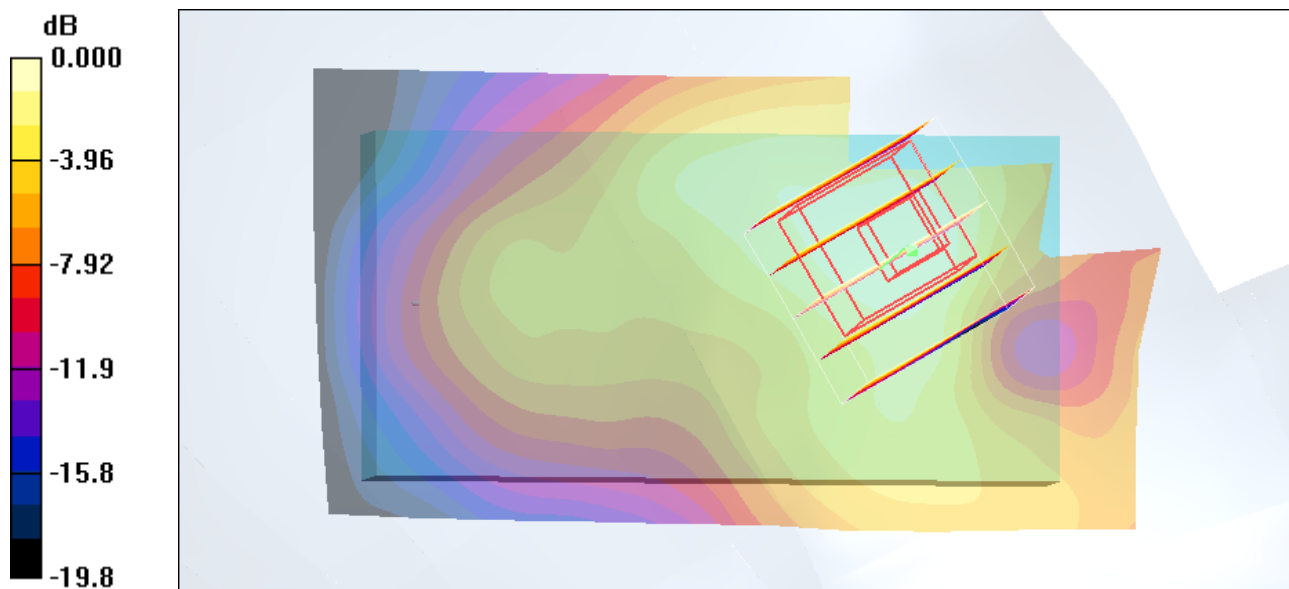

0 dB = 0.135mW/g

#10 GSM1900 Left Tilted_Ch661

DUT: 972007-01

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_090929 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³


Ambient Temperature : 22.7 ; Liquid Temperature : 21.4

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.63, 4.63, 4.63); Calibrated: 2009/6/22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch661/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.108 mW/g

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.45 V/m; Power Drift = 0.057 dB
Peak SAR (extrapolated) = 0.147 W/kg
SAR(1 g) = 0.094 mW/g; SAR(10 g) = 0.056 mW/g
Maximum value of SAR (measured) = 0.103 mW/g

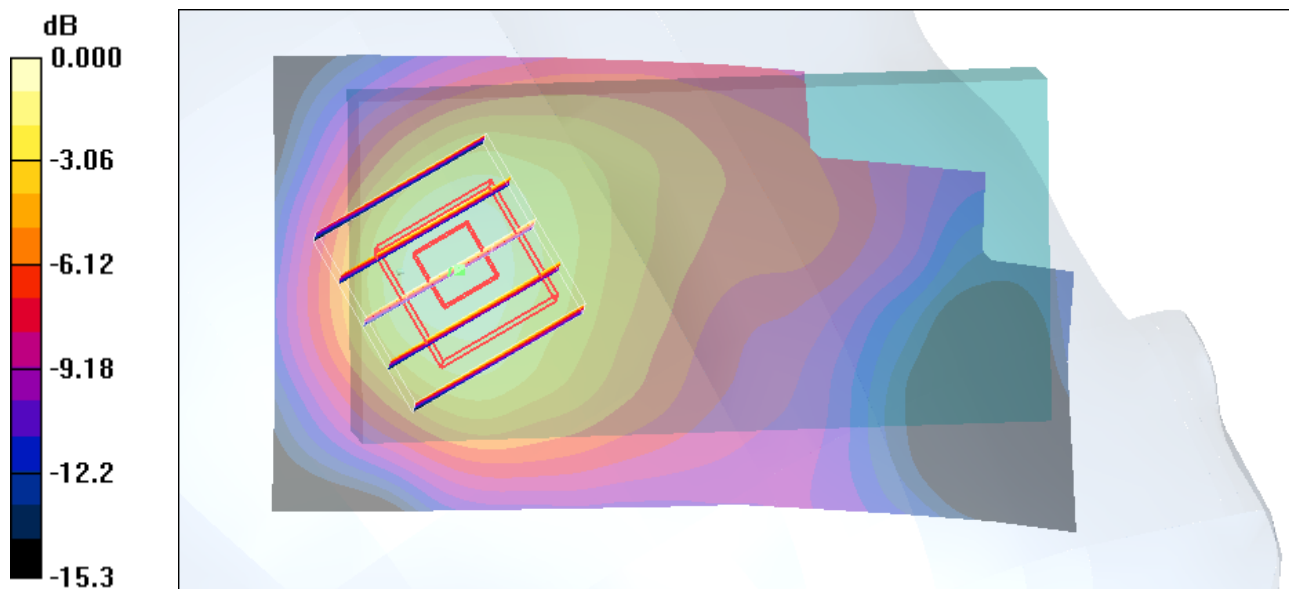

0 dB = 0.103mW/g

#27 GSM850_GPRS12_Face_2.5cm_Ch251

DUT: 982009-02

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2

Medium: MSL_850_090930 Medium parameters used: $f = 849$ MHz; $\sigma = 0.992$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 ; Liquid Temperature : 21.3

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(5.59, 5.59, 5.59); Calibrated: 2009/6/22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch251/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.992 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.4 V/m; Power Drift = -0.193 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.933 mW/g; SAR(10 g) = 0.690 mW/g

Maximum value of SAR (measured) = 0.983 mW/g

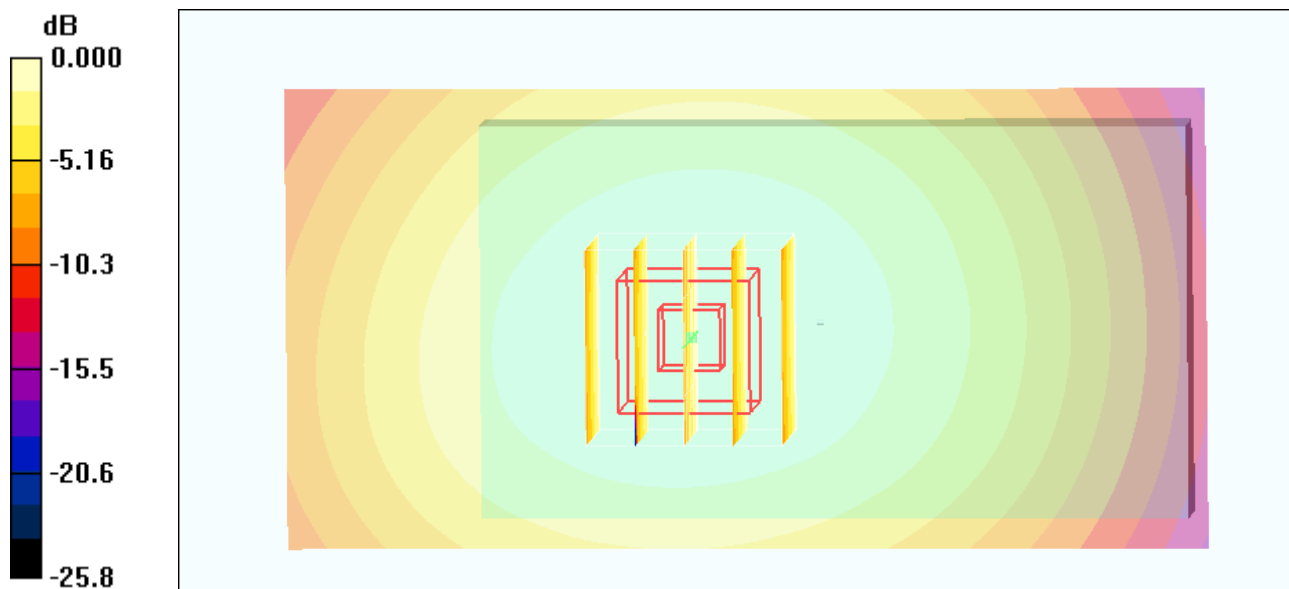

#23 GSM850_GPRS12_Bottom_2.5cm_Ch189

DUT: 982009-02

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:2

Medium: MSL_850_090930 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.979$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.7 ; Liquid Temperature : 21.3

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(5.59, 5.59, 5.59); Calibrated: 2009/6/22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.37 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.9 V/m; Power Drift = -0.123 dB

Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.935 mW/g

Maximum value of SAR (measured) = 1.33 mW/g

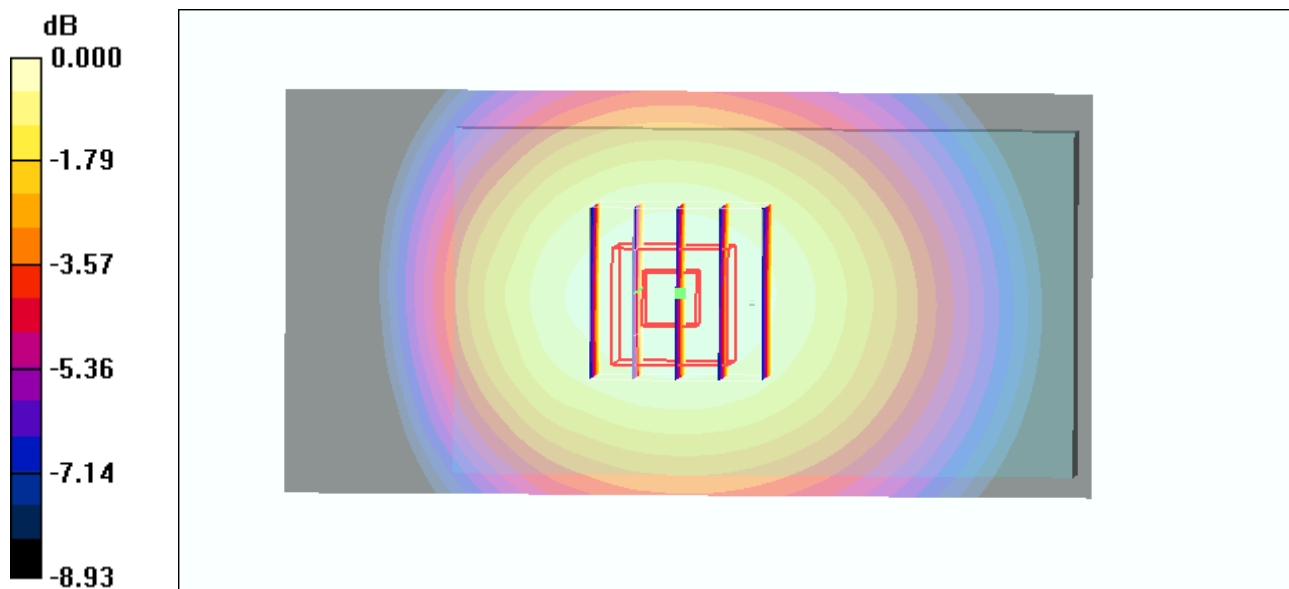

0 dB = 1.33mW/g

#23 GSM850_GPRS12_Bottom_2.5cm_Ch189_2D

DUT: 982009-02

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:2

Medium: MSL_850_090930 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.979$ mho/m; $\epsilon_r = 53.4$;

$\rho = 1000$ kg/m³

Ambient Temperature : 22.7 ; Liquid Temperature : 21.3

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(5.59, 5.59, 5.59); Calibrated: 2009/6/22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.37 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.9 V/m; Power Drift = -0.123 dB

Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.935 mW/g

Maximum value of SAR (measured) = 1.33 mW/g

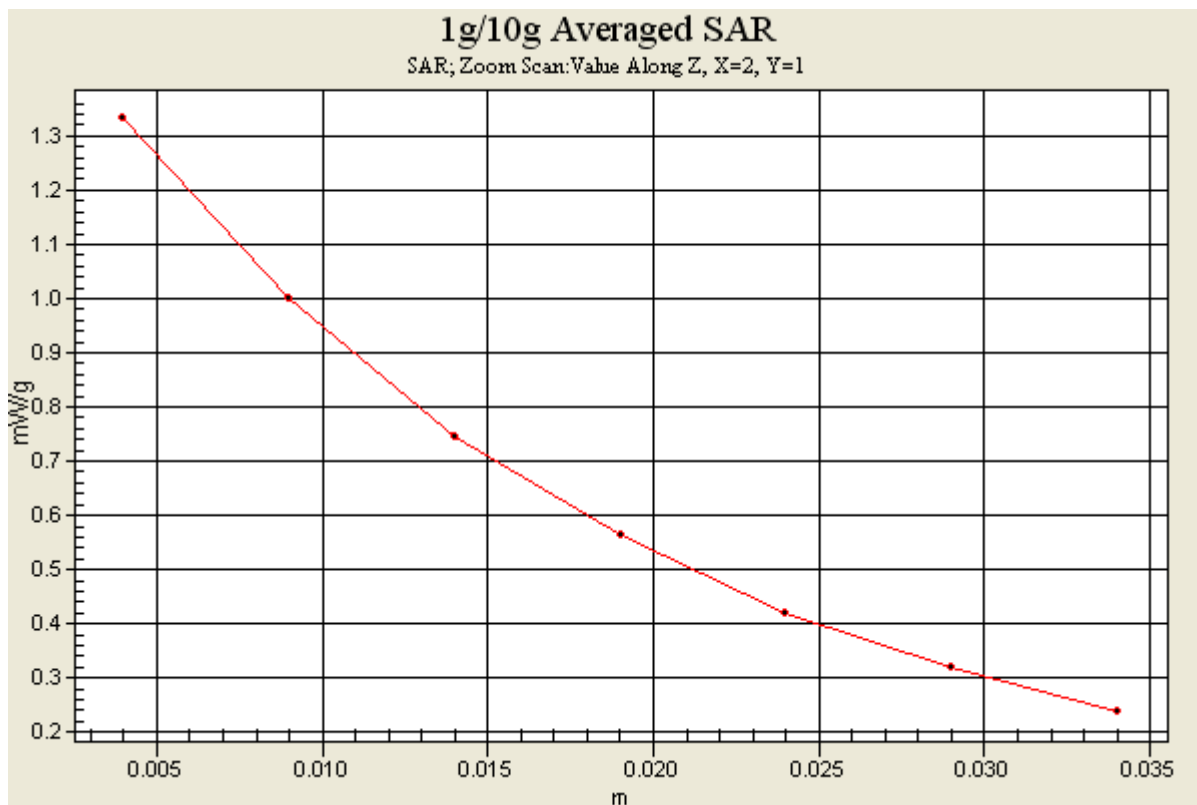

#14 GSM1900_GPRS12_Face_2.5cm_Ch661

DUT: 982009-02

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium: MSL_1900_090929 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.4$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.6 ; Liquid Temperature : 21.5

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.26, 4.26, 4.26); Calibrated: 2009/6/22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn577; Calibrated: 2009/8/24

- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch661/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.124 mW/g

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.70 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.163 W/kg

SAR(1 g) = 0.116 mW/g; SAR(10 g) = 0.076 mW/g

Maximum value of SAR (measured) = 0.124 mW/g


Ch661/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.70 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.102 mW/g; SAR(10 g) = 0.064 mW/g

Maximum value of SAR (measured) = 0.107 mW/g

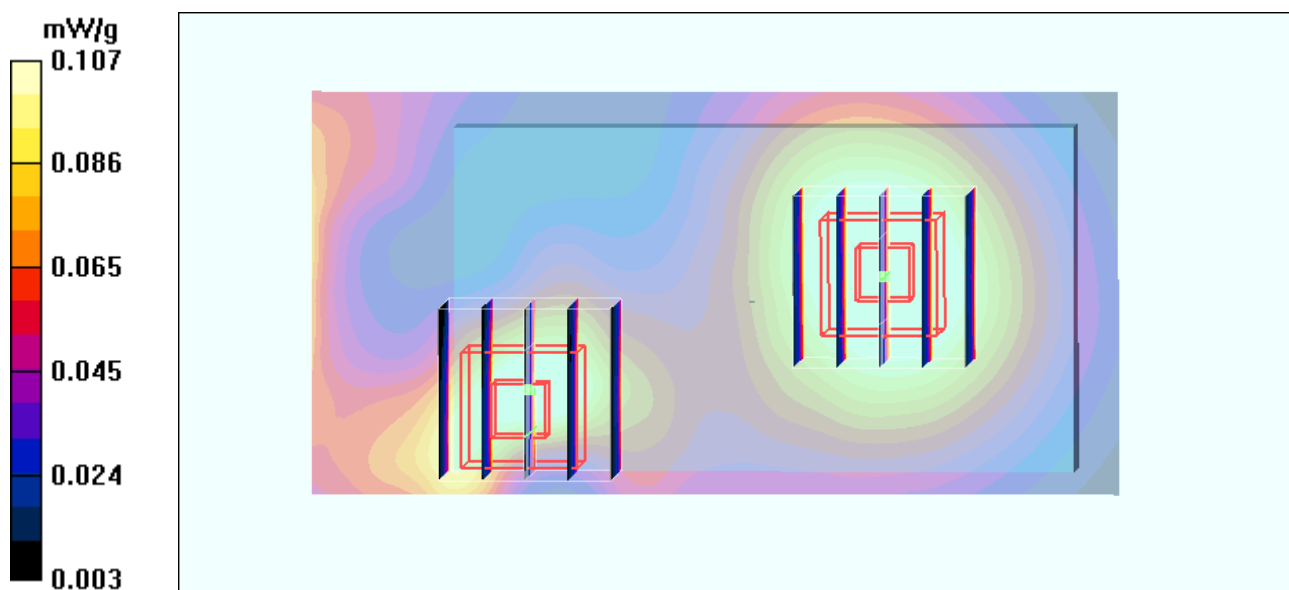

#15 GSM1900_GPRS12_Bottom_2.5cm_Ch512

DUT: 982009-02

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:2

Medium: MSL_1900_090929 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.5$;

$\rho = 1000$ kg/m³

Ambient Temperature : 22.6 ; Liquid Temperature : 21.5

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.26, 4.26, 4.26); Calibrated: 2009/6/22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.851 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.76 V/m; Power Drift = -0.057 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.790 mW/g; SAR(10 g) = 0.484 mW/g

Maximum value of SAR (measured) = 0.852 mW/g

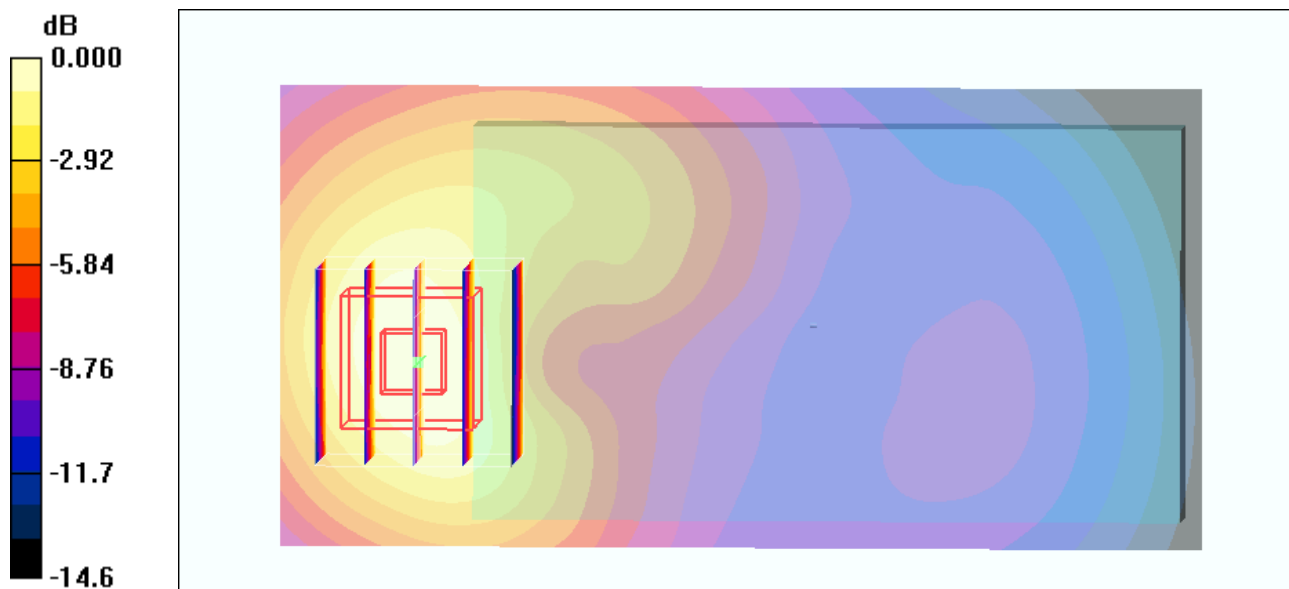

#15 GSM1900_GPRS12_Bottom_2.5cm_Ch512_2D

DUT: 982009-02

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:2

Medium: MSL_1900_090929 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r =$

52.5 ; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 ; Liquid Temperature : 21.5

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.26, 4.26, 4.26); Calibrated: 2009/6/22

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn577; Calibrated: 2009/8/24

- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.851 mW/g

Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.76 V/m; Power Drift = -0.057 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.790 mW/g; SAR(10 g) = 0.484 mW/g

Maximum value of SAR (measured) = 0.852 mW/g

