

Test Laboratory: Compliance Certification Services Inc.

HAC_ER_Device_850**DUT: K5; Type: Smart Handheld; Serial: 354291040001353**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1);
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device Low CH/Hearing**Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 92.4 V/m

Probe Modulation Factor = 1.20

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 105.6 V/m; Power Drift = -0.008 dB

Hearing Aid Near-Field Category: M4 (AWF -5 dB)



Peak E-field in V/m

Grid 1	Grid 2	Grid 3
77.1 M4	88.2 M4	87.6 M4
Grid 4	Grid 5	Grid 6
82.5 M4	92.4 M4	91.6 M4
Grid 7	Grid 8	Grid 9
87.3 M4	92.7 M4	91.3 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43

M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:
 Total = 92.7 V/m
 E Category: M4
 Location: -4, 14.5, 8.7 mm

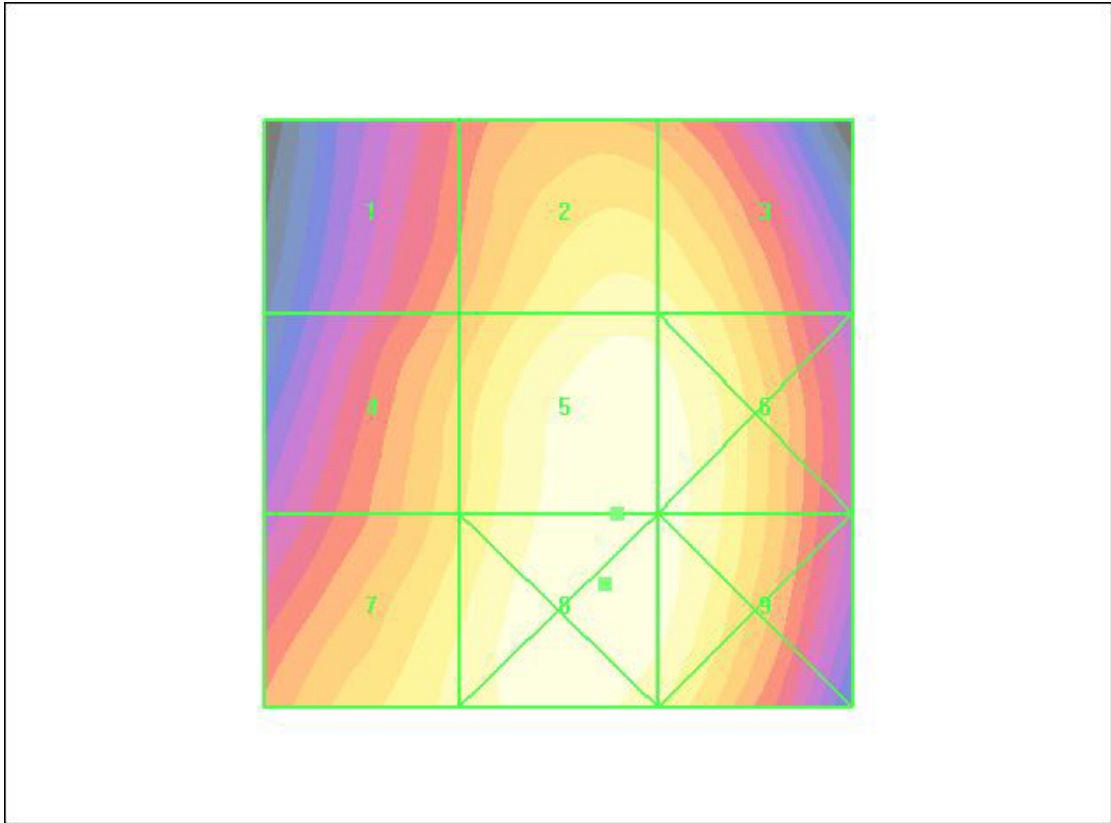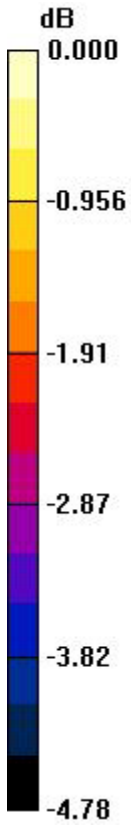

0 dB = 92.7V/m

Test Laboratory: Compliance Certification Services Inc.

HAC_ER_Device_850**DUT: K5; Type: Smart Handheld; Serial: 354291040001353**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1);
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device Middle CH/Hearing**Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 100.8 V/m

Probe Modulation Factor = 1.20

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 115.2 V/m; Power Drift = 0.040 dB

Hearing Aid Near-Field Category: M4 (AWF -5 dB)


Peak E-field in V/m

Grid 1	Grid 2	Grid 3
83.6 M4	95.9 M4	95.2 M4
Grid 4	Grid 5	Grid 6
89.9 M4	100.8 M4	100.0 M4
Grid 7	Grid 8	Grid 9
94.9 M4	101.1 M4	100.0 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43

M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:
 Total = 101.1 V/m
 E Category: M4
 Location: -4, 14.5, 8.7 mm

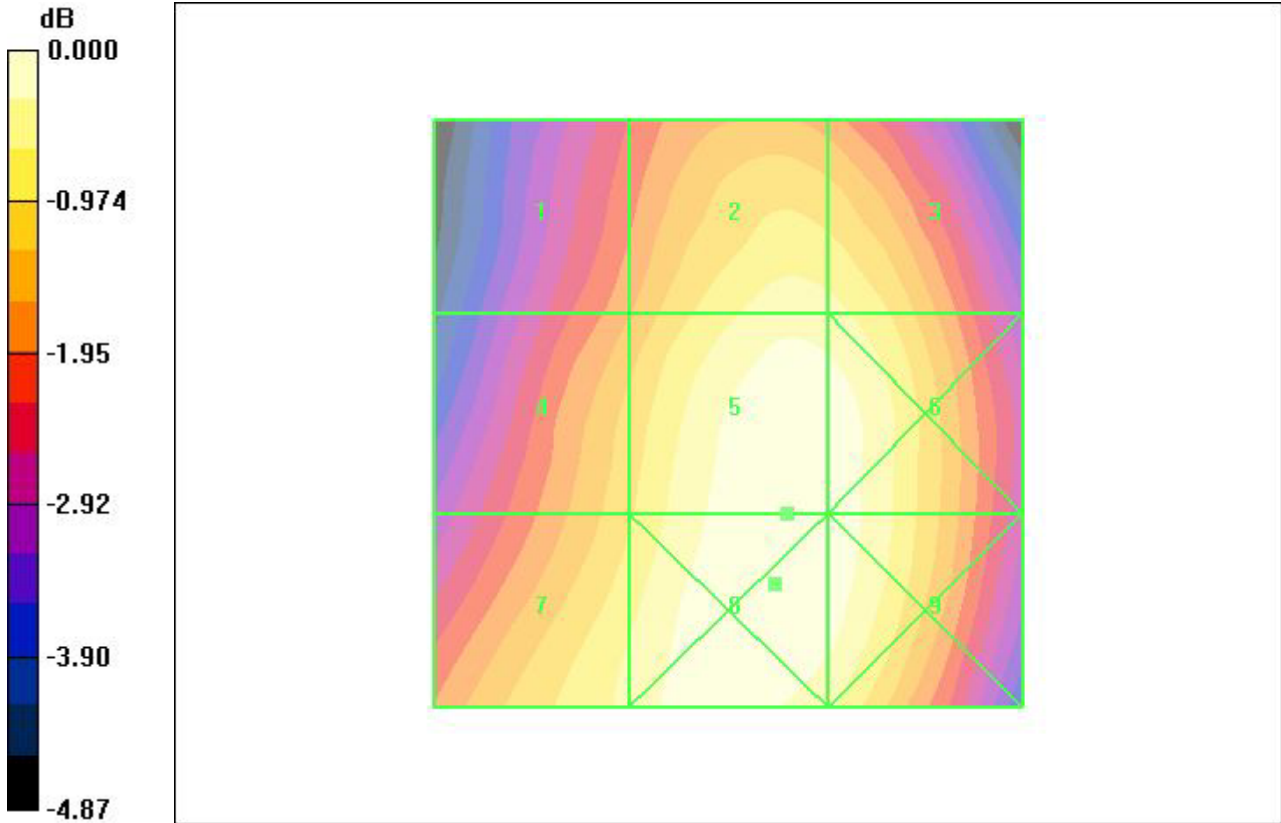

0 dB = 101.1V/m

Test Laboratory: Compliance Certification Services Inc.

HAC_ER_Device_850

DUT: K5; Type: Smart Handheld; Serial: 354291040001353

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1);
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device High CH/Hearing

Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 101.7 V/m

Probe Modulation Factor = 1.20

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 117.2 V/m; Power Drift = -0.013 dB

Hearing Aid Near-Field Category: **M4 (AWF -5 dB)**



Peak E-field in V/m

Grid 1	Grid 2	Grid 3
85.0 M4	97.3 M4	96.7 M4
Grid 4	Grid 5	Grid 6
90.5 M4	101.7 M4	101.0 M4
Grid 7	Grid 8	Grid 9
95.7 M4	101.8 M4	100.8 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43

M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:
 Total = 101.8 V/m
 E Category: M4
 Location: -4, 14, 8.7 mm

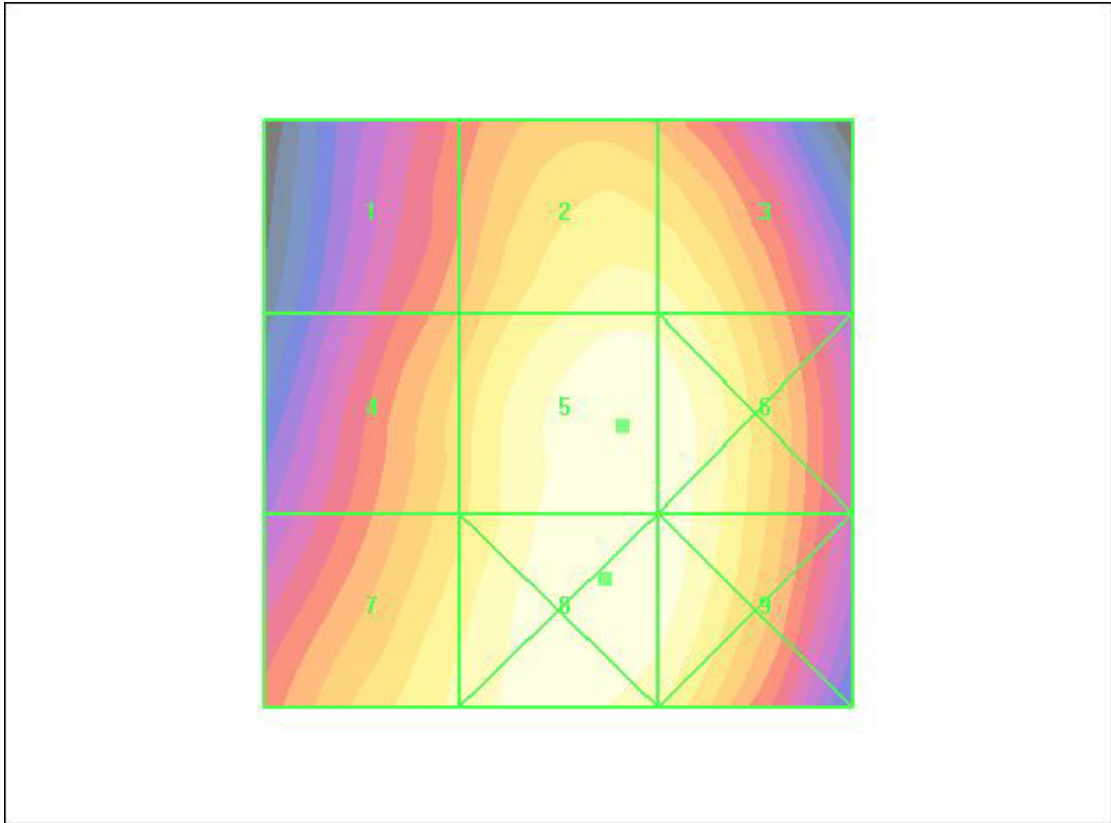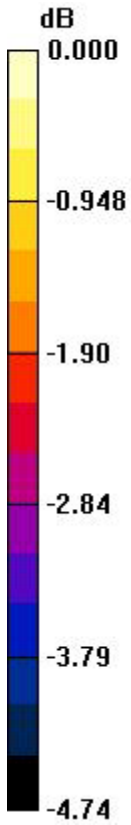

0 dB = 101.8V/m

Date/Time: 2010/12/4 04:25:02 AM

Test Laboratory: Compliance Certification Services Inc.

HAC_ER_Device_850 -Battery B**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1);
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device Low CH/Hearing**Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 92.8 V/m

Probe Modulation Factor = 1.20

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 106.1 V/m; Power Drift = -0.084 dB

Hearing Aid Near-Field Category: M4 (AWF -5 dB)



Peak E-field in V/m

Grid 1	Grid 2	Grid 3
77.6 M4	89.0 M4	88.3 M4
Grid 4	Grid 5	Grid 6
82.1 M4	92.8 M4	92.1 M4
Grid 7	Grid 8	Grid 9
87.2 M4	92.7 M4	91.6 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43

M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:
 Total = 92.8 V/m
 E Category: M4
 Location: -5, 1, 8.7 mm

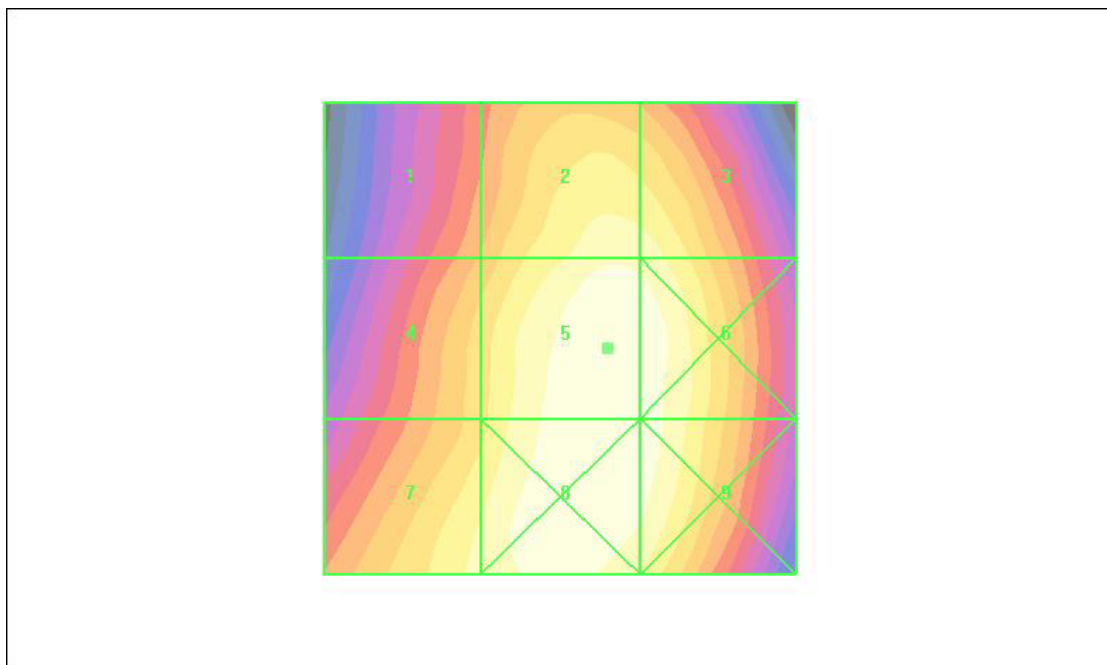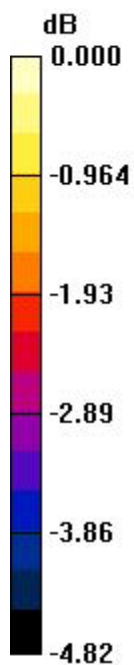

0 dB = 92.8V/m

Date/Time: 2010/12/4 04:18:44 AM

Test Laboratory: Compliance Certification Services Inc.

HAC_ER_Device_850 -Battery B**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1);
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device Middle CH/Hearing**Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 100.4 V/m

Probe Modulation Factor = 1.20

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 114.5 V/m; Power Drift = -0.019 dB

Hearing Aid Near-Field Category: M4 (AWF -5 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
83.5 M4	95.8 M4	94.8 M4
Grid 4	Grid 5	Grid 6
89.3 M4	100.4 M4	99.6 M4
Grid 7	Grid 8	Grid 9
94.8 M4	100.6 M4	99.3 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43



M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:

Total = 100.6 V/m

E Category: M4

Location: -4, 14, 8.7 mm

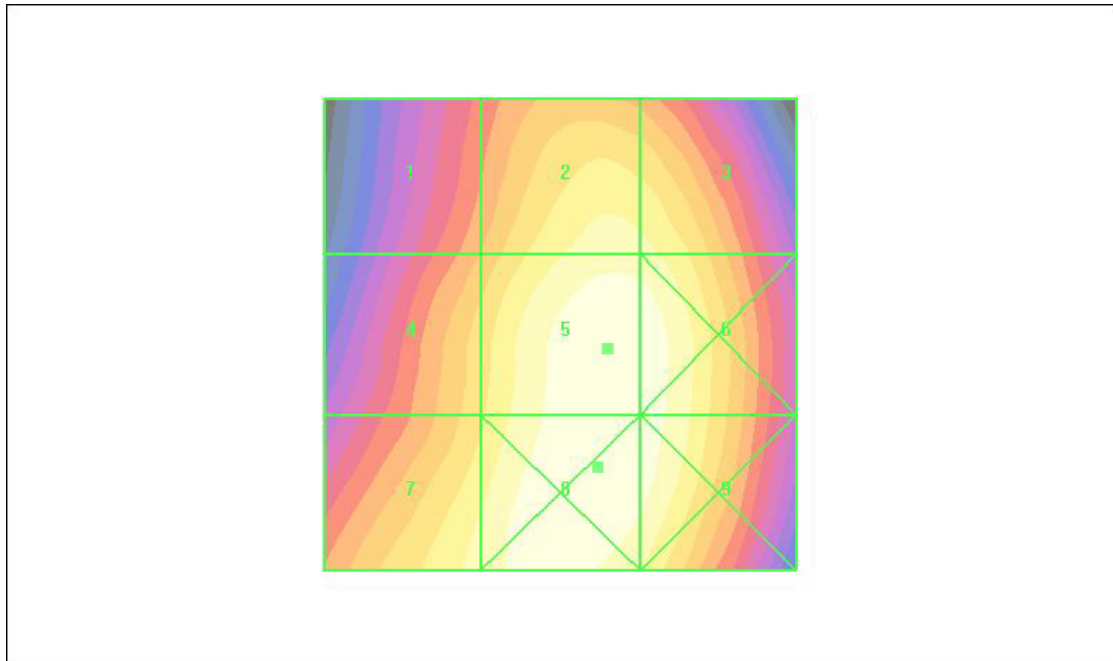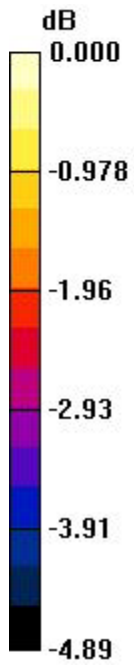

Date/Time: 2010/12/4 04:12:08 AM

Test Laboratory: Compliance Certification Services Inc.

HAC_ER_Device_850 -Battery B**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1);
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device High CH/Hearing**Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 102.0 V/m

Probe Modulation Factor = 1.20

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 116.6 V/m; Power Drift = -0.016 dB

Hearing Aid Near-Field Category: M4 (AWF -5 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
85.3 M4	97.8 M4	96.9 M4
Grid 4	Grid 5	Grid 6
90.2 M4	102.0 M4	101.0 M4
Grid 7	Grid 8	Grid 9
95.0 M4	101.6 M4	100.5 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43



M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:

Total = 102.0 V/m

E Category: M4

Location: -5, 1.5, 8.7 mm

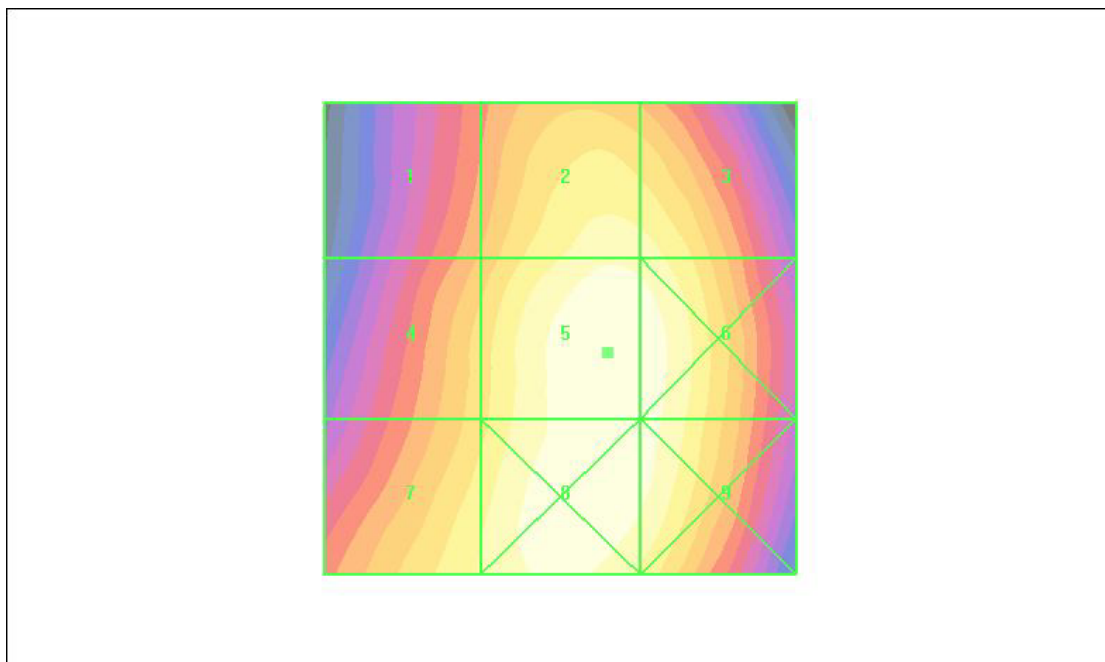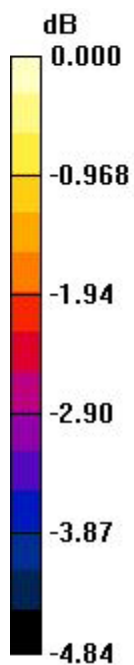

0 dB = 102.0V/m

Test Laboratory: Compliance Certification Services Inc.

HAC_ER_Device_1900

DUT: K5; Type: Smart Handheld; Serial: 354291040001353

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1);
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device Low CH/Hearing

Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 41.2 V/m

Probe Modulation Factor = 1.96

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 13.4 V/m; Power Drift = 0.047 dB

Hearing Aid Near-Field Category: **M4 (AWF -5 dB)**


Peak E-field in V/m

Grid 1	Grid 2	Grid 3
41.2 M4	32.2 M4	26.3 M4
Grid 4	Grid 5	Grid 6
25.6 M4	34.0 M4	34.8 M4
Grid 7	Grid 8	Grid 9
36.4 M4	44.0 M4	43.6 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43

M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:
 Total = 44.0 V/m
 E Category: M4
 Location: -5.5, 25, 8.7 mm

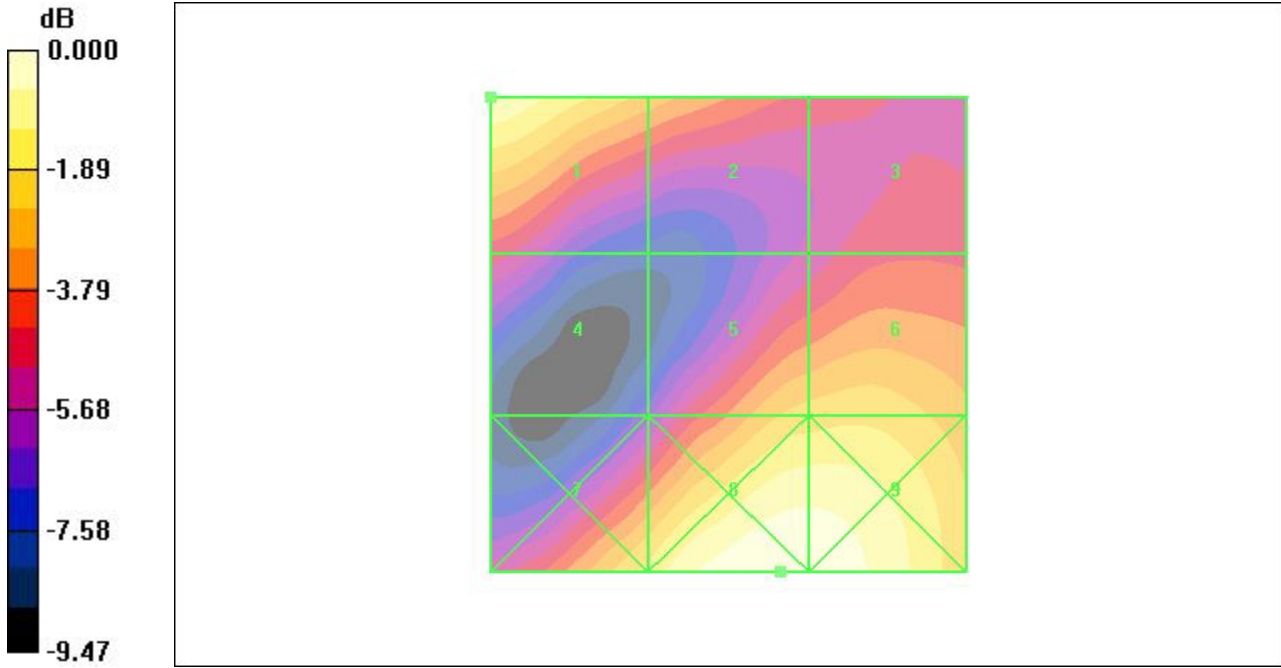

0 dB = 44.0V/m

Test Laboratory: Compliance Certification Services Inc.

HAC_ER_Device_1900**DUT: K5; Type: Smart Handheld; Serial: 354291040001353**

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1);
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device Middle CH/Hearing**Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 51.2 V/m

Probe Modulation Factor = 1.96

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 16.2 V/m; Power Drift = 0.062 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)



Peak E-field in V/m

Grid 1	Grid 2	Grid 3
51.2 M3	42.7 M4	35.1 M4
Grid 4	Grid 5	Grid 6
31.4 M4	42.7 M4	44.0 M4
Grid 7	Grid 8	Grid 9
46.2 M4	55.6 M3	55.2 M3

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43

M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:
 Total = 55.6 V/m
 E Category: M3
 Location: -5.5, 25, 8.7 mm

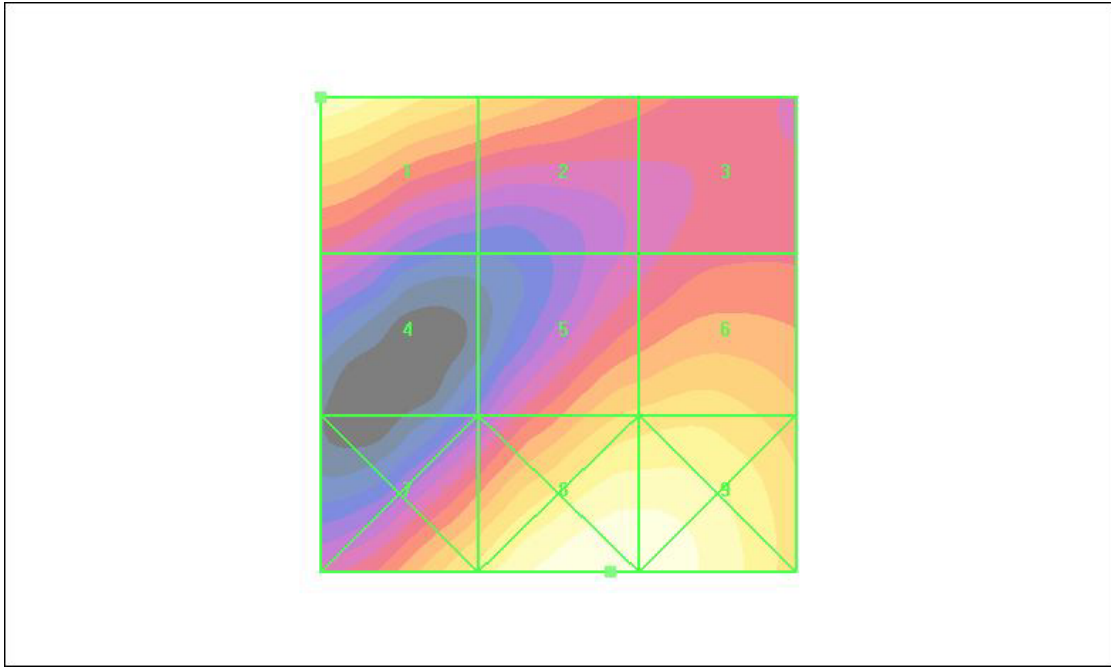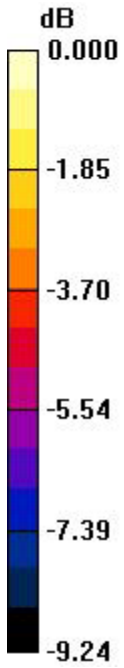

0 dB = 55.6V/m

Test Laboratory: Compliance Certification Services Inc.

HAC_ER_Device_1900**DUT: K5; Type: Smart Handheld; Serial: 354291040001353**

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1);
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device High CH/Hearing**Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 57.7 V/m

Probe Modulation Factor = 1.96

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 18.8 V/m; Power Drift = 0.045 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)



Peak E-field in V/m

Grid 1	Grid 2	Grid 3
57.7 M3	48.7 M3	41.0 M4
Grid 4	Grid 5	Grid 6
35.1 M4	48.6 M3	49.7 M3
Grid 7	Grid 8	Grid 9
52.7 M3	63.9 M3	63.1 M3

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43

M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:
 Total = 63.9 V/m
 E Category: M3
 Location: -5, 25, 8.7 mm

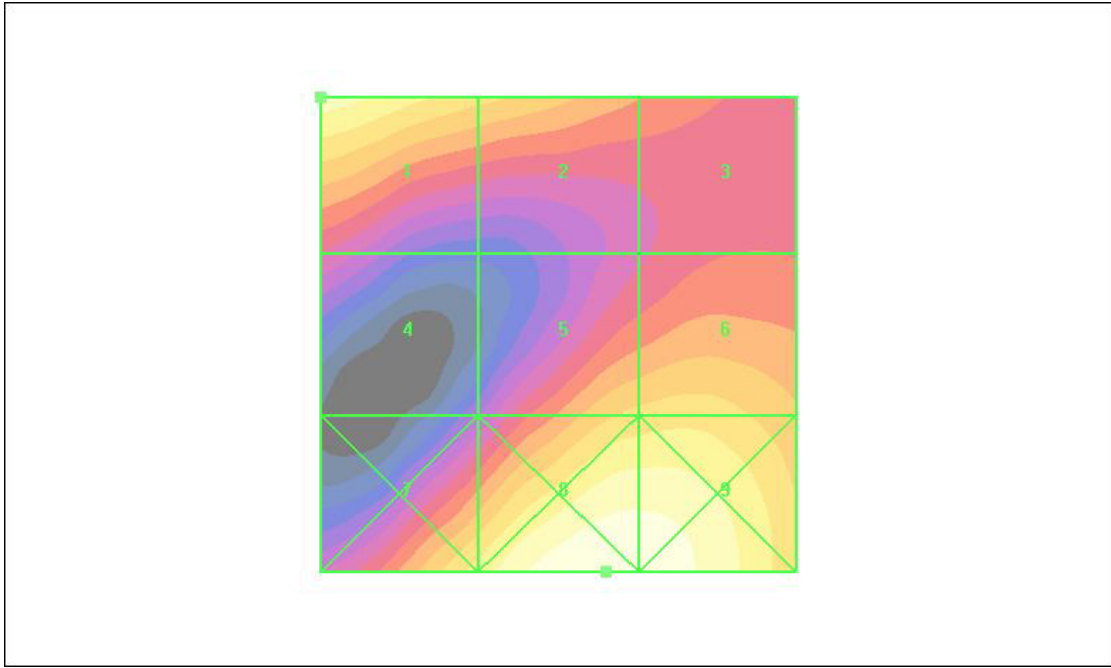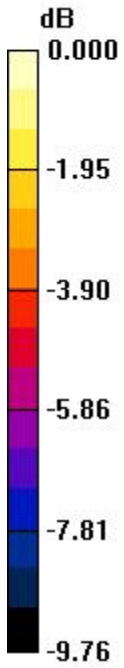

0 dB = 63.9V/m

Date/Time: 2010/12/5 11:26:17

Test Laboratory: Compliance Certification Services Inc.

HAC_ER_Device_1900 -Battery B**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1);
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device Low CH/Hearing**Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 54.4 V/m

Probe Modulation Factor = 1.96

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 19.0 V/m; Power Drift = -0.046 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)



Peak E-field in V/m

Grid 1	Grid 2	Grid 3
54.4 M3	50.5 M3	43.8 M4
Grid 4	Grid 5	Grid 6
32.4 M4	44.3 M4	45.2 M4
Grid 7	Grid 8	Grid 9
50.0 M3	60.2 M3	59.8 M3

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43

M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:
 Total = 60.2 V/m
 E Category: M3
 Location: -5.5, 25, 8.7 mm

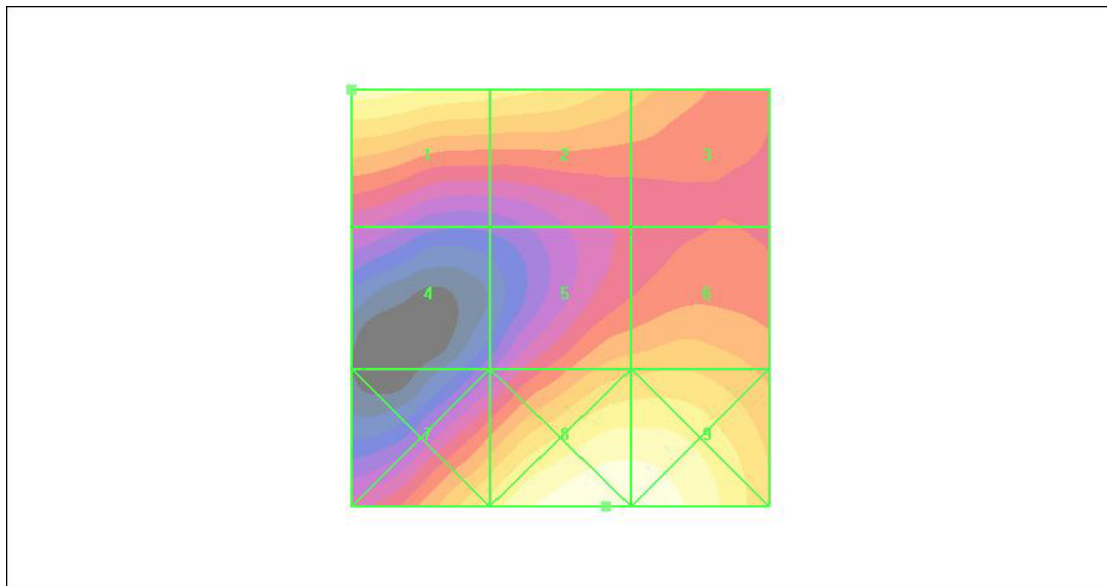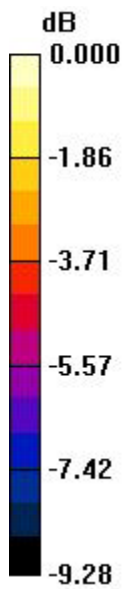

0 dB = 60.2V/m

Date/Time: 2010/12/5 11:19:46

Test Laboratory: Compliance Certification Services Inc.

HAC_ER_Device_1900 -Battery B**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1);
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device Middle CH/Hearing**Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 55.9 V/m

Probe Modulation Factor = 1.96

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 20.7 V/m; Power Drift = 0.027 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
55.9 M3	51.2 M3	45.4 M4
Grid 4	Grid 5	Grid 6
32.1 M4	49.4 M3	50.1 M3
Grid 7	Grid 8	Grid 9
53.8 M3	64.7 M3	63.8 M3

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43



M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:

Total = 64.7 V/m

E Category: M3

Location: -5, 25, 8.7 mm

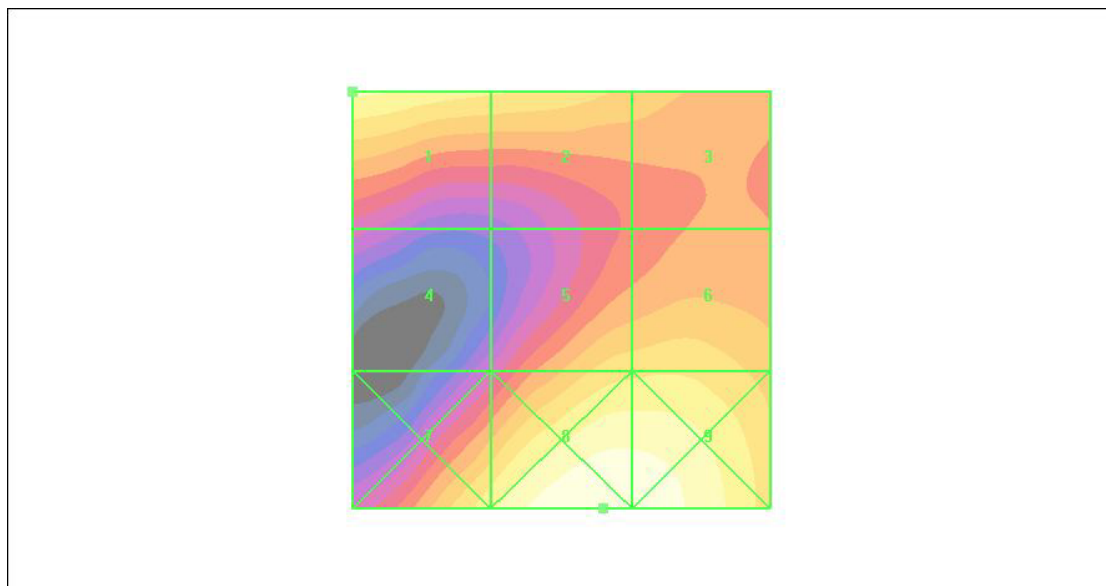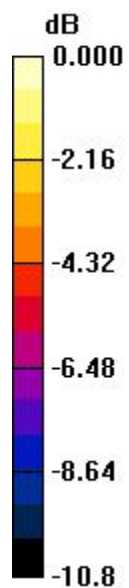

0 dB = 64.7V/m

Date/Time: 2010/12/5 11:13:28

Test Laboratory: Compliance Certification Services Inc.

HAC_ER_Device_1900 -Battery B**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1);
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device High CH/Hearing**Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 55.8 V/m

Probe Modulation Factor = 1.96

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 18.1 V/m; Power Drift = 0.023 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
55.8 M3	51.9 M3	45.1 M4
Grid 4	Grid 5	Grid 6
33.5 M4	47.1 M4	48.6 M3
Grid 7	Grid 8	Grid 9
49.6 M3	61.9 M3	61.4 M3

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43



M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:

Total = 61.9 V/m

E Category: M3

Location: -6, 25, 8.7 mm

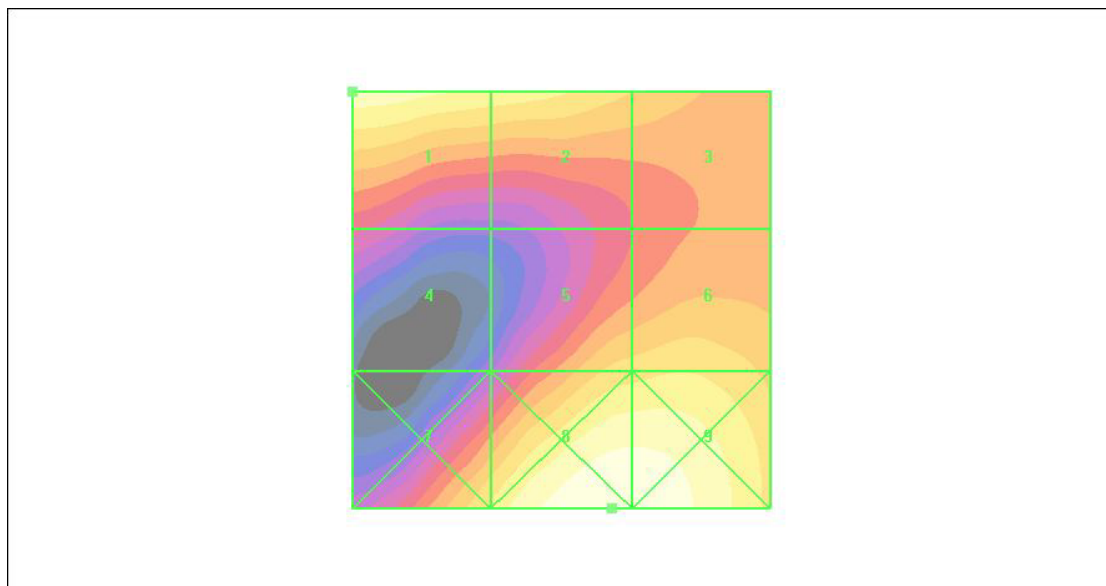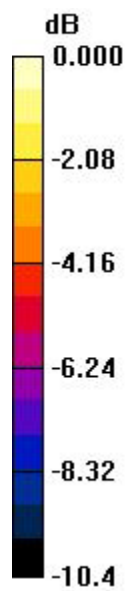

0 dB = 61.9V/m

Test Laboratory: Compliance Certification Services Inc.

HAC_ER_Device_WCDMA BAND II

DUT: K5; Type: Smart Handheld; Serial: 354291040001353

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1);
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device Low CH/Hearing

Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 53.1 V/m

Probe Modulation Factor = 1.38

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 26.4 V/m; Power Drift = 0.052 dB

Hearing Aid Near-Field Category: **M4 (AWF 0 dB)**



Peak E-field in V/m

Grid 1	Grid 2	Grid 3
53.1 M4	49.3 M4	42.6 M4
Grid 4	Grid 5	Grid 6
32.6 M4	42.7 M4	43.4 M4
Grid 7	Grid 8	Grid 9
48.8 M4	57.8 M4	57.2 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43

M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:
 Total = 57.8 V/m
 E Category: M4
 Location: -5.5, 25, 8.7 mm

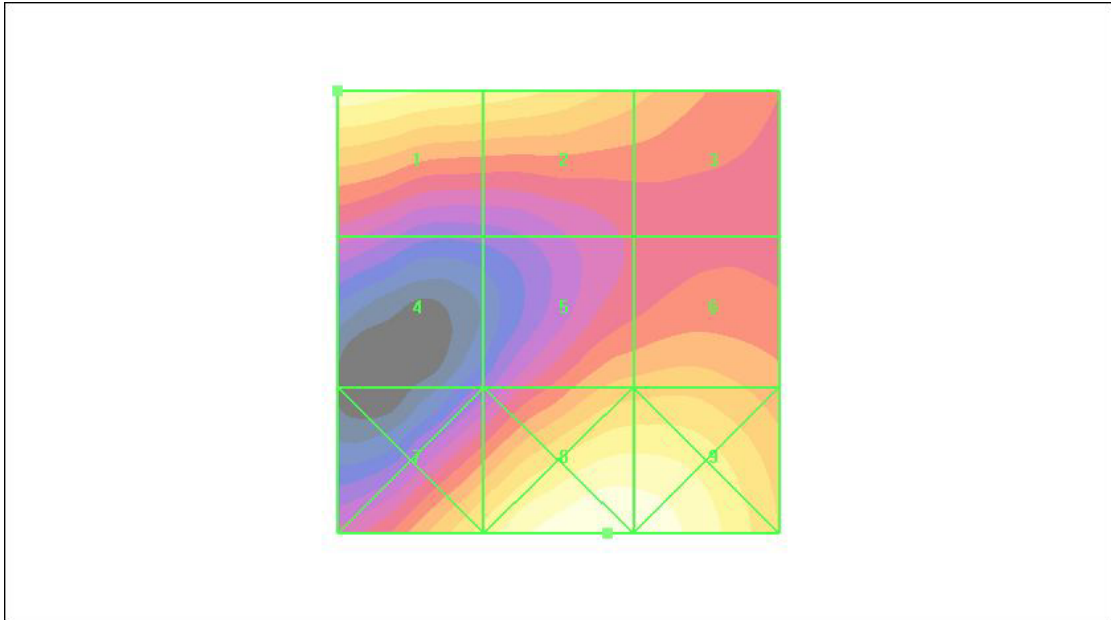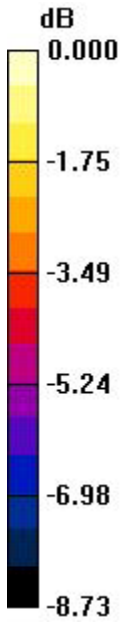

0 dB = 57.8V/m

Test Laboratory: Compliance Certification Services Inc.

HAC_ER_Device_WCDMA BAND II**DUT: K5; Type: Smart Handheld; Serial: 354291040001353**

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1);
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device Middle CH/Hearing**Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 56.7 V/m

Probe Modulation Factor = 1.38

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 28.6 V/m; Power Drift = 0.047 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)



Peak E-field in V/m

Grid 1	Grid 2	Grid 3
56.7 M4	52.8 M4	46.3 M4
Grid 4	Grid 5	Grid 6
33.1 M4	47.6 M4	48.4 M4
Grid 7	Grid 8	Grid 9
53.0 M4	62.7 M4	61.9 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43

M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:
 Total = 62.7 V/m
 E Category: M4
 Location: -5, 25, 8.7 mm

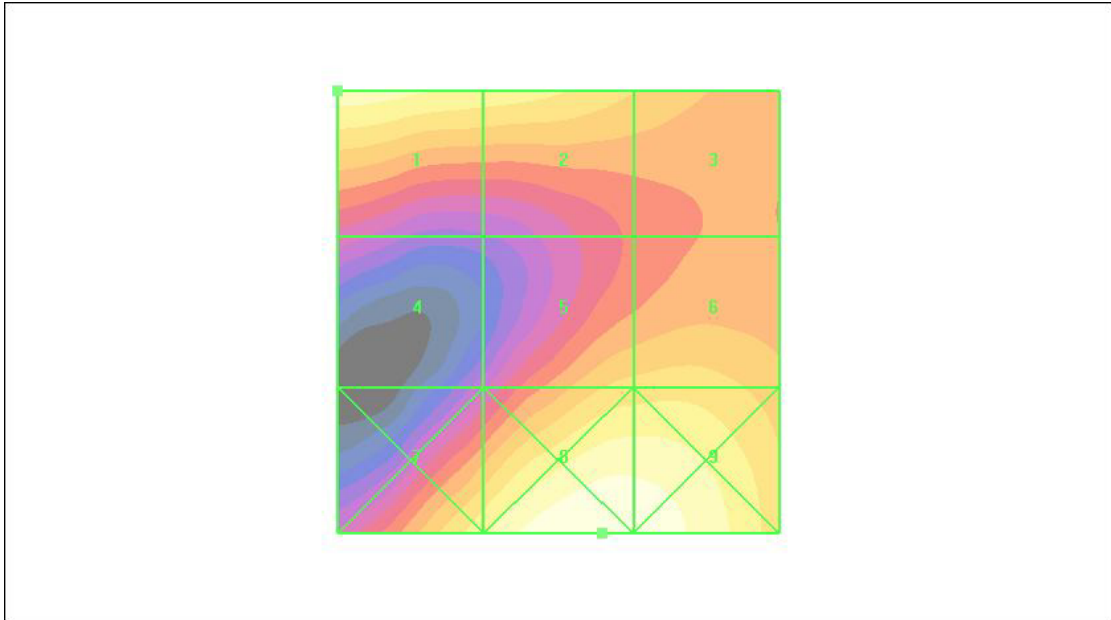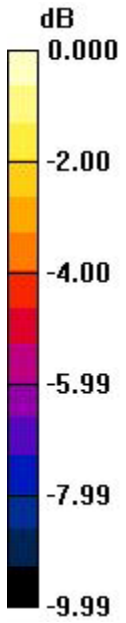

0 dB = 62.7V/m

Test Laboratory: Compliance Certification Services Inc.

HAC_ER_Device_WCDMA BAND II

DUT: K5; Type: Smart Handheld; Serial: 354291040001353

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1);
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device High CH/Hearing

Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 52.3 V/m

Probe Modulation Factor = 1.38

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 25.1 V/m; Power Drift = -0.071 dB

Hearing Aid Near-Field Category: **M4 (AWF 0 dB)**



Peak E-field in V/m

Grid 1	Grid 2	Grid 3
52.3 M4	49.4 M4	43.7 M4
Grid 4	Grid 5	Grid 6
31.3 M4	42.5 M4	43.7 M4
Grid 7	Grid 8	Grid 9
45.3 M4	55.6 M4	55.2 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43

M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:
 Total = 55.6 V/m
 E Category: M4
 Location: -5.5, 25, 8.7 mm

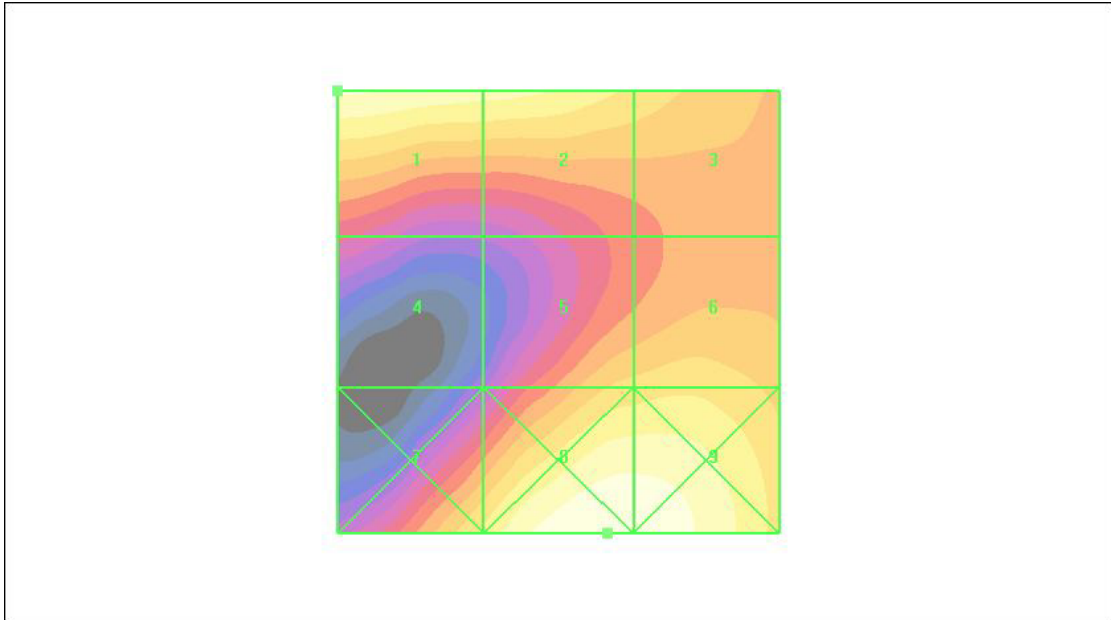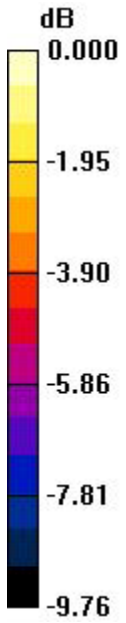

0 dB = 55.6V/m

Date/Time: 2010/12/6 09:26:07

Test Laboratory: Compliance Certification Services Inc.

HAC_ER_Device_WCDMA BAND II -Battery B**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: ER3DV6 - SN2345; ConvF(1, 1, 1);
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - ER3D - 2007: 15 mm from Probe Center to the Device Low CH/Hearing**Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 53.0 V/m

Probe Modulation Factor = 1.38

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 27.4 V/m; Power Drift = -0.038 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
53.0 M4	49.3 M4	43.0 M4
Grid 4	Grid 5	Grid 6
31.7 M4	45.6 M4	46.4 M4
Grid 7	Grid 8	Grid 9
51.9 M4	61.1 M4	60.3 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43



M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:

Total = 61.1 V/m

E Category: M4

Location: -5, 25, 8.7 mm

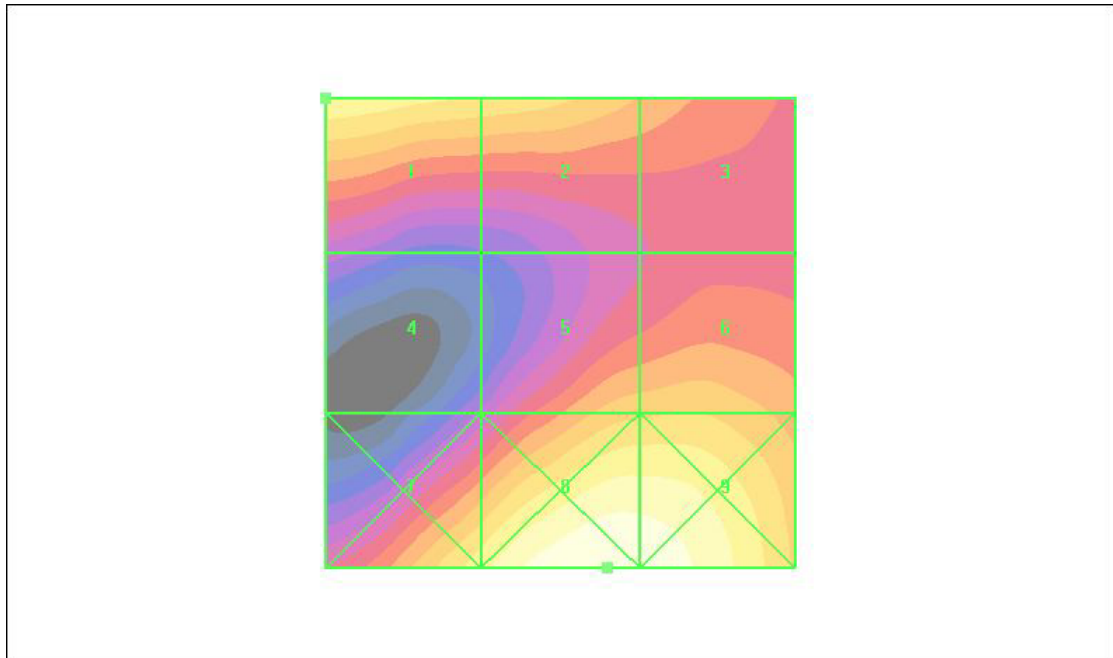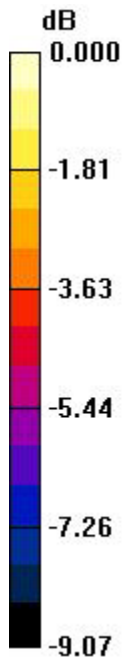

0 dB = 61.1V/m