

Date/Time: 2010/12/1 06:22:12

Test Laboratory: Compliance Certification Services Inc.

HAC_H_SCAN_Device_1900**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device-High/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.153 A/m

Probe Modulation Factor = 1.87

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.085 A/m; Power Drift = -0.012 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.154 M3	0.153 M3	0.153 M3
Grid 4	Grid 5	Grid 6
0.139 M4	0.152 M3	0.152 M3
Grid 7	Grid 8	Grid 9
0.179 M3	0.148 M3	0.131 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43



M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:

Total = 0.179 A/m

H Category: M3

Location: 25, 25, 8.7 mm

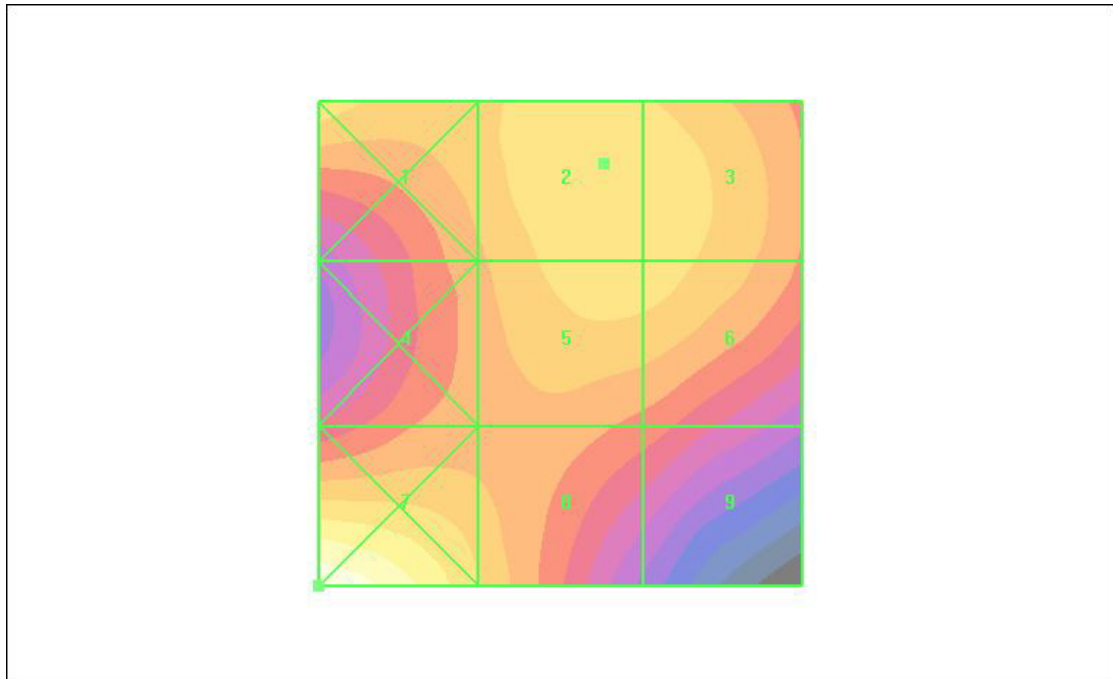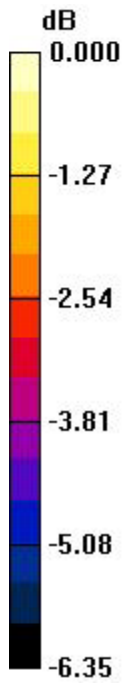

0 dB = 0.179A/m

Date/Time: 2010/12/1 06:45:33

Test Laboratory: Compliance Certification Services Inc.

HAC_H_SCAN_Device_1900 -Battery B**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device-Low/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.145 A/m

Probe Modulation Factor = 1.87

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.078 A/m; Power Drift = -0.009 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)



Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.153 M3	0.139 M4	0.139 M4
Grid 4	Grid 5	Grid 6
0.130 M4	0.138 M4	0.138 M4
Grid 7	Grid 8	Grid 9
0.173 M3	0.145 M3	0.126 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43

M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:
 Total = 0.173 A/m
 H Category: M3
 Location: 25, 25, 8.7 mm

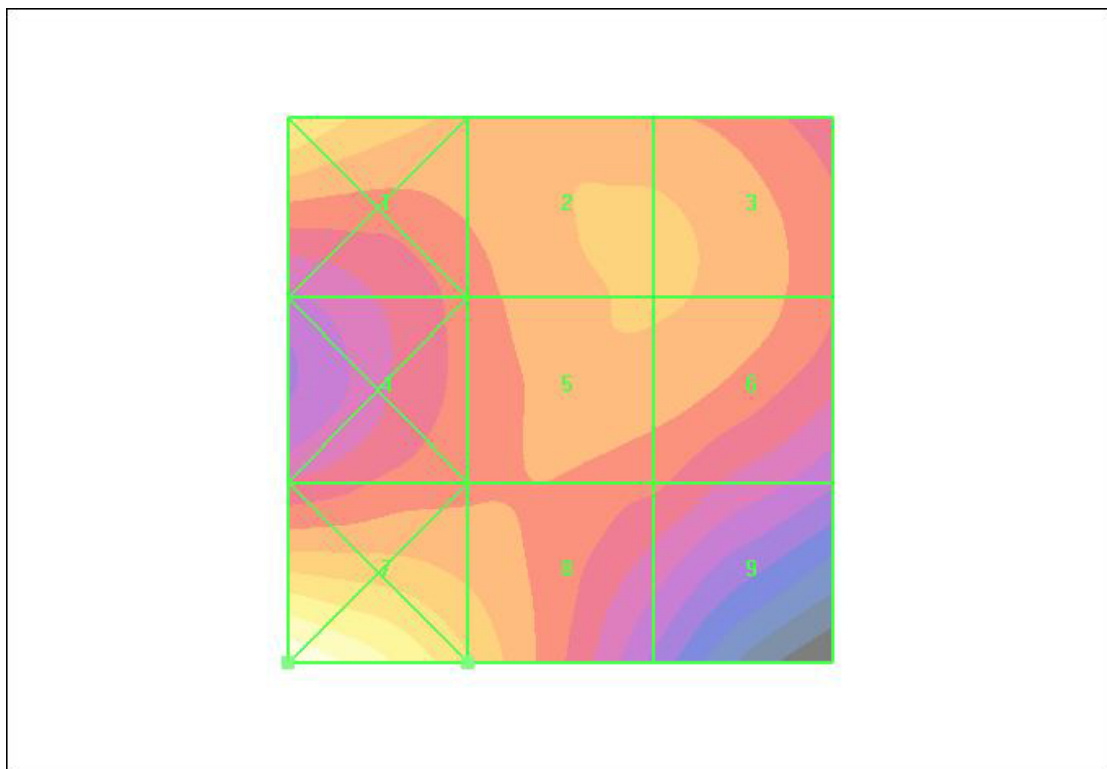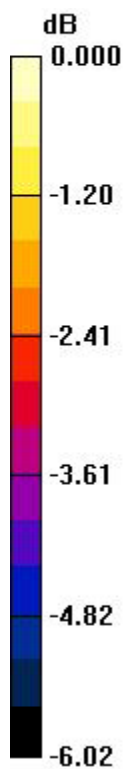

0 dB = 0.173A/m

Date/Time: 2010/12/1 06:50:49

Test Laboratory: Compliance Certification Services Inc.

HAC_H_SCAN_Device_1900 -Battery B**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device-Middle/Hearing**Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.149 A/m

Probe Modulation Factor = 1.87

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.083 A/m; Power Drift = 0.004 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)



Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.158 M3	0.149 M3	0.148 M3
Grid 4	Grid 5	Grid 6
0.137 M4	0.147 M3	0.146 M3
Grid 7	Grid 8	Grid 9
0.174 M3	0.143 M3	0.127 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43

M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:
 Total = 0.174 A/m
 H Category: M3
 Location: 25, 25, 8.7 mm

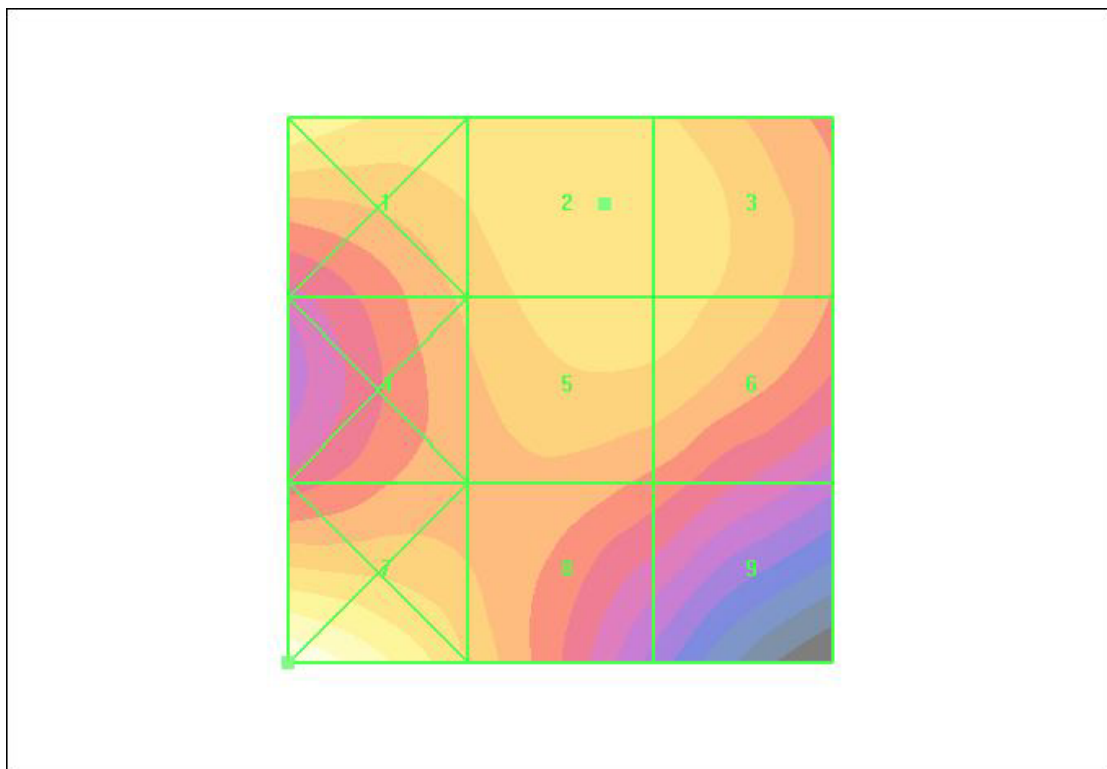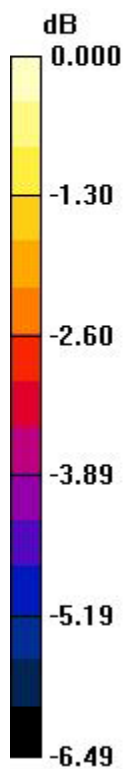

0 dB = 0.174A/m

Date/Time: 2010/12/1 06:56:14

Test Laboratory: Compliance Certification Services Inc.

HAC_H_SCAN_Device_1900 -Battery B**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device-High/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.149 A/m

Probe Modulation Factor = 1.87

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.082 A/m; Power Drift = 0.006 dB

Hearing Aid Near-Field Category: M3 (AWF -5 dB)



Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.155 M3	0.149 M3	0.148 M3
Grid 4	Grid 5	Grid 6
0.135 M4	0.147 M3	0.146 M3
Grid 7	Grid 8	Grid 9
0.170 M3	0.143 M3	0.128 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43

M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:
 Total = 0.170 A/m
 H Category: M3
 Location: 25, 25, 8.7 mm

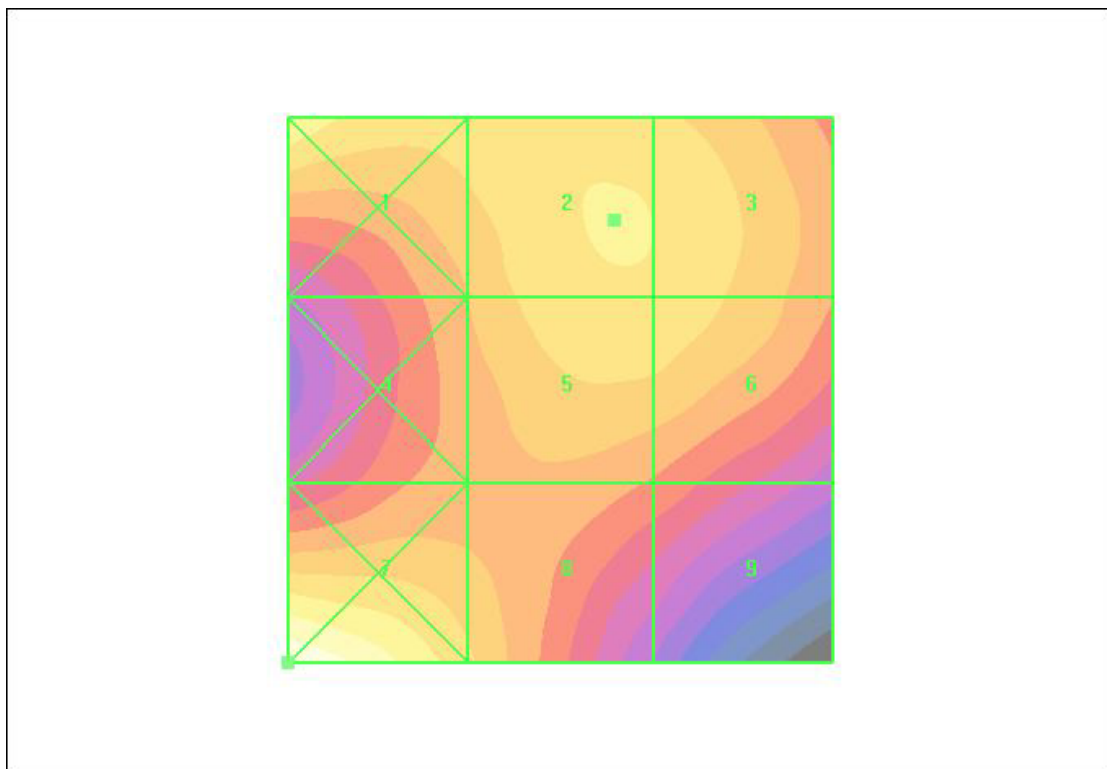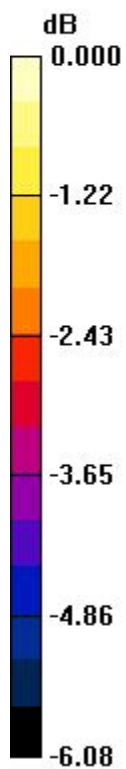

0 dB = 0.170A/m

Date/Time: 2010/12/2 07:18:42

Test Laboratory: Compliance Certification Services Inc.

HAC_H_SCAN_Device_WCDMA BAND II**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device-Low/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.143 A/m

Probe Modulation Factor = 1.34

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.111 A/m; Power Drift = 0.015 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.151 M4	0.141 M4	0.141 M4
Grid 4	Grid 5	Grid 6
0.132 M4	0.141 M4	0.140 M4
Grid 7	Grid 8	Grid 9
0.171 M4	0.143 M4	0.126 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43



M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:

Total = 0.171 A/m

H Category: M4

Location: 25, 25, 8.7 mm

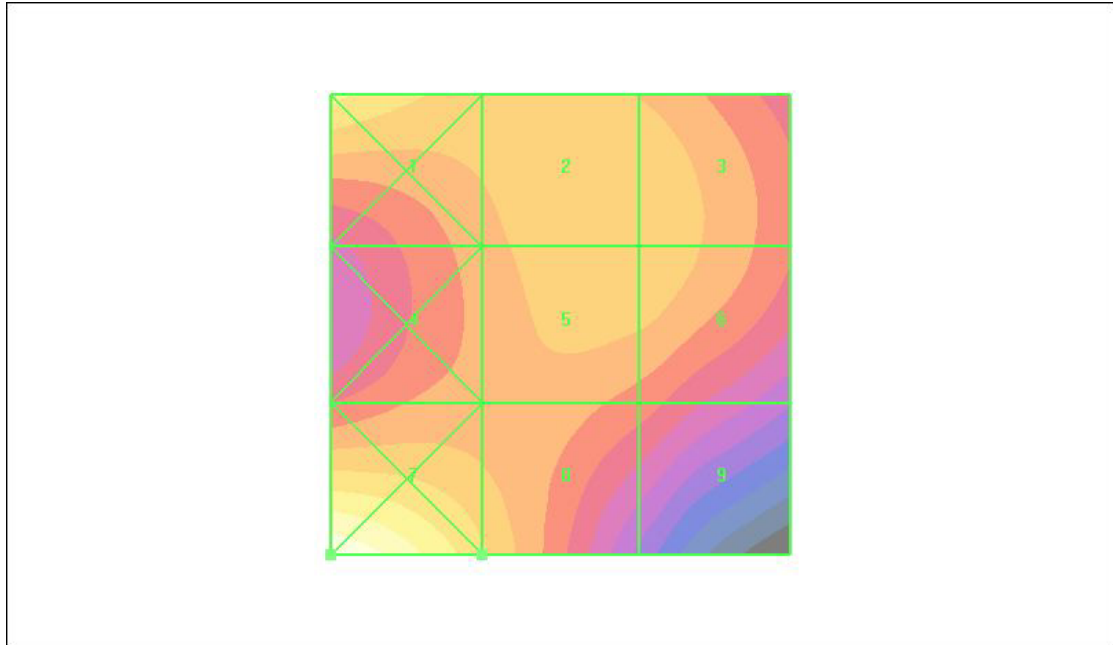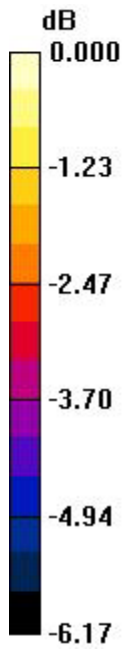

0 dB = 0.171A/m

Date/Time: 2010/12/2 07:11:27

Test Laboratory: Compliance Certification Services Inc.

HAC_H_SCAN_Device_WCDMA BAND II**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device-Middle/Hearing**Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.155 A/m

Probe Modulation Factor = 1.34

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.121 A/m; Power Drift = -0.004 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.155 M4	0.155 M4	0.154 M4
Grid 4	Grid 5	Grid 6
0.144 M4	0.154 M4	0.152 M4
Grid 7	Grid 8	Grid 9
0.178 M4	0.147 M4	0.132 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43



M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:

Total = 0.178 A/m

H Category: M4

Location: 25, 25, 8.7 mm

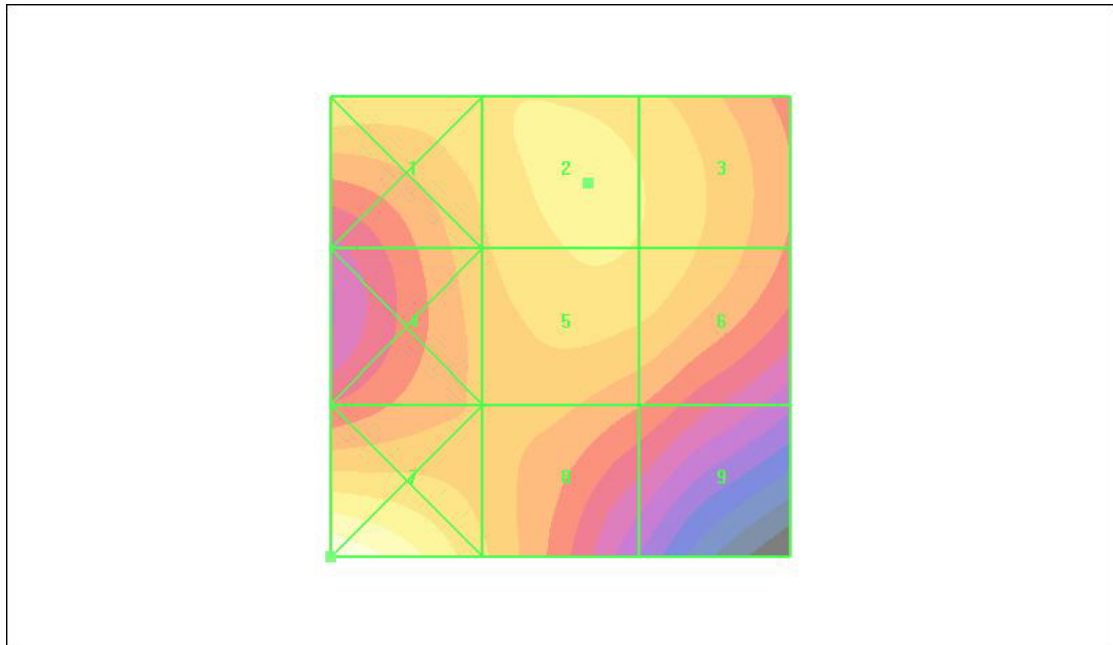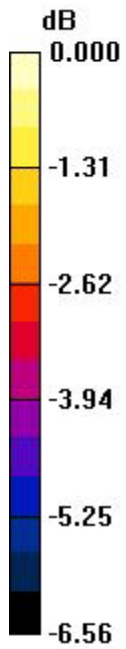

0 dB = 0.178A/m

Date/Time: 2010/12/2 07:00:55

Test Laboratory: Compliance Certification Services Inc.

HAC_H_SCAN_Device_WCDMA BAND II**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device-High/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.146 A/m

Probe Modulation Factor = 1.34

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.113 A/m; Power Drift = -0.041 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.144 M4	0.146 M4	0.145 M4
Grid 4	Grid 5	Grid 6
0.133 M4	0.144 M4	0.143 M4
Grid 7	Grid 8	Grid 9
0.163 M4	0.138 M4	0.124 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43



M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:

Total = 0.163 A/m

H Category: M4

Location: 25, 25, 8.7 mm

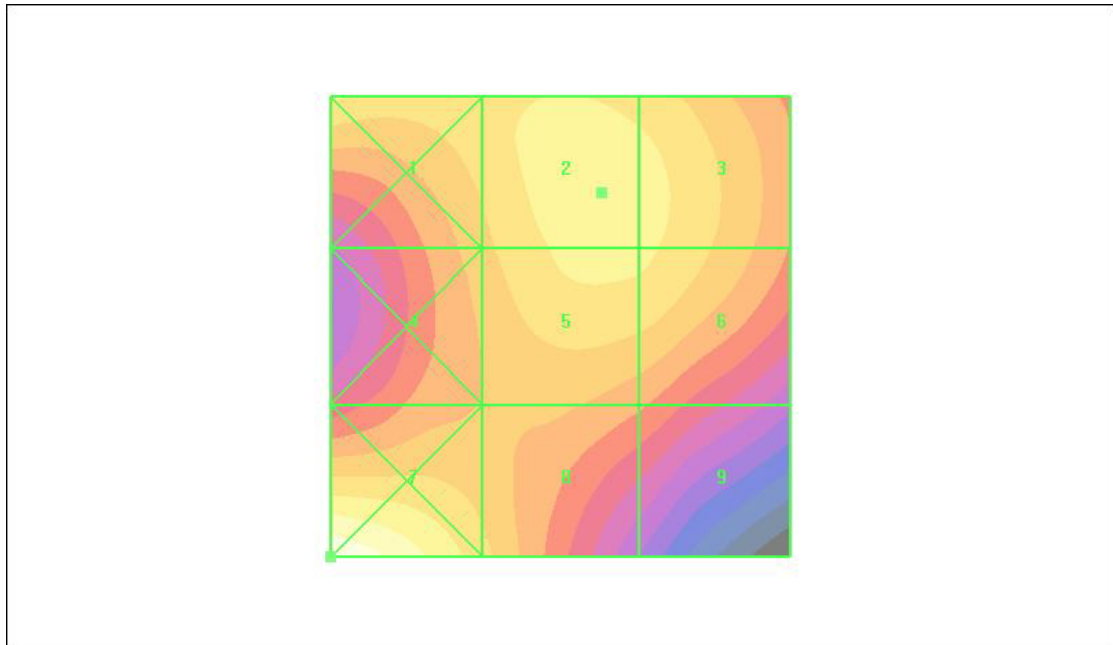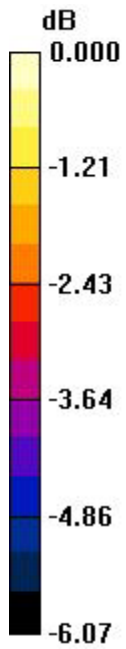

0 dB = 0.163A/m

Date/Time: 2010/12/2 08:04:23

Test Laboratory: Compliance Certification Services Inc.

HAC_H_SCAN_Device_WCDMA BAND II -Battery B**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device-Low/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.139 A/m

Probe Modulation Factor = 1.34

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.110 A/m; Power Drift = 0.040 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.148 M4	0.139 M4	0.139 M4
Grid 4	Grid 5	Grid 6
0.130 M4	0.139 M4	0.139 M4
Grid 7	Grid 8	Grid 9
0.159 M4	0.136 M4	0.125 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43



M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:

Total = 0.159 A/m

H Category: M4

Location: 25, 25, 8.7 mm

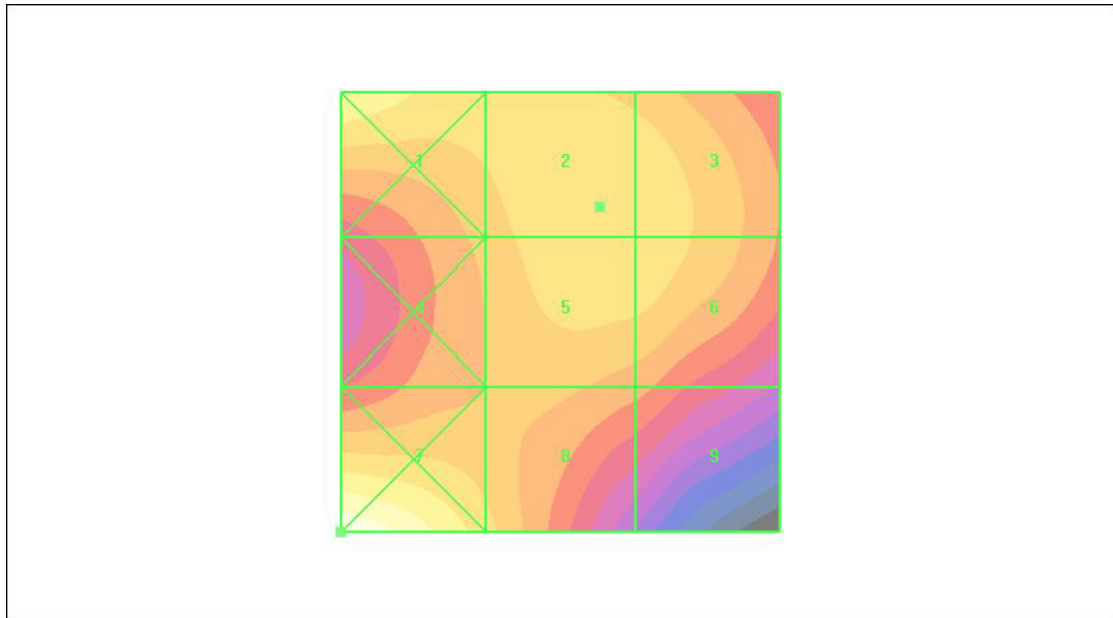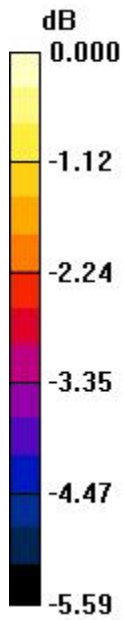

0 dB = 0.159A/m

Date/Time: 2010/12/2 08:09:48

Test Laboratory: Compliance Certification Services Inc.

HAC_H_SCAN_Device_WCDMA BAND II -Battery B**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: WCDMA Band II; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

Air Temperature:24.6 deg C;Liquid Temperature:23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device-Middle/Hearing**Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.153 A/m

Probe Modulation Factor = 1.34

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.120 A/m; Power Drift = 0.013 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.154 M4	0.153 M4	0.151 M4
Grid 4	Grid 5	Grid 6
0.143 M4	0.152 M4	0.150 M4
Grid 7	Grid 8	Grid 9
0.167 M4	0.142 M4	0.131 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43



M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:

Total = 0.167 A/m

H Category: M4

Location: 25, 25, 8.7 mm

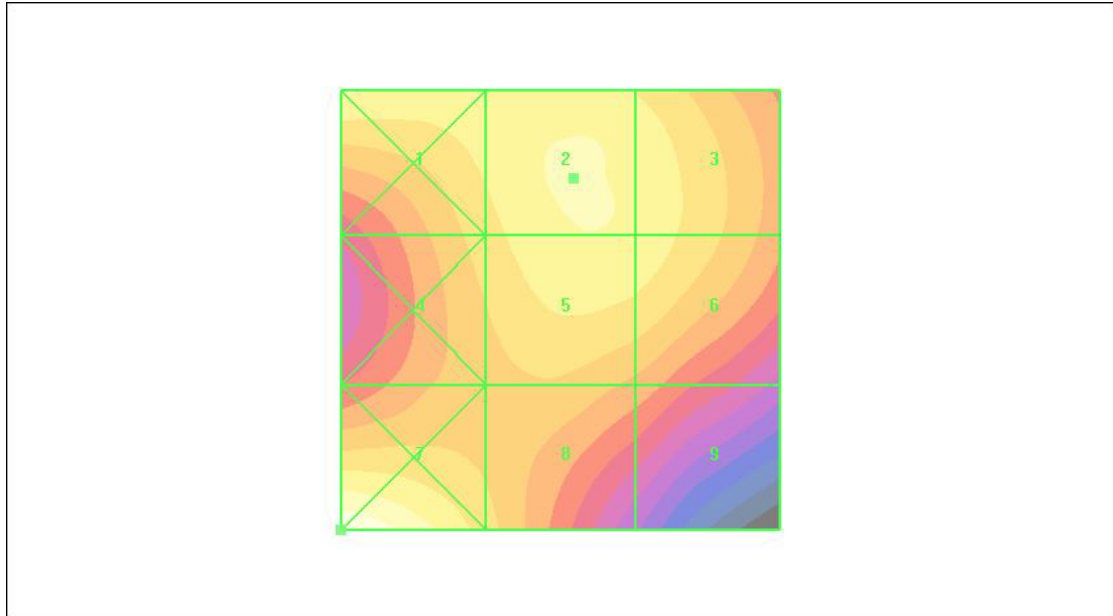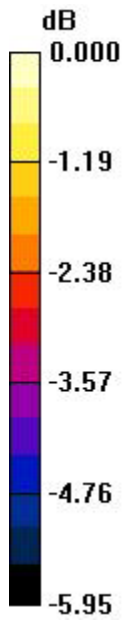

0 dB = 0.167A/m

Date/Time: 2010/12/2 08:18:30

Test Laboratory: Compliance Certification Services Inc.

HAC_H_SCAN_Device_WCDMA BAND II -Battery B**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device-High/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.143 A/m

Probe Modulation Factor = 1.34

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.113 A/m; Power Drift = -0.033 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)



Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.142 M4	0.143 M4	0.142 M4
Grid 4	Grid 5	Grid 6
0.132 M4	0.142 M4	0.142 M4
Grid 7	Grid 8	Grid 9
0.154 M4	0.133 M4	0.125 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43

M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:
 Total = 0.154 A/m
 H Category: M4
 Location: 25, 25, 8.7 mm

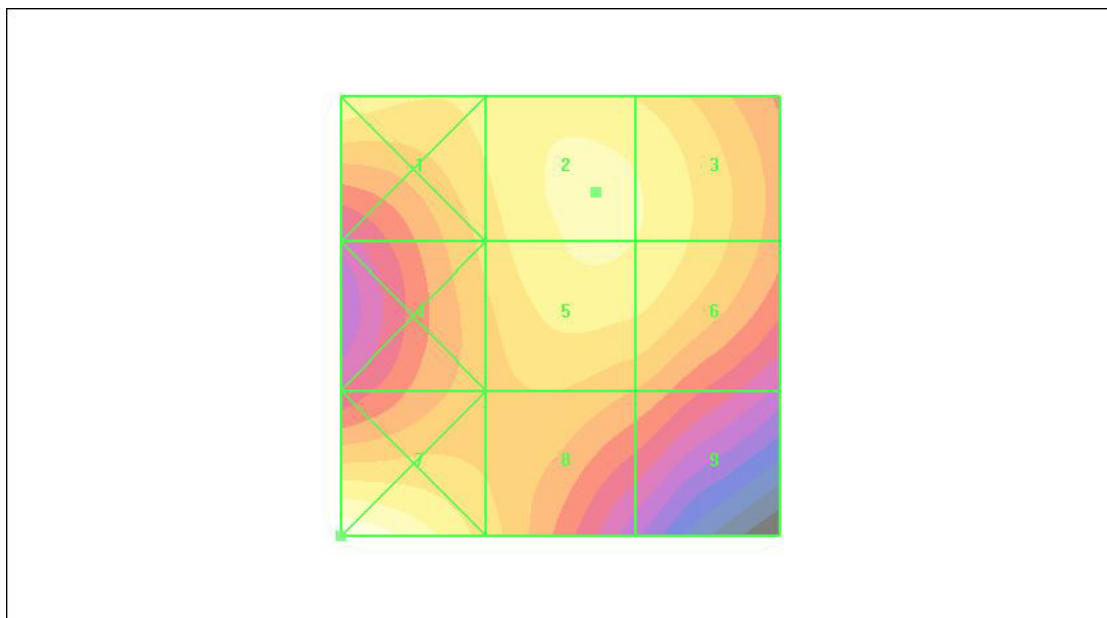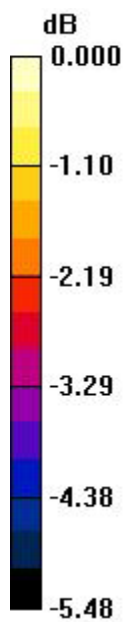

0 dB = 0.154A/m

Date/Time: 2010/12/3 07:27:25

Test Laboratory: Compliance Certification Services Inc.

HAC_H_SCAN_Device_WCDMA BAND V**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device-Low/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.135 A/m

Probe Modulation Factor = 1.24

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.081 A/m; Power Drift = -0.046 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.189 M4	0.135 M4	0.086 M4
Grid 4	Grid 5	Grid 6
0.175 M4	0.125 M4	0.078 M4
Grid 7	Grid 8	Grid 9
0.186 M4	0.129 M4	0.082 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43



M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:

Total = 0.189 A/m

H Category: M4

Location: 25, -25, 8.7 mm

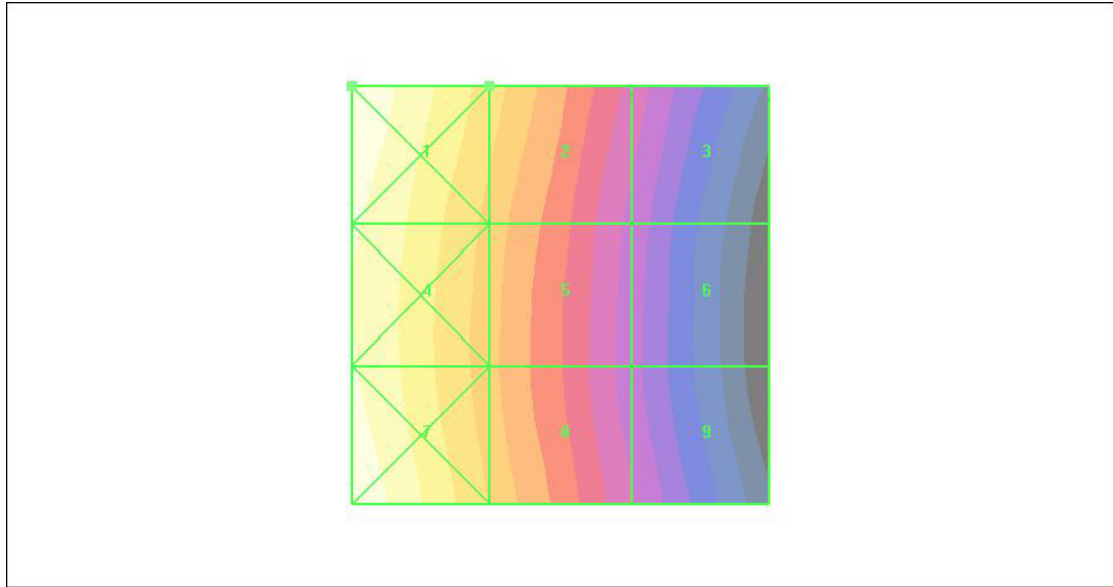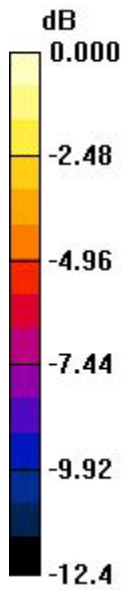

0 dB = 0.189A/m

Date/Time: 2010/12/3 07:34:36

Test Laboratory: Compliance Certification Services Inc.

HAC_H_SCAN_Device_WCDMA BAND V**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device-Middle/Hearing**Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.134 A/m

Probe Modulation Factor = 1.24

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.078 A/m; Power Drift = 0.000 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.187 M4	0.134 M4	0.083 M4
Grid 4	Grid 5	Grid 6
0.173 M4	0.124 M4	0.075 M4
Grid 7	Grid 8	Grid 9
0.189 M4	0.131 M4	0.082 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43



M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:

Total = 0.189 A/m

H Category: M4

Location: 25, 25, 8.7 mm

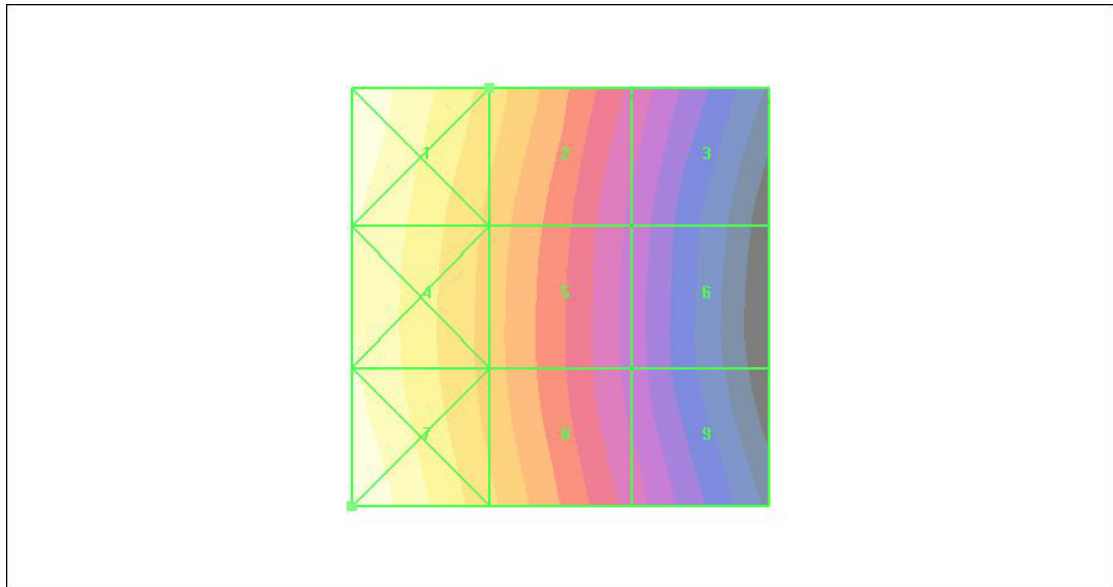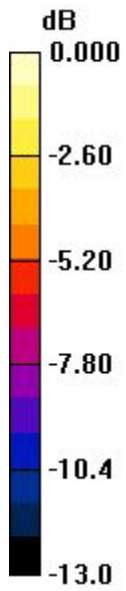

0 dB = 0.189A/m

Date/Time: 2010/12/3 07:43:14

Test Laboratory: Compliance Certification Services Inc.

HAC_H_SCAN_Device_WCDMA BAND V**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device-High/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.140 A/m

Probe Modulation Factor = 1.24

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.081 A/m; Power Drift = -0.049 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.195 M4	0.140 M4	0.086 M4
Grid 4	Grid 5	Grid 6
0.180 M4	0.128 M4	0.077 M4
Grid 7	Grid 8	Grid 9
0.197 M4	0.135 M4	0.085 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43



M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:

Total = 0.197 A/m

H Category: M4

Location: 25, 25, 8.7 mm

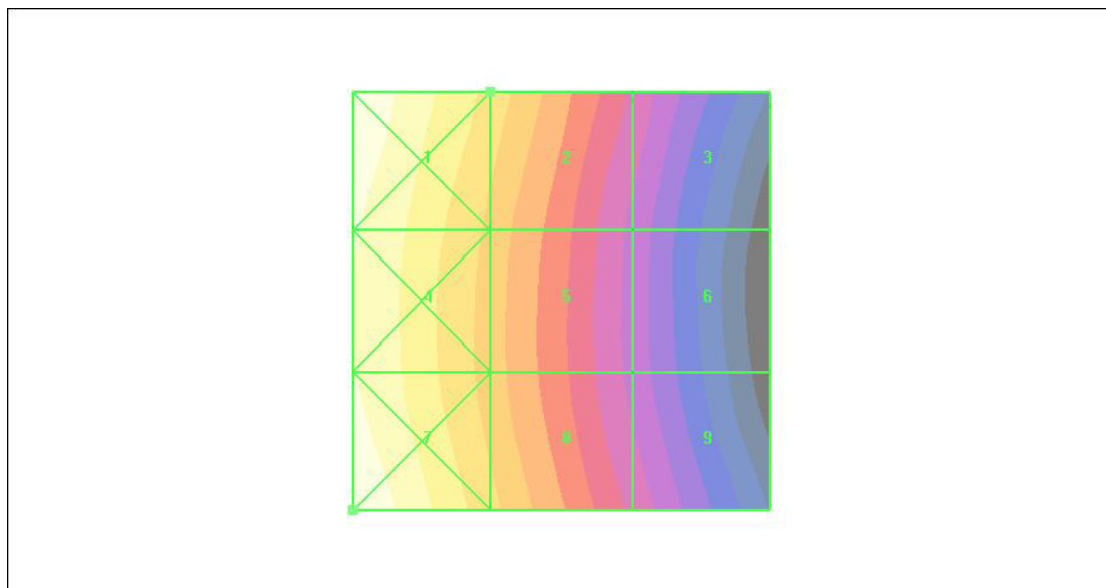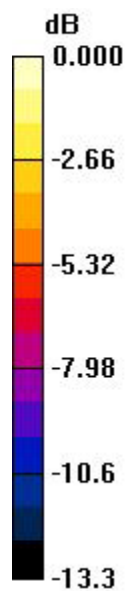

0 dB = 0.197A/m

Date/Time: 2010/12/3 08:35:06

Test Laboratory: Compliance Certification Services Inc.

HAC_H_SCAN_Device_WCDMA BAND V -Battery B**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device-Low/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.139 A/m

Probe Modulation Factor = 1.24

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.083 A/m; Power Drift = -0.003 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.192 M4	0.139 M4	0.087 M4
Grid 4	Grid 5	Grid 6
0.179 M4	0.128 M4	0.080 M4
Grid 7	Grid 8	Grid 9
0.188 M4	0.132 M4	0.084 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43



M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:

Total = 0.192 A/m

H Category: M4

Location: 25, -25, 8.7 mm

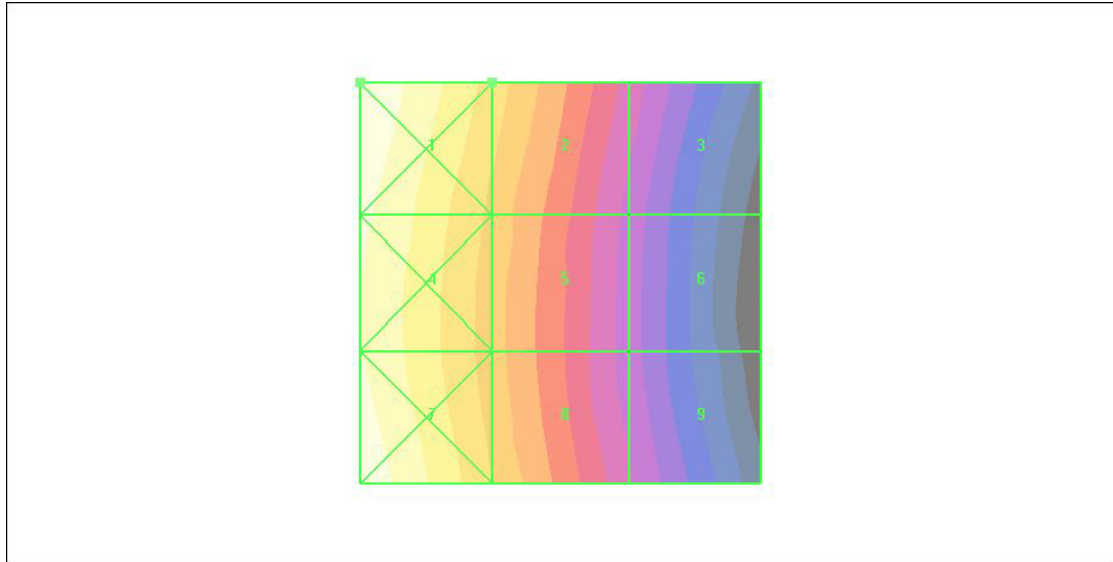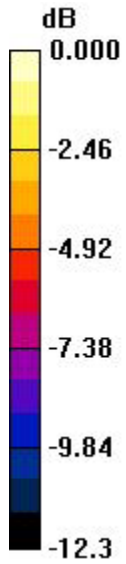

0 dB = 0.192A/m

Date/Time: 2010/12/3 08:41:53

Test Laboratory: Compliance Certification Services Inc.

HAC_H_SCAN_Device_WCDMA BAND V -Battery B**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device-Middle/Hearing**Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.137 A/m

Probe Modulation Factor = 1.24

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.080 A/m; Power Drift = 0.017 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.190 M4	0.137 M4	0.085 M4
Grid 4	Grid 5	Grid 6
0.176 M4	0.126 M4	0.077 M4
Grid 7	Grid 8	Grid 9
0.190 M4	0.133 M4	0.084 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43



M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:

Total = 0.190 A/m

H Category: M4

Location: 25, -25, 8.7 mm

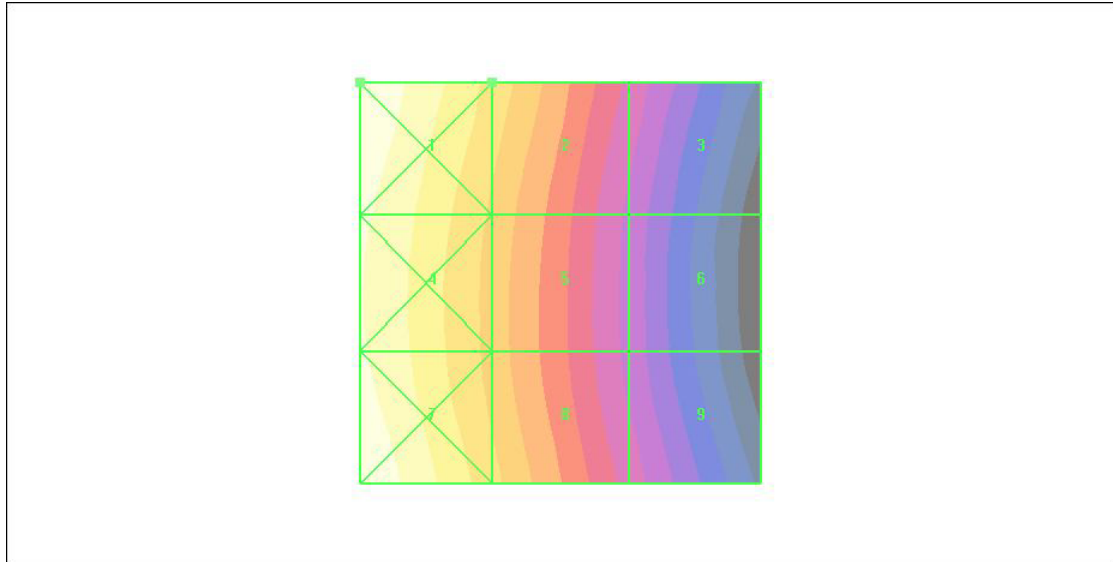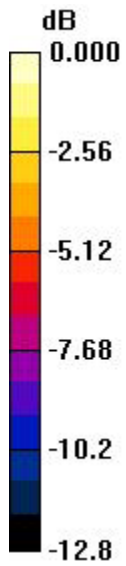

0 dB = 0.190A/m

Date/Time: 2010/12/3 08:47:45

Test Laboratory: Compliance Certification Services Inc.

HAC_H_SCAN_Device_WCDMA BAND V -Battery B**DUT: K5; Type: Mobile Phone; Serial: N/A**

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: H3DV6 - SN6163; ;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1027
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device-High/Hearing Aid**Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.142 A/m

Probe Modulation Factor = 1.24

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.083 A/m; Power Drift = -0.013 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.198 M4	0.142 M4	0.088 M4
Grid 4	Grid 5	Grid 6
0.183 M4	0.130 M4	0.079 M4
Grid 7	Grid 8	Grid 9
0.198 M4	0.138 M4	0.087 M4

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43



M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Cursor:

Total = 0.198 A/m

H Category: M4

Location: 25, -25, 8.7 mm

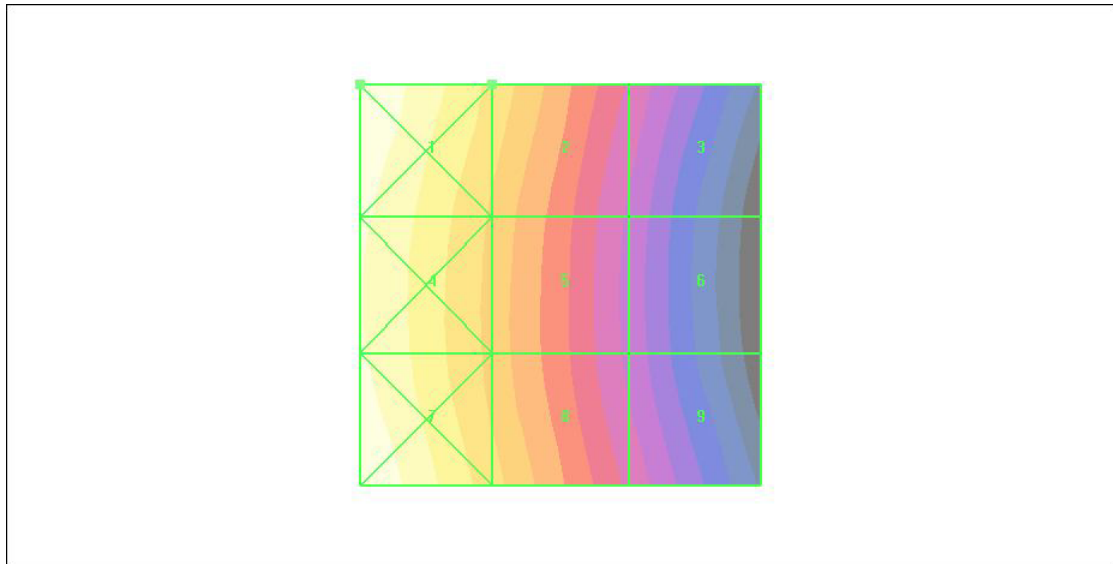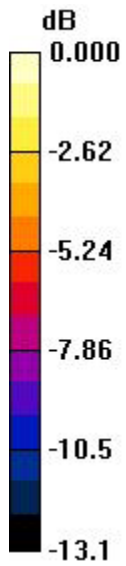

0 dB = 0.198A/m