

Test Laboratory: Compliance Certification Services Inc.

GSM 850 Right Head E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.907$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:



- Probe: EX3DV4 - SN3578; ConvF(8.44, 8.44, 8.44);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

GSM850 Right Cheek CH251/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.530 mW/g

GSM850 Right Cheek CH251/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 7.73 V/m; Power Drift = 0.089 dB
Peak SAR (extrapolated) = 0.691 W/kg
SAR(1 g) = 0.508 mW/g; SAR(10 g) = 0.356 mW/g
Maximum value of SAR (measured) = 0.646 mW/g

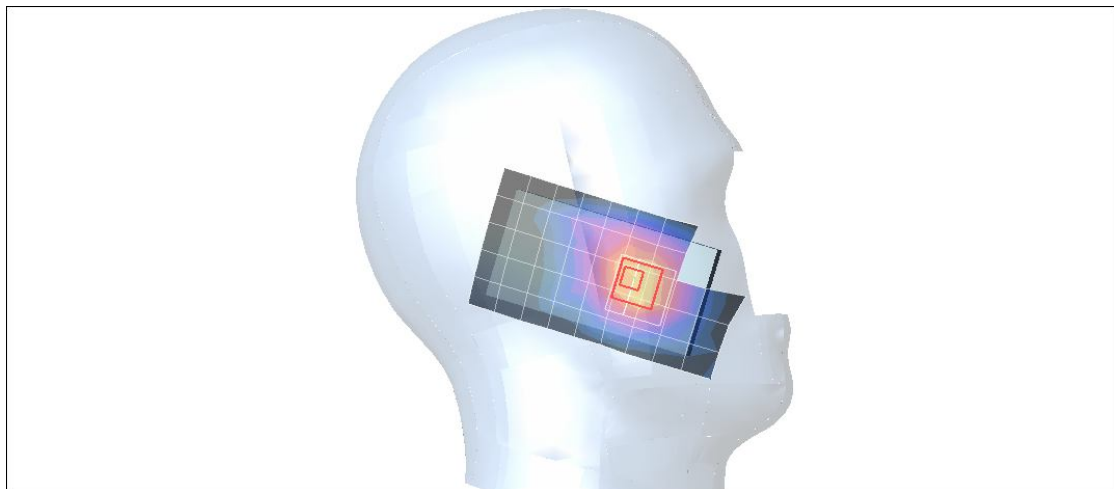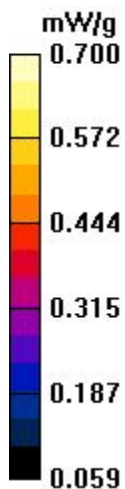

Test Laboratory: Compliance Certification Services Inc.

GSM 850 Right Head E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.907$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:



- Probe: EX3DV4 - SN3578; ConvF(8.44, 8.44, 8.44);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

GSM850 Right Tilted CH251/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.342 mW/g

GSM850 Right Tilted CH251/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 13.3 V/m; Power Drift = 0.037 dB
Peak SAR (extrapolated) = 0.442 W/kg
SAR(1 g) = 0.334 mW/g; SAR(10 g) = 0.234 mW/g
Maximum value of SAR (measured) = 0.397 mW/g

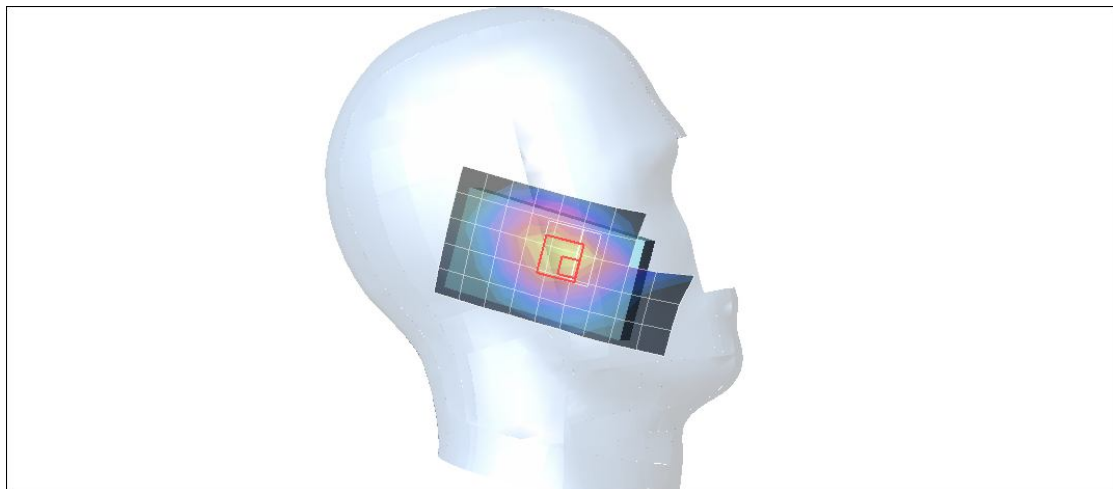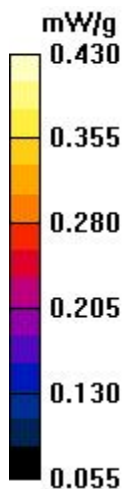

Test Laboratory: Compliance Certification Services Inc.

GSM 850 Left Head E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.907$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:



- Probe: EX3DV4 - SN3578; ConvF(8.44, 8.44, 8.44);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

GSM850 Left Cheek CH251/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.652 mW/g

GSM850 Left Cheek CH251/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 9.05 V/m; Power Drift = 0.029 dB
Peak SAR (extrapolated) = 0.772 W/kg
SAR(1 g) = 0.564 mW/g; SAR(10 g) = 0.385 mW/g
Maximum value of SAR (measured) = 0.716 mW/g

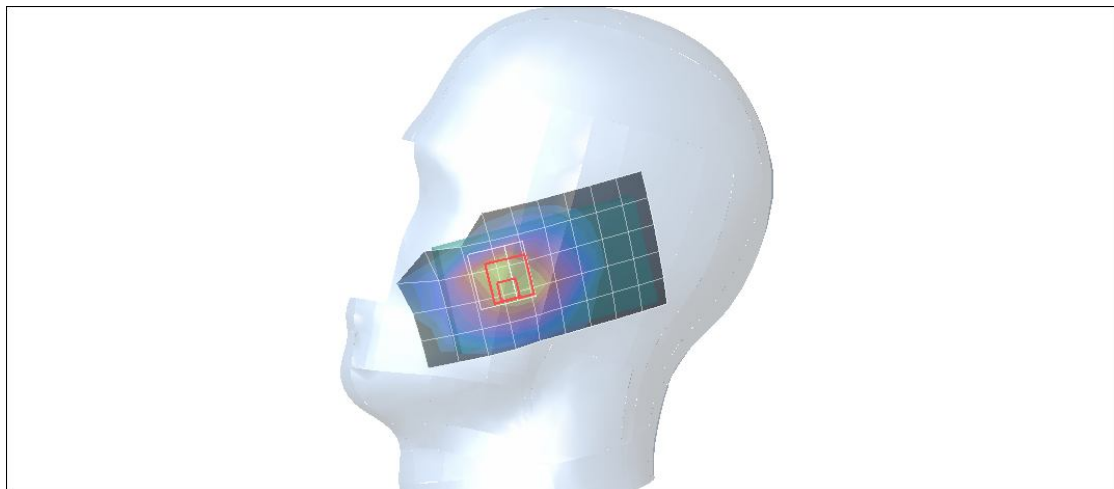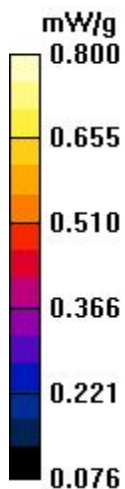

Test Laboratory: Compliance Certification Services Inc.

GSM 850 Left Head E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.907$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.44, 8.44, 8.44);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

GSM850 Left Tilted CH251/Area Scan (6x10x1):


Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.273 mW/g

GSM850 Left Tilted CH251/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 12.0 V/m; Power Drift = 0.020 dB
Peak SAR (extrapolated) = 0.345 W/kg
SAR(1 g) = 0.267 mW/g; SAR(10 g) = 0.202 mW/g
Maximum value of SAR (measured) = 0.326 mW/g

GSM850 Left Tilted CH251/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 12.0 V/m; Power Drift = 0.020 dB
Peak SAR (extrapolated) = 0.335 W/kg
SAR(1 g) = 0.123 mW/g; SAR(10 g) = 0.068 mW/g
Maximum value of SAR (measured) = 0.197 mW/g

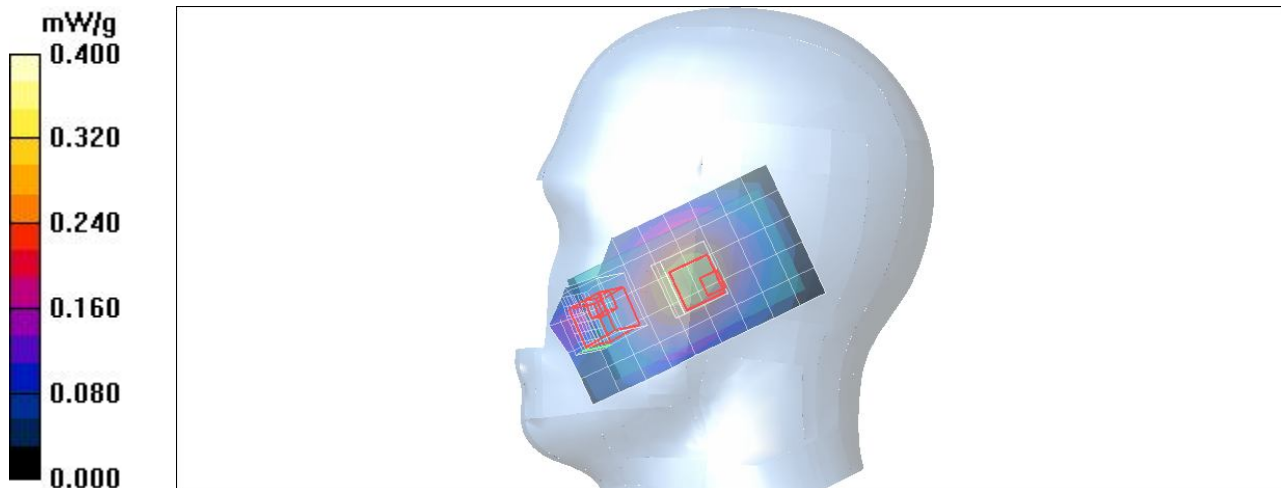

Test Laboratory: Compliance Certification Services Inc.

GSM 1900 -Right Head E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.05, 7.05, 7.05);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

GSM1900 Right Cheek CH661/Area Scan (6x10x1):



Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.311 mW/g

GSM1900 Right Cheek CH661/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.84 V/m; Power Drift = 0.081 dB
Peak SAR (extrapolated) = 0.444 W/kg
SAR(1 g) = 0.285 mW/g; SAR(10 g) = 0.164 mW/g
Maximum value of SAR (measured) = 0.357 mW/g

GSM1900 Right Cheek CH661/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.84 V/m; Power Drift = 0.081 dB
Peak SAR (extrapolated) = 0.365 W/kg
SAR(1 g) = 0.230 mW/g; SAR(10 g) = 0.137 mW/g
Maximum value of SAR (measured) = 0.290 mW/g

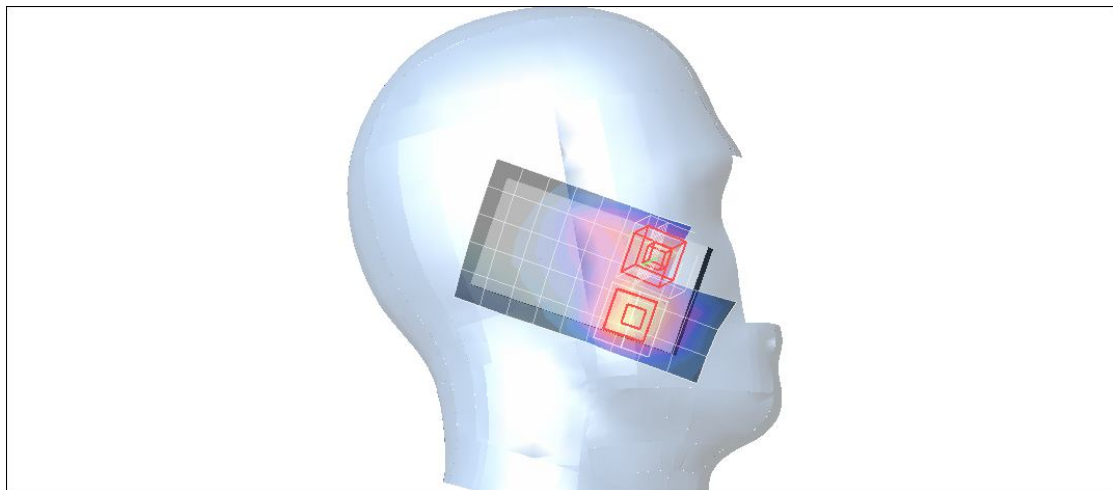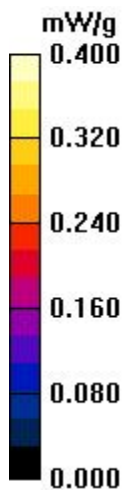

Test Laboratory: Compliance Certification Services Inc.

GSM 1900 -Right Head E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:



- Probe: EX3DV4 - SN3578; ConvF(7.05, 7.05, 7.05);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

GSM1900 Right Tilted CH661/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.154 mW/g

GSM1900 Right Tilted CH661/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 7.94 V/m; Power Drift = 0.017 dB
Peak SAR (extrapolated) = 0.216 W/kg
SAR(1 g) = 0.142 mW/g; SAR(10 g) = 0.089 mW/g
Maximum value of SAR (measured) = 0.175 mW/g

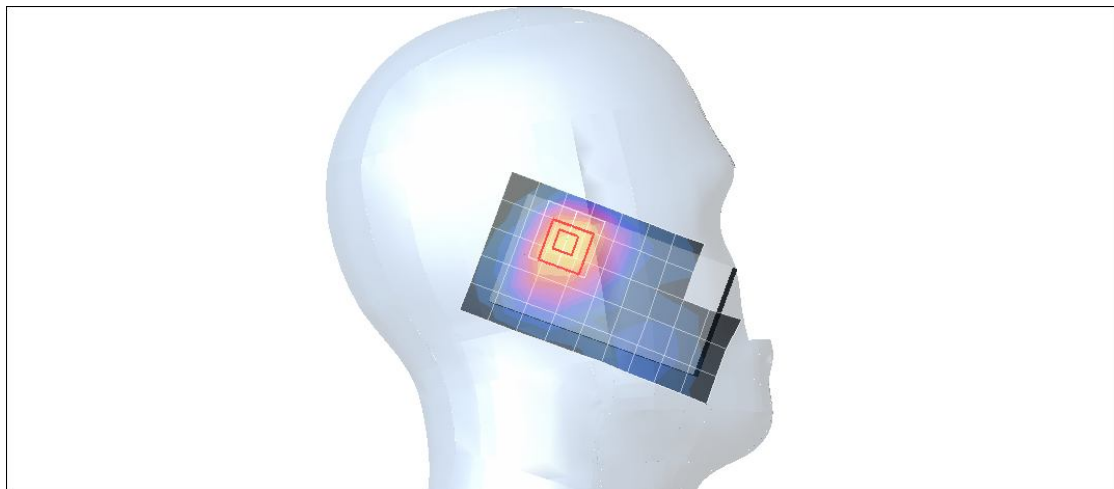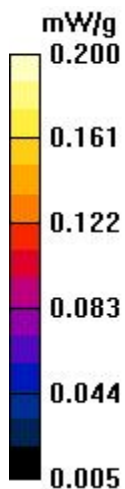

Test Laboratory: Compliance Certification Services Inc.

GSM 1900 -Left Head E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:



- Probe: EX3DV4 - SN3578; ConvF(7.05, 7.05, 7.05);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

GSM1900 Left Cheek CH661/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.507 mW/g

GSM1900 Left Cheek CH661/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.11 V/m; Power Drift = 0.183 dB
Peak SAR (extrapolated) = 0.756 W/kg
SAR(1 g) = 0.455 mW/g; SAR(10 g) = 0.249 mW/g
Maximum value of SAR (measured) = 0.549 mW/g

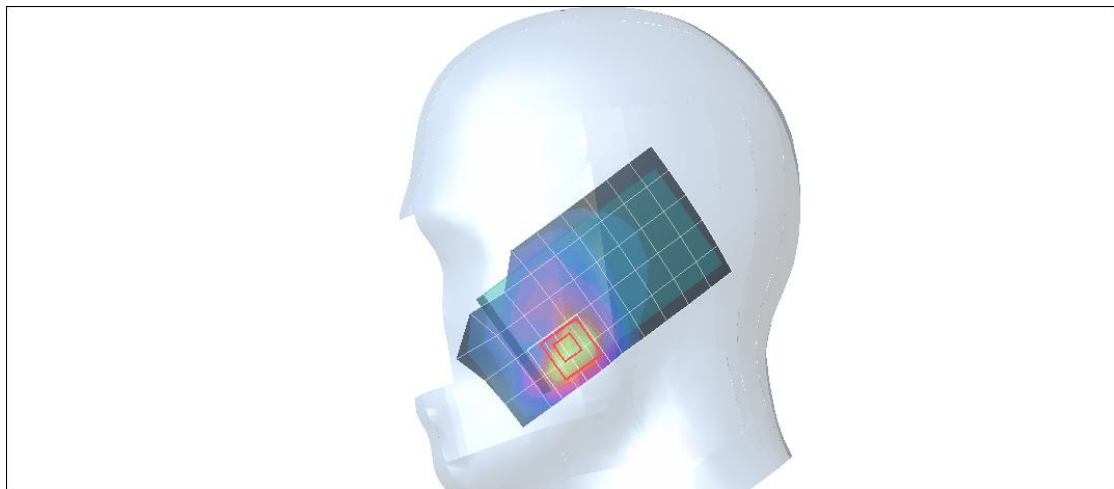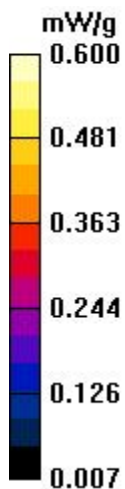

Test Laboratory: Compliance Certification Services Inc.

GSM 1900 -Left Head E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:



- Probe: EX3DV4 - SN3578; ConvF(7.05, 7.05, 7.05);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

GSM1900 Left Tilted CH661/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.124 mW/g

GSM1900 Left Tilted CH661/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 7.59 V/m; Power Drift = -0.043 dB
Peak SAR (extrapolated) = 0.164 W/kg
SAR(1 g) = 0.110 mW/g; SAR(10 g) = 0.068 mW/g
Maximum value of SAR (measured) = 0.130 mW/g

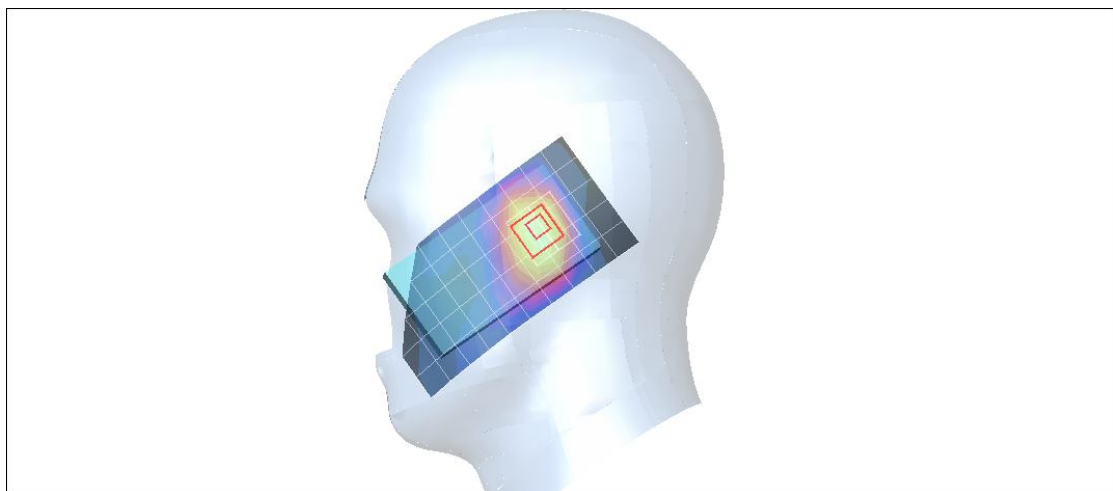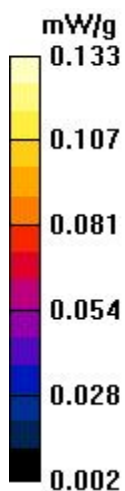

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band II -Right Head E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:



- Probe: EX3DV4 - SN3578; ConvF(7.05, 7.05, 7.05);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA Band II Right Cheek CH9262/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.562 mW/g

WCDMA Band II Right Cheek CH9262/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 6.48 V/m; Power Drift = 0.056 dB
Peak SAR (extrapolated) = 0.811 W/kg
SAR(1 g) = **0.529 mW/g**; SAR(10 g) = **0.305 mW/g**
Maximum value of SAR (measured) = 0.665 mW/g

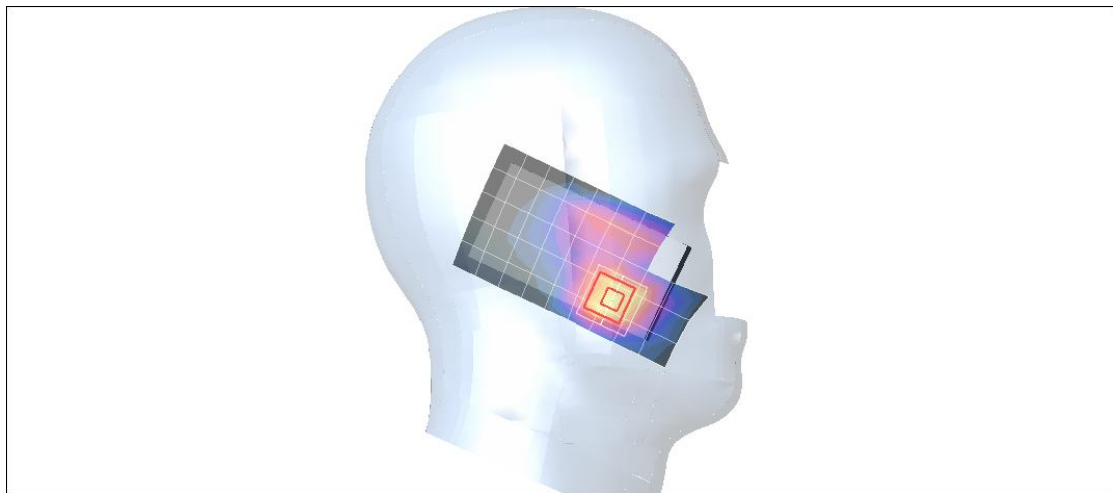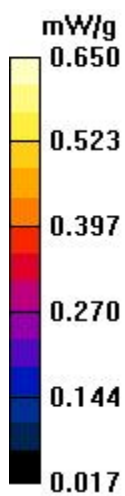

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band II -Right Head E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: WCDMA Band II; Frequency: 1852.4 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Air Temperature:24.6 deg C;Liquid Temperature:23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:



- Probe: EX3DV4 - SN3578; ConvF(7.05, 7.05, 7.05);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA Band II Right Tilted CH9262/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.216 mW/g

WCDMA Band II Right Tilted CH9262/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 10.8 V/m; Power Drift = 0.010 dB
Peak SAR (extrapolated) = 0.301 W/kg
SAR(1 g) = 0.197 mW/g; SAR(10 g) = 0.124 mW/g
Maximum value of SAR (measured) = 0.238 mW/g

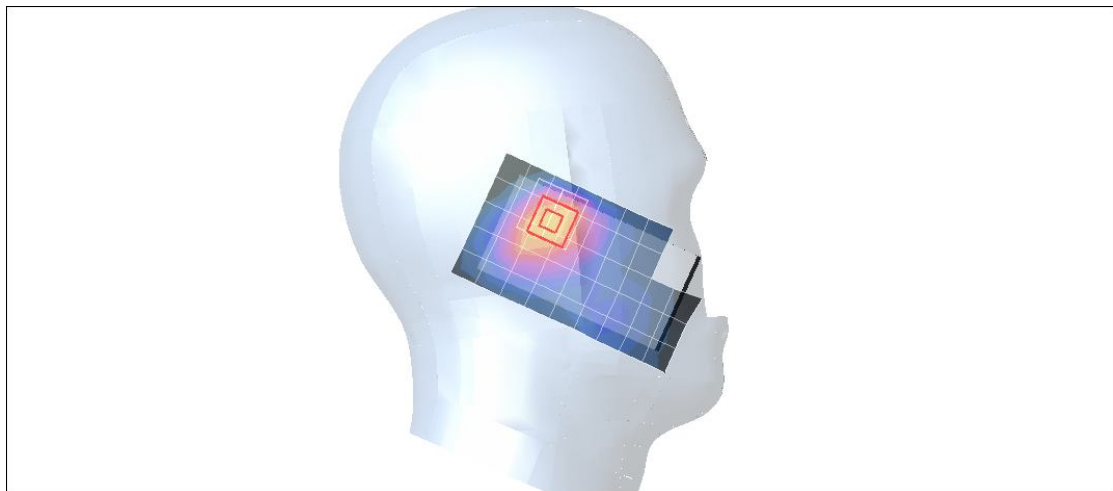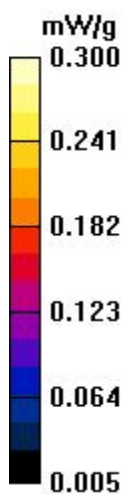

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band II -Left Head E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3578; ConvF(7.05, 7.05, 7.05);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA Band II Left Cheek CH9262/Area Scan (6x10x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.763 mW/g

WCDMA Band II Left Cheek CH9262/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm
Reference Value = 6.53 V/m; Power Drift = 0.124 dB
Peak SAR (extrapolated) = 1.06 W/kg
SAR(1 g) = **0.637 mW/g**; SAR(10 g) = 0.353 mW/g
Maximum value of SAR (measured) = 0.801 mW/g

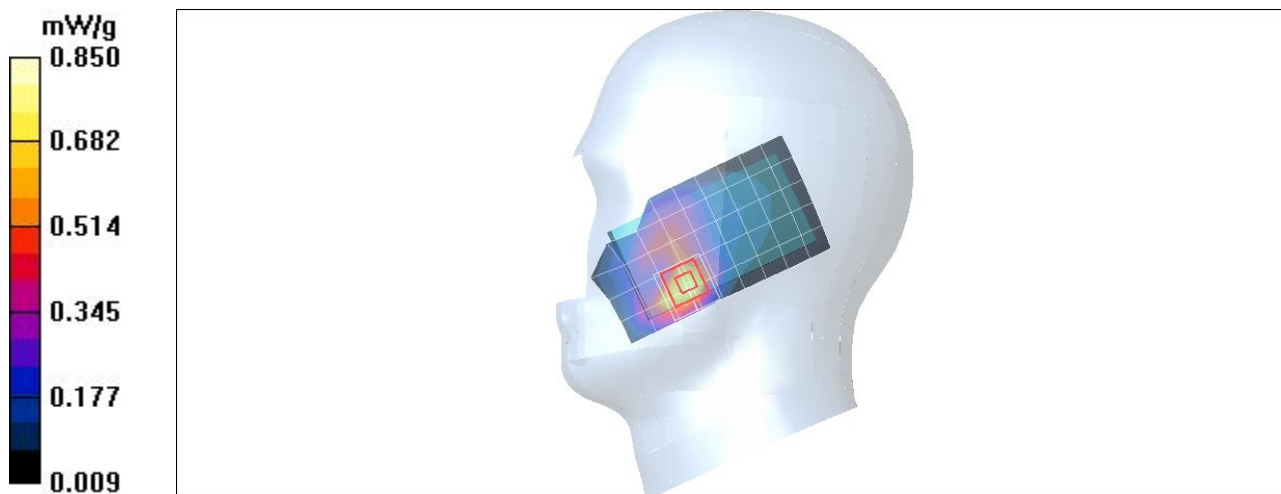

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band II -Left Head E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3578; ConvF(7.05, 7.05, 7.05);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA Band II Left Tilted CH9262/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.206 mW/g

WCDMA Band II Left Tilted CH9262/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 8.61 V/m; Power Drift = 0.020 dB
Peak SAR (extrapolated) = 0.279 W/kg
SAR(1 g) = 0.179 mW/g; SAR(10 g) = 0.109 mW/g
Maximum value of SAR (measured) = 0.221 mW/g

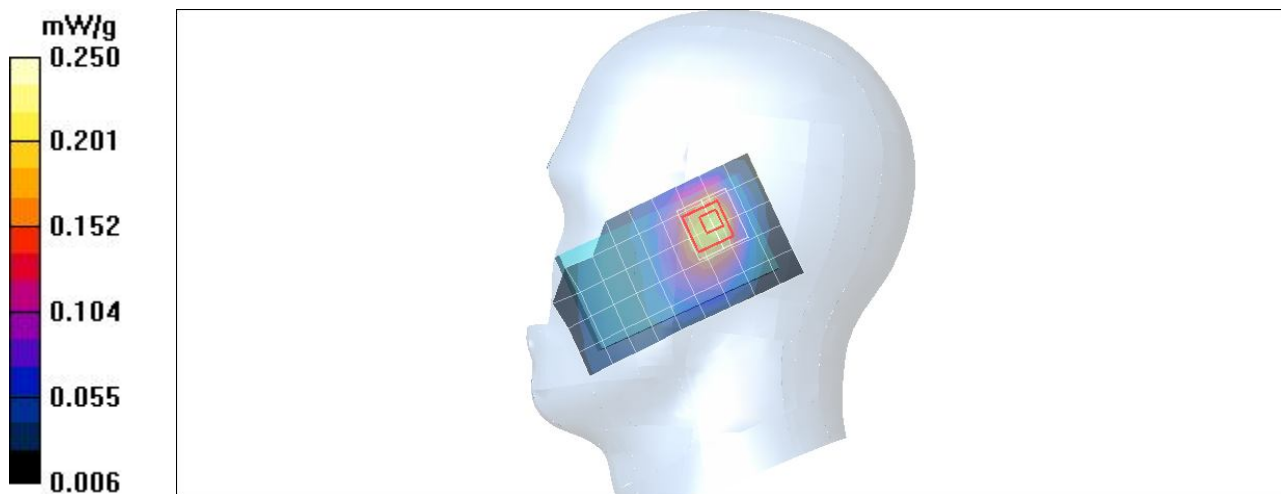

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band V -Right Head E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3578; ConvF(8.44, 8.44, 8.44);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA Band V Right Cheek CH4182/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.467 mW/g

WCDMA Band V Right Cheek CH4182/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 8.84 V/m; Power Drift = 0.143 dB
Peak SAR (extrapolated) = 0.547 W/kg
SAR(1 g) = 0.417 mW/g; SAR(10 g) = 0.297 mW/g
Maximum value of SAR (measured) = 0.479 mW/g

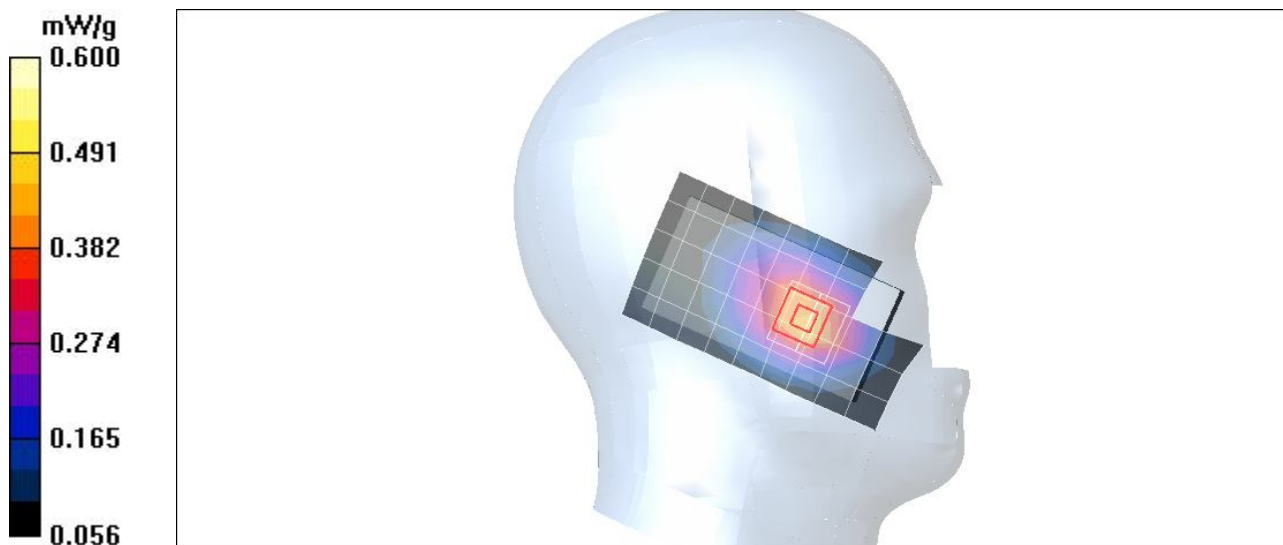

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band V -Right Head E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.44, 8.44, 8.44);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA Band V Right Tilted CH4182/Area Scan (6x10x1):



Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.297 mW/g

WCDMA Band V Right Tilted CH4182/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 14.0 V/m; Power Drift = 0.117 dB
Peak SAR (extrapolated) = 0.355 W/kg
SAR(1 g) = 0.278 mW/g; SAR(10 g) = 0.209 mW/g
Maximum value of SAR (measured) = 0.314 mW/g

WCDMA Band V Right Tilted CH4182/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 14.0 V/m; Power Drift = 0.117 dB
Peak SAR (extrapolated) = 0.271 W/kg
SAR(1 g) = 0.195 mW/g; SAR(10 g) = 0.125 mW/g
Maximum value of SAR (measured) = 0.244 mW/g

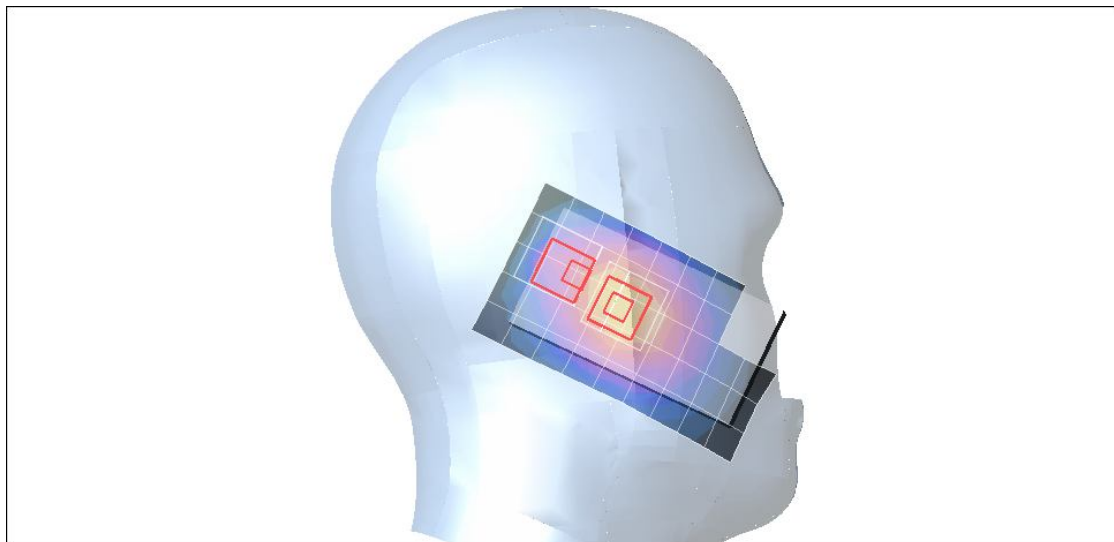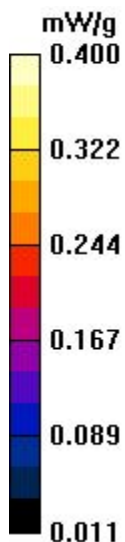

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band V -Left Head E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3578; ConvF(8.44, 8.44, 8.44);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA Band V Left Cheek CH4182/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.494 mW/g

WCDMA Band V Left Cheek CH4182/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 8.08 V/m; Power Drift = 0.020 dB
Peak SAR (extrapolated) = 0.594 W/kg
SAR(1 g) = 0.445 mW/g; SAR(10 g) = 0.316 mW/g
Maximum value of SAR (measured) = 0.511 mW/g

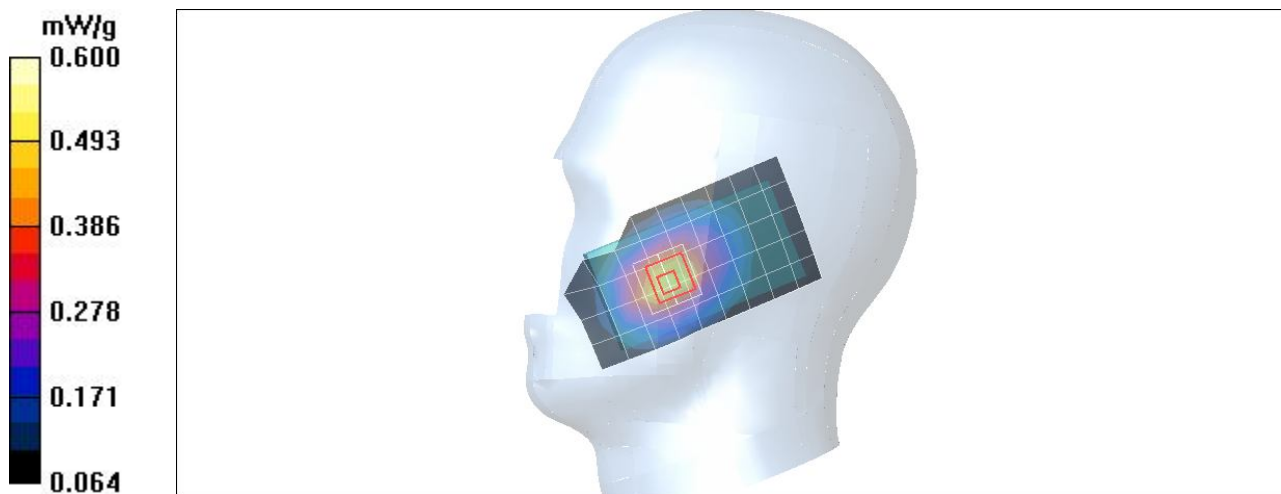

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band V -Left Head E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.44, 8.44, 8.44);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA Band V Left Tilted CH4182/Area Scan (6x10x1):



Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.303 mW/g

WCDMA Band V Left Tilted CH4182/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 12.5 V/m; Power Drift = 0.027 dB
Peak SAR (extrapolated) = 0.314 W/kg
SAR(1 g) = 0.240 mW/g; SAR(10 g) = 0.184 mW/g
Maximum value of SAR (measured) = 0.287 mW/g

WCDMA Band V Left Tilted CH4182/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 12.5 V/m; Power Drift = 0.027 dB
Peak SAR (extrapolated) = 0.236 W/kg
SAR(1 g) = 0.165 mW/g; SAR(10 g) = 0.109 mW/g
Maximum value of SAR (measured) = 0.209 mW/g

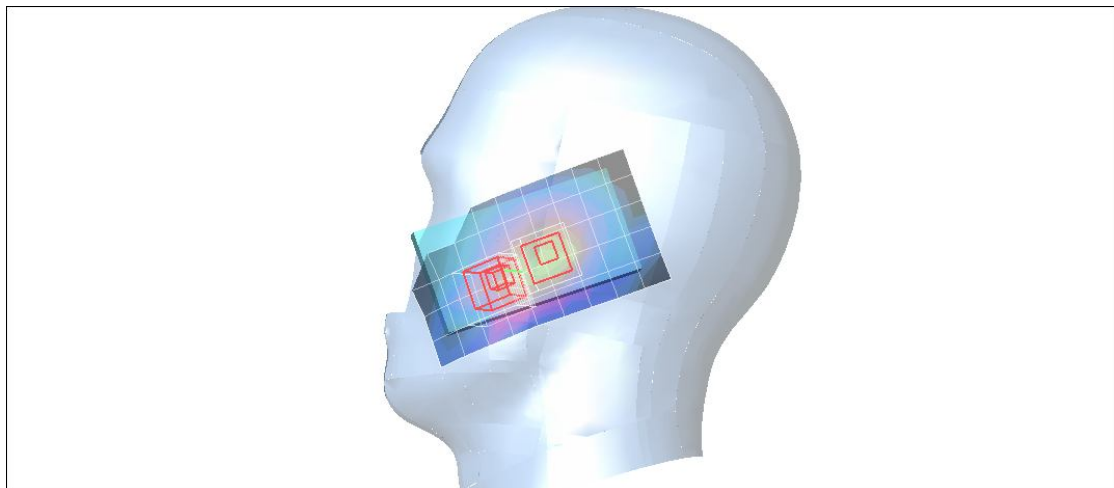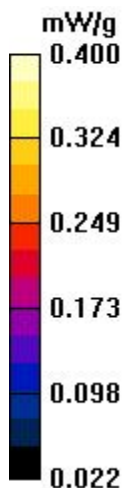

Test Laboratory: Compliance Certification Services Inc.

802.11b -Right Head E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

802.11b Right Cheek CH6/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.116 mW/g

802.11b Right Cheek CH6/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 7.67 V/m; Power Drift = 0.024 dB
Peak SAR (extrapolated) = 0.175 W/kg
SAR(1 g) = 0.090 mW/g; SAR(10 g) = 0.046 mW/g
Maximum value of SAR (measured) = 0.124 mW/g

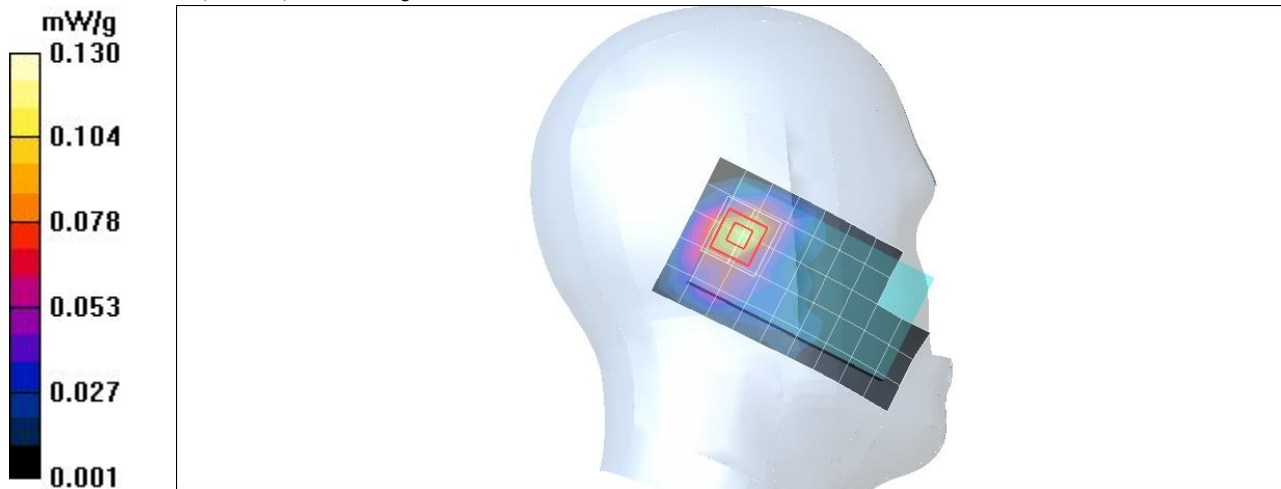

Test Laboratory: Compliance Certification Services Inc.

80211b -Right Head E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

802.11b Right Tilted CH6/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.104 mW/g

802.11b Right Tilted CH6/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 7.78 V/m; Power Drift = 0.056 dB
Peak SAR (extrapolated) = 0.164 W/kg
SAR(1 g) = 0.086 mW/g; SAR(10 g) = 0.044 mW/g
Maximum value of SAR (measured) = 0.116 mW/g

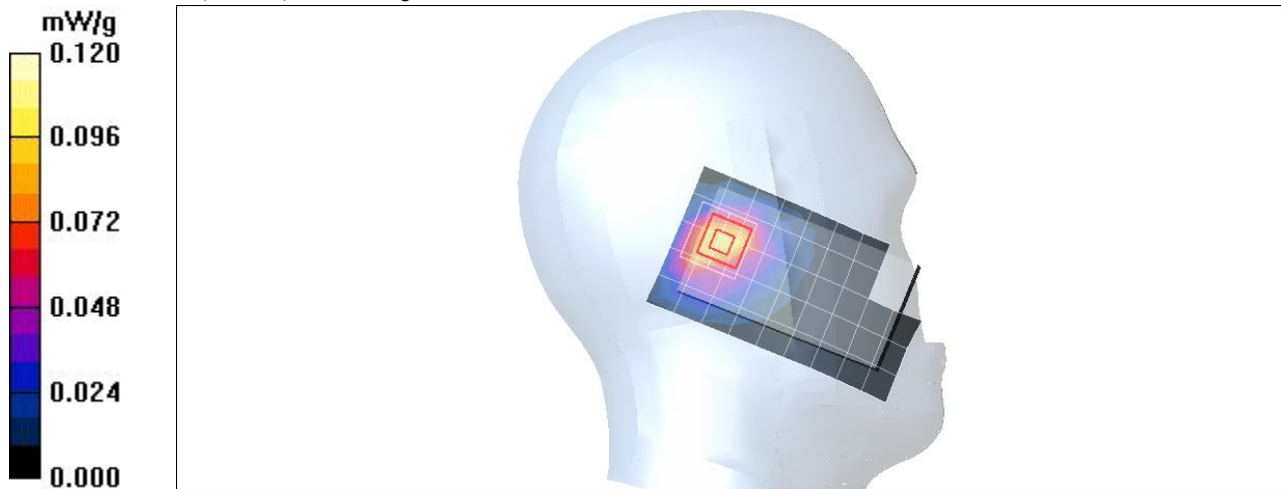

Test Laboratory: Compliance Certification Services Inc.

802.11b -Left Head E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

802.11b Left Cheek CH6/Area Scan (6x10x1):


Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.149 mW/g

802.11b Left Cheek CH6/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 9.43 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.271 W/kg
SAR(1 g) = 0.108 mW/g; SAR(10 g) = 0.047 mW/g
Maximum value of SAR (measured) = 0.162 mW/g

802.11b Left Cheek CH6/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 9.43 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.216 W/kg
SAR(1 g) = 0.077 mW/g; SAR(10 g) = 0.042 mW/g
Maximum value of SAR (measured) = 0.139 mW/g

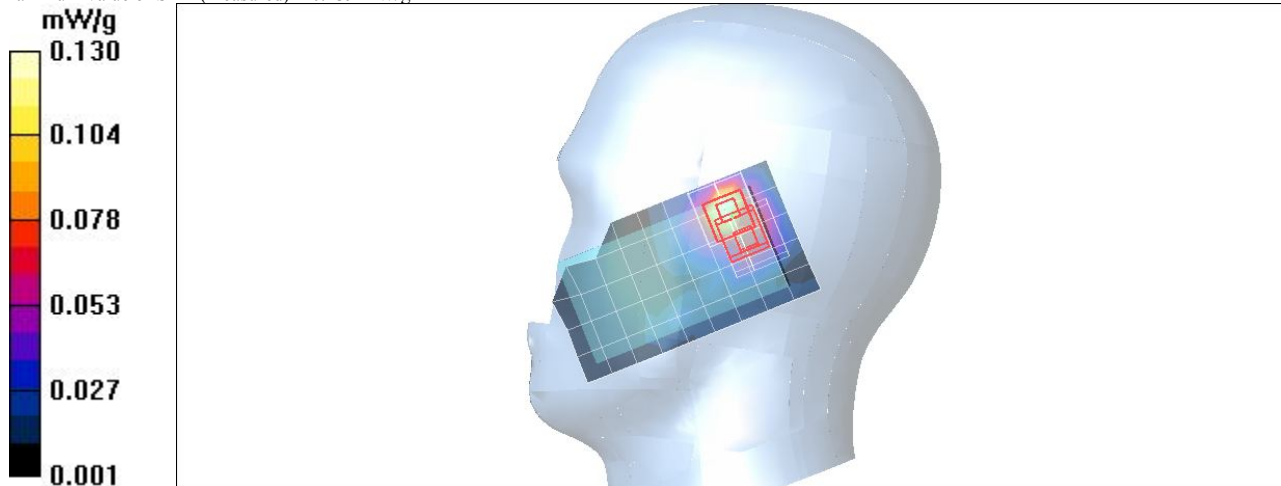

Test Laboratory: Compliance Certification Services Inc.

802.11b -Left Head E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

802.11b Left Tilted CH6/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.093 mW/g

802.11b Left Tilted CH6/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 7.91 V/m; Power Drift = 0.111 dB
Peak SAR (extrapolated) = 0.170 W/kg
SAR(1 g) = 0.085 mW/g; SAR(10 g) = 0.042 mW/g
Maximum value of SAR (measured) = 0.117 mW/g

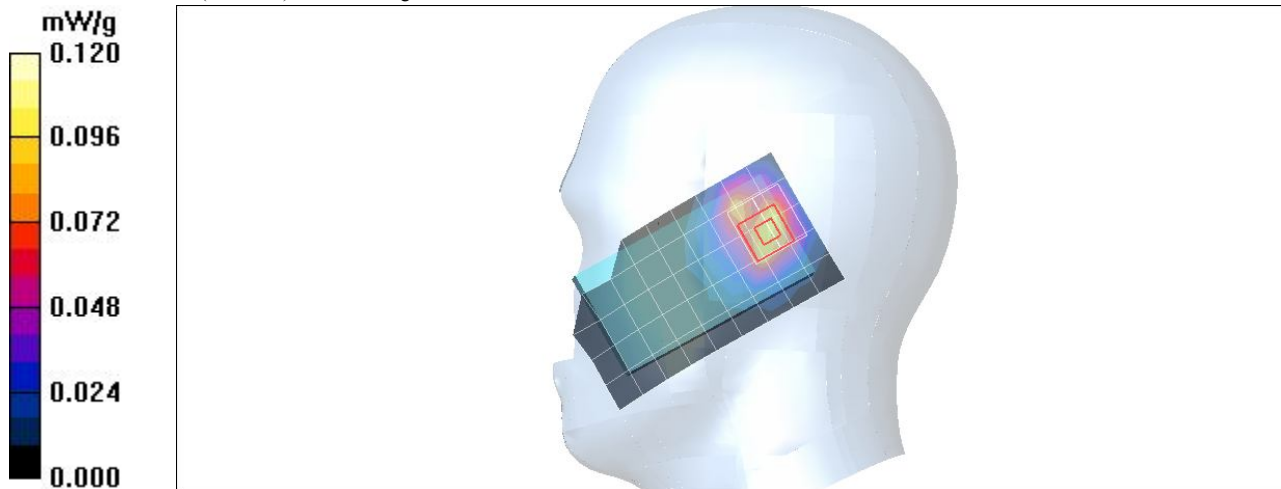

Test Laboratory: Compliance Certification Services Inc.

GSM 850 Body E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.55, 8.55, 8.55);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

GSM850 Body Face Up CH251/Area Scan (6x10x1):



Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.342 mW/g

GSM850 Body Face Up CH251/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 7.11 V/m; Power Drift = 0.064 dB
Peak SAR (extrapolated) = 0.490 W/kg
SAR(1 g) = 0.277 mW/g; SAR(10 g) = 0.187 mW/g
Maximum value of SAR (measured) = 0.366 mW/g

GSM850 Body Face Up CH251/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 7.11 V/m; Power Drift = 0.064 dB
Peak SAR (extrapolated) = 0.459 W/kg
SAR(1 g) = 0.311 mW/g; SAR(10 g) = 0.217 mW/g
Maximum value of SAR (measured) = 0.402 mW/g

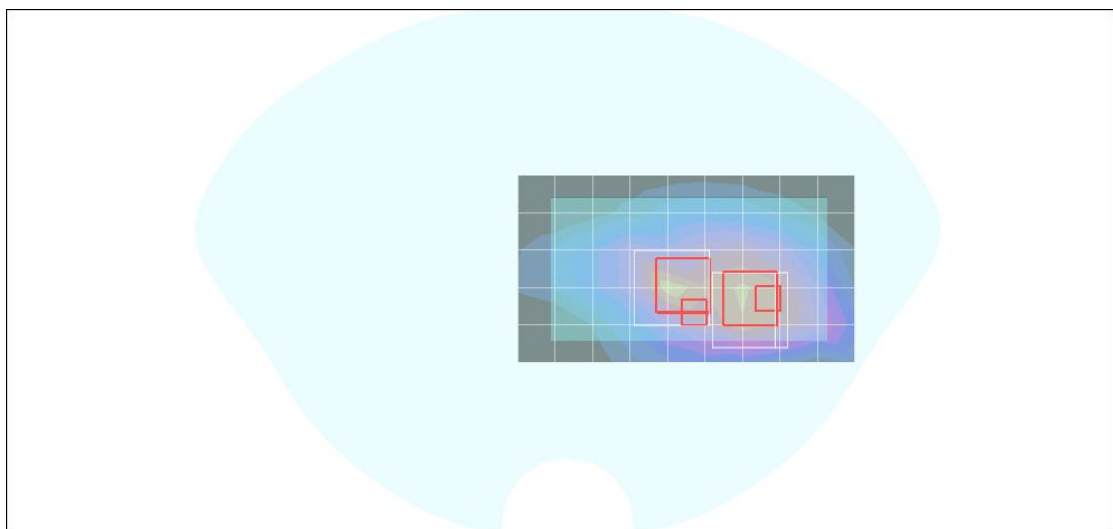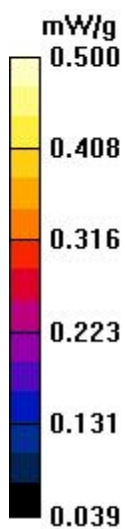

Test Laboratory: Compliance Certification Services Inc.

GSM 850 Body E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:



- Probe: EX3DV4 - SN3578; ConvF(8.55, 8.55, 8.55);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

GSM850 Body Face Down CH251/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.627 mW/g

GSM850 Body Face Down CH251/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 10.7 V/m; Power Drift = -0.056 dB
Peak SAR (extrapolated) = 0.753 W/kg
SAR(1 g) = 0.538 mW/g; SAR(10 g) = 0.390 mW/g
Maximum value of SAR (measured) = 0.652 mW/g

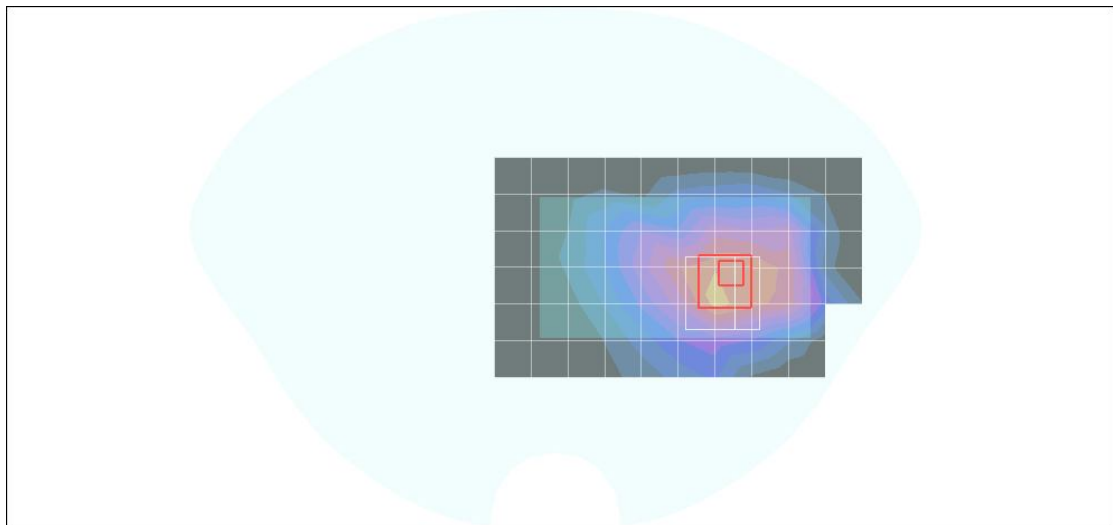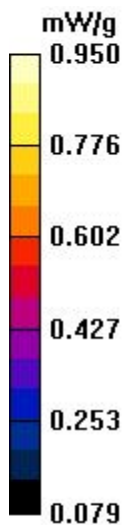

Test Laboratory: Compliance Certification Services Inc.

GPRS 850 Body E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: GPRS 850; Frequency: 848.8 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:



- Probe: EX3DV4 - SN3578; ConvF(8.55, 8.55, 8.55);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS850 Body Face Up CH251/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.529 mW/g

GPRS850 Body Face Up CH251/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 8.48 V/m; Power Drift = -0.075 dB
Peak SAR (extrapolated) = 0.653 W/kg
SAR(1 g) = 0.435 mW/g; SAR(10 g) = 0.306 mW/g
Maximum value of SAR (measured) = 0.591 mW/g

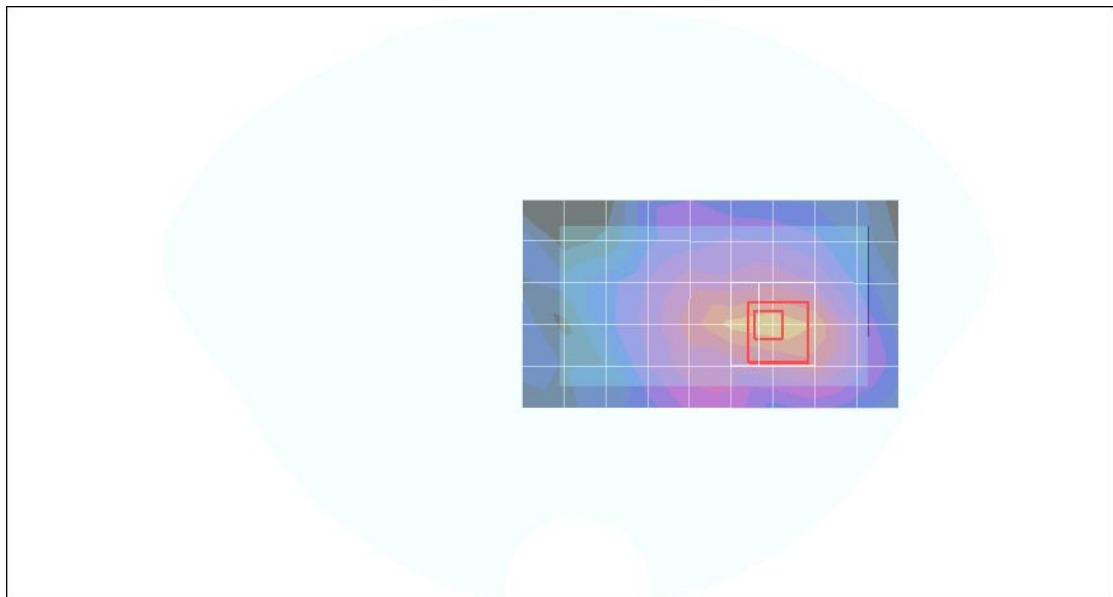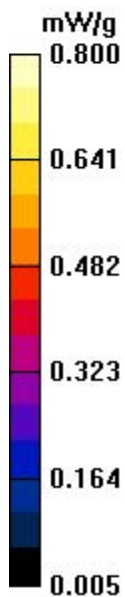

Test Laboratory: Compliance Certification Services Inc.

GPRS 850 Body E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: GPRS 850; Frequency: 848.8 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:



- Probe: EX3DV4 - SN3578; ConvF(8.55, 8.55, 8.55);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS850 Body Face Down CH251/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.838 mW/g

GPRS850 Body Face Down CH251/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 10.9 V/m; Power Drift = -0.036 dB
Peak SAR (extrapolated) = 1.20 W/kg
SAR(1 g) = 0.714 mW/g; SAR(10 g) = 0.520 mW/g
Maximum value of SAR (measured) = 0.827 mW/g

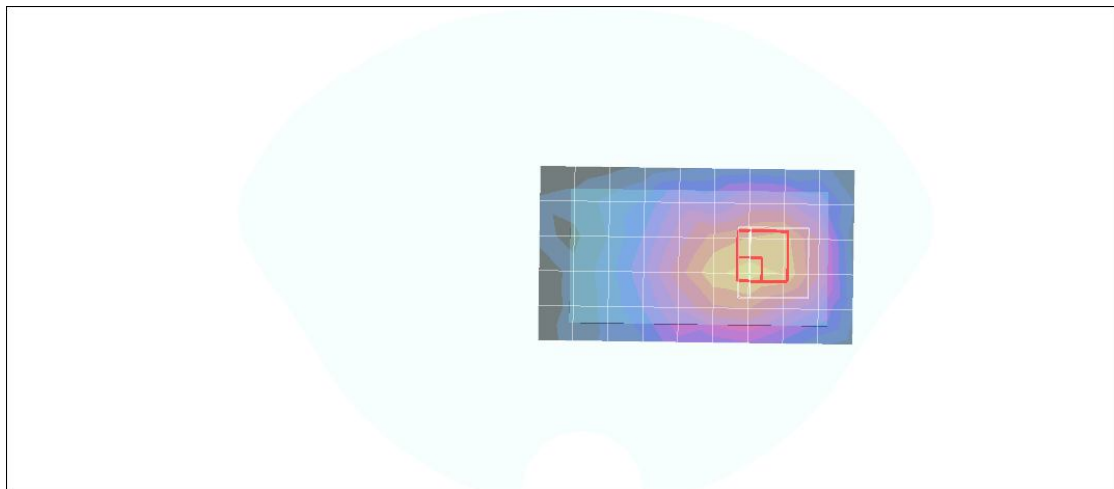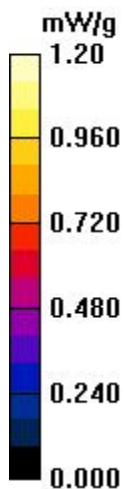

Test Laboratory: Compliance Certification Services Inc.

EGPRS 850 Body E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: EGPRS 850; Frequency: 848.8 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:



- Probe: EX3DV4 - SN3578; ConvF(8.55, 8.55, 8.55);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

EGPRS850 Body Face Up CH251/Area Scan 2 (7x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.133 mW/g

EGPRS850 Body Face Up CH251/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.57 V/m; Power Drift = 0.167 dB
Peak SAR (extrapolated) = 0.367 W/kg
SAR(1 g) = 0.185 mW/g; SAR(10 g) = 0.106 mW/g
Maximum value of SAR (measured) = 0.245 mW/g

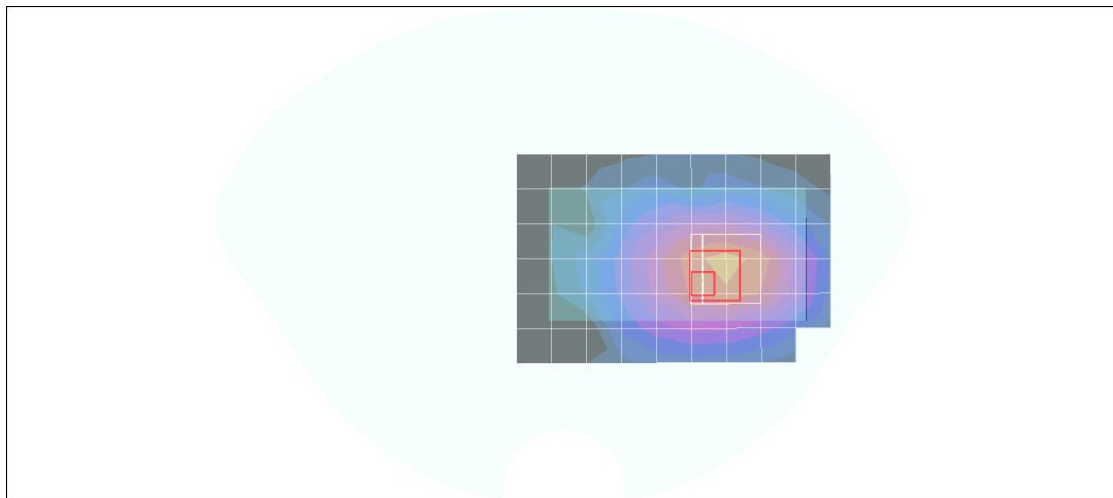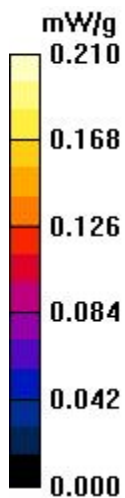

Test Laboratory: Compliance Certification Services Inc.

EGPRS 850 Body E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: EGPRS 850; Frequency: 848.8 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.55, 8.55, 8.55);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

EGPRS850 Body Face Down CH251/Area Scan (6x10x1):


Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.293 mW/g

EGPRS850 Body Face Down CH251/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 13.6 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 1.64 W/kg
SAR(1 g) = 0.269 mW/g; SAR(10 g) = 0.171 mW/g
Maximum value of SAR (measured) = 0.335 mW/g

EGPRS850 Body Face Down CH251/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 13.6 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.546 W/kg
SAR(1 g) = 0.228 mW/g; SAR(10 g) = 0.163 mW/g
Maximum value of SAR (measured) = 0.315 mW/g

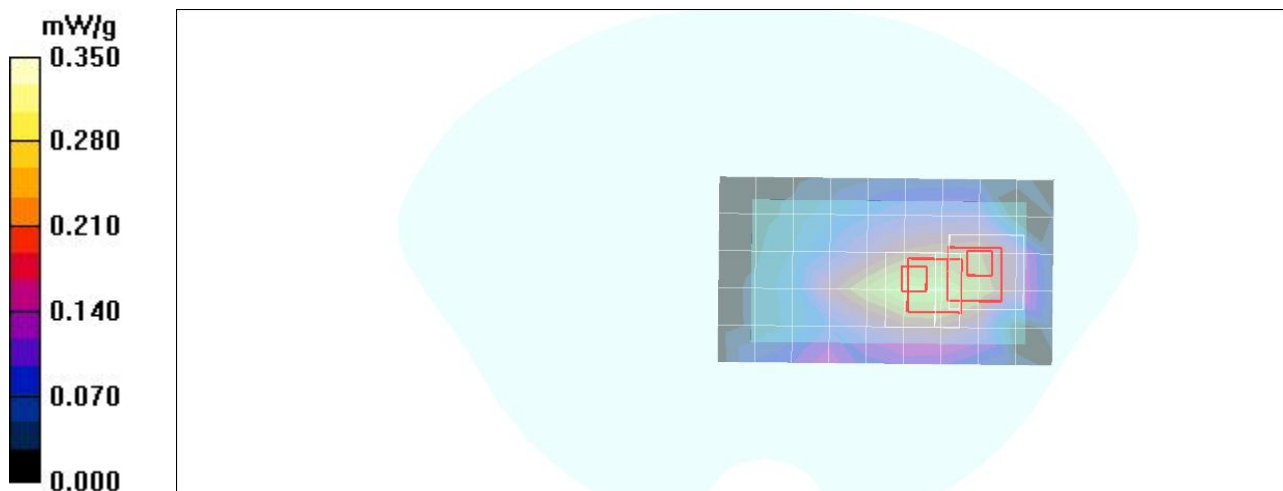

Test Laboratory: Compliance Certification Services Inc.

GSM 1900 Body E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.7, 6.7, 6.7);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

GSM1900 Body Face Up CH661/Area Scan (6x10x1):


Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.318 mW/g

GSM1900 Body Face Up CH661/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.62 V/m; Power Drift = 0.055 dB
Peak SAR (extrapolated) = 0.397 W/kg
SAR(1 g) = 0.205 mW/g; SAR(10 g) = 0.091 mW/g
Maximum value of SAR (measured) = 0.366 mW/g

GSM1900 Body Face Up CH661/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.62 V/m; Power Drift = 0.055 dB
Peak SAR (extrapolated) = 0.738 W/kg
SAR(1 g) = 0.078 mW/g; SAR(10 g) = 0.033 mW/g
Maximum value of SAR (measured) = 0.354 mW/g

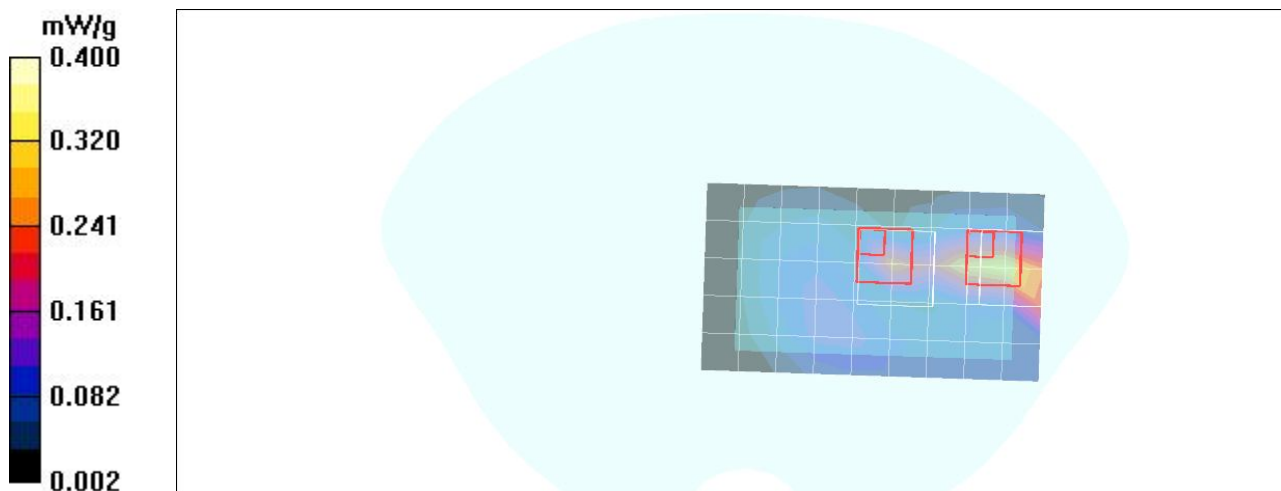

Test Laboratory: Compliance Certification Services Inc.

GSM 1900 Body E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.7, 6.7, 6.7);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

GSM1900 Body Face Down CH661/Area Scan (6x10x1):


Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.401 mW/g

GSM1900 Body Face Down CH661/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 9.12 V/m; Power Drift = -0.025 dB
Peak SAR (extrapolated) = 1.11 W/kg
SAR(1 g) = 0.376 mW/g; SAR(10 g) = 0.225 mW/g
Maximum value of SAR (measured) = 0.583 mW/g

GSM1900 Body Face Down CH661/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 9.12 V/m; Power Drift = -0.025 dB
Peak SAR (extrapolated) = 0.885 W/kg
SAR(1 g) = 0.356 mW/g; SAR(10 g) = 0.204 mW/g
Maximum value of SAR (measured) = 0.493 mW/g

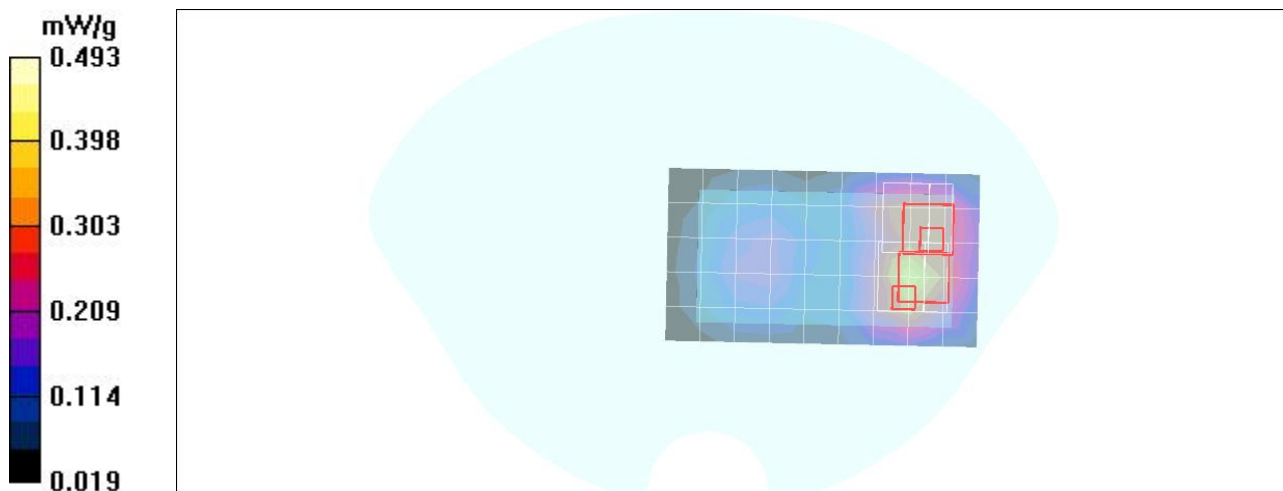

Test Laboratory: Compliance Certification Services Inc.

GPRS 1900 Body E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.7, 6.7, 6.7);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS1900 Body Face Up CH661/Area Scan (7x11x1):


Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.355 mW/g

GPRS1900 Body Face Up CH661/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 12.5 V/m; Power Drift = 0.097 dB
Peak SAR (extrapolated) = 1.31 W/kg
SAR(1 g) = 0.240 mW/g; SAR(10 g) = 0.149 mW/g
Maximum value of SAR (measured) = 0.427 mW/g

GPRS1900 Body Face Up CH661/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 12.5 V/m; Power Drift = 0.097 dB
Peak SAR (extrapolated) = 0.566 W/kg
SAR(1 g) = 0.204 mW/g; SAR(10 g) = 0.128 mW/g
Maximum value of SAR (measured) = 0.356 mW/g

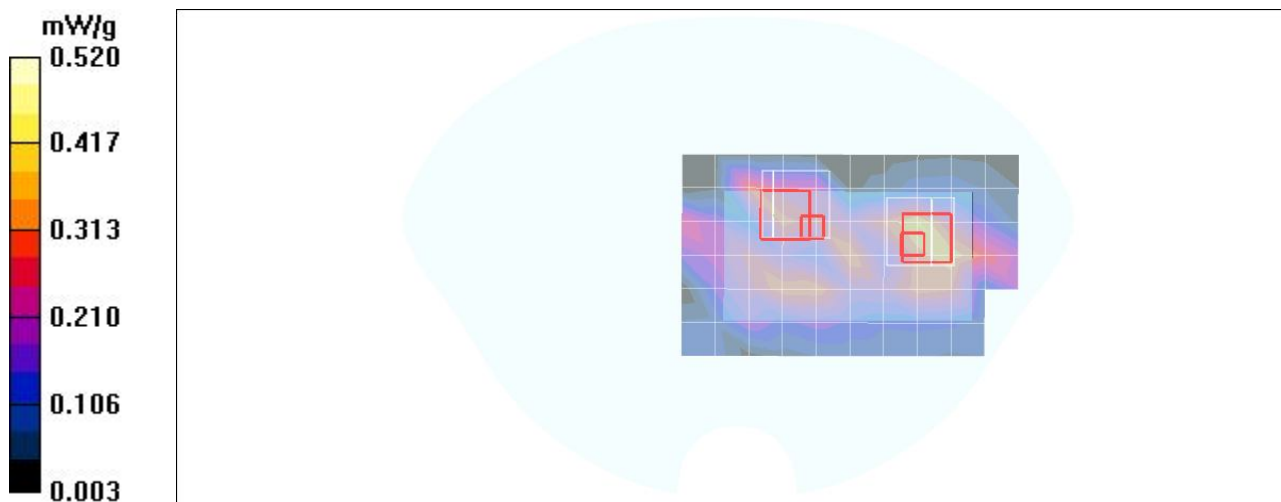

Test Laboratory: Compliance Certification Services Inc.

GPRS 1900 Body E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.7, 6.7, 6.7);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS1900 Body Face Down CH661/Area Scan (6x10x1):


Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.598 mW/g

GPRS1900 Body Face Down CH661/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 14.7 V/m; Power Drift = -0.046 dB
Peak SAR (extrapolated) = 0.969 W/kg
SAR(1 g) = 0.476 mW/g; SAR(10 g) = 0.268 mW/g
Maximum value of SAR (measured) = 0.617 mW/g

GPRS1900 Body Face Down CH661/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 14.7 V/m; Power Drift = -0.046 dB
Peak SAR (extrapolated) = 1.11 W/kg
SAR(1 g) = 0.517 mW/g; SAR(10 g) = 0.286 mW/g
Maximum value of SAR (measured) = 0.722 mW/g

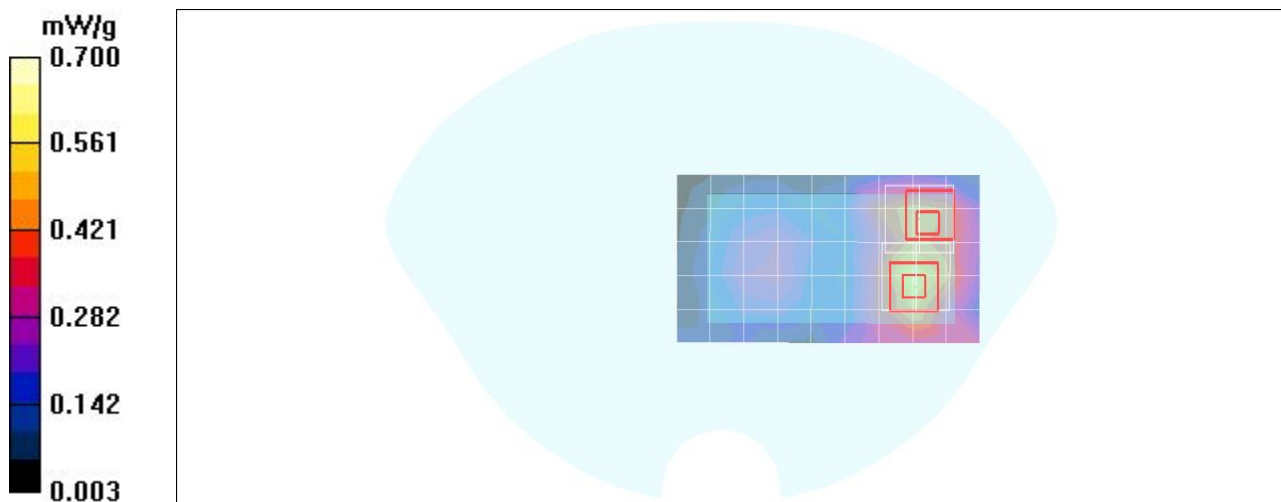

Test Laboratory: Compliance Certification Services Inc.

EGPRS 1900 Body E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: EGPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.7, 6.7, 6.7);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

EGPRS1900 Body Face Up CH661/Area Scan 2 (7x11x1):


Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.118 mW/g

EGPRS1900 Body Face Up CH661/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.93 V/m; Power Drift = -0.003 dB
Peak SAR (extrapolated) = 0.606 W/kg
SAR(1 g) = 0.174 mW/g; SAR(10 g) = 0.084 mW/g
Maximum value of SAR (measured) = 0.395 mW/g

EGPRS1900 Body Face Up CH661/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.93 V/m; Power Drift = -0.003 dB
Peak SAR (extrapolated) = 0.381 W/kg
SAR(1 g) = 0.100 mW/g; SAR(10 g) = 0.051 mW/g
Maximum value of SAR (measured) = 0.350 mW/g

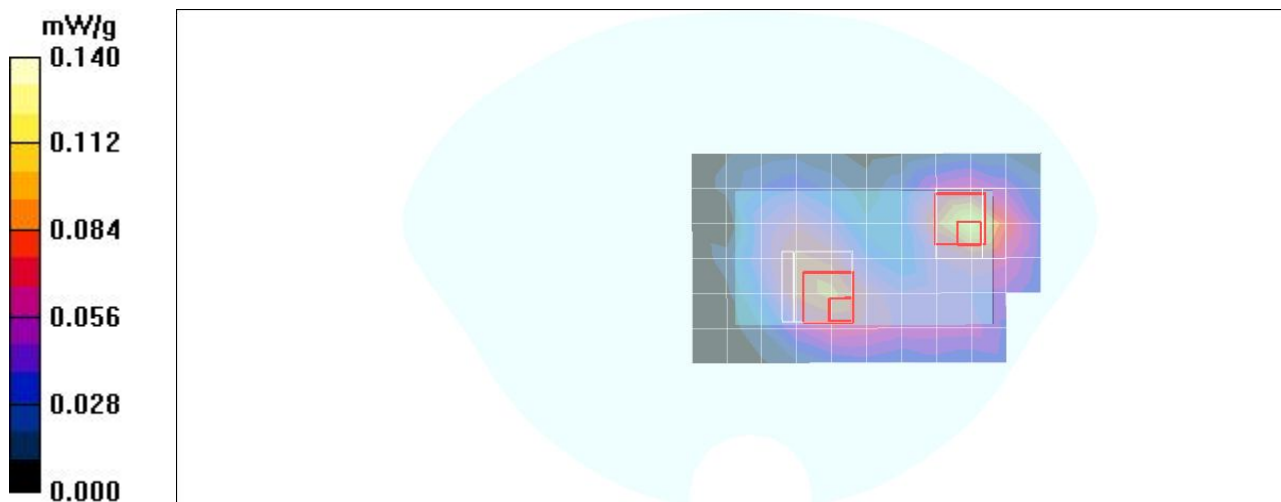

Test Laboratory: Compliance Certification Services Inc.

EGPRS 1900 Body E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: EGPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.7, 6.7, 6.7);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

EGPRS1900 Body Face Down CH661/Area Scan (7x11x1):


Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.269 mW/g

EGPRS1900 Body Face Down CH661/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 7.34 V/m; Power Drift = 0.008 dB
Peak SAR (extrapolated) = 0.568 W/kg
SAR(1 g) = 0.221 mW/g; SAR(10 g) = 0.124 mW/g
Maximum value of SAR (measured) = 0.283 mW/g

EGPRS1900 Body Face Down CH661/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 7.34 V/m; Power Drift = 0.008 dB
Peak SAR (extrapolated) = 0.648 W/kg
SAR(1 g) = 0.191 mW/g; SAR(10 g) = 0.114 mW/g
Maximum value of SAR (measured) = 0.242 mW/g

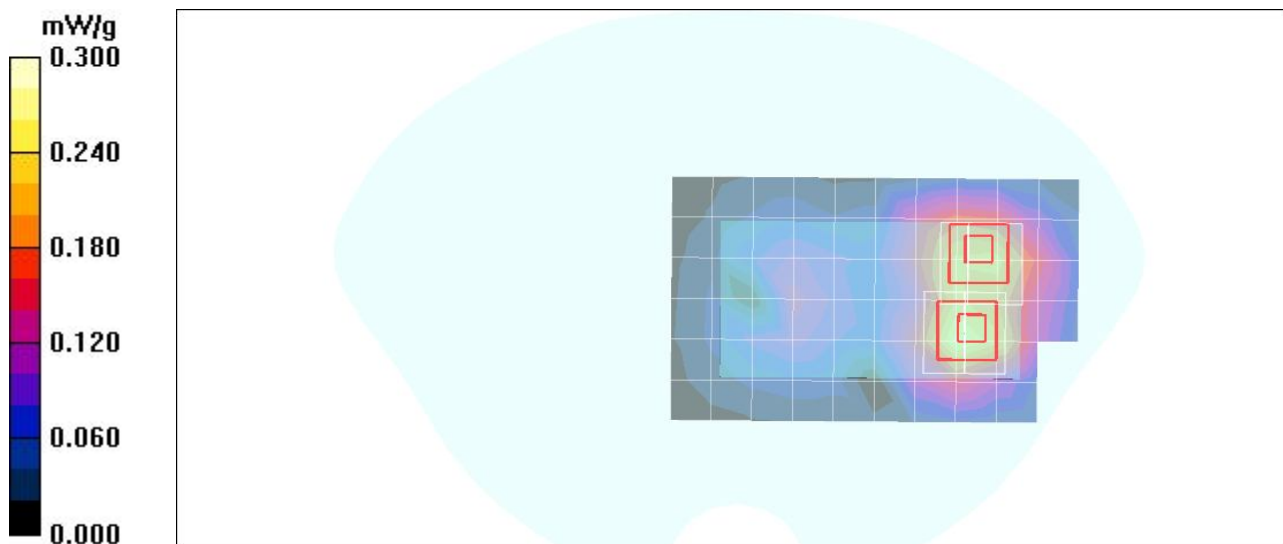

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band II Body E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.7, 6.7, 6.7);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA Band II Body Face Up CH9262/Area Scan (6x10x1):


Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.258 mW/g

WCDMA Band II Body Face Up CH9262/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 8.73 V/m; Power Drift = 0.088 dB
Peak SAR (extrapolated) = 0.377 W/kg
SAR(1 g) = 0.221 mW/g; SAR(10 g) = 0.123 mW/g
Maximum value of SAR (measured) = 0.284 mW/g

WCDMA Band II Body Face Up CH9262/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 8.73 V/m; Power Drift = 0.088 dB
Peak SAR (extrapolated) = 0.269 W/kg
SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.112 mW/g
Maximum value of SAR (measured) = 0.215 mW/g

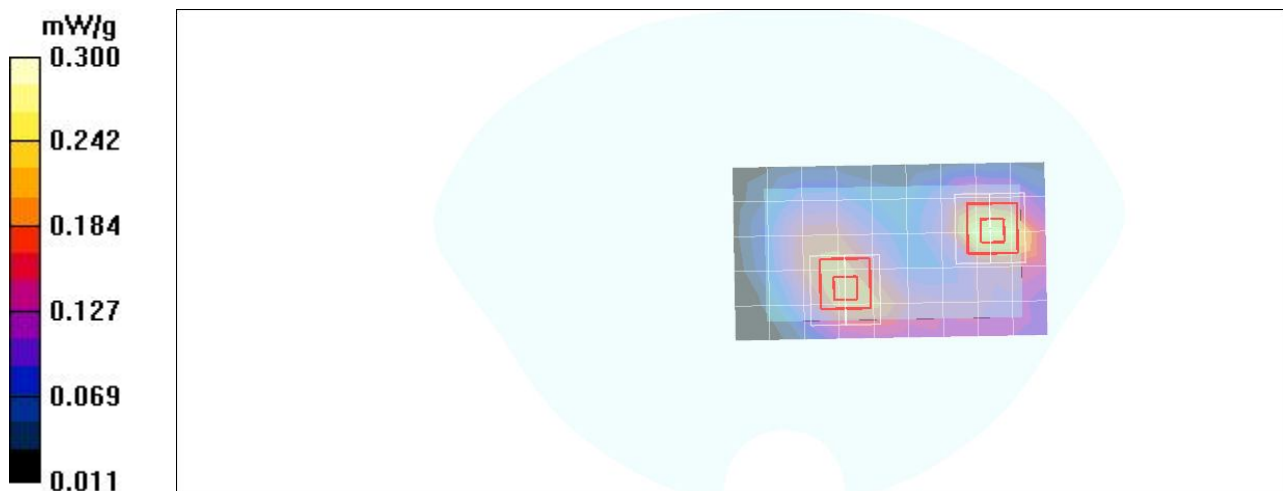

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band II Body E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.7, 6.7, 6.7);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA Band II Body Face Down CH9262/Area Scan (6x10x1):



Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.800 mW/g

WCDMA Band II Body Face Down CH9262/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 11.4 V/m; Power Drift = 0.009 dB
Peak SAR (extrapolated) = 1.07 W/kg
SAR(1 g) = 0.636 mW/g; SAR(10 g) = 0.367 mW/g
Maximum value of SAR (measured) = 0.811 mW/g

WCDMA Band II Body Face Down CH9262/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 11.4 V/m; Power Drift = 0.009 dB
Peak SAR (extrapolated) = 1.35 W/kg
SAR(1 g) = 0.495 mW/g; SAR(10 g) = 0.310 mW/g
Maximum value of SAR (measured) = 0.658 mW/g

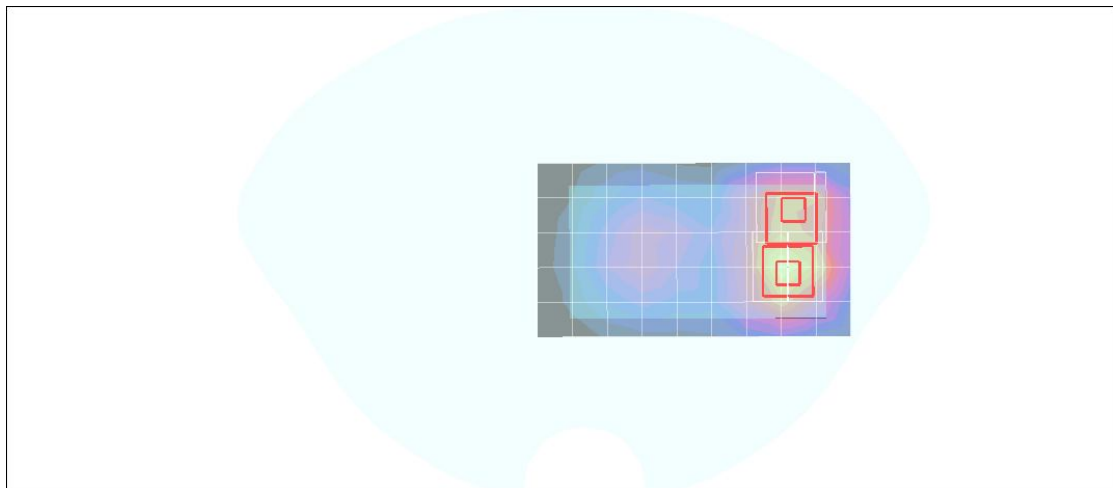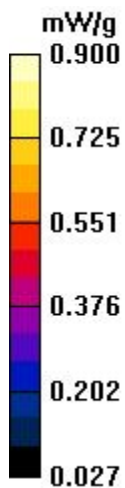

Test Laboratory: Compliance Certification Services Inc.

HSDPA Band II Body E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: HSDPA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:



- Probe: EX3DV4 - SN3578; ConvF(6.7, 6.7, 6.7);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

HSDPA Band II Body Face Up CH9262/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.509 mW/g

HSDPA Band II Body Face Up CH9262/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 7.26 V/m; Power Drift = 0.031 dB
Peak SAR (extrapolated) = 0.510 W/kg
SAR(1 g) = 0.300 mW/g; SAR(10 g) = 0.178 mW/g
Maximum value of SAR (measured) = 0.480 mW/g

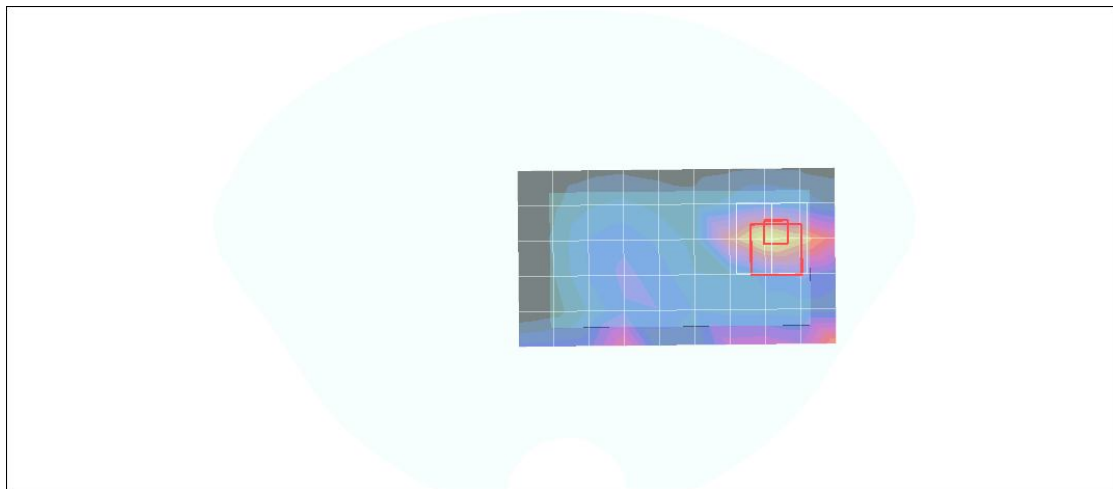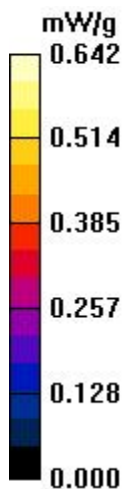

Test Laboratory: Compliance Certification Services Inc.

HSDPA Band II Body E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: HSDPA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.7, 6.7, 6.7);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

HSDPA Band II Body Face Down CH9262/Area Scan (6x10x1):



Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.728 mW/g

HSDPA Band II Body Face Down CH9262/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 12.2 V/m; Power Drift = -0.001 dB
Peak SAR (extrapolated) = 1.05 W/kg
SAR(1 g) = 0.670 mW/g; SAR(10 g) = 0.392 mW/g
Maximum value of SAR (measured) = 1.00 mW/g

HSDPA Band II Body Face Down CH9262/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 12.2 V/m; Power Drift = -0.001 dB
Peak SAR (extrapolated) = 1.14 W/kg
SAR(1 g) = 0.646 mW/g; SAR(10 g) = 0.386 mW/g
Maximum value of SAR (measured) = 0.817 mW/g

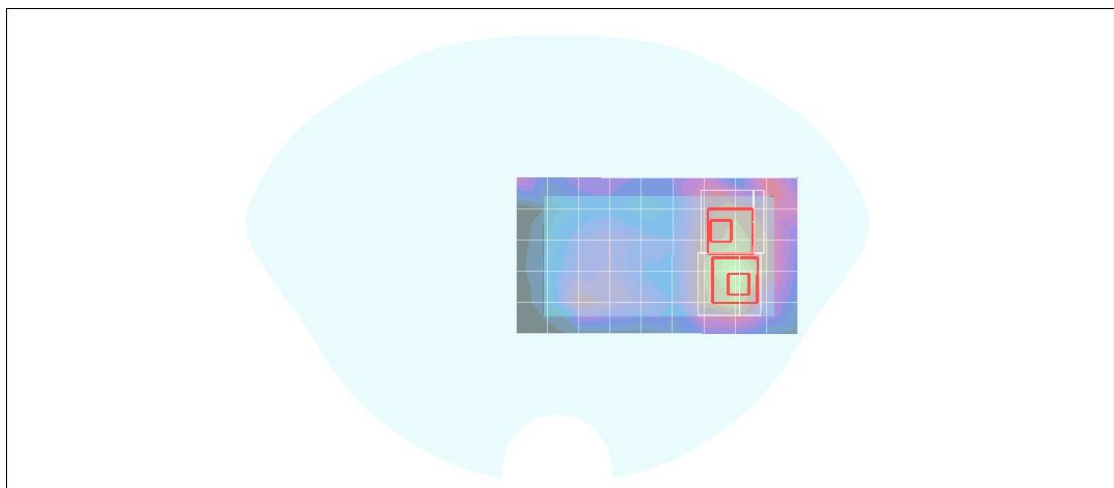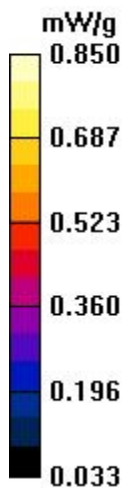

Test Laboratory: Compliance Certification Services Inc.

HSUPA Band II Body E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: HSUPA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.7, 6.7, 6.7);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

HSUPA Band II Body Face Up CH9262/Area Scan (6x10x1):


Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.220 mW/g

HSUPA Band II Body Face Up CH9262/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 8.22 V/m; Power Drift = -0.004 dB
Peak SAR (extrapolated) = 0.349 W/kg
SAR(1 g) = 0.203 mW/g; SAR(10 g) = 0.114 mW/g
Maximum value of SAR (measured) = 0.261 mW/g

HSUPA Band II Body Face Up CH9262/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 8.22 V/m; Power Drift = -0.004 dB
Peak SAR (extrapolated) = 0.241 W/kg
SAR(1 g) = 0.156 mW/g; SAR(10 g) = 0.100 mW/g
Maximum value of SAR (measured) = 0.191 mW/g

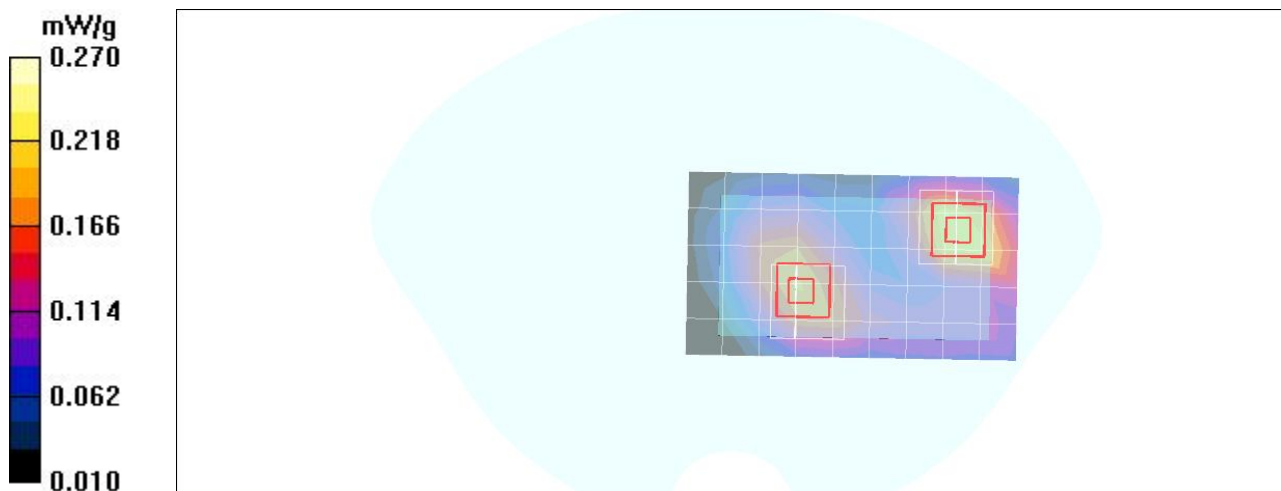

Test Laboratory: Compliance Certification Services Inc.

HSUPA Band II Body E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: HSUPA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.7, 6.7, 6.7);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

HSUPA Band II Body Face Down CH9262/Area Scan (6x10x1):



Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.639 mW/g

HSUPA Band II Body Face Down CH9262/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 10.8 V/m; Power Drift = -0.077 dB
Peak SAR (extrapolated) = 0.855 W/kg
SAR(1 g) = **0.504 mW/g**; SAR(10 g) = **0.293 mW/g**
Maximum value of SAR (measured) = 0.649 mW/g

HSUPA Band II Body Face Down CH9262/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 10.8 V/m; Power Drift = -0.077 dB
Peak SAR (extrapolated) = 0.734 W/kg
SAR(1 g) = **0.431 mW/g**; SAR(10 g) = **0.266 mW/g**
Maximum value of SAR (measured) = 0.538 mW/g

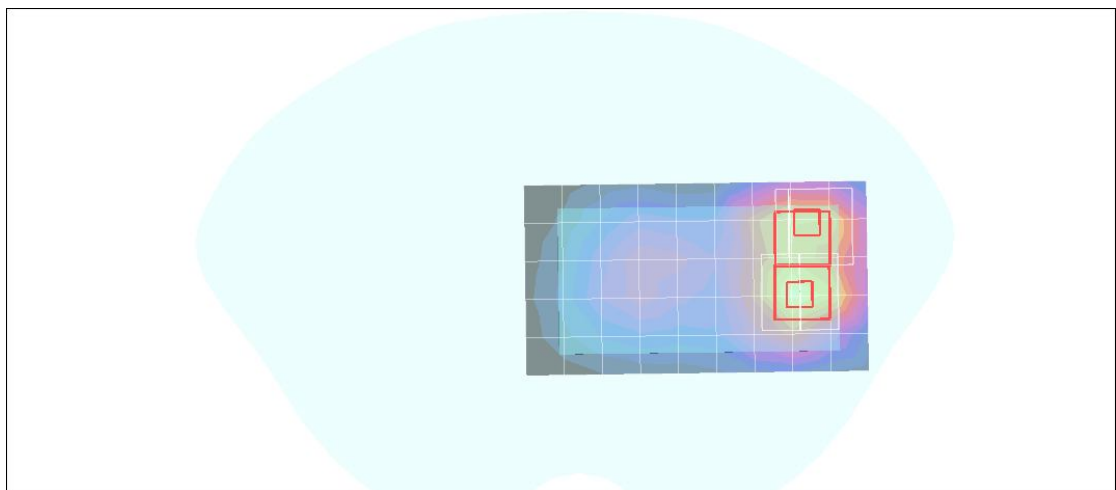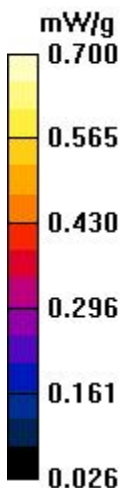

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band V Body E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:



- Probe: EX3DV4 - SN3578; ConvF(8.55, 8.55, 8.55);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA Band V Body Face Up CH4182/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.318 mW/g

WCDMA Band V Body Face Up CH4182/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 8.64 V/m; Power Drift = 0.097 dB
Peak SAR (extrapolated) = 0.381 W/kg
SAR(1 g) = 0.287 mW/g; SAR(10 g) = 0.208 mW/g
Maximum value of SAR (measured) = 0.332 mW/g

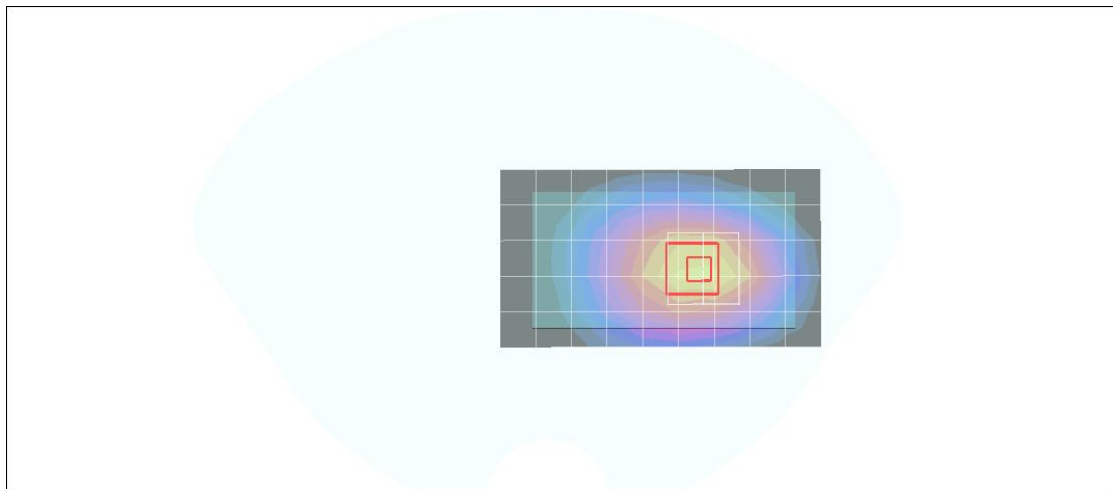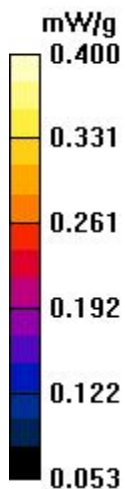

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band V Body E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3578; ConvF(8.55, 8.55, 8.55);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA Band V Body Face Down CH4182/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.691 mW/g

WCDMA Band V Body Face Down CH4182/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 11.8 V/m; Power Drift = 0.005 dB
Peak SAR (extrapolated) = 0.811 W/kg
SAR(1 g) = 0.608 mW/g; SAR(10 g) = 0.441 mW/g
Maximum value of SAR (measured) = 0.700 mW/g

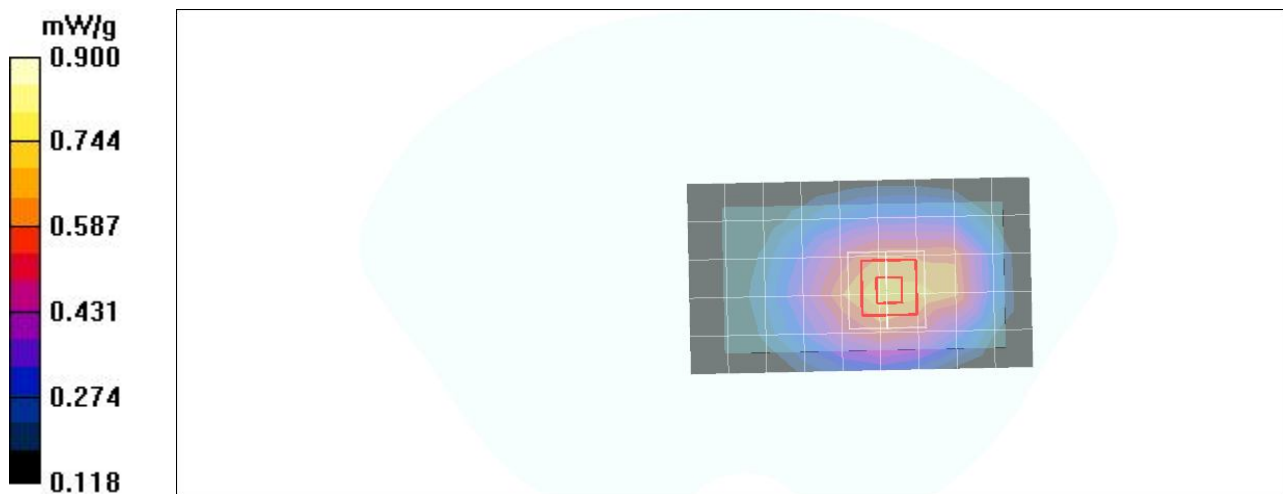

Test Laboratory: Compliance Certification Services Inc.

HADPA Band V Body E310

DUT: C4; Type: Smart Handheld; Serial: 460952688

Communication System: HSDPA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.55, 8.55, 8.55);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2010/2/17
- Phantom: SAM with CRP; Type: SAM; Serial: 1506
- Measurement SW: DASY5, V5.0 Build 125; Postprocessing SW: SEMCAD, V1.8 Build 186

HSDPA Band V Body Face Up CH4182/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.274 mW/g

HSDPA Band V Body Face Up CH4182/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 8.41 V/m; Power Drift = -0.056 dB
Peak SAR (extrapolated) = 0.338 W/kg
SAR(1 g) = 0.254 mW/g; SAR(10 g) = 0.184 mW/g
Maximum value of SAR (measured) = 0.292 mW/g

