

Variant FCC RF Test Report


APPLICANT : Acer Incorporated
EQUIPMENT : Smart HandHeld
BRAND NAME : Acer
MODEL NAME : S57
MARKETING NAME : Liquid Jade Z
FCC ID : HLZDMS57
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

This is a variant report which is only valid together with the original test report. The product was received on Jan. 13, 2015 and testing was completed on Mar. 09, 2015. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

| | |
|---|-----------|
| REVISION HISTORY..... | 3 |
| SUMMARY OF TEST RESULT | 4 |
| 1 GENERAL DESCRIPTION..... | 5 |
| 1.1 Applicant..... | 5 |
| 1.2 Manufacturer..... | 5 |
| 1.3 Product Feature of Equipment Under Test..... | 5 |
| 1.4 Product Specification subjective to this standard | 5 |
| 1.5 Modification of EUT | 6 |
| 1.6 Testing Location | 6 |
| 1.7 Applicable Standards..... | 6 |
| 2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... | 7 |
| 2.1 Descriptions of Test Mode..... | 7 |
| 2.2 Test Mode..... | 7 |
| 2.3 Support Unit used in test configuration and system..... | 8 |
| 2.4 EUT Operation Test Setup | 8 |
| 2.5 Measurement Results Explanation Example..... | 8 |
| 3 TEST RESULT | 9 |
| 3.1 Peak Output Power Measurement | 9 |
| 3.2 Conducted Spurious Emission Measurement | 11 |
| 3.3 Antenna Requirements..... | 15 |
| 4 LIST OF MEASURING EQUIPMENT..... | 16 |



REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION | ISSUED DATE |
|------------|---------|---|---------------|
| FR511349A | Rev. 01 | <p>This is a variant report for S57. The difference between previous and current is as following:</p> <ol style="list-style-type: none"> 1. changed Model name from "S56" to "S57", 2. changed marketing name from "Liquid Jade S" to "Liquid Jade Z" 3. changed CPU from "MT6752M" to "MT6732" 4. changed earphone from model name "HF-AC09W-02" to "HC.00211.008". <p>Based on the similarity between two models, only the conducted power and Conducted Spurious Emission test for middle channel were verified, all other test data are leverage from original test report (Sporton Report Number FR492402A with FCC ID: HLZDMS56).</p> | Mar. 10, 2015 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



SUMMARY OF TEST RESULT

| Report Section | FCC Rule | IC Rule | Description | Limit | Result | Remark |
|----------------|-----------------------|--------------------|-----------------------------|---------------|--------|--------|
| 3.1 | 15.247(b)(1) | RSS-210 A8.1(b) | Peak Output Power | ≤ 125 mW | Pass | - |
| 3.2 | 15.247(d) | RSS-210 A8.5 | Conducted Spurious Emission | ≤ 20 dBc | Pass | - |
| 3.3 | 15.203 & 15.247(b) | RSS-210 A8.4 | Antenna Requirement | N/A | Pass | - |



1 General Description

1.1 Applicant

Acer Incorporated

8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22181, Taiwan (R.O.C)

1.2 Manufacturer

Shanghai Sunrise Simcom Limited

No. 888, Shengli Rd., Qingpu, Shanghai, P.R.China 201700

1.3 Product Feature of Equipment Under Test

| Product Feature | |
|---------------------------------|---|
| Equipment | Smart HandHeld |
| Brand Name | Acer |
| Model Name | S57 |
| Marketing Name | Liquid Jade Z |
| FCC ID | HLZDMS57 |
| EUT supports Radios application | GSM/GPRS/EGPRS/ WCDMA/HSPA/HSPA+(Downlink Only)/LTE/ WLAN 2.4GHz 802.11b/g/n HT20/HT40/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE |
| EUT Stage | Identical Prototype |

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

| Product Specification subjective to this standard | |
|---|---|
| Tx/Rx Frequency Range | 2402 MHz ~ 2480 MHz |
| Number of Channels | 79 |
| Carrier Frequency of Each Channel | 2402+n*1 MHz; n=0~78 |
| Antenna Type | PIFA Antenna with gain -0.12 dBi |
| Type of Modulation | Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK |



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

| | | |
|---------------------------|---|--------------------------------|
| Test Site | SPORTON INTERNATIONAL (KUNSHAN) INC. | |
| Test Site Location | No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958 | |
| Test Site No. | Sporton Site No. | FCC/IC Registration No. |
| | TH01-KS | 149928/4086E-1 |

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC Public Notice DA 00-705
- ANSI C63.4-2009
- IC RSS-210 Issue 8
- IC RSS-Gen Issue 4
- NOTICE 2012-DRS0126

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. Per the section 2.2.3 of Notice of 2012-DRS0126, “ Receivers Excluded from Industry Canada Requirements”, only radiocommunication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements.

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

| Channel | Frequency | Bluetooth RF Output Power | | |
|---------|-----------|---------------------------|----------------|----------|
| | | Data Rate / Modulation | | |
| | | GFSK | $\pi/4$ -DQPSK | 8-DPSK |
| | | 1Mbps | 2Mbps | 3Mbps |
| Ch39 | 2441MHz | 5.78 dBm | 5.13 dBm | 5.36 dBm |

2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.

| Summary table of Test Cases | | | |
|-----------------------------|----------------------------|---------------------------------------|-------------------------------|
| Test Item | Data Rate / Modulation | | |
| | Bluetooth BR 1Mbps GFSK | Bluetooth EDR 2Mbps $\pi/4$ -DQPSK | Bluetooth EDR 3Mbps 8-DPSK |
| Conducted Test Cases | Mode 1: CH39_2441 MHz | Mode 2: CH39_2441 MHz | Mode 3: CH39_2441 MHz |



2.3 Support Unit used in test configuration and system

| Item | Equipment | Trade Name | Model Name | FCC ID | Data Cable | Power Cord |
|------|------------------------|------------|------------|--------|------------|-------------------|
| 1. | Bluetooth Base Station | R&S | CBT | N/A | N/A | Unshielded, 1.8 m |

2.4 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit/receive.

2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.5 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.5 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Peak Output Power Measurement

3.1.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
1. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power with cable loss and record the results in the test report.
4. Measure and record the results in the test report.

3.1.4 Test Setup

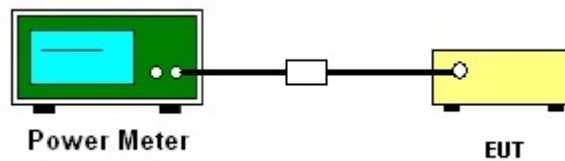



3.1.5 Test Result of Peak Output Power

| | | | |
|-----------------|------------|---------------------|---------|
| Test Mode : | 1Mbps | Temperature : | 24~25°C |
| Test Engineer : | Issac Song | Relative Humidity : | 49~51% |

| Channel | Frequency (MHz) | RF Power (dBm) | | |
|---------|-----------------|----------------|-------------------|-----------|
| | | GFSK | Max. Limits (dBm) | Pass/Fail |
| | | 1 Mbps | | |
| 39 | 2441 | 5.78 | 20.97 | Pass |

| | | | |
|-----------------|------------|---------------------|---------|
| Test Mode : | 2Mbps | Temperature : | 24~25°C |
| Test Engineer : | Issac Song | Relative Humidity : | 49~51% |

| Channel | Frequency (MHz) | RF Power (dBm) | | |
|---------|-----------------|----------------|-------------------|-----------|
| | | $\pi/4$ -DQPSK | Max. Limits (dBm) | Pass/Fail |
| | | 2 Mbps | | |
| 39 | 2441 | 5.13 | 20.97 | Pass |

| | | | |
|-----------------|------------|---------------------|---------|
| Test Mode : | 3Mbps | Temperature : | 24~25°C |
| Test Engineer : | Issac Song | Relative Humidity : | 49~51% |

| Channel | Frequency (MHz) | RF Power (dBm) | | |
|---------|-----------------|----------------|-------------------|-----------|
| | | 8-DPSK | Max. Limits (dBm) | Pass/Fail |
| | | 3 Mbps | | |
| 39 | 2441 | 5.36 | 20.97 | Pass |

3.2 Conducted Spurious Emission Measurement

3.2.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.2.4 Test Setup

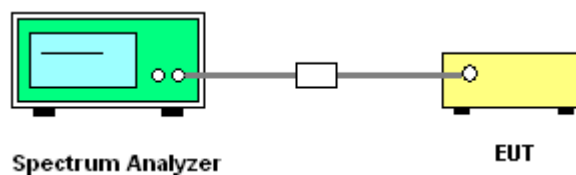




3.2.5 Test Result of Conducted Spurious Emission


| | | | |
|----------------|-------|---------------------|------------|
| Test Mode : | 1Mbps | Temperature : | 24~25°C |
| Test Channel : | 39 | Relative Humidity : | 49~51% |
| | | Test Engineer : | Issac Song |

1Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

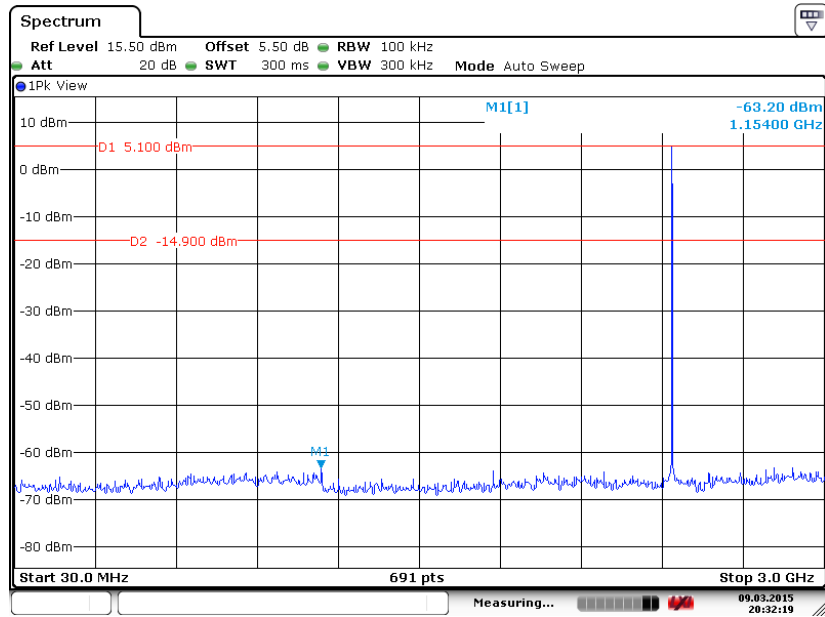

Date: 9 MAR. 2015 20:32:19

1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

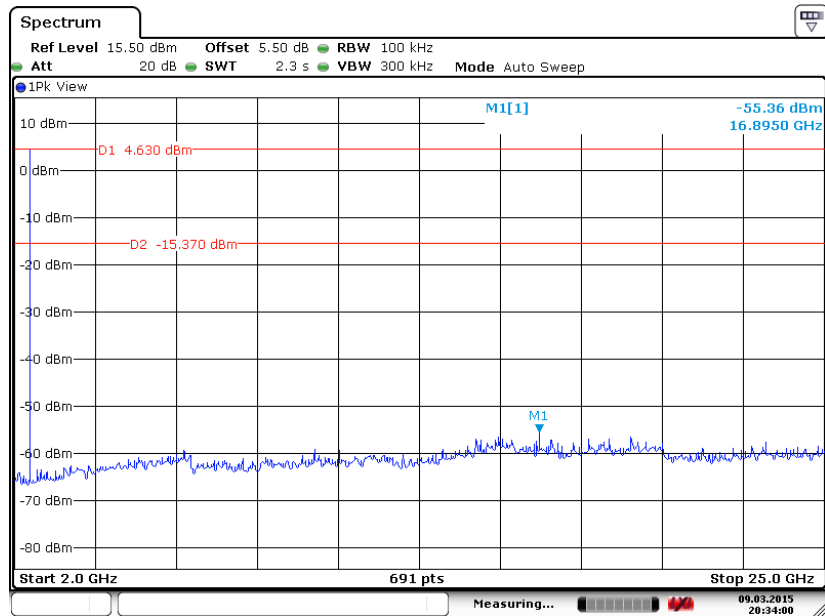


Date: 9 MAR. 2015 20:34:00




| | | | |
|----------------|-------|---------------------|------------|
| Test Mode : | 2Mbps | Temperature : | 24~25°C |
| Test Channel : | 39 | Relative Humidity : | 49~51% |
| | | Test Engineer : | Issac Song |

2Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

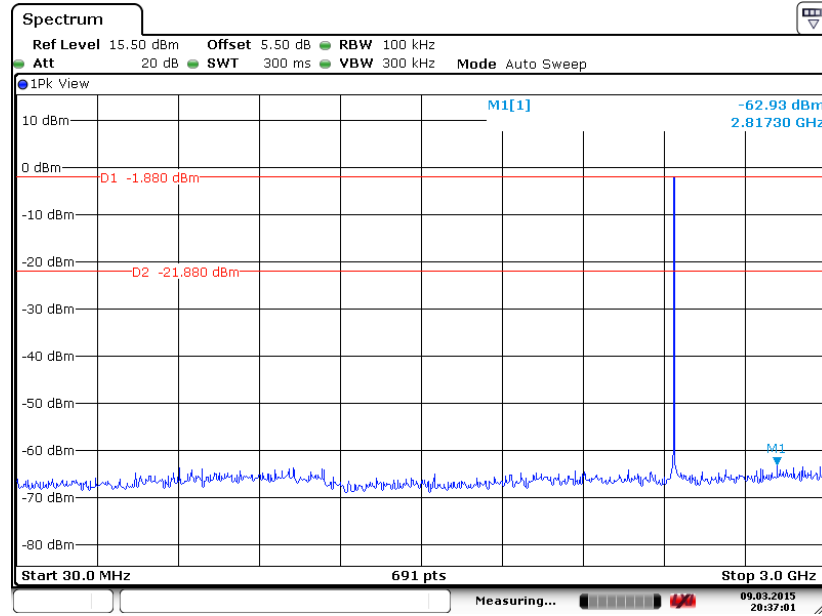

Date: 9 M AR .2015 20:37:01

2Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

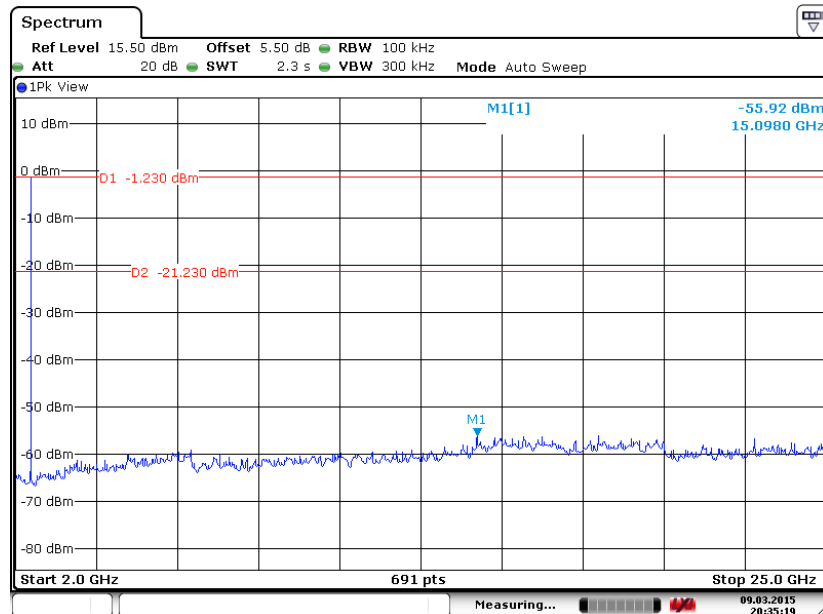


Date: 9 M AR .2015 20:35:19




| | | | |
|----------------|-------|---------------------|------------|
| Test Mode : | 3Mbps | Temperature : | 24~25°C |
| Test Channel : | 39 | Relative Humidity : | 49~51% |
| | | Test Engineer : | Issac Song |

3Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

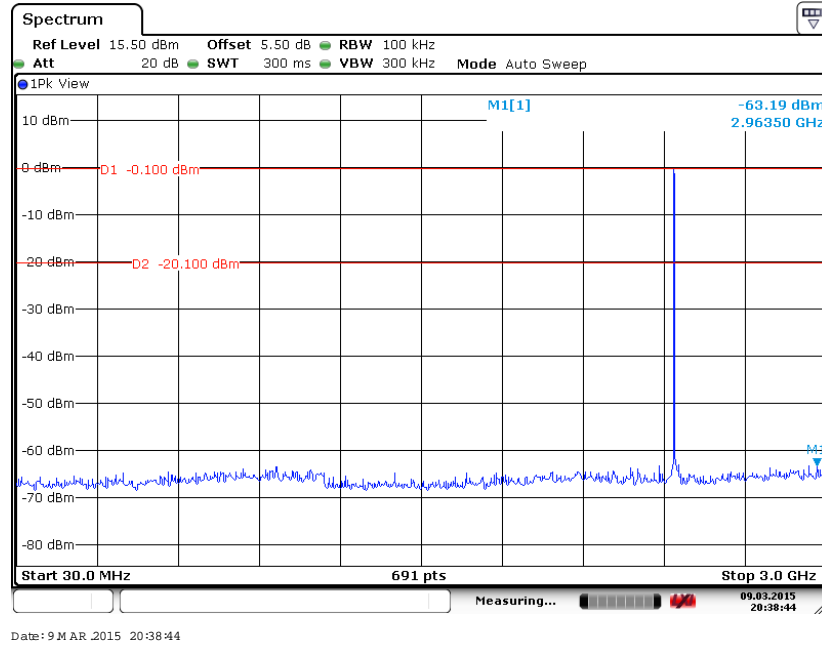

3Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

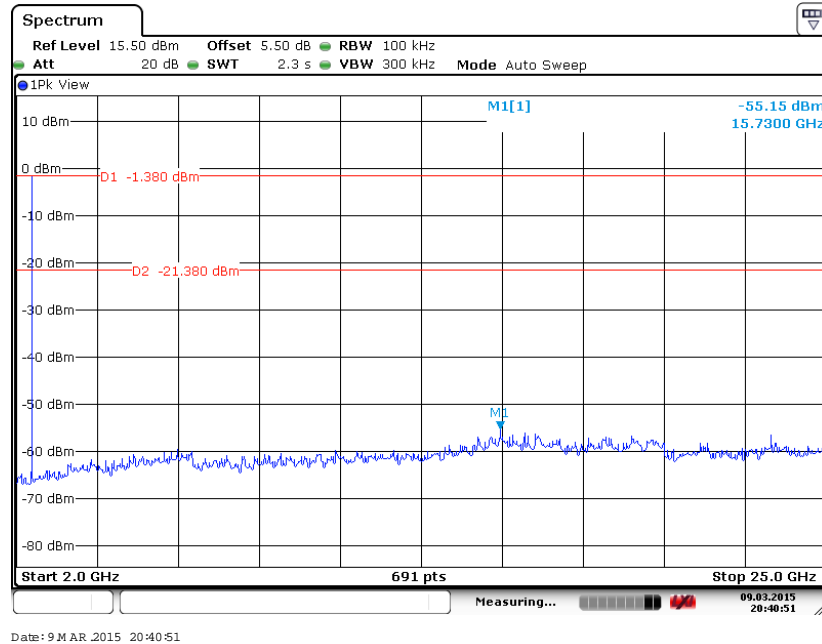



3.3 Antenna Requirements

3.3.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.3.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|--------------------|--------------|-----------|------------|-----------------|------------------|---------------|---------------|---------------------|
| Spectrum Analyzer | R&S | FSV30 | 101338 | 9kHz~30GHz | May 04, 2014 | Mar. 09, 2015 | May 03, 2015 | Conducted (TH01-KS) |
| Pulse Power Sensor | Anritsu | MA2411B | 0917070 | 30MHz~40GHz | Jan. 23, 2015 | Mar. 09, 2015 | Jan. 22, 2016 | Conducted (TH01-KS) |
| Power Meter | Anritsu | ML2495A | 1005002 | 50MHz Bandwidth | Jan. 23, 2015 | Mar. 09, 2015 | Jan. 22, 2016 | Conducted (TH01-KS) |