



# FCC RF Test Report

**APPLICANT** : Acer Incorporated  
**EQUIPMENT** : Smart HandHeld  
**BRAND NAME** : Acer  
**MODEL NAME** : Z500  
**FCC ID** : HLZDMZ500  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on Aug. 04, 2014 and testing was completed on Aug. 13, 2014. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

---

Reviewed by: Joseph Lin / Supervisor

---

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test ..... 5

    1.4 Product Specification subjective to this standard ..... 5

    1.5 Modification of EUT ..... 6

    1.6 Testing Location ..... 6

    1.7 Applicable Standards ..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1 Carrier Frequency Channel ..... 8

    2.2 Pre-Scanned RF Power ..... 9

    2.3 Test Mode ..... 11

    2.4 Connection Diagram of Test System ..... 13

    2.5 Support Unit used in test configuration and system ..... 14

    2.6 EUT Operation Test Setup ..... 14

    2.7 Measurement Results Explanation Example ..... 14

**3 TEST RESULT ..... 15**

    3.1 6dB and 99% Bandwidth Measurement ..... 15

    3.2 Output Power Measurement ..... 17

    3.3 Power Spectral Density Measurement ..... 20

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 22

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 35

    3.6 AC Conducted Emission Measurement ..... 57

    3.7 Antenna Requirements ..... 61

**4 LIST OF MEASURING EQUIPMENT ..... 62**

**5 UNCERTAINTY OF EVALUATION ..... 63**

**APPENDIX A. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.39 dB at 2483.590 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.34 dB at 0.180 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**Acer Incorporated**

8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22181, Taiwan (R.O.C.)

## 1.2 Manufacturer

**Compal Communications (Nanjing) Co., Ltd.**

No. 68-2, Suyuan Road, Nanjing Export Processing Zone(South Area), China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	Smart HandHeld
<b>Brand Name</b>	Acer
<b>Model Name</b>	Z500
<b>FCC ID</b>	HLZDMZ500
<b>EUT supports Radios application</b>	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+(Downlink Only) WLAN 2.4GHz 802.11b/g/n HT20/HT40/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
<b>EUT Stage</b>	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
<b>Tx/Rx Channel Frequency Range</b>	802.11b/g/n : 2412 MHz ~ 2462 MHz
<b>Maximum (Peak) Output Power to Antenna</b>	802.11b : 18.04 dBm (0.0637 W) 802.11g : 22.71 dBm (0.1866 W) 802.11n HT20 : 21.67 dBm (0.1469 W) 802.11n HT40 : 21.92 dBm (0.1556 W)
<b>99% Occupied Bandwidth</b>	802.11b : 12.55MHz 802.11g : 17.45MHz 802.11n HT20 : 18.50MHz 802.11n HT40 : 36.60MHz
<b>Antenna Type</b>	802.11b/g/n : Chip Antenna with gain 0.04 dBi
<b>Type of Modulation</b>	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL INC.		
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC Registration No.</b>
	TH02-HY	03CH05-HY	TW1022

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.		
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC Registration No.</b>
	CO01-KS		149928



## **1.7 Applicable Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- ♦ ANSI C63.4-2003

### **Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-





## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b RF Power (dBm)						
Power vs. Channel			Power vs. Data Rate			
Channel	Frequency (MHz)	Data Rate	Channel	2Mbps	5.5Mbps	11Mbps
		1Mbps				
CH 01	2412	17.73	CH 06	18.02	17.93	17.98
CH 06	2437	18.04				
CH 11	2462	17.82				

2.4GHz 802.11g RF Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps								
CH 01	2412	22.31	CH 11	22.64	22.68	22.63	22.67	22.54	22.59	22.66
CH 06	2437	22.53								
CH 11	2462	22.71								

2.4GHz 802.11n HT20 RF Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 01	2412	21.08	CH 11	21.58	21.39	21.46	21.38	21.27	21.44	21.26
CH 06	2437	21.53								
CH 11	2462	21.67								



2.4GHz 802.11n HT40 RF Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 03	2422 MHz	21.73	CH 09	21.47	20.95	20.72	20.97	20.58	20.59	20.47
CH 06	2437 MHz	21.80								
CH 09	2452 MHz	21.92								



## 2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
	Test Items	Mode	Data Rate	Test Channel
Conducted TCs	6dB and 99% BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
	Conducted Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
		802.11n HT40	MCS0	3/9
	Conducted Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
		802.11n HT40	MCS0	3/9
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9




<b>AC Conducted</b>	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter 1) for Sample 1
<b>Emission</b>	Mode 2 : GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter 2) for Sample 1
<b>Remark:</b> 1. The worst case of conducted emission is mode 2; only the test data of it was reported. 2. For Radiated Test Cases, all the test modes were performed with Adapter 1, Earphone and USB Cable for Sample 1.	

## 2.4 Connection Diagram of Test System

### <WLAN Tx Mode>

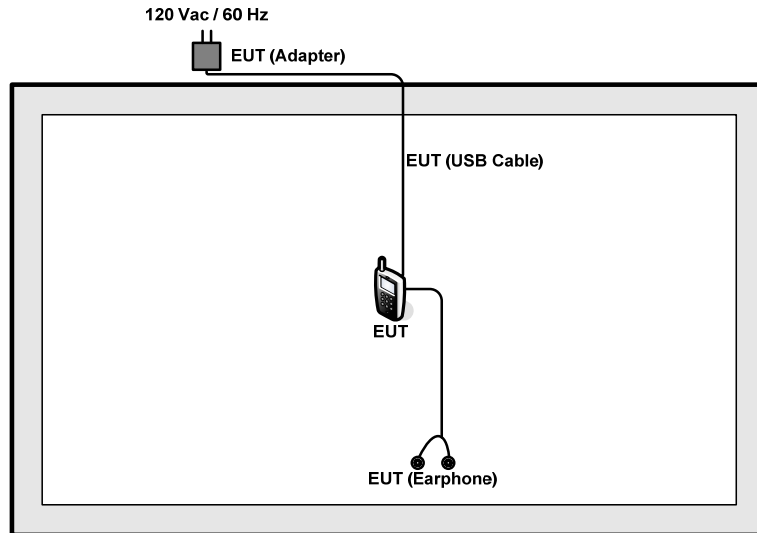

### <AC Conducted Emission Mode>

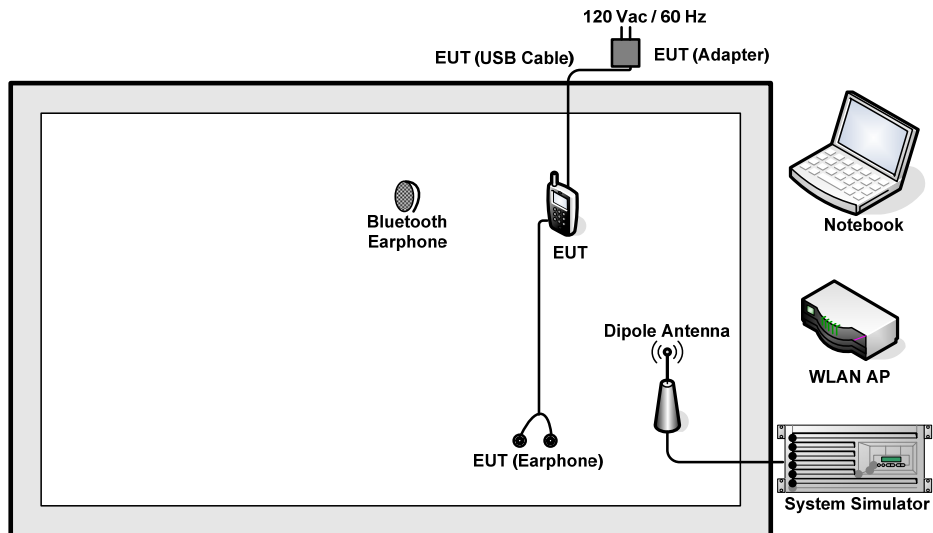

## 2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 0.9 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH505	N/A	N/A	N/A

## 2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.7 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 5.4 dB and 20dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5.4 + 20 = 25.4 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

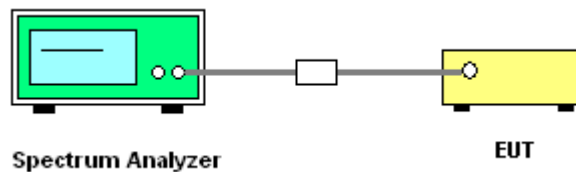




3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Test Band :	2.4GHz	Temperature :	21~25°C
Test Engineer :	Alex Lee	Relative Humidity :	51~54%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	99% Bandwidth (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	12.55	9.06	0.50	Pass
11b	1Mbps	1	6	2437	12.50	9.56	0.50	Pass
11b	1Mbps	1	11	2462	12.50	9.04	0.50	Pass
11g	6Mbps	1	1	2412	17.30	15.66	0.50	Pass
11g	6Mbps	1	6	2437	17.40	15.64	0.50	Pass
11g	6Mbps	1	11	2462	17.45	15.64	0.50	Pass
HT20	MCS0	1	1	2412	18.50	17.60	0.50	Pass
HT20	MCS0	1	6	2437	18.45	17.60	0.50	Pass
HT20	MCS0	1	11	2462	18.50	17.60	0.50	Pass
HT40	MCS0	1	3	2422	36.60	36.12	0.50	Pass
HT40	MCS0	1	6	2437	36.60	36.08	0.50	Pass
HT40	MCS0	1	9	2452	36.50	36.08	0.50	Pass

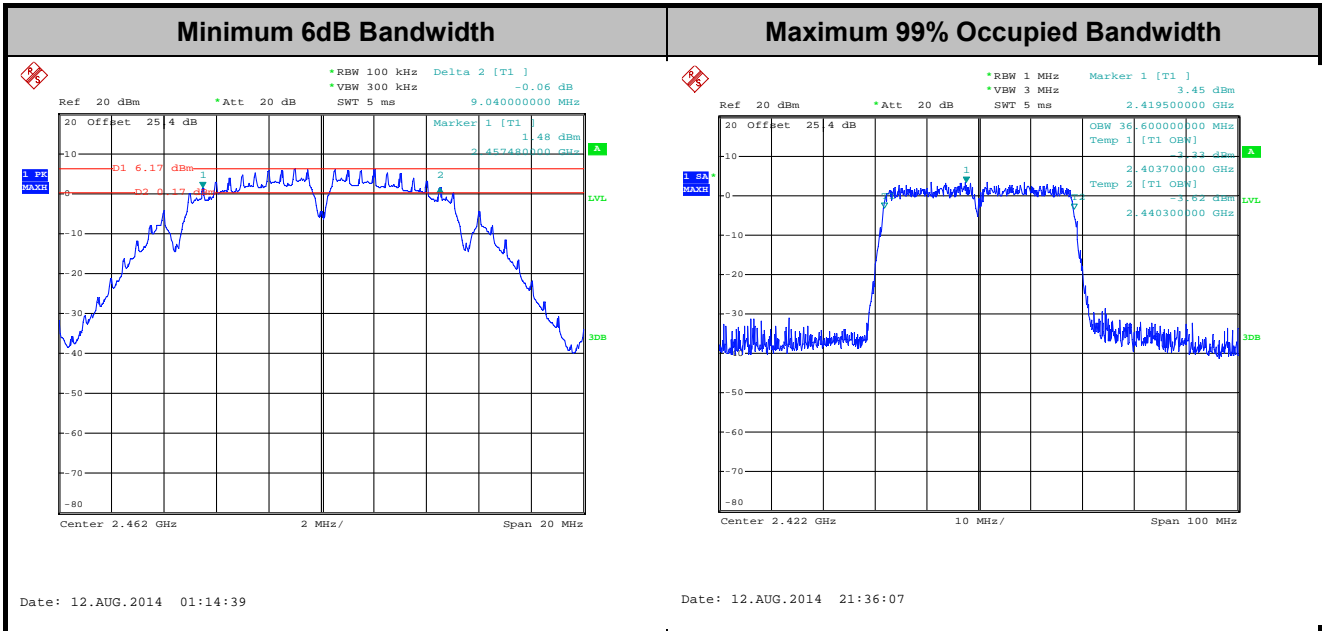

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

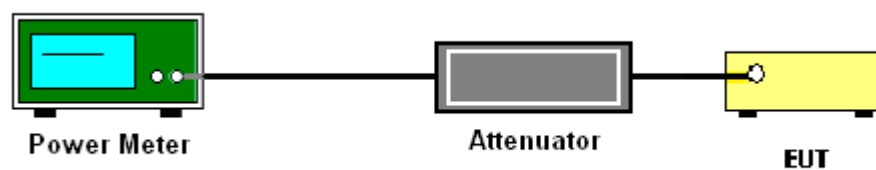



3.2.5 Test Result of Peak Output Power

Test Mode :	2.4GHz	Temperature :	21~25°C
Test Engineer :	Alex Lee	Relative Humidity :	51~54%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	RF Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	17.73	30.00	0.04	Pass
11b	1Mbps	1	6	2437	18.04	30.00	0.04	Pass
11b	1Mbps	1	11	2462	17.82	30.00	0.04	Pass
11g	6Mbps	1	1	2412	22.31	30.00	0.04	Pass
11g	6Mbps	1	6	2437	22.53	30.00	0.04	Pass
11g	6Mbps	1	11	2462	22.71	30.00	0.04	Pass
HT20	MCS0	1	1	2412	21.08	30.00	0.04	Pass
HT20	MCS0	1	6	2437	21.53	30.00	0.04	Pass
HT20	MCS0	1	11	2462	21.67	30.00	0.04	Pass
HT40	MCS0	1	3	2422	21.73	30.00	0.04	Pass
HT40	MCS0	1	6	2437	21.80	30.00	0.04	Pass
HT40	MCS0	1	9	2452	21.92	30.00	0.04	Pass

Note: Measured power (dBm) has offset with cable loss.



3.2.6 Test Result of Average output Power (Reporting Only)

Test Mode :	2.4GHz	Temperature :	21~25°C
Test Engineer :	Alex Lee	Relative Humidity :	51~54%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	Duty Factor (dB)	Average Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	0.08	14.89	30.00	0.04	Pass
11b	1Mbps	1	6	2437	0.08	15.03	30.00	0.04	Pass
11b	1Mbps	1	11	2462	0.08	14.91	30.00	0.04	Pass
11g	6Mbps	1	1	2412	0.50	12.76	30.00	0.04	Pass
11g	6Mbps	1	6	2437	0.50	12.85	30.00	0.04	Pass
11g	6Mbps	1	11	2462	0.50	12.92	30.00	0.04	Pass
HT20	MCS0	1	1	2412	0.53	9.82	30.00	0.04	Pass
HT20	MCS0	1	6	2437	0.53	9.79	30.00	0.04	Pass
HT20	MCS0	1	11	2462	0.53	9.86	30.00	0.04	Pass
HT40	MCS0	1	3	2422	0.99	9.86	30.00	0.04	Pass
HT40	MCS0	1	6	2437	0.99	9.62	30.00	0.04	Pass
HT40	MCS0	1	9	2452	0.99	9.91	30.00	0.04	Pass

**Note:** Measured power (dBm) has offset with cable loss and duty factor.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

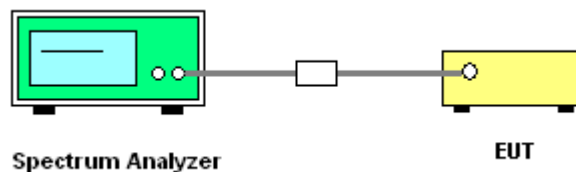




3.3.5 Test Result of Power Spectral Density

Test Mode :	2.4GHz	Temperature :	21~25°C
Test Engineer :	Alex Lee	Relative Humidity :	51~54%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	Peak Power Density (dBm/3kHz)	Max. Limits (dBm/3kHz)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	-6.93	8.00	0.04	Pass
11b	1Mbps	1	6	2437	-7.24	8.00	0.04	Pass
11b	1Mbps	1	11	2462	-7.51	8.00	0.04	Pass
11g	6Mbps	1	1	2412	-11.53	8.00	0.04	Pass
11g	6Mbps	1	6	2437	-11.70	8.00	0.04	Pass
11g	6Mbps	1	11	2462	-11.33	8.00	0.04	Pass
HT20	MCS0	1	1	2412	-15.11	8.00	0.04	Pass
HT20	MCS0	1	6	2437	-14.48	8.00	0.04	Pass
HT20	MCS0	1	11	2462	-16.10	8.00	0.04	Pass
HT40	MCS0	1	3	2422	-19.17	8.00	0.04	Pass
HT40	MCS0	1	6	2437	-17.05	8.00	0.04	Pass
HT40	MCS0	1	9	2452	-18.79	8.00	0.04	Pass

Note: Measured power density (dBm) has offset with cable loss.

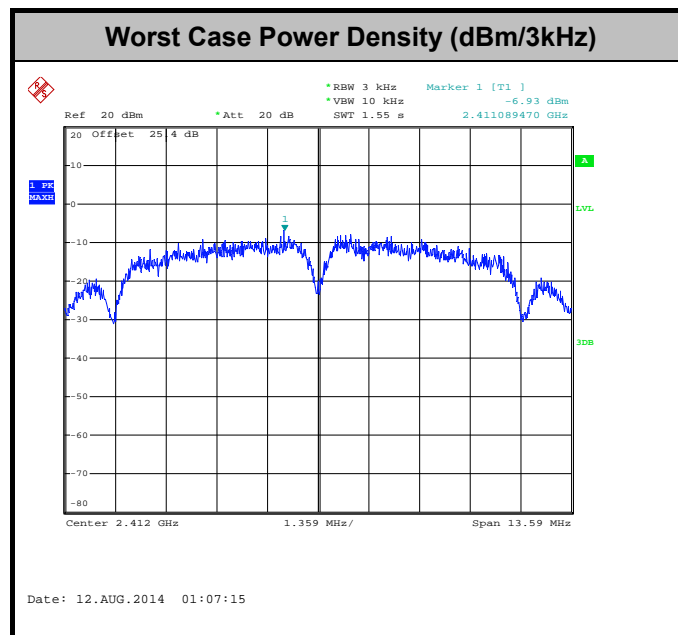

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup




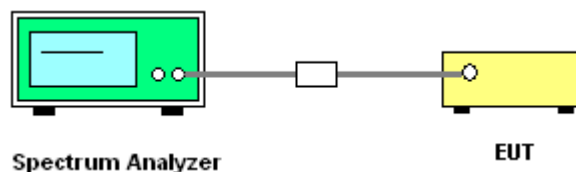




### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Alex Lee

#### WLAN 802.11b Channel 01

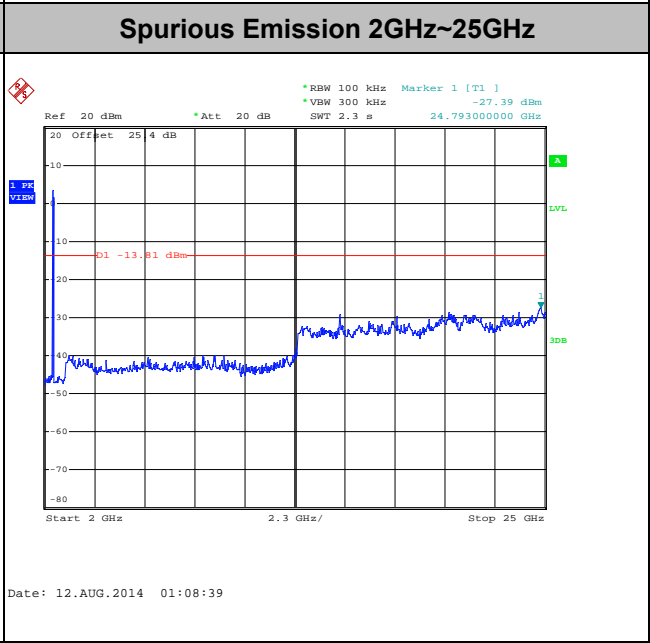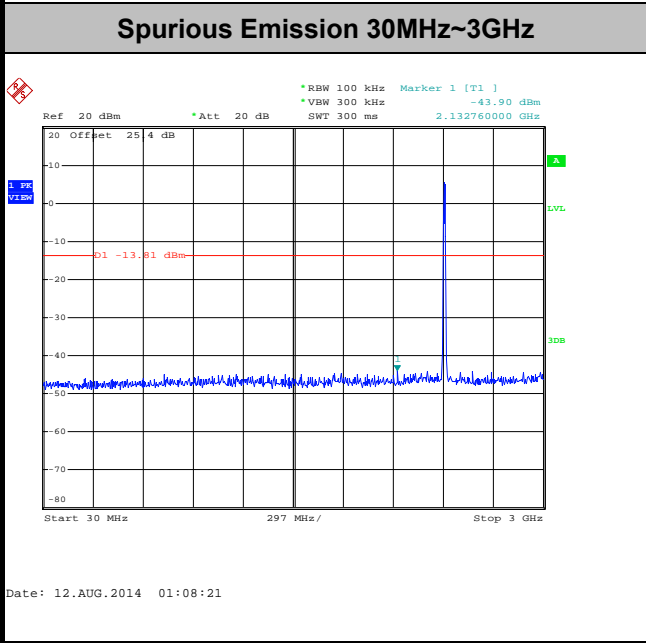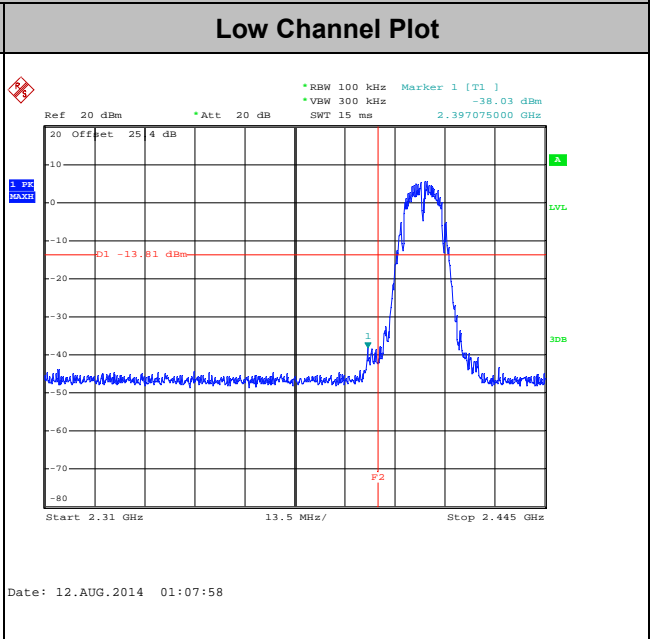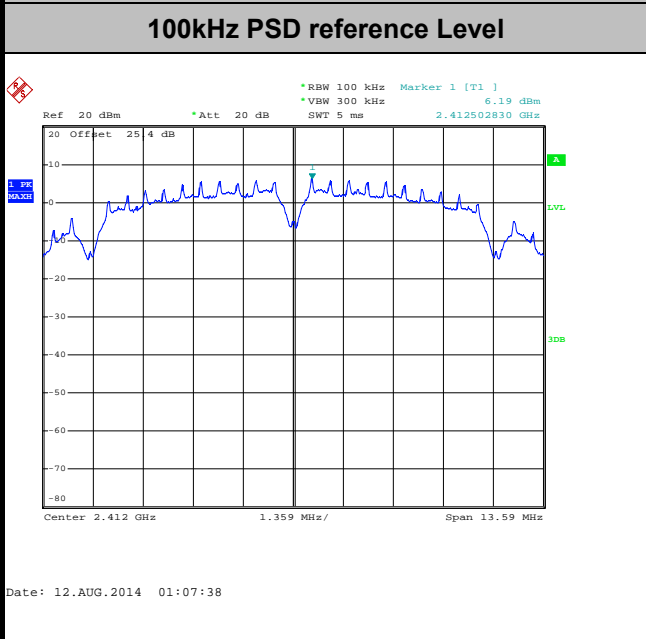





Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Alex Lee

WLAN 802.11b Channel 06


100kHz PSD reference Level

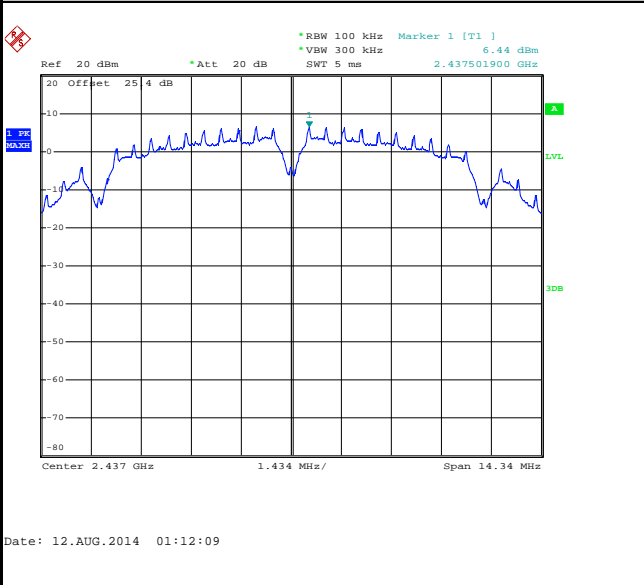

Spurious Emission 30MHz~3GHz

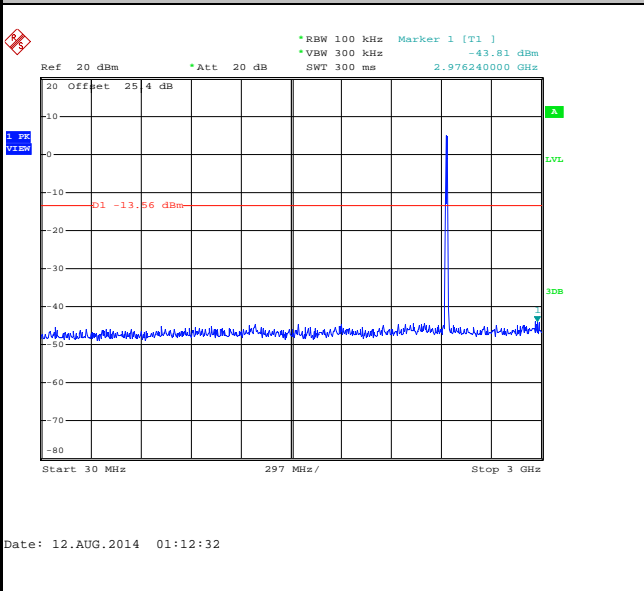

Spurious Emission 2GHz~25GHz

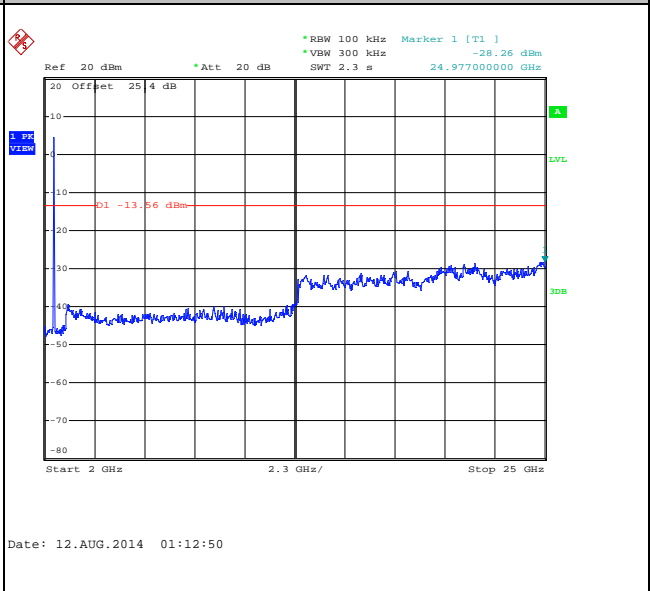






Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Alex Lee


WLAN 802.11b Channel 11

100kHz PSD reference Level

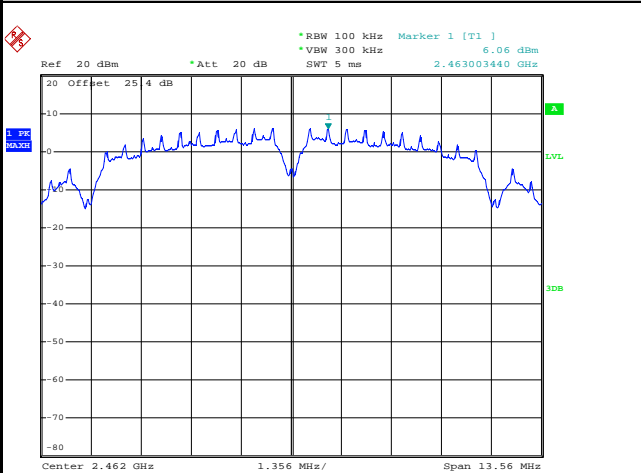


Date: 12.AUG.2014 01:15:27

High Channel Plot

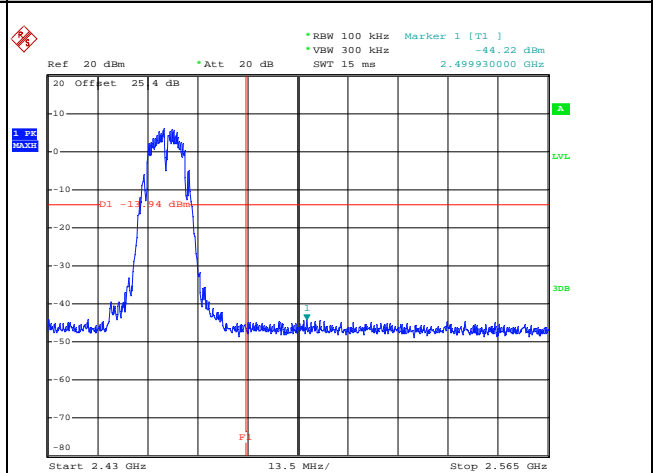


Date: 12.AUG.2014 01:15:57

Spurious Emission 30MHz~3GHz

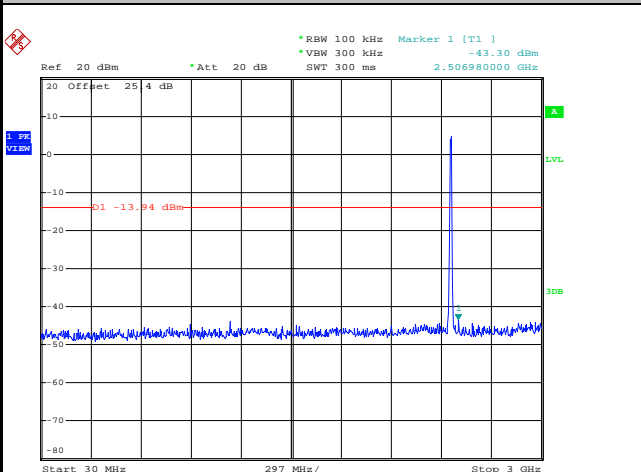

Date: 12.AUG.2014 01:16:22

Spurious Emission 2GHz~25GHz

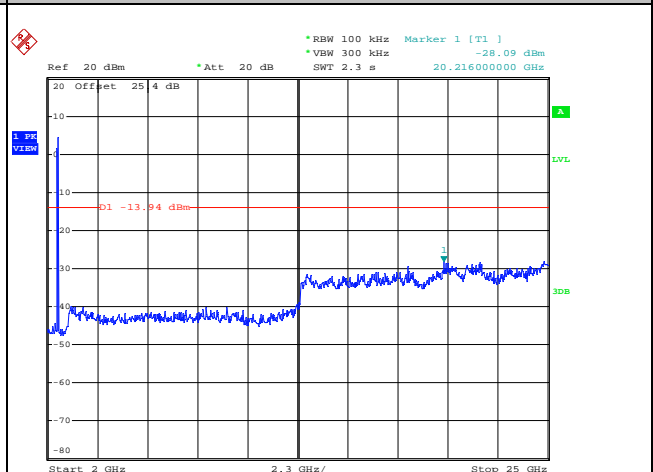


Date: 12.AUG.2014 01:16:40




Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Alex Lee

WLAN 802.11g Channel 01


100kHz PSD reference Level

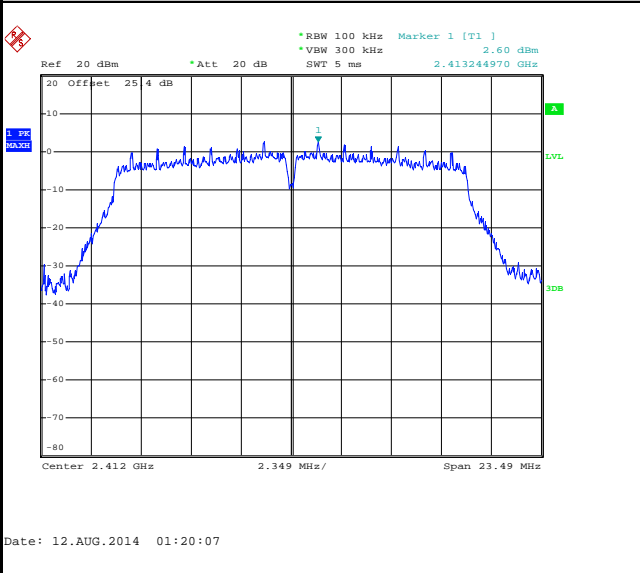


Low Channel Plot

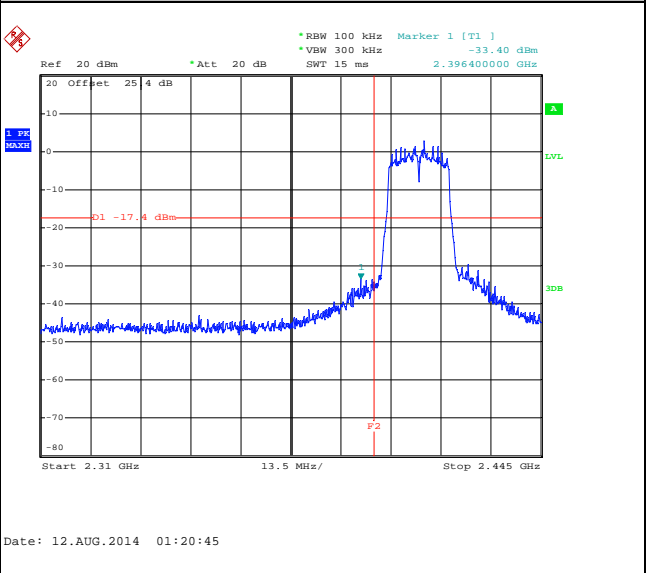

Spurious Emission 30MHz~3GHz

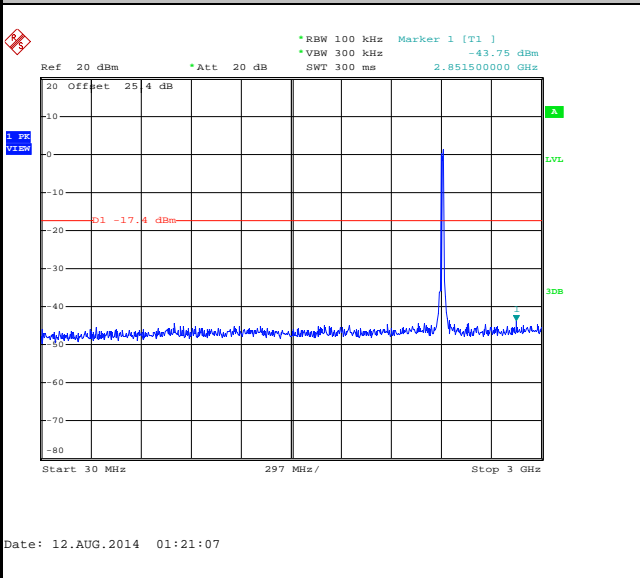

Spurious Emission 2GHz~25GHz

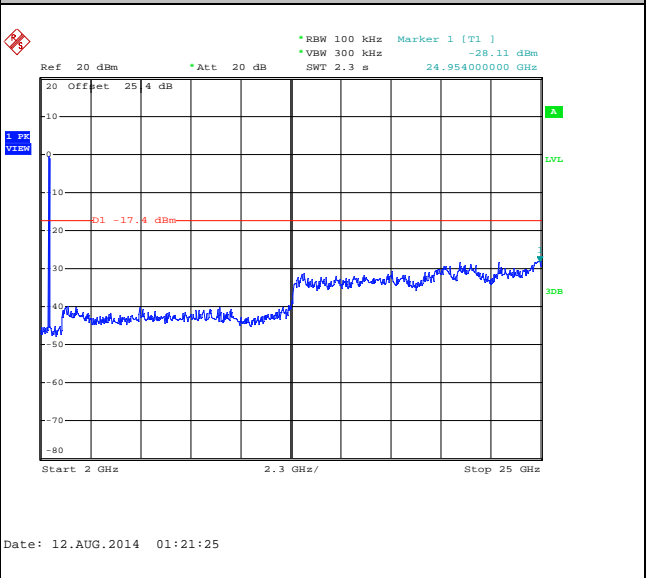




Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Alex Lee


WLAN 802.11g Channel 06

100kHz PSD reference Level

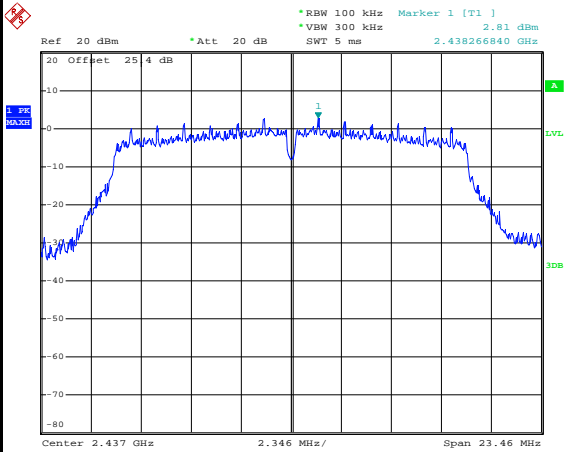


Date: 12.AUG.2014 01:24:51

Spurious Emission 30MHz~3GHz

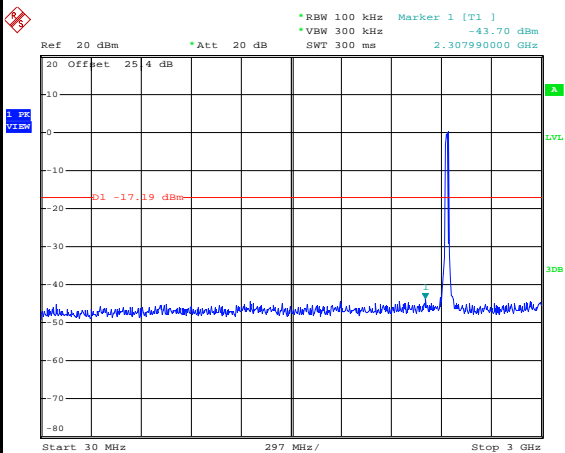

Date: 12.AUG.2014 01:26:13

Spurious Emission 2GHz~25GHz

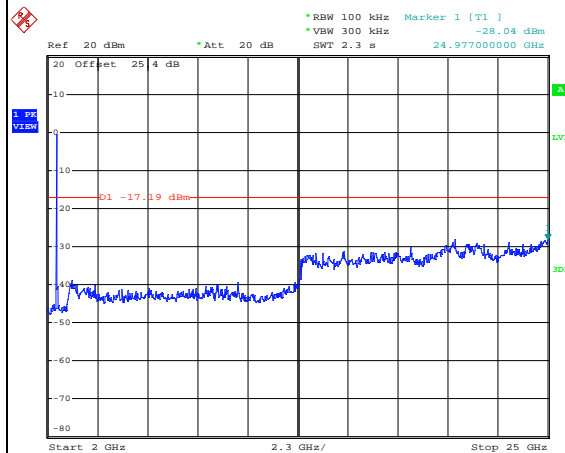


Date: 12.AUG.2014 01:26:31



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Alex Lee


WLAN 802.11g Channel 11

100kHz PSD reference Level

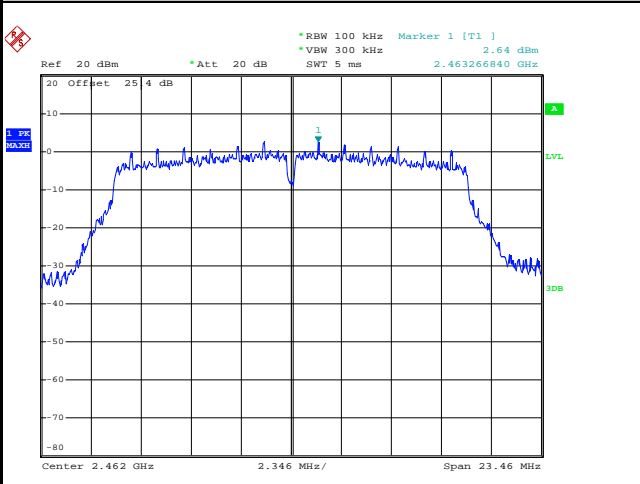


Date: 12.AUG.2014 01:29:18

High Channel Plot

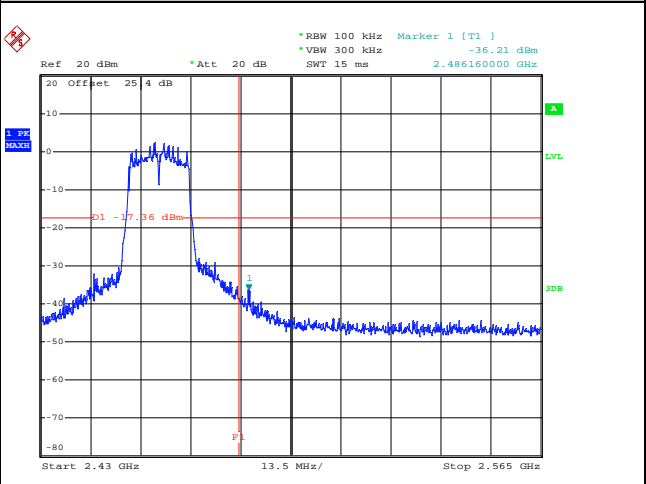


Date: 12.AUG.2014 01:30:17

Spurious Emission 30MHz~3GHz

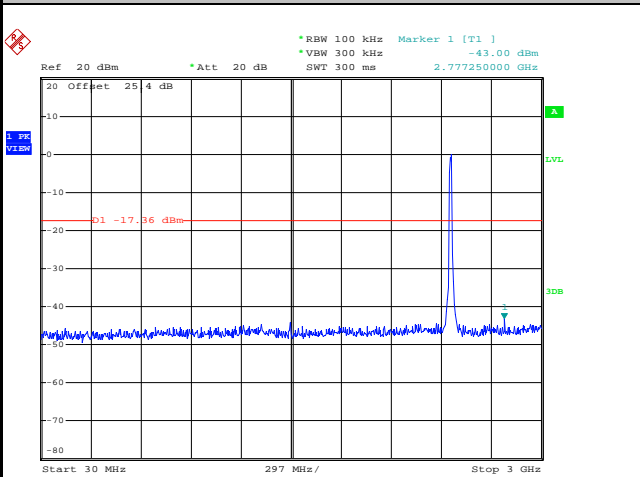

Date: 12.AUG.2014 01:30:55

Spurious Emission 2GHz~25GHz

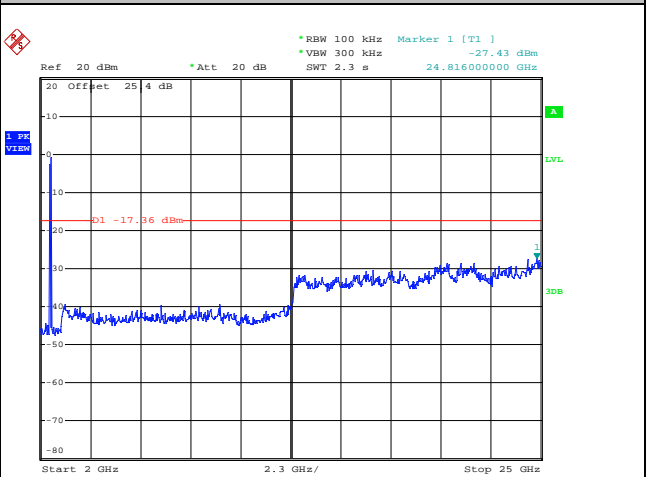


Date: 12.AUG.2014 01:31:13




Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Alex Lee

WLAN 802.11n HT20 Channel 01


100kHz PSD reference Level

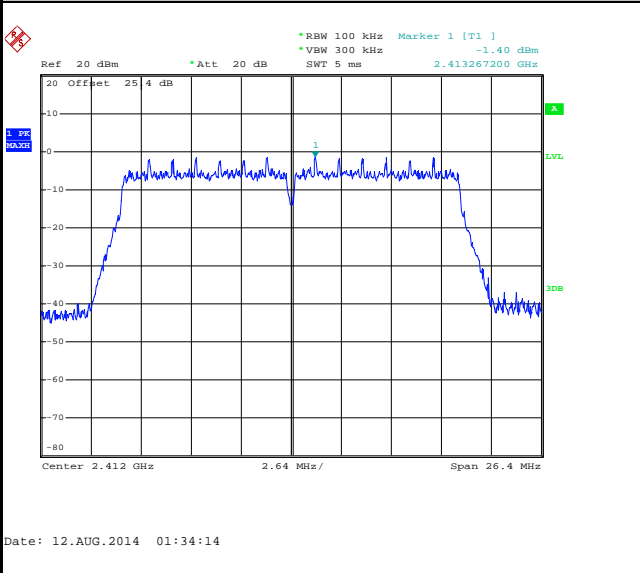


Low Channel Plot

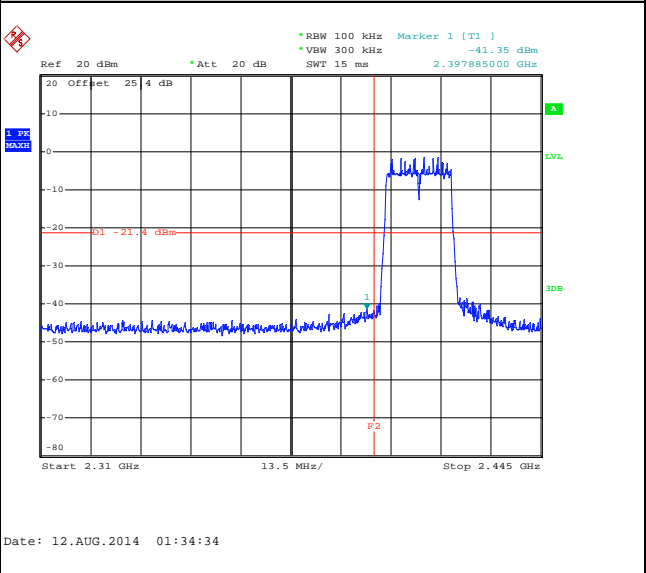

Spurious Emission 30MHz~3GHz

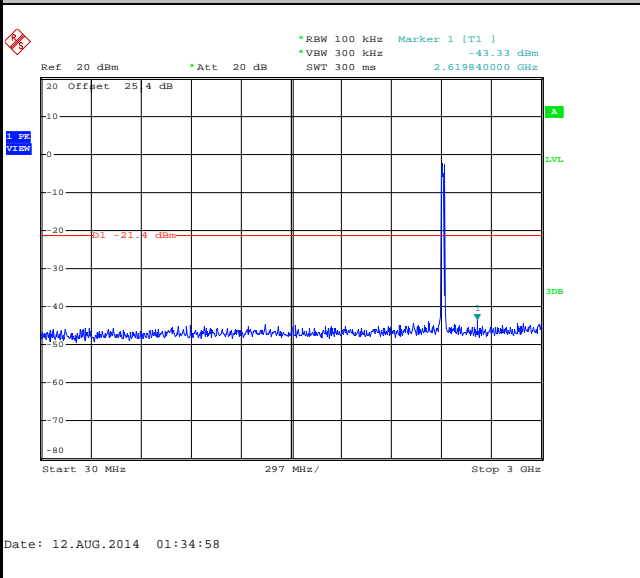

Spurious Emission 2GHz~25GHz

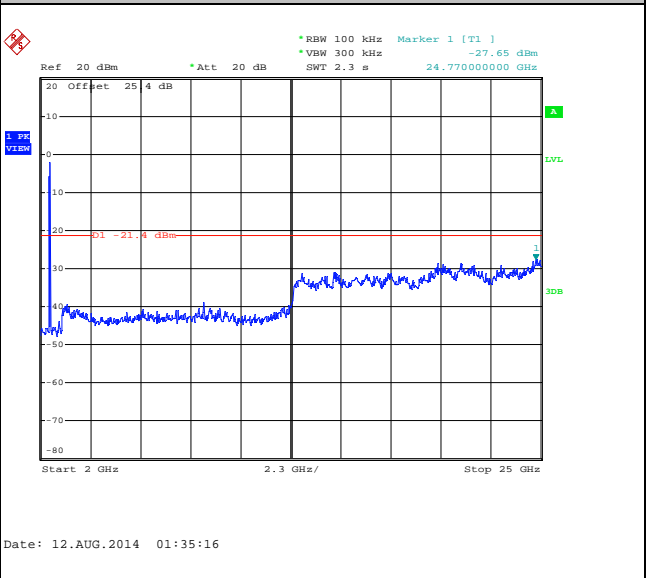





Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Alex Lee

WLAN 802.11n HT20 Channel 06


100kHz PSD reference Level

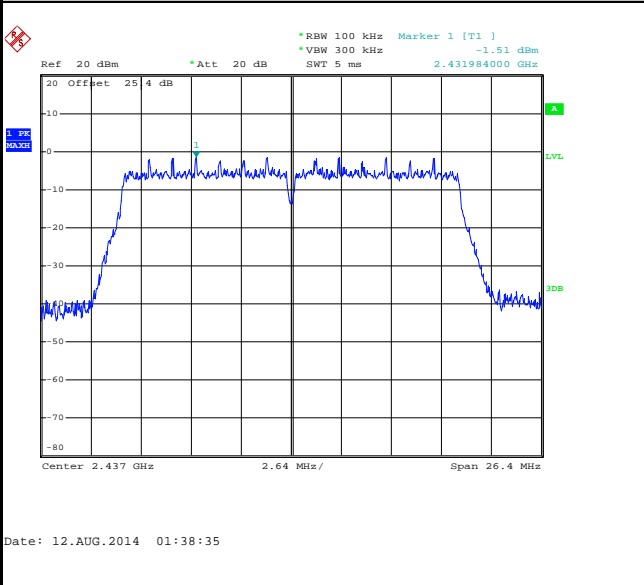

Spurious Emission 30MHz~3GHz

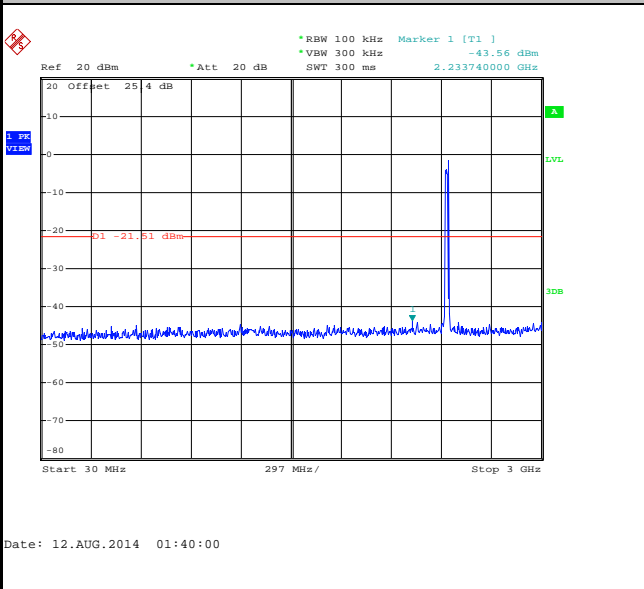

Spurious Emission 2GHz~25GHz

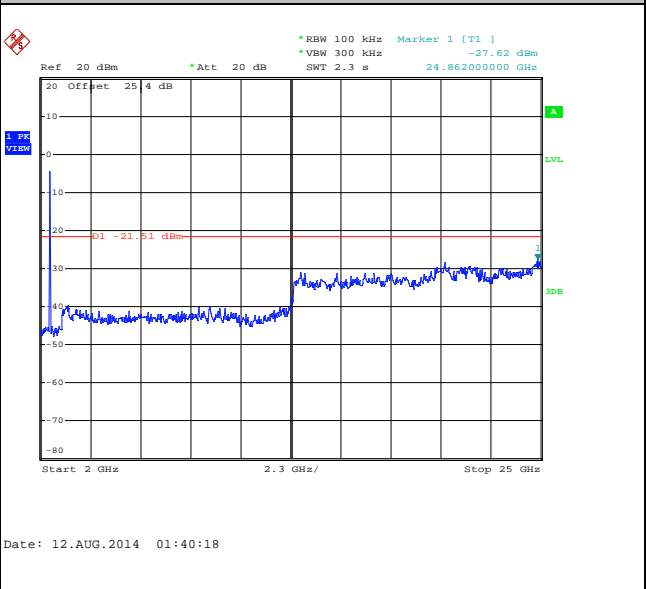





Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Alex Lee

WLAN 802.11n HT20 Channel 11


100kHz PSD reference Level

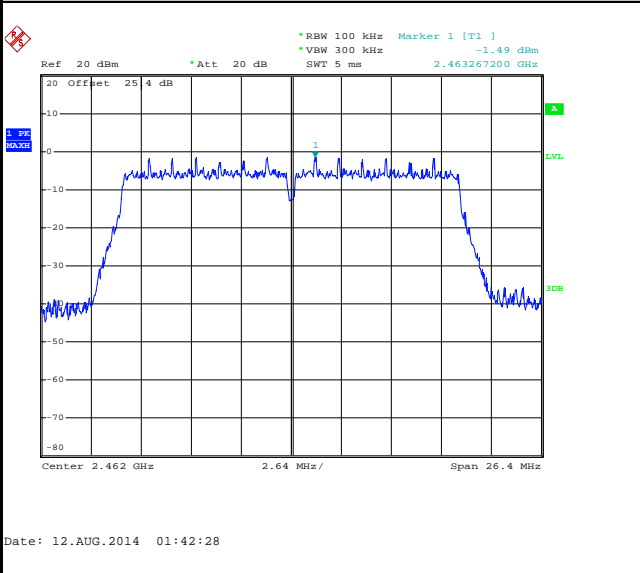


High Channel Plot

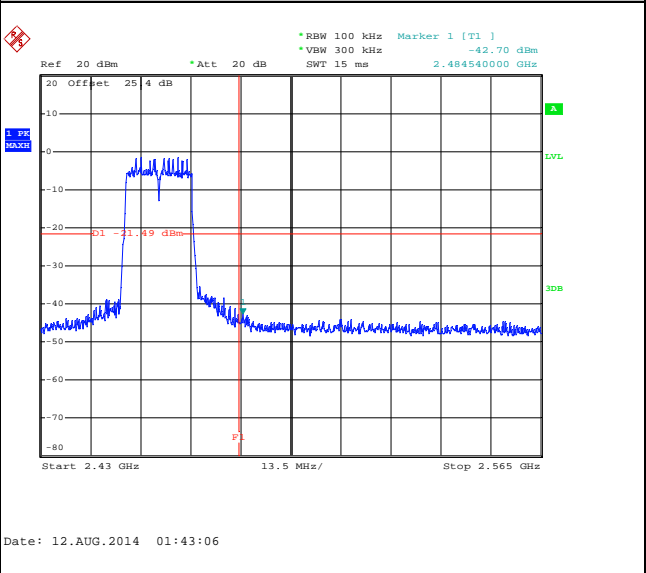

Spurious Emission 30MHz~3GHz

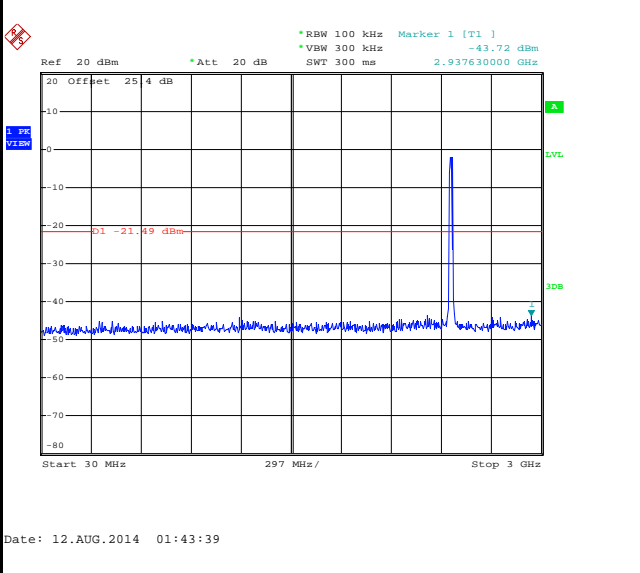

Spurious Emission 2GHz~25GHz

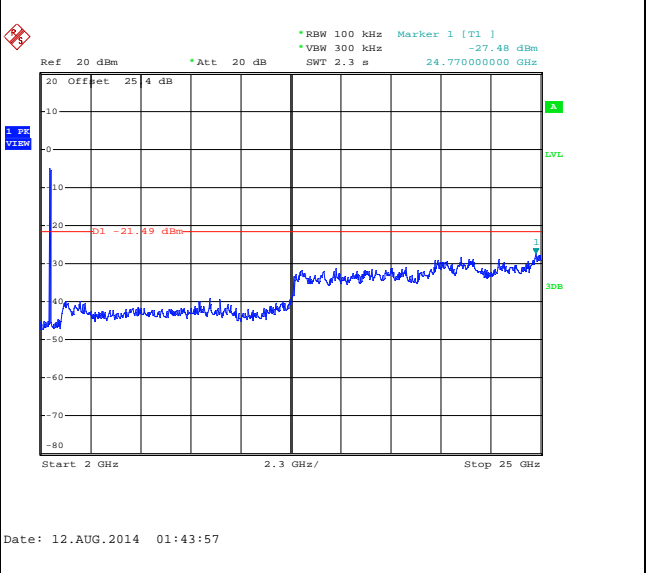





Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	03	Test Engineer :	Alex Lee

WLAN 802.11n HT40 Channel 03


100kHz PSD reference Level

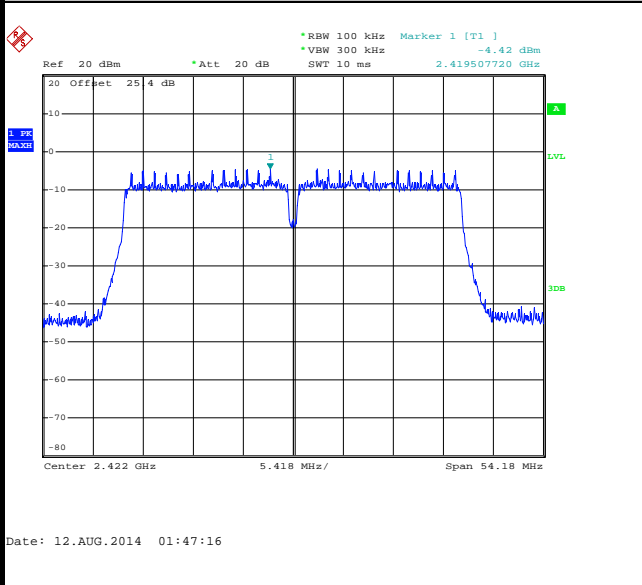


Low Channel Plot

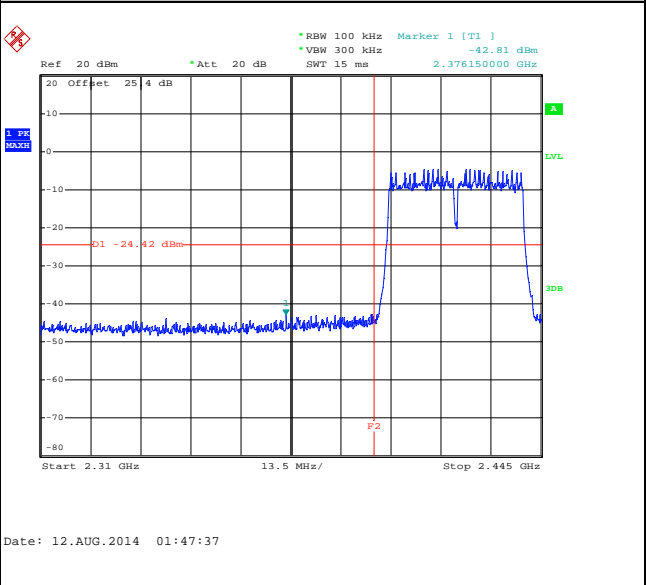

Spurious Emission 30MHz~3GHz

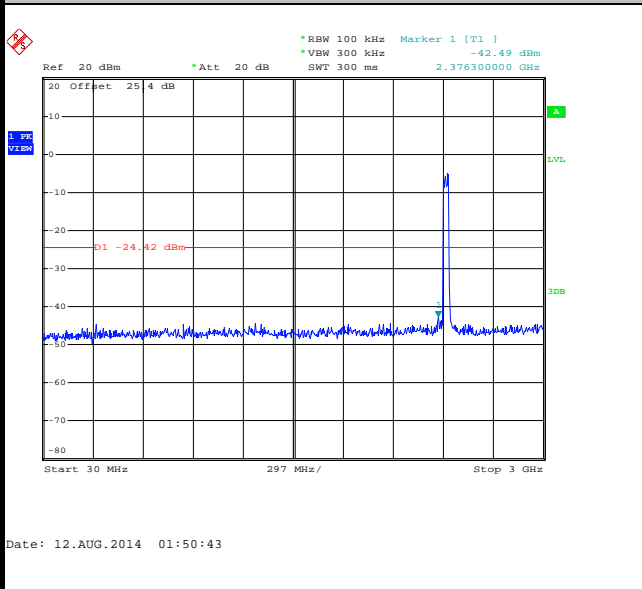

Spurious Emission 2GHz~25GHz

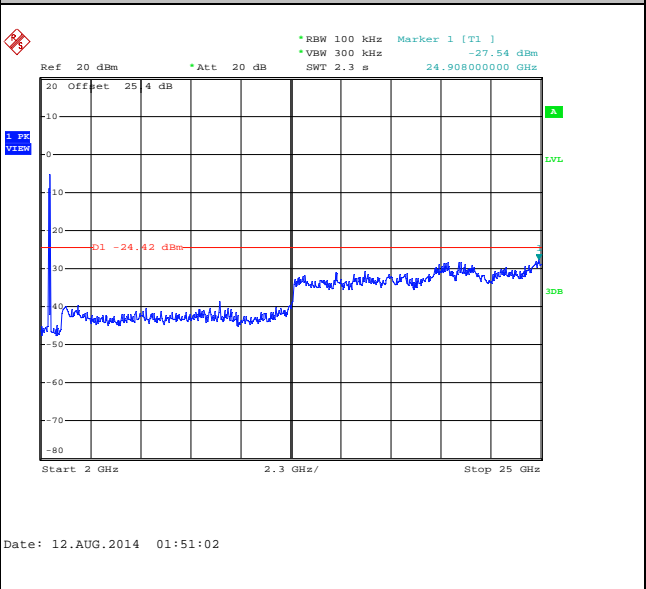







Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Alex Lee

WLAN 802.11n HT40 Channel 06


100kHz PSD reference Level

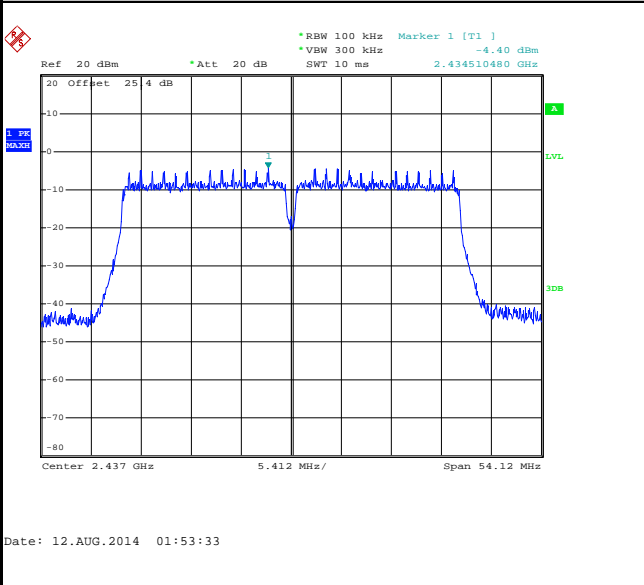

Spurious Emission 30MHz~3GHz

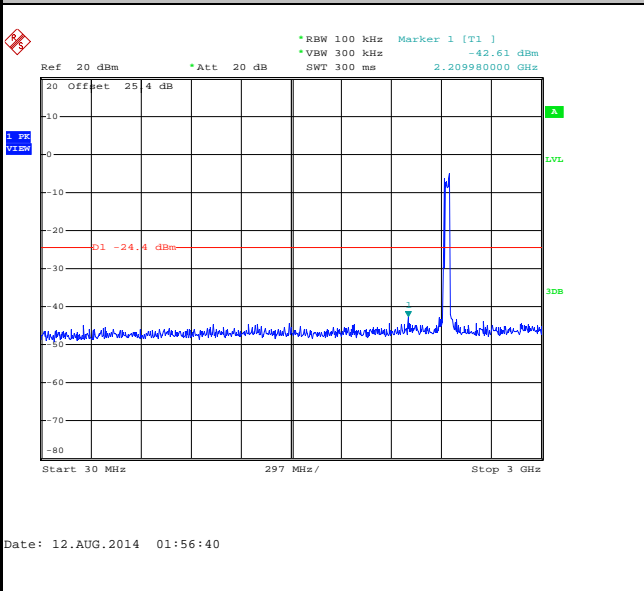

Spurious Emission 2GHz~25GHz

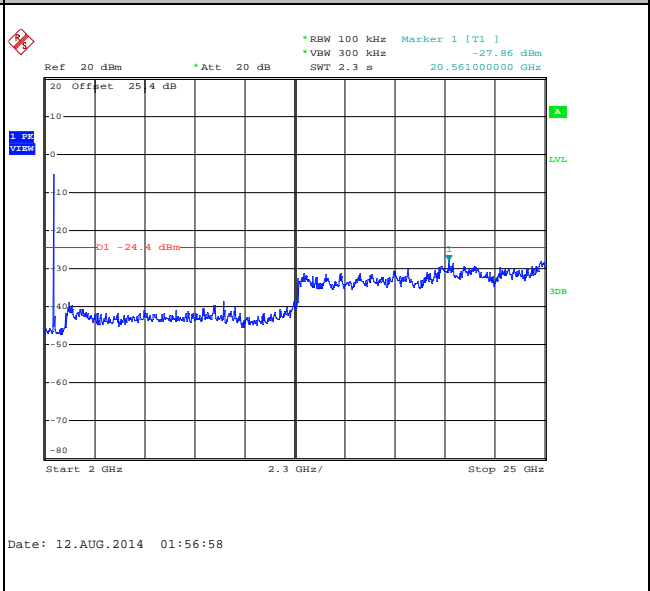





Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	09	Test Engineer :	Alex Lee

WLAN 802.11n HT40 Channel 09


100kHz PSD reference Level

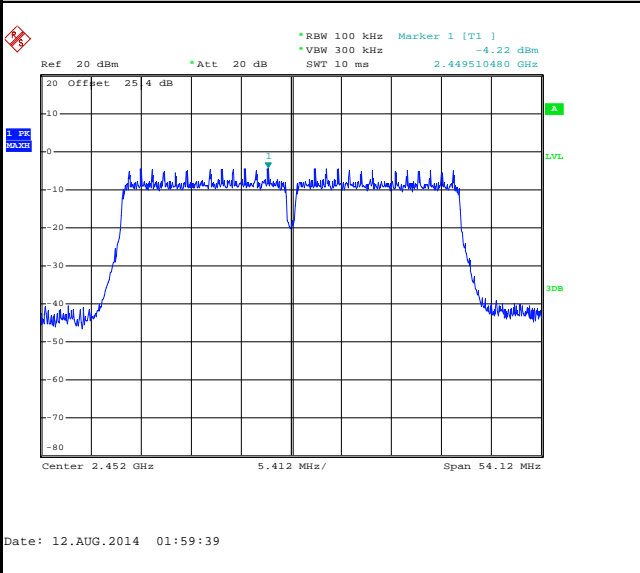


High Channel Plot

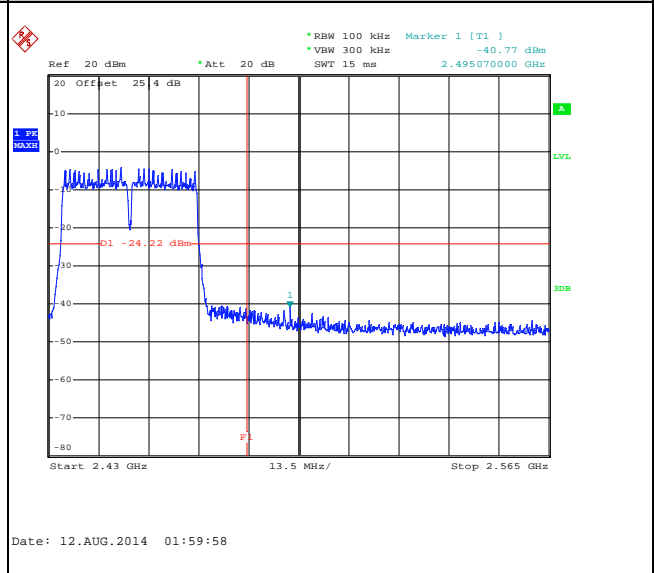

Spurious Emission 30MHz~3GHz

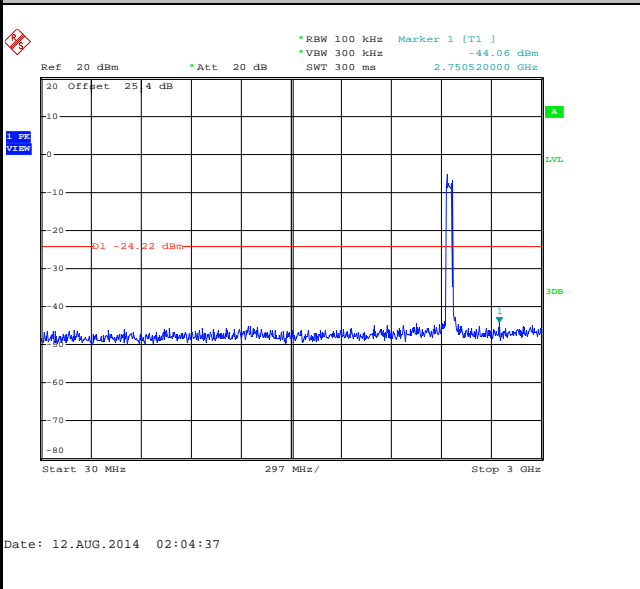

Spurious Emission 2GHz~25GHz

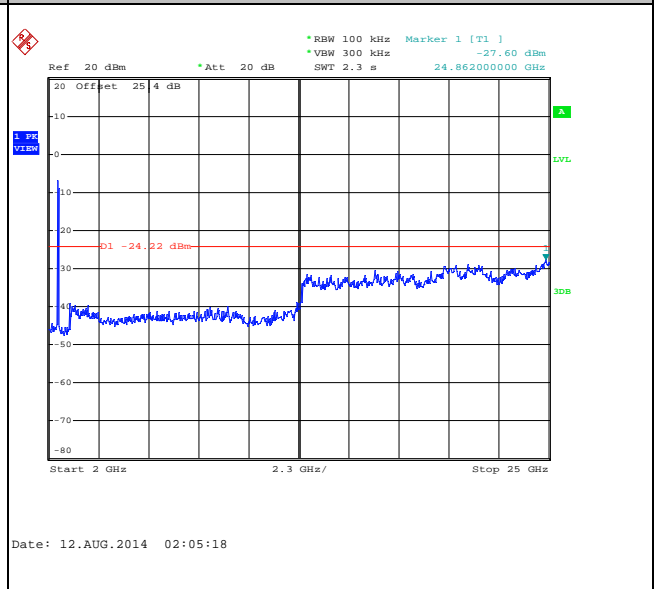



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.


For average measurement:

  - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
  - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	98.13	-	-	10Hz
802.11g	89.10	1.39	0.72	1kHz
2.4GHz 802.11n HT20	88.44	1.30	0.77	1kHz
2.4GHz 802.11n HT40	79.56	0.65	1.53	3kHz

### 3.5.4 Test Setup


For radiated emissions below 30MHz

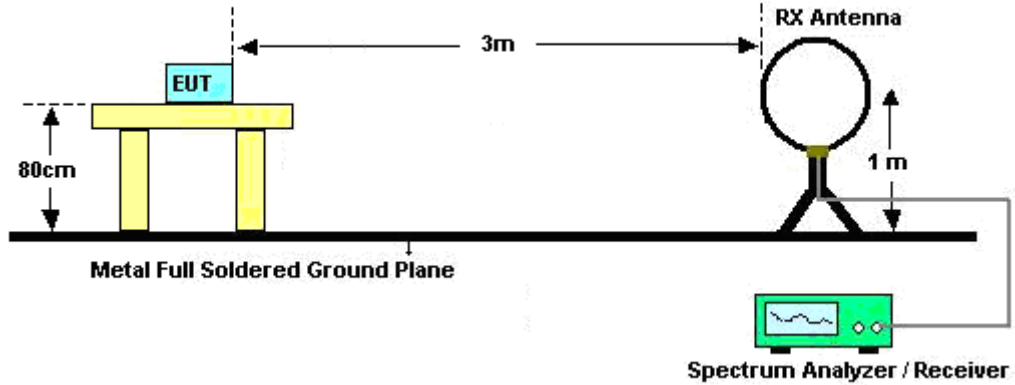

For radiated emissions from 30MHz to 1GHz

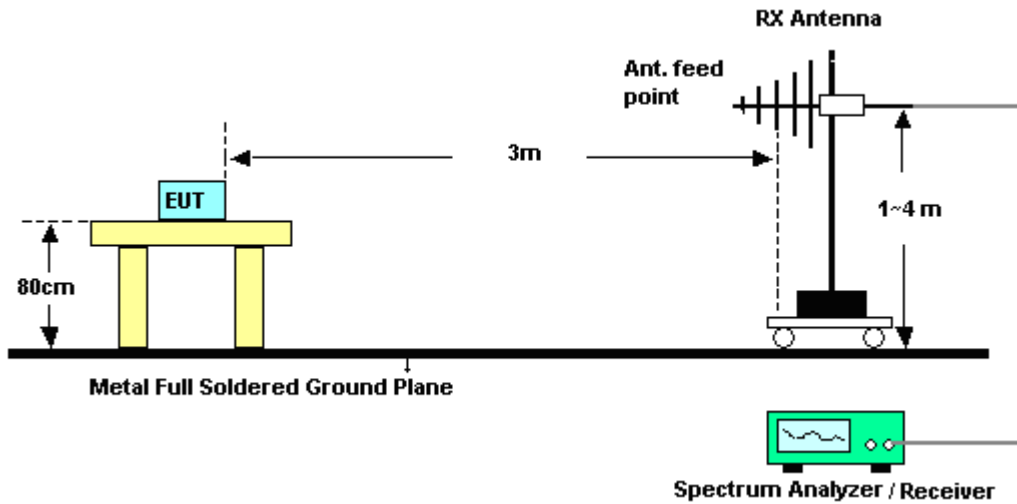

For radiated emissions above 1GHz

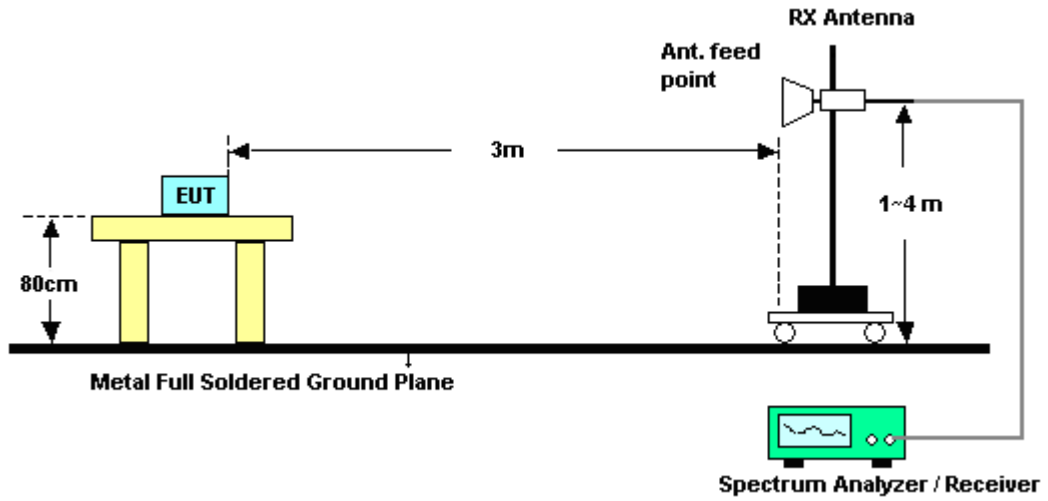

### 3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Spurious at Band Edges

Test Mode :	802.11b	Temperature :	25~26°C
Test Band :	Low	Relative Humidity :	50~51%
Test Channel :	01	Test Engineer :	Jc Lui

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2379.3	55.91	-18.09	74	58.08	26.89	4.6	33.66	111	305	Peak
2381.19	41.26	-12.74	54	43.41	26.89	4.62	33.66	111	305	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2387.4	53.87	-20.13	74	55.97	26.93	4.62	33.65	111	285	Peak
2389.92	39.65	-14.35	54	41.75	26.93	4.62	33.65	111	285	Average

Test Mode :	802.11b	Temperature :	25~26°C
Test Band :	High	Relative Humidity :	50~51%
Test Channel :	11	Test Engineer :	Jc Lui

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2488.78	52.36	-21.64	74	53.99	27.2	4.73	33.56	103	302	Peak
2487.01	39.72	-14.28	54	41.4	27.16	4.73	33.57	103	302	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2488.24	51.5	-22.5	74	53.13	27.2	4.73	33.56	133	283	Peak
2486.89	38.58	-15.42	54	40.26	27.16	4.73	33.57	133	283	Average



Test Mode :	802.11g	Temperature :	25~26°C
Test Band :	Low	Relative Humidity :	50~51%
Test Channel :	01	Test Engineer :	Jc Lui

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2387.4	63.18	-10.82	74	65.28	26.93	4.62	33.65	104	303	Peak
2390	46.41	-7.59	54	48.51	26.93	4.62	33.65	104	303	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2387.58	61.81	-12.19	74	63.91	26.93	4.62	33.65	113	274	Peak
2389.92	45.17	-8.83	54	47.27	26.93	4.62	33.65	113	274	Average

Test Mode :	802.11g	Temperature :	25~26°C
Test Band :	High	Relative Humidity :	50~51%
Test Channel :	11	Test Engineer :	Jc Lui

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.59	70.61	-3.39	74	72.29	27.16	4.73	33.57	103	305	Peak
2483.5	49.75	-4.25	54	51.43	27.16	4.73	33.57	103	305	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.65	69.67	-4.33	74	71.35	27.16	4.73	33.57	128	269	Peak
2483.5	48.75	-5.25	54	50.43	27.16	4.73	33.57	128	269	Average





Test Mode :	802.11n HT20	Temperature :	25~26°C
Test Band :	Low	Relative Humidity :	50~51%
Test Channel :	01	Test Engineer :	Jc Lui

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.29	58.33	-15.67	74	60.43	26.93	4.62	33.65	109	304	Peak
2390	43.22	-10.78	54	45.32	26.93	4.62	33.65	109	304	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.83	59.7	-14.3	74	61.8	26.93	4.62	33.65	141	273	Peak
2389.2	43.05	-10.95	54	45.15	26.93	4.62	33.65	141	273	Average

Test Mode :	802.11n HT20	Temperature :	25~26°C
Test Band :	High	Relative Humidity :	50~51%
Test Channel :	11	Test Engineer :	Jc Lui

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2484.19	57.79	-16.21	74	59.47	27.16	4.73	33.57	107	313	Peak
2484.16	43.04	-10.96	54	44.72	27.16	4.73	33.57	107	313	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.56	58.41	-15.59	74	60.09	27.16	4.73	33.57	132	271	Peak
2483.65	43.14	-10.86	54	44.82	27.16	4.73	33.57	132	271	Average



Test Mode :	802.11n HT40	Temperature :	25~26°C
Test Band :	Low	Relative Humidity :	50~51%
Test Channel :	03	Test Engineer :	Jc Lui

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2388.93	60.47	-13.53	74	62.57	26.93	4.62	33.65	104	302	Peak
2389.74	39.18	-14.82	54	41.28	26.93	4.62	33.65	104	302	Average
2483.71	43.43	-30.57	74	45.11	27.16	4.73	33.57	104	302	Peak
2485	28.7	-25.3	54	30.38	27.16	4.73	33.57	104	302	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2388.48	60.57	-13.43	74	62.67	26.93	4.62	33.65	143	280	Peak
2387.4	39.62	-14.38	54	41.72	26.93	4.62	33.65	143	280	Average
2483.89	41.89	-32.11	74	43.57	27.16	4.73	33.57	143	280	Peak
2483.59	28.15	-25.85	54	29.83	27.16	4.73	33.57	143	280	Average



Test Mode :	802.11n HT40	Temperature :	25~26°C
Test Band :	High	Relative Humidity :	50~51%
Test Channel :	09	Test Engineer :	Jc Lui

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.83	44.83	-29.17	74	46.93	26.93	4.62	33.65	103	295	Peak
2390	30.26	-23.74	54	32.36	26.93	4.62	33.65	103	295	Average
2487.52	50.28	-23.72	74	51.91	27.2	4.73	33.56	103	295	Peak
2484.73	35.07	-18.93	54	36.75	27.16	4.73	33.57	103	295	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.83	46.6	-27.4	74	48.7	26.93	4.62	33.65	132	281	Peak
2382	30.49	-23.51	54	32.64	26.89	4.62	33.66	132	281	Average
2484.04	48.32	-25.68	74	50	27.16	4.73	33.57	132	281	Peak
2483.77	34.21	-19.79	54	35.89	27.16	4.73	33.57	132	281	Average



3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Note: Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	100.33	-	-	102.33	26.98	4.65	33.63	111	305	Average
2412	106.43	-	-	108.43	26.98	4.65	33.63	111	305	Peak
4824	36.54	-37.46	74	57.72	31.22	6.54	58.94	100	0	Peak

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	98.43	-	-	100.43	26.98	4.65	33.63	111	285	Average
2412	104.37	-	-	106.37	26.98	4.65	33.63	111	285	Peak
4824	36.87	-37.13	74	58.05	31.22	6.54	58.94	100	0	Peak



<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2437	99.65	-	-	101.57	27.02	4.68	33.62	107	294	Average
2437	105.62	-	-	107.54	27.02	4.68	33.62	107	294	Peak
4875	37.76	-36.24	74	58.76	31.31	6.56	58.87	100	0	Peak
7311	42.55	-31.45	74	56.63	36.14	8.24	58.46	100	0	Peak

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2437	99.47	-	-	101.32	27.07	4.68	33.6	134	278	Average
2437	105.3	-	-	107.15	27.07	4.68	33.6	134	278	Peak
4875	36.81	-37.19	74	57.81	31.31	6.56	58.87	100	0	Peak
7311	41.89	-32.11	74	55.97	36.14	8.24	58.46	100	0	Peak



<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2462	98.72	-	-	100.5	27.11	4.7	33.59	103	302	Average
2462	104.58	-	-	106.36	27.11	4.7	33.59	103	302	Peak
4923	36.55	-37.45	74	57.37	31.39	6.59	58.8	100	0	Peak
7386	42.19	-31.81	74	56.14	36.35	8.31	58.61	100	0	Peak

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2462	97.98	-	-	99.76	27.11	4.7	33.59	133	283	Average
2462	103.85	-	-	105.63	27.11	4.7	33.59	133	283	Peak
4923	36.05	-37.95	74	56.87	31.39	6.59	58.8	100	0	Peak
7386	41.62	-32.38	74	55.57	36.35	8.31	58.61	100	0	Peak



<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	95.42	-	-	97.42	26.98	4.65	33.63	104	303	Average
2412	105.4	-	-	107.4	26.98	4.65	33.63	104	303	Peak
4824	36.45	-37.55	74	57.63	31.22	6.54	58.94	100	0	Peak

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	94.98	-	-	96.98	26.98	4.65	33.63	113	274	Average
2412	105.12	-	-	107.12	26.98	4.65	33.63	113	274	Peak
4824	35.83	-38.17	74	57.01	31.22	6.54	58.94	100	0	Peak



<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2437	95.68	-	-	97.53	27.07	4.68	33.6	106	303	Average
2437	105.54	-	-	107.39	27.07	4.68	33.6	106	303	Peak
4875	36.6	-37.4	74	57.6	31.31	6.56	58.87	100	0	Peak
7311	41.85	-32.15	74	55.93	36.14	8.24	58.46	100	0	Peak

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2437	95.64	-	-	97.49	27.07	4.68	33.6	100	283	Average
2437	105.65	-	-	107.5	27.07	4.68	33.6	100	283	Peak
4875	36.05	-37.95	74	57.05	31.31	6.56	58.87	100	0	Peak
7311	42.1	-31.9	74	56.18	36.14	8.24	58.46	100	0	Peak





<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
57	30.77	-9.23	40	55.52	6.2	0.85	31.8	100	145	Peak
131.25	20.68	-22.82	43.5	39.25	11.98	1.23	31.78	-	-	Peak
174.18	20.15	-23.35	43.5	41.25	9.3	1.38	31.78	-	-	Peak
629.7	19.96	-26.04	46	29.01	20.47	2.52	32.04	-	-	Peak
719.3	21.43	-24.57	46	29.36	21.4	2.69	32.02	-	-	Peak
934.2	24.25	-21.75	46	27.98	24.38	3.04	31.15	-	-	Peak
2462	97.84	-	-	99.62	27.11	4.7	33.59	103	305	Average
2462	107.54	-	-	109.32	27.11	4.7	33.59	103	305	Peak
4923	36.86	-37.14	74	57.68	31.39	6.59	58.8	100	0	Peak
7386	42.4	-31.6	74	56.35	36.35	8.31	58.61	100	0	Peak



<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
99.93	17.2	-26.3	43.5	37.48	10.4	1.1	31.78	-	-	Peak
129.9	18.49	-25.01	43.5	36.94	12.1	1.23	31.78	-	-	Peak
171.21	12.95	-30.55	43.5	33.82	9.54	1.37	31.78	-	-	Peak
561.8	20.22	-25.78	46	29.8	20.05	2.35	31.98	-	-	Peak
770.4	22.17	-23.83	46	29.24	22.1	2.78	31.95	-	-	Peak
937	25.5	-20.5	46	29.15	24.44	3.05	31.14	100	54	Peak
2462	98.01	-	-	99.79	27.11	4.7	33.59	128	269	Average
2462	107.24	-	-	109.02	27.11	4.7	33.59	128	269	Peak
4923	36.42	-37.58	74	57.24	31.39	6.59	58.8	100	0	Peak
7386	42.66	-31.34	74	56.61	36.35	8.31	58.61	100	0	Peak



<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	92.01	-	-	94.01	26.98	4.65	33.63	109	304	Average
2412	102.44	-	-	104.44	26.98	4.65	33.63	109	304	Peak
4824	37.24	-36.76	74	58.42	31.22	6.54	58.94	100	0	Peak

<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	91.42	-	-	93.42	26.98	4.65	33.63	141	273	Average
2412	101.75	-	-	103.75	26.98	4.65	33.63	141	273	Peak
4824	36.3	-37.7	74	57.48	31.22	6.54	58.94	100	0	Peak



<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2437	90.48	-	-	92.4	27.02	4.68	33.62	109	290	Average
2437	100.3	-	-	102.22	27.02	4.68	33.62	109	290	Peak
4875	36.06	-37.94	74	57.06	31.31	6.56	58.87	100	0	Peak
7311	41.66	-32.34	74	55.74	36.14	8.24	58.46	100	0	Peak

<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2437	91.46	-	-	93.38	27.02	4.68	33.62	134	277	Average
2437	100.92	-	-	102.84	27.02	4.68	33.62	134	277	Peak
4875	37.05	-36.95	74	58.05	31.31	6.56	58.87	100	0	Peak
7311	42.2	-31.8	74	56.28	36.14	8.24	58.46	100	0	Peak



<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2462	91.79	-	-	93.57	27.11	4.7	33.59	107	313	Average
2462	101.83	-	-	103.61	27.11	4.7	33.59	107	313	Peak
4923	35.84	-38.16	74	56.66	31.39	6.59	58.8	100	0	Peak
7386	42.82	-31.18	74	56.77	36.35	8.31	58.61	100	0	Peak

<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2462	91.52	-	-	93.3	27.11	4.7	33.59	132	271	Average
2462	101.24	-	-	103.02	27.11	4.7	33.59	132	271	Peak
4923	35.73	-38.27	74	56.55	31.39	6.59	58.8	100	0	Peak
7386	42.2	-31.8	74	56.15	36.35	8.31	58.61	100	0	Peak



<b>Test Mode :</b>	2.4GHz 802.11n HT40	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	03	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2422 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2422	81.09	-	-	83.04	27.02	4.65	33.62	104	302	Average
2422	90.65	-	-	92.6	27.02	4.65	33.62	104	302	Peak
4845	36.4	-37.6	74	57.52	31.25	6.55	58.92	100	0	Peak
7266	40.78	-33.22	74	54.92	36.06	8.2	58.4	100	0	Peak

<b>Test Mode :</b>	2.4GHz 802.11n HT40	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	03	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2422 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2422	81.59	-	-	83.54	27.02	4.65	33.62	143	280	Average
2422	90.7	-	-	92.65	27.02	4.65	33.62	143	280	Peak
4845	35.95	-38.05	74	57.07	31.25	6.55	58.92	100	0	Peak
7266	41.04	-32.96	74	55.18	36.06	8.2	58.4	100	0	Peak



<b>Test Mode :</b>	2.4GHz 802.11n HT40	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2437	78.98	-	-	80.9	27.02	4.68	33.62	107	302	Average
2437	88.45	-	-	90.37	27.02	4.68	33.62	107	302	Peak
4875	36.66	-37.34	74	57.66	31.31	6.56	58.87	100	0	Peak
7311	41.39	-32.61	74	55.47	36.14	8.24	58.46	100	0	Peak

<b>Test Mode :</b>	2.4GHz 802.11n HT40	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2437	78.95	-	-	80.87	27.02	4.68	33.62	173	278	Average
2437	87.8	-	-	89.72	27.02	4.68	33.62	173	278	Peak
4875	36.13	-37.87	74	57.13	31.31	6.56	58.87	100	0	Peak
7311	41.37	-32.63	74	55.45	36.14	8.24	58.46	100	0	Peak



<b>Test Mode :</b>	2.4GHz 802.11n HT40	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	09	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2452 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2452	78.23	-	-	80.08	27.07	4.68	33.6	103	295	Average
2452	87.18	-	-	89.03	27.07	4.68	33.6	103	295	Peak
4905	36.63	-37.37	74	57.5	31.36	6.59	58.82	100	0	Peak
7356	42.72	-31.28	74	56.71	36.27	8.29	58.55	100	0	Peak

<b>Test Mode :</b>	2.4GHz 802.11n HT40	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	09	<b>Relative Humidity :</b>	50~51%
<b>Test Engineer :</b>	Jc Lui	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2452 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2452	78.3	-	-	80.15	27.07	4.68	33.6	132	281	Average
2452	87.07	-	-	88.92	27.07	4.68	33.6	132	281	Peak
4905	37.02	-36.98	74	57.89	31.36	6.59	58.82	100	0	Peak
7356	42.01	-31.99	74	56	36.27	8.29	58.55	100	0	Peak





### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


### 3.6.4 Test Setup

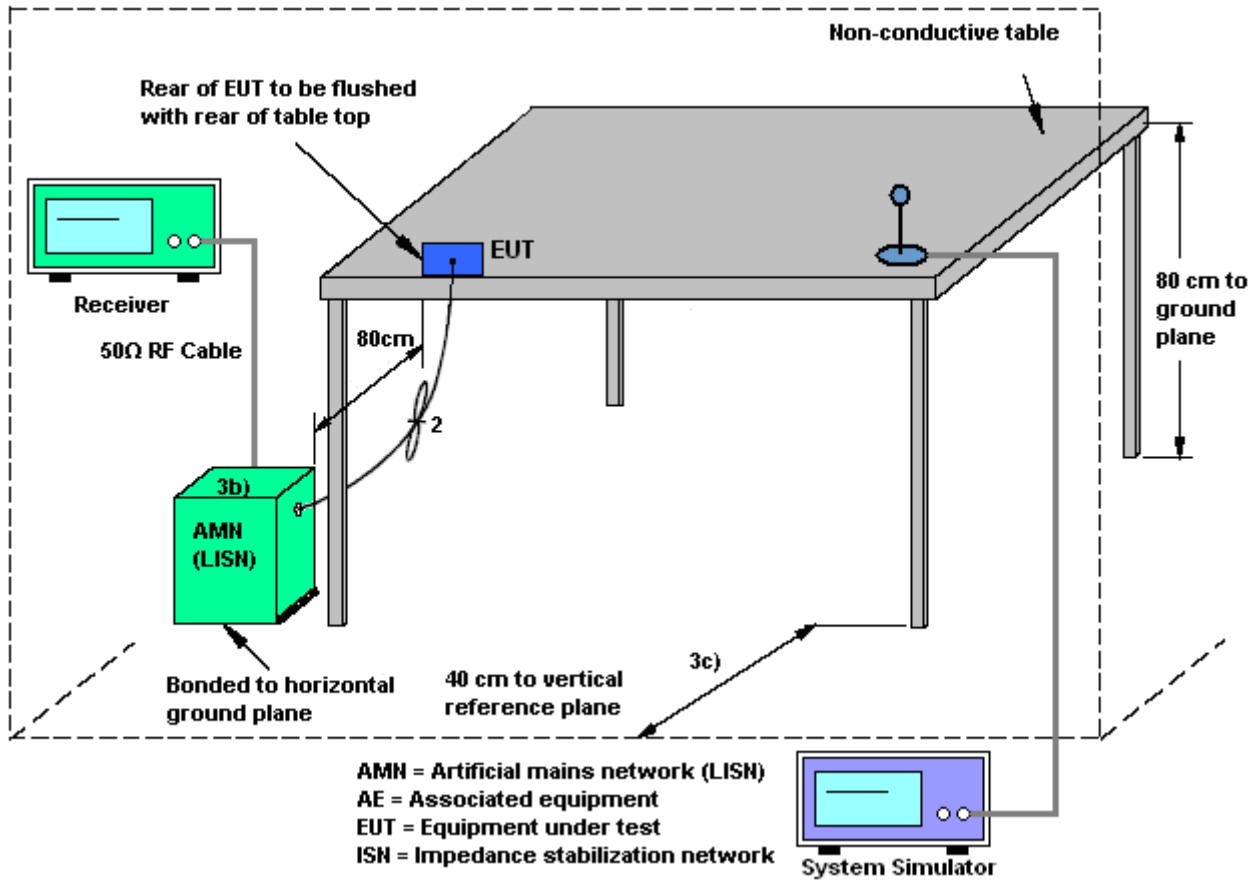



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Eligah Wang	Relative Humidity :	46~49%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter 2) for Sample 1		

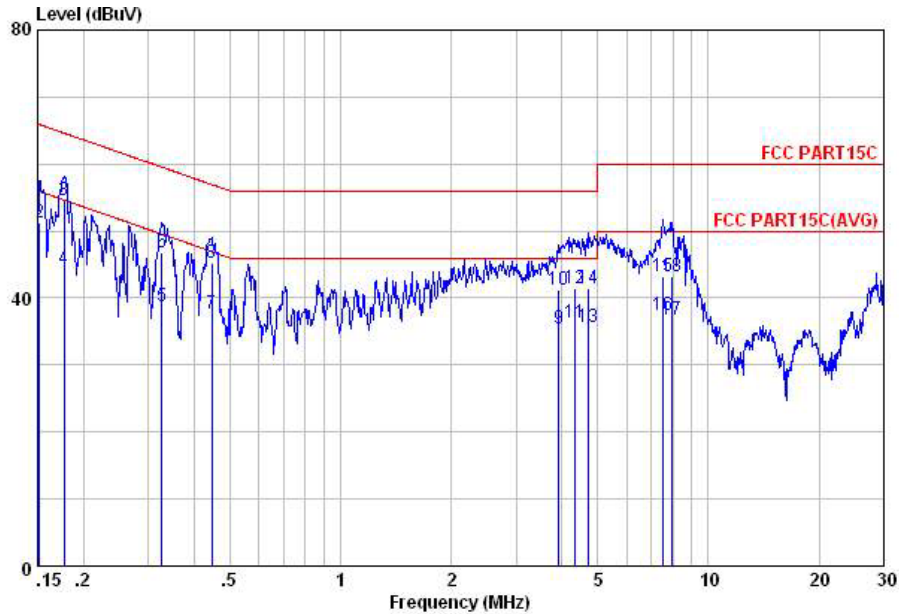


Site : C001-KS  
 Condition: FCC PART15C LISN-L20130306 LINE

mode : Mode 2

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.15	39.24	-16.67	55.91	26.60	1.93	10.71	Average
2	0.15	51.24	-14.67	65.91	38.60	1.93	10.71	QP
3	0.18	54.60	-10.04	64.64	42.60	1.37	10.63	QP
4	0.18	44.30	-10.34	54.64	32.30	1.37	10.63	Average
5	0.33	38.77	-10.76	49.53	27.89	0.53	10.35	Average
6	0.33	46.77	-12.76	59.53	35.89	0.53	10.35	QP
7	0.45	37.63	-9.30	46.93	27.11	0.25	10.27	Average
8	0.45	45.33	-11.60	56.93	34.81	0.25	10.27	QP
9	3.92	35.32	-10.68	46.00	24.90	0.18	10.24	Average
10	3.92	41.32	-14.68	56.00	30.90	0.18	10.24	QP
11	4.34	36.34	-9.66	46.00	25.90	0.19	10.25	Average
12	4.34	41.34	-14.66	56.00	30.90	0.19	10.25	QP
13	4.72	35.55	-10.45	46.00	25.10	0.20	10.25	Average
14	4.72	41.55	-14.45	56.00	31.10	0.20	10.25	QP
15	7.53	43.13	-16.87	60.00	32.60	0.20	10.33	QP
16	7.53	37.33	-12.67	50.00	26.80	0.20	10.33	Average
17	7.98	36.84	-13.16	50.00	26.30	0.20	10.34	Average
18	7.98	43.34	-16.66	60.00	32.80	0.20	10.34	QP



Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Eligah Wang	Relative Humidity :	46~49%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter 2) for Sample 2		

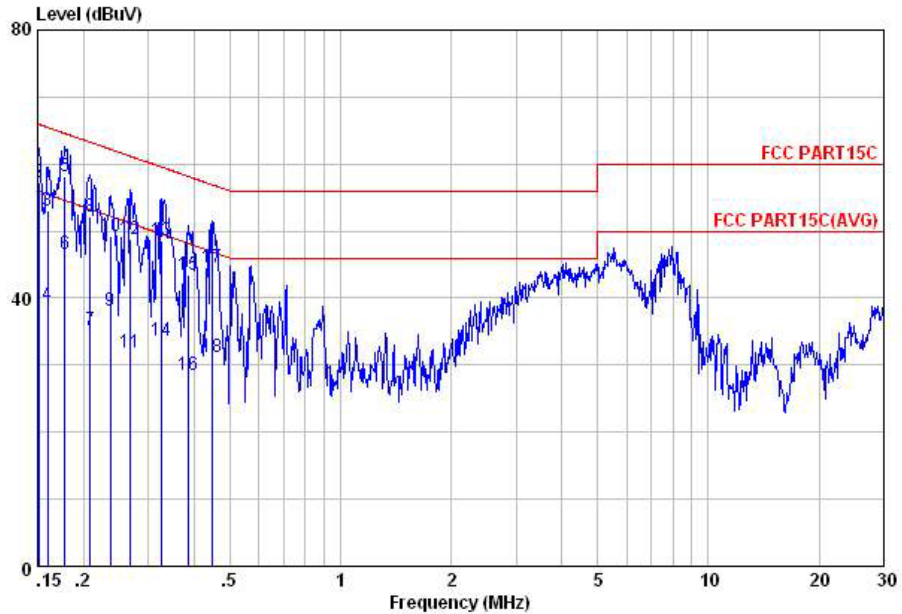

Site : C001-KS  
 Condition: FCC PART15C LISN-M20130306 NEUTRAL

mode : Mode 2

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	41.50	-14.46	55.96	28.89	1.89	10.72	Average
2	0.15	57.20	-8.76	65.96	44.59	1.89	10.72	QP
3	0.16	53.02	-12.45	65.47	40.61	1.74	10.67	QP
4	0.16	39.02	-16.45	55.47	26.61	1.74	10.67	Average
5	0.18	58.25	-6.34	64.59	46.30	1.33	10.62	QP
6	0.18	46.55	-8.04	54.59	34.60	1.33	10.62	Average
7	0.21	35.15	-18.12	53.27	23.60	0.98	10.57	Average
8	0.21	52.15	-11.12	63.27	40.60	0.98	10.57	QP
9	0.24	38.05	-14.17	52.22	26.60	0.92	10.53	Average
10	0.24	49.35	-12.87	62.22	37.90	0.92	10.53	QP
11	0.27	31.91	-19.25	51.16	20.61	0.84	10.46	Average
12	0.27	48.91	-12.25	61.16	37.61	0.84	10.46	QP
13	0.33	48.54	-11.03	59.57	37.59	0.60	10.35	QP
14	0.33	33.54	-16.03	49.57	22.59	0.60	10.35	Average
15	0.39	43.51	-14.61	58.12	32.80	0.42	10.29	QP
16	0.39	28.61	-19.51	48.12	17.90	0.42	10.29	Average
17	0.45	44.52	-12.37	56.89	33.91	0.34	10.27	QP
18	0.45	31.22	-15.67	46.89	20.61	0.34	10.27	Average



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	Aug. 12, 2014	Jun. 08, 2015	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB41292344	300MHz~40GHz	Jan. 28, 2014	Aug. 12, 2014	Jan. 27, 2015	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US40441548	300MHz~40GHz	Jan. 28, 2014	Aug. 12, 2014	Jan. 27, 2015	Conducted (TH02-HY)
EMI Test Receiver	R&S	ESVS10	834468/0003	20MHz ~ 1000MHz	May 06, 2014	Aug. 12, 2014~ Aug. 13, 2014	May 05, 2015	Radiation (03CH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	Aug. 12, 2014~ Aug. 13, 2014	Jun. 08, 2015	Radiation (03CH05-HY)
Bilog Antenna	Schaffner	CBL6111C	2725	30MHz~1GHz	Oct. 10, 2013	Aug. 12, 2014~ Aug. 13, 2014	Oct. 09, 2014	Radiation (03CH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100330	9K~30M	Nov. 15, 2012	Aug. 12, 2014~ Aug. 13, 2014	Nov. 14, 2014	Radiation (03CH05-HY)
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1241	1GHz~18GHz	Apr. 16, 2014	Aug. 12, 2014~ Aug. 13, 2014	Apr. 15, 2015	Radiation (03CH05-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz~40GHz	Oct. 03, 2013	Aug. 12, 2014~ Aug. 13, 2014	Oct. 02, 2014	Radiation (03CH05-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	100kHz~18GHz	Jul. 07, 2014	Aug. 12, 2014~ Aug. 13, 2014	Jul. 06, 2015	Radiation (03CH05-HY)
Preamplifier	COM-POWER	PA-103	161075	9kHz~30MHz	Apr. 15, 2014	Aug. 12, 2014~ Aug. 13, 2014	Apr. 14, 2015	Radiation (03CH05-HY)
Preamplifier	Miteq	TTA0204	1872107	18GHz~40GHz	May 23, 2014	Aug. 12, 2014~ Aug. 13, 2014	May 22, 2015	Radiation (03CH05-HY)
Turn Table	HD	HD100	420/611	0 - 360 degree	N/A	Aug. 12, 2014~ Aug. 13, 2014	N/A	Radiation (03CH05-HY)
Antenna Mast	HD	HD100	240/666	1 m - 4 m	N/A	Aug. 12, 2014~ Aug. 13, 2014	N/A	Radiation (03CH05-HY)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 04, 2014	Aug. 13, 2014	May 03, 2015	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Dec. 10, 2013	Aug. 13, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Dec. 10, 2013	Aug. 13, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Nov. 12, 2013	Aug. 13, 2014	Nov. 11, 2014	Conduction (CO01-KS)

※ Calibration Interval of Loop Antenna is two years.



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3
---	-----

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.5
---	-----