



FCC RF Test Report

APPLICANT : Acer Incorporated
EQUIPMENT : Smart HandHeld
BRAND NAME : Acer
MODEL NAME : Z520
MARKETING NAME : Liquid Z520
FCC ID : HLZDMZ520
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jan. 02, 2015 and testing was completed on Feb. 02, 2015. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test 5

 1.4 Product Specification subjective to this standard 6

 1.5 Modification of EUT 7

 1.6 Testing Location 7

 1.7 Applicable Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency Channel 8

 2.2 Pre-Scanned RF Power 9

 2.3 Test Mode 10

 2.4 Connection Diagram of Test System 11

 2.5 Support Unit used in test configuration and system 12

 2.6 EUT Operation Test Setup 12

 2.7 Measurement Results Explanation Example 13

3 TEST RESULT 14

 3.1 6dB and 99% Bandwidth Measurement 14

 3.2 Output Power Measurement 17

 3.3 Power Spectral Density Measurement 20

 3.4 Conducted Band Edges and Spurious Emission Measurement 23

 3.5 Radiated Band Edges and Spurious Emission Measurement 36

 3.6 AC Conducted Emission Measurement 40

 3.7 Antenna Requirements 44

4 LIST OF MEASURING EQUIPMENT 45

5 UNCERTAINTY OF EVALUATION 46

APPENDIX A. RADIATED TEST RESULTS

APPENDIX B. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR510202C	Rev. 01	Initial issue of report	Feb. 13, 2015

**SUMMARY OF TEST RESULT**

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	RSS-210 A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	RSS-Gen 4.6.1	99% Bandwidth	-	Pass	-
3.2	15.247(b)	RSS-210 A8.4	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	RSS-210 A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	RSS-210 A8.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 9.42 dB at 2483.500 MHz
3.6	15.207	RSS-Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 7.59 dB at 0.530 MHz
3.7	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Acer Incorporated

8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22181, Taiwan (R.O.C)

1.2 Manufacturer

Shanghai Wingtech Electronic Technology Co., Ltd.

6th Floor, G Block, No. 668, East Beijing Road, HuangPu District, Shanghai, P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart HandHeld
Brand Name	Acer
Model Name	Z520
Marketing Name	Liquid Z520
FCC ID	HLZDMZ520
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+(Downlink Only) WLAN 2.4GHz 802.11b/g/n(HT20)/ n (HT40) Bluetooth v3.0+ EDR / Bluetooth v4.0 LE
EUT Stage	Identical Prototype

Remark:

The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	<2412 MHz ~ 2462 MHz> 802.11b : 16.63 dBm (0.0460 W) 802.11g : 22.43 dBm (0.1750 W) 802.11n HT20 : 22.56 dBm (0.1803 W) 802.11n HT40 : 23.09 dBm (0.2037 W)
99% Occupied Bandwidth	<2412 MHz ~ 2462 MHz> 802.11b : 12.35MHz 802.11g : 17.75MHz 802.11n HT20 : 18.50MHz 802.11n HT40 : 36.50MHz
Antenna Type / Gain	802.11b/g/n : PIFA Antenna with gain -0.97 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH01-KS	03CH01-KS	CO01-KS	149928/4086E-1

Note: The test site complies with ANSI C63.4 2009 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- ♦ ANSI C63.4-2009
- ♦ ANSI C63.10-2009
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 4
- ♦ NOTICE 2012-DRS0126

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. Per the section 2.2.3 of Notice of 2012-DRS0126, " Receivers Excluded from Industry Canada Requirements", only radiocommunication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y/Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b RF Output Power (dBm)						
Power vs. Channel			Power vs. Data Rate			
Channel	Frequency (MHz)	Data Rate	Channel	2Mbps	5.5Mbps	11Mbps
		1Mbps				
CH 01	2412 MHz	15.98	CH 11	16.59	16.55	16.39
CH 06	2437 MHz	16.15				
CH 11	2462 MHz	16.63				

2.4GHz 802.11g RF Output Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps								
CH 01	2412 MHz	22.28	CH 11	21.99	21.83	21.93	21.78	21.81	21.85	21.82
CH 06	2437 MHz	22.24								
CH 11	2462 MHz	22.43								

2.4GHz 802.11n HT20 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 01	2412 MHz	22.53	CH 11	22.03	22.00	22.26	21.91	21.71	21.86	21.91
CH 06	2437 MHz	22.44								
CH 11	2462 MHz	22.56								

2.4GHz 802.11n HT40 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 03	2422 MHz	22.96	CH 09	22.01	21.69	21.77	21.51	21.76	21.87	22.08
CH 06	2437 MHz	23.02								
CH 09	2452 MHz	23.09								




2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
	Test Items	Mode	Data Rate	Test Channel
Conducted TCs	6dB and 99% BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
	Conducted Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
		802.11n HT40	MCS0	3/9
	Conducted Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
		802.11n HT40	MCS0	3/9
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
AC Conducted Emission	Mode 1: GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone			
Remark: For radiated test cases, the tests were performance with adapter, earphone and USB cable.				

2.4 Connection Diagram of Test System


<WLAN Tx Mode- b/g/n (HT20)>

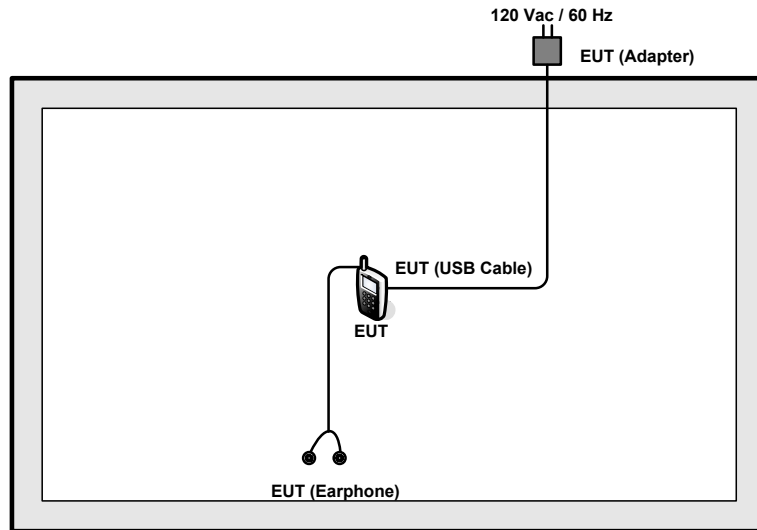

<WLAN Tx Mode- n (HT40)>

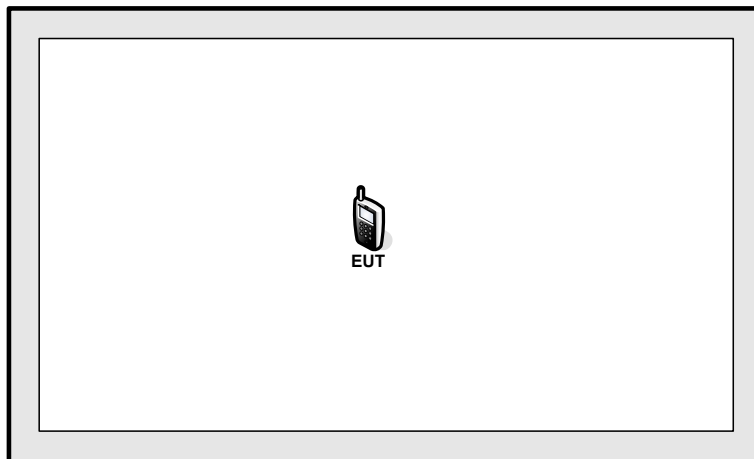

<AC Conducted Emission Mode>

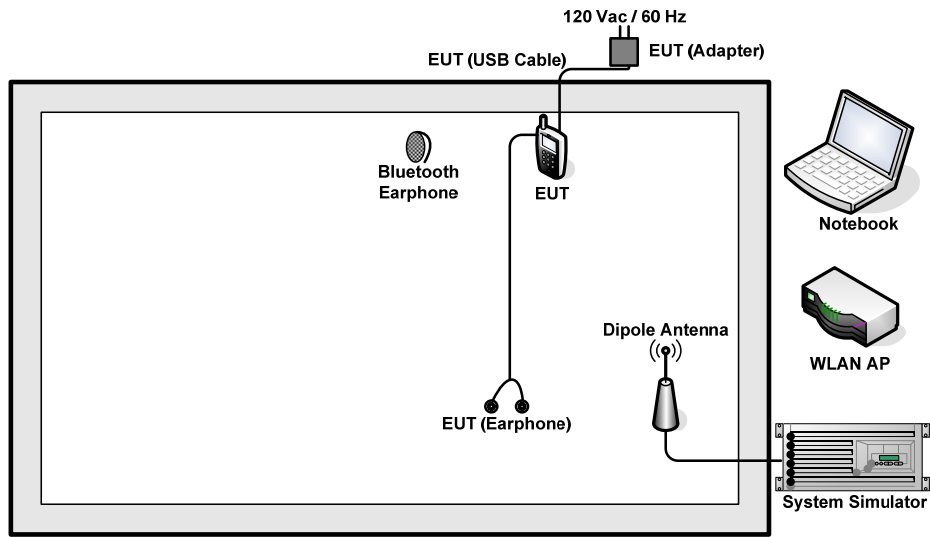

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Notebook	Lenovo	G480	PRC4	N/A	shielded cable DC O/P 1.8 m unshielded AC I/P cable 1.8 m
3.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A
4.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8m

2.6 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.5 dB.

Offset(dB) = RF cable loss(dB) = 5.5 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

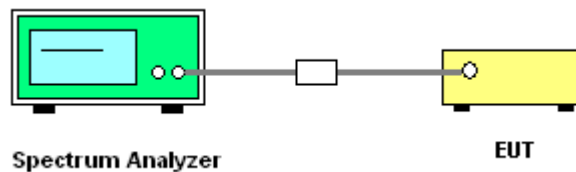




3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Test Band :	2.4GHz	Temperature :	24~25°C
Test Engineer :	Issac Song	Relative Humidity :	49~51%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	99% Bandwidth (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	12.30	9.52	0.5	Pass
11b	1Mbps	1	6	2437	12.35	9.04	0.5	Pass
11b	1Mbps	1	11	2462	12.30	9.52	0.5	Pass
11g	6Mbps	1	1	2412	17.60	16.36	0.5	Pass
11g	6Mbps	1	6	2437	17.75	16.36	0.5	Pass
11g	6Mbps	1	11	2462	17.70	16.32	0.5	Pass
HT20	MCS0	1	1	2412	18.40	17.56	0.5	Pass
HT20	MCS0	1	6	2437	18.50	17.60	0.5	Pass
HT20	MCS0	1	11	2462	18.45	17.58	0.5	Pass
HT40	MCS0	1	3	2422	36.50	35.92	0.5	Pass
HT40	MCS0	1	6	2437	36.50	35.88	0.5	Pass
HT40	MCS0	1	9	2452	36.50	36.00	0.5	Pass

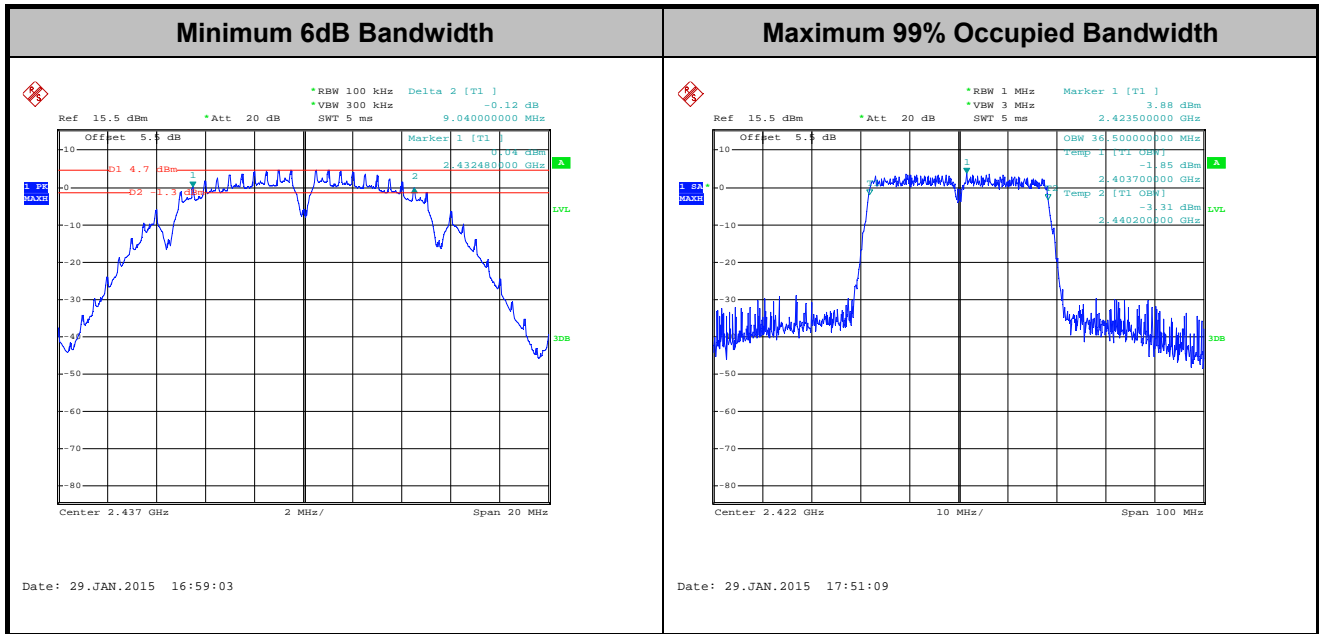

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

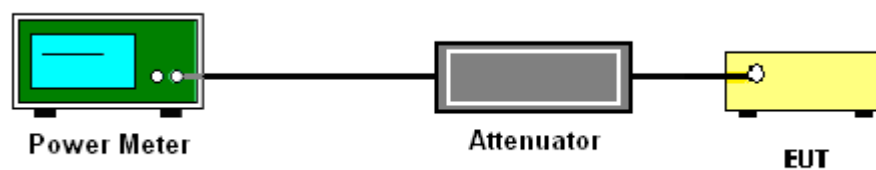



3.2.5 Test Result of Peak Output Power

Test Mode :	2.4GHz	Temperature :	24~25°C
Test Engineer :	Issac Song	Relative Humidity :	49~51%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	RF Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	15.98	30	-0.97	Pass
11b	1Mbps	1	6	2437	16.15	30	-0.97	Pass
11b	1Mbps	1	11	2462	16.63	30	-0.97	Pass
11g	6Mbps	1	1	2412	22.28	30	-0.97	Pass
11g	6Mbps	1	6	2437	22.24	30	-0.97	Pass
11g	6Mbps	1	11	2462	22.43	30	-0.97	Pass
HT20	MCS0	1	1	2412	22.53	30	-0.97	Pass
HT20	MCS0	1	6	2437	22.44	30	-0.97	Pass
HT20	MCS0	1	11	2462	22.56	30	-0.97	Pass
HT40	MCS0	1	3	2422	22.96	30	-0.97	Pass
HT40	MCS0	1	6	2437	23.02	30	-0.97	Pass
HT40	MCS0	1	9	2452	23.09	30	-0.97	Pass

Note: Measured power (dBm) has offset with cable loss.



3.2.6 Test Result of Average output Power (Reporting Only)

Test Mode :	2.4GHz	Temperature :	24~25°C
Test Engineer :	Issac Song	Relative Humidity :	49~51%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Duty Factor (dB)	Average Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	0.08	12.91	30	-0.97	Pass
11b	1Mbps	1	6	2437	0.08	13.14	30	-0.97	Pass
11b	1Mbps	1	11	2462	0.08	13.36	30	-0.97	Pass
11g	6Mbps	1	1	2412	0.50	11.43	30	-0.97	Pass
11g	6Mbps	1	6	2437	0.50	11.49	30	-0.97	Pass
11g	6Mbps	1	11	2462	0.50	11.66	30	-0.97	Pass
HT20	MCS0	1	1	2412	0.54	11.58	30	-0.97	Pass
HT20	MCS0	1	6	2437	0.54	11.45	30	-0.97	Pass
HT20	MCS0	1	11	2462	0.54	11.80	30	-0.97	Pass
HT40	MCS0	1	3	2422	1.01	11.47	30	-0.97	Pass
HT40	MCS0	1	6	2437	1.01	11.53	30	-0.97	Pass
HT40	MCS0	1	9	2452	1.01	11.67	30	-0.97	Pass

Note: Measured power (dBm) has offset with cable loss and duty factor.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

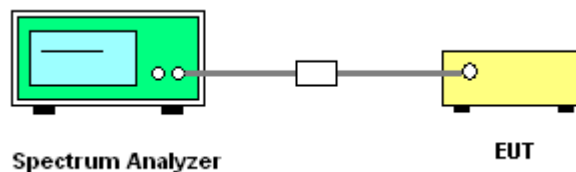




3.3.5 Test Result of Power Spectral Density

Test Mode :	2.4GHz	Temperature :	24~25°C
Test Engineer :	Issac Song	Relative Humidity :	49~51%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Peak Power Density (dBm/3kHz)	Max. Limits (dBm/3kHz)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	-10.64	8	-0.97	Pass
11b	1Mbps	1	6	2437	-9.75	8	-0.97	Pass
11b	1Mbps	1	11	2462	-9.68	8	-0.97	Pass
11g	6Mbps	1	1	2412	-13.95	8	-0.97	Pass
11g	6Mbps	1	6	2437	-14.14	8	-0.97	Pass
11g	6Mbps	1	11	2462	-13.75	8	-0.97	Pass
HT20	MCS0	1	1	2412	-13.57	8	-0.97	Pass
HT20	MCS0	1	6	2437	-15.02	8	-0.97	Pass
HT20	MCS0	1	11	2462	-14.63	8	-0.97	Pass
HT40	MCS0	1	3	2422	-18.35	8	-0.97	Pass
HT40	MCS0	1	6	2437	-17.30	8	-0.97	Pass
HT40	MCS0	1	9	2452	-17.50	8	-0.97	Pass

Note: Measured power density (dBm) has offset with cable loss.

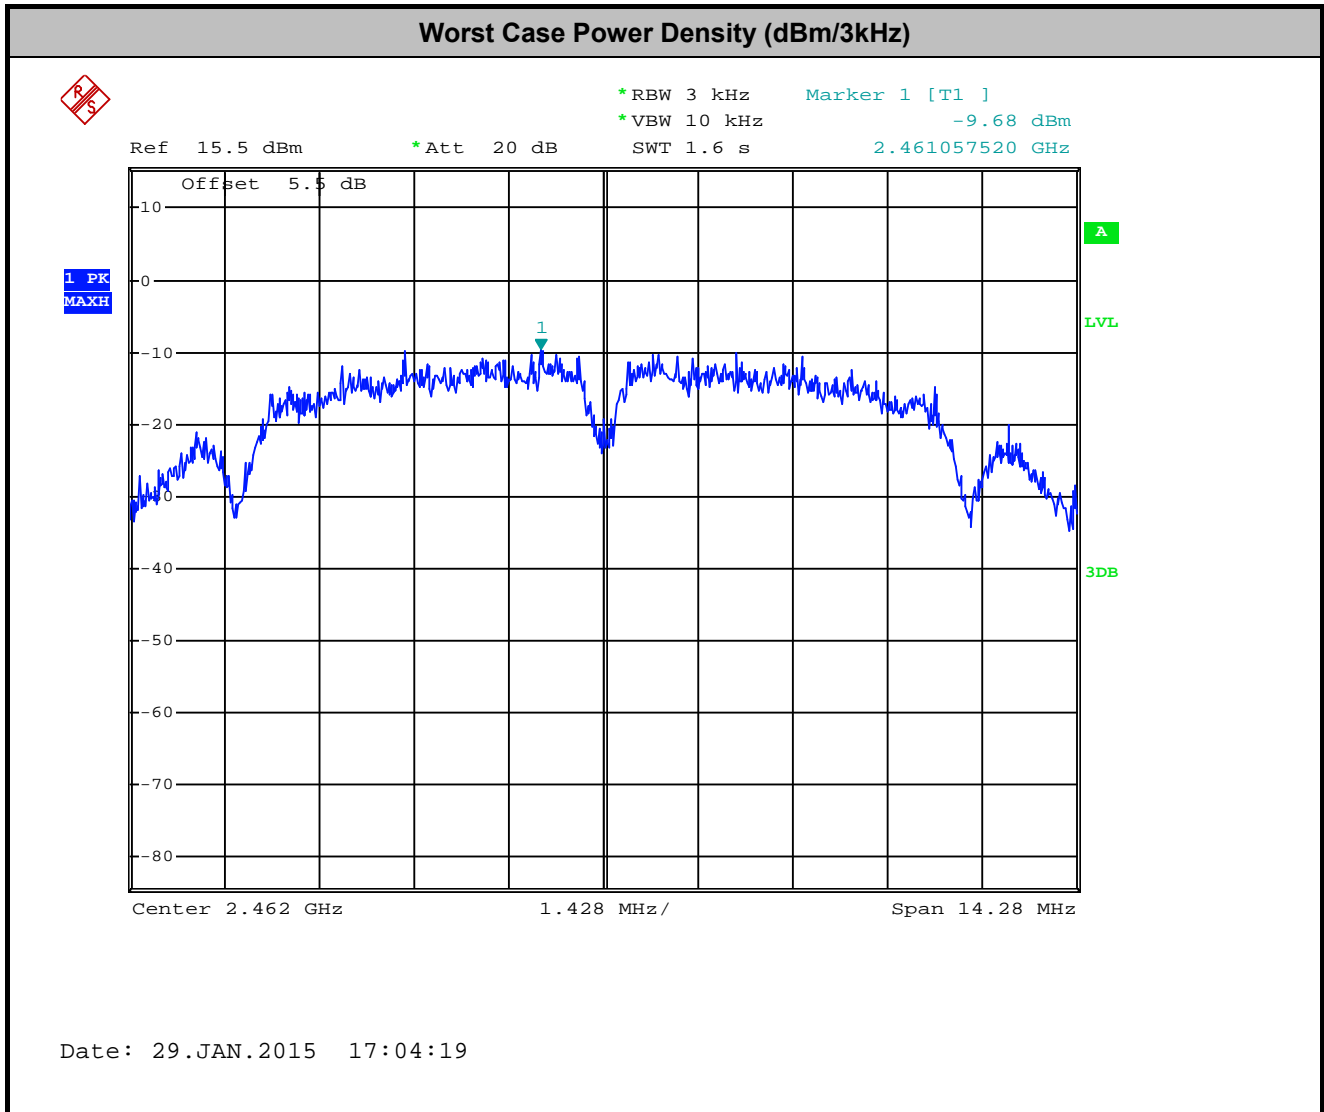

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

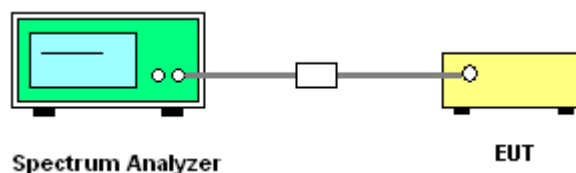




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	01	Test Engineer :	Issac Song


WLAN 802.11b Channel 01

100kHz PSD reference Level

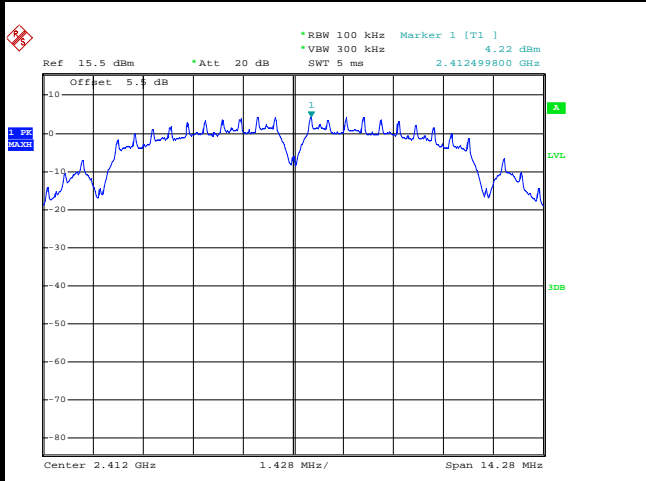


Date: 29.JAN.2015 16:51:37

Low Channel Plot

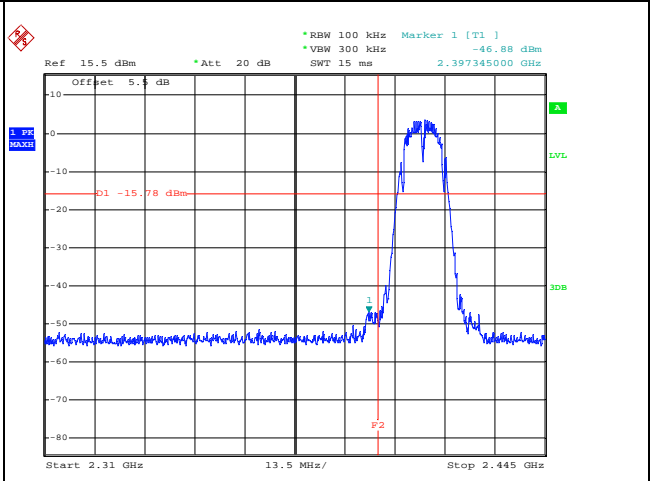


Date: 29.JAN.2015 16:51:57

Spurious Emission 30MHz~3GHz

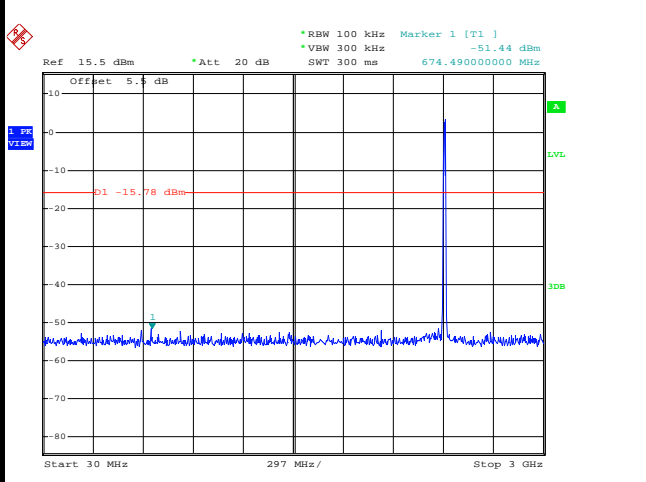

Date: 29.JAN.2015 16:52:47

Spurious Emission 2GHz~25GHz

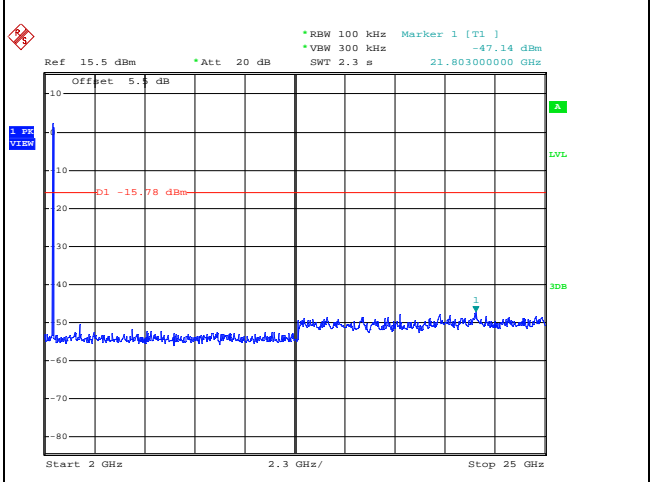


Date: 29.JAN.2015 16:53:05



Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Issac Song


WLAN 802.11b Channel 06

100kHz PSD reference Level

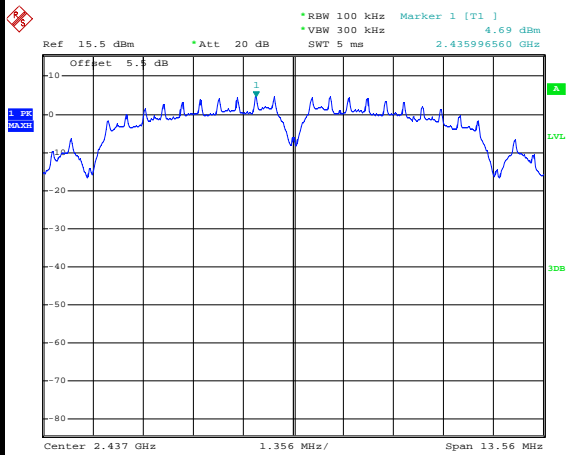


Date: 29.JAN.2015 17:01:12

Spurious Emission 30MHz~3GHz

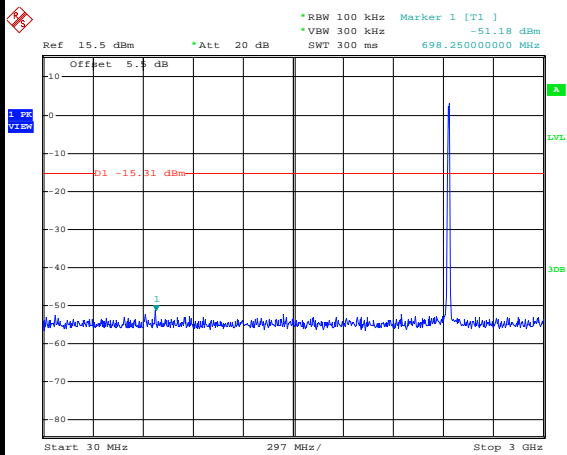

Date: 29.JAN.2015 17:01:44

Spurious Emission 2GHz~25GHz

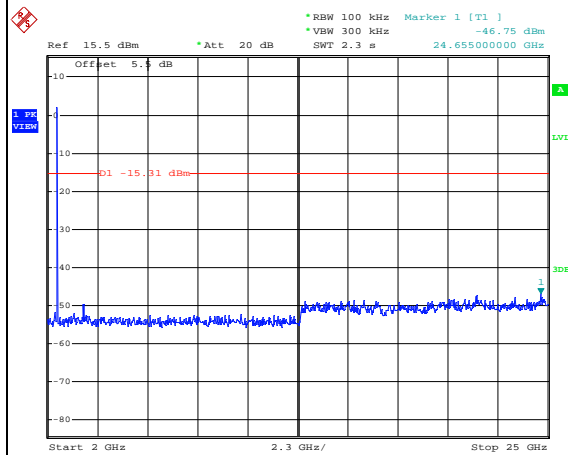


Date: 29.JAN.2015 17:02:02



Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	11	Test Engineer :	Issac Song


WLAN 802.11b Channel 11

100kHz PSD reference Level

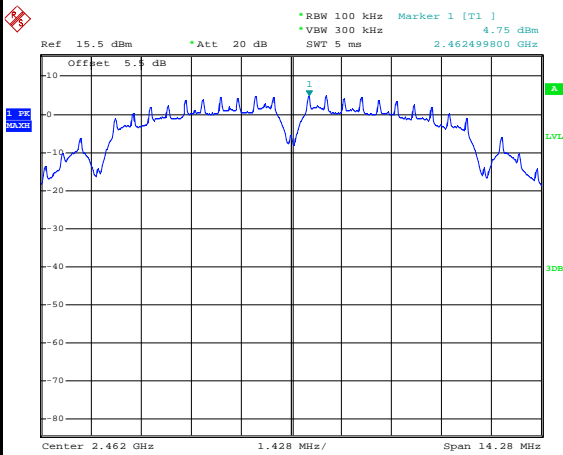


Date: 29.JAN.2015 17:04:41

High Channel Plot

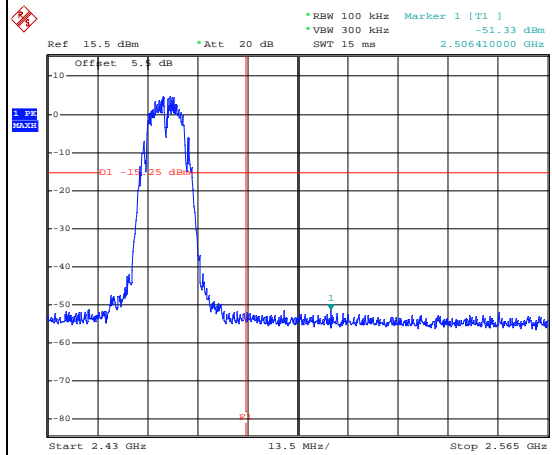


Date: 29.JAN.2015 17:05:19

Spurious Emission 30MHz~3GHz

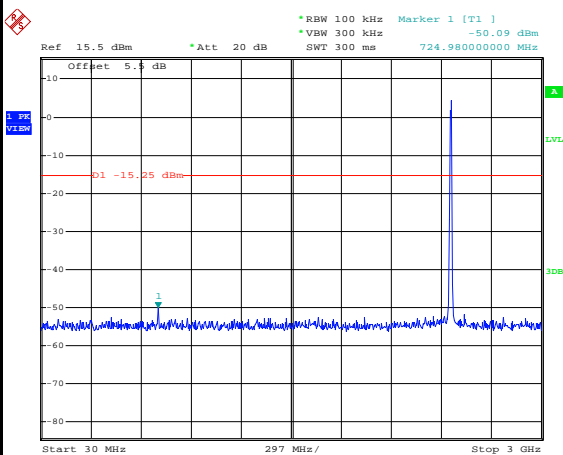

Date: 29.JAN.2015 17:05:49

Spurious Emission 2GHz~25GHz

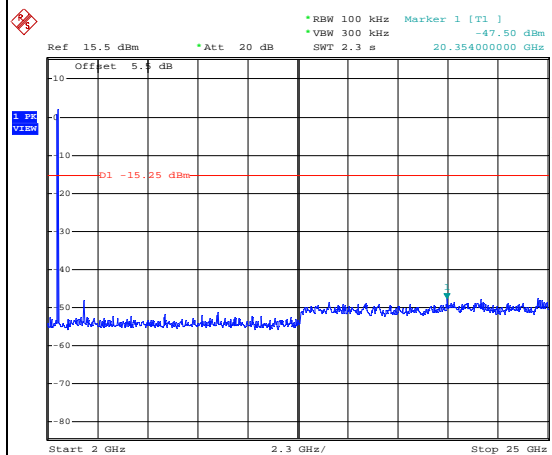


Date: 29.JAN.2015 17:06:07



Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	01	Test Engineer :	Issac Song


WLAN 802.11g Channel 01

100kHz PSD reference Level

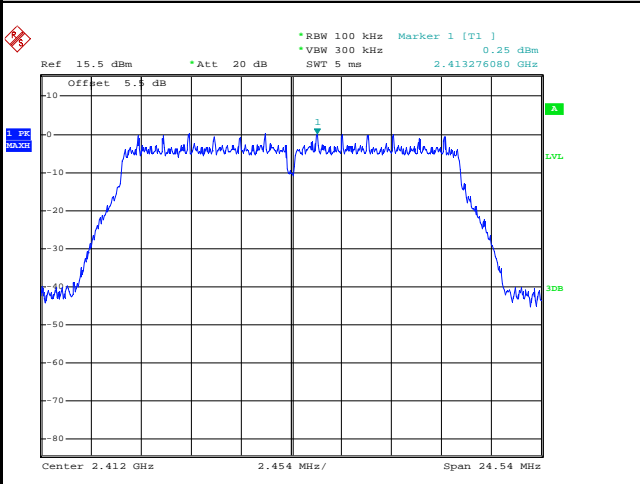


Date: 29.JAN.2015 17:09:42

Low Channel Plot

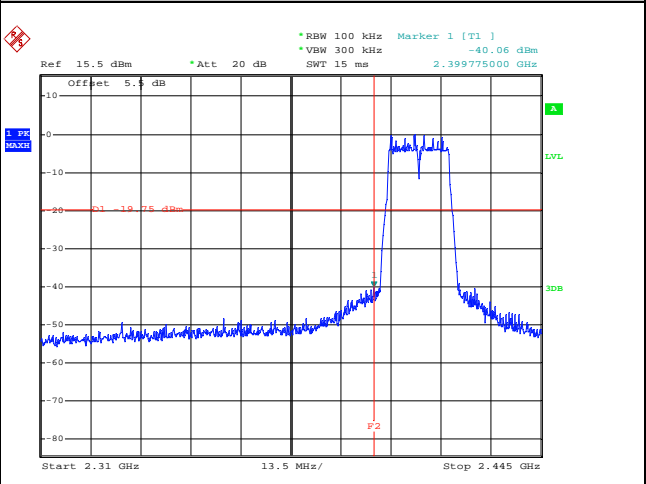


Date: 29.JAN.2015 17:10:29

Spurious Emission 30MHz~3GHz

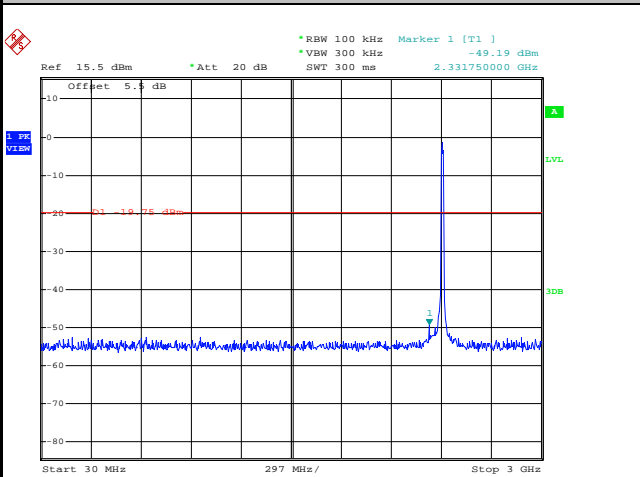

Date: 29.JAN.2015 17:11:32

Spurious Emission 2GHz~25GHz

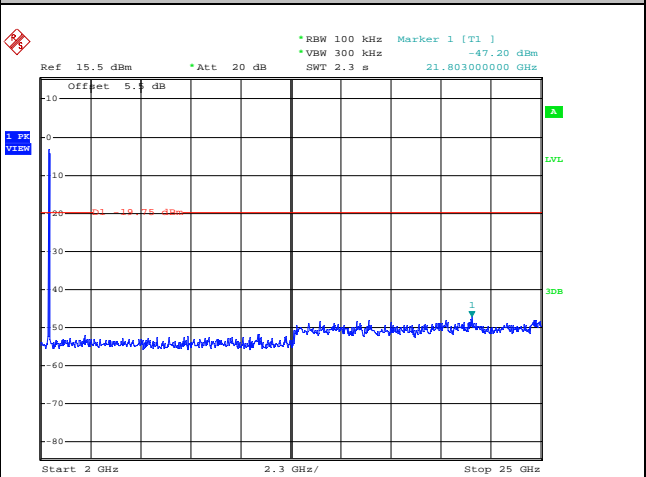


Date: 29.JAN.2015 17:11:50




Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Issac Song

WLAN 802.11g Channel 06


100kHz PSD reference Level

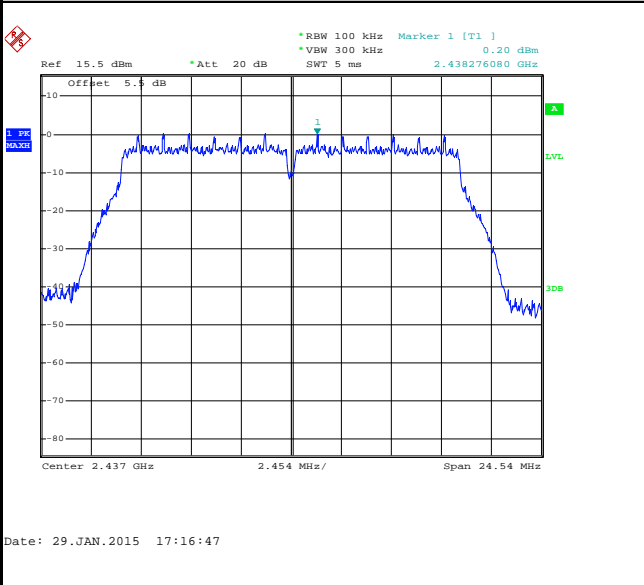

Spurious Emission 30MHz~3GHz

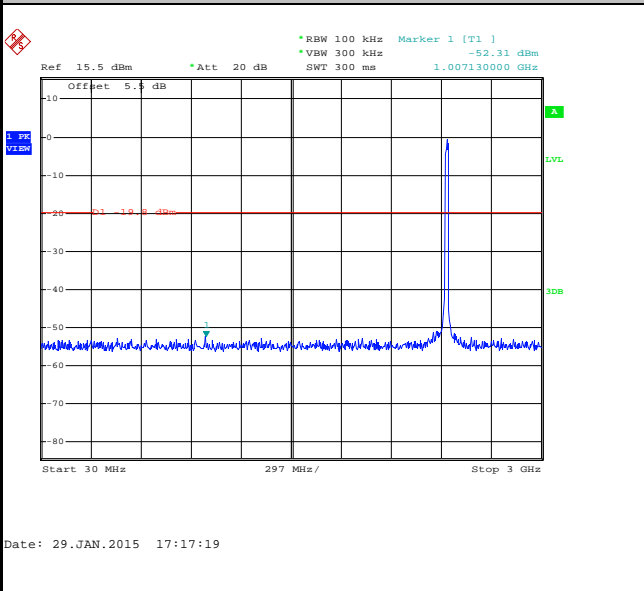

Spurious Emission 2GHz~25GHz

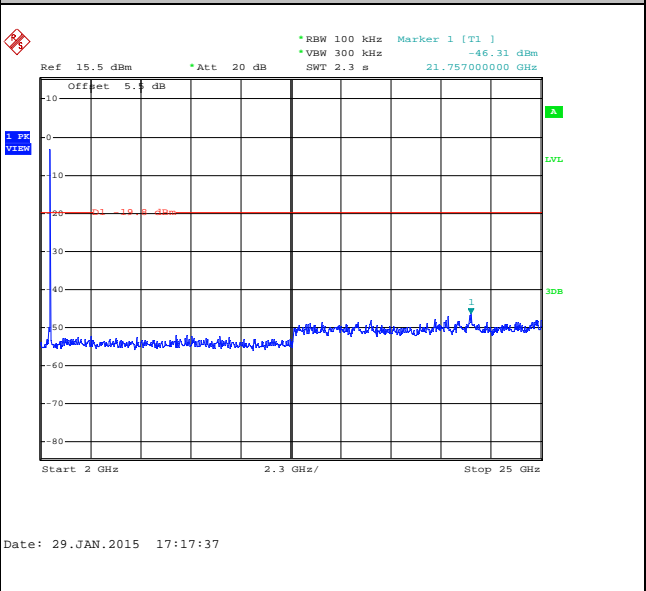




Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	11	Test Engineer :	Issac Song


WLAN 802.11g Channel 11

100kHz PSD reference Level

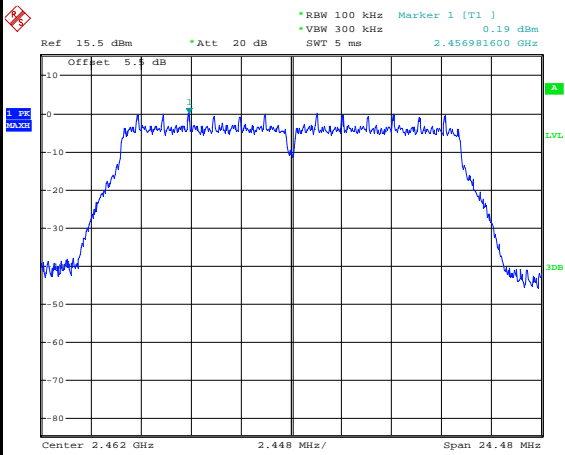


Date: 29.JAN.2015 17:21:34

High Channel Plot

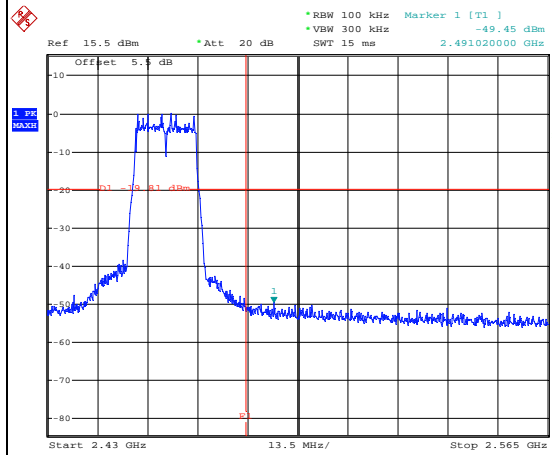


Date: 29.JAN.2015 17:22:19

Spurious Emission 30MHz~3GHz

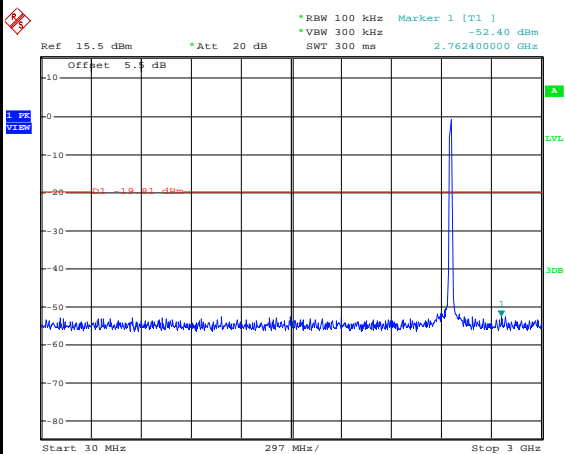

Date: 29.JAN.2015 17:22:46

Spurious Emission 2GHz~25GHz

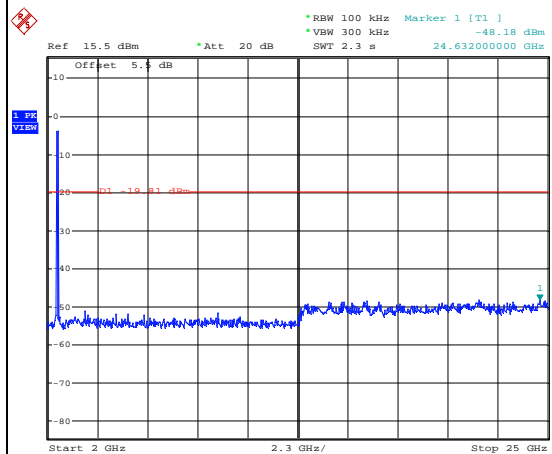


Date: 29.JAN.2015 17:23:04




Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	01	Test Engineer :	Issac Song

WLAN 802.11n HT20 Channel 01


100kHz PSD reference Level

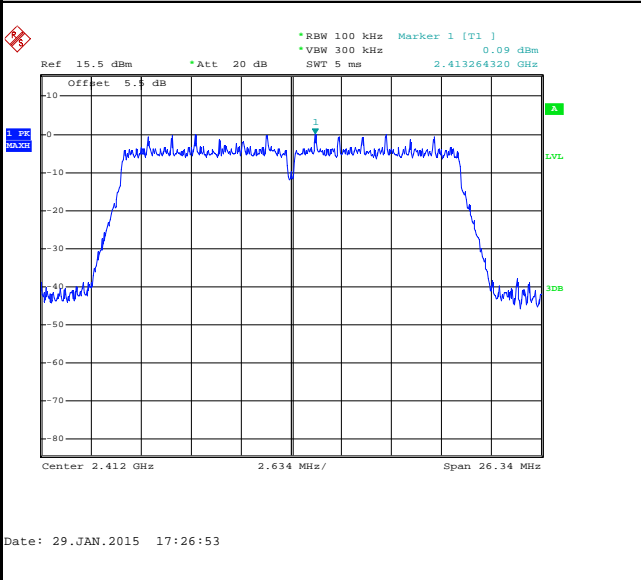


Low Channel Plot

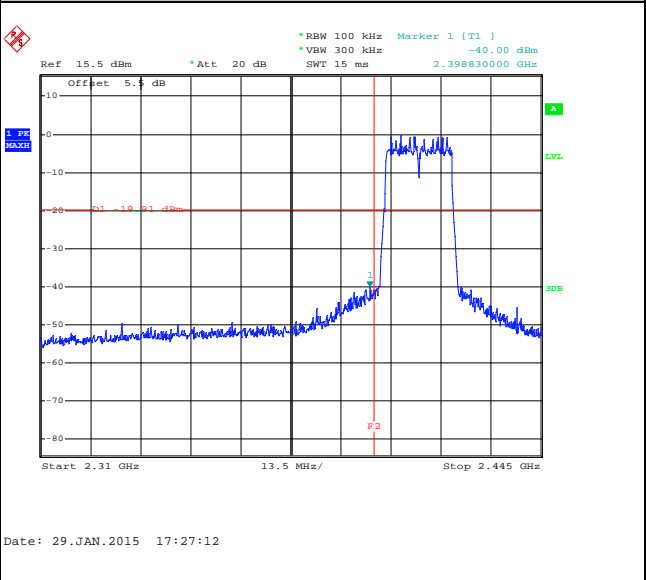

Spurious Emission 30MHz~3GHz

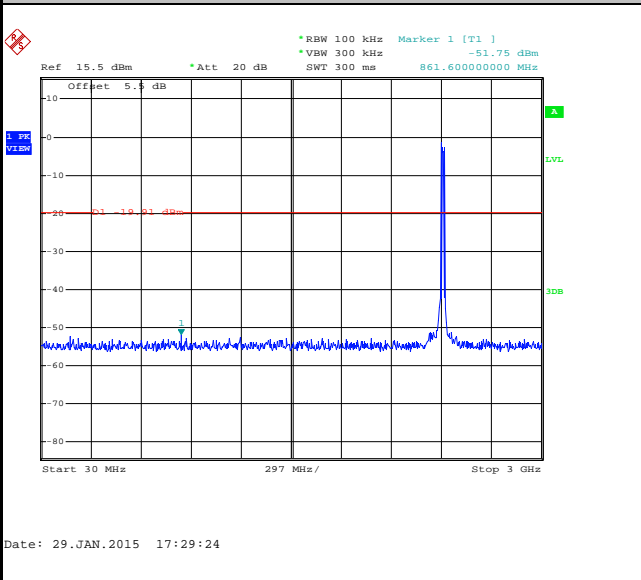

Spurious Emission 2GHz~25GHz

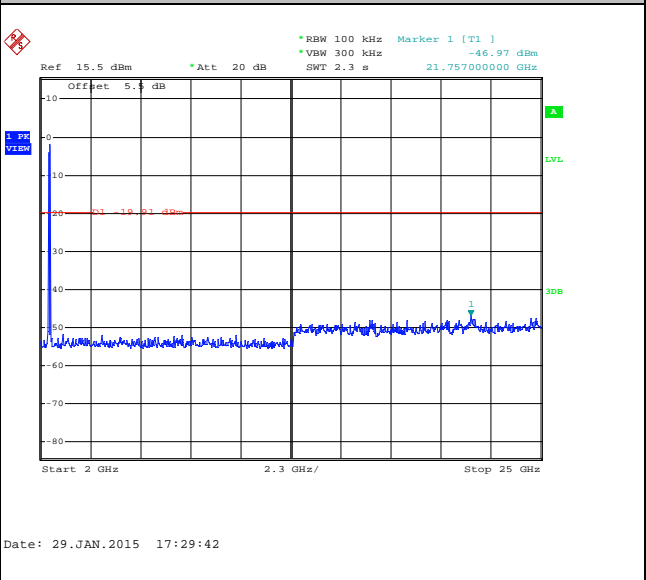





Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Issac Song

WLAN 802.11n HT20 Channel 06


100kHz PSD reference Level

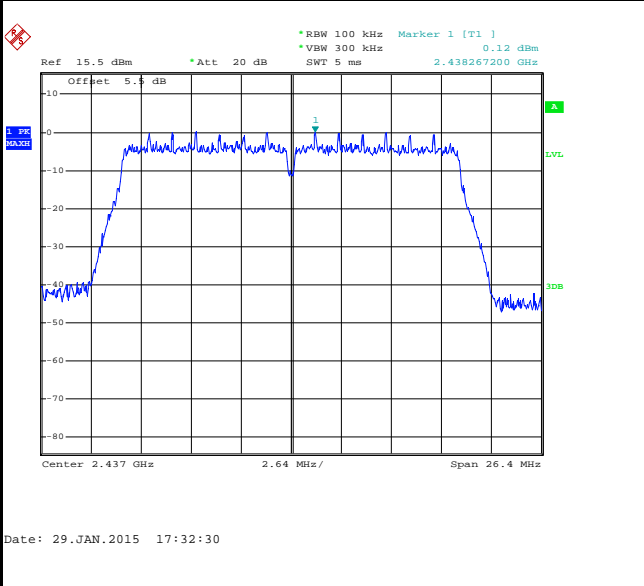

Spurious Emission 30MHz~3GHz

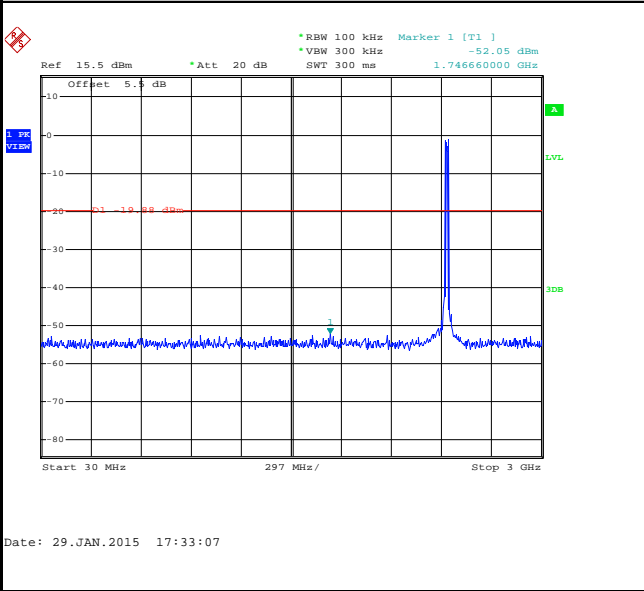

Spurious Emission 2GHz~25GHz

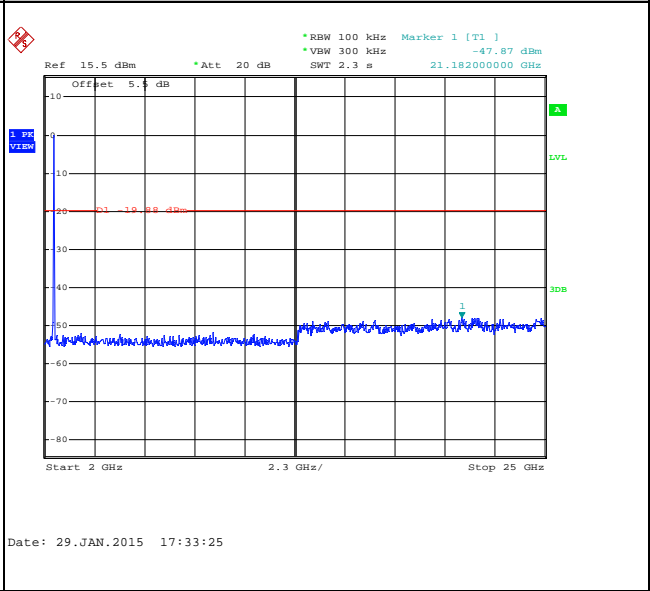




Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	11	Test Engineer :	Issac Song


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

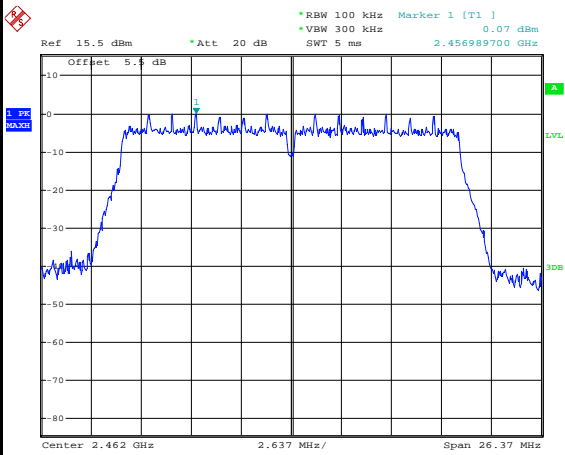


Date: 29.JAN.2015 17:35:53

High Channel Plot

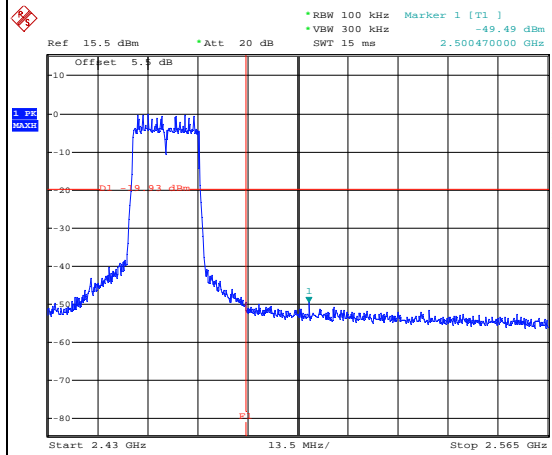


Date: 29.JAN.2015 17:36:18

Spurious Emission 30MHz~3GHz

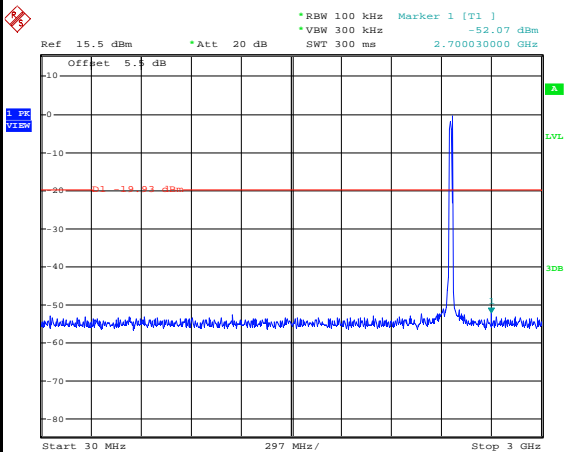

Date: 29.JAN.2015 17:36:43

Spurious Emission 2GHz~25GHz

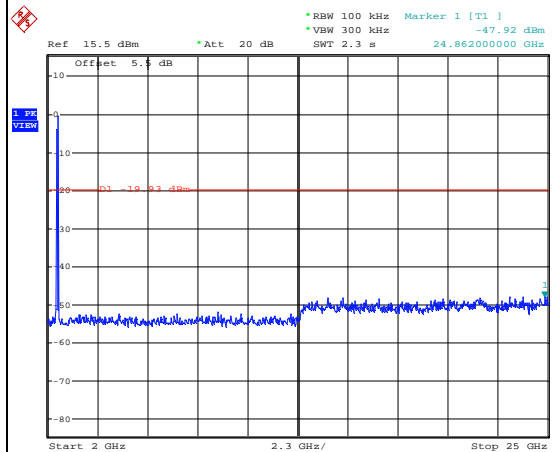


Date: 29.JAN.2015 17:37:01




Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	03	Test Engineer :	Issac Song

WLAN 802.11n HT40 Channel 03


100kHz PSD reference Level

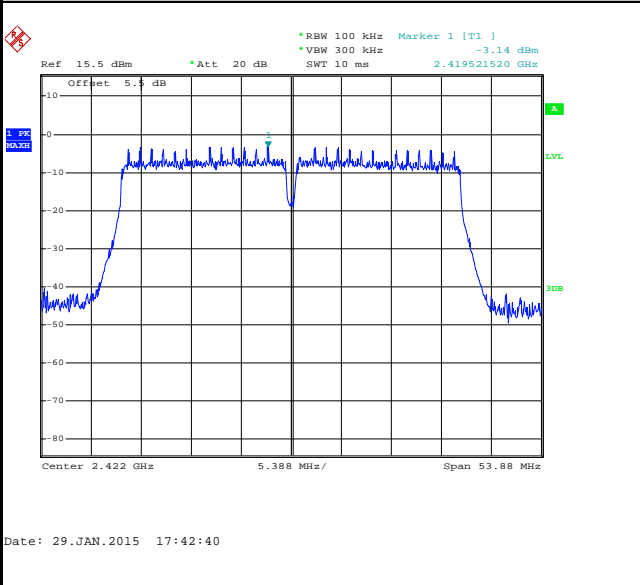


Low Channel Plot

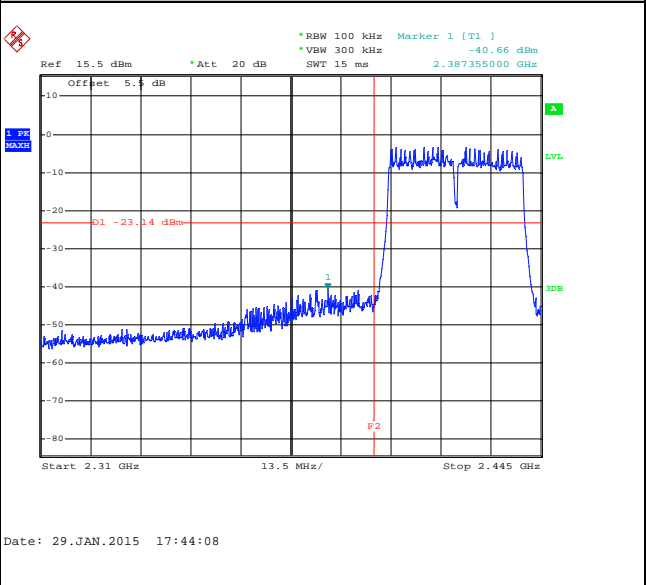

Spurious Emission 30MHz~3GHz

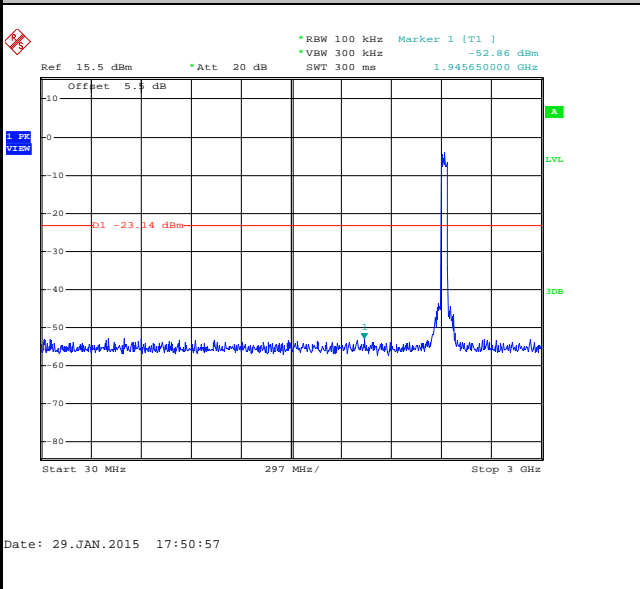

Spurious Emission 2GHz~25GHz

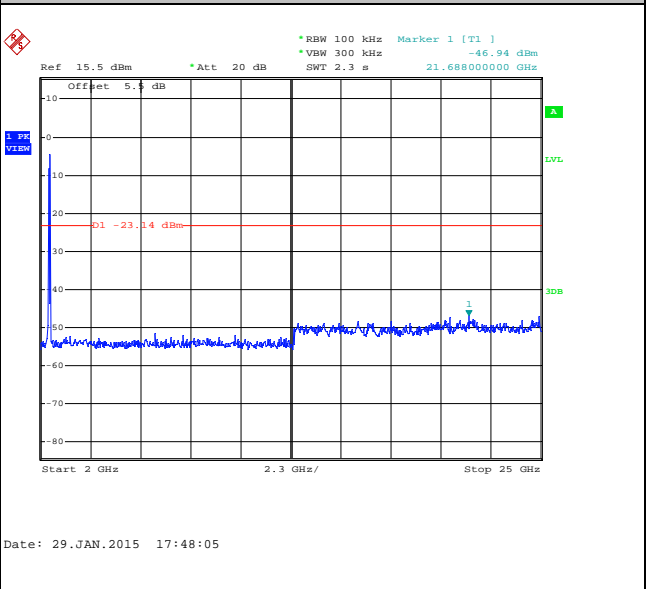





Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Issac Song

WLAN 802.11n HT40 Channel 06


100kHz PSD reference Level

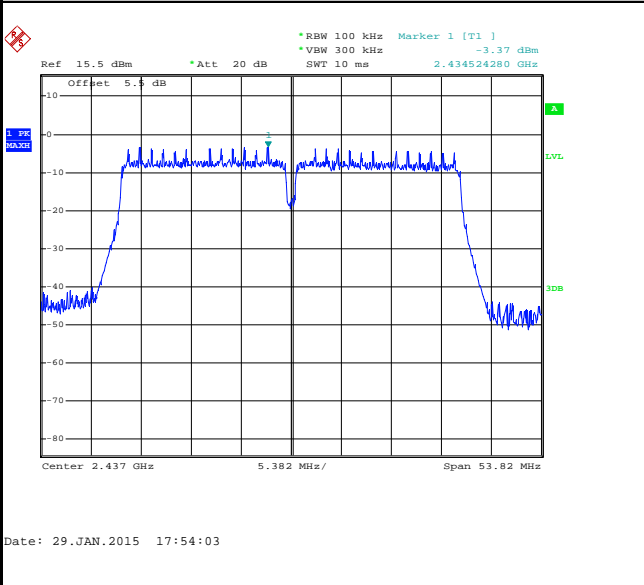

Spurious Emission 30MHz~3GHz

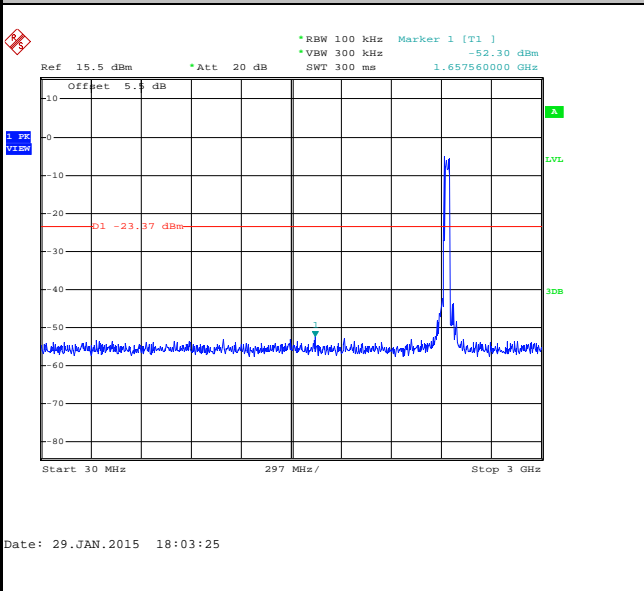

Spurious Emission 2GHz~25GHz

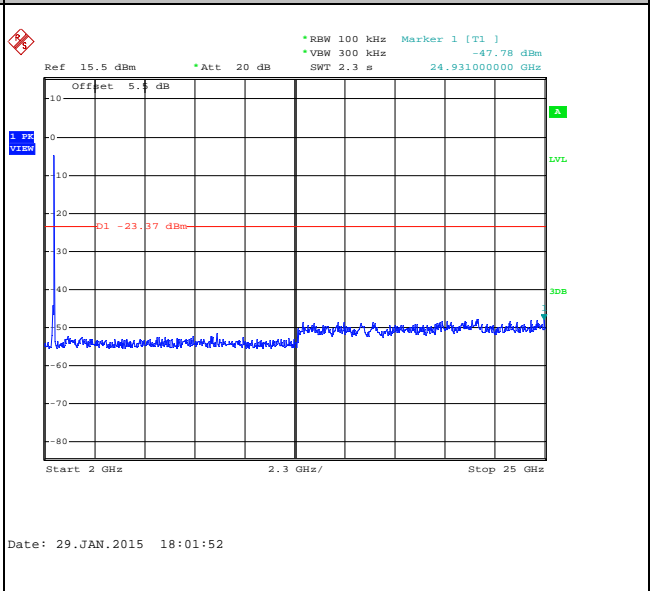




Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	09	Test Engineer :	Issac Song


WLAN 802.11n HT40 Channel 09

100kHz PSD reference Level

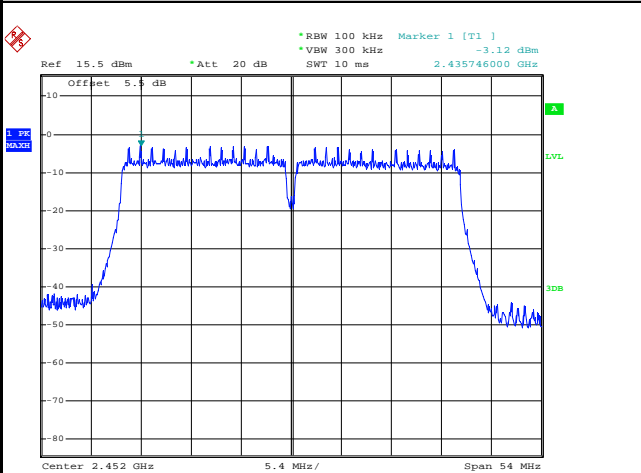


Date: 29.JAN.2015 18:06:51

High Channel Plot

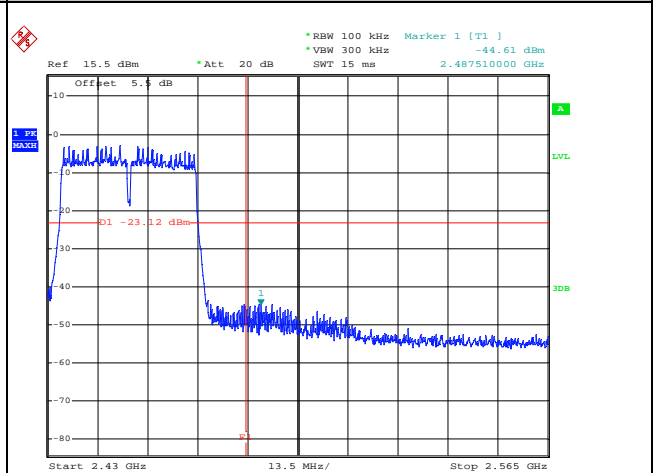


Date: 29.JAN.2015 18:07:14

Spurious Emission 30MHz~3GHz

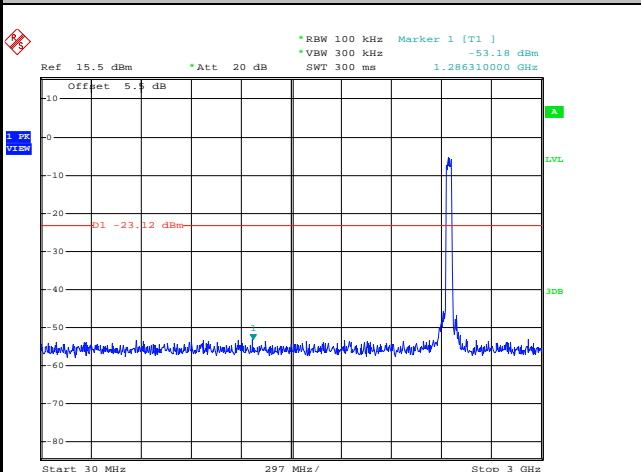

Date: 29.JAN.2015 18:09:48

Spurious Emission 2GHz~25GHz

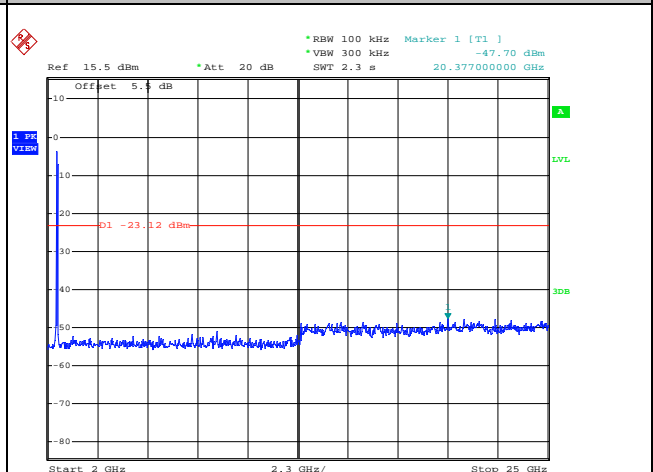

Date: 29.JAN.2015 18:08:43



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.


For average measurement:

 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	98.13	-	-	10Hz
802.11g	89.17	1.40	0.71	1KHz
2.4GHz 802.11n HT20	88.36	1.31	0.77	1KHz
2.4GHz 802.11n HT40	79.23	0.66	1.52	3KHz

3.5.4 Test Setup


For radiated emissions below 30MHz

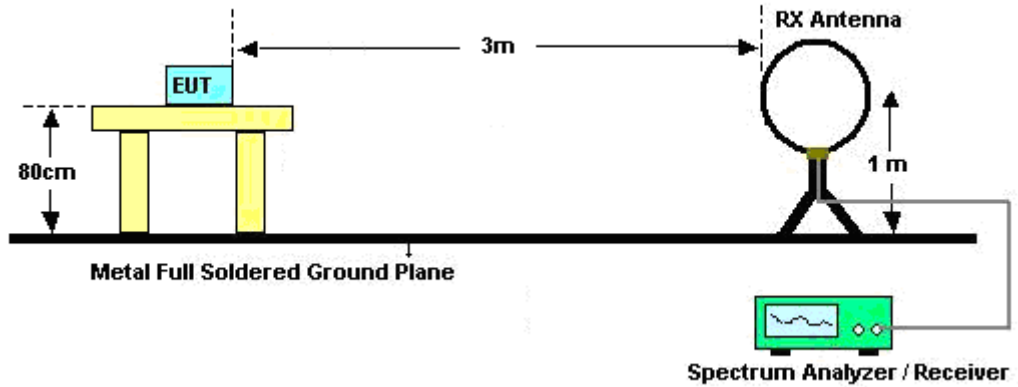

For radiated emissions from 30MHz to 1GHz

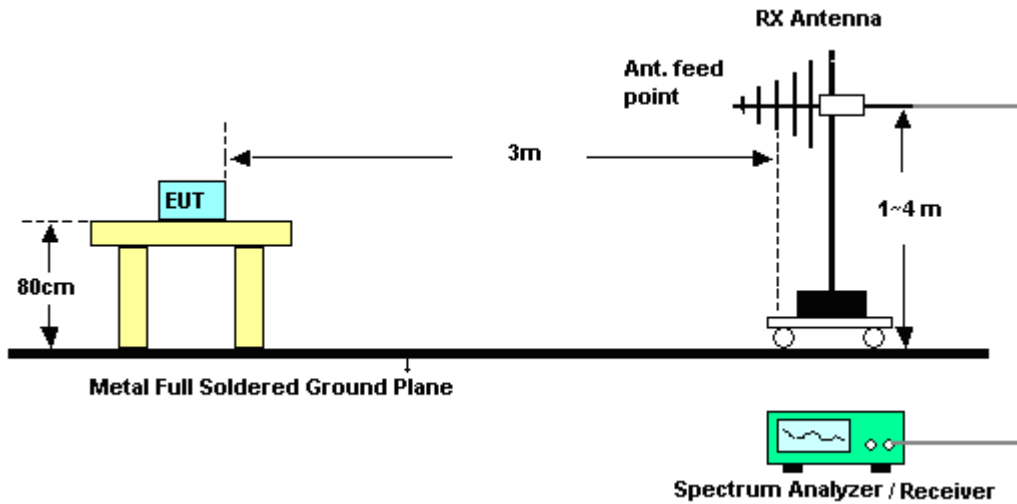

For radiated emissions above 1GHz

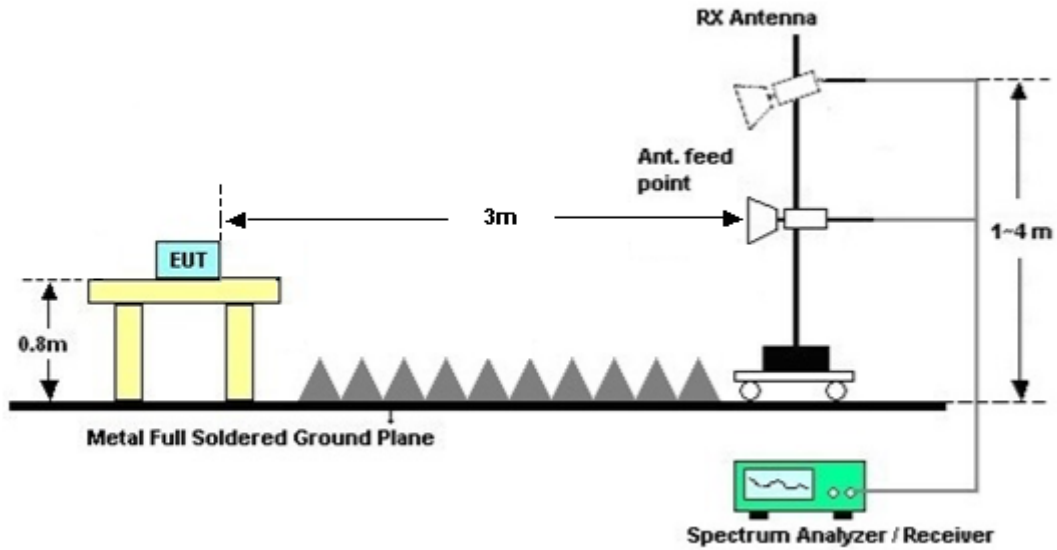

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


3.6.4 Test Setup

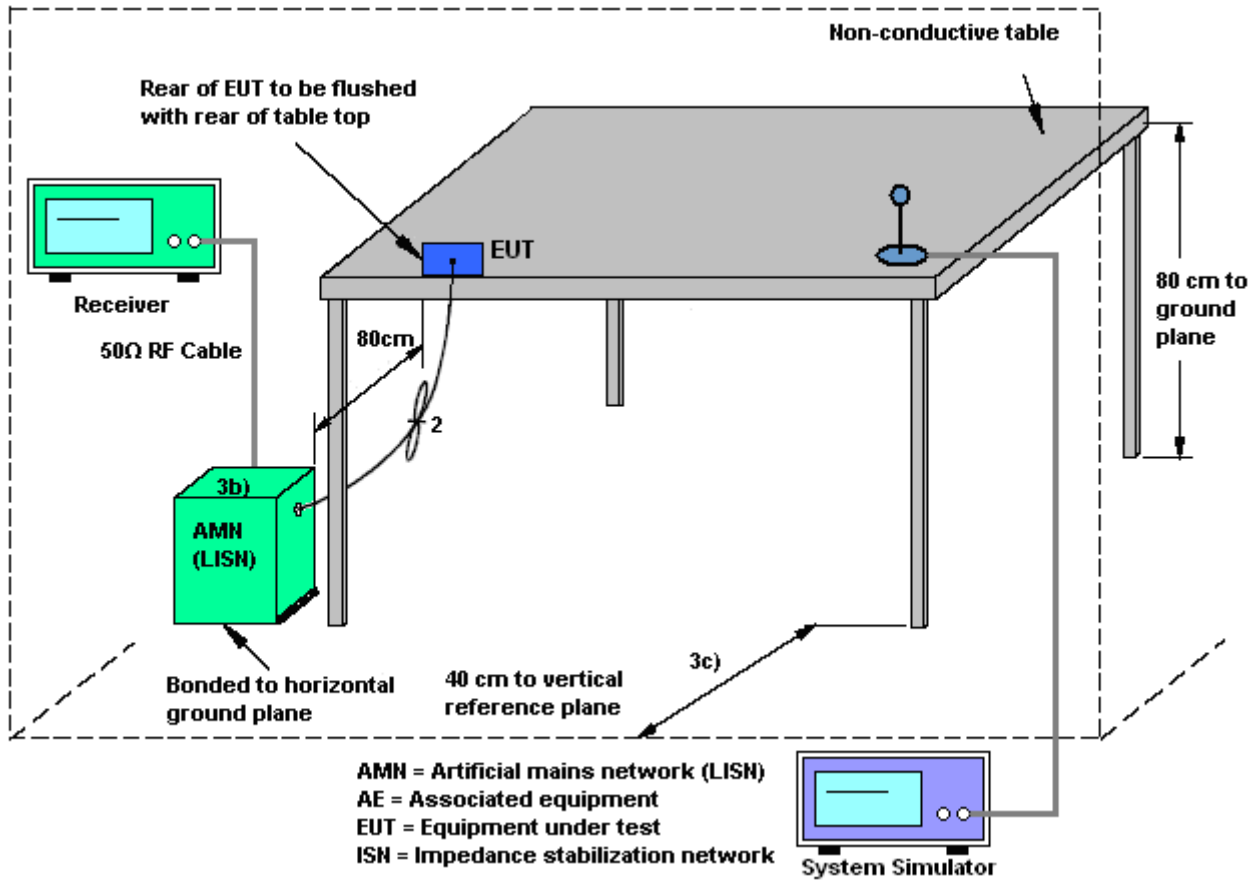



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eko Zhang	Relative Humidity :	30~33%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		

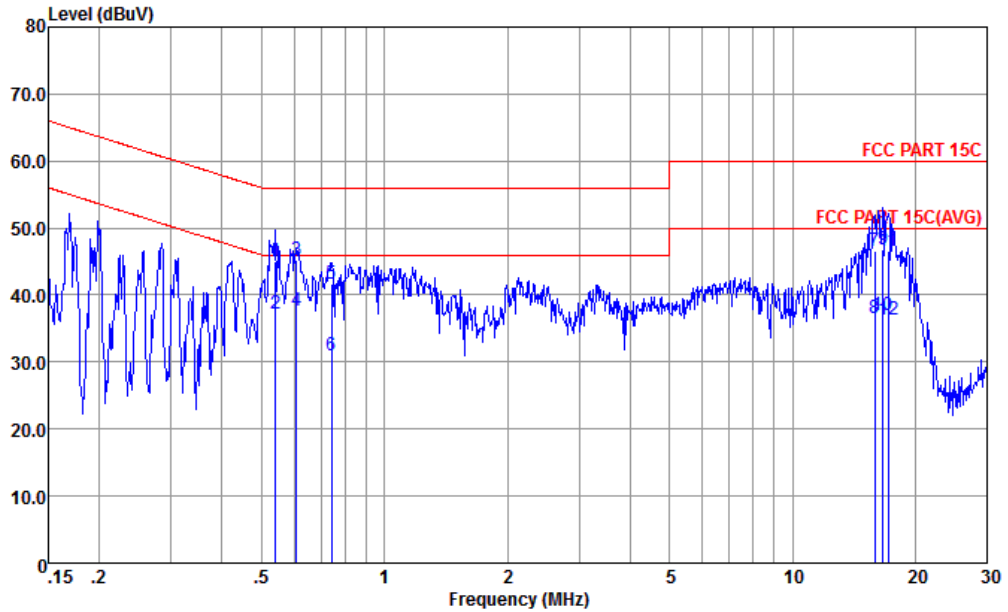


Site : CO01-KS
 Condition : FCC PART 15C LISN-L20140306 LINE

mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.54	45.03	-10.97	56.00	34.20	0.20	10.63	QP
2	0.54	37.13	-8.87	46.00	26.30	0.20	10.63	Average
3	0.61	45.13	-10.87	56.00	34.30	0.20	10.63	QP
4 *	0.61	37.63	-8.37	46.00	26.80	0.20	10.63	Average
5	0.74	41.73	-14.27	56.00	30.90	0.19	10.64	QP
6	0.74	30.93	-15.07	46.00	20.10	0.19	10.64	Average
7	15.89	46.49	-13.51	60.00	35.30	0.18	11.01	QP
8	15.89	36.60	-13.40	50.00	25.41	0.18	11.01	Average
9	16.66	46.79	-13.21	60.00	35.60	0.17	11.02	QP
10	16.66	37.09	-12.91	50.00	25.90	0.17	11.02	Average
11	17.20	46.49	-13.51	60.00	35.30	0.15	11.04	QP
12	17.20	36.39	-13.61	50.00	25.20	0.15	11.04	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eko Zhang	Relative Humidity :	30~33%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		

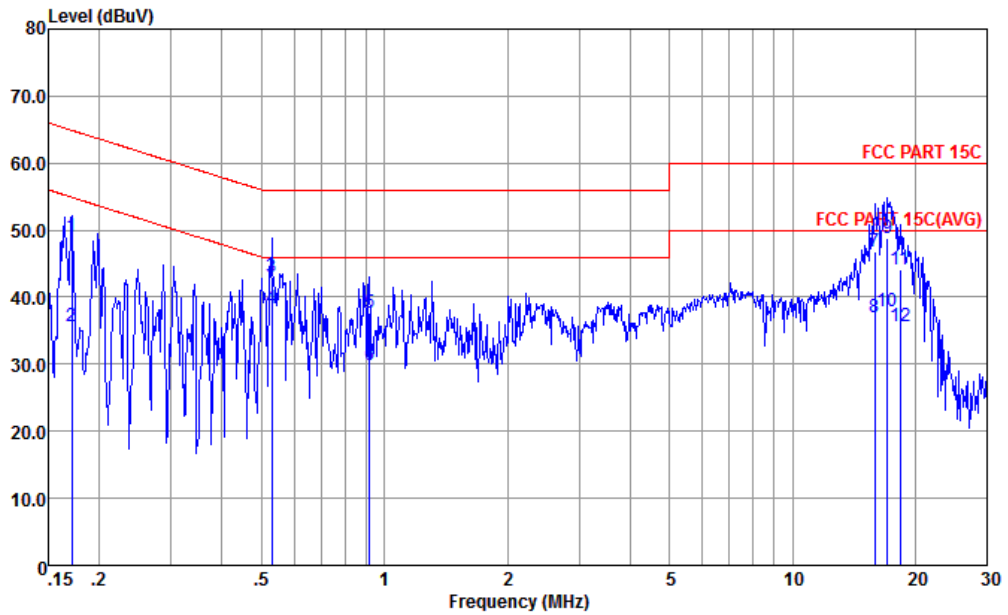

Site : CO01-KS
Condition : FCC PART 15C LISN-N20140306 NEUTRAL

mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17	49.13	-15.77	64.90	37.20	1.50	10.43	QP
2	0.17	35.73	-19.17	54.90	23.80	1.50	10.43	Average
3	0.53	43.11	-12.89	56.00	32.19	0.29	10.63	QP
4 *	0.53	38.41	-7.59	46.00	27.49	0.29	10.63	Average
5	0.92	37.67	-18.33	56.00	26.90	0.12	10.65	QP
6	0.92	29.87	-16.13	46.00	19.10	0.12	10.65	Average
7	15.89	46.79	-13.21	60.00	35.50	0.28	11.01	QP
8	15.89	36.89	-13.11	50.00	25.60	0.28	11.01	Average
9	17.11	48.89	-11.11	60.00	37.60	0.26	11.03	QP
10	17.11	37.89	-12.11	50.00	26.60	0.26	11.03	Average
11	18.33	44.19	-15.81	60.00	32.90	0.22	11.07	QP
12	18.33	35.59	-14.41	50.00	24.30	0.22	11.07	Average



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Oct. 28, 2014	Jan. 29, 2015~ Feb. 01, 2015	Oct. 27, 2015	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Feb. 27, 2014	Jan. 29, 2015~ Feb. 01, 2015	Feb. 26, 2015	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Feb. 27, 2014	Jan. 29, 2015~ Feb. 01, 2015	Feb. 26, 2015	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Oct. 25, 2014	Feb. 02, 2015	Oct. 24, 2015	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	101399	9kHz~30GHz	May 04, 2014	Feb. 02, 2015	May 03, 2015	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 13, 2014	Feb. 02, 2015	Nov. 12, 2015	Radiation (03CH01-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	25Mhz-2Ghz	Jan. 17, 2015	Feb. 02, 2015	Jan. 16, 2016	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 17, 2015	Feb. 02, 2015	Jan. 16, 2016	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 08, 2014	Feb. 02, 2015	Nov. 07, 2015	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA1702 49	15GHz~40GHz	Mar. 10, 2014	Feb. 02, 2015	Mar. 09, 2015	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1GHz /32dB	May 04, 2014	Feb. 02, 2015	May 03, 2015	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A023 71	1GHz~26.5GHz	Oct. 28, 2014	Feb. 02, 2015	Oct. 27, 2015	Radiation (03CH01-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Feb. 02, 2015	NCR	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Feb. 02, 2015	NCR	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Feb. 02, 2015	NCR	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 04, 2014	Jan. 29, 2015	May 03, 2015	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 25, 2014	Jan. 29, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 25, 2014	Jan. 29, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 25, 2014	Jan. 29, 2015	Oct. 24, 2015	Conduction (CO01-KS)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5dB
---	-------



Appendix A. Radiated Spurious Emission

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2367.15	50.09	-23.91	74	48.91	31.26	6.17	36.25	100	348	P	H
		2389.65	36.57	-17.43	54	35.18	31.3	6.17	36.08	100	348	A	H
	*	2410.521	96.33	-	-	94.82	31.31	6.22	36.02	100	348	P	H
	*	2411.105	90.65	-	-	89.14	31.31	6.22	36.02	100	348	A	H
		2389.92	50.12	-23.88	74	48.73	31.3	6.17	36.08	115	75	P	V
		2389.74	36.88	-17.12	54	35.49	31.3	6.17	36.08	115	75	A	V
	*	2413.444	96.96	-	-	95.45	31.31	6.22	36.02	115	75	P	V
	*	2411.189	91.18	-	-	89.67	31.31	6.22	36.02	115	75	A	V
802.11b CH 06 2437MHz	*	2435.738	94.66	-	-	93.07	31.33	6.22	35.96	102	1	P	H
	*	2436.156	88.99	-	-	87.4	31.33	6.22	35.96	102	1	A	H
	*	2435.571	96.51	-	-	94.92	31.33	6.22	35.96	108	99	P	V
	*	2436.156	90.92	-	-	89.33	31.33	6.22	35.96	108	99	A	V
802.11b CH 11 2462MHz	*	2463.46	95.81	-	-	94.02	31.36	6.28	35.85	135	332	P	H
	*	2462.625	89.83	-	-	88.04	31.36	6.28	35.85	135	332	A	H
		2492.8	49.41	-24.59	74	47.43	31.39	6.33	35.74	135	332	P	H
		2486	36.49	-17.51	54	34.58	31.37	6.33	35.79	135	332	A	H
	*	2460.705	95.19	-	-	93.4	31.36	6.28	35.85	100	76	P	V
	*	2461.206	89.63	-	-	87.84	31.36	6.28	35.85	100	76	A	V
		2496.16	49.25	-24.75	74	47.27	31.39	6.33	35.74	100	76	P	V
		2486.12	36.33	-17.67	54	34.42	31.37	6.33	35.79	100	76	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		4824	46.8	-27.2	74	39.83	34.89	8.73	36.65	102	16	P	H
		4824	48.27	-25.73	74	41.3	34.89	8.73	36.65	185	342	P	V
802.11b CH 06 2437MHz		4875	46.96	-27.04	74	40.12	34.92	8.76	36.84	116	59	P	H
		7311	48.41	-25.59	74	40.87	35.56	10.84	38.86	126	47	P	H
		4875	47.68	-26.32	74	40.84	34.92	8.76	36.84	102	227	P	V
		7311	48.73	-25.27	74	41.19	35.56	10.84	38.86	154	89	P	V
802.11b CH 11 2462MHz		4923	46.93	-27.07	74	40.22	34.95	8.79	37.03	112	203	P	H
		7386	49.22	-24.78	74	41.94	35.58	10.89	39.19	154	228	P	H
		4923	48.34	-25.66	74	41.63	34.95	8.79	37.03	136	141	P	V
		7386	48.64	-25.36	74	41.36	35.58	10.89	39.19	102	351	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		2389.11	53.84	-20.16	74	52.45	31.3	6.17	36.08	100	11	P	H
		2390	38.28	-15.72	54	36.89	31.3	6.17	36.08	100	11	A	H
	*	2408.35	93.77	-	-	92.26	31.31	6.22	36.02	100	11	P	H
	*	2408.183	82.94	-	-	81.43	31.31	6.22	36.02	100	11	A	H
		2383.98	53.02	-20.98	74	51.73	31.28	6.17	36.16	100	355	P	V
		2390	38.51	-15.49	54	37.12	31.3	6.17	36.08	100	355	A	V
	*	2413.861	93.35	-	-	91.84	31.31	6.22	36.02	100	355	P	V
802.11g CH 06 2437MHz	*	2436.156	98.2	-	-	96.61	31.33	6.22	35.96	200	69	P	H
	*	2429.81	87.94	-	-	86.35	31.33	6.22	35.96	200	69	A	H
	*	2432.231	93.93	-	-	92.34	31.33	6.22	35.96	100	359	P	V
	*	2431.563	83.11	-	-	81.52	31.33	6.22	35.96	100	359	A	V
802.11g CH 11 2462MHz	*	2459.452	95.21	-	-	93.42	31.36	6.28	35.85	123	10	P	H
	*	2460.454	84.41	-	-	82.62	31.36	6.28	35.85	123	10	A	H
		2484.08	55.57	-18.43	74	53.66	31.37	6.33	35.79	123	10	P	H
		2483.72	37.72	-16.28	54	35.81	31.37	6.33	35.79	123	10	A	H
	*	2463.46	94.55	-	-	92.76	31.36	6.28	35.85	100	332	P	V
	*	2454.943	83.98	-	-	82.19	31.36	6.28	35.85	100	332	A	V
		2484.64	54.79	-19.21	74	52.88	31.37	6.33	35.79	100	332	P	V
	2483.76	37.52	-16.48	54	35.61	31.37	6.33	35.79	100	332	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15C 2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		4824	46.93	-27.07	74	39.96	34.89	8.73	36.65	115	47	P	H
		4824	48.1	-25.9	74	41.13	34.89	8.73	36.65	110	256	P	V
802.11g CH 06 2437MHz		4875	47.2	-26.8	74	40.36	34.92	8.76	36.84	116	21	P	H
		7311	48.53	-25.47	74	40.99	35.56	10.84	38.86	102	341	P	H
		4875	48.07	-25.93	74	41.23	34.92	8.76	36.84	100	0	P	V
		7311	49.08	-24.92	74	41.54	35.56	10.84	38.86	187	56	P	V
802.11g CH 11 2462MHz		4923	47.4	-26.6	74	40.69	34.95	8.79	37.03	103	301	P	H
		7386	49.65	-24.35	74	42.37	35.58	10.89	39.19	105	224	P	H
		4923	48.7	-25.3	74	41.99	34.95	8.79	37.03	136	54	P	V
		7386	49.15	-24.85	74	41.87	35.58	10.89	39.19	102	54	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		2388.66	56.68	-17.32	74	55.29	31.3	6.17	36.08	200	137	P	H
		2389.92	39.93	-14.07	54	38.54	31.3	6.17	36.08	200	137	A	H
	*	2405.01	96.05	-	-	94.54	31.31	6.22	36.02	200	137	P	H
	*	2403.841	85.69	-	-	84.18	31.31	6.22	36.02	200	137	A	H
		2386.77	52.38	-21.62	74	50.99	31.3	6.17	36.08	199	48	P	V
		2389.38	38.35	-15.65	54	36.96	31.3	6.17	36.08	199	48	A	V
	*	2405.177	93.54	-	-	92.03	31.31	6.22	36.02	199	48	P	V
	*	2404.593	82.9	-	-	81.39	31.31	6.22	36.02	199	48	A	V
802.11n HT20 CH 06 2437MHz	*	2431.646	97.88	-	-	96.29	31.33	6.22	35.96	199	347	P	H
	*	2433.149	86.88	-	-	85.29	31.33	6.22	35.96	199	347	A	H
	*	2431.313	93.51	-	-	91.92	31.33	6.22	35.96	200	93	P	V
	*	2429.81	82.61	-	-	81.02	31.33	6.22	35.96	200	93	A	V
802.11n HT20 CH 11 2462MHz	*	2458.45	94.7	-	-	92.91	31.36	6.28	35.85	100	185	P	H
	*	2458.784	83.46	-	-	81.67	31.36	6.28	35.85	100	185	A	H
		2484.24	57.4	-16.6	74	55.49	31.37	6.33	35.79	100	185	P	H
		2484.08	37.68	-16.32	54	35.77	31.37	6.33	35.79	100	185	A	H
	*	2464.545	92.18	-	-	90.39	31.36	6.28	35.85	100	319	P	V
	*	2463.71	80.58	-	-	78.79	31.36	6.28	35.85	100	319	A	V
		2485.88	53.48	-20.52	74	51.57	31.37	6.33	35.79	100	319	P	V
	2484.96	36.97	-17.03	54	35.06	31.37	6.33	35.79	100	319	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		4824	47.46	-26.54	74	40.49	34.89	8.73	36.65	100	35	P	H
		4824	46.61	-27.39	74	39.64	34.89	8.73	36.65	168	264	P	V
802.11n HT20 CH 06 2437MHz		4875	47.15	-26.85	74	40.31	34.92	8.76	36.84	168	265	P	H
		7311	47.05	-26.95	74	39.51	35.56	10.84	38.86	139	268	P	H
		4875	46.94	-27.06	74	40.1	34.92	8.76	36.84	100	131	P	V
		7311	48.4	-25.6	74	40.86	35.56	10.84	38.86	169	52	P	V
802.11n HT20 CH 11 2462MHz		4923	46.78	-27.22	74	40.07	34.95	8.79	37.03	100	302	P	H
		7386	49.78	-24.22	74	42.5	35.58	10.89	39.19	168	269	P	H
		4923	47.11	-26.89	74	40.4	34.95	8.79	37.03	109	201	P	V
		7386	49.06	-24.94	74	41.78	35.58	10.89	39.19	164	260	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		2389.2	58.48	-15.52	74	57.09	31.3	6.17	36.08	177	351	P	H
		2389.38	43.01	-10.99	54	41.62	31.3	6.17	36.08	177	351	A	H
	*	2406.847	94.4	-	-	92.89	31.31	6.22	36.02	177	351	P	H
	*	2418.955	84.05	-	-	82.54	31.31	6.22	36.02	177	351	A	H
		2485.04	52.84	-21.16	74	50.93	31.37	6.33	35.79	177	351	P	H
		2483.6	37.7	-16.3	54	35.79	31.37	6.33	35.79	177	351	A	H
		2388.39	57.61	-16.39	74	56.22	31.3	6.17	36.08	200	77	P	V
		2387.76	42.01	-11.99	54	40.62	31.3	6.17	36.08	200	77	A	V
	*	2427.972	92.94	-	-	91.35	31.33	6.22	35.96	200	77	P	V
	*	2423.881	81.33	-	-	79.74	31.33	6.22	35.96	200	77	A	V
	2484.44	50.17	-23.83	74	48.26	31.37	6.33	35.79	200	77	P	V	
	2489.4	37.12	-16.88	54	35.14	31.39	6.33	35.74	200	77	A	V	
802.11n HT40 CH 06 2437MHz		2381.19	55.94	-18.06	74	54.65	31.28	6.17	36.16	100	354	P	H
		2389.38	39.29	-14.71	54	37.9	31.3	6.17	36.08	100	354	A	H
	*	2439.746	93.65	-	-	91.94	31.34	6.28	35.91	100	354	P	H
	*	2434.736	82.67	-	-	81.08	31.33	6.22	35.96	100	354	A	H
		2490.36	55.24	-18.76	74	53.26	31.39	6.33	35.74	100	354	P	H
		2484.08	37.91	-16.09	54	36	31.37	6.33	35.79	100	354	A	H
		2382.36	57.2	-16.8	74	55.91	31.28	6.17	36.16	198	80	P	V
		2387.85	39.2	-14.8	54	37.81	31.3	6.17	36.08	198	80	A	V
	*	2427.304	91.57	-	-	89.98	31.33	6.22	35.96	198	80	P	V
	*	2420.458	80.76	-	-	79.17	31.33	6.22	35.96	198	80	A	V
	2487.92	51.49	-22.51	74	49.51	31.39	6.33	35.74	198	80	P	V	
	2483.52	37.4	-16.6	54	35.49	31.37	6.33	35.79	198	80	A	V	



802.11n HT40 CH 09 2452MHz		2389.56	53.49	-20.51	74	52.1	31.3	6.17	36.08	176	252	P	H
		2389.83	38.69	-15.31	54	37.3	31.3	6.17	36.08	176	252	A	H
	*	2446.844	94.21	-	-	92.5	31.34	6.28	35.91	176	252	P	H
	*	2446.426	83.65	-	-	81.94	31.34	6.28	35.91	176	252	A	H
		2487.6	60.36	-13.64	74	58.38	31.39	6.33	35.74	176	252	P	H
		2483.76	40.49	-13.51	54	38.58	31.37	6.33	35.79	176	252	A	H
		2389.38	53.14	-20.86	74	51.75	31.3	6.17	36.08	195	67	P	V
		2389.92	38.4	-15.6	54	37.01	31.3	6.17	36.08	195	67	A	V
	*	2445.341	92.52	-	-	90.81	31.34	6.28	35.91	195	67	P	V
	*	2446.593	81.9	-	-	80.19	31.34	6.28	35.91	195	67	A	V
		2487.48	58.88	-15.12	74	56.97	31.37	6.33	35.79	195	67	P	V
		2486.08	39.48	-14.52	54	37.57	31.37	6.33	35.79	195	67	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n		4845	46.34	-27.66	74	39.43	34.9	8.73	36.72	138	256	P	H
HT40		7266	46.56	-27.44	74	38.92	35.56	10.81	38.73	139	51	P	H
CH 03		4845	45.95	-28.05	74	39.04	34.9	8.73	36.72	109	216	P	V
2422MHz		7266	47.63	-26.37	74	39.99	35.56	10.81	38.73	139	210	P	V
802.11n		4875	47.28	-26.72	74	40.44	34.92	8.76	36.84	100	0	P	H
HT40		7311	48.1	-25.9	74	40.56	35.56	10.84	38.86	110	130	P	H
CH 06		4875	45.91	-28.09	74	39.07	34.92	8.76	36.84	139	263	P	V
2437MHz		7311	47.23	-26.77	74	39.69	35.56	10.84	38.86	168	59	P	V
802.11n		4905	46.74	-27.26	74	39.97	34.94	8.79	36.96	168	219	P	H
HT40		7356	47.72	-26.28	74	40.35	35.57	10.86	39.06	169	137	P	H
CH 09		4904	48.23	-25.77	74	41.46	34.94	8.79	36.96	100	150	P	V
2452MHz		7356	47.95	-26.05	74	40.58	35.57	10.86	39.06	139	168	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C Emission below 1GHz

2.4GHz WIFI 802.11n HT40 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT40 LF		30	18.07	-21.93	40	30.74	19.2	0.79	32.66			P	H
		52.31	17.91	-22.09	40	41.55	8.18	0.79	32.61			P	H
		129.91	23.26	-20.24	43.5	43.09	11.54	1.23	32.6	152	168	P	H
		160.95	19.76	-23.74	43.5	39.58	11.29	1.44	32.55			P	H
		187.14	21.81	-21.69	43.5	42.56	10.28	1.44	32.47			P	H
		215.27	21.18	-22.32	43.5	41.55	10.51	1.61	32.49			P	H
		30.97	27	-13	40	40.16	18.71	0.79	32.66			P	V
		37.76	27.15	-12.85	40	43.69	15.28	0.79	32.61			P	V
		52.31	30.89	-9.11	40	54.53	8.18	0.79	32.61	158	100	P	V
		101.78	19.13	-24.37	43.5	39.4	11.32	1.04	32.63			P	V
		189.08	18.18	-25.32	43.5	38.83	10.21	1.61	32.47			P	V
	279.29	17.6	-28.4	46	35.52	12.63	1.9	32.45			P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.