

#01_GSM850_GPRS (4Tx slots)_Right Cheek_Ch128


Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.08
Medium: HSL_835_150212 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.875$ mho/m; $\epsilon_r = 41.215$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.41, 9.41, 9.41); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.698 mW/g

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.440 V/m; Power Drift = 0.0015 dB
Peak SAR (extrapolated) = 0.756 W/kg
SAR(1 g) = 0.614 mW/g; SAR(10 g) = 0.470 mW/g
Maximum value of SAR (measured) = 0.688 mW/g

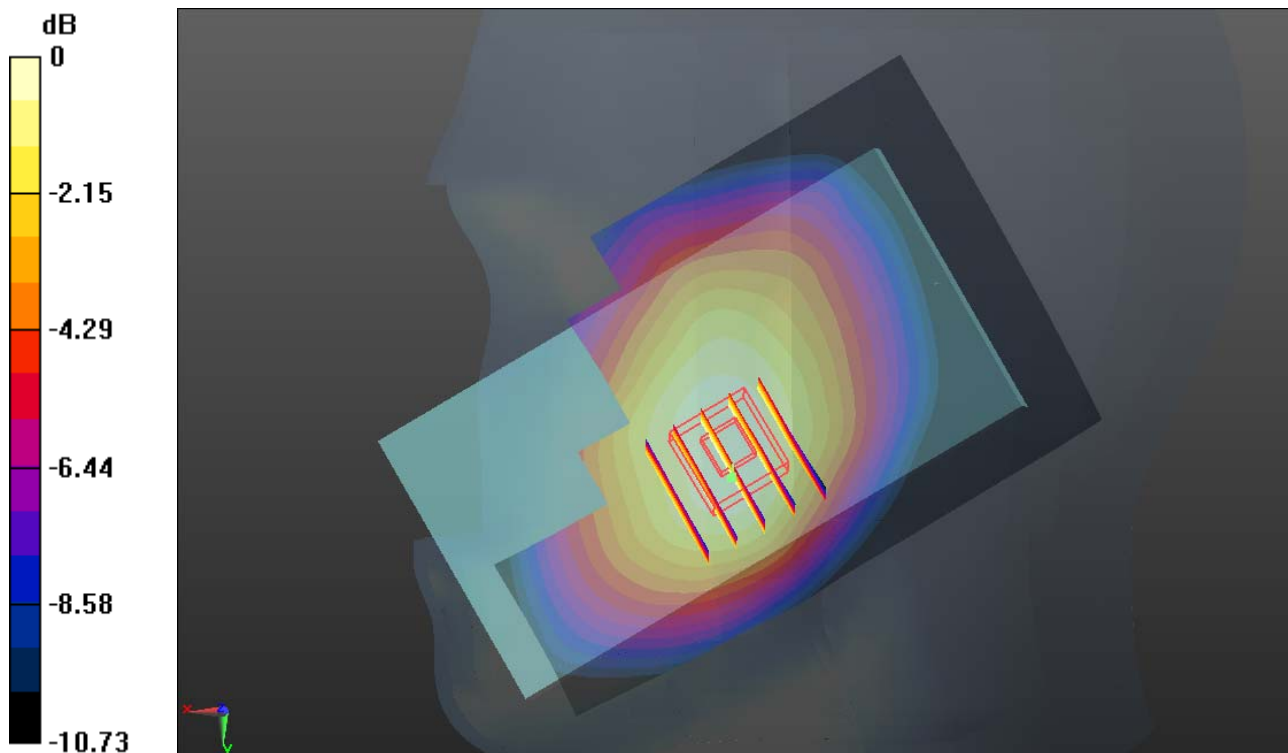

0 dB = 0.690mW/g

#02_GSM1900_GPRS (4 Tx slots)_Right Cheek_Ch810


Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08
Medium: HSL_1900_150212 Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.435$ mho/m; $\epsilon_r = 39.029$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.4, 8.4, 8.4); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch810/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.255 mW/g

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.311 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.287 W/kg
SAR(1 g) = 0.189 mW/g; SAR(10 g) = 0.114 mW/g
Maximum value of SAR (measured) = 0.241 mW/g

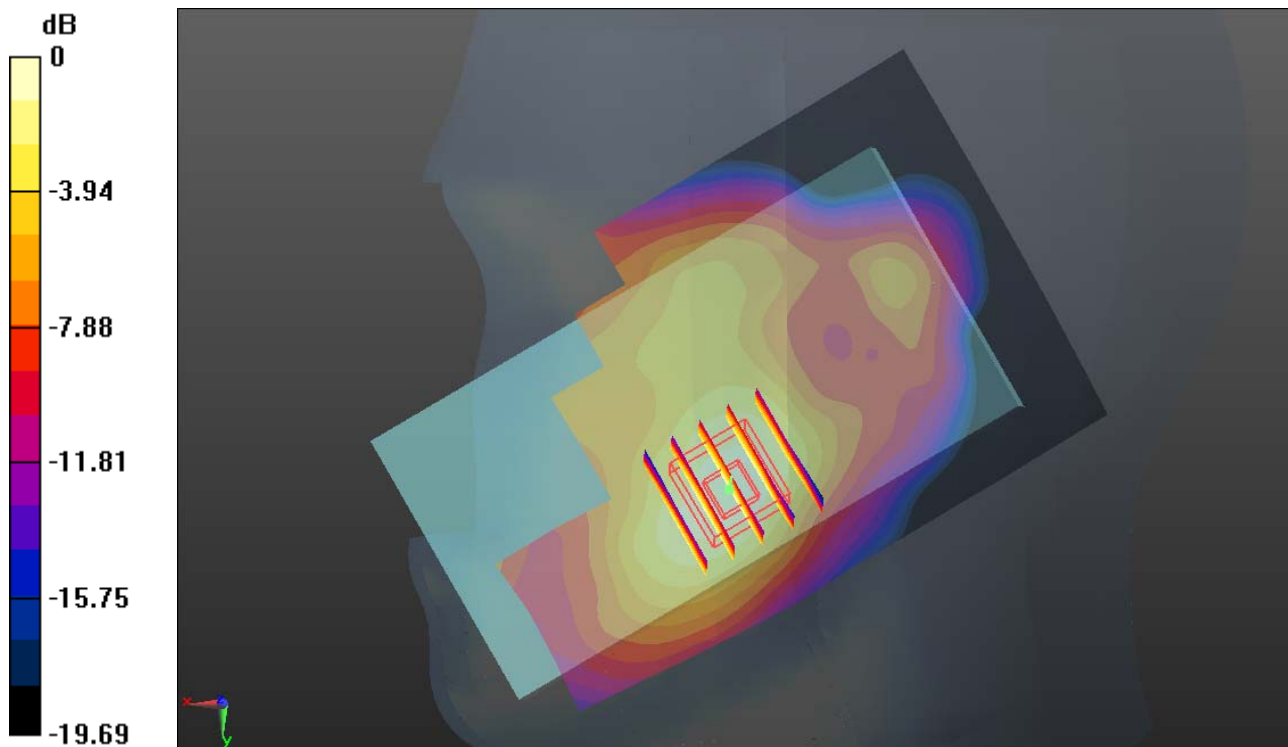

0 dB = 0.240mW/g

#03_WCDMA Band V_RMC12.2k_Right Cheek_Ch4233


Communication System: UMTS (0); Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium: HSL_835_150212 Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 40.936$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.41, 9.41, 9.41); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch4233/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.396 mW/g

Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.364 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.424 W/kg
SAR(1 g) = 0.350 mW/g; SAR(10 g) = 0.271 mW/g
Maximum value of SAR (measured) = 0.394 mW/g

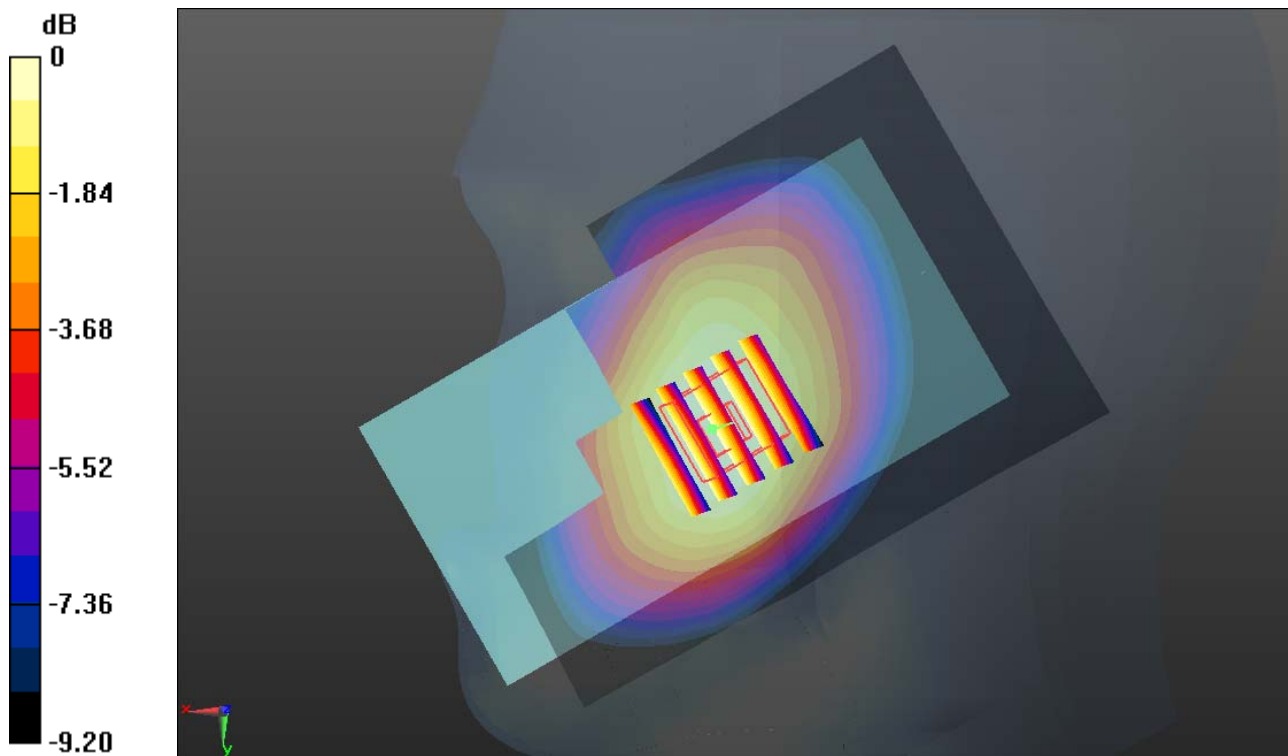

0 dB = 0.390mW/g

#04_WCDMA Band II_RMC12.2K_Right Cheek_Ch9262


Communication System: UMTS (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: HSL_1900_150212 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.377$ mho/m; $\epsilon_r = 39.257$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.4, 8.4, 8.4); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch9262/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.309 mW/g

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.704 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.340 W/kg
SAR(1 g) = 0.230 mW/g; SAR(10 g) = 0.141 mW/g
Maximum value of SAR (measured) = 0.290 mW/g

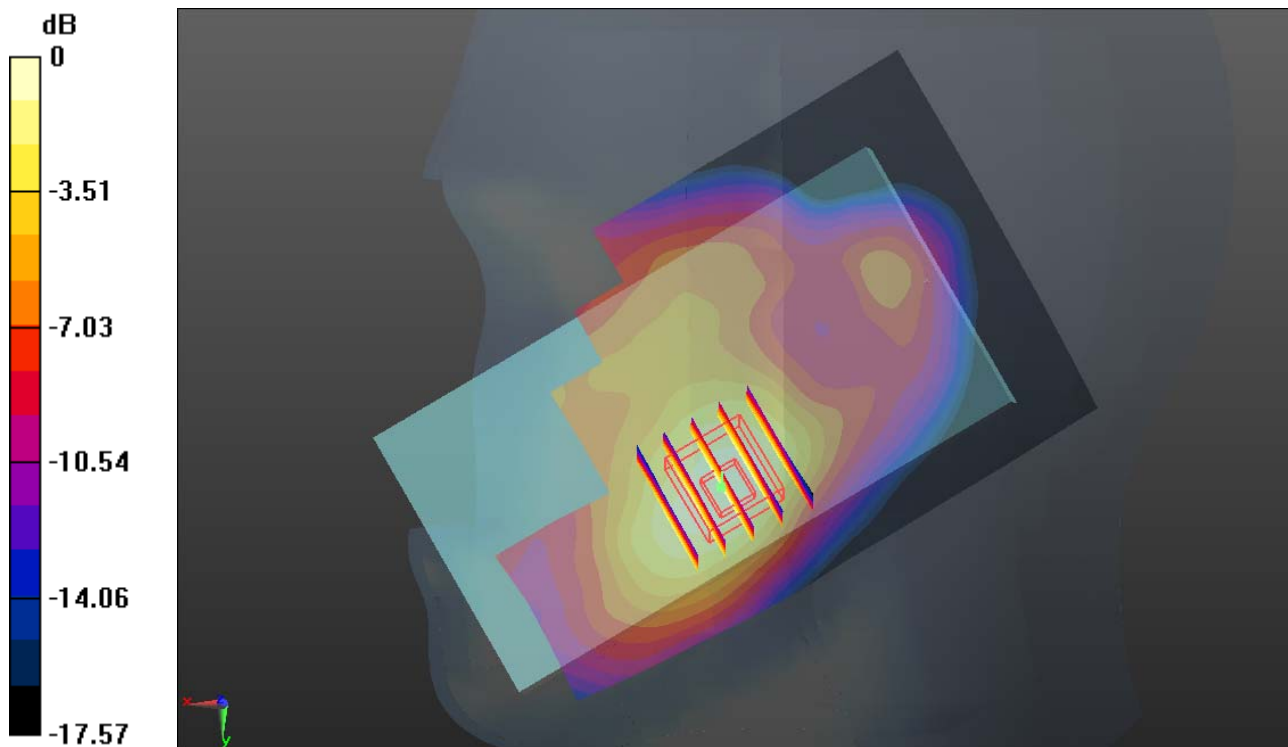

0 dB = 0.290mW/g

#05_WLAN2.4GHz_802.11b 1Mbps_1M_Right Cheek_Ch1


Communication System: WIFI (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: HSL_2450_150204 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.773$ mho/m; $\epsilon_r = 39.341$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.48, 7.48, 7.48); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch1/Area Scan (91x141x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.324 mW/g

Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.782 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.458 W/kg
SAR(1 g) = 0.201 mW/g; SAR(10 g) = 0.084 mW/g
Maximum value of SAR (measured) = 0.322 mW/g

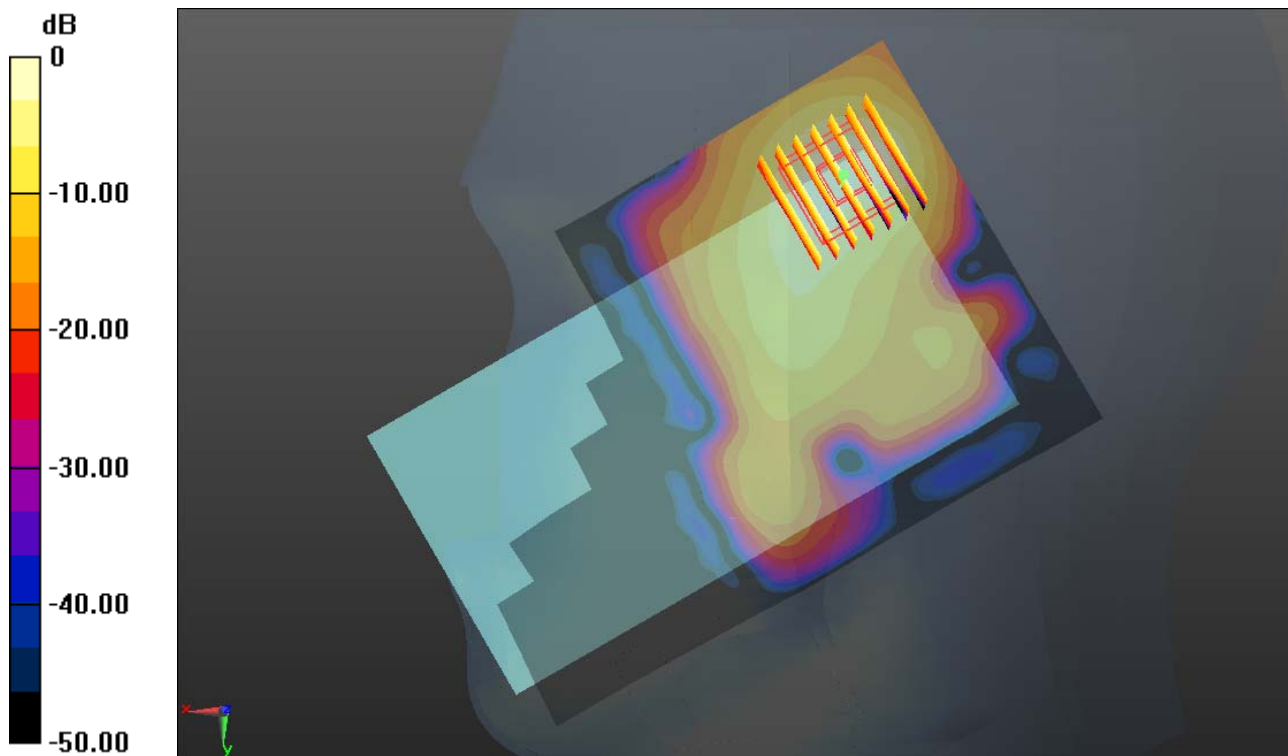

0 dB = 0.320mW/g

#06_GSM850_GPRS (4 Tx slots)_Back_1cm_Ch128


Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.08
 Medium: MSL_835_150202 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 54.57$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.31, 9.31, 9.31); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.188 mW/g

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 33.369 V/m; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 1.283 W/kg
SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.800 mW/g
 Maximum value of SAR (measured) = 1.181 mW/g

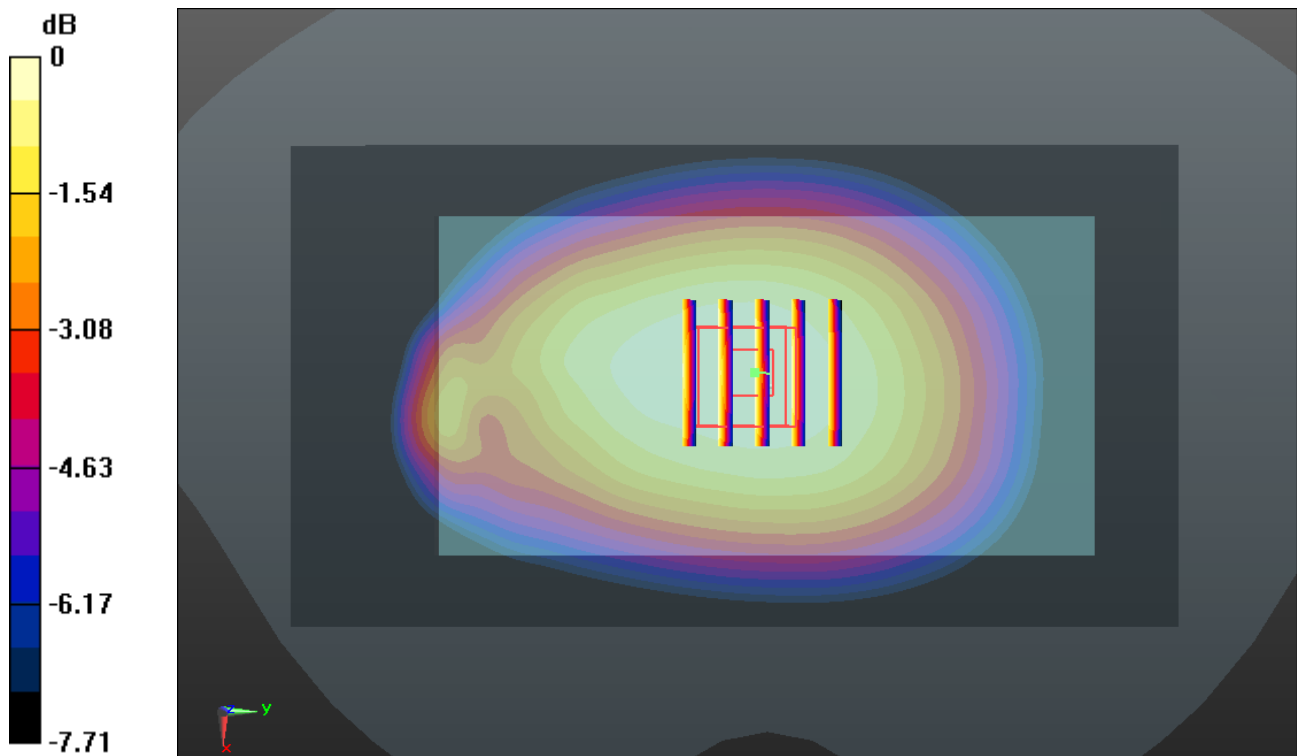

0 dB = 1.180mW/g

#07_GSM1900_GPRS (4 Tx slots)_Bottom Side_1cm_Ch810


Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08
Medium: MSL_1900_150211 Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.548$ mho/m; $\epsilon_r = 52.762$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.56, 7.56, 7.56); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch810/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.370 mW/g

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 26.880 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.689 W/kg
SAR(1 g) = 0.980 mW/g; SAR(10 g) = 0.503 mW/g
Maximum value of SAR (measured) = 1.382 mW/g

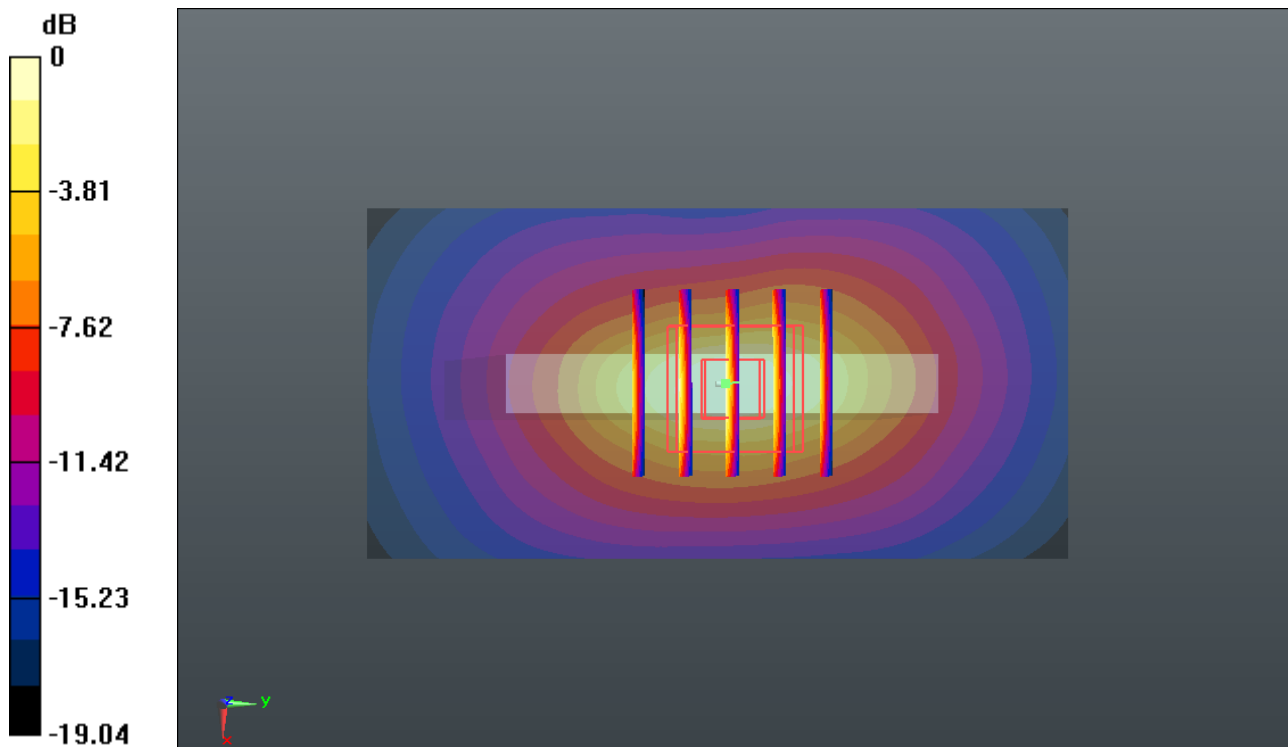

0 dB = 1.380mW/g

#08_WCDMA Band V_RMC12.2k_Back_1cm_Ch4182


Communication System: UMTS (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: MSL_835_150202 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 54.453$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.31, 9.31, 9.31); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch4182/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.635 mW/g

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 24.246 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.692 W/kg
SAR(1 g) = 0.554 mW/g; SAR(10 g) = 0.428 mW/g
Maximum value of SAR (measured) = 0.634 mW/g

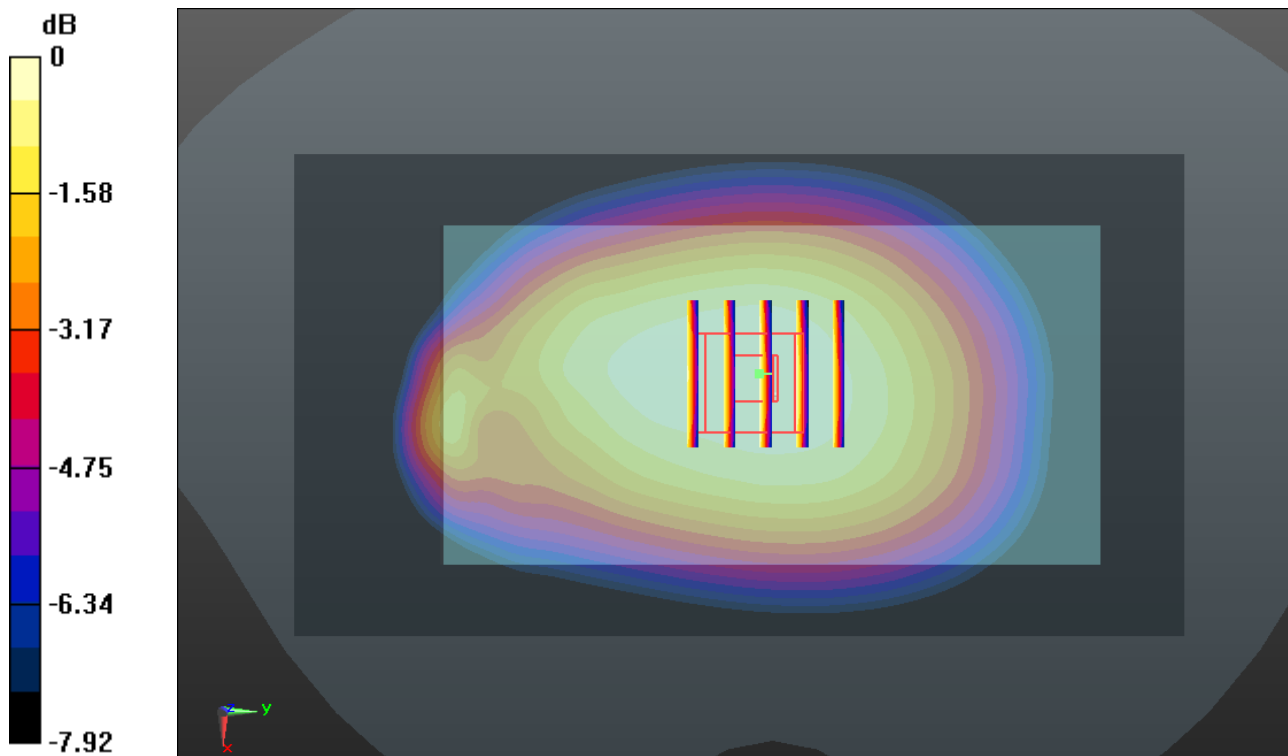

0 dB = 0.630mW/g

#09_WCDMA Band II_RMC12.2k_Bottom Side_1cm_Ch9538


Communication System: UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium: MSL_1900_150211 Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.546$ mho/m; $\epsilon_r = 52.768$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.56, 7.56, 7.56); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch9538/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.566 mW/g

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 27.679 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.966 W/kg
SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.577 mW/g
Maximum value of SAR (measured) = 1.595 mW/g

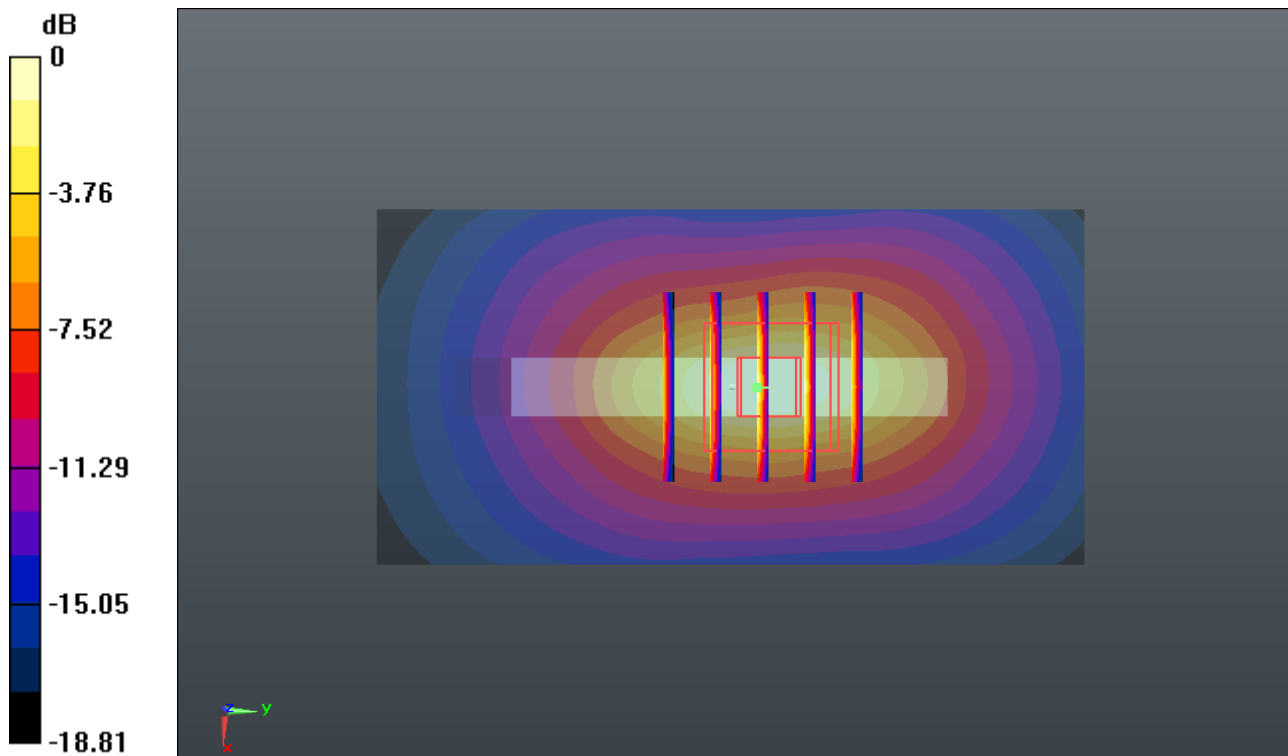

0 dB = 1.600mW/g

#10_WLAN2.4GHz_802.11b 1Mbps_Back_1cm_Ch11


Communication System: WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: MSL_2450_150202 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.959$ mho/m; $\epsilon_r = 50.913$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.14, 7.14, 7.14); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (91x141x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.162 mW/g

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.228 W/kg
SAR(1 g) = 0.108 mW/g; SAR(10 g) = 0.049 mW/g
Maximum value of SAR (measured) = 0.167 mW/g

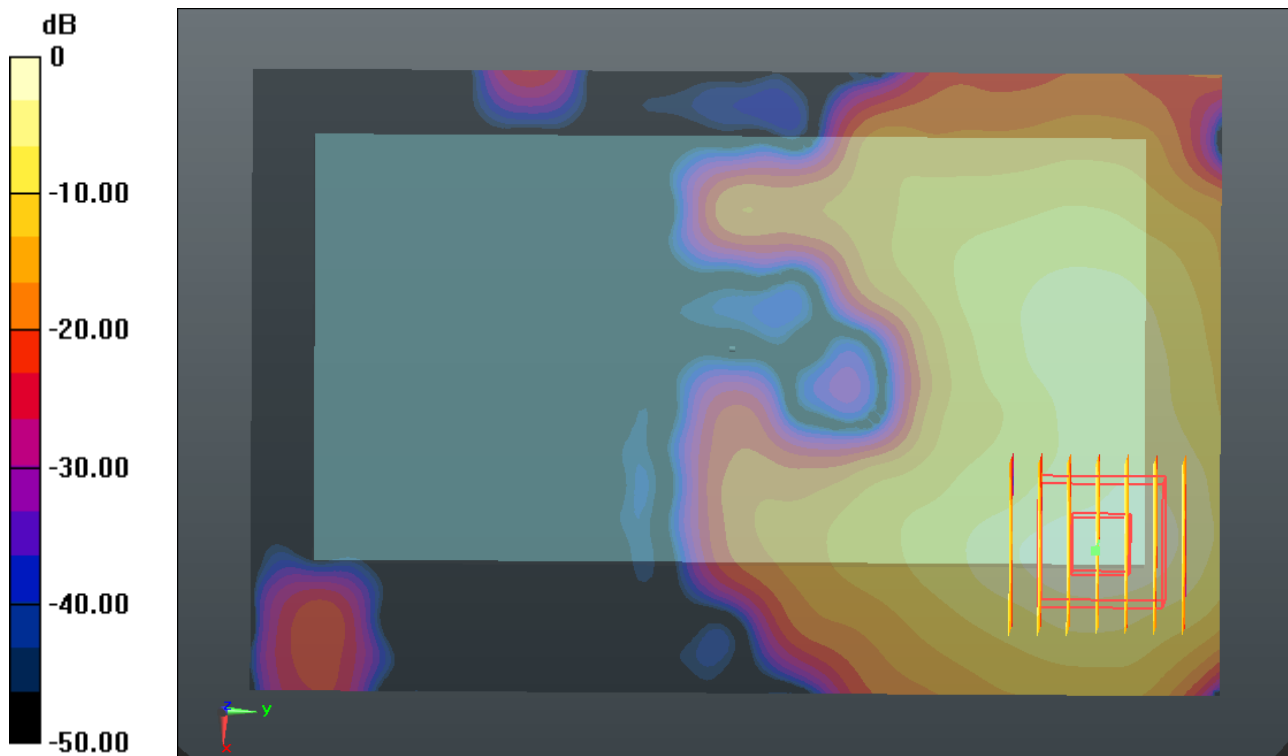

0 dB = 0.170mW/g

#11_GSM1900_GPRS (4 Tx slots)_Back_1cm_Ch810


Communication System: GPRS/EDGE (4 Tx slots) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08
Medium: MSL_1900_150211 Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.548$ mho/m; $\epsilon_r = 52.762$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.56, 7.56, 7.56); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch810/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.069 mW/g

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.074 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 1.341 W/kg
SAR(1 g) = 0.793 mW/g; SAR(10 g) = 0.429 mW/g
Maximum value of SAR (measured) = 1.102 mW/g

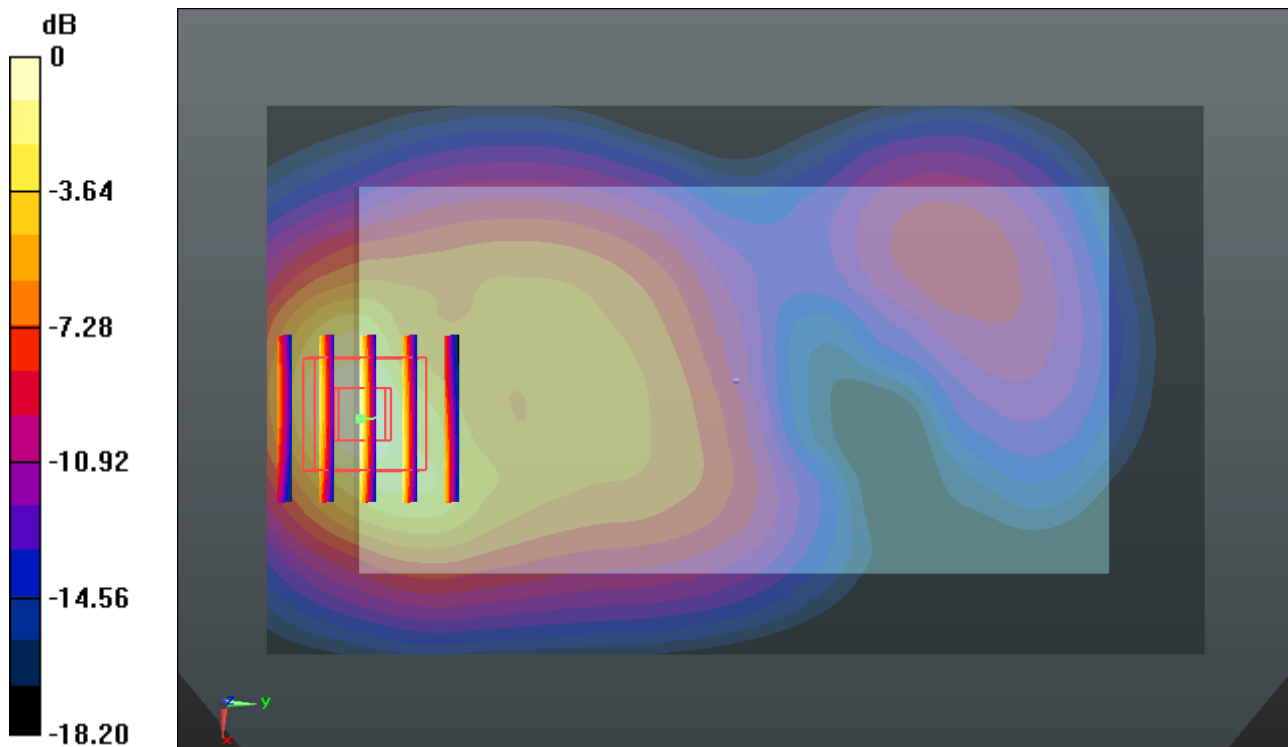

0 dB = 1.100mW/g

#12_WCDMA Band II_RMC12.2K_Back_1cm_Ch9538


Communication System: UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium: MSL_1900_150211 Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.546$ mho/m; $\epsilon_r = 52.768$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.56, 7.56, 7.56); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch9538/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.125 mW/g

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.279 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 1.429 W/kg
SAR(1 g) = 0.841 mW/g; SAR(10 g) = 0.456 mW/g
Maximum value of SAR (measured) = 1.170 mW/g

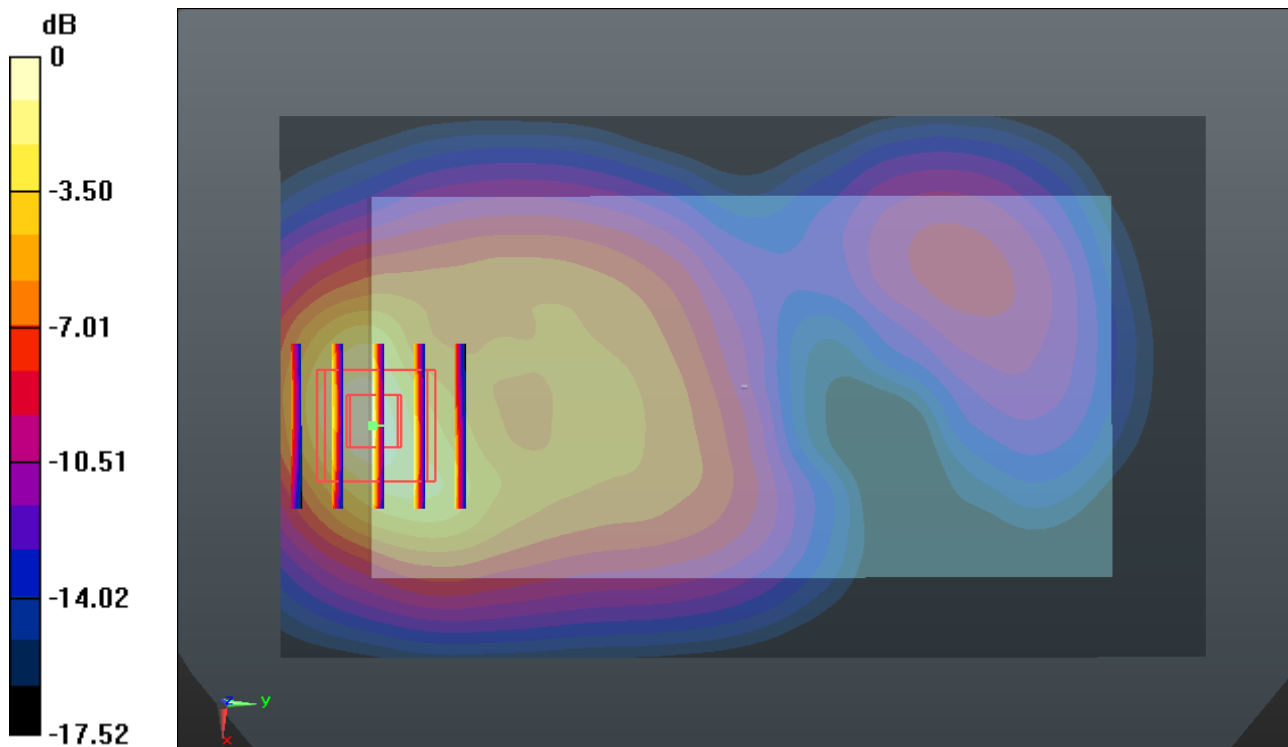

0 dB = 1.170mW/g