


FCC RF Test Report


APPLICANT : Acer Incorporated
EQUIPMENT : Smart HandHeld
BRAND NAME : Acer
MODEL NAME : T08
MARKETING NAME : Liquid Zest Plus
FCC ID : HLZDMZ628
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Mar. 05, 2016 and testing was completed on Jul. 28, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode	9
2.3 Connection Diagram of Test System	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 6dB and 99% Bandwidth Measurement	12
3.2 Output Power Measurement.....	14
3.3 Power Spectral Density Measurement	15
3.4 Conducted Band Edges and Spurious Emission Measurement	17
3.5 Radiated Band Edges and Spurious Emission Measurement	30
3.6 AC Conducted Emission Measurement.....	34
3.7 Antenna Requirements	38
4 LIST OF MEASURING EQUIPMENT	39
5 UNCERTAINTY OF EVALUATION	40
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED TEST RESULTS	
APPENDIX C. DUTY CYCLE PLOTS	
APPENDIX D. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR630504C	Rev. 01	Initial issue of report	Aug. 02, 2016

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	RSS-247 5.2(1)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	RSS-Gen 6.6	99% Bandwidth	-	Pass	-
3.2	15.247(b)	RSS-247 A5.4(4)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	RSS-247 5.2(2)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	RSS-247 5.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	RSS-247 5.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 8.78 dB at 2483.550 MHz
3.6	15.207	RSS-GEN 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit 5.41 dB at 0.570 MHz
3.7	15.203 & 15.247(b)	N/A	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Acer Incorporated

8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22181, Taiwan (R.O.C)

1.2 Manufacturer

Huaqin Telecom Technology Co., Ltd.

No.1 Building, 399 Keyuan Road, Zhangjiang Hi-Tech Park, Pudong New Area, Shanghai, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart HandHeld
Brand Name	Acer
Model Name	T08
Marketing Name	Liquid Zest Plus
FCC ID	HLZDMZ628
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+/LTE WLAN 2.4GHz 802.11b/g/n (HT20/HT40) Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
IMEI Code	Conducted: 358724070034510/358724070034627 Conduction: 358724070034734/358724070034833 Radiation: 358724070034429/358724070034536
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT sample 1 and sample 2, the differences that sample 1 is dual SIM card, sample 2 is single SIM card. We only choose dual SIM sample to perform full tests.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 13.33 dBm (0.0215 W) 802.11g : 19.67 dBm (0.0927 W) 802.11n HT20 : 19.91 dBm (0.0979 W) 802.11n HT40 : 21.03 dBm (0.1268 W)
99% Occupied Bandwidth	802.11b : 14.55MHz 802.11g : 17.85MHz 802.11n HT20 : 18.55MHz 802.11n HT40 : 36.60MHz
Antenna Type	IFA Antenna with gain 1.97 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH05-HY	03CH10-HY	897315/4086H-1

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		
	CO01-KS		

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ♦ ANSI C63.10-2013
- ♦ IC RSS-247 Issue 1
- ♦ IC RSS-Gen Issue 4

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.


<2.4GHz>

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0


Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter 9V) + Earphone for Sample 1 Mode 2 : GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter 5V) + Earphone for Sample 1
Remark: - For radiated TCs, the tests were performed with adapter, USB cable and earphone for sample 1. - For conducted emission test cases, only the test worse data in bold of these modes was reported.	

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

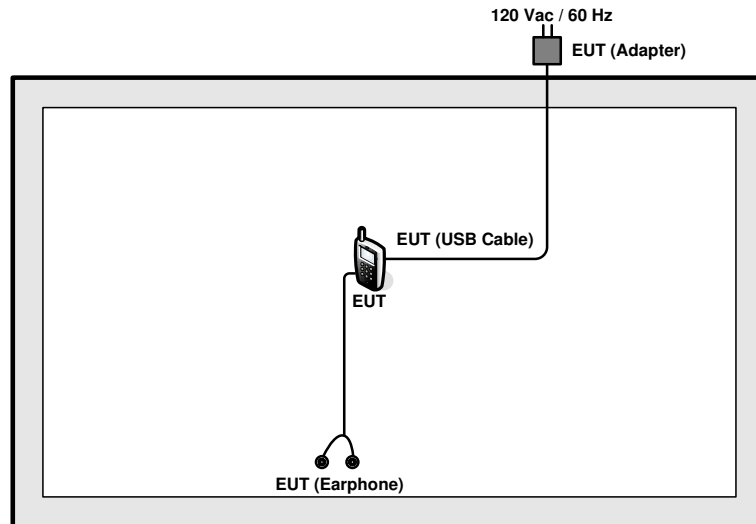

<AC Conducted Emission Mode>

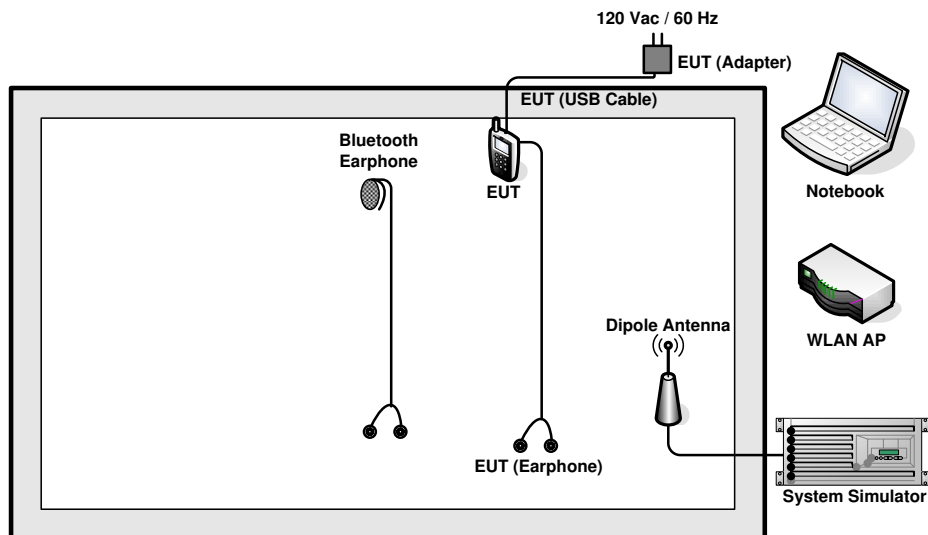

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.1 dB and 20dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.1 + 20 = 24.1 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

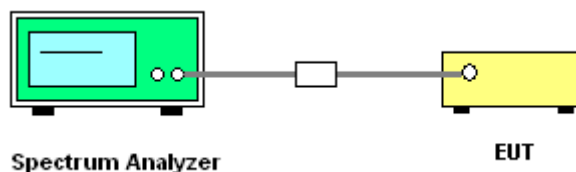

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A of this test report.

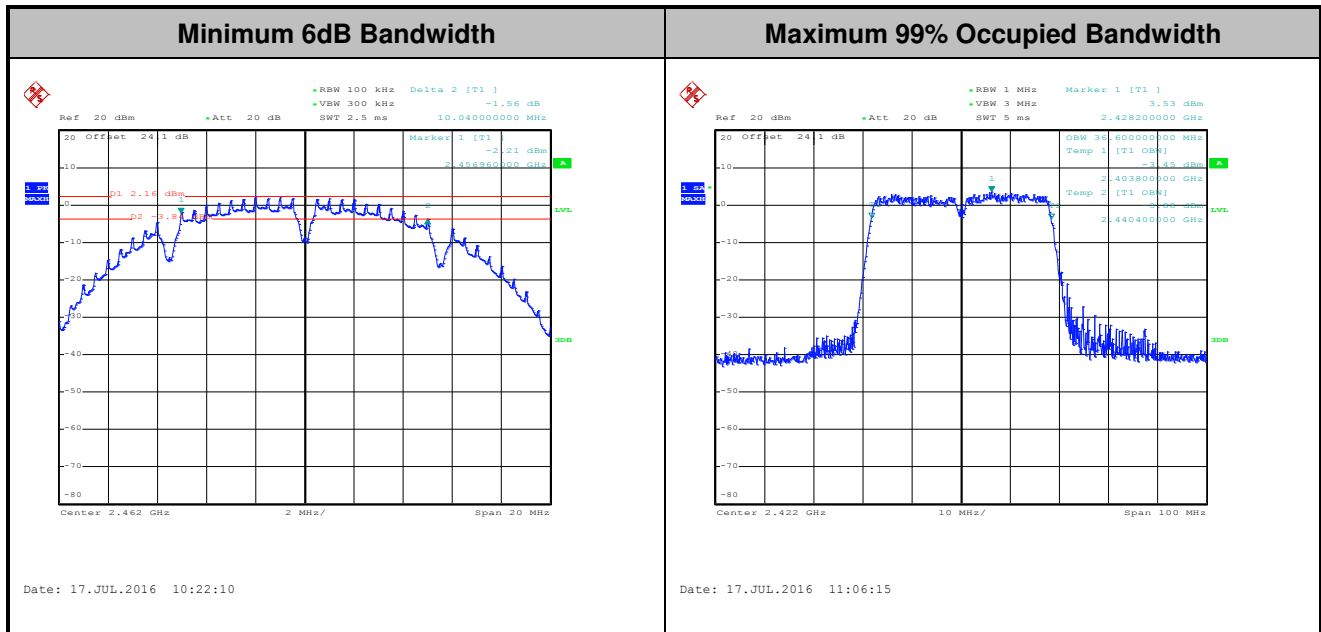

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r05 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

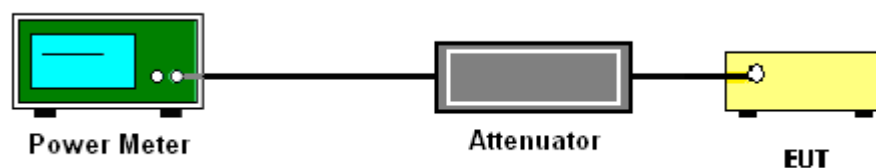

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A of this test report.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A of this test report.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup

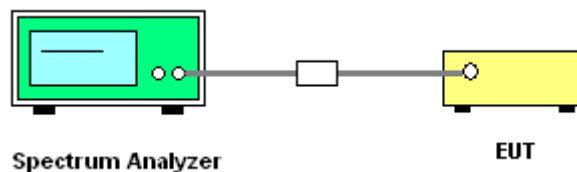



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A of this test report.

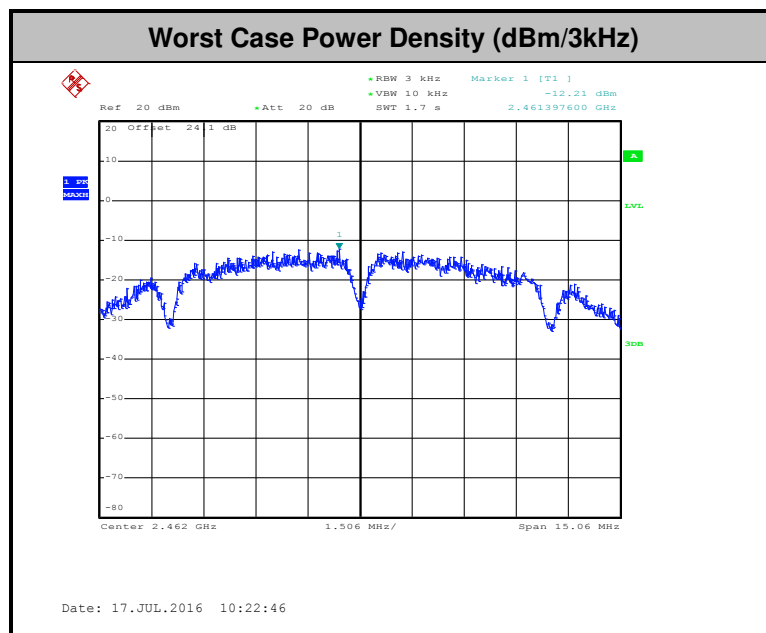

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

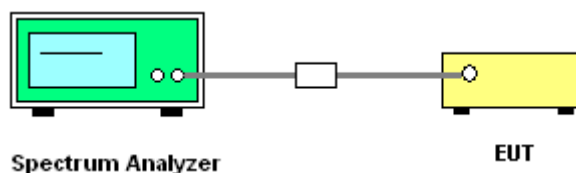




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	24~26℃
Test Band :	2.4GHz Low	Relative Humidity :	45~49%
Test Channel :	01	Test Engineer :	Aking Chang


WLAN 802.11b Channel 01

100kHz PSD reference Level

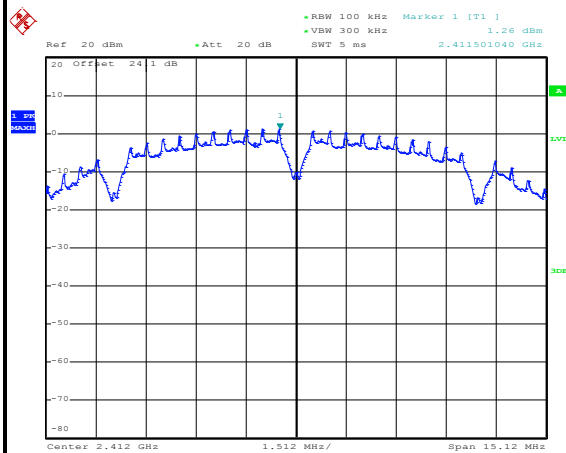


Date: 17.JUL.2016 10:11:55

Low Channel Plot

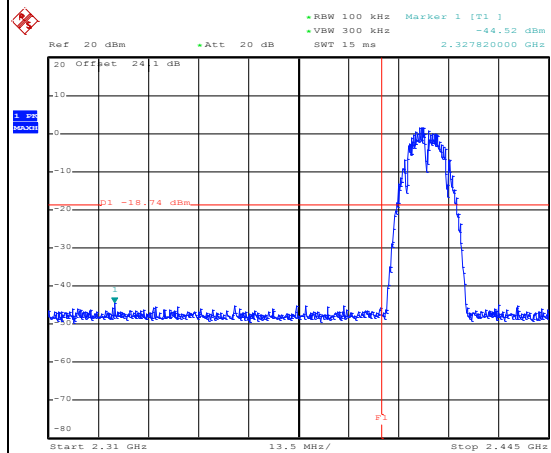


Date: 17.JUL.2016 10:12:20

Spurious Emission 30MHz~3GHz

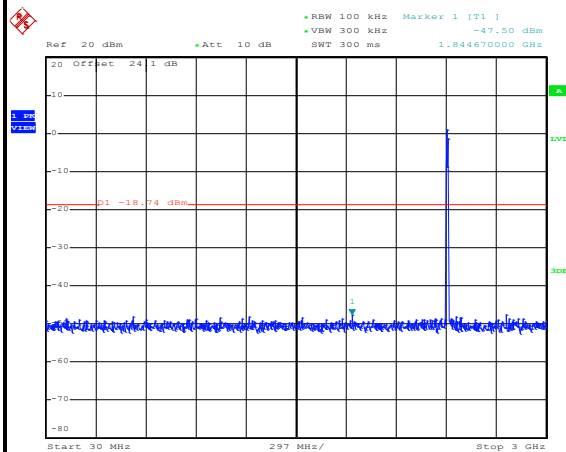

Date: 17.JUL.2016 10:12:33

Spurious Emission 2GHz~25GHz

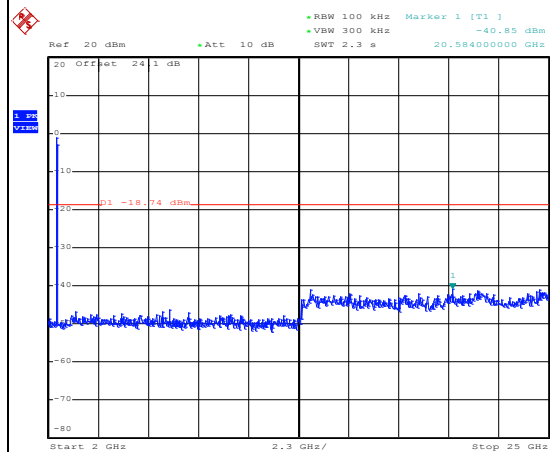


Date: 17.JUL.2016 10:12:42



Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	45~49%
Test Channel :	06	Test Engineer :	Aking Chang


WLAN 802.11b Channel 06

100kHz PSD reference Level

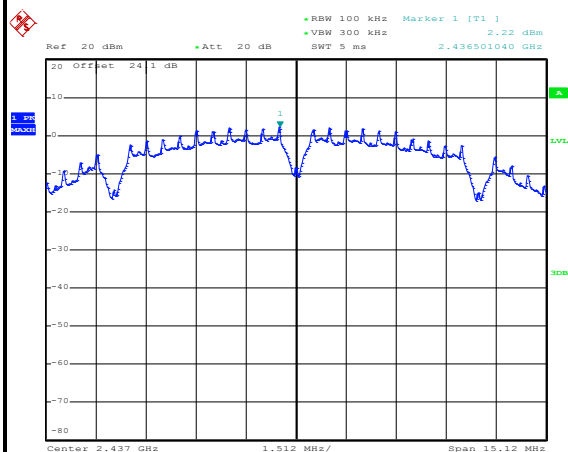


Date: 17.JUL.2016 10:17:58

Spurious Emission 30MHz~3GHz

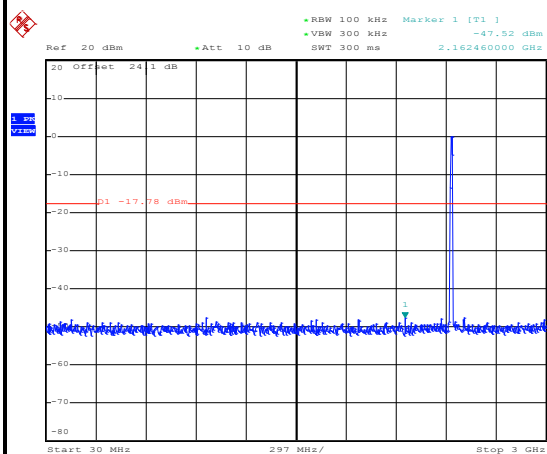

Date: 17.JUL.2016 10:18:14

Spurious Emission 2GHz~25GHz

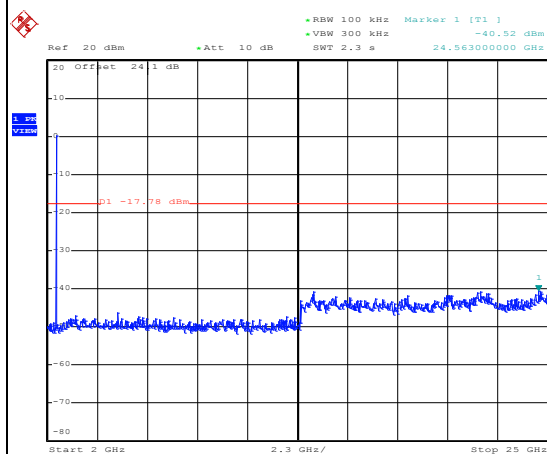


Date: 17.JUL.2016 10:18:22



Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	45~49%
Test Channel :	11	Test Engineer :	Aking Chang


WLAN 802.11b Channel 11

100kHz PSD reference Level

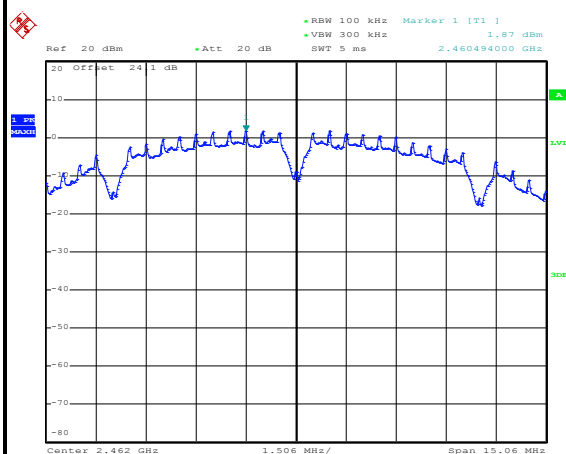


Date: 17.JUL.2016 10:23:16

High Channel Plot

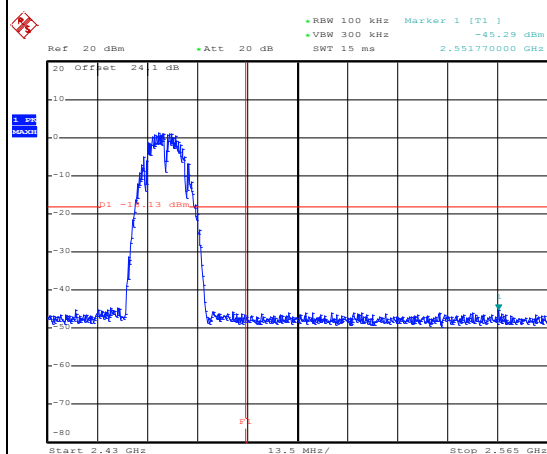


Date: 17.JUL.2016 10:23:38

Spurious Emission 30MHz~3GHz

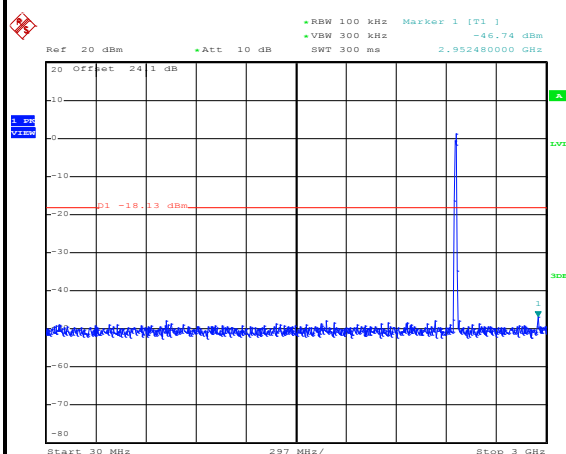

Date: 17.JUL.2016 10:23:50

Spurious Emission 2GHz~25GHz

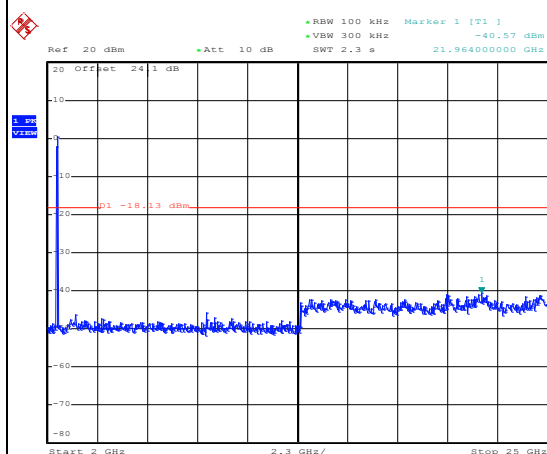


Date: 17.JUL.2016 10:23:59



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	45~49%
Test Channel :	01	Test Engineer :	Aking Chang


WLAN 802.11g Channel 01

100kHz PSD reference Level

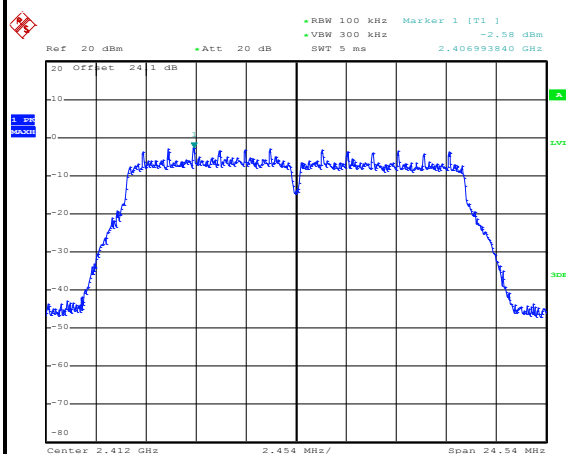


Date: 17.JUL.2016 10:29:05

Low Channel Plot

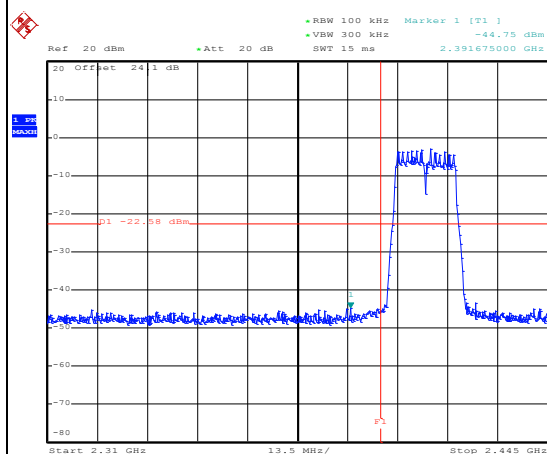


Date: 17.JUL.2016 10:29:33

Spurious Emission 30MHz~3GHz

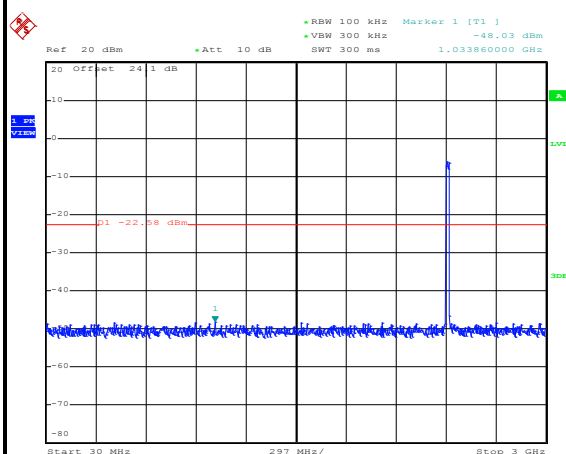

Date: 17.JUL.2016 10:29:52

Spurious Emission 2GHz~25GHz

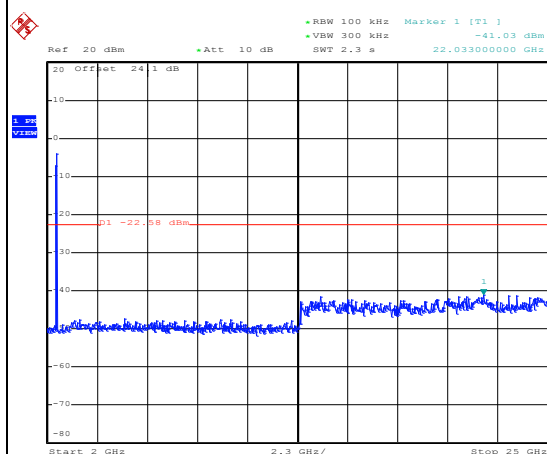


Date: 17.JUL.2016 10:30:01



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	45~49%
Test Channel :	06	Test Engineer :	Aking Chang


WLAN 802.11g Channel 06

100kHz PSD reference Level

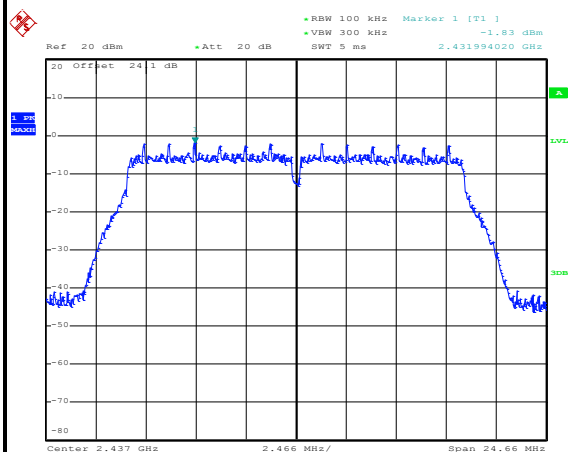


Date: 17.JUL.2016 10:34:43

Spurious Emission 30MHz~3GHz

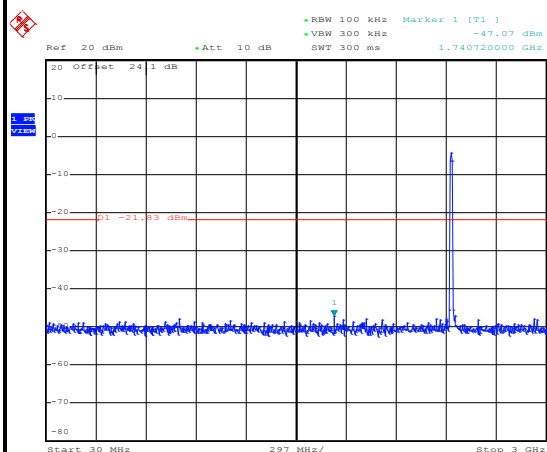

Date: 17.JUL.2016 10:34:57

Spurious Emission 2GHz~25GHz

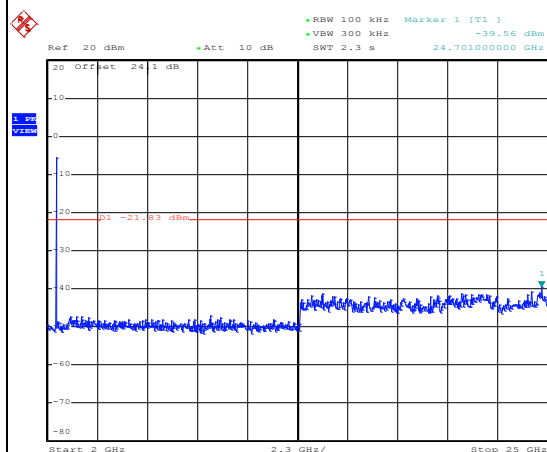


Date: 17.JUL.2016 10:35:05



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	45~49%
Test Channel :	11	Test Engineer :	Aking Chang


WLAN 802.11g Channel 11

100kHz PSD reference Level

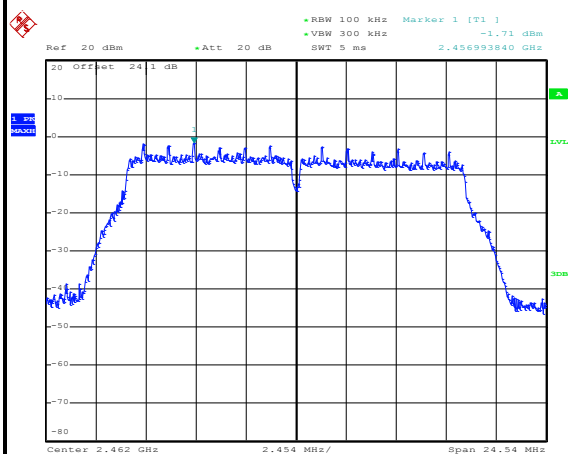


Date: 17.JUL.2016 10:39:03

High Channel Plot

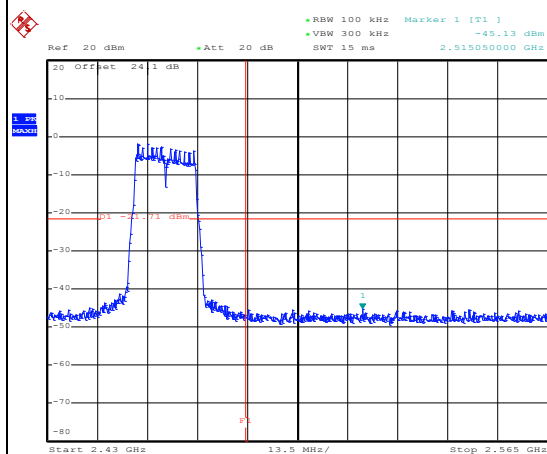


Date: 17.JUL.2016 10:39:32

Spurious Emission 30MHz~3GHz

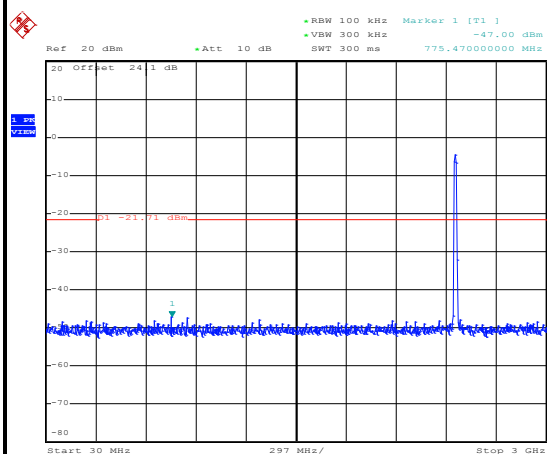

Date: 17.JUL.2016 10:39:46

Spurious Emission 2GHz~25GHz

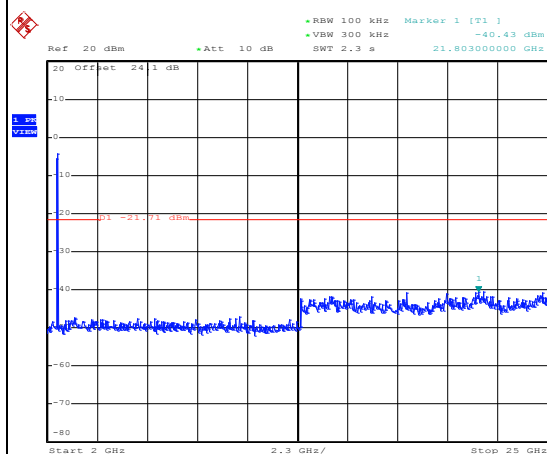


Date: 17.JUL.2016 10:39:54



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	45~49%
Test Channel :	01	Test Engineer :	Aking Chang


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

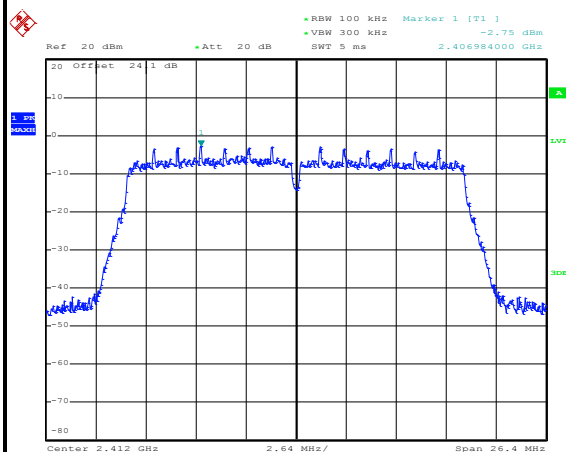


Date: 17.JUL.2016 10:44:21

Low Channel Plot

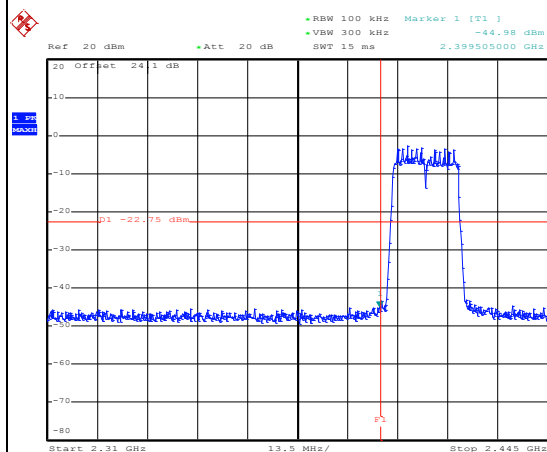


Date: 17.JUL.2016 10:45:08

Spurious Emission 30MHz~3GHz

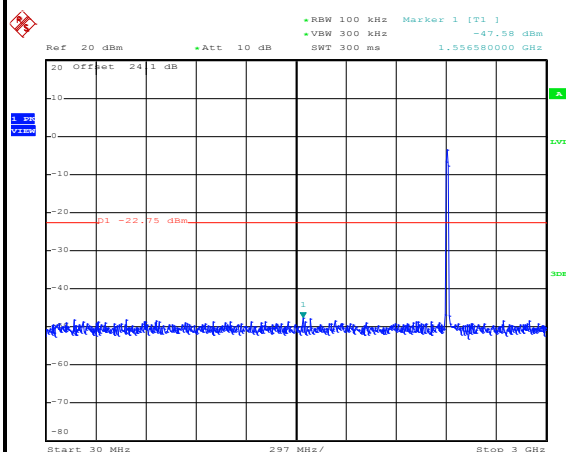

Date: 17.JUL.2016 10:45:31

Spurious Emission 2GHz~25GHz

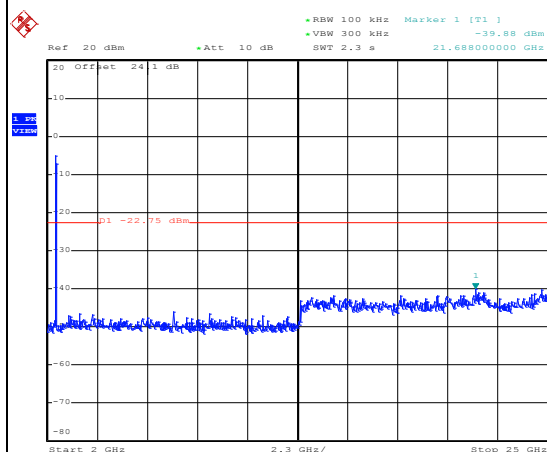


Date: 17.JUL.2016 10:45:39

Test Mode :	802.11n HT20	Temperature :	24~26℃
Test Band :	2.4GHz Mid	Relative Humidity :	45~49%
Test Channel :	06	Test Engineer :	Aking Chang


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

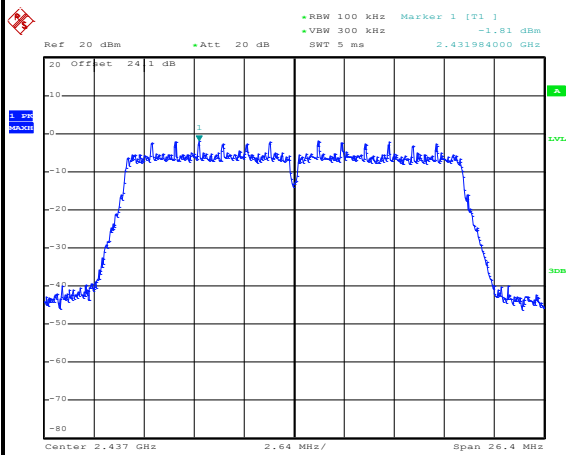


Date: 17.JUL.2016 10:50:04

Spurious Emission 30MHz~3GHz

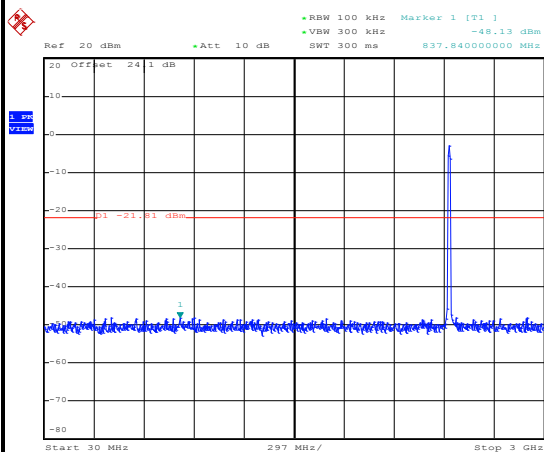

Date: 17.JUL.2016 10:50:15

Spurious Emission 2GHz~25GHz

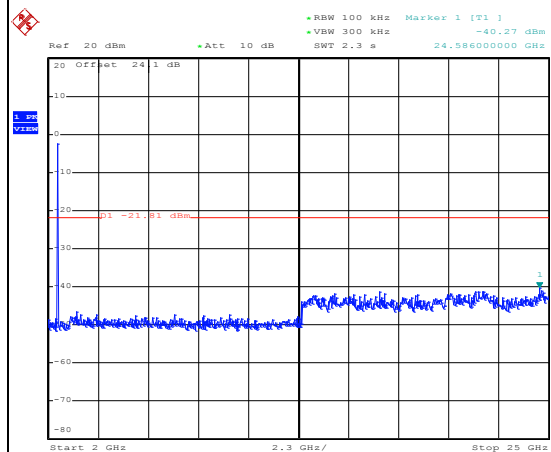


Date: 17.JUL.2016 10:50:23



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	45~49%
Test Channel :	11	Test Engineer :	Aking Chang


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

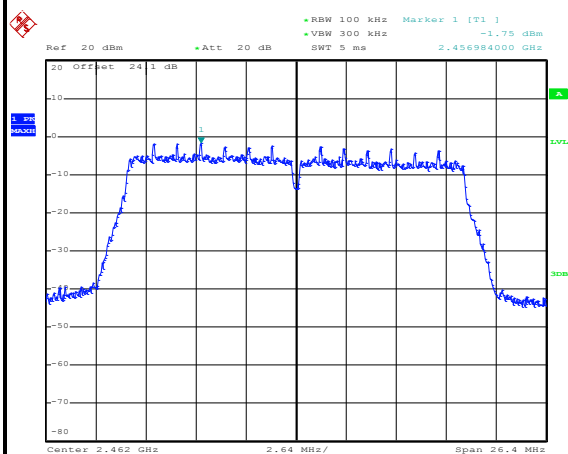


Date: 17.JUL.2016 10:55:35

High Channel Plot

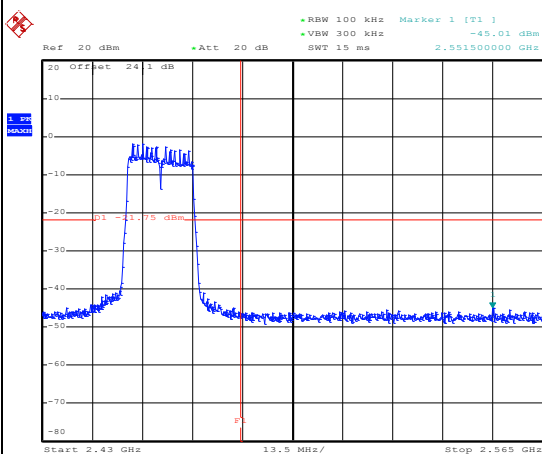


Date: 17.JUL.2016 10:56:18

Spurious Emission 30MHz~3GHz

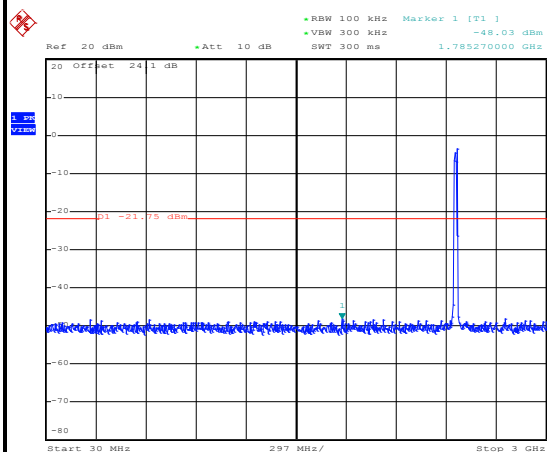

Date: 17.JUL.2016 10:56:39

Spurious Emission 2GHz~25GHz

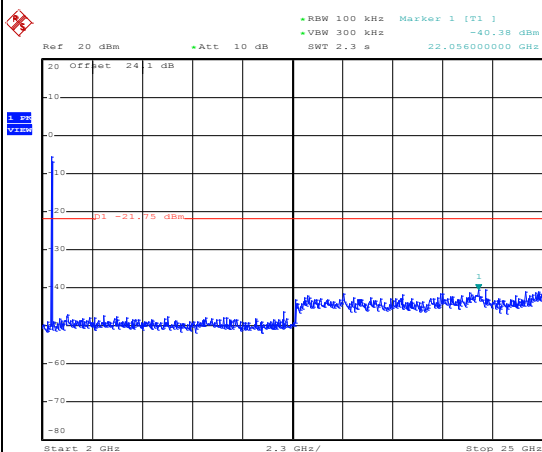


Date: 17.JUL.2016 10:56:48



Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	45~49%
Test Channel :	03	Test Engineer :	Aking Chang


WLAN 802.11n HT40 Channel 03

100kHz PSD reference Level

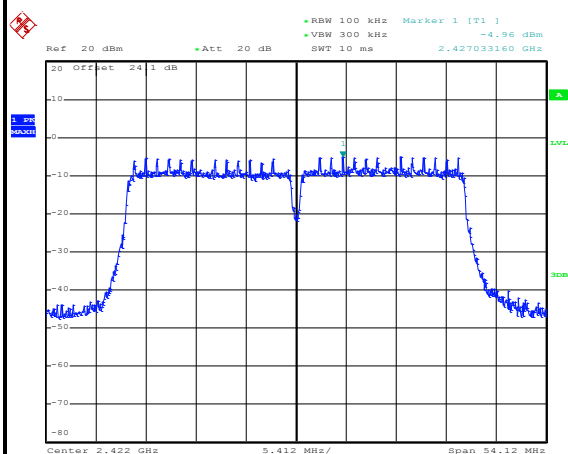


Date: 17.JUL.2016 11:04:02

Low Channel Plot

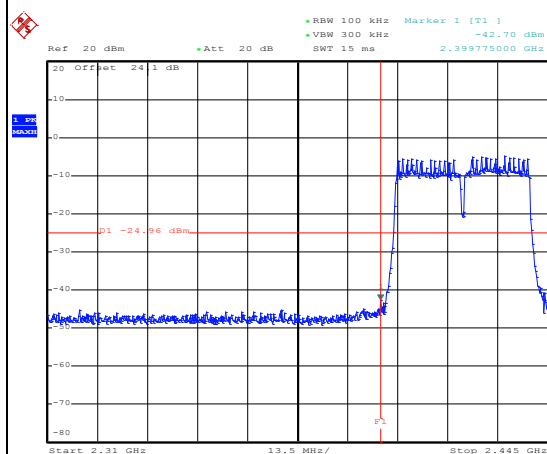


Date: 17.JUL.2016 11:04:29

Spurious Emission 30MHz~3GHz

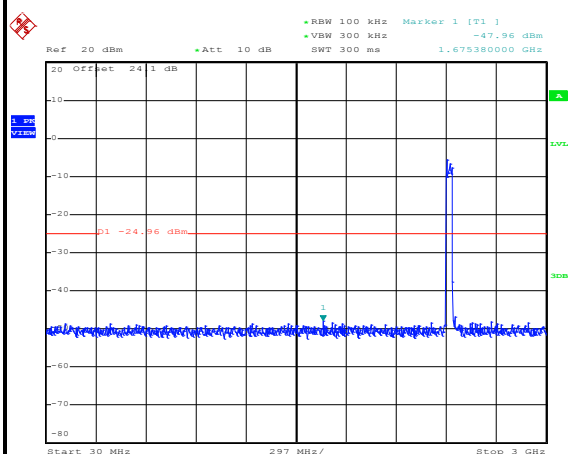

Date: 17.JUL.2016 11:04:43


Spurious Emission 2GHz~25GHz

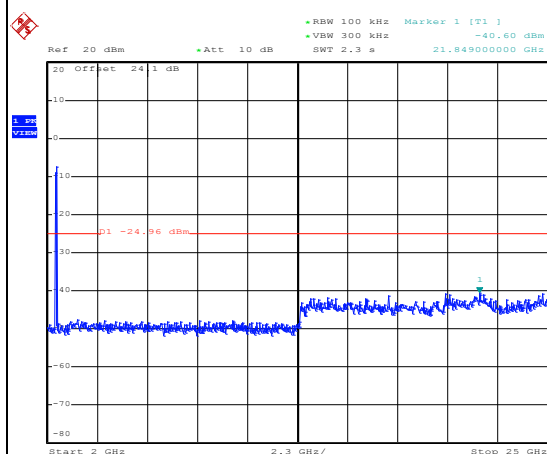


Date: 17.JUL.2016 11:04:52




Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	45~49%
Test Channel :	06	Test Engineer :	Aking Chang

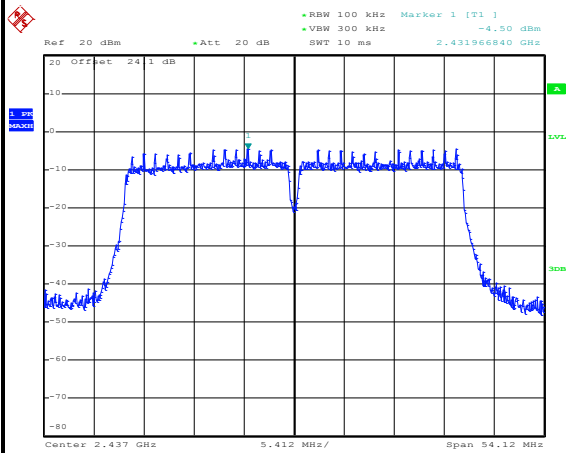WLAN 802.11n HT40 Channel 06**100kHz PSD reference Level**

Date: 17.JUL.2016 11:09:54

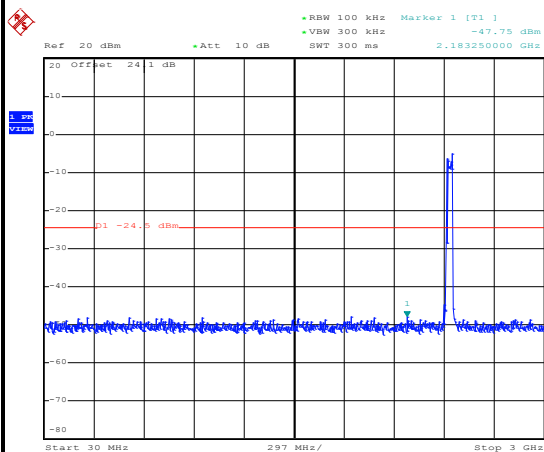Spurious Emission 30MHz~3GHz

Date: 17.JUL.2016 11:11:06

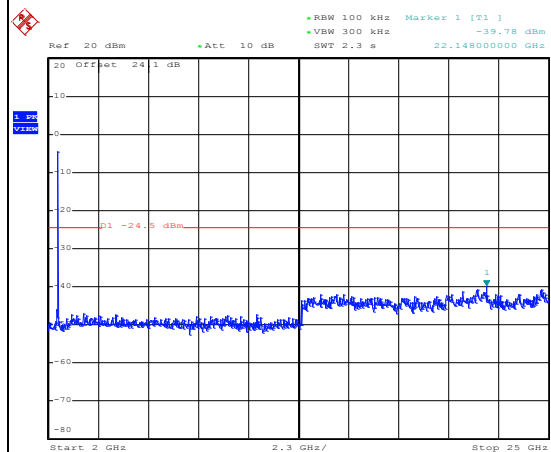Spurious Emission 2GHz~25GHz


Date: 17.JUL.2016 11:11:14



Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	45~49%
Test Channel :	09	Test Engineer :	Aking Chang


WLAN 802.11n HT40 Channel 09

100kHz PSD reference Level

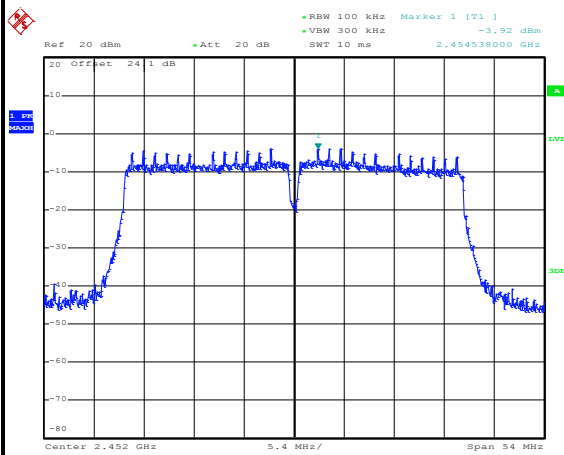


Date: 17.JUL.2016 11:16:28

High Channel Plot

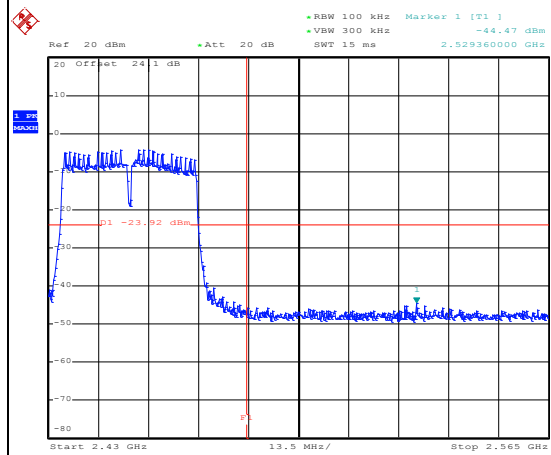


Date: 17.JUL.2016 11:16:56

Spurious Emission 30MHz~3GHz

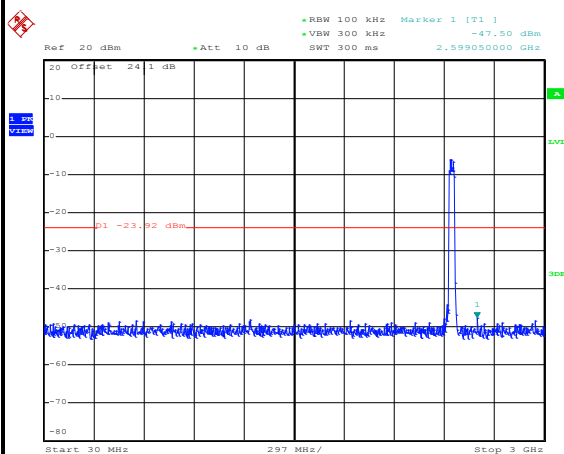

Date: 28.JUL.2016 22:56:18

Spurious Emission 2GHz~25GHz

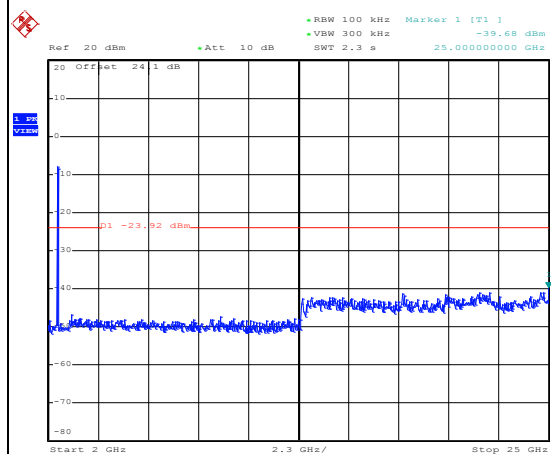

Date: 17.JUL.2016 11:17:19

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

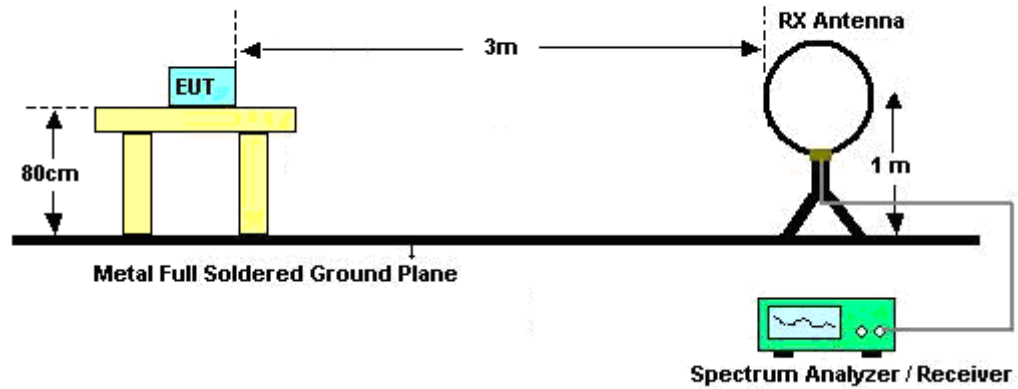

For radiated emissions from 30MHz to 1GHz

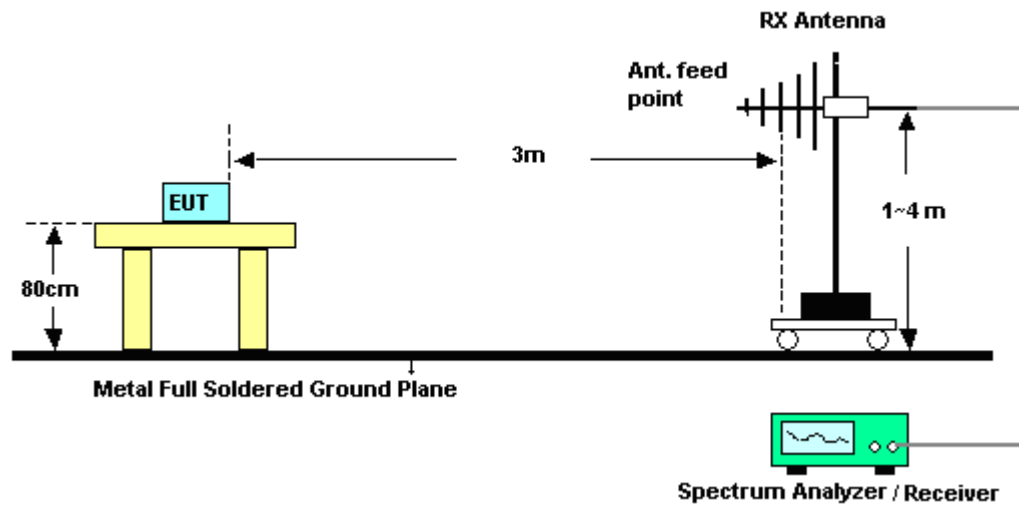

For radiated emissions above 1GHz

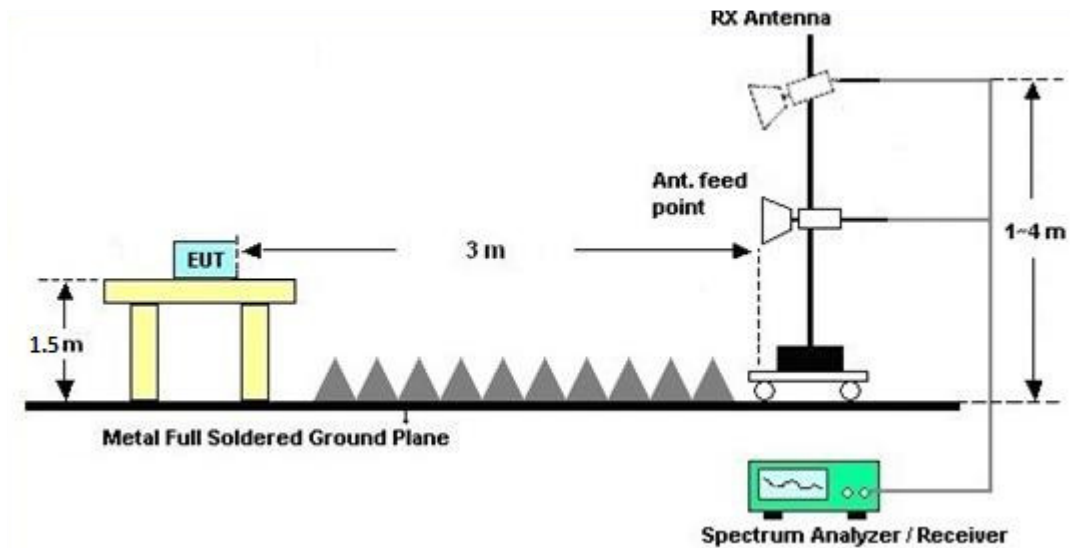

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


3.6.4 Test Setup

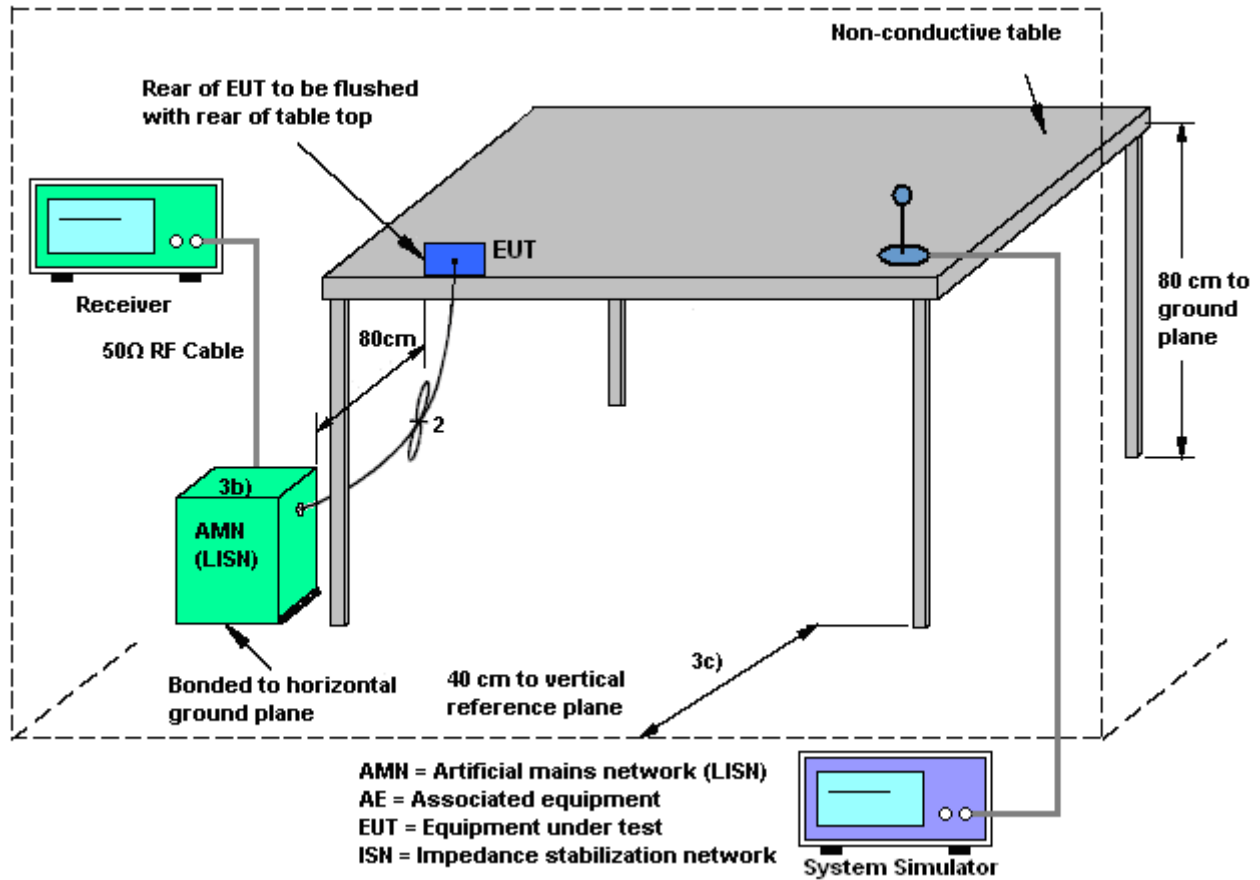



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Amos Mo	Relative Humidity :	44~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter 9V) + Earphone for Sample 1		

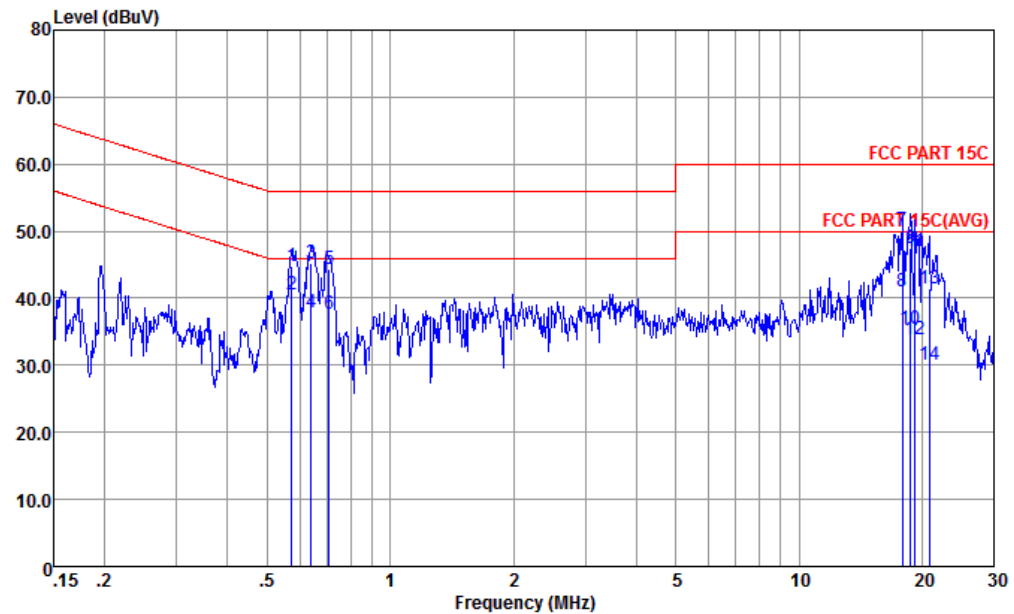


Site : CO01-KS
Condition : FCC PART 15C LISN-L-20151024 LINE

mode : Mode 1
: 358724070034734/358724070034833 #18

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.57	44.69	-11.31	56.00	34.30	0.23	10.16	QP
2 *	0.57	40.59	-5.41	46.00	30.20	0.23	10.16	Average
3	0.64	45.29	-10.71	56.00	34.89	0.24	10.16	QP
4	0.64	37.99	-8.01	46.00	27.59	0.24	10.16	Average
5	0.71	44.29	-11.71	56.00	33.90	0.24	10.15	QP
6	0.71	37.69	-8.31	46.00	27.30	0.24	10.15	Average
7	17.94	50.04	-9.96	60.00	39.30	0.27	10.47	QP
8	17.94	40.94	-9.06	50.00	30.20	0.27	10.47	Average
9	18.72	47.57	-12.43	60.00	36.80	0.27	10.50	QP
10	18.72	35.37	-14.63	50.00	24.60	0.27	10.50	Average
11	19.22	46.98	-13.02	60.00	36.20	0.27	10.51	QP
12	19.22	33.88	-16.12	50.00	23.10	0.27	10.51	Average
13	20.81	41.42	-18.58	60.00	30.60	0.26	10.56	QP
14	20.81	30.02	-19.98	50.00	19.20	0.26	10.56	Average



Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Amos Mo	Relative Humidity :	44~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter 9V) + Earphone for Sample 1		

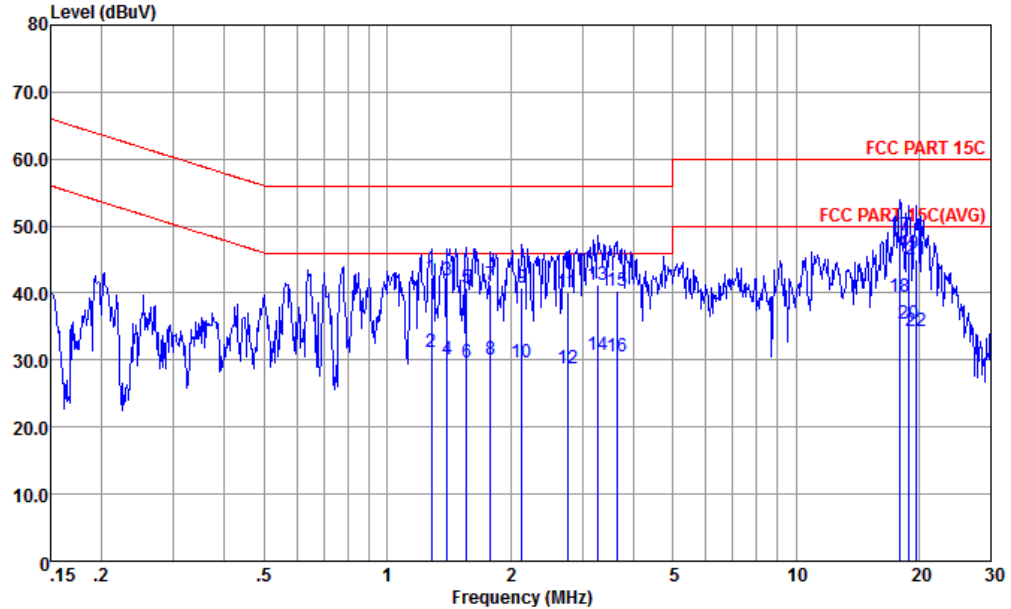

Site : CO01-KS
Condition : FCC PART 15C LISN-N-20151024 NEUTRAL
mode : Mode 1
: 358724070034734/358724070034833 #18

	Freq	Level	Over Limit	Limit	Read	LISN	Cable	
	MHz	dBUV		Line	Level	Factor	Loss	Remark
	MHz	dBUV		dBuV	dBuV			
1	1.28	42.41	-13.59	56.00	31.90	0.37	10.14	QP
2	1.28	31.11	-14.89	46.00	20.60	0.37	10.14	Average
3	1.40	41.81	-14.19	56.00	31.30	0.37	10.14	QP
4	1.40	30.11	-15.89	46.00	19.60	0.37	10.14	Average
5	1.56	40.82	-15.18	56.00	30.30	0.38	10.14	QP
6	1.56	29.72	-16.28	46.00	19.20	0.38	10.14	Average
7	1.79	41.12	-14.88	56.00	30.60	0.38	10.14	QP
8	1.79	30.12	-15.88	46.00	19.60	0.38	10.14	Average
9	2.13	40.82	-15.18	56.00	30.30	0.38	10.14	QP
10	2.13	29.72	-16.28	46.00	19.20	0.38	10.14	Average
11	2.76	40.12	-15.88	56.00	29.60	0.37	10.15	QP
12	2.76	28.72	-17.28	46.00	18.20	0.37	10.15	Average
13	3.28	41.13	-14.87	56.00	30.60	0.37	10.16	QP
14	3.28	30.83	-15.17	46.00	20.30	0.37	10.16	Average
15	3.64	40.33	-15.67	56.00	29.80	0.37	10.16	QP
16	3.64	30.63	-15.37	46.00	20.10	0.37	10.16	Average
17	17.94	48.63	-11.37	60.00	37.90	0.26	10.47	QP
18 *	17.94	39.33	-10.67	50.00	28.60	0.26	10.47	Average
19	18.82	45.95	-14.05	60.00	35.20	0.25	10.50	QP
20	18.82	35.35	-14.65	50.00	24.60	0.25	10.50	Average
21	19.74	44.98	-15.02	60.00	34.20	0.25	10.53	QP
22	19.74	34.38	-15.62	50.00	23.60	0.25	10.53	Average



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H2	41410069	N/A	Aug. 27, 2015	Jul. 14, 2016 ~ Jul. 28, 2016	Aug. 26, 2016	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	1132003	300MHz~40GHz	Aug. 12, 2015	Jul. 14, 2016 ~ Jul. 28, 2016	Aug. 11, 2016	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1126017	300MHz~40GHz	Aug. 12, 2015	Jul. 14, 2016 ~ Jul. 28, 2016	Aug. 11, 2016	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 23, 2015	Jul. 14, 2016 ~ Jul. 28, 2016	Nov. 22, 2016	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	GEO821763	N/A	Nov. 13, 2015	Jul. 14, 2016 ~ Jul. 28, 2016	Nov. 12, 2016	Conducted (TH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Jul. 14, 2016 ~ Jul. 20, 2016	Sep. 01, 2016	Radiation (03CH10-HY)
Amplifier	SONOMA	310N	187311	9kHz~1GHz	Nov. 16, 2015	Jul. 14, 2016 ~ Jul. 20, 2016	Nov. 15, 2016	Radiation (03CH10-HY)
Bilog Antenna	TESEQ	CBL 6111D	35413	30MHz~1GHz	Jan. 13, 2016	Jul. 14, 2016 ~ Jul. 20, 2016	Jan. 12, 2017	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1325	1GHz ~ 18GHz	Sep. 30, 2015	Jul. 14, 2016 ~ Jul. 20, 2016	Sep. 29, 2016	Radiation (03CH10-HY)
Preamplifier	Keysight	83017A	MY53270078	1GHz~26.5GHz	Nov. 13, 2015	Jul. 14, 2016 ~ Jul. 20, 2016	Nov. 12, 2016	Radiation (03CH10-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1902246	1GHz~18GHz	Nov. 16, 2015	Jul. 14, 2016 ~ Jul. 20, 2016	Nov. 15, 2016	Radiation (03CH10-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200485	10Hz ~ 44GHz	Oct. 15, 2015	Jul. 14, 2016 ~ Jul. 20, 2016	Oct. 14, 2016	Radiation (03CH10-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jul. 14, 2016 ~ Jul. 20, 2016	N/A	Radiation (03CH10-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jul. 14, 2016 ~ Jul. 20, 2016	N/A	Radiation (03CH10-HY)
Turn Table	EMEC	TT 2200	N/A	0~360 Degree	N/A	Jul. 14, 2016 ~ Jul. 20, 2016	N/A	Radiation (03CH10-HY)
Preamplifier	MITEQ	JS44-1800400 0-33-8P	1840917	18GHz ~ 40GHz	Jun. 14, 2016	Jul. 14, 2016 ~ Jul. 20, 2016	Jun. 13, 2017	Radiation (03CH10-HY)
EMI Test Receiver	Agilent	N9038A (MXE)	MY53290053	20Hz to 26.5GHz	Jan. 20, 2016	Jul. 14, 2016 ~ Jul. 20, 2016	Jan. 19, 2017	Radiation (03CH10-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917058 4	18GHz- 40GHz	Nov. 02, 2015	Jul. 14, 2016 ~ Jul. 20, 2016	Nov. 01, 2016	Radiation (03CH10-HY)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Sep. 10, 2015	Jul. 10, 2016	Sep. 09, 2016	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 24, 2015	Jul. 10, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 24, 2015	Jul. 10, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 24, 2015	Jul. 10, 2016	Oct. 23, 2016	Conduction (CO01-KS)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5dB
---	-------

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.9dB
---	-------



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Aking Chang	Temperature:	24~26	°C
Test Date:	2016/7/14~2016/7/28	Relative Humidity:	45~49	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	14.40	10.08	0.50	Pass
11b	1Mbps	1	6	2437	14.50	10.08	0.50	Pass
11b	1Mbps	1	11	2462	14.55	10.04	0.50	Pass
11g	6Mbps	1	1	2412	17.70	16.36	0.50	Pass
11g	6Mbps	1	6	2437	17.80	16.44	0.50	Pass
11g	6Mbps	1	11	2462	17.85	16.36	0.50	Pass
HT20	MCS0	1	1	2412	18.40	17.60	0.50	Pass
HT20	MCS0	1	6	2437	18.50	17.60	0.50	Pass
HT20	MCS0	1	11	2462	18.55	17.60	0.50	Pass
HT40	MCS0	1	3	2422	36.60	36.08	0.50	Pass
HT40	MCS0	1	6	2437	36.60	36.08	0.50	Pass
HT40	MCS0	1	9	2452	36.50	36.00	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	12.65	30.00	1.97	14.62	36.00	Pass
11b	1Mbps	1	6	2437	13.33	30.00	1.97	15.30	36.00	Pass
11b	1Mbps	1	11	2462	13.05	30.00	1.97	15.02	36.00	Pass
11g	6Mbps	1	1	2412	19.00	30.00	1.97	20.97	36.00	Pass
11g	6Mbps	1	6	2437	19.67	30.00	1.97	21.64	36.00	Pass
11g	6Mbps	1	11	2462	19.17	30.00	1.97	21.14	36.00	Pass
HT20	MCS0	1	1	2412	19.05	30.00	1.97	21.02	36.00	Pass
HT20	MCS0	1	6	2437	19.91	30.00	1.97	21.88	36.00	Pass
HT20	MCS0	1	11	2462	19.51	30.00	1.97	21.48	36.00	Pass
HT40	MCS0	1	3	2422	20.91	30.00	1.97	22.88	36.00	Pass
HT40	MCS0	1	6	2437	21.03	30.00	1.97	23.00	36.00	Pass
HT40	MCS0	1	9	2452	20.81	30.00	1.97	22.78	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.00	10.67
11b	1Mbps	1	6	2437	0.00	11.33
11b	1Mbps	1	11	2462	0.00	11.06
11g	6Mbps	1	1	2412	0.15	8.62
11g	6Mbps	1	6	2437	0.15	9.47
11g	6Mbps	1	11	2462	0.15	9.38
HT20	MCS0	1	1	2412	0.16	8.62
HT20	MCS0	1	6	2437	0.16	9.50
HT20	MCS0	1	11	2462	0.16	9.40
HT40	MCS0	1	3	2422	0.28	9.72
HT40	MCS0	1	6	2437	0.28	10.10
HT40	MCS0	1	9	2452	0.28	10.02

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-12.65	1.97	8.00	Pass
11b	1Mbps	1	6	2437	-12.36	1.97	8.00	Pass
11b	1Mbps	1	11	2462	-12.21	1.97	8.00	Pass
11g	6Mbps	1	1	2412	-16.96	1.97	8.00	Pass
11g	6Mbps	1	6	2437	-14.52	1.97	8.00	Pass
11g	6Mbps	1	11	2462	-15.82	1.97	8.00	Pass
HT20	MCS0	1	1	2412	-17.24	1.97	8.00	Pass
HT20	MCS0	1	6	2437	-15.62	1.97	8.00	Pass
HT20	MCS0	1	11	2462	-16.14	1.97	8.00	Pass
HT40	MCS0	1	3	2422	-19.69	1.97	8.00	Pass
HT40	MCS0	1	6	2437	-19.08	1.97	8.00	Pass
HT40	MCS0	1	9	2452	-18.05	1.97	8.00	Pass



Appendix B. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		2344.125	50.92	-23.08	74	51.74	27.1	5.33	33.25	127	34	P	H
		2389.905	40.18	-13.82	54	40.78	27.23	5.39	33.22	127	34	A	H
		2412	102.27	-	-	102.79	27.28	5.42	33.22	127	34	P	H
		2412	99.15	-	-	99.67	27.28	5.42	33.22	127	34	A	H
		2343.39	51.05	-22.95	74	51.87	27.1	5.33	33.25	345	104	P	V
		2389.8	40.14	-13.86	54	40.74	27.23	5.39	33.22	345	104	A	V
		2412	97.02	-	-	97.54	27.28	5.42	33.22	345	104	P	V
		2412	93.73	-	-	94.25	27.28	5.42	33.22	345	104	A	V
802.11b CH 06 2437MHz		2312.24	51.13	-22.87	74	52.13	27.01	5.27	33.28	147	358	P	H
		2389.94	40.17	-13.83	54	40.77	27.23	5.39	33.22	147	358	A	H
		2437	103.06	-	-	103.48	27.37	5.42	33.21	147	358	P	H
		2437	99.88	-	-	100.3	27.37	5.42	33.21	147	358	A	H
		2492.86	50.76	-23.24	74	50.97	27.5	5.46	33.17	147	358	P	H
		2485.72	41.12	-12.88	54	41.38	27.46	5.46	33.18	147	358	A	H
		2338	50.66	-23.34	74	51.49	27.1	5.33	33.26	387	106	P	V
		2389.94	40.13	-13.87	54	40.73	27.23	5.39	33.22	387	106	A	V
		2437	98.37	-	-	98.79	27.37	5.42	33.21	387	106	P	V
		2437	95.07	-	-	95.49	27.37	5.42	33.21	387	106	A	V
		2491.18	51.65	-22.35	74	51.87	27.5	5.46	33.18	387	106	P	V
		2485.65	40.59	-13.41	54	40.85	27.46	5.46	33.18	387	106	A	V



802.11b CH 11 2462MHz		2462	103.63	-	-	103.98	27.41	5.44	33.2	147	356	P	H
		2462	100.31	-	-	100.66	27.41	5.44	33.2	147	356	A	H
		2487.76	52.01	-21.99	74	52.23	27.5	5.46	33.18	147	356	P	H
		2483.6	40.94	-13.06	54	41.2	27.46	5.46	33.18	147	356	A	H
		2462	98.39	-	-	98.74	27.41	5.44	33.2	371	107	P	V
		2462	95.14	-	-	95.49	27.41	5.44	33.2	371	107	A	V
		2499.96	51.12	-22.88	74	51.33	27.5	5.46	33.17	371	107	P	V
		2483.88	40.55	-13.45	54	40.81	27.46	5.46	33.18	371	107	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	37.31	-36.69	74	54.81	31.46	7.58	56.54	100	0	P	H
		4824	37.23	-36.77	74	54.73	31.46	7.58	56.54	100	0	P	V
802.11b CH 06 2437MHz		4874	36.76	-37.24	74	53.97	31.56	7.7	56.47	100	0	P	H
		7311	40.41	-33.59	74	51.94	36.18	9.49	57.2	100	0	P	H
		4874	35.94	-38.06	74	53.15	31.56	7.7	56.47	100	0	P	V
		7309	42.31	-31.69	74	53.84	36.18	9.49	57.2	100	0	P	V
802.11b CH 11 2462MHz		4924	40.61	-33.39	74	52.15	31.66	7.93	51.13	100	0	P	H
		7386	43.18	-30.82	74	48.08	36.37	9.53	50.8	100	0	P	H
		4924	39.04	-34.96	74	50.58	31.66	7.93	51.13	100	0	P	V
		7386	44.13	-29.87	74	49.03	36.37	9.53	50.8	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2366.91	50.9	-23.1	74	51.61	27.14	5.39	33.24	154	31	P	H
		2390	41.23	-12.77	54	41.83	27.23	5.39	33.22	154	31	A	H
		2414	102.52	-	-	103.04	27.28	5.42	33.22	154	31	P	H
		2414	94.95	-	-	95.47	27.28	5.42	33.22	154	31	A	H
		2359.035	51.52	-22.48	74	52.3	27.14	5.33	33.25	346	100	P	V
		2386.23	41	-13	54	41.62	27.23	5.39	33.24	346	100	A	V
		2414	96.38	-	-	96.9	27.28	5.42	33.22	346	100	P	V
		2414	88.9	-	-	89.42	27.28	5.42	33.22	346	100	A	V
802.11g CH 06 2437MHz		2381.54	51.24	-22.76	74	51.9	27.19	5.39	33.24	178	359	P	H
		2388.82	40.94	-13.06	54	41.56	27.23	5.39	33.24	178	359	A	H
		2435	105.33	-	-	105.8	27.32	5.42	33.21	178	359	P	H
		2435	96.7	-	-	97.17	27.32	5.42	33.21	178	359	A	H
		2487.47	51.98	-22.02	74	52.24	27.46	5.46	33.18	178	359	P	H
		2485.51	42.56	-11.44	54	42.82	27.46	5.46	33.18	178	359	A	H
		2362.22	50.96	-23.04	74	51.74	27.14	5.33	33.25	384	108	P	V
		2384.62	41	-13	54	41.66	27.19	5.39	33.24	384	108	A	V
		2435	99.34	-	-	99.81	27.32	5.42	33.21	384	108	P	V
		2435	92.02	-	-	92.49	27.32	5.42	33.21	384	108	A	V
		2486.7	51	-23	74	51.26	27.46	5.46	33.18	384	108	P	V
		2485.51	41.6	-12.4	54	41.86	27.46	5.46	33.18	384	108	A	V
802.11g CH 11 2462MHz		2462	105.07	-	-	105.42	27.41	5.44	33.2	203	356	P	H
		2462	97.55	-	-	97.9	27.41	5.44	33.2	203	356	A	H
		2484.36	52.42	-21.58	74	52.68	27.46	5.46	33.18	203	356	P	H
		2483.68	42.63	-11.37	54	42.89	27.46	5.46	33.18	203	356	A	H
		2462	99.44	-	-	99.79	27.41	5.44	33.2	375	107	P	V
		2462	91.57	-	-	91.92	27.41	5.44	33.2	375	107	A	V
		2495.6	51.35	-22.65	74	51.56	27.5	5.46	33.17	375	107	P	V
		2485.16	41.74	-12.26	54	42	27.46	5.46	33.18	375	107	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	37.84	-36.16	74	49.98	31.46	7.58	51.18	100	0	P	H
		4824	37.57	-36.43	74	49.71	31.46	7.58	51.18	100	0	P	V
802.11g CH 06 2437MHz		4874	37.5	-36.5	74	49.39	31.56	7.7	51.15	100	0	P	H
		7311	43.68	-30.32	74	48.81	36.18	9.49	50.8	100	0	P	H
		4874	37.68	-36.32	74	49.57	31.56	7.7	51.15	100	0	P	V
		7311	44.43	-29.57	74	49.56	36.18	9.49	50.8	100	0	P	V
802.11g CH 11 2462MHz		4924	37.76	-36.24	74	49.3	31.66	7.93	51.13	100	0	P	H
		7386	43.38	-30.62	74	48.28	36.37	9.53	50.8	100	0	P	H
		4924	38.09	-35.91	74	49.63	31.66	7.93	51.13	100	0	P	V
		7386	43.97	-30.03	74	48.87	36.37	9.53	50.8	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2378.88	50.73	-23.27	74	51.39	27.19	5.39	33.24	152	32	P	H
		2389.905	41.15	-12.85	54	41.75	27.23	5.39	33.22	152	32	A	H
		2412	102.62	-	-	103.14	27.28	5.42	33.22	152	32	P	H
		2412	95	-	-	95.52	27.28	5.42	33.22	152	32	A	H
		2359.875	51.03	-22.97	74	51.81	27.14	5.33	33.25	393	108	P	V
		2389.905	41.05	-12.95	54	41.65	27.23	5.39	33.22	393	108	A	V
		2412	95.94	-	-	96.46	27.28	5.42	33.22	393	108	P	V
		2412	88.3	-	-	88.82	27.28	5.42	33.22	393	108	A	V
802.11n HT20 CH 06 2437MHz		2351.3	50.41	-23.59	74	51.23	27.1	5.33	33.25	151	33	P	H
		2389.24	41.17	-12.83	54	41.79	27.23	5.39	33.24	151	33	A	H
		2437	104.24	-	-	104.66	27.37	5.42	33.21	151	33	P	H
		2437	96.59	-	-	97.01	27.37	5.42	33.21	151	33	A	H
		2484.11	51.71	-22.29	74	51.97	27.46	5.46	33.18	151	33	P	H
		2485.58	42.68	-11.32	54	42.94	27.46	5.46	33.18	151	33	A	H
		2359	51.79	-22.21	74	52.57	27.14	5.33	33.25	387	106	P	V
		2359.14	40.83	-13.17	54	41.61	27.14	5.33	33.25	387	106	A	V
		2437	99.54	-	-	99.96	27.37	5.42	33.21	387	106	P	V
		2437	91.94	-	-	92.36	27.37	5.42	33.21	387	106	A	V
		2485.72	51.48	-22.52	74	51.74	27.46	5.46	33.18	387	106	P	V
		2484.46	41.58	-12.42	54	41.84	27.46	5.46	33.18	387	106	A	V
802.11n HT20 CH 11 2462MHz		2462	104.27	-	-	104.62	27.41	5.44	33.2	118	33	P	H
		2462	96.9	-	-	97.25	27.41	5.44	33.2	118	33	A	H
		2486.56	51.52	-22.48	74	51.78	27.46	5.46	33.18	118	33	P	H
		2485.64	42.97	-11.03	54	43.23	27.46	5.46	33.18	118	33	A	H
		2462	98.76	-	-	99.11	27.41	5.44	33.2	378	107	P	V
		2462	91.23	-	-	91.58	27.41	5.44	33.2	378	107	A	V
		2487.12	51.2	-22.8	74	51.46	27.46	5.46	33.18	378	107	P	V
		2486.2	41.61	-12.39	54	41.87	27.46	5.46	33.18	378	107	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	38.46	-35.54	74	50.6	31.46	7.58	51.18	100	0	P	H
		4824	38.11	-35.89	74	50.25	31.46	7.58	51.18	100	0	P	V
802.11n HT20 CH 06 2437MHz		4874	36.38	-37.62	74	48.27	31.56	7.7	51.15	100	0	P	H
		7311	42.6	-31.4	74	47.73	36.18	9.49	50.8	100	0	P	H
		4874	37.9	-36.1	74	49.79	31.56	7.7	51.15	100	0	P	V
		7311	43.7	-30.3	74	48.83	36.18	9.49	50.8	100	0	P	V
802.11n HT20 CH 11 2462MHz		4924	37.64	-36.36	74	49.18	31.66	7.93	51.13	100	0	P	H
		7386	43.97	-30.03	74	48.87	36.37	9.53	50.8	100	0	P	H
		4924	37.66	-36.34	74	49.2	31.66	7.93	51.13	100	0	P	V
		7386	43.26	-30.74	74	48.16	36.37	9.53	50.8	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		2337.86	51.27	-22.73	74	52.1	27.1	5.33	33.26	108	33	P	H
		2389.24	42.16	-11.84	54	42.78	27.23	5.39	33.24	108	33	A	H
		2422	102.21	-	-	102.68	27.32	5.42	33.21	108	33	P	H
		2422	94.75	-	-	95.22	27.32	5.42	33.21	108	33	A	H
		2487.05	50.95	-23.05	74	51.21	27.46	5.46	33.18	108	33	P	H
		2486.35	42.83	-11.17	54	43.09	27.46	5.46	33.18	108	33	A	H
		2387	51.63	-22.37	74	52.25	27.23	5.39	33.24	386	108	P	V
		2370.76	41.6	-12.4	54	42.26	27.19	5.39	33.24	386	108	A	V
		2422	96.81	-	-	97.28	27.32	5.42	33.21	386	108	P	V
		2422	89.35	-	-	89.82	27.32	5.42	33.21	386	108	A	V
		2494.68	50.67	-23.33	74	50.88	27.5	5.46	33.17	386	108	P	V
		2496.64	42.37	-11.63	54	42.58	27.5	5.46	33.17	386	108	A	V
802.11n HT40 CH 06 2437MHz		2360.4	51.32	-22.68	74	52.1	27.14	5.33	33.25	116	33	P	H
		2387.84	41.83	-12.17	54	42.45	27.23	5.39	33.24	116	33	A	H
		2437	101.49	-	-	101.91	27.37	5.42	33.21	116	33	P	H
		2437	94.21	-	-	94.63	27.37	5.42	33.21	116	33	A	H
		2483.62	53.32	-20.68	74	53.58	27.46	5.46	33.18	116	33	P	H
		2485.65	42.98	-11.02	54	43.24	27.46	5.46	33.18	116	33	A	H
		2352.56	50.85	-23.15	74	51.63	27.14	5.33	33.25	386	109	P	V
		2368.38	41.75	-12.25	54	42.46	27.14	5.39	33.24	386	109	A	V
		2437	96.3	-	-	96.72	27.37	5.42	33.21	386	109	P	V
		2437	89.04	-	-	89.46	27.37	5.42	33.21	386	109	A	V
		2493.28	51.23	-22.77	74	51.44	27.5	5.46	33.17	386	109	P	V
		2487.19	42.07	-11.93	54	42.33	27.46	5.46	33.18	386	109	A	V



802.11n HT40 CH 09 2452MHz		2358.16	50.93	-23.07	74	51.71	27.14	5.33	33.25	117	33	P	H
		2376.5	41.99	-12.01	54	42.65	27.19	5.39	33.24	117	33	A	H
		2452	103.14	-	-	103.53	27.37	5.44	33.2	117	33	P	H
		2452	95.6	-	-	95.99	27.37	5.44	33.2	117	33	A	H
		2485.09	58.77	-15.23	74	59.03	27.46	5.46	33.18	117	33	P	H
		2483.55	45.22	-8.78	54	45.48	27.46	5.46	33.18	117	33	A	H
		2378.88	51.84	-22.16	74	52.5	27.19	5.39	33.24	377	110	P	V
		2360.96	41.85	-12.15	54	42.63	27.14	5.33	33.25	377	110	A	V
		2452	97.37	-	-	97.76	27.37	5.44	33.2	377	110	P	V
		2452	90.32	-	-	90.71	27.37	5.44	33.2	377	110	A	V
		2485.02	54.12	-19.88	74	54.38	27.46	5.46	33.18	377	110	P	V
		2484.46	43.2	-10.8	54	43.46	27.46	5.46	33.18	377	110	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		4844	37.72	-36.28	74	49.69	31.49	7.7	51.16	100	0	P	H
		7266	43.37	-30.63	74	48.6	36.11	9.46	50.8	100	0	P	H
		4844	38.04	-35.96	74	50.01	31.49	7.7	51.16	100	0	P	V
		7266	43.22	-30.78	74	48.45	36.11	9.46	50.8	100	0	P	V
802.11n HT40 CH 06 2437MHz		4874	36.98	-37.02	74	48.87	31.56	7.7	51.15	100	0	P	H
		7311	42.82	-31.18	74	47.95	36.18	9.49	50.8	100	0	P	H
		4874	36.98	-37.02	74	48.87	31.56	7.7	51.15	100	0	P	V
		7311	43.77	-30.23	74	48.9	36.18	9.49	50.8	100	0	P	V
802.11n HT40 CH 09 2452MHz		4904	37.96	-36.04	74	49.66	31.63	7.82	51.15	100	0	P	H
		7356	43.29	-30.71	74	48.28	36.3	9.51	50.8	100	0	P	H
		4904	37.53	-36.47	74	49.23	31.63	7.82	51.15	100	0	P	V
		7356	45.06	-28.94	74	50.05	36.3	9.51	50.8	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11n HT40 (LF)

WIFI	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
2.4GHz 802.11n HT40 LF		30	23.23	-16.77	40	29.3	26.1	0.65	32.82	-	-	P	H
		62.4	23.66	-16.34	40	43.35	12.12	0.93	32.74	-	-	P	H
		94.8	20.47	-23.03	43.5	36.23	15.75	1.14	32.65	-	-	P	H
		607.3	25.98	-20.02	46	30.82	25.57	2.62	33.03	-	-	P	H
		744.5	30.33	-15.67	46	32.98	27.38	2.91	32.94	-	-	P	H
		946.8	32.33	-13.67	46	30.91	29.92	3.29	31.79	100	57	P	H
		34.86	30.64	-9.36	40	39.5	23.3	0.65	32.81	100	87	P	V
		69.69	22.34	-17.66	40	41.53	12.6	0.93	32.72	-	-	P	V
		122.88	24.32	-19.18	43.5	37.97	17.86	1.14	32.65	-	-	P	V
		682.9	27.73	-18.27	46	31.86	26.2	2.67	33	-	-	P	V
		818	29.72	-16.28	46	31.25	28.18	3.07	32.78	-	-	P	V
		940.5	31.79	-14.21	46	30.6	29.77	3.29	31.87	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11b	100.00	-	-	10Hz
802.11g	96.67	1390.00	0.72	1kHz
2.4GHz 802.11n HT20	96.30	1300.00	0.77	1kHz
2.4GHz 802.11n HT40	93.86	642.00	1.56	3kHz


802.11b

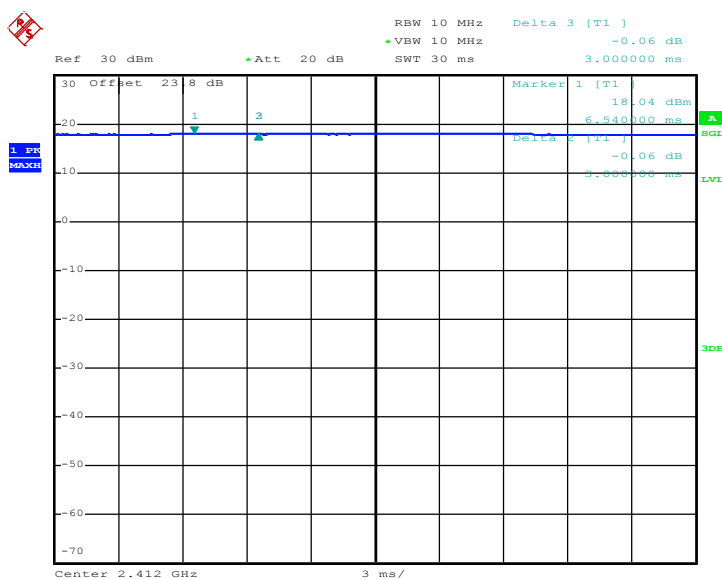

Date: 14.JUL.2016 20:16:13




802.11g

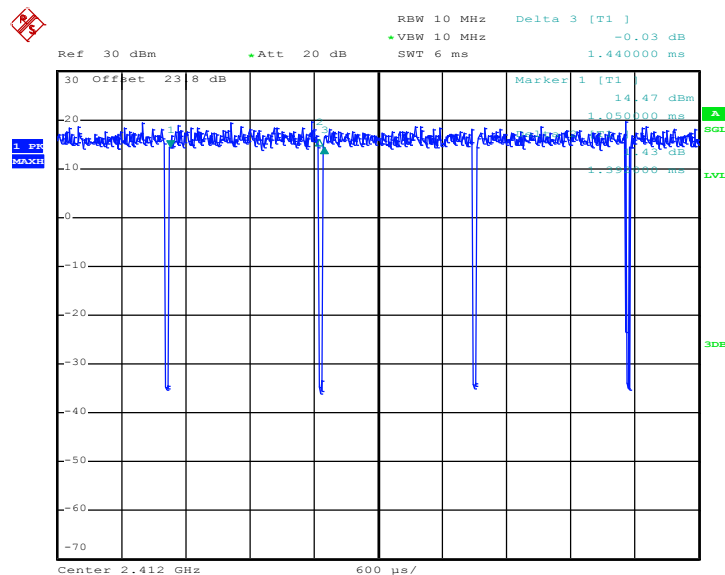


Date: 14.JUL.2016 20:18:14

2.4GHz 802.11n HT20

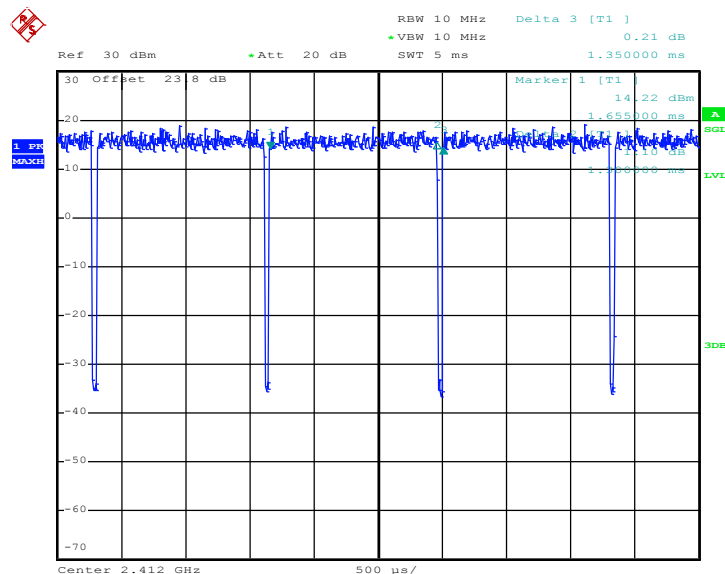

Date: 14.JUL.2016 20:19:37

2.4GHz 802.11n HT40

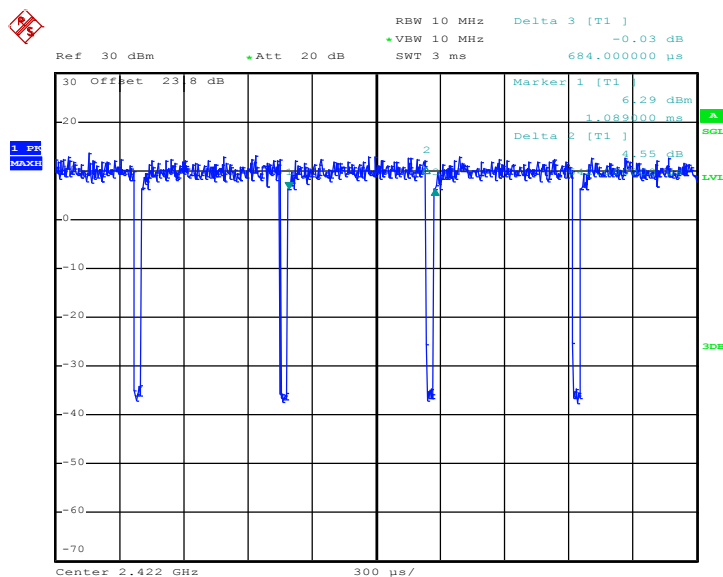

Date: 14.JUL.2016 20:21:00