



# FCC RF Test Report

**APPLICANT** : Acer Incorporated  
**EQUIPMENT** : Smart HandHeld  
**BRAND NAME** : Acer  
**MODEL NAME** : T03  
**MARKETING NAME** : Liquid Z630  
**FCC ID** : HLZDMZ630  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on Jun. 03, 2015 and testing was completed on Jul. 14, 2015. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test ..... 5

    1.4 Product Specification subjective to this standard ..... 5

    1.5 Modification of EUT ..... 6

    1.6 Testing Location ..... 6

    1.7 Applicable Standards ..... 6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 7**

    2.1 Carrier Frequency Channel ..... 7

    2.2 Pre-Scanned RF Power ..... 8

    2.3 Test Mode ..... 9

    2.4 Connection Diagram of Test System ..... 10

    2.5 Support Unit used in test configuration and system ..... 11

    2.6 EUT Operation Test Setup ..... 11

    2.7 Measurement Results Explanation Example ..... 11

**3 TEST RESULT ..... 12**

    3.1 6dB and 99% Bandwidth Measurement ..... 12

    3.2 Output Power Measurement ..... 14

    3.3 Power Spectral Density Measurement ..... 16

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 18

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 31

    3.6 AC Conducted Emission Measurement ..... 35

    3.7 Antenna Requirements ..... 39

**4 LIST OF MEASURING EQUIPMENT ..... 40**

**5 UNCERTAINTY OF EVALUATION ..... 41**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. RADIATED TEST RESULTS**

**APPENDIX C. SETUP PHOTOGRAPHS**



**SUMMARY OF TEST RESULT**

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	RSS-247 5.2(1)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	RSS-Gen 6.6	99% Bandwidth	-	Pass	-
3.2	15.247(b)	RSS-247 A5.4(4)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	RSS-247 5.2(2)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	RSS-247 5.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	RSS-247 5.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 17.76 dB at 78.500 MHz
3.6	15.207	RSS-GEN 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit 8.82 dB at 0.420 MHz
3.7	15.203 & 15.247(b)	N/A	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

Acer Incorporated

8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22181, Taiwan (R.O.C)

## 1.2 Manufacturer

Shanghai Sunrise Simcom Limited

No.888,Shengli Rd.,Qingpu,Shanghai, P.R.China 201700

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart HandHeld
Brand Name	Acer
Model Name	T03
Marketing Name	Liquid Z630
FCC ID	HLZDMZ630
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
IMEI Code	Conducted: 352784070000438/352784070001857 Conduction: 352784070000388/352784070001808 Radiation: 352784070000370/352784070001790
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 13.37 dBm (0.02173 W) 802.11g : 19.37 dBm (0.08650 W) 802.11n HT20 : 18.36 dBm (0.06855 W) 802.11n HT40 : 19.51 dBm (0.08933 W)
99% Occupied Bandwidth	802.11b : 14.54MHz 802.11g : 17.93MHz 802.11n HT20 : 18.48MHz 802.11n HT40 : 36.46MHz
Antenna Type	802.11b/g/n : IFA Antenna with gain 2.40 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.			
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC/IC Registration No.</b>
	TH01-KS	03CH02-KS	CO01-KS	418269/4086E

**Note:** The test site complies with ANSI C63.4 2009 requirement.

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
- ANSI C63.10-2013
- IC RSS-247 Issue 1
- IC RSS-Gen Issue 4

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b RF Output Power (dBm)						
Power vs. Channel			Power vs. Data Rate			
Channel	Frequency (MHz)	Data Rate	Channel	2Mbps	5.5Mbps	11Mbps
		1Mbps				
CH 01	2412 MHz	13.34	CH 06	13.09	13.18	13.28
CH 06	2437 MHz	13.37				
CH 11	2462 MHz	12.94				

2.4GHz 802.11g RF Output Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps								
CH 01	2412 MHz	19.37	CH 01	19.15	19.29	18.54	18.67	18.96	18.94	18.97
CH 06	2437 MHz	19.01								
CH 11	2462 MHz	18.19								

2.4GHz 802.11n HT20 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 01	2412 MHz	18.36	CH 01	17.57	17.52	17.87	17.96	17.48	18.35	17.63
CH 06	2437 MHz	18.09								
CH 11	2462 MHz	17.70								

2.4GHz 802.11n HT40 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 03	2422 MHz	19.51	CH 03	17.92	17.99	18.11	17.72	18.31	17.48	18.10
CH 06	2437 MHz	19.42								
CH 09	2452 MHz	19.33								





### 2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.


<2.4GHz>

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0


Test Cases	
<b>AC Conducted Emission</b>	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + Battery + USB Cable (Charging from Adapter)
<b>Remark:</b> For Radiated Test Cases, The tests were performance with Adapter, Battery, Earphone and USB Cable.	

## 2.4 Connection Diagram of Test System

<WLAN Tx Mode>

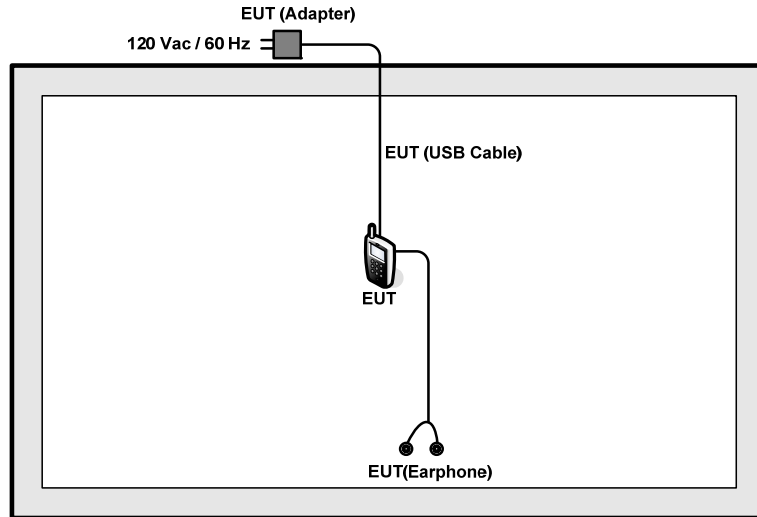

<AC Conducted Emission Mode>

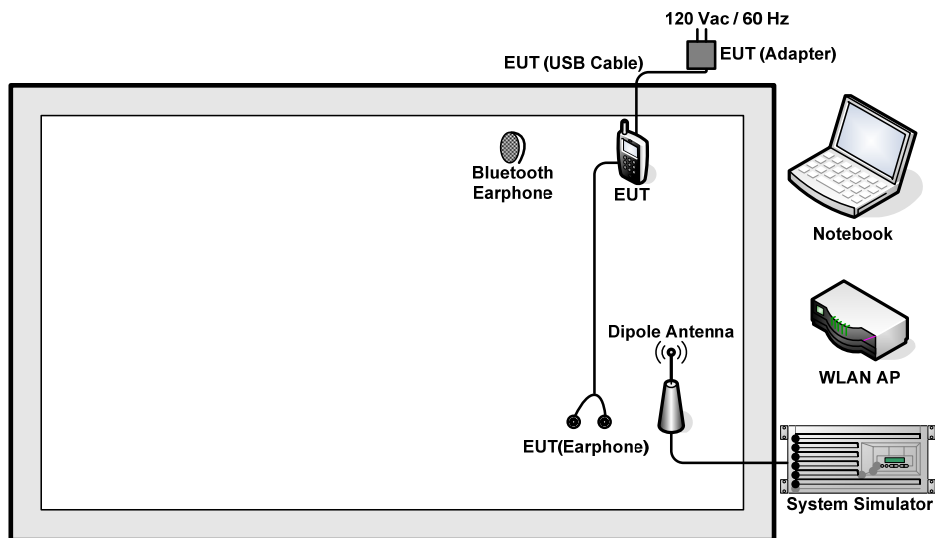

## 2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A

## 2.6 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.7 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 6 dB.

*Offset(dB) = RF cable loss(dB) = 6 (dB)*

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


##### 3.1.4 Test Setup





### 3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A of this test report.

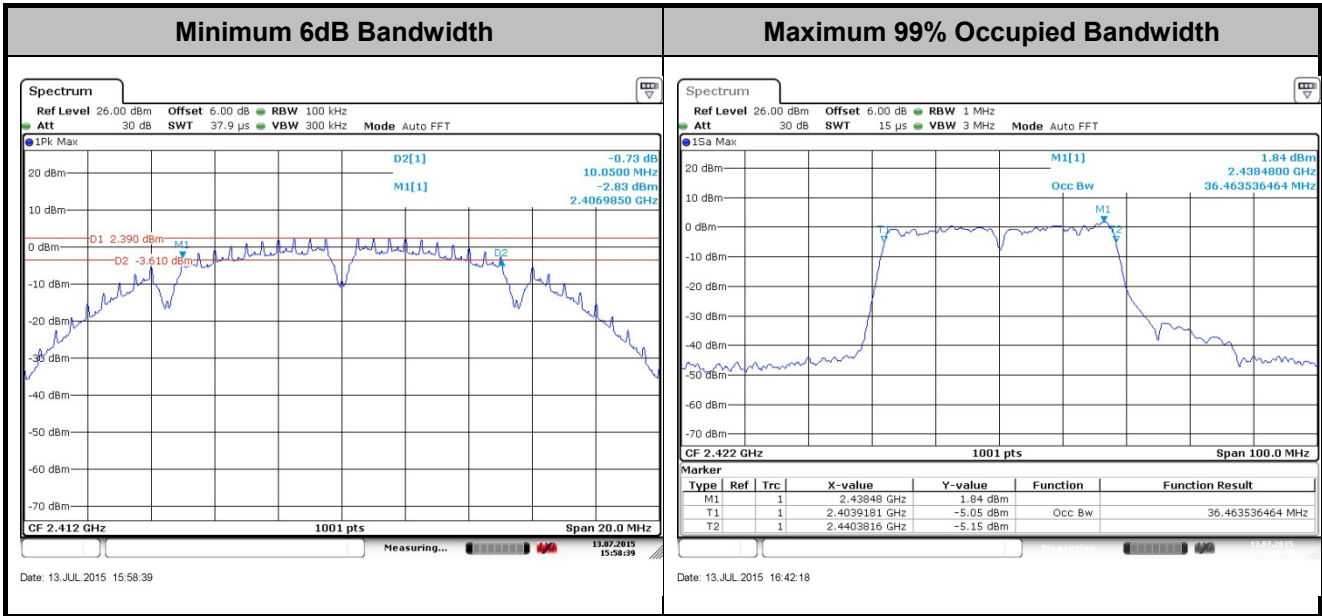

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r03 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

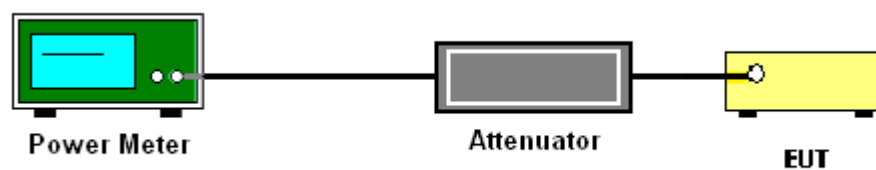



**3.2.5 Test Result of Peak Output Power**

Please refer to Appendix A of this test report.

**3.2.6 Test Result of Average output Power (Reporting Only)**

Please refer to Appendix A of this test report.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

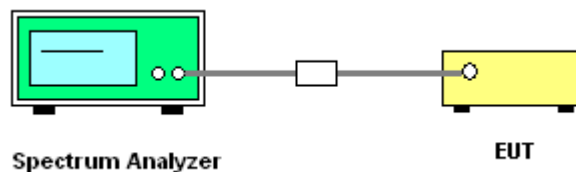






### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A of this test report.

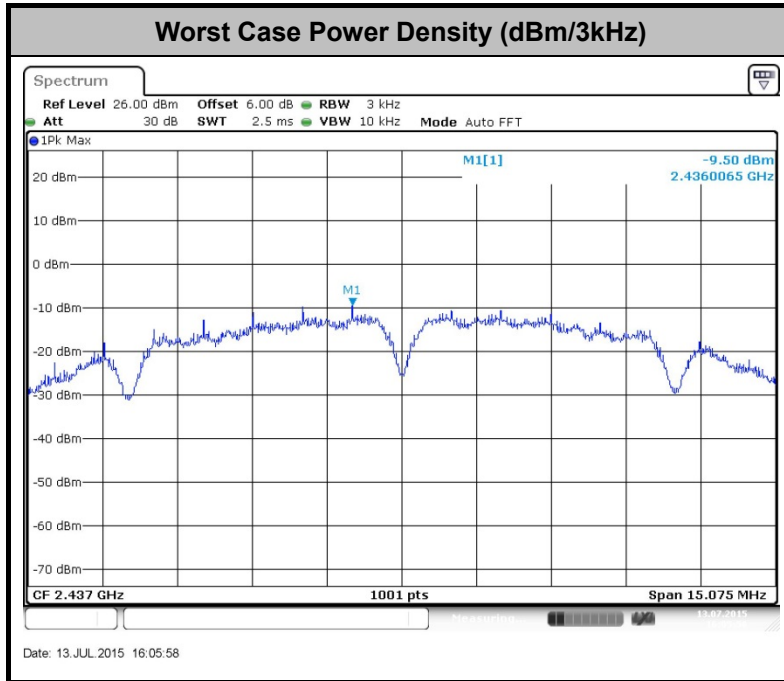

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.4.4 Test Setup

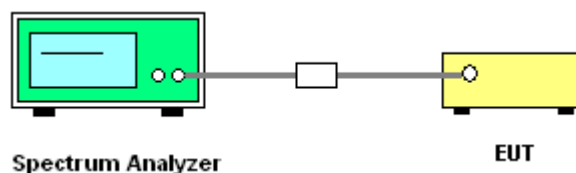



### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission



Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	01	Test Engineer :	Issac Song

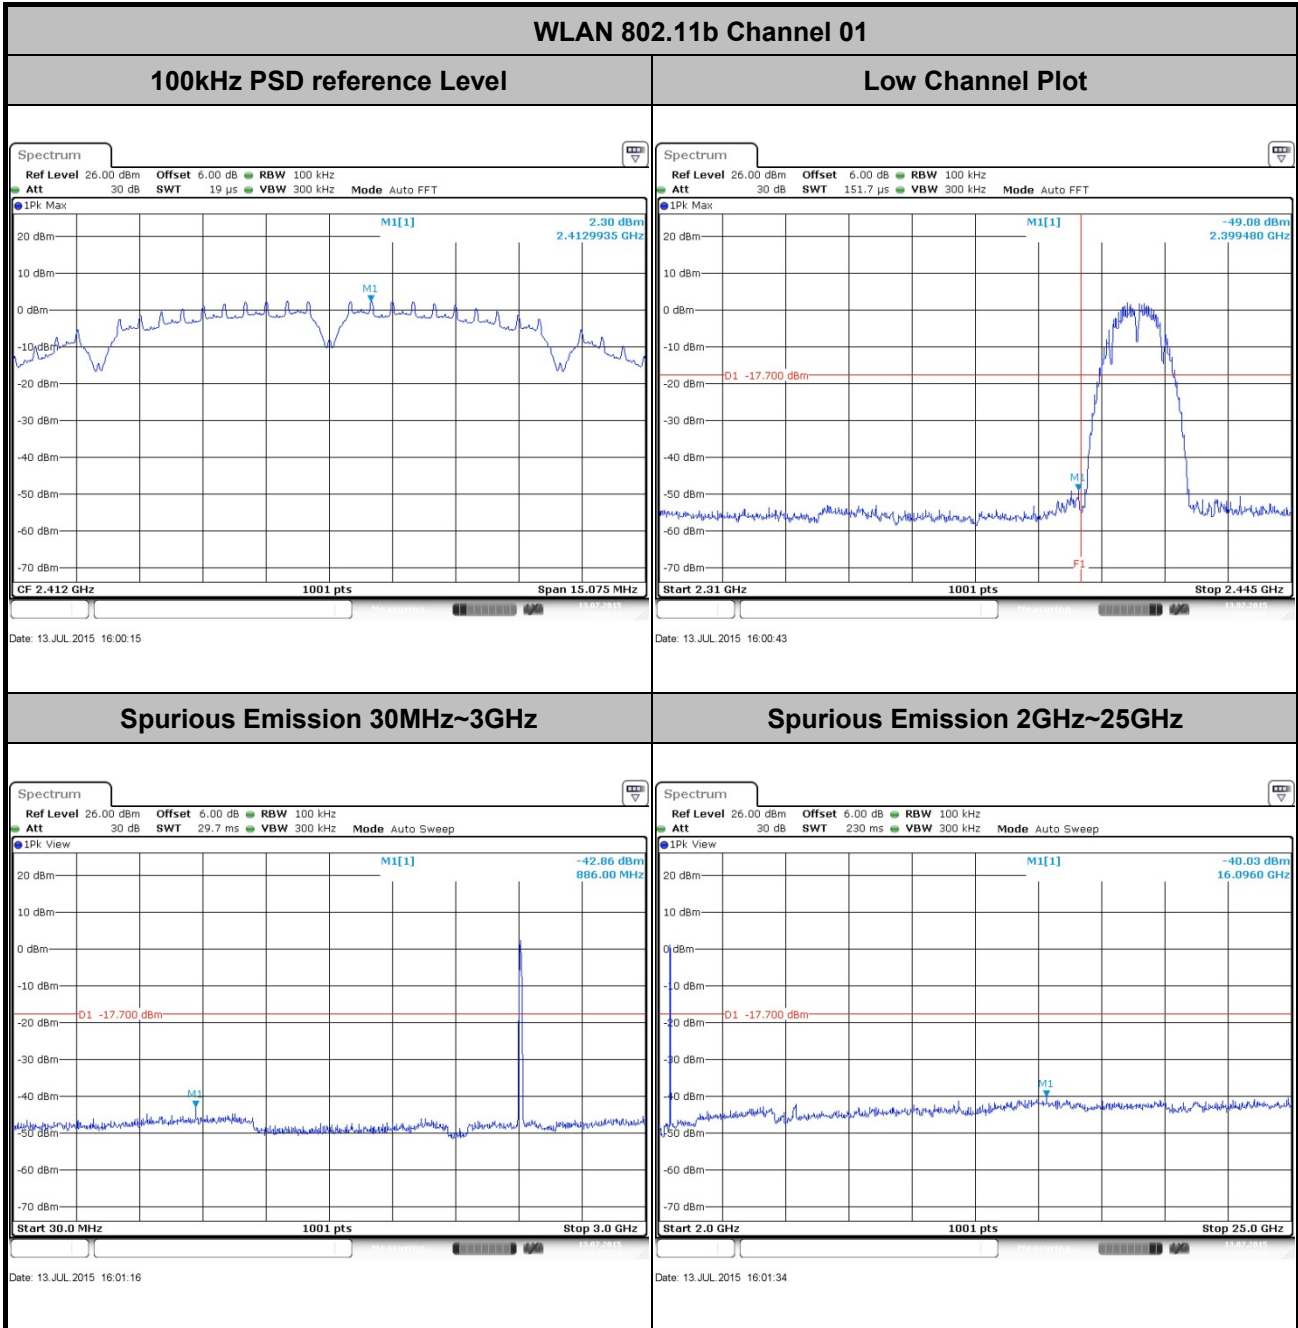




Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Issac Song


WLAN 802.11b Channel 06

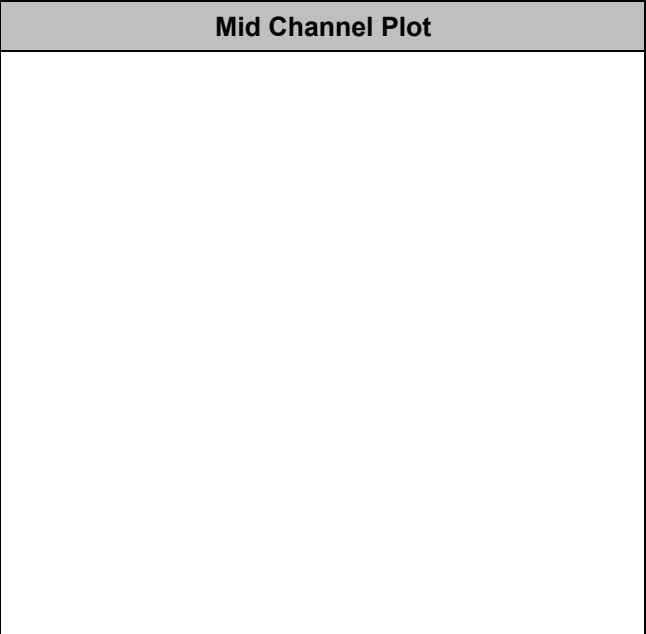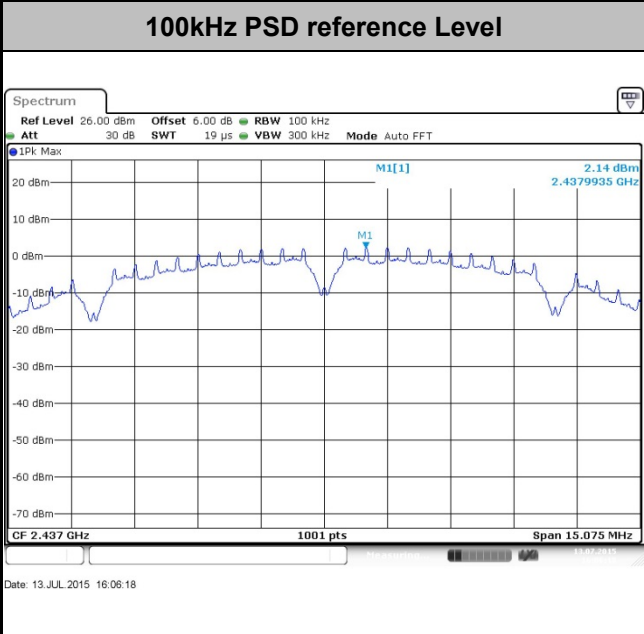

Spurious Emission 30MHz~3GHz

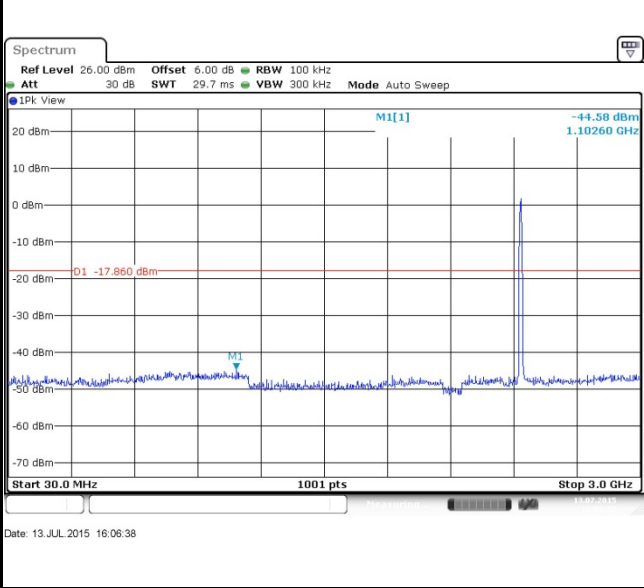

Spurious Emission 2GHz~25GHz

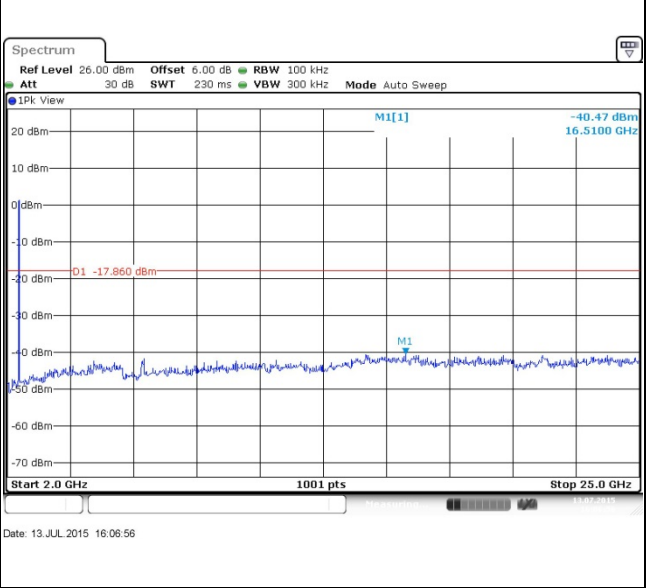





Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	11	Test Engineer :	Issac Song

WLAN 802.11b Channel 11

100kHz PSD reference Level	High Channel Plot
----------------------------	-------------------

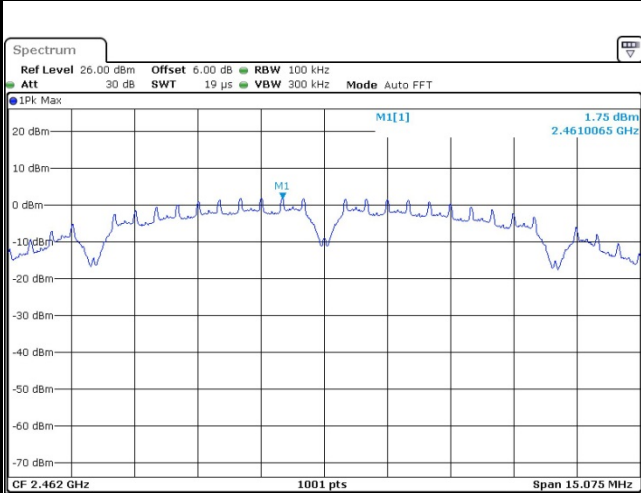


Date: 13 JUL 2015 16:11:14

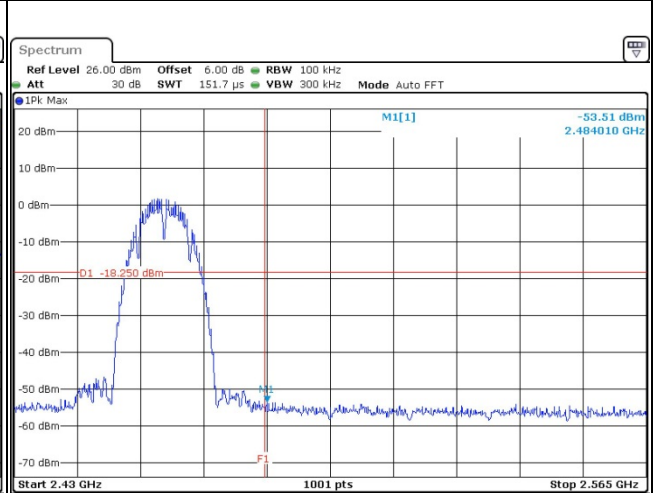


Date: 13 JUL 2015 16:11:52

Spurious Emission 30MHz~3GHz

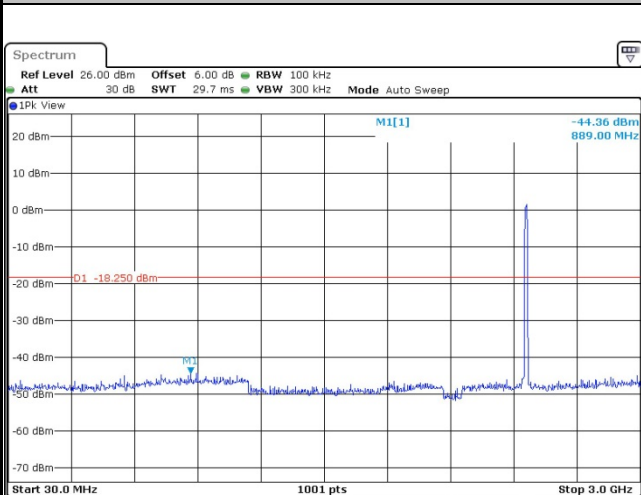

Date: 13 JUL 2015 16:12:13


Spurious Emission 2GHz~25GHz

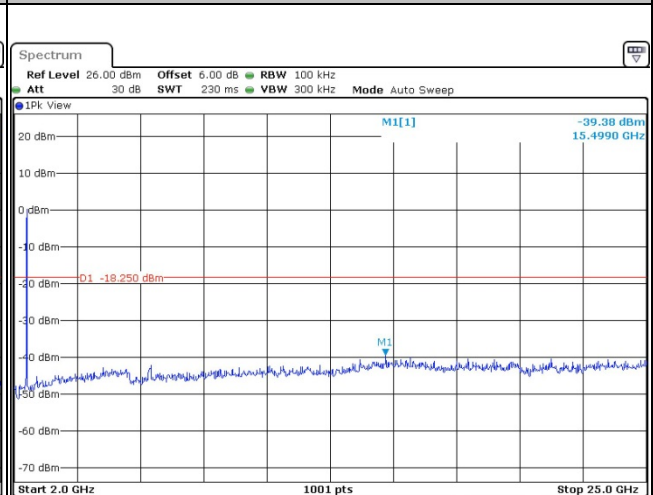

Date: 13 JUL 2015 16:12:31



Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	01	Test Engineer :	Issac Song

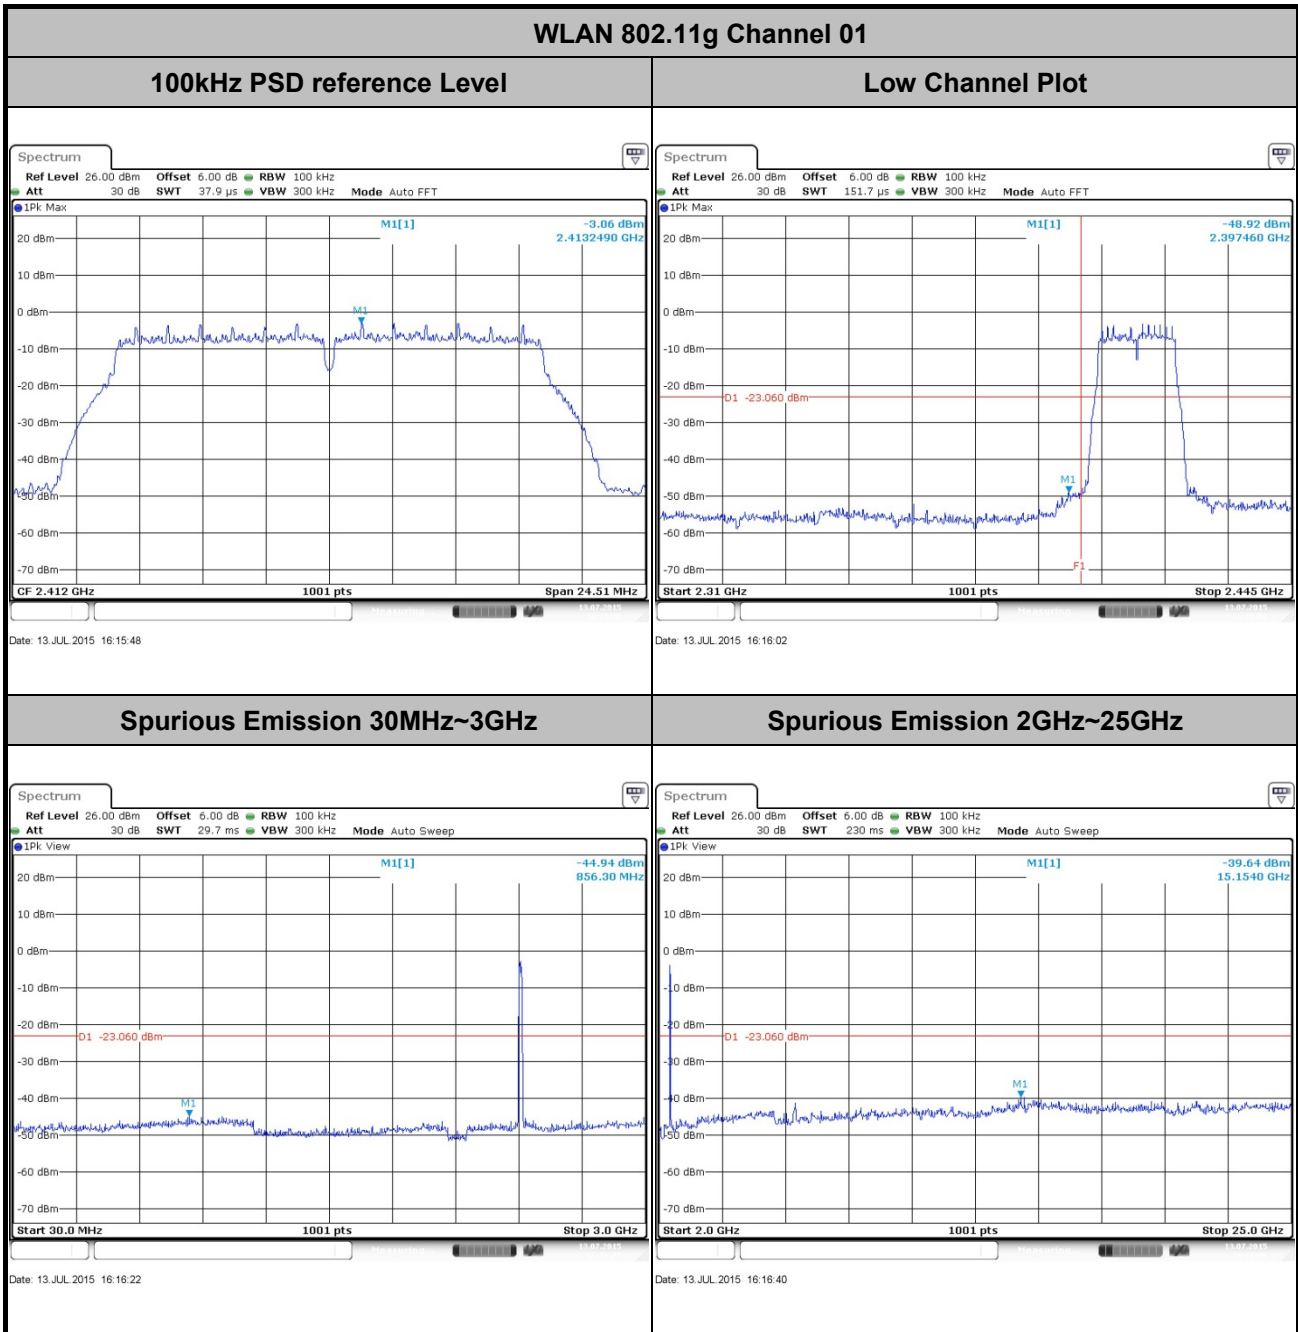




Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Issac Song



WLAN 802.11g Channel 06

100kHz PSD reference Level	Mid Channel Plot
----------------------------	------------------

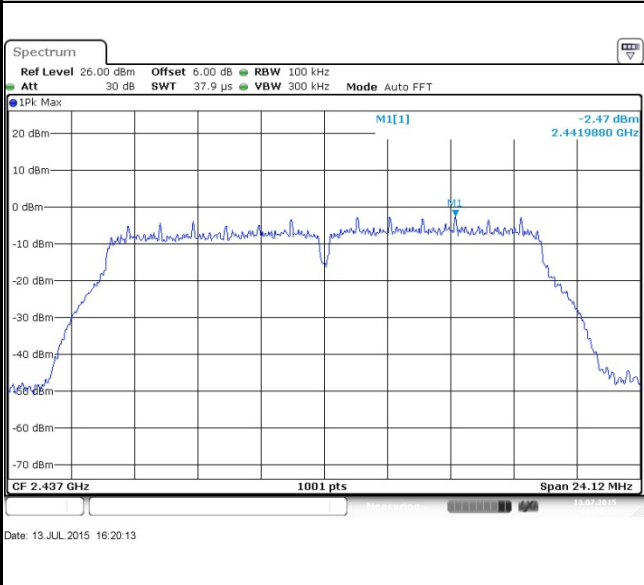

Spurious Emission 30MHz~3GHz

Spurious Emission 2GHz~25GHz

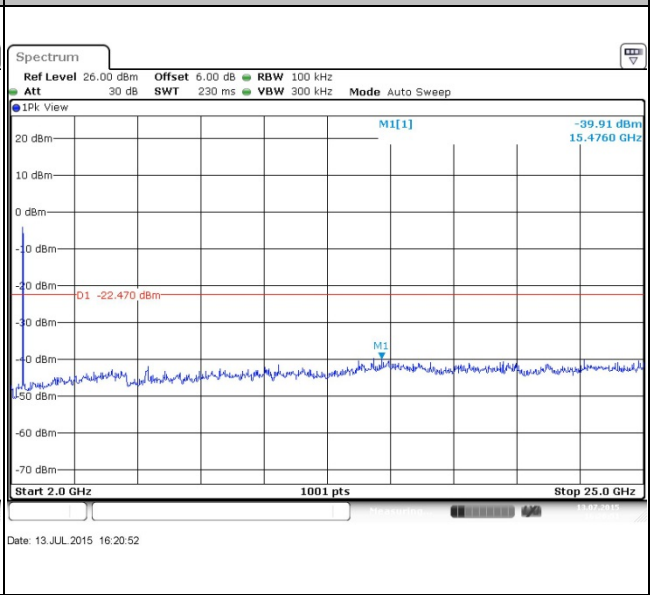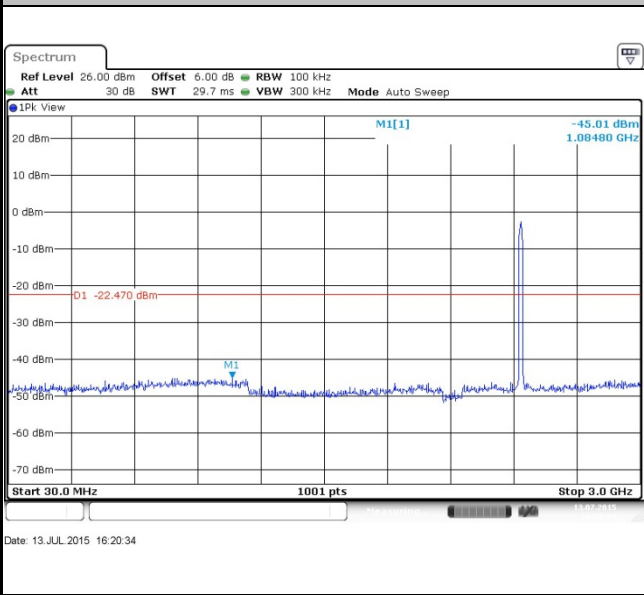





Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	11	Test Engineer :	Issac Song

WLAN 802.11g Channel 11


100kHz PSD reference Level

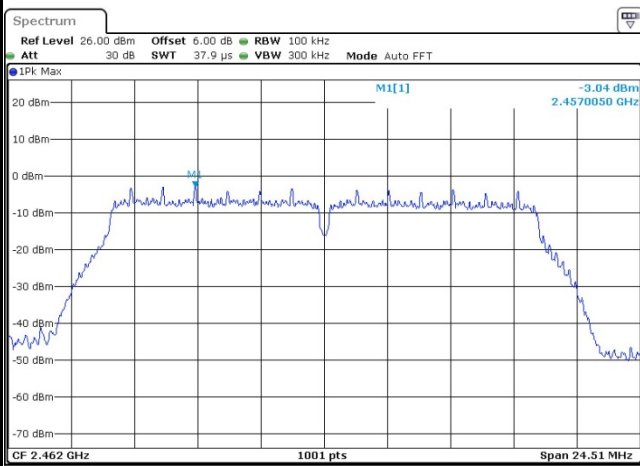


High Channel Plot

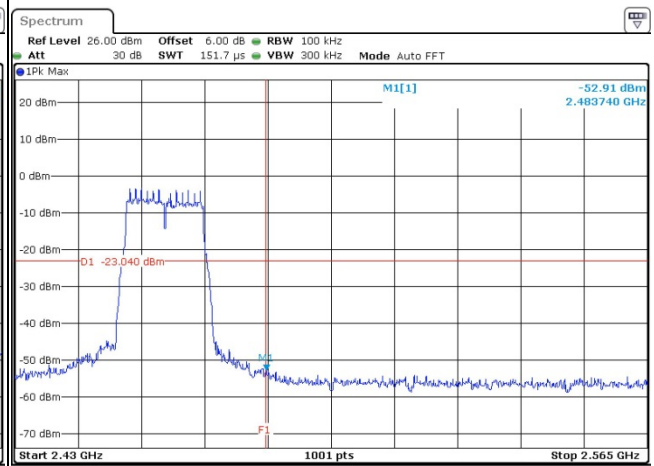

Spurious Emission 30MHz~3GHz

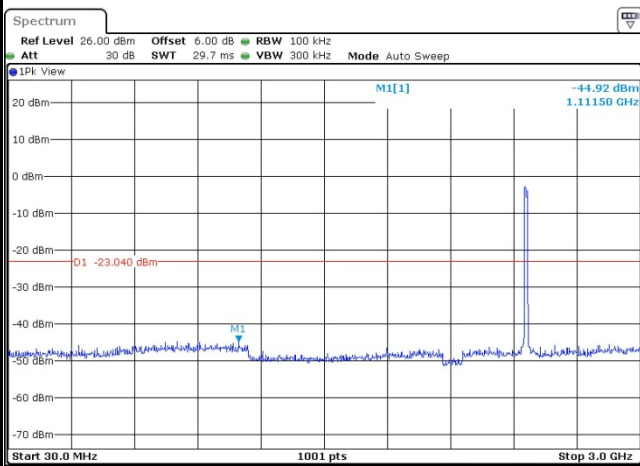


Spurious Emission 2GHz~25GHz

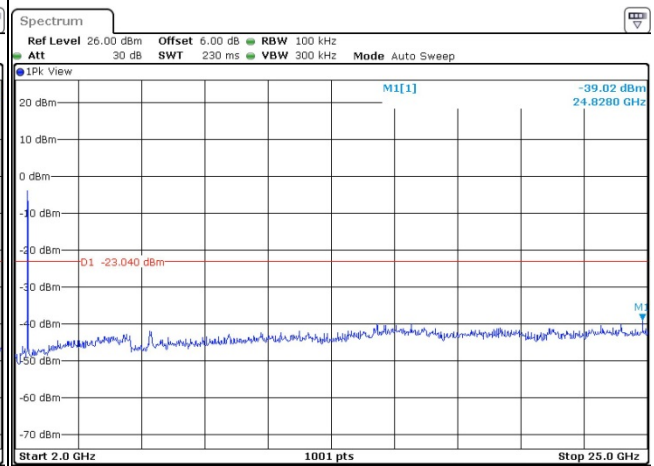









Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	01	Test Engineer :	Issac Song

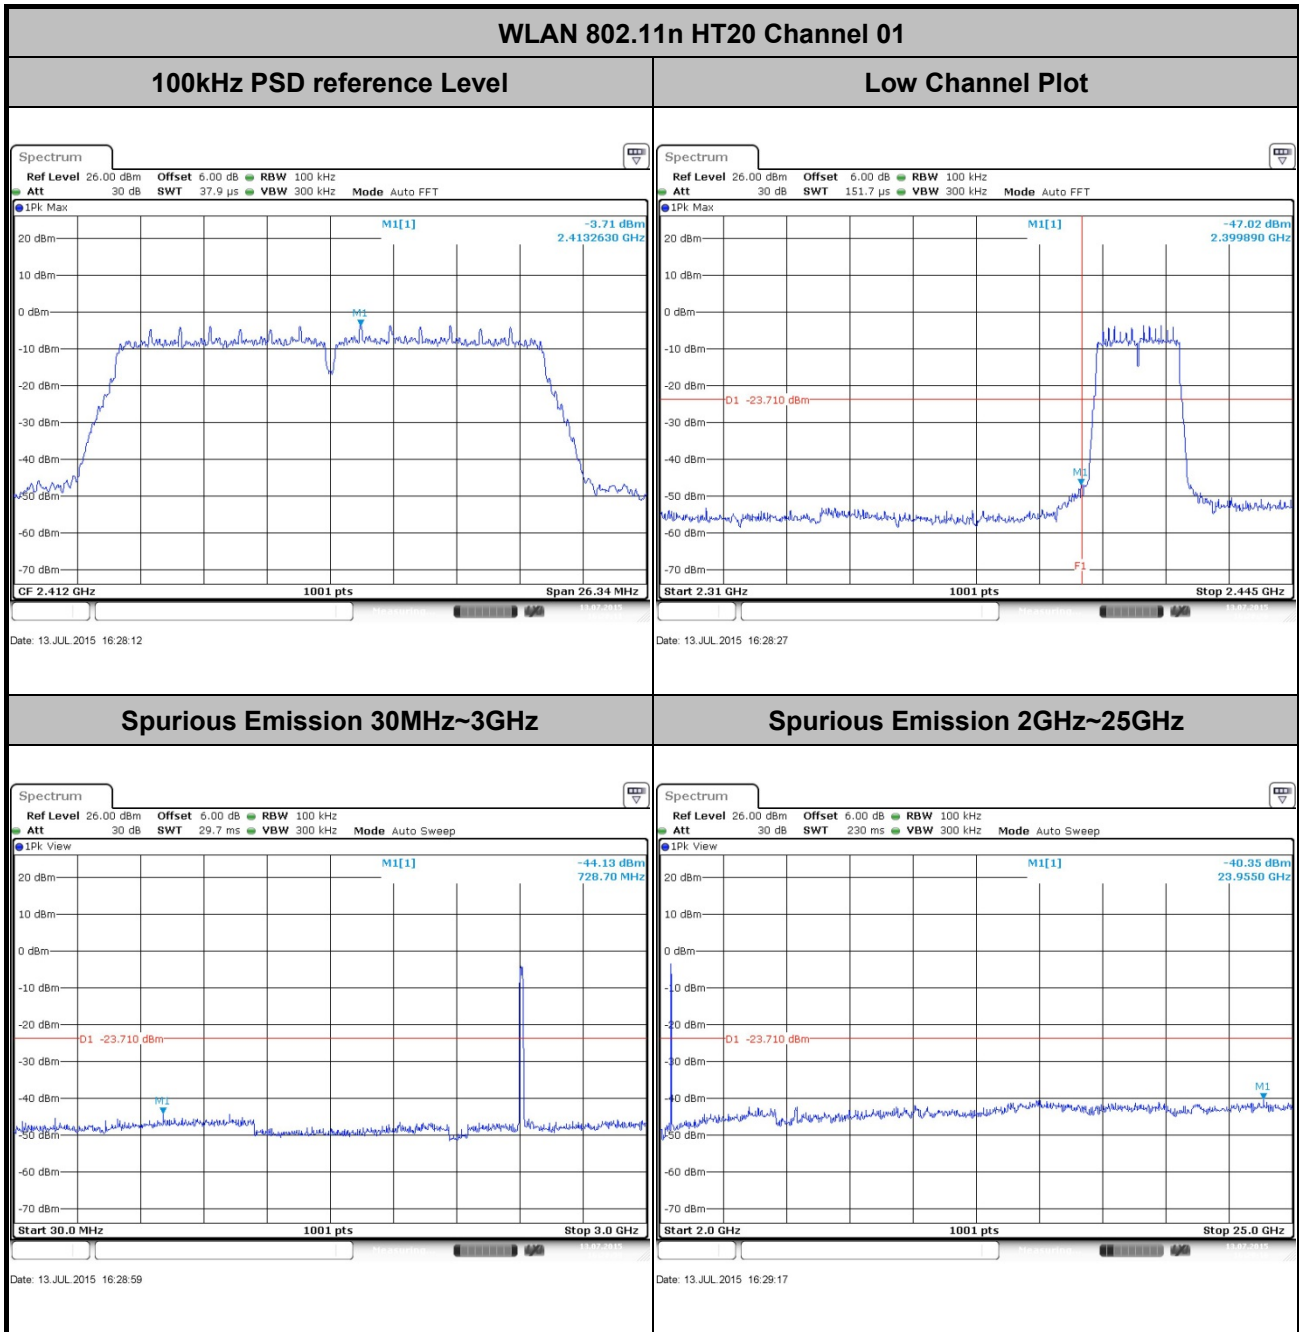



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Issac Song

WLAN 802.11n HT20 Channel 06

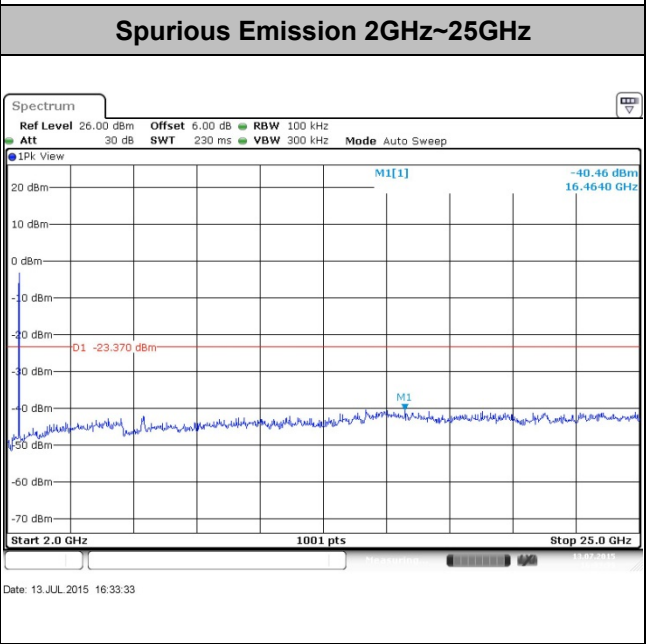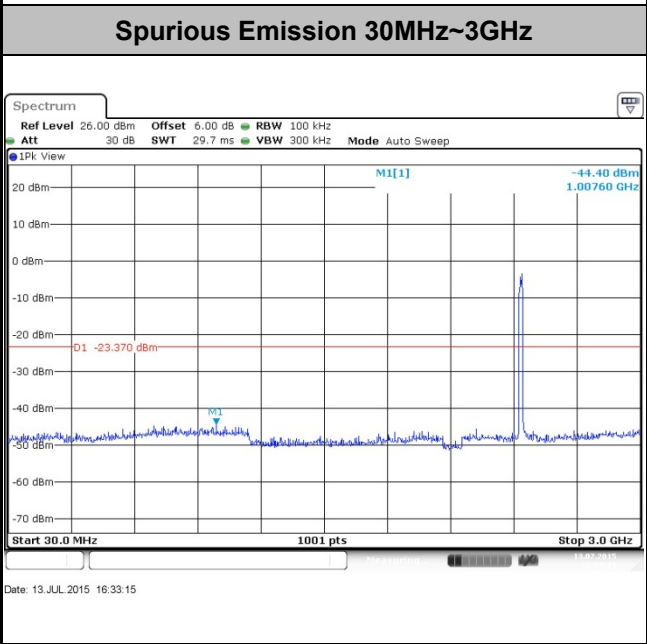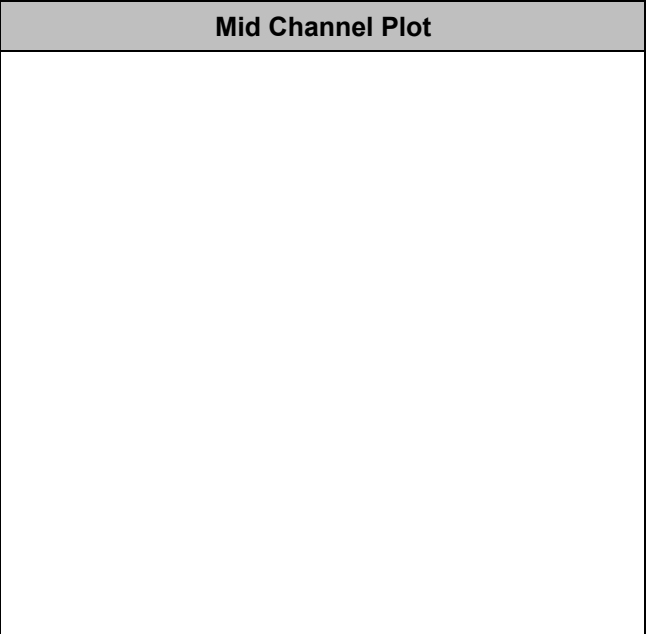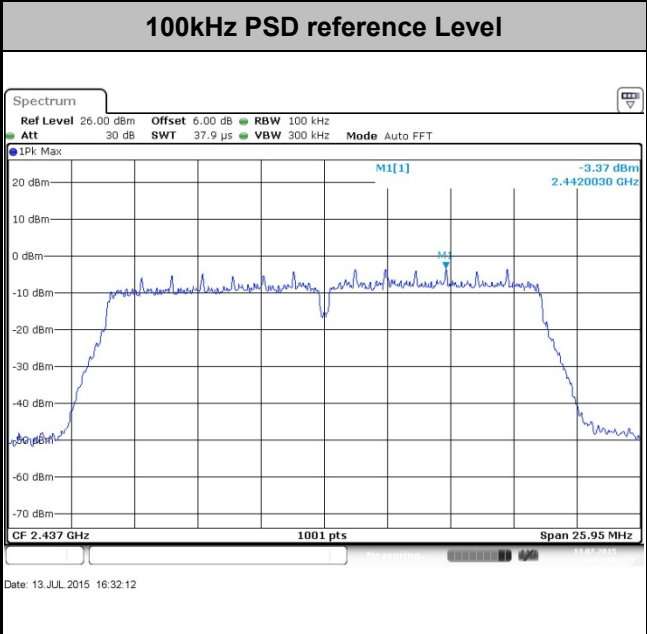





Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	11	Test Engineer :	Issac Song

WLAN 802.11n HT20 Channel 11


100kHz PSD reference Level

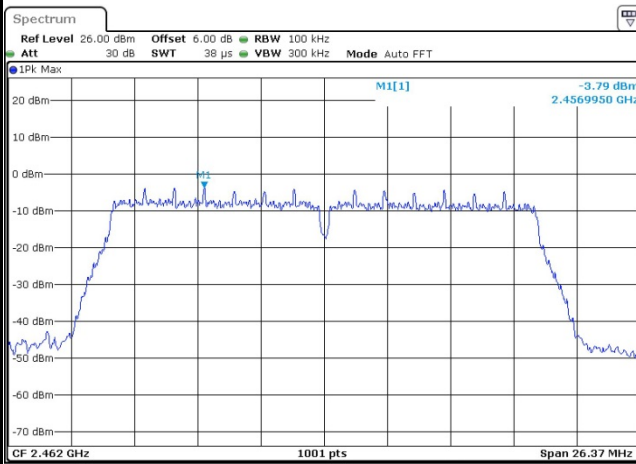


High Channel Plot

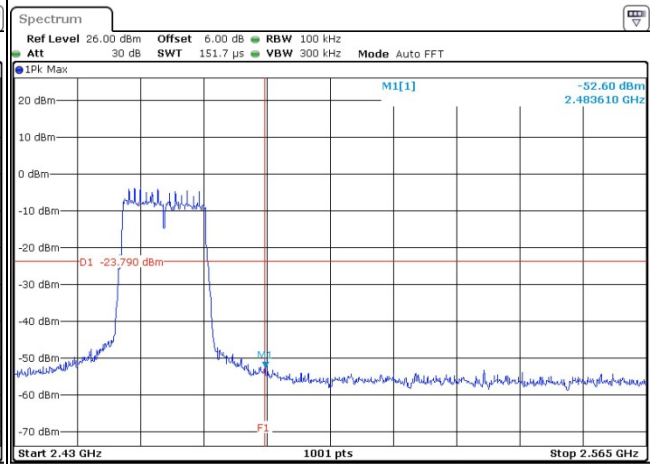

Spurious Emission 30MHz~3GHz

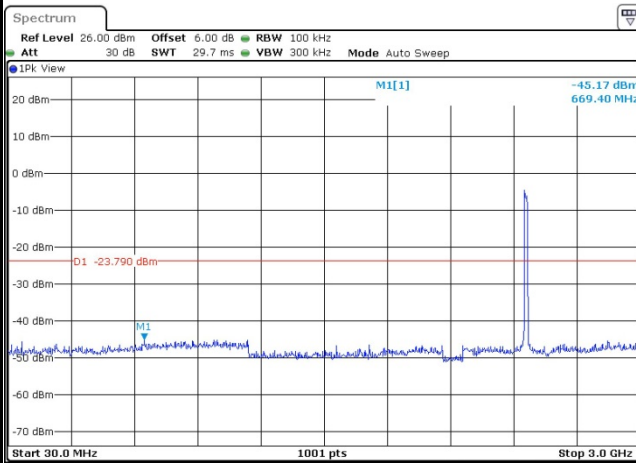

Spurious Emission 2GHz~25GHz

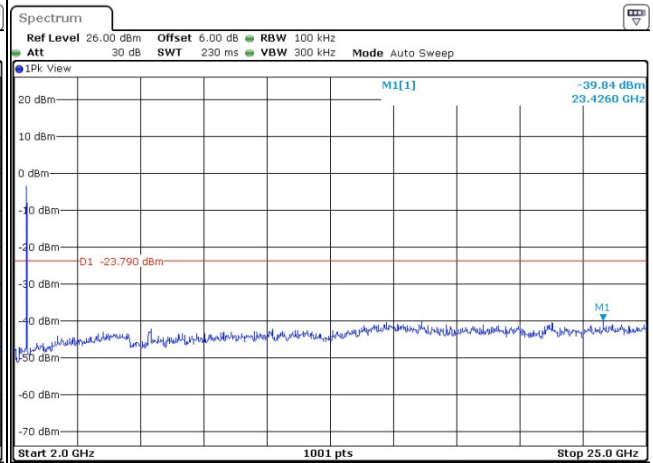





Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	03	Test Engineer :	Issac Song

WLAN 802.11n HT40 Channel 03

100kHz PSD reference Level	Low Channel Plot
----------------------------	------------------

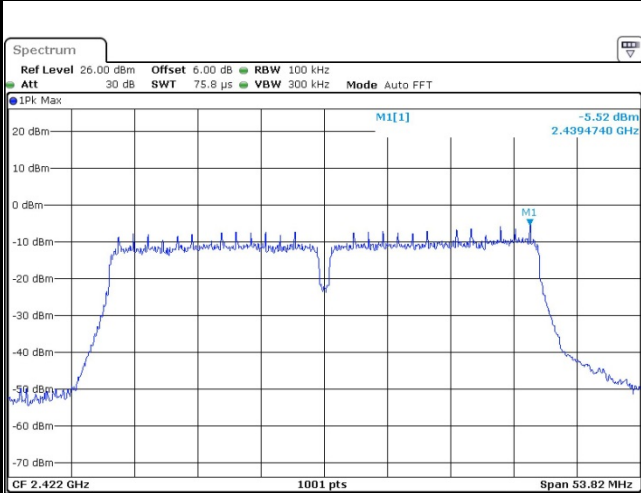


Date: 13 JUL 2015 16:41:02

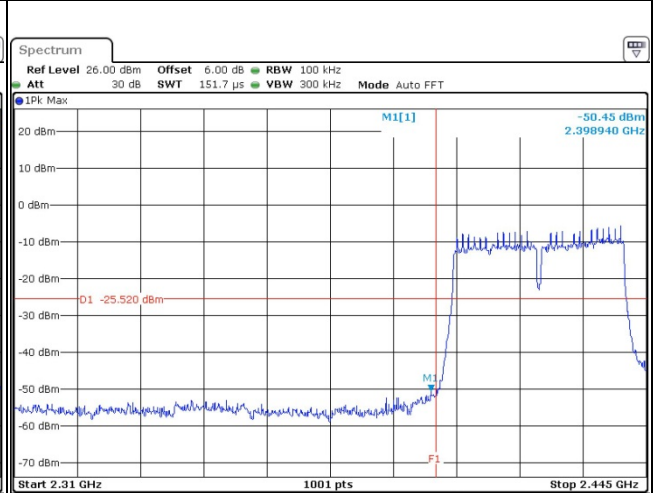


Date: 13 JUL 2015 16:41:19

Spurious Emission 30MHz~3GHz

Spurious Emission 2GHz~25GHz

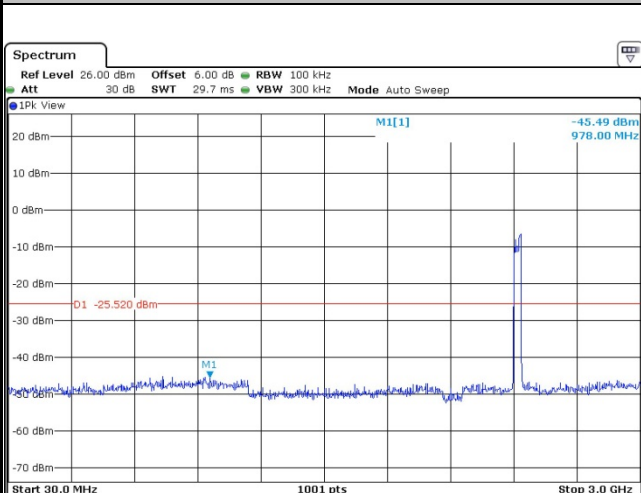

Date: 13 JUL 2015 16:44:15

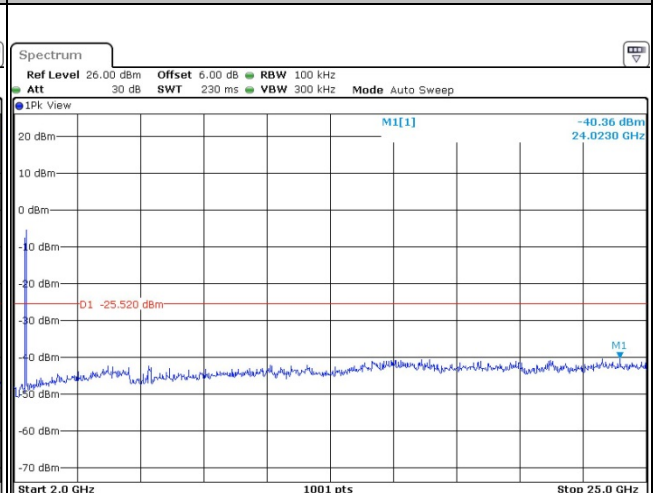

Date: 13 JUL 2015 16:42:56




Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Issac Song

WLAN 802.11n HT40 Channel 06



100kHz PSD reference Level

Mid Channel Plot

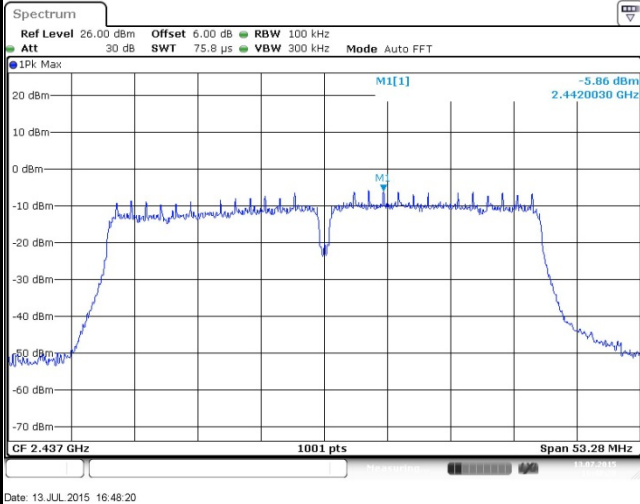


Spurious Emission 30MHz~3GHz

Spurious Emission 2GHz~25GHz

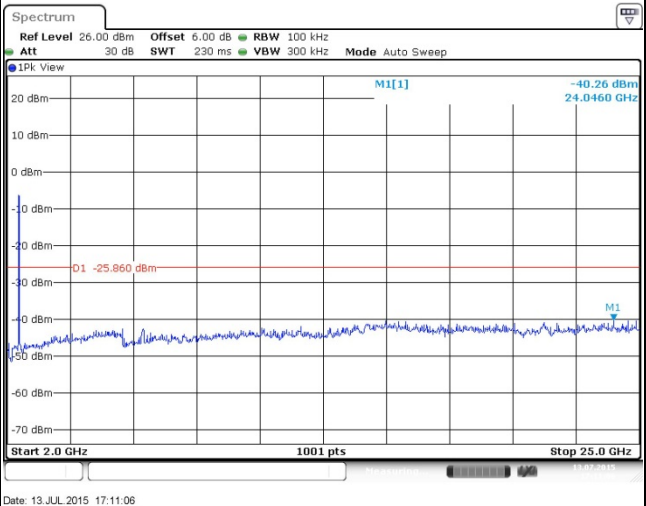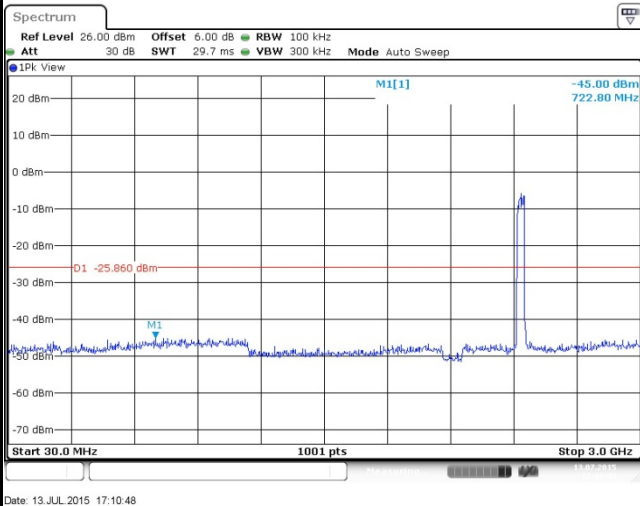



Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	09	Test Engineer :	Issac Song

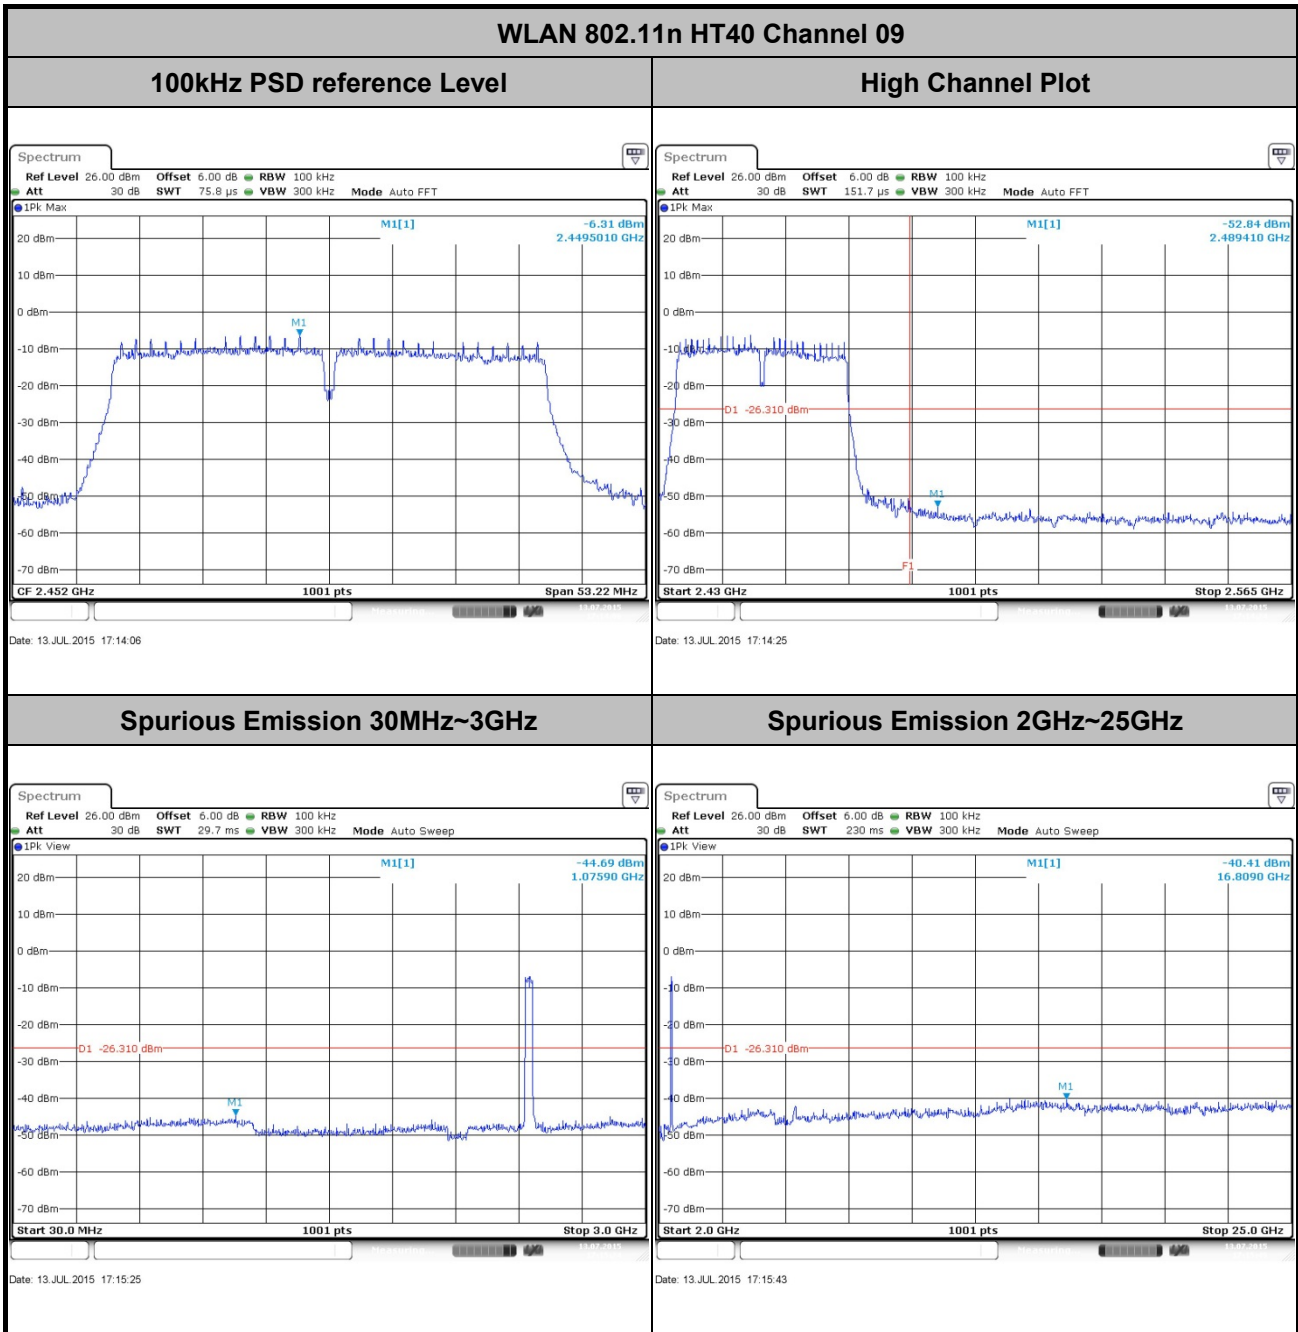



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.
 

For average measurement:


    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	98.13	-	-	10Hz
802.11g	89.17	1.40	0.71	1kHz
2.4GHz 802.11n HT20	88.32	1.30	0.77	1kHz
2.4GHz 802.11n HT40	78.93	0.65	1.53	3kHz




### 3.5.4 Test Setup


For radiated emissions below 30MHz

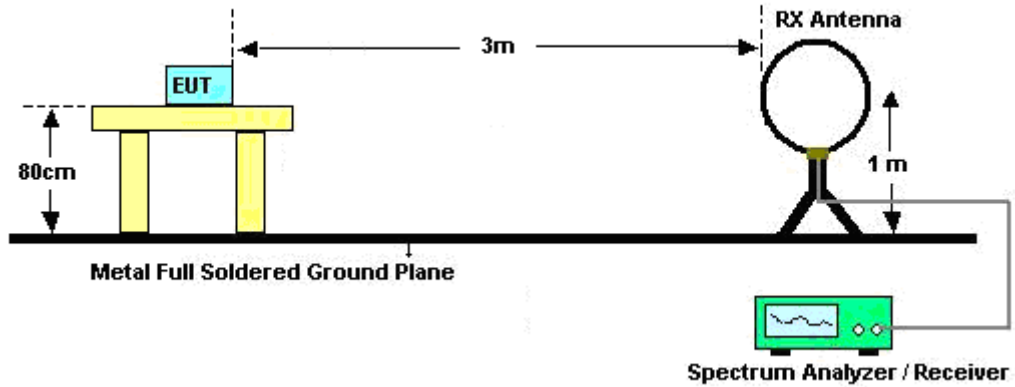

For radiated emissions from 30MHz to 1GHz

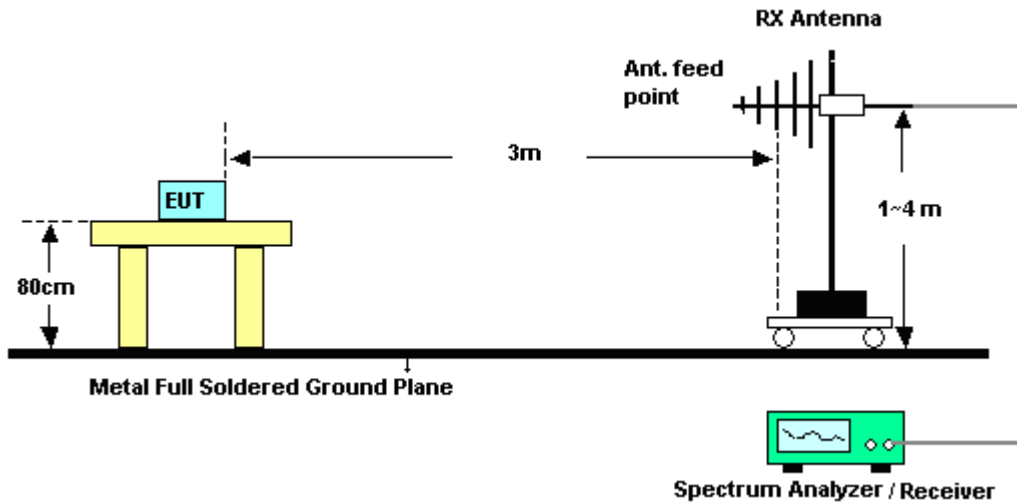

For radiated emissions above 1GHz

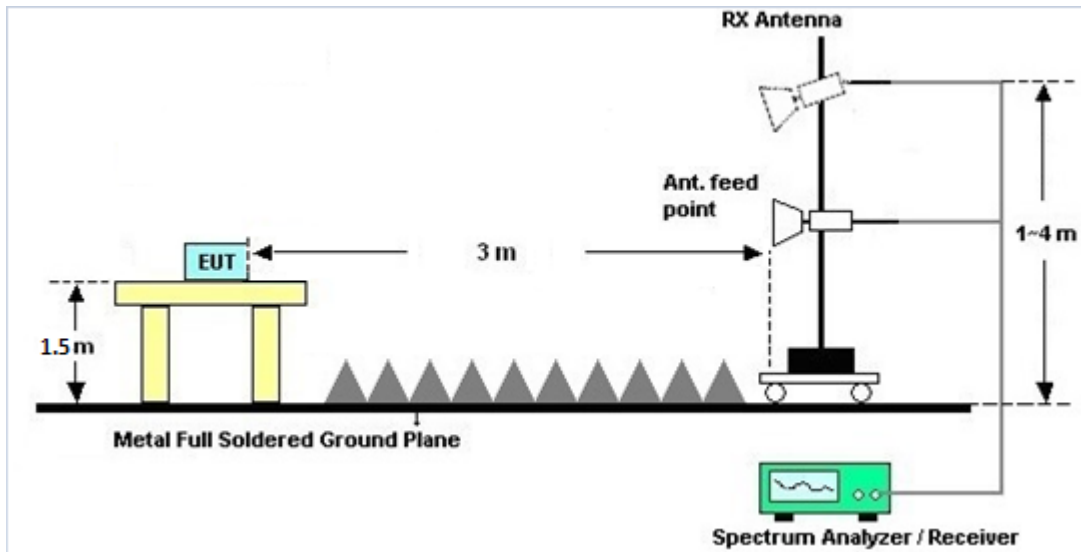

### 3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

### 3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix B.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


### 3.6.4 Test Setup

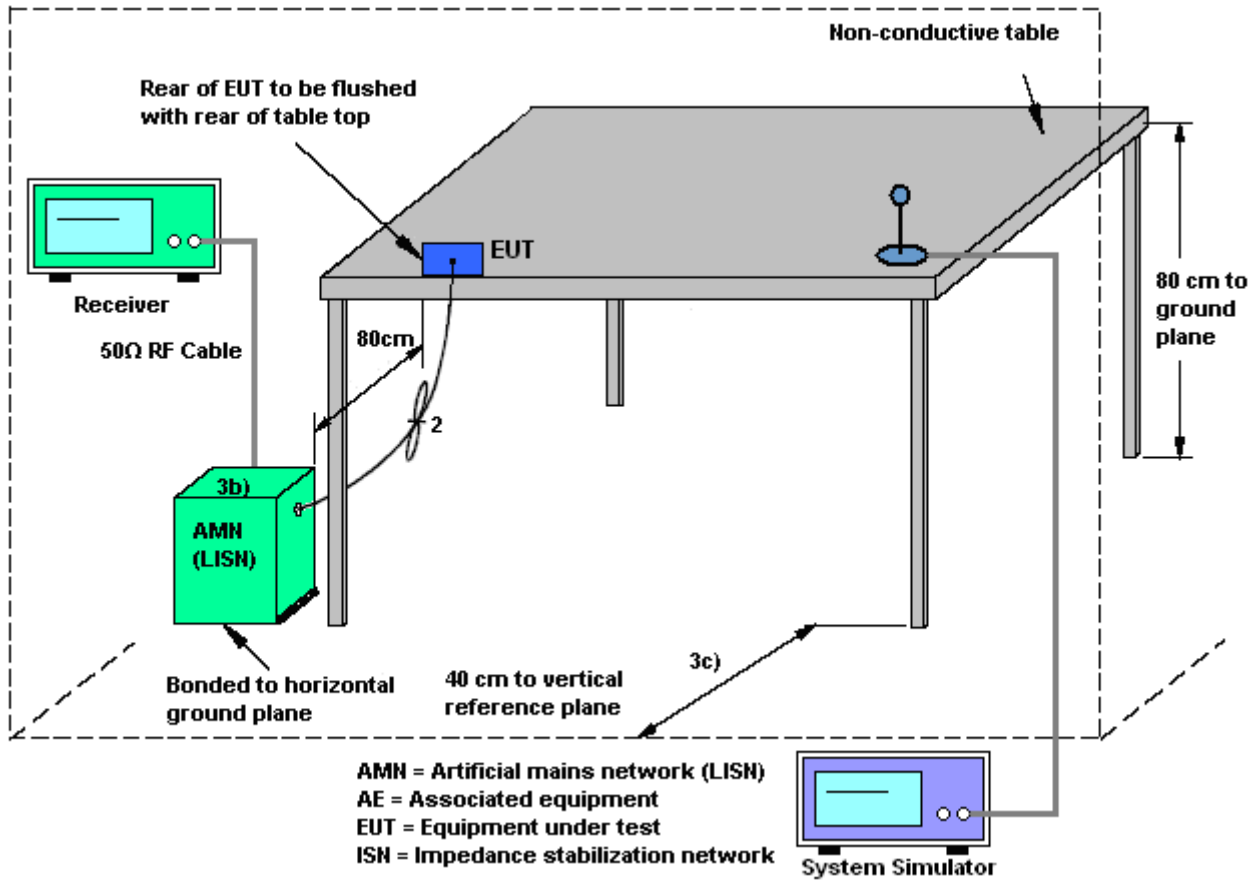



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eko Guan	Relative Humidity :	43~45%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + Battery + USB Cable (Charging from Adapter)		

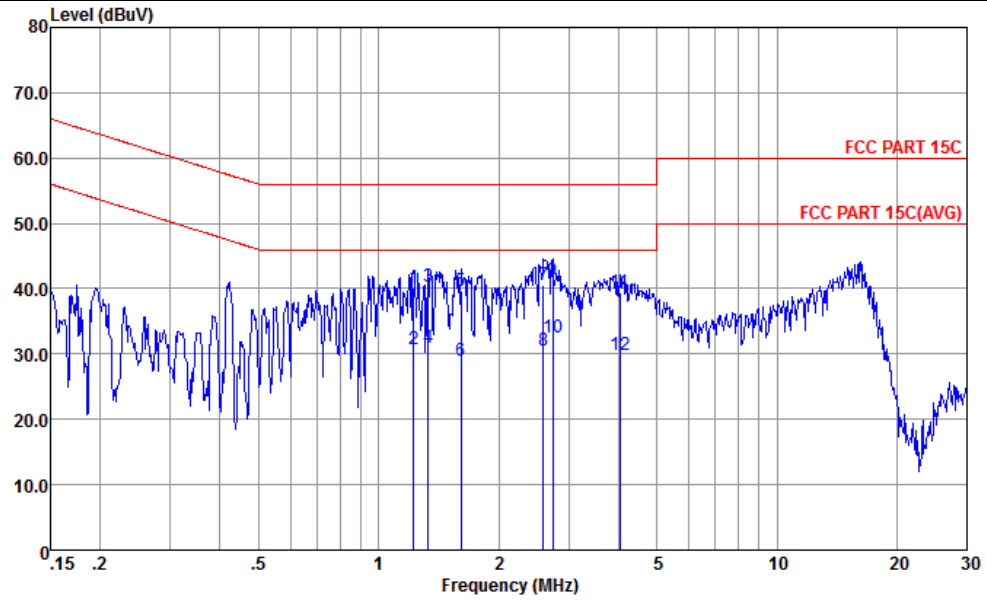


Site : CO01-KS  
 Condition : FCC PART 15C LISN-L20140306 LINE

mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	1.22	40.06	-15.94	56.00	29.30	0.10	10.66	QP
2	1.22	30.66	-15.34	46.00	19.90	0.10	10.66	Average
3	1.33	40.37	-15.63	56.00	29.60	0.10	10.67	QP
4	1.33	31.07	-14.93	46.00	20.30	0.10	10.67	Average
5	1.61	39.59	-16.41	56.00	28.80	0.10	10.69	QP
6	1.61	28.89	-17.11	46.00	18.10	0.10	10.69	Average
7	2.59	40.46	-15.54	56.00	29.60	0.12	10.74	QP
8	2.59	30.56	-15.44	46.00	19.70	0.12	10.74	Average
9	2.74	41.18	-14.82	56.00	30.31	0.12	10.75	QP
10 *	2.74	32.48	-13.52	46.00	21.61	0.12	10.75	Average
11	4.03	39.42	-16.58	56.00	28.40	0.19	10.83	QP
12	4.03	29.82	-16.18	46.00	18.80	0.19	10.83	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eko Guan	Relative Humidity :	43~45%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + Battery + USB Cable (Charging from Adapter)		

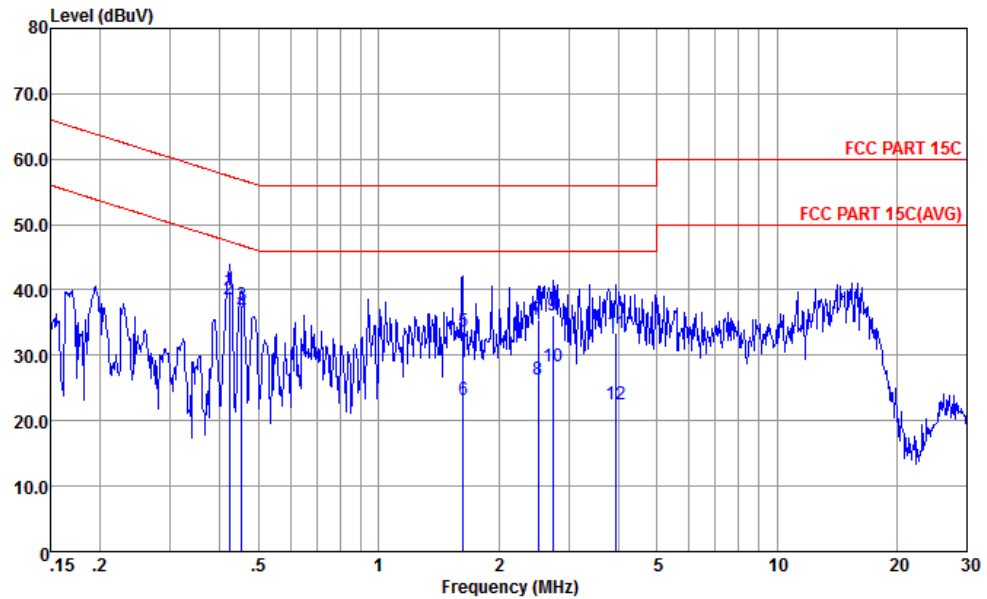

Site : CO01-KS  
Condition : FCC PART 15C LISN-N20140306 NEUTRAL

mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.42	39.80	-17.62	57.42	28.81	0.37	10.62	QP
2 *	0.42	38.60	-8.82	47.42	27.61	0.37	10.62	Average
3	0.45	37.56	-19.24	56.80	26.60	0.34	10.62	QP
4	0.45	36.46	-10.34	46.80	25.50	0.34	10.62	Average
5	1.63	33.59	-22.41	56.00	22.80	0.10	10.69	QP
6	1.63	23.09	-22.91	46.00	12.30	0.10	10.69	Average
7	2.51	35.45	-20.55	56.00	24.60	0.12	10.73	QP
8	2.51	26.35	-19.65	46.00	15.50	0.12	10.73	Average
9	2.74	36.18	-19.82	56.00	25.31	0.12	10.75	QP
10	2.74	28.38	-17.62	46.00	17.51	0.12	10.75	Average
11	3.94	33.41	-22.59	56.00	22.40	0.18	10.83	QP
12	3.94	22.61	-23.39	46.00	11.60	0.18	10.83	Average



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV30	101338	9kHz~30GHz	May 04, 2015	Jul. 13, 2015	May 03, 2016	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Jan. 23, 2015	Jul. 13, 2015	Jan. 22, 2016	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 23, 2015	Jul. 13, 2015	Jan. 22, 2016	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Sep. 29, 2014	Jul. 14, 2015	Sep. 28, 2015	Radiation (03CH02-KS)
Spectrum Analyzer	R&S	FSV40	101040	10kHz~40GHz; Max 30dBm	Sep. 25, 2014	Jul. 14, 2015	Sep. 24, 2015	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 13, 2014	Jul. 14, 2015	Nov. 12, 2015	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz~2GHz	Sep. 13, 2014	Jul. 14, 2015	Sep. 12, 2015	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 08, 2014	Jul. 14, 2015	Nov. 07, 2015	Radiation (03CH02-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 08, 2014	Jul. 14, 2015	Nov. 07, 2015	Radiation (03CH02-KS)
SHF-EHF Horn	com-power	AH-840	101070	18GHz~40GHz	Sep. 04, 2014	Jul. 14, 2015	Sep. 03, 2015	Radiation (03CH02-KS)
Amplifier	com-power	PA-103A	161069	1kHz~1000MHz / 32 dB	May 04, 2015	Jul. 14, 2015	May 03, 2016	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A023 84	1GHz~26.5GHz Gain 30dB	Oct. 28, 2014	Jul. 14, 2015	Oct. 27, 2015	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002 473	N/A	NCR	Jul. 14, 2015	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jul. 14, 2015	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jul. 14, 2015	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	May 04, 2015	Jul. 06, 2015	May 03, 2016	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 25, 2014	Jul. 06, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 25, 2014	Jul. 06, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 25, 2014	Jul. 06, 2015	Oct. 24, 2015	Conduction (CO01-KS)





## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1dB
---	-------



## **Appendix A. Conducted Test Results**

Test Engineer:	Issac Song	Temperature:	24~25	°C
Test Date:	2015/7/13	Relative Humidity:	49~51	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	14.34	10.05	0.50	Pass
11b	1Mbps	1	6	2437	14.34	10.05	0.50	Pass
11b	1Mbps	1	11	2462	14.54	10.05	0.50	Pass
11g	6Mbps	1	1	2412	17.73	16.34	0.50	Pass
11g	6Mbps	1	6	2437	17.78	16.08	0.50	Pass
11g	6Mbps	1	11	2462	17.93	16.34	0.50	Pass
HT20	MCS0	1	1	2412	18.28	17.56	0.50	Pass
HT20	MCS0	1	6	2437	18.48	17.30	0.50	Pass
HT20	MCS0	1	11	2462	18.38	17.58	0.50	Pass
HT40	MCS0	1	3	2422	36.46	35.88	0.50	Pass
HT40	MCS0	1	6	2437	36.36	35.52	0.50	Pass
HT40	MCS0	1	9	2452	36.26	35.49	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	13.34	30.00	2.40	15.74	36.00	Pass
11b	1Mbps	1	6	2437	13.37	30.00	2.40	15.77	36.00	Pass
11b	1Mbps	1	11	2462	12.94	30.00	2.40	15.34	36.00	Pass
11g	6Mbps	1	1	2412	19.37	30.00	2.40	21.77	36.00	Pass
11g	6Mbps	1	6	2437	19.01	30.00	2.40	21.41	36.00	Pass
11g	6Mbps	1	11	2462	18.19	30.00	2.40	20.59	36.00	Pass
HT20	MCS0	1	1	2412	18.36	30.00	2.40	20.76	36.00	Pass
HT20	MCS0	1	6	2437	18.09	30.00	2.40	20.49	36.00	Pass
HT20	MCS0	1	11	2462	17.70	30.00	2.40	20.10	36.00	Pass
HT40	MCS0	1	3	2422	19.51	30.00	2.40	21.91	36.00	Pass
HT40	MCS0	1	6	2437	19.42	30.00	2.40	21.82	36.00	Pass
HT40	MCS0	1	9	2452	19.33	30.00	2.40	21.73	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

2.4GHz Band						
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.08	11.29
11b	1Mbps	1	6	2437	0.08	11.34
11b	1Mbps	1	11	2462	0.08	10.63
11g	6Mbps	1	1	2412	0.50	8.57
11g	6Mbps	1	6	2437	0.50	8.44
11g	6Mbps	1	11	2462	0.50	8.19
HT20	MCS0	1	1	2412	0.54	7.86
HT20	MCS0	1	6	2437	0.54	7.64
HT20	MCS0	1	11	2462	0.54	7.24
HT40	MCS0	1	3	2422	1.03	7.85
HT40	MCS0	1	6	2437	1.03	7.66
HT40	MCS0	1	9	2452	1.03	7.45

**TEST RESULTS DATA**  
**Peak Power Density**

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-10.81	2.40	8.00	Pass
11b	1Mbps	1	6	2437	-9.50	2.40	8.00	Pass
11b	1Mbps	1	11	2462	-11.21	2.40	8.00	Pass
11g	6Mbps	1	1	2412	-15.38	2.40	8.00	Pass
11g	6Mbps	1	6	2437	-15.35	2.40	8.00	Pass
11g	6Mbps	1	11	2462	-15.61	2.40	8.00	Pass
HT20	MCS0	1	1	2412	-17.04	2.40	8.00	Pass
HT20	MCS0	1	6	2437	-16.90	2.40	8.00	Pass
HT20	MCS0	1	11	2462	-17.23	2.40	8.00	Pass
HT40	MCS0	1	3	2422	-18.17	2.40	8.00	Pass
HT40	MCS0	1	6	2437	-19.15	2.40	8.00	Pass
HT40	MCS0	1	9	2452	-18.89	2.40	8.00	Pass



## Appendix B. Radiated Spurious Emission

### 2.4GHz 2400~2483.5MHz

#### WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b CH 01 2412MHz	*	2413.527	95.68	-	-	96.71	31.23	4.74	37	150	339	P	H
	*	2412.859	90.44	-	-	91.47	31.23	4.74	37	150	339	A	H
		2388.39	45.12	-28.88	74	46.22	31.2	4.72	37.02	150	339	P	H
		2389.92	30.59	-23.41	54	31.69	31.2	4.72	37.02	150	339	A	H
	*	2410.521	92.48	-	-	93.51	31.23	4.74	37	300	350	P	V
	*	2411.272	87.52	-	-	88.55	31.23	4.74	37	300	350	A	V
		2385.51	44.97	-29.03	74	46.07	31.2	4.72	37.02	300	350	P	V
		2389.83	30.22	-23.78	54	31.32	31.2	4.72	37.02	300	350	A	V
802.11b CH 06 2437MHz	*	2435.571	97.22	-	-	98.19	31.26	4.76	36.99	192	349	P	H
	*	2436.239	92.37	-	-	93.34	31.26	4.76	36.99	192	349	A	H
	*	2438.326	95.09	-	-	96	31.29	4.77	36.97	290	360	P	V
	*	2437.742	90.31	-	-	91.22	31.29	4.77	36.97	290	360	A	V
802.11b CH 11 2462MHz	*	2463.46	98.16	-	-	99.02	31.31	4.79	36.96	150	113	P	H
	*	2462.792	92.28	-	-	93.14	31.31	4.79	36.96	150	113	A	H
		2484.6	46.17	-27.83	74	46.97	31.34	4.8	36.94	150	113	P	H
		2483.52	31.83	-22.17	54	32.63	31.34	4.8	36.94	150	113	A	H
	*	2463.543	90.81	-	-	91.67	31.31	4.79	36.96	288	347	P	V
	*	2461.289	85.32	-	-	86.18	31.31	4.79	36.96	288	347	A	V
		2488.64	43.77	-30.23	74	44.51	31.37	4.82	36.93	288	347	P	V
	2494.56	29.88	-24.12	54	30.62	31.37	4.82	36.93	288	347	A	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





**2.4GHz 2400~2483.5MHz**  
**WIFI 802.11b (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11b CH 01 2412MHz		4824	45.24	-28.76	74	40.16	34.93	6.83	36.68	150	132	P	H
		4824	46.14	-27.86	74	41.06	34.93	6.83	36.68	150	236	P	V
802.11b CH 06 2437MHz		4874	45.15	-28.85	74	39.99	34.95	6.87	36.66	150	184	P	H
		7311	46.96	-27.04	74	39.32	35.76	8.57	36.69	150	200	P	H
		4874	45.83	-28.17	74	40.67	34.95	6.87	36.66	150	100	P	V
		7311	48.47	-25.53	74	40.83	35.76	8.57	36.69	150	85	P	V
802.11b CH 11 2462MHz		4923	45.27	-28.73	74	40.03	34.97	6.92	36.65	150	216	P	H
		7386	47.27	-26.73	74	39.59	35.78	8.68	36.78	150	119	P	H
		4923	46.8	-27.2	74	41.56	34.97	6.92	36.65	200	49	P	V
		7386	47.49	-26.51	74	39.81	35.78	8.68	36.78	185	102	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11g (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11g CH 01 2412MHz	*	2416.199	95.21	-	-	96.24	31.23	4.74	37	218	134	P	H
	*	2419.122	84.92	-	-	85.95	31.23	4.74	37	218	134	A	H
		2347.44	45.09	-28.91	74	46.29	31.15	4.66	37.01	218	134	P	H
		2389.83	31.11	-22.89	54	32.21	31.2	4.72	37.02	218	134	A	H
	*	2419.038	93.33	-	-	94.36	31.23	4.74	37	295	272	P	V
	*	2418.788	83.32	-	-	84.35	31.23	4.74	37	295	272	A	V
		2338.89	45.68	-28.32	74	46.88	31.15	4.66	37.01	295	272	P	V
		2390	31.06	-22.94	54	32.16	31.2	4.72	37.02	295	272	A	V
802.11g CH 06 2437MHz	*	2439.412	96.97	-	-	97.88	31.29	4.77	36.97	150	232	P	H
	*	2438.41	86.58	-	-	87.49	31.29	4.77	36.97	150	232	A	H
	*	2435.989	94.17	-	-	95.14	31.26	4.76	36.99	287	283	P	V
	*	2438.076	84.12	-	-	85.03	31.29	4.77	36.97	287	283	A	V
802.11g CH 11 2462MHz	*	2468.887	97.47	-	-	98.33	31.31	4.79	36.96	214	243	P	H
	*	2469.555	87.56	-	-	88.42	31.31	4.79	36.96	214	243	A	H
		2491.28	49.83	-24.17	74	50.57	31.37	4.82	36.93	214	243	P	H
		2483.52	35.42	-18.58	54	36.22	31.34	4.8	36.94	214	243	A	H
	*	2468.804	92.29	-	-	93.15	31.31	4.79	36.96	150	334	P	V
	*	2469.054	82.49	-	-	83.35	31.31	4.79	36.96	150	334	A	V
		2483.96	44.45	-29.55	74	45.25	31.34	4.8	36.94	150	334	P	V
		2483.52	32.12	-21.88	54	32.92	31.34	4.8	36.94	150	334	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz**  
**WIFI 802.11g (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11g CH 01 2412MHz		4824	45.85	-28.15	74	40.77	34.93	6.83	36.68	150	269	P	H
		4824	46.01	-27.99	74	40.93	34.93	6.83	36.68	150	102	P	V
802.11g CH 06 2437MHz		4874	45.9	-28.1	74	40.74	34.95	6.87	36.66	150	36	P	H
		7311	46.83	-27.17	74	39.19	35.76	8.57	36.69	150	259	P	H
		4874	45.81	-28.19	74	40.65	34.95	6.87	36.66	150	166	P	V
802.11g CH 11 2462MHz		7311	47.39	-26.61	74	39.75	35.76	8.57	36.69	150	147	P	V
		4923	45.44	-28.56	74	40.2	34.97	6.92	36.65	174	120	P	H
		7386	48.8	-25.2	74	41.12	35.78	8.68	36.78	320	115	P	H
		4923	45.45	-28.55	74	40.21	34.97	6.92	36.65	200	52	P	V
802.11g CH 11 2462MHz		7386	47.28	-26.72	74	39.6	35.78	8.68	36.78	162	33	P	V
	<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											



**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 01 2412MHz	*	2416.95	95.45	-	-	96.48	31.23	4.74	37	256	257	P	H
	*	2419.456	84.54	-	-	85.57	31.23	4.74	37	256	257	A	H
		2388.93	44.05	-29.95	74	45.15	31.2	4.72	37.02	256	257	P	H
		2389.74	31.64	-22.36	54	32.74	31.2	4.72	37.02	256	257	A	H
	*	2419.122	93.95	-	-	94.98	31.23	4.74	37	300	280	P	V
	*	2404.008	83.34	-	-	84.37	31.23	4.74	37	300	280	A	V
		2388.84	44.35	-29.65	74	45.45	31.2	4.72	37.02	300	280	P	V
	2390	31.58	-22.42	54	32.68	31.2	4.72	37.02	300	280	A	V	
802.11n HT20 CH 06 2437MHz	*	2440.915	92.71	-	-	93.62	31.29	4.77	36.97	300	328	P	H
	*	2440.164	81.59	-	-	82.5	31.29	4.77	36.97	300	328	A	H
	*	2436.907	95.89	-	-	96.8	31.29	4.77	36.97	150	231	P	V
	*	2438.076	85.06	-	-	85.97	31.29	4.77	36.97	150	231	A	V
802.11n HT20 CH 11 2462MHz	*	2467.134	93.99	-	-	94.85	31.31	4.79	36.96	168	245	P	H
	*	2470.223	83.72	-	-	84.58	31.31	4.79	36.96	168	245	A	H
		2484.52	46.07	-27.93	74	46.87	31.34	4.8	36.94	168	245	P	H
		2483.52	33.27	-20.73	54	34.07	31.34	4.8	36.94	168	245	A	H
	*	2469.472	89.02	-	-	89.88	31.31	4.79	36.96	150	298	P	V
	*	2470.307	79.27	-	-	80.13	31.31	4.79	36.96	150	298	A	V
		2488.08	44.03	-29.97	74	44.77	31.37	4.82	36.93	150	298	P	V
	2483.52	31.7	-22.3	54	32.5	31.34	4.8	36.94	150	298	A	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 01 2412MHz		4824	44.32	-29.68	74	39.24	34.93	6.83	36.68	150	269	P	H
		4824	44.93	-29.07	74	39.85	34.93	6.83	36.68	150	78	P	V
802.11n HT20 CH 06 2437MHz		4874	44.86	-29.14	74	39.7	34.95	6.87	36.66	150	150	P	H
		7311	46.93	-27.07	74	39.29	35.76	8.57	36.69	150	206	P	H
		4874	44.87	-29.13	74	39.71	34.95	6.87	36.66	150	98	P	V
		7311	46.54	-27.46	74	38.9	35.76	8.57	36.69	150	199	P	V
802.11n HT20 CH 11 2462MHz		4923	45.14	-28.86	74	39.9	34.97	6.92	36.65	150	230	P	H
		7386	47.13	-26.87	74	39.45	35.78	8.68	36.78	150	145	P	H
		4924	45.45	-28.55	74	40.21	34.97	6.92	36.65	150	118	P	V
		7386	46.77	-27.23	74	39.09	35.78	8.68	36.78	150	85	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 03 2422MHz	*	2435.738	96.34	-	-	97.31	31.26	4.76	36.99	182	227	P	H
	*	2438.577	86.19	-	-	87.1	31.29	4.77	36.97	182	227	A	H
		2345.19	45.02	-28.98	74	46.22	31.15	4.66	37.01	182	227	P	H
		2368.86	31.31	-22.69	54	32.45	31.18	4.7	37.02	182	227	A	H
		2483.68	46.01	-27.99	74	46.81	31.34	4.8	36.94	182	227	P	H
		2484.08	32.81	-21.19	54	33.61	31.34	4.8	36.94	182	227	A	H
	*	2436.99	94.95	-	-	95.86	31.29	4.77	36.97	273	278	P	V
	*	2438.243	84.64	-	-	85.55	31.29	4.77	36.97	273	278	A	V
		2385.6	43.66	-30.34	74	44.76	31.2	4.72	37.02	273	278	P	V
		2383.62	31.61	-22.39	54	32.75	31.18	4.7	37.02	273	278	A	V
802.11n HT40 CH 06 2437MHz		2484.84	45.56	-28.44	74	46.36	31.34	4.8	36.94	273	278	P	V
		2483.72	33.03	-20.97	54	33.83	31.34	4.8	36.94	273	278	A	V
	*	2438.911	93.5	-	-	94.41	31.29	4.77	36.97	300	212	P	H
	*	2439.162	83.85	-	-	84.76	31.29	4.77	36.97	300	212	A	H
		2376.06	44.77	-29.23	74	45.91	31.18	4.7	37.02	300	212	P	H
		2370.21	31.85	-22.15	54	32.99	31.18	4.7	37.02	300	212	A	H
		2486.88	45.24	-28.76	74	46.04	31.34	4.8	36.94	300	212	P	H
		2483.76	32.98	-21.02	54	33.78	31.34	4.8	36.94	300	212	A	H
	*	2439.162	94.14	-	-	95.05	31.29	4.77	36.97	300	276	P	V
	*	2439.162	84.3	-	-	85.21	31.29	4.77	36.97	300	276	A	V
	2325.03	43.99	-30.01	74	45.23	31.13	4.64	37.01	300	276	P	V	
	2386.32	31.48	-22.52	54	32.58	31.2	4.72	37.02	300	276	A	V	
	2484.12	45.72	-28.28	74	46.52	31.34	4.8	36.94	300	276	P	V	
	2483.56	33.56	-20.44	54	34.36	31.34	4.8	36.94	300	276	A	V	



802.11n HT40 CH 09 2452MHz	*	2439.162	93.02	-	-	93.93	31.29	4.77	36.97	155	319	P	H
	*	2439.245	82.18	-	-	83.09	31.29	4.77	36.97	155	319	A	H
		2327.19	43.52	-30.48	74	44.76	31.13	4.64	37.01	155	319	P	H
		2398.47	30.96	-23.04	54	32.06	31.2	4.72	37.02	155	319	A	H
		2483.56	53.81	-20.19	74	54.61	31.34	4.8	36.94	155	319	P	H
		2483.64	33.39	-20.61	54	34.19	31.34	4.8	36.94	155	319	A	H
	*	2440.915	92.49	-	-	93.4	31.29	4.77	36.97	173	240	P	V
	*	2437.742	82.53	-	-	83.44	31.29	4.77	36.97	173	240	A	V
		2347.44	42.86	-31.14	74	44.06	31.15	4.66	37.01	173	240	P	V
		2390	31.44	-22.56	54	32.54	31.2	4.72	37.02	173	240	A	V
		2483.72	52.12	-21.88	74	52.92	31.34	4.8	36.94	173	240	P	V
	2483.84	32.6	-21.4	54	33.4	31.34	4.8	36.94	173	240	A	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz**  
**WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n		4845	47.91	-26.09	74	42.81	34.93	6.85	36.68	150	251	P	H
HT40		7266	50.14	-23.86	74	42.51	35.76	8.53	36.66	150	185	P	H
CH 03		4845	48.9	-25.1	74	43.8	34.93	6.85	36.68	150	96	P	V
2422MHz		7266	49.67	-24.33	74	42.04	35.76	8.53	36.66	150	205	P	V
802.11n		4874	48.58	-25.42	74	43.42	34.95	6.87	36.66	150	162	P	H
HT40		7311	49.73	-24.27	74	42.09	35.76	8.57	36.69	150	205	P	H
CH 06		4874	48.49	-25.51	74	43.33	34.95	6.87	36.66	150	113	P	V
2437MHz		7311	50.29	-23.71	74	42.65	35.76	8.57	36.69	150	326	P	V
802.11n		4905	45.6	-28.4	74	40.39	34.96	6.9	36.65	150	172	P	H
HT40		7356	46.61	-27.39	74	38.95	35.77	8.64	36.75	150	300	P	H
CH 09		4905	46	-28	74	40.79	34.96	6.9	36.65	150	219	P	V
2452MHz		7356	46.87	-27.13	74	39.21	35.77	8.64	36.75	150	144	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





Emission below 1GHz  
2.4GHz WIFI 802.11b (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz 802.11b LF		30.97	19.21	-20.79	40	34.9	18.8	0.74	35.23	-	-	P	H
		78.5	22.24	-17.76	40	47.78	8.77	1.15	35.46	246	208	P	H
		198.78	15.22	-28.28	43.5	39.02	9.44	1.84	35.08	-	-	P	H
		208.48	17.01	-26.49	43.5	40.43	9.75	1.88	35.05	-	-	P	H
		323.91	19.92	-26.08	46	38.45	14.03	2.36	34.92	-	-	P	H
		342.34	19.2	-26.8	46	37.37	14.43	2.43	35.03	-	-	P	H
		30.97	20.03	-19.97	40	35.72	18.8	0.74	35.23	150	223	P	V
		78.5	16.89	-23.11	40	42.43	8.77	1.15	35.46	-	-	P	V
		197.81	16.97	-26.53	43.5	40.75	9.47	1.83	35.08	-	-	P	V
		215.27	16.54	-26.96	43.5	39.63	10.02	1.91	35.02	-	-	P	V
		252.13	20.61	-25.39	46	41.91	11.48	2.08	34.86	-	-	P	V
		288.02	18.49	-27.51	46	38.03	13.01	2.23	34.78	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz  
2.4GHz WIFI 802.11g (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz 802.11g LF		30.97	19.33	-20.67	40	35.02	18.8	0.74	35.23	214	108	P	H
		208.48	17.36	-26.14	43.5	40.78	9.75	1.88	35.05	-	-	P	H
		252.13	19.73	-26.27	46	41.03	11.48	2.08	34.86	-	-	P	H
		323.91	19.97	-26.03	46	38.5	14.03	2.36	34.92	-	-	P	H
		359.8	18.87	-27.13	46	36.58	14.91	2.49	35.11	-	-	P	H
		762.35	21.6	-24.4	46	32.41	19.92	3.71	34.44	-	-	P	H
		30.97	20.29	-19.71	40	35.98	18.8	0.74	35.23	168	112	P	V
		76.56	18.69	-21.31	40	44.38	8.53	1.13	35.35	-	-	P	V
		197.81	16.51	-26.99	43.5	40.29	9.47	1.83	35.08	-	-	P	V
		215.27	16.25	-27.25	43.5	39.34	10.02	1.91	35.02	-	-	P	V
		252.13	20.51	-25.49	46	41.81	11.48	2.08	34.86	-	-	P	V
		288.02	17.93	-28.07	46	37.47	13.01	2.23	34.78	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11n HT20 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz 802.11n HT20 LF		30.97	19.65	-20.35	40	35.34	18.8	0.74	35.23	156	189	P	H
		78.5	16.88	-23.12	40	42.42	8.77	1.15	35.46	-	-	P	H
		190.05	18.82	-24.68	43.5	42.31	9.75	1.79	35.03	-	-	P	H
		208.48	16.59	-26.91	43.5	40.01	9.75	1.88	35.05	-	-	P	H
		323.91	19.8	-26.2	46	38.33	14.03	2.36	34.92	-	-	P	H
		690.57	21.09	-24.91	46	33.15	19.24	3.54	34.84	-	-	P	H
		30.97	20.37	-19.63	40	36.06	18.8	0.74	35.23	148	256	P	V
		80.44	20.02	-19.98	40	45.33	9	1.16	35.47	-	-	P	V
		159.01	16.62	-26.88	43.5	39.02	10.88	1.63	34.91	-	-	P	V
		215.27	17.28	-26.22	43.5	40.37	10.02	1.91	35.02	-	-	P	V
		252.13	20.86	-25.14	46	42.16	11.48	2.08	34.86	-	-	P	V
	359.8	18.48	-27.52	46	36.19	14.91	2.49	35.11	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11n HT40 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz 802.11n HT40 LF		30	18.85	-21.15	40	34.24	19.1	0.73	35.22	123	235	P	H
		80.44	18.79	-21.21	40	44.1	9	1.16	35.47	-	-	P	H
		208.48	16.02	-27.48	43.5	39.44	9.75	1.88	35.05	-	-	P	H
		323.91	19.52	-26.48	46	38.05	14.03	2.36	34.92	-	-	P	H
		359.8	18.59	-27.41	46	36.3	14.91	2.49	35.11	-	-	P	H
		574.17	21.1	-24.9	46	34.29	18.34	3.19	34.72	-	-	P	H
		30.97	19.92	-20.08	40	35.61	18.8	0.74	35.23	-	-	P	V
		76.56	20.36	-19.64	40	46.05	8.53	1.13	35.35	132	254	P	V
		154.16	17.57	-25.93	43.5	39.83	11.06	1.6	34.92	-	-	P	V
		197.81	16.64	-26.86	43.5	40.42	9.47	1.83	35.08	-	-	P	V
		252.13	20.73	-25.27	46	42.03	11.48	2.08	34.86	-	-	P	V
	323.91	18.48	-27.52	46	37.01	14.03	2.36	34.92	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.