

Regulatory Antenna Information

Platform	
Platform Owner	Acer Incorporated
Brand Name	Acer Incorporated
Model Name	California (ZH6)
ODM	Quanta Computer Inc.
Target Launch Date	
Antenna	
Brand Name	Wistron NeWeb Corporation
Part Number	■ WWAN + WLAN : DQ6T15GCH00
Module	
With WLAN Module	<input type="checkbox"/> WM3B2200BG
(Check Box)	<input type="checkbox"/> WM3B2915ABG
	<input type="checkbox"/> WM3945ABG
	<input type="checkbox"/> 4965AGN
	<input type="checkbox"/> 4965AG_
	<input type="checkbox"/> 533ANX Family
	<input type="checkbox"/> 512ANX Family
	<input type="checkbox"/> 533AN Family
	<input type="checkbox"/> 512AN Family

Antenna Sample / Antenna Data Requirements for worldwide regulatory approval

Section	Description of Required OEM / ODM Antenna Information	US / IC	EU	Japan	Taiwan	S.Korea
1A	Part Number for Antenna only	Required	Required	Required	Required	Required
1B	Antenna Manufacturer Name	Required	Required	Required	Required	Required
1C	Description of Antenna Type	Required	N/A	N/A	N/A	N/A
1D	Part number of Antenna Assembly / cable impedance, length & diameter.	Required	Desired	Desired	Desired	Desired
1E	Tx1, Tx2 & Tx3 antenna (Peak Gain W/ cable loss) *	Required	Required	Required	Required	Required
	1E OR 1F, 1G, 1H					
1F	Tx1, Tx2 & Tx3 antenna (Peak Gain only) *	Required	Required	Required	Required	Required
1G	VSWR of cable including connector	Required	Required	Required	Required	Required
1H	Tx1, Tx2 & Tx3 antenna (Cable loss W/ connector) *	Required	Required	Required	Required	Required
2	Dimensioned Photographs and Drawings of Tx1, Tx2, and Tx3 (or Rx3) antennas	Required	Required	Required	Required	Required
3	Radiation patterns of antennas loaded in the host platform.	Required	Desired	Required	N/A	Required
4	Platform model name / number - correlated to antenna manufacturer and antenna part number	Required	Required	Desired	Required	Desired
5	Photograph(s) or Drawings showing location of antennas in platform. (S. Korea requires photographs of antennas for approval submission). Taiwan requires pictures of each antenna type shown in the system.	Required	Required	Desired	Required (Photos)	Required (Photos)
6	Mech. drawings / photos with dimensions of antenna locations and distance from end-user (For evaluation of SAR testing requirement).	Required	N/A	N/A	N/A	N/A
7	Photograph(s) or Drawings showing the location of all antennas (WLAN, other) and distance between those transmitting antennas. Information will be used to evaluate whether co-location testing is required.	Required	N/A	N/A	N/A	N/A
8	Local representative contact information for LMA/ PARS process.	Required	N/A	N/A	N/A	N/A

NOTE:

(*) if 3rd antenna is Rx only (e.g. receive only for 4965AGN) then peak gain and cable loss not required

Antenna Information

Section 1. Antenna Assembly Specifications

Antenna Assembly Summary:

1A Antenna Part Number	1B Manufacture	1C Antenna Type	1D Cable Assembly Part Number and Information	1E Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G VSWR	1H Cable Loss (dBi)
3G main Antenna P/N: DQ6T15GCH00	Wistron NeWeb Corporation	PIFA	P/N: 50.EBC62.116 50 ohm Coaxial. length: 497 mm diameter: 1.13 mm Connector: IPEX	824-894MHz -1.41 dBi (peak)	824-894MHz -0.69 dBi (peak)	824-894MHz 3.0 max	824-894MHz 0.72 dBi (peak)
				869-894MHz -0.99 dBi (peak)	869-894MHz -0.27 dBi (peak)	869-894MHz 3.0 max	869-894MHz 0.72 dBi (peak)
				900-925MHz -1.67 dBi (peak)	900-925MHz -0.95 dBi (peak)	900-925MHz 3.0 max	900-925MHz 0.72 dBi (peak)
				940-1710MHz 0.44 dBi (peak)	940-1710MHz 1.16 dBi (peak)	940-1710MHz 3.0 max	940-1710MHz 0.72 dBi (peak)
				1750~1805MHz 1.08 dBi (peak)	1750~1805MHz 2.15 dBi (peak)	1750~1805MHz 4.0 max	1750~1805MHz 1.07 dBi (peak)
				1840~1910MHz 1.88 dBi (peak)	1840~1910MHz 2.95 dBi (peak)	1840~1910MHz 4.0 max	1840~1910MHz 1.07 dBi (peak)
				1920~1950MHz 1.50 dBi (peak)	1920~1950MHz 2.57 dBi (peak)	1920~1950MHz 3.0 max	1920~1950MHz 1.07 dBi (peak)
				1960~1990MHz 0.72 dBi (peak)	1960~1990MHz 1.79 dBi (peak)	1960~1990MHz 3.0 max	1960~1990MHz 1.07 dBi (peak)
				2110~2170MHz 0.41 dBi (peak)	2110~2170MHz 2.19 dBi (peak)	2110~2170MHz 3.0 max	2110~2170MHz 1.78 dBi (peak)
				3G AUX Antenna P/N: DQ6T15GCH00	Wistron NeWeb Corporation	PIFA	P/N: 50.EBC62.115 50 ohm Coaxial. Length: 709 mm Diameter: 1.13 mm
1930-2170MHz -2.50 dBi (peak)	1930-2170MHz -0.05 dBi (peak)	1930-2170MHz 3.0 max	1930-2170MHz 2.45 dBi (peak)				
WLAN MAIN Antenna P/N: DQ6T15GCH00	Wistron NeWeb Corporation	PIFA	P/N: 50.ED405.001 50 ohm Coaxial. length: 485 mm diameter: 1.13 mm Connector: IPEX	2400-2450MHz -2.10 dBi (peak)	2400-2450MHz 2.33 dBi (peak)	2400-2450MHz 2.0 max	2400-2450MHz 1.74 dBi (peak)
				2450-2500MHz -3.23 dBi (peak)	2450-2500MHz 2.33 dBi (peak)	2450-2500MHz 2.5 max	2450-2500MHz 1.74 dBi (peak)
				5150-5350MHz 2.40 dBi (peak)	5150-5470MHz 4.49 dBi (peak)	5150-5470MHz 2.5 max	5150-5470MHz 2.59 dBi (peak)
				5470-5725MHz -0.01 dBi (peak)	5470-5725MHz 2.64 dBi (peak)	5470-5725MHz 2.5 max	5470-5725MHz 2.65 dBi (peak)
				5725-5850MHz -0.05 dBi (peak)	5600-5750MHz 2.69 dBi (peak)	5600-5750MHz 2.5 max	5600-5750MHz 2.74 dBi (peak)

WLAN AUX Antenna P/N: DQ6T15GCH00	Wistron NeWeb Corporation	PIFA	P/N: : 50.ED404.001 50 ohm Coaxial. length: 738 mm diameter: 1.13 mm Connector: IPEX	2400-2450MHz	2400-2450MHz	2400-2450MHz	2400-2450MHz
				2.42 dBi (peak)	4.96 dBi (peak)	2.0 max	2.54 dBi (peak)
				2450-2500MHz	2450-2500MHz	2450-2500MHz	2450-2500MHz
				2.42 dBi (peak)	4.96 dBi (peak)	2.5 max	2.54 dBi (peak)
				5150-5350MHz	5150-5470MHz	5150-5470MHz	5150-5470MHz
2.05 dBi (peak)	2.05 dBi (peak)	2.5 max	3.82 dBi (peak)				
5470-5725MHz	5470-5725MHz	5470-5725MHz	5470-5725MHz				
0.56 dBi (peak)	4.46 dBi (peak)	2.5 max	3.91 dBi (peak)				
5725-5850MHz	5725-5850MHz	5725-5850MHz	5725-5850MHz				
0.67 dBi (peak)	4.71 dBi (peak)	2.5 max	4.04 dBi (peak)				

NOTE:

(*) If Rx3 only (3rd antenna receives only, e.g. for 4965AGN) then the information marked with * is not required

Antenna Peak Gain Table:

Main antenna Gain						
Frequency (MHz)	Max value			Average		
	H-pol (dBi)	V pol (dBi)	Total(dBi) (H-pol+V-pol)	H-pol (dBi)	V pol (dBi)	Total(dBi) (H-pol+V-pol)
824	-2.86	-4.21	-2.83	-10.42	-9.17	-5.96
836	-2.18	-3.09	-2.10	-9.51	-8.56	-5.31
849	-1.41	-2.31	-1.34	-8.29	-8.40	-4.68
869	-0.99	-2.03	-0.94	-7.23	-9.10	-4.40
880	-1.14	-2.20	-1.09	-6.77	-9.54	-4.26
894	-1.82	-3.47	-1.62	-6.51	-10.52	-4.44
900	-1.78	-4.05	-1.48	-6.19	-10.56	-4.21
915	-1.67	-4.94	-1.66	-6.10	-11.18	-4.34
925	-1.94	-4.88	-1.89	-6.21	-10.70	-4.38
940	-2.11	-4.66	-2.02	-6.82	-9.98	-4.53
960	-2.05	-5.33	-1.97	-7.13	-10.25	-4.78
1710	0.44	-2.83	0.68	-6.07	-10.18	-4.09
1750	0.03	-5.01	0.28	-5.86	-10.76	-4.20
1785	0.54	-2.99	0.77	-5.07	-9.99	-3.44
1805	1.08	-2.22	1.27	-4.50	-9.15	-2.79
1840	1.88	-1.39	1.89	-4.29	-8.11	-2.34
1880	1.79	-1.55	1.85	-4.46	-7.71	-2.36
1910	1.50	-1.19	1.80	-5.00	-8.01	-2.87
1920	1.25	-1.39	1.83	-5.12	-8.03	-2.96
1950	0.72	-1.87	1.70	-5.30	-8.14	-3.13
1960	0.61	-1.87	1.70	-5.30	-8.10	-3.13
1990	0.41	-2.08	1.76	-5.46	-7.99	-3.18
2110	-0.81	-1.50	1.04	-6.60	-7.51	-3.77
2140	-1.44	-1.47	0.78	-7.79	-7.71	-4.50
2170	-1.93	-1.87	0.75	-7.43	-7.69	-4.28

3G Aux antenna Gain

Frequency (MHz)	Max value		Average	
	H-pol (dBi)	V pol (dBi)	H-pol (dBi)	V pol (dBi)
869	-0.98	-3.46	-7.57	-6.33
880	-1.32	-4.32	-7.93	-7.16
894	-1.43	-4.70	-7.96	-7.30
1930	-4.04	-4.06	-9.58	-8.39
1960	-3.67	-3.30	-8.95	-8.04
1990	-2.53	-2.50	-8.62	-7.66
2110	-1.57	-2.20	-7.44	-7.30
2140	-1.51	-1.86	-7.55	-7.29
2170	-3.10	-3.97	-7.84	-8.17

WLAN Main antenna Gain

Frequency (MHz)	Max value		Average	
	H-pol (dBi)	V pol (dBi)	H-pol (dBi)	V pol (dBi)
2400	-2.23	-2.10	-5.59	-7.36
2450	-3.23	-4.15	-7.33	-8.13
2500	-3.29	-5.34	-7.60	-8.49
5150	2.40	-2.05	-5.61	-8.47
5250	0.67	-2.23	-6.15	-7.89
5350	-1.73	-0.80	-6.24	-8.08
5470	-0.18	-2.14	-6.09	-9.44
5600	-0.01	-3.77	-6.41	-9.29
5725	-0.05	-4.46	-6.96	-9.60
5785	-0.58	-4.74	-7.25	-9.54
5850	-2.33	-4.17	-7.42	-9.96


WLAN AUX antenna Gain


Frequency (MHz)	Max value		Average	
	H-pol (dBi)	V pol (dBi)	H-pol (dBi)	V pol (dBi)
2400	-0.30	-2.31	-6.02	-9.49
2450	0.85	-0.31	-6.74	-8.11
2500	-1.35	-1.02	-6.90	-8.62
5150	1.38	-3.35	-7.78	-10.03
5250	1.55	-3.35	-7.71	-10.06
5350	0.78	-3.01	-7.12	-10.05
5470	0.43	-3.08	-6.67	-9.47
5600	-0.40	-4.21	-7.45	-9.76
5725	-2.58	-3.66	-9.43	-10.04
5785	-4.03	-1.58	-9.94	-8.49
5850	0.67	-1.17	-4.42	-6.97

- Antenna Peak Gain required being test in system basis.
- 1E frame contend absolutely peak antenna gain include H/V
- If Rx3 only (3rd antenna receives only, e.g. for 4965AGN) then the information is not required for Rx3.


Sectio3. Radiation characteristics of antennae Loaded in Host Platform

WWAN MAIN

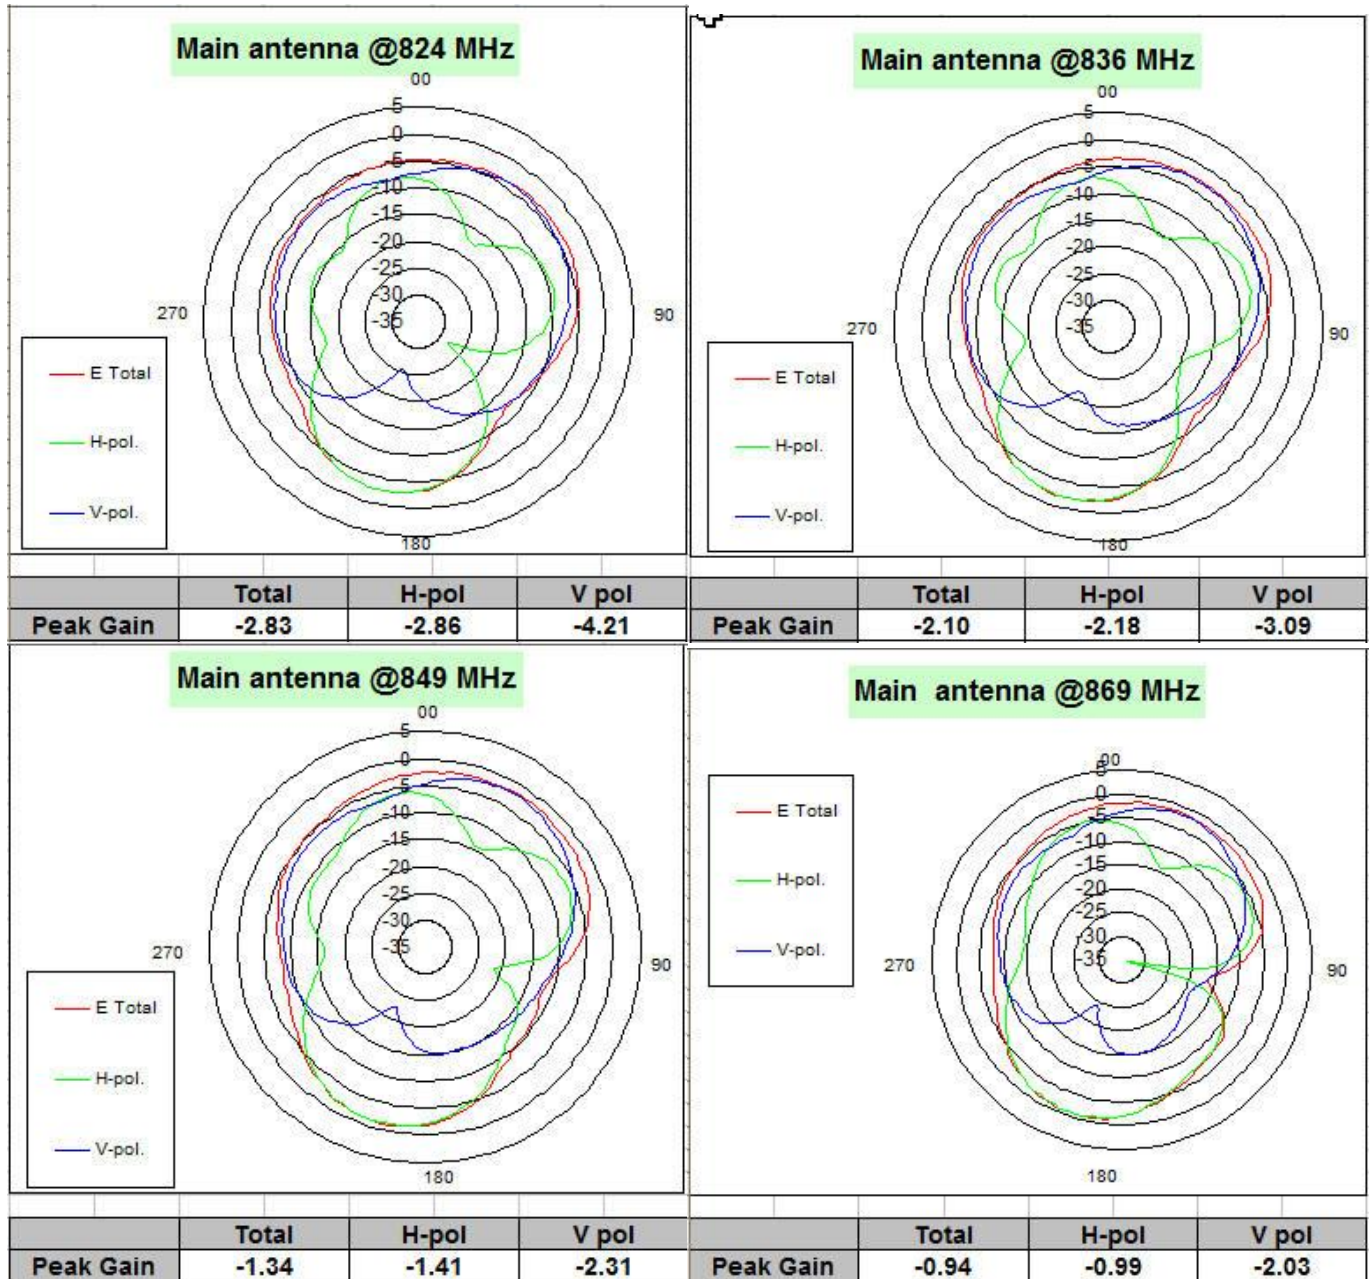


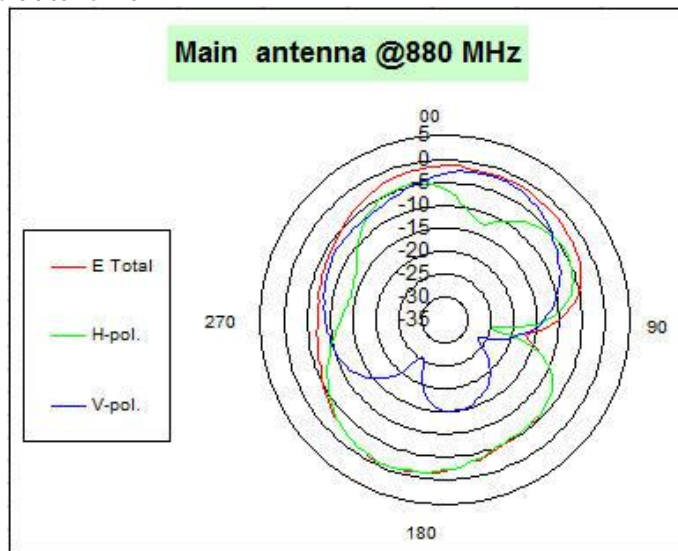


	Total	H-pol	V pol
Peak Gain	-1.09	-1.14	-2.20

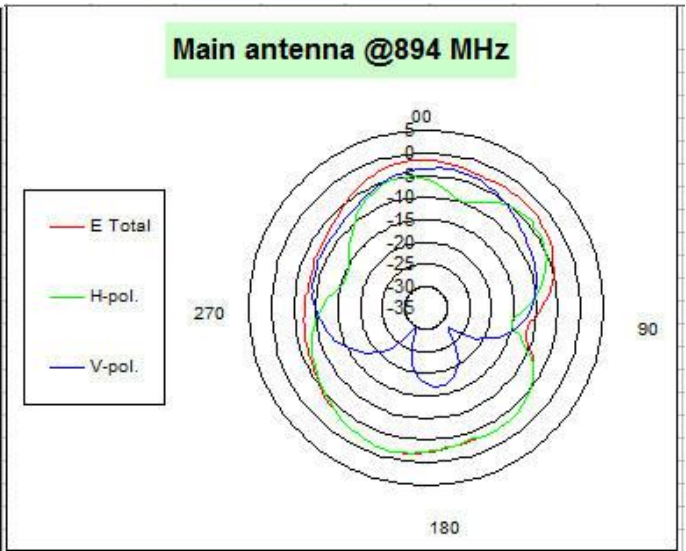


	Total	H-pol	V pol
Peak Gain	-1.62	-1.82	-3.47

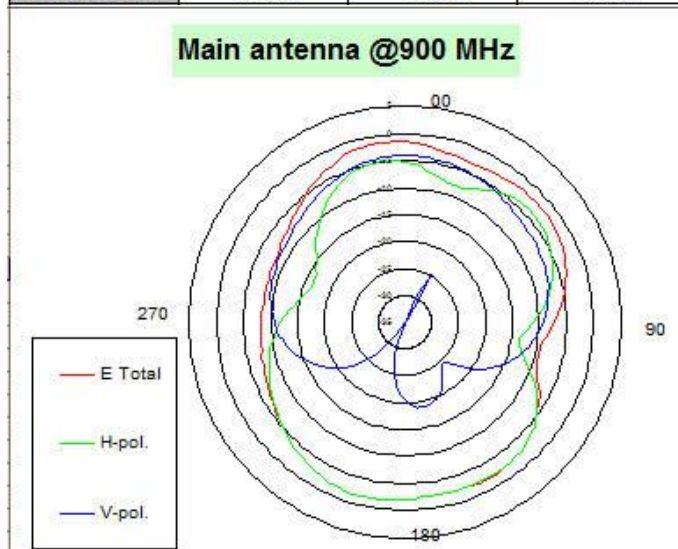


	Total	H-pol	V pol
Peak Gain	-1.48	-1.78	-4.05

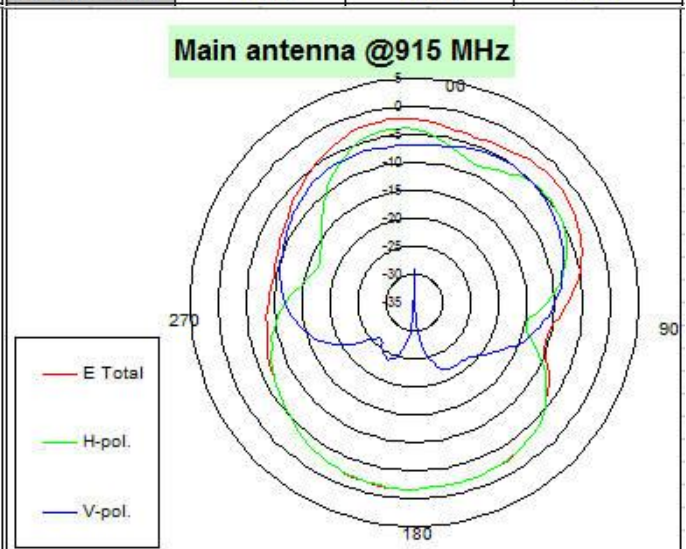



	Total	H-pol	V-pol
Peak Gain	-1.66	-1.67	-4.94

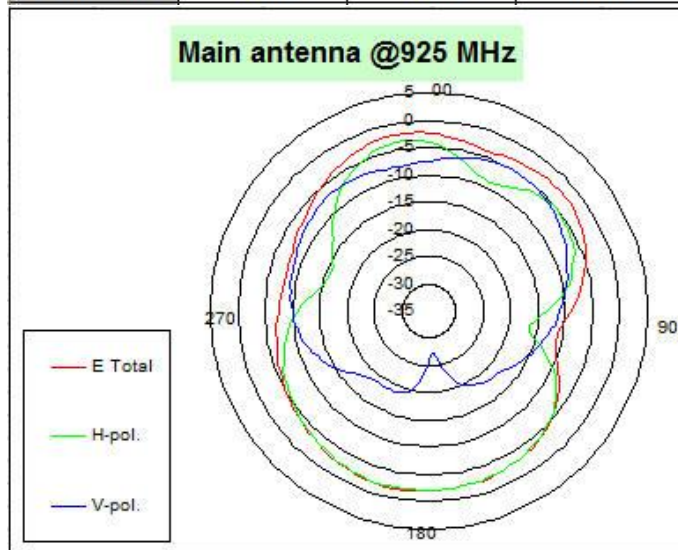

	Total	H-pol	V pol
Peak Gain	-1.89	-1.94	-4.88


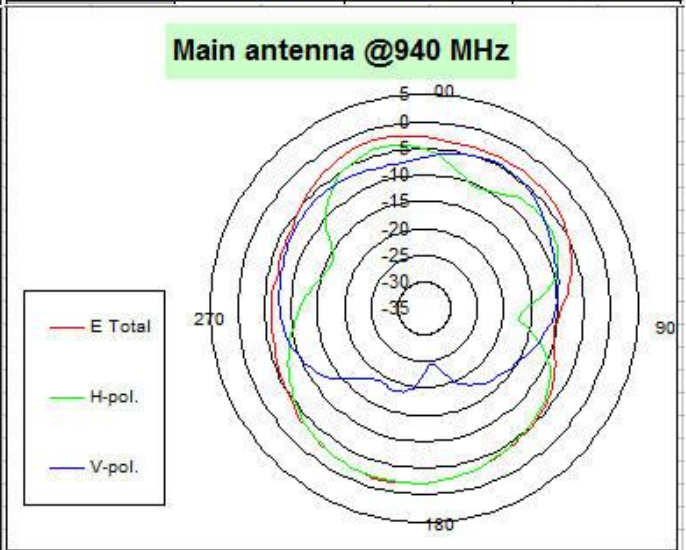


	Total	H-pol	V pol
Peak Gain	-2.02	-2.11	-4.66

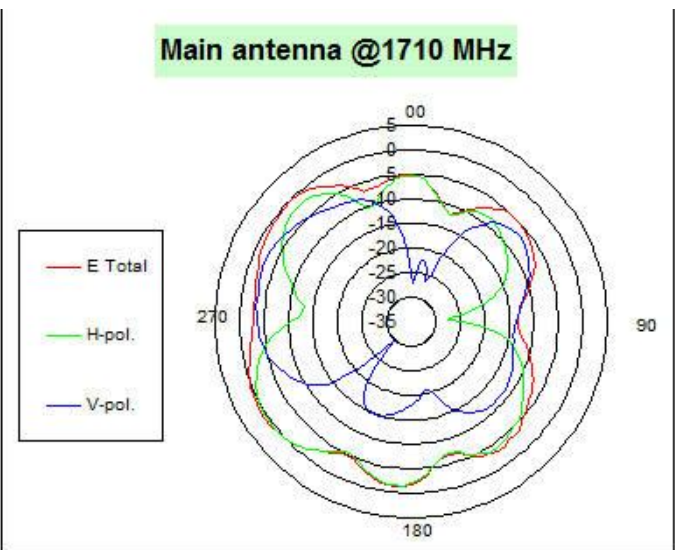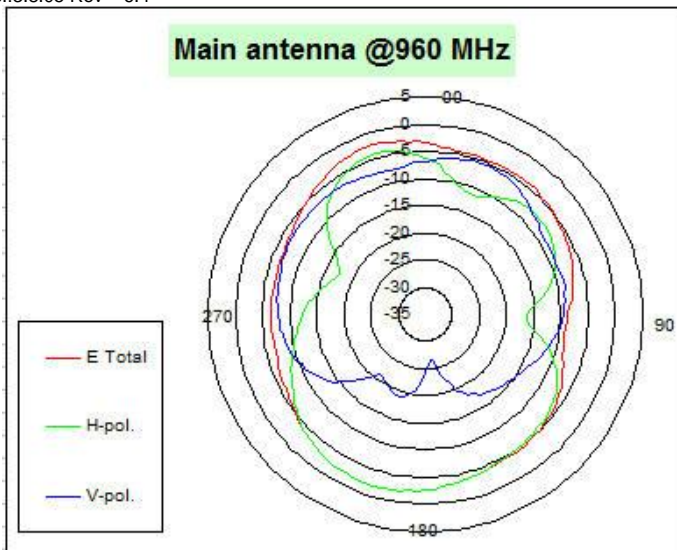



	Total	H-pol	V pol
Peak Gain	-1.97	-2.05	-5.33

	Total	H-pol	V pol
Peak Gain	0.68	0.44	-2.83

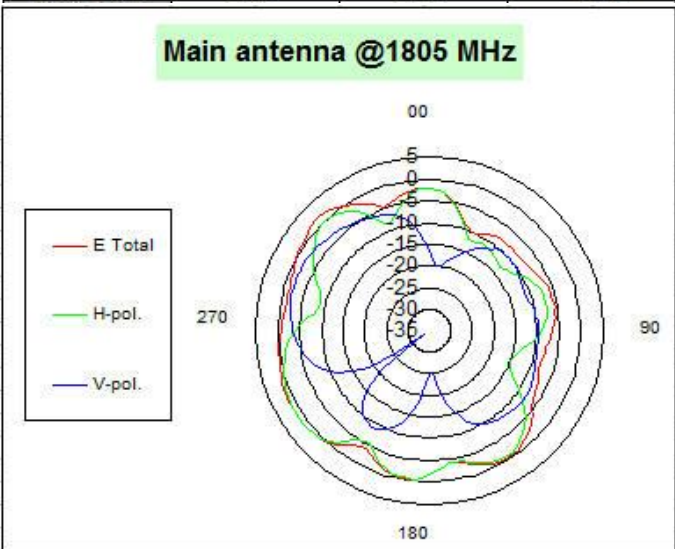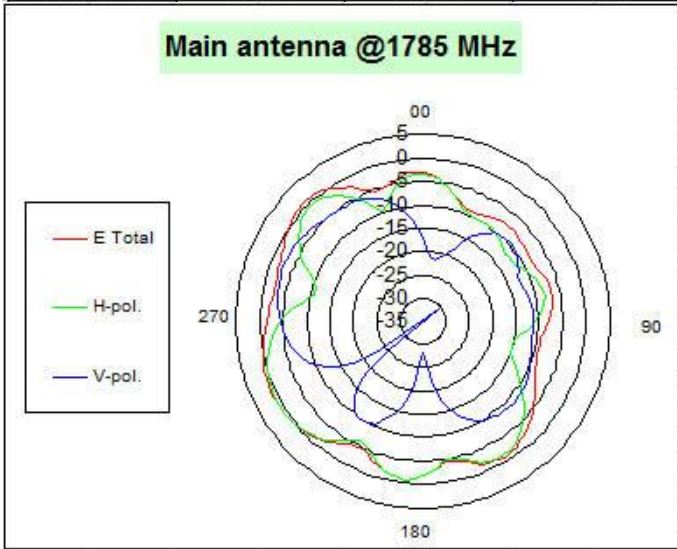



	Total	H-pol	V pol
Peak Gain	0.77	0.54	-2.99

	Total	H-pol	V pol
Peak Gain	1.27	1.08	-2.22

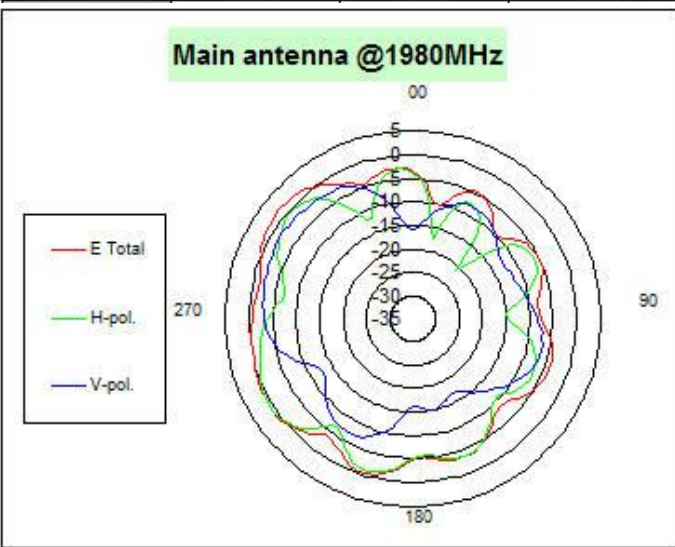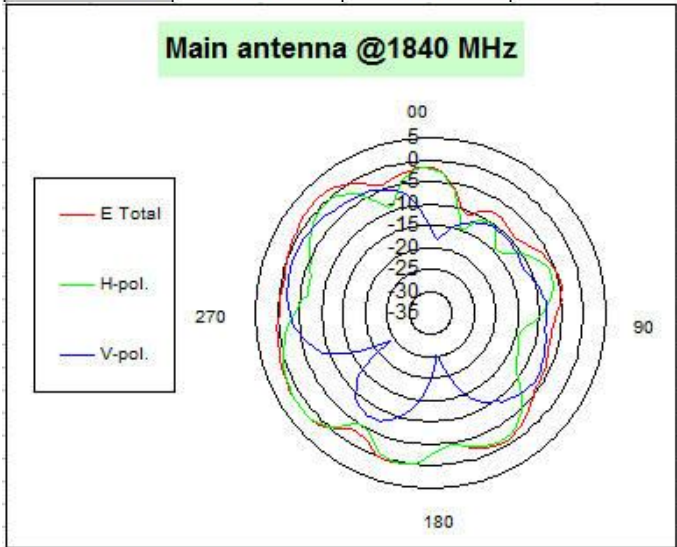



	Total	H-pol	V pol
Peak Gain	1.89	1.88	-1.39

	Total	H-pol	V pol
Peak Gain	1.70	0.61	-1.87

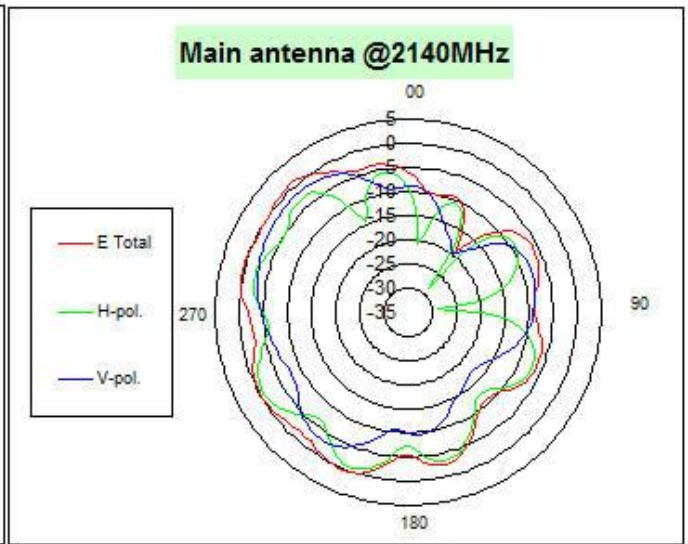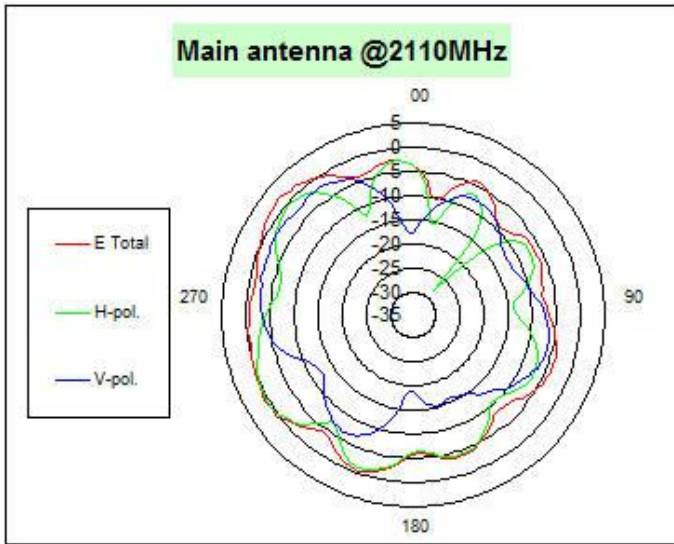

	Total	H-pol	V pol
Peak Gain	1.76	0.41	-2.08


	Total	H-pol	V pol
Peak Gain	1.04	-0.81	-1.50

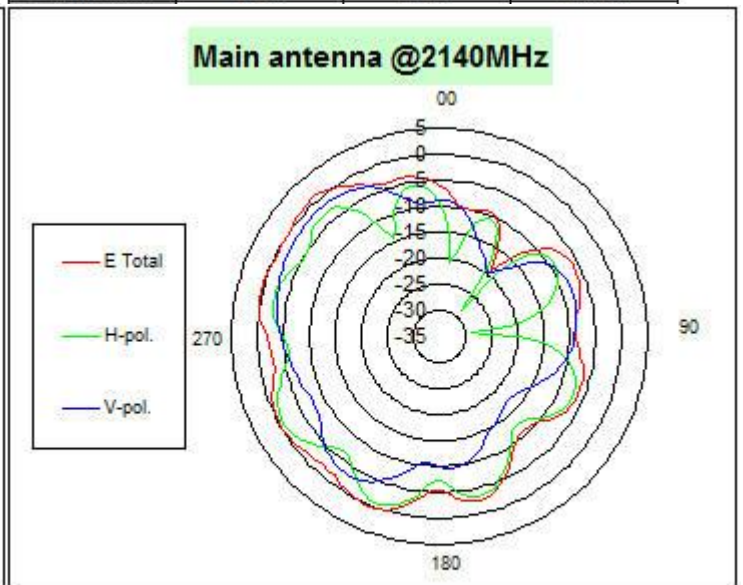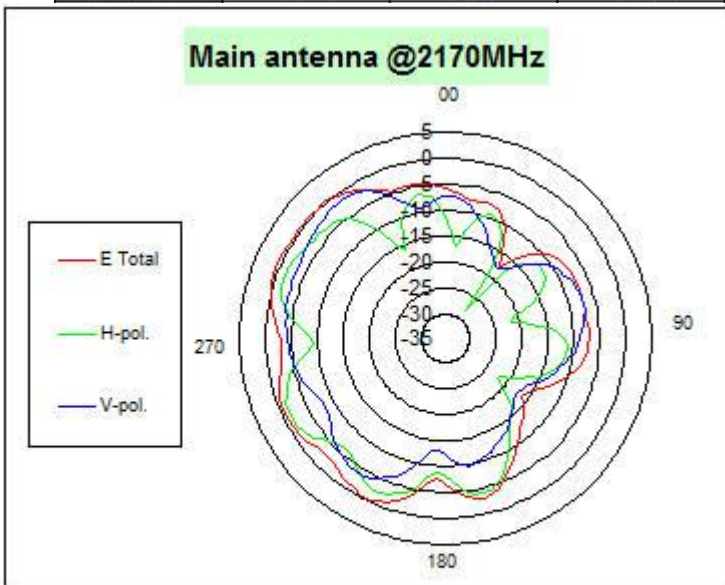


	Total	H-pol	V pol
Peak Gain	0.78	-1.44	-1.47

	Total	H-pol	V pol
Peak Gain	1.04	-0.81	-1.50


WWAN AUX

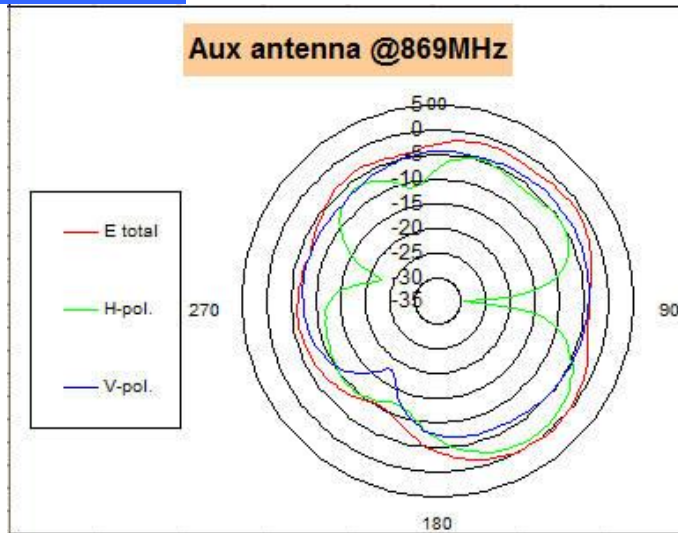


	Total	H-pol	V pol
Peak Gain	0.21	-0.98	-3.46

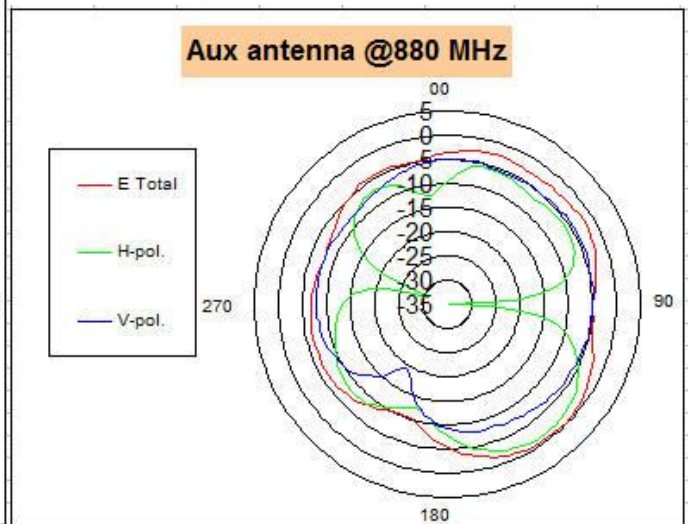


	Total	H-pol	V pol
Peak Gain	-0.28	-1.32	-4.32

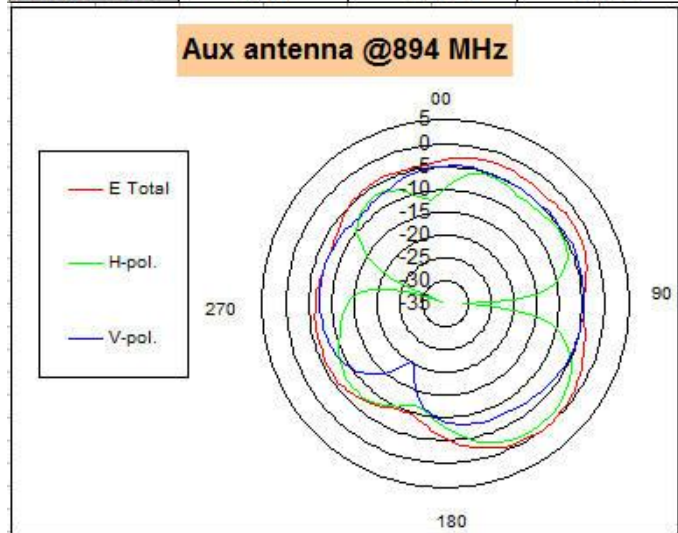


	Total	H-pol	V pol
Peak Gain	-0.45	-1.43	-4.70

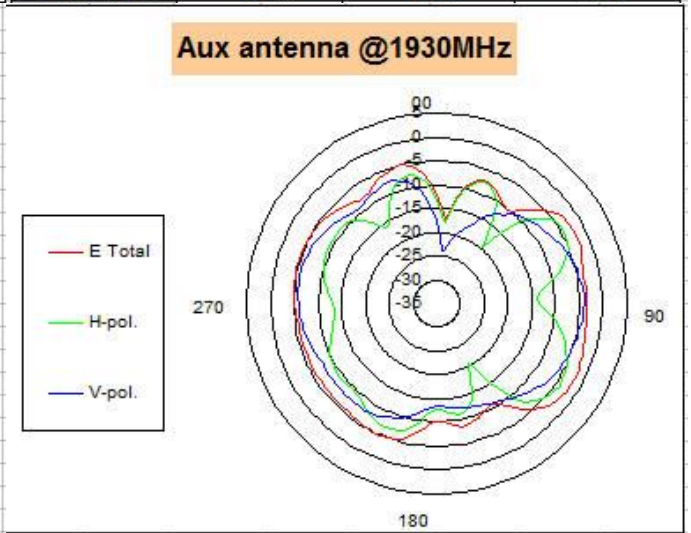



	Total	H-pol	V pol
Peak Gain	-2.02	-4.04	-4.06

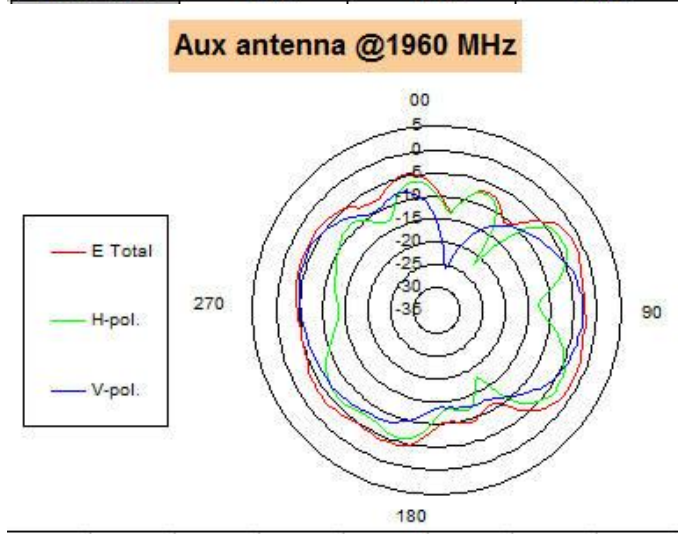


	Total	H-pol	V pol
Peak Gain	-1.68	-3.67	-3.30

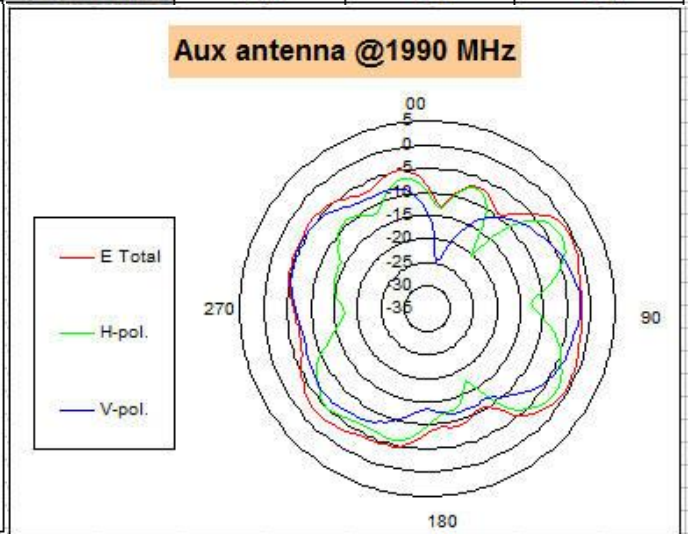

	Total	H-pol	V pol
Peak Gain	-0.73	-2.53	-2.50

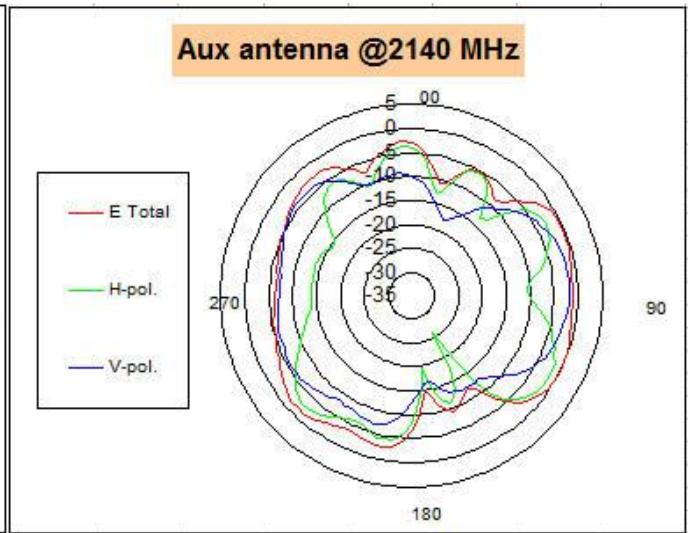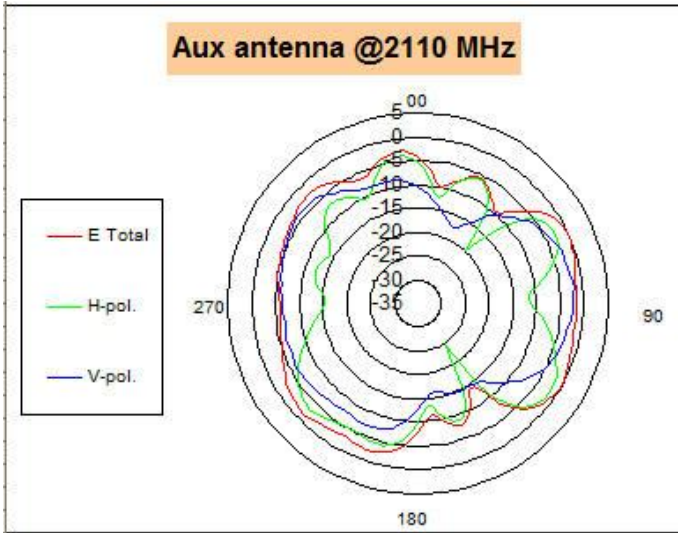


	Total	H-pol	V pol		Total	H-pol	V pol
Peak Gain	-0.28	-1.57	-2.20	Peak Gain	-0.02	-1.51	-1.86

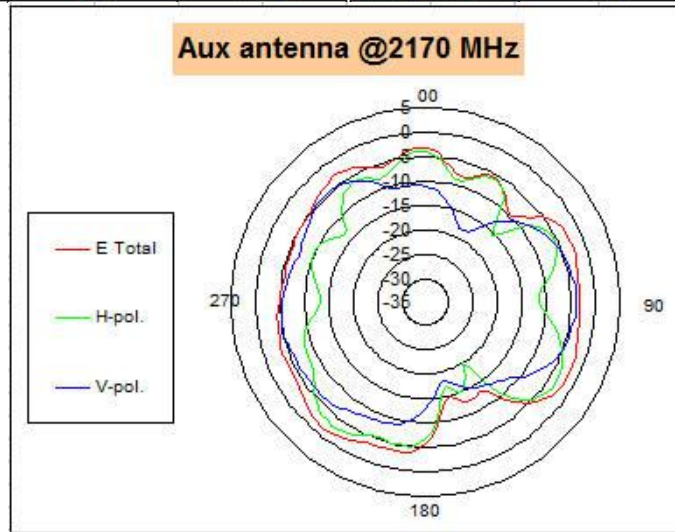


	Total	H-pol	V pol
Peak Gain	-1.59	-3.10	-3.97

WLAN MAIN

WLAN antenna @2.40GHz

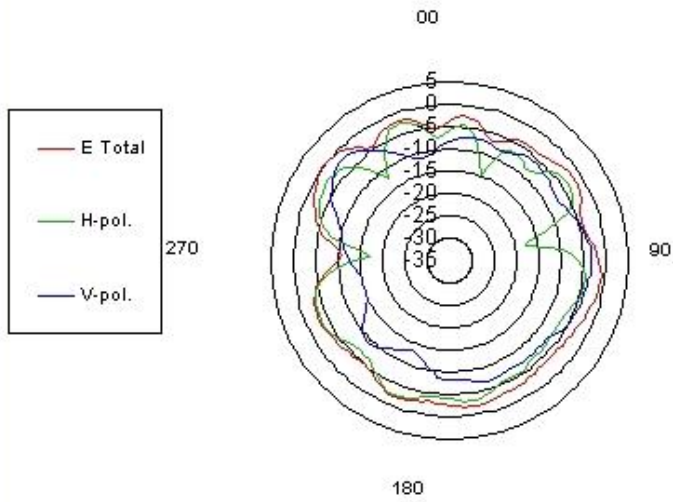


WLAN antenna @2.45GHz

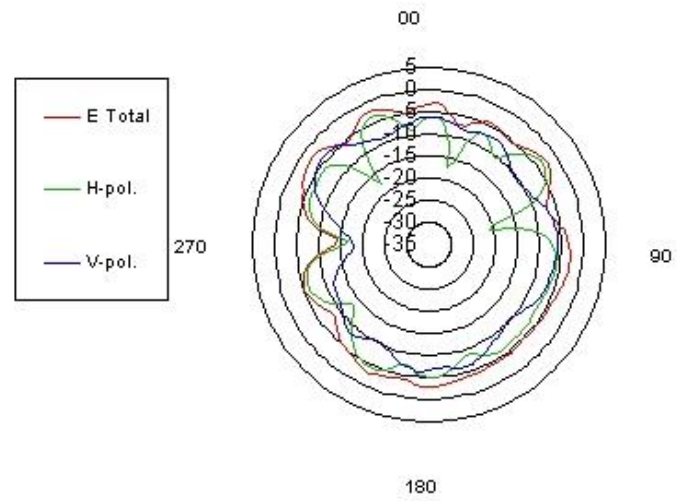


	Total	H-pol	V pol		Total	H-pol	V pol
Peak Gain	0.38	-2.23	-2.10	Peak Gain	-2.01	-3.23	-4.15


WLAN antenna @2.50GHz

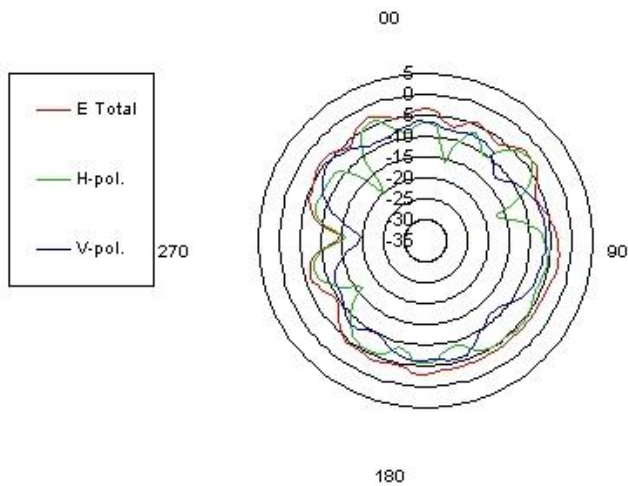


WLAN antenna @5.15 GHz

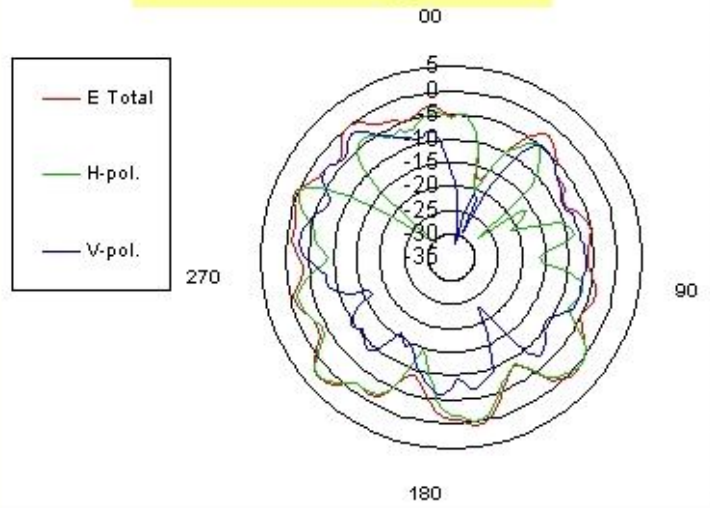


	Total	H-pol	V pol		Total	H-pol	V pol
Peak Gain	-2.57	-3.29	-5.34	Peak Gain	2.62	2.40	-2.05

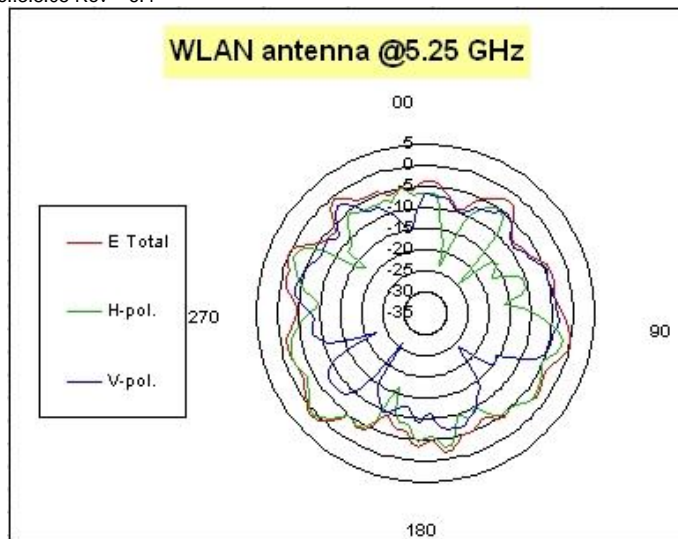


	Total	H-pol	V pol
Peak Gain	1.29	0.67	-2.23

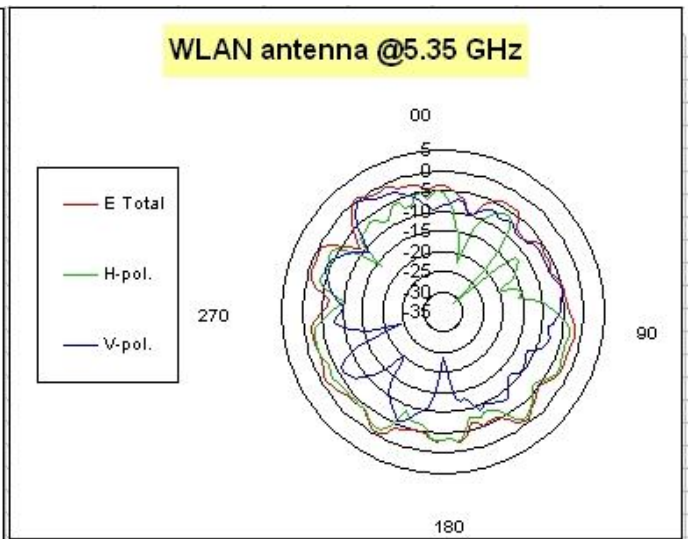


	Total	H-pol	V pol
Peak Gain	0.18	-1.73	-0.80

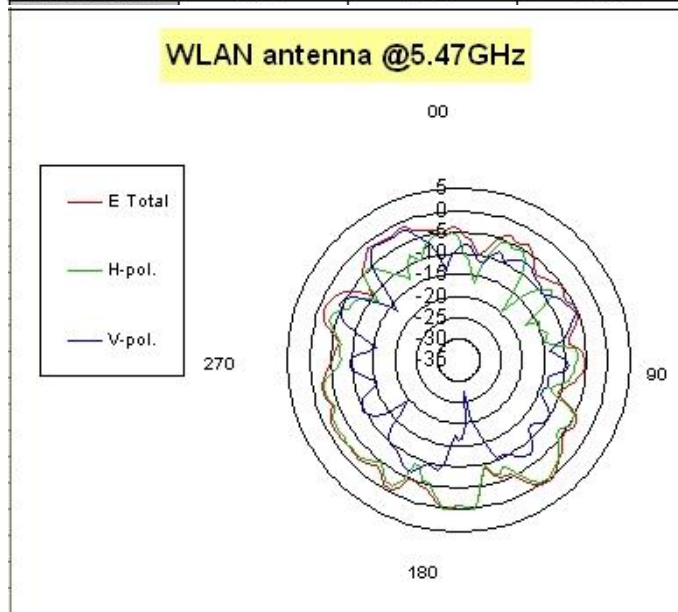


	Total	H-pol	V pol
Peak Gain	0.58	-0.18	-2.14

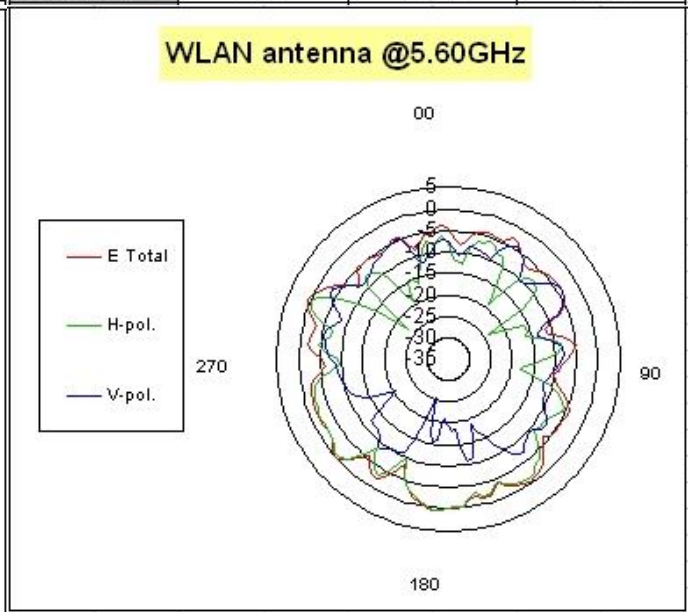


	Total	H-pol	V pol
Peak Gain	0.52	-0.01	-3.77

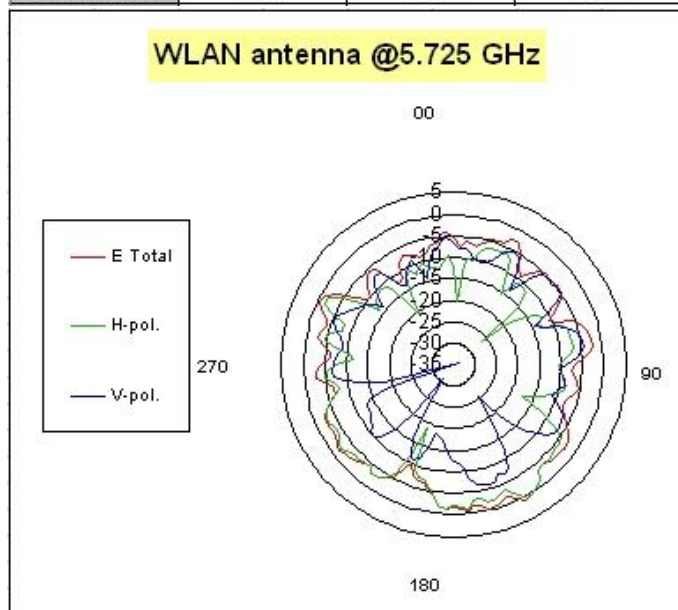


	Total	H-pol	V pol
Peak Gain	0.38	-0.05	-4.46

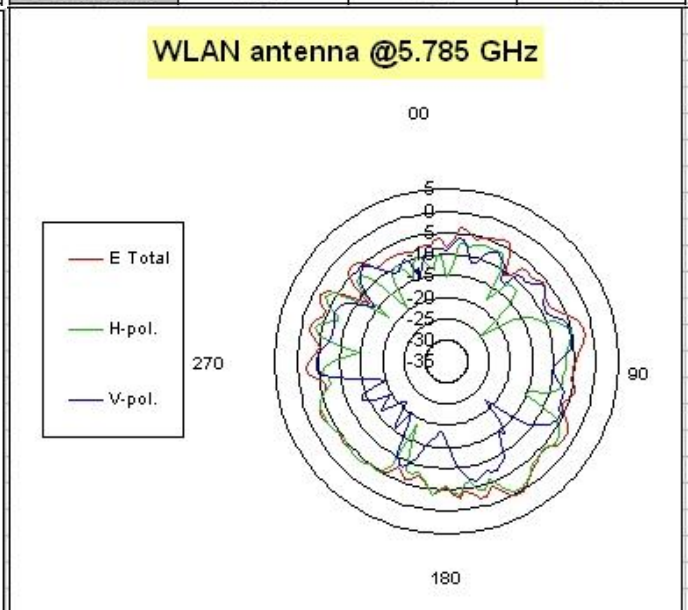


	Total	H-pol	V pol
Peak Gain	0.16	-0.58	-4.74

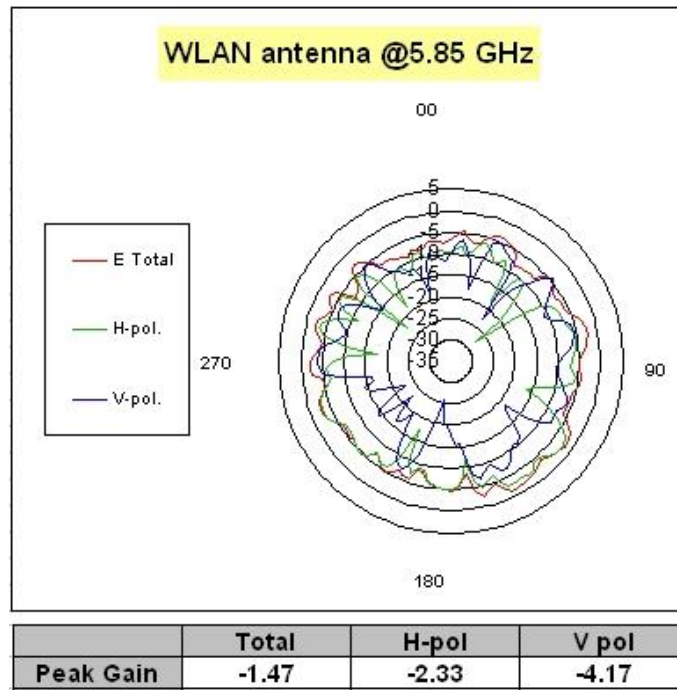

WLAN AUX

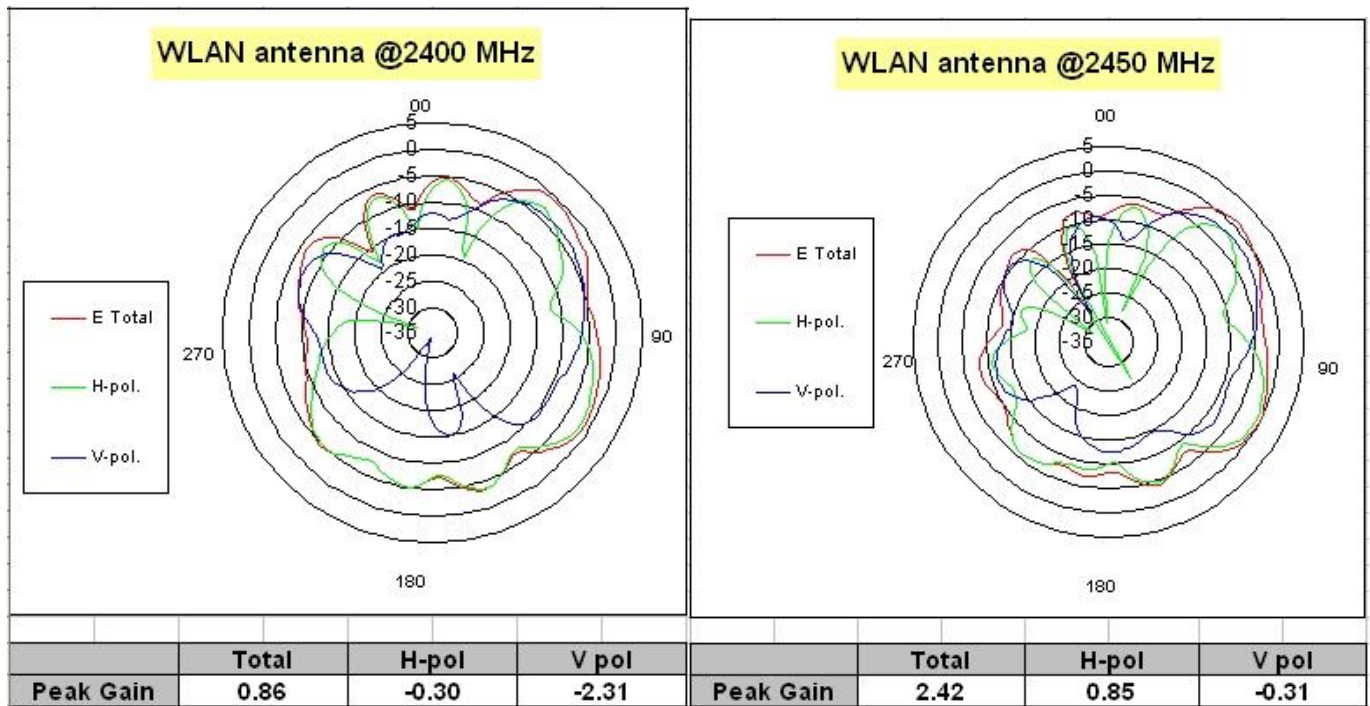


WLAN antenna @2500 MHz

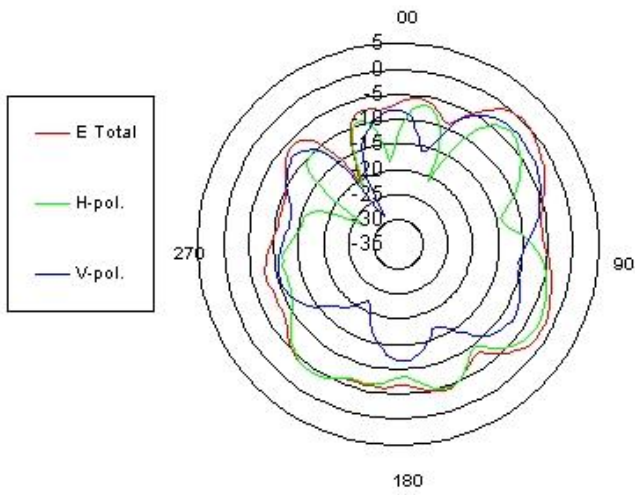


	Total	H-pol	V pol
Peak Gain	1.56	-1.35	-1.02

WLAN antenna @5150 MHz

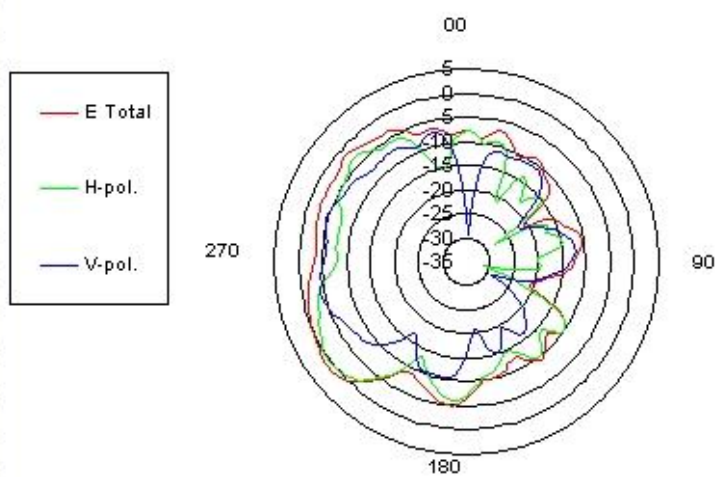


	Total	H-pol	V pol
Peak Gain	1.97	1.38	-3.35

WLAN antenna @5250 MHz

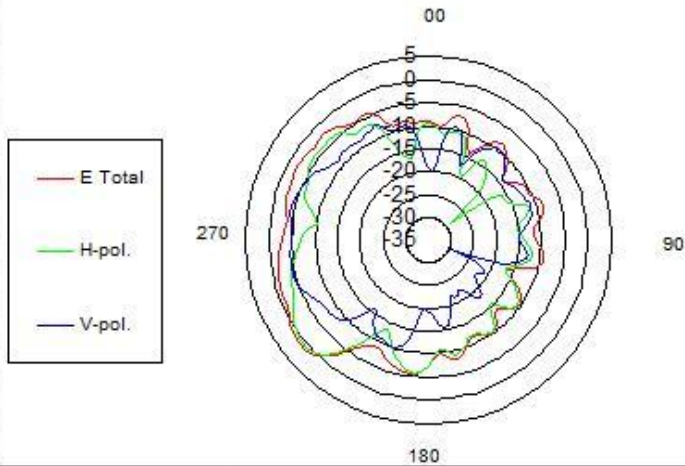


	Total	H-pol	V pol
Peak Gain	2.05	1.55	-3.35

WLAN antenna @5350 MHz

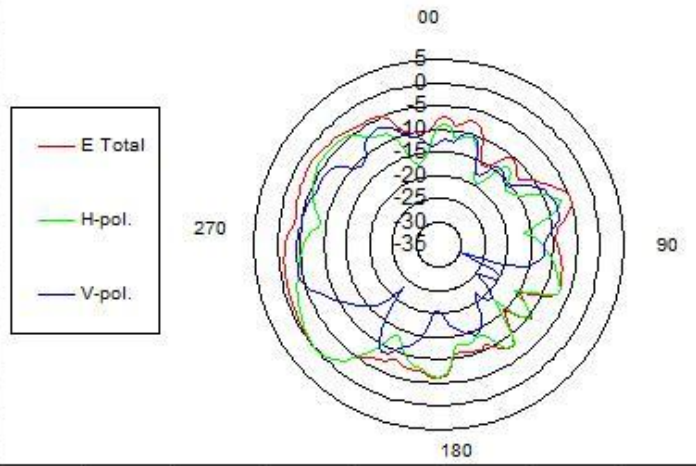


	Total	H-pol	V pol
Peak Gain	0.99	0.78	-3.01

WLAN antenna @5470 MHz

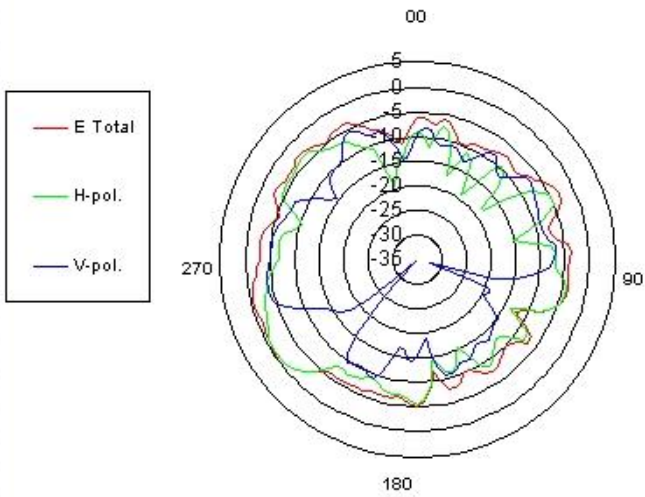


WLAN antenna @5600 MHz

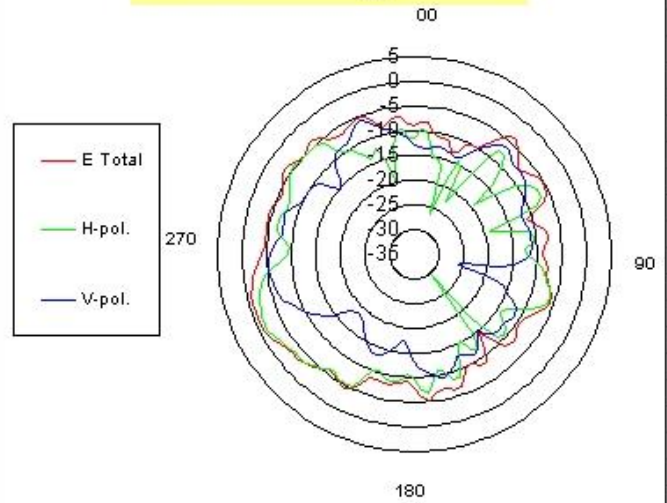


	Total	H-pol	V pol
Peak Gain	0.56	0.43	-3.08

	Total	H-pol	V pol
Peak Gain	0.44	-0.40	-4.21

WLAN antenna @5725 MHz

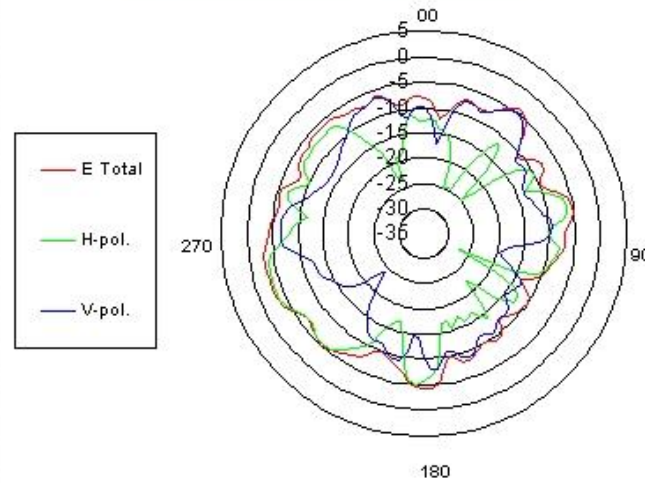


WLAN antenna @5785 MHz

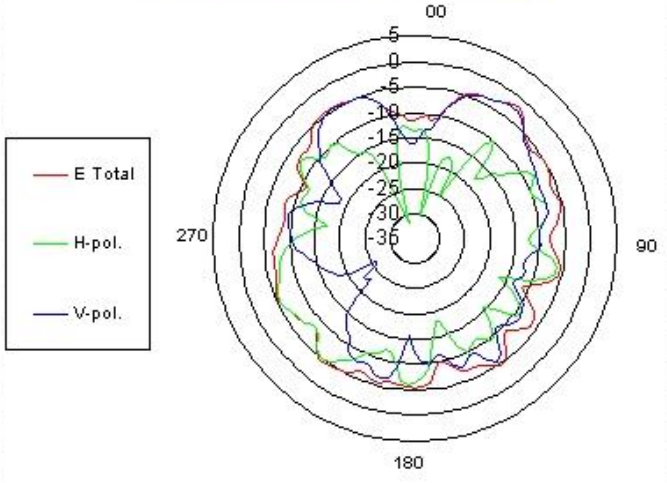

	Total	H-pol	V pol
Peak Gain	-2.02	-2.58	-3.66

	Total	H-pol	V pol
Peak Gain	-1.07	-4.03	-1.58

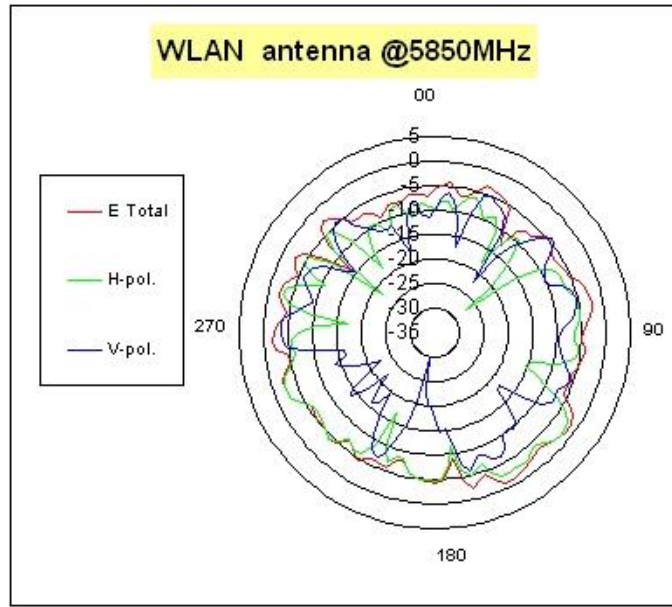


	Total	H-pol	V pol
Peak Gain	0.03	0.67	-1.17

Section 4. Host Platform Information

OEM / ODM Host platform: (XXXXXXX) platform correlated to antenna data
Rating Label Photo:


Section 5. Antenna Host Platform Location Information

Include a **dimensioned photo or dimensioned drawing** of Tx1, Tx2 and Tx3 antenna placements. (Not applicable for receive-only antenna e.g. Rx3 for 4965AGN)

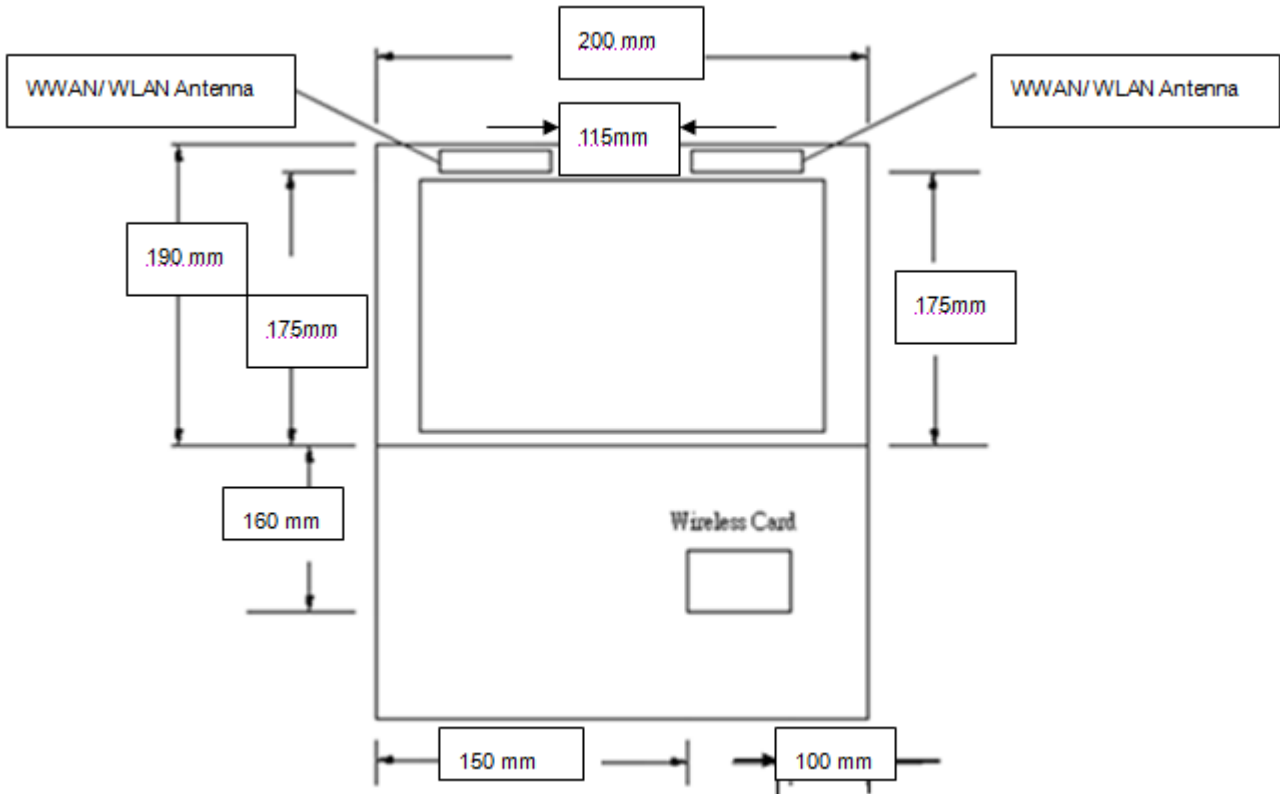

Section 6. Antenna dimensional information for SAR evaluation


Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between the transmit antennas and the user (excluding hands, wrist, feet, lap/ thigh, and ankle)

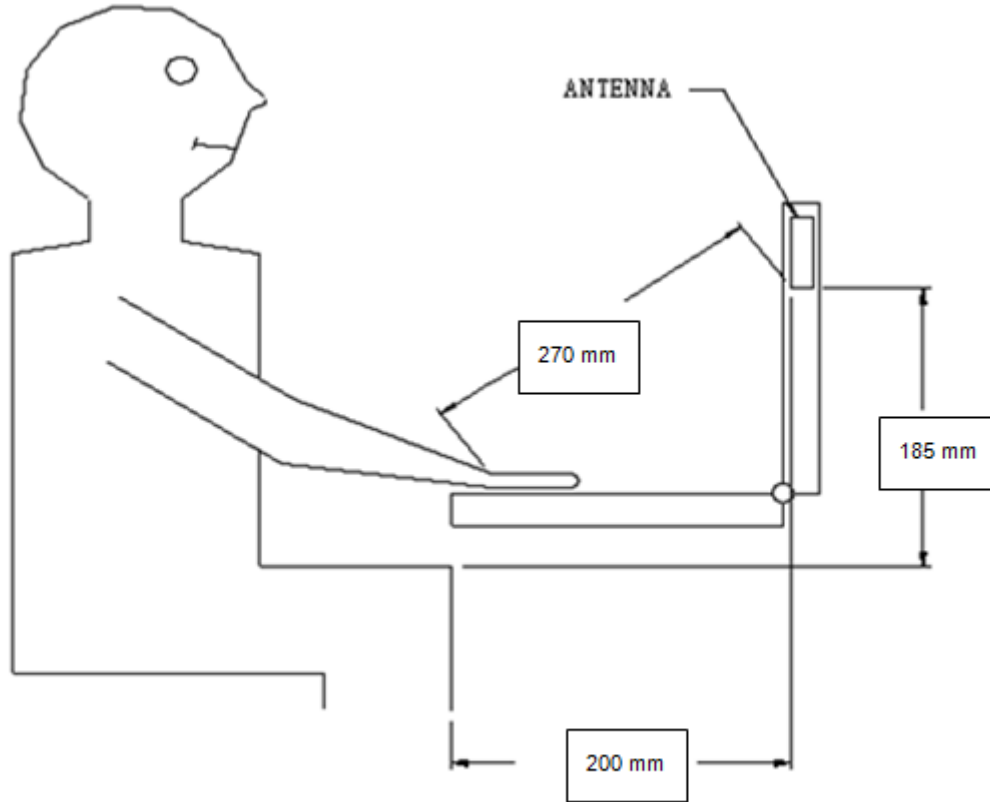

Section 7. Diagram Example of Co-Location Antenna Separation

Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between all WLAN transmit antennas and other co-located radiator transmit antenna such as Bluetooth, WWAN,..

(Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

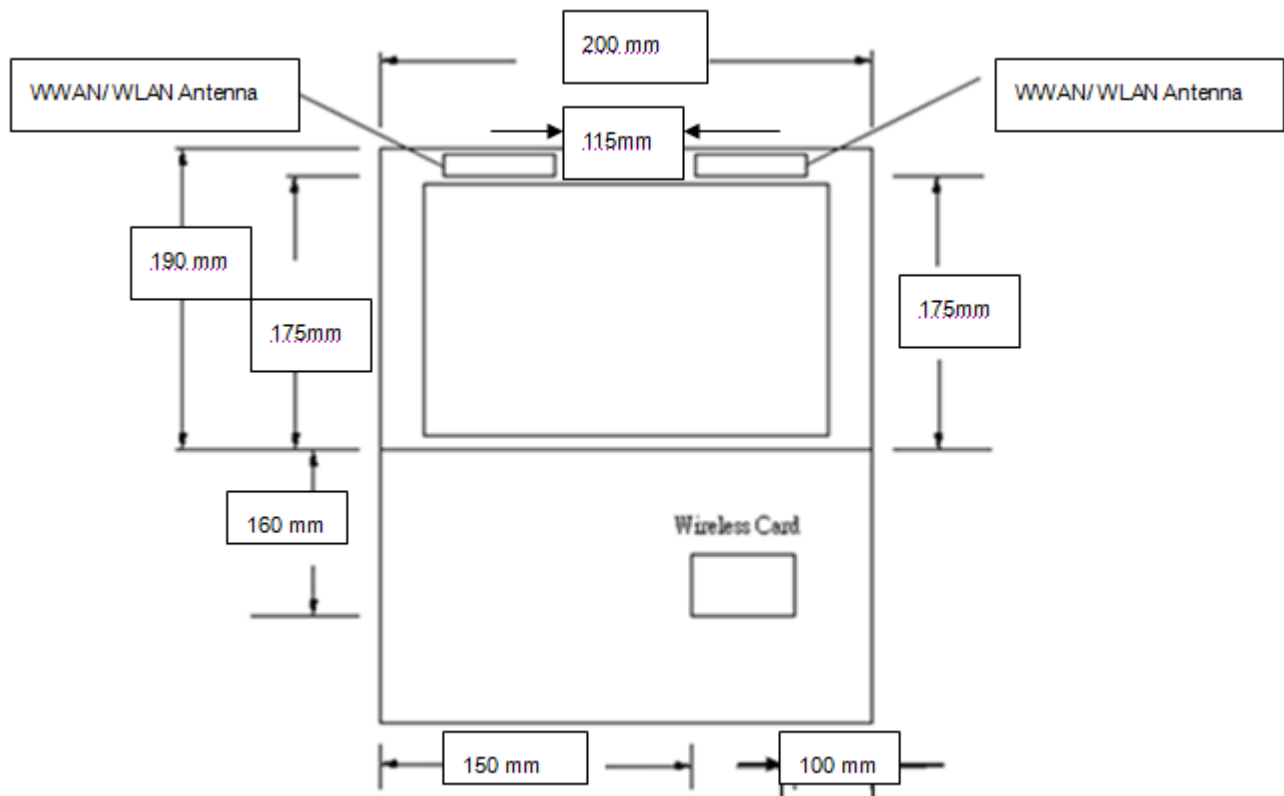

Section 8. Local representative contact information

Local representative contact information is required for regulatory support for target countries below.

	Local company name	Contact name	Phone number	FAX Number	e-Mail Address	Notes
Argentina						
Brazil						
Indonesia						
Israel						
Malaysia						
Mexico						
Singapore						Telecommunication Equipment Dealer License Required
South Africa						
USA, Canada						