

Page: 1 of 108

RF Exposure report





The following samples were submitted and identified on behalf of the client as:

Notebook Computer **Product Name**

acer **Brand Name**

N24C10 Model No.

Acer Incorporated **Applicant**

8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi, New Taipei City

22181, Taiwan (R.O.C)

IEEE/ANSI C95.1-1992, IEEE 1528-2013 **Standards**

FCC ID HLZQCNCM825

Date of EUT Receipt Apr. 10, 2024

May 16, 2024 ~ May 21, 2024 Date of Test(s)

Date of Issue Jun. 05. 2024

In the configuration tested, the EUT complied with the standards specified above.

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Ltd. Central RF Lab or testing done by SGS Taiwan Ltd. Central RF Lab in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Ltd. Central RF Lab in writing.

Signed on behalf of SGS

Clerk / Kimmy Chiou	PM / Jasper Wang	Approved By / John Yeh
Kimmy Chiou	Jasper Wang	John Teh

Date: Jun. 05, 2024

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 2 of 108

Revision History

Report Number	Revision	Description	Issue Date	Revised By	Remark
TESA2404000186EN	00	Initial creation of document	Jun. 05, 2024	Kimmy Chiou	

N	oto	
ıv	\mathbf{c}	•

The mark " * " is the revised version of the report due to comments submitted by the certification.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 3 of 108

Contents

1	GENERAL INFORMATION	5
	1.1 Test Methodology	5
	1.2 Description of EUT	6
	1.3 Maximum value	6
	1.4 Antenna Information	6
2	MEASUREMENT SYSTEM	7
	2.1 Test Facility	7
	2.2 SAR System	8
	2.3 PD system	
3	SAR SYSTEM VERIFICATION	14
	3.1 Tissue Simulating Liquid	14
	3.2 Tissue Simulant Liquid measurement	
	3.3 Measurement results of Tissue Simulant Liquid	14
	3.4 The composition of the tissue simulating liquid:	
	3.5 System check	
	3.6 System check results	16
4	PD SYSTEM VERIFICATION	17
	4.1 System check	17
	4.2 System check result	
5	TEST CONFIGURATIONS	19
	5.1 Test Environment	19
	5.2 Test Note	19
	5.3 Test position	21
6	MAXIMUM OUTPUT POWER	22
	6.1 WLAN	
	6.2 WLAN 6GHz	
	6.3 Bluetooth	48
	6.4 BLE	49
7	DUTY CYCLE	51
8	SUMMARY OF RESULTS	
	8.1 Decision rules	54
	8.2 Summary of SAR Results	54
	8.3 Summary of PD Results	56
	8.4 Reporting statements of conformity	56
	8.5 Conclusion	
9	SIMULTANEOUS TRANSMISSION ANALYSIS	57
	9.1 Simultaneous Transmission Scenarios:	57
	9.2 Estimated SAR calculation	58
	9.3 SPLSR evaluation and analysis	
	9.4 Conclusion	
10	INSTRUMENTS LIST	
11	UNCERTAINTY BUDGET	
12	SAR MEASUREMENT RESULTS	
13		90

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

所非另有說明・此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 4 of 108

14	SA	R SYSTEM CHECK RESULTS	100
15		SYSTEM CHECK RESULTS	
16		PENDIXES	_
		SAR_Appendix A Photographs	
		SAR_Appendix B DAE & Probe Cal. Certificate	
		SAR Appendix C Phantom Description & Dipole Cal. Certificate	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 5 of 108

1 GENERAL INFORMATION

1.1 Test Methodology

The SAR testing method and procedure for this device is in accordance with the following standards:

IEEE/ANSI C95.1-1992

IEEE 1528-2013

KDB447498D01v06

KDB865664D01v01r04

KDB865664D02v01r02

KDB616217D04v01r02

KDB248227D01v02r01

IEC/IEEE 62209-1528:2020

SPEAG DASY6 System Handbook

SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)

IEC TR 63170:2018

IEC 62479:2010

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此数些结甲磺胺别对关键具色素,同既此类具属是例如于。大数型生产概太从司隶而统可,不可如必遏制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

aiwan Ltd. _| No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Page: 6 of 108

Description of EUT

Product Name	Notebook Computer			
Brand Name	acer			
Model No.	N24C10			
FCC ID	HLZQCNCM825			
Integrated WLAN Module	Brand Name: Qualcomm Model Name: QCNCM825			
Duty Cycle	WLAN802.11	Please refer to section 7		
Duty Cycle	Bluetooth	Please refer to section 7		
	802.11 b/g/n/ax/be 2.4GHz (2400.0 – 2483.			
Supported radios (TX	802.11a/n/ac/ax/be	5.2GHz (5150.0 –5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5850.0 MHz) 5.9GHz (5850.0 – 5895.0 MHz)		
Frequency Range, MHz)	802.11ax/be	6.2GHz (5925.0 – 6425.0 MHz) 6.5GHz (6425.0 – 6525.0 MHz) 6.7GHz (6525.0 – 6875.0 MHz) 7.0GHz (6875.0 – 7125.0 MHz)		
	Bluetooth	2.4GHz (2400.0 – 2483.5 MHz)		

1.3 Maximum value

Summary of Maximum SAR and Power Density Value					
Mode	Highest SAR 1g	Highest APD	Highest PD		
Iviode	(W/kg)	(W/m^2)	(W/m^2)		
Bluetooth(GFSK)	0.32	N/A	N/A		
2.4G WLAN	0.46	N/A	N/A		
5G WLAN	1.03	N/A	N/A		
6G WLAN	0.96	7.09	6.54		

Antenna Information 1.4

Vendor	Wistron Neweb Corporation									
Antenna		Main								
Part Number				81	EAB515.G81(DC33002WV0	00)			
Frequency(MHz)	2400~2500	5150~5250	5250~5350	5470~5725	5725~5850	5850~5895	5925~6425	6425~6525	6525~6875	6875~7125
Gain (dBi)	2.53	2.12	2.12	2.21	2.58	2.58	2.22	2.02	2.62	2.84
Antenna		Aux								
Part Number		81EAB515.G82(DC33002WV10)								
Frequency(MHz)	2400~2500	5150~5250	5250~5350	5470~5725	5725~5850	5850~5895	5925~6425	6425~6525	6525~6875	6875~7125
Gain (dBi)	2.71	2.09	2.09	2.30	2.55	2.55	2.60	2.47	2.48	2.83

Note: Antenna information is provided by the applicant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 7 of 108

2 MEASUREMENT SYSTEM

2.1 Test Facility

Laboratory	Test Site Address	Test Site Name	FCC Designation number	IC CAB identifier
	1F, No. 8, Alley 15, Lane	SAR 2		TW3702
	120, Sec. 1, NeiHu Road, Neihu District, Taipei City, 11493, Taiwan.	SAR 6	TW0029 TW0028 TW0027	
SGS Taiwan Ltd. Central RF Lab. (TAF code 3702)		SAR 8		
	No. 2, Keji 1st Rd., Guishan Township, Taoyuan County, 33383, Taiwan No.134, Wu Kung Road, New Taipei Industrial Park, Wuku	SAR 1		
		SAR 4		
		SAR 3		
	District, New Taipei City, Taiwan	SAR 7		

Note: Test site name is remarked on the equipment list in each section of this report as an indication where measurements occurred in specific test site and address.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此数华结甲属影测过之样只有含,同时此样只属是例如于。大规华主领大风司事而连可,不可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 8 of 108

SAR System

Block Diagram (DASY5)

A block diagram of the SAR measurement System is given in below. This SAR measurement system uses a computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR= σ (|Ei|²)/ ρ where σ and ρ are the conductivity and mass density of the tissue-simulant.

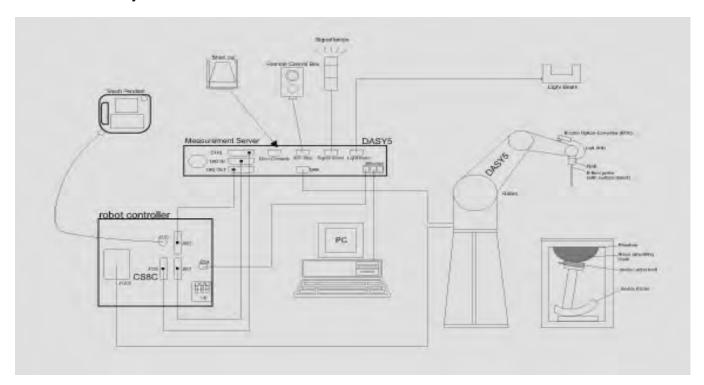

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


台灣檢驗科技股份有限公司



Page: 9 of 108

Block Diagram (DASY6)

The DASY system used for performing compliance tests consists of the following items:

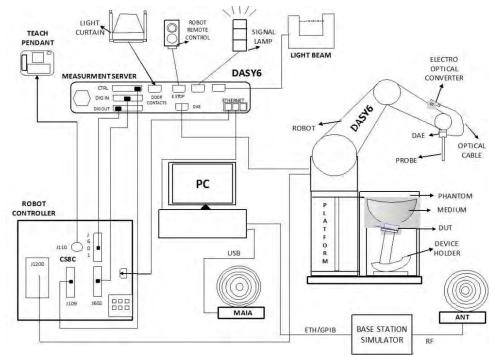

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Windows 10 and the DASY6 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 10 of 108

EX3DV4 E-Field Probe

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)			
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 2450/5250/5600/5750/6500/7000 MHz Additional CF for other liquids and frequencies upon request			
Frequency	10 MHz to > 6 GHz			
Directivity	± 0.3 dB in HSL (rotation around probe axis)			
	± 0.5 dB in tissue material (rotation normal to probe axis)			
Dynamic	10 μW/g to > 100 mW/g			
Range	Linearity: ± 0.2 dB (noise: typically < 1 μW/g)			
Dimensions	Tip diameter: 2.5 mm			
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 11 of 108

PHANTOM (ELI)

PHANTOW (E	E1)
Model	ELI
Construction	The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.
Shell	2 ± 0.2 mm
Thickness	
Filling Volume	Approx. 30 liters
Dimensions	Major axis: 600 mm
	Minor axis: 400 mm

DEVICE HOLDER (ELI)

DEVICE HOL	DEK (ELI)	
Construction	The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin), which is non-metal and non-conductive. The height can be adjusted to fit varies kind of notebooks.	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有验证,他就是结果成果的证明,不可能以推翻。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司




Page: 12 of 108

2.3 PD system


Block Diagram (DASY6)

Power density measurements for mmWave frequencies were performed using SPEAG DASY6 with cDASY6 5G module. The DASY6 included a high precision robotics system (Staubli), robot controller, desktop computer, near-field probe, probe alignment sensor, and the 5G phantom cover.

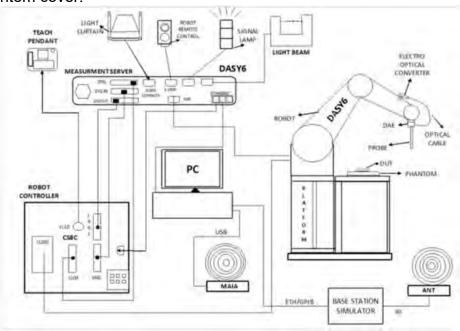

EUmmWVx probe

The EUmmWVx probe is based on the pseudo-vector probe design, which not only measures the field magnitude but also derives its polarization ellipse. The design entails two small 0.8mm dipole sensors mechanically protected by high-density foam, printed on both sides of a 0.9mm wide and 0.12mm thick glass substrate. The body of the probe is specifically constructed to minimize distortion by the scattered fields. The probe consist of two sensors with different angles (1 and 2) arranged in the same plane in the probe axis. Three or more measurements of the two sensors are taken for different probe rotational angles to derive the amplitude and polarization information. The probe design allows measurements at distances as small as 2mm from the sensors to the surface of the device under test (DUT). The typical sensor to probe tip distance is 1.5 mm. The exact distance is calibrated.

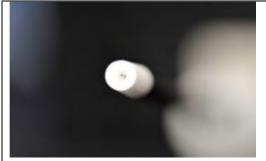

Two dipoles optimally arranged to obtain pseudovector information. Minimum 3 measurements/point, 120° rotated around probe axis.

Sensors (0.8mm length) printed on glass substrate protected by high density foam.Low perturbation of the measured field. Requires positioner which can do accurate probe rotation.

Frequency Range

750 MHz - 110 GHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有验明,此数果结果属于网络学习样具有害,同时供养具属是网络学习,未数果主领未公司事而实可,不可如公指制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 13 of 108

Dynamic Range	< 20 V/m – 10,000 V/m with PRE-10 (min <			
	50 V/m - 3000 V/m)			
Position Precision	< 0.2 mm (DASY6)			
Dimensions	Overall length: 337 mm (tip: 20 mm)			
	Tip diameter: encapsulation 8 mm			
	(internal sensor < 1mm)			
	Distance from probe tip to dipole centers:			
	< 2 mm. Sensor displacement to probe's			
	calibration point: < 0.3 mm			
Applications	E-field measurements of 5G devices and			
	other mm-wave transmitters operating			
	above 10GHz in < 2 mm distance from			
	device (free-space).Power density, H-field			
	and far-field analysis using total field			
	reconstruction (cDASY6 5G module			
sensor— 1,5mm calibrated	required)			
2m				
7				
device				
Compatibility	cDASY6 + 5G-Module SW1.0 and higher			

mmWave Phantom

The mmWave Phantom approximates free-space conditions, allowing for the evaluation of the antenna side of the device and the front (screen) side or any opposite-radiating side of wireless devices operating above 10 GHz without distorting the RF field. It consists of a 40mm thick Rohacell plate used as a test bed, which has a loss tangent (tan δ) \leq 0.05 and a relative permittivity (ϵr) \leq 1.2. High-performance RF absorbers are placed below the foam.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 14 of 108

SAR SYSTEM VERIFICATION

Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with homogeneous tissue simulating liquid. For head SAR testing, the liquid height from the ear rint (ERP) of the phantom to the liquid top surface is larger than 15cm. For body SAR testing, the liquid height fromeference po the center of the flat phantom to the liquid top surface is larger than 15cm.

3.2 **Tissue Simulant Liquid measurement**

The dielectric properties for this Head-simulant fluid were measured by using the SPEAG Dielectric Assessment Kit (DAKS-3.5)

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The measured conductivity and permittivity are all within ± 5% of the target values.

3.3 **Measurement results of Tissue Simulant Liquid**

Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev εr	% dev σ	Limit	Measurement Date
2402	39.282	1.757	38.963	1.739	-0.81%	-1.05%	± 5%	May. 16, 2024
2412	39.265	1.766	38.924	1.750	-0.87%	-0.93%	± 5%	May. 16, 2024
2422	39.248	1.775	38.881	1.759	-0.94%	-0.91%	± 5%	May. 16, 2024
2441	39.215	1.792	38.804	1.777	-1.05%	-0.84%	± 5%	May. 16, 2024
2450	39.200	1.800	38.767	1.786	-1.10%	-0.78%	± 5%	May. 16, 2024
2462	39.184	1.813	38.720	1.798	-1.18%	-0.82%	± 5%	May. 16, 2024
2480	39.160	1.832	38.648	1.815	-1.31%	-0.93%	± 5%	May. 16, 2024
5210	35.990	4.670	36.325	4.697	0.93%	0.58%	± 5%	May. 17, 2024
5250	35.950	4.710	36.223	4.739	0.76%	0.62%	± 5%	May. 17, 2024
5290	35.910	4.750	36.124	4.780	0.60%	0.63%	± 5%	May. 17, 2024
5310	35.890	4.770	36.073	4.803	0.51%	0.69%	± 5%	May. 17, 2024
5530	35.605	4.997	35.525	4.926	-0.22%	-1.41%	± 5%	May. 17, 2024
5570	35.545	5.039	35.424	4.965	-0.34%	-1.46%	± 5%	May. 17, 2024
5600	35.500	5.070	35.349	4.998	-0.43%	-1.42%	± 5%	May. 17, 2024
5750	35.350	5.220	34.974	5.147	-1.06%	-1.40%	± 5%	May. 18, 2024
5775	35.325	5.245	34.872	5.170	-1.28%	-1.43%	± 5%	May. 18, 2024
5785	35.315	5.255	34.848	5.182	-1.32%	-1.39%	± 5%	May. 18, 2024
5815	35.285	5.286	34.775	5.203	-1.45%	-1.57%	± 5%	May. 18, 2024
5850	35.250	5.323	34.685	5.239	-1.60%	-1.57%	± 5%	May. 18, 2024
5855	35.245	5.328	34.674	5.244	-1.62%	-1.57%	± 5%	May. 18, 2024
6105	34.974	5.604	34.382	5.552	-1.69%	-0.93%	± 5%	May. 19, 2024
6265	34.782	5.793	34.014	5.710	-2.21%	-1.43%	± 5%	May. 19, 2024
6425	34.590	5.982	33.646	5.872	-2.73%	-1.83%	± 5%	May. 19, 2024
6500	34.500	6.070	33.473	5.946	-2.98%	-2.04%	± 5%	May. 19, 2024
6585	34.398	6.169	33.278	6.031	-3.26%	-2.23%	± 5%	May. 19, 2024
6745	34.206	6.354	32.910	6.190	-3.79%	-2.58%	± 5%	May. 19, 2024
6905	34.014	6.540	32.543	6.352	-4.32%	-2.87%	± 5%	May. 19, 2024
7000	33.900	6.650	32.324	6.447	-4.65%	-3.05%	± 5%	May. 19, 2024

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 15 of 108

3.4 The composition of the tissue simulating liquid:

Simulating Liquids for 600 MHz -10 GHz, Manufactured by SPEAG:


Broad-band head tissue simulating liquids	SPEAG Product	Frequency range (MHz)	Main Ingredients
	HBBL600- 10000V6	600 - 10000	Water, Oil

3.5 System check

The microwave circuit arrangement for system check is sketched in below. The daily system accuracy verification occurs within the flat section of the SAM phantom and ELI phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values.

The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed with SAR values normalized to 1W forward power delivered to the dipole.

During the tests, the liquid depth from the center of the flat phantom to the liquid top surface was 15 cm above in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

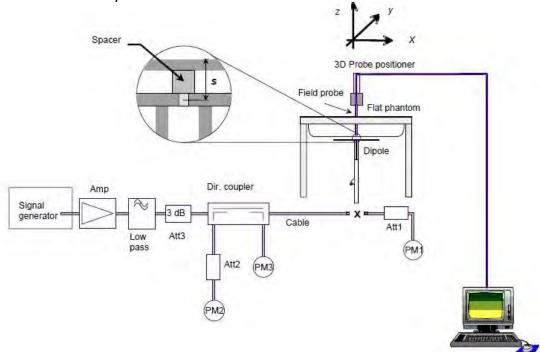

The block diagram of system check

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

www.sgs.com.tw



Page: 16 of 108

System check results

Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=250mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D2450V2	727	2450	52.7	13.4	53.6	1.71	± 10%	May.16,2024
Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=100mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D5GHzV2	1023	5250	78.8	7.76	77.6	-1.52	± 10%	May.17,2024
D5GHzV2	1023	5600	81.3	8.22	82.2	1.11	± 10%	May.17,2024
D5GHzV2	1023	5750	78	7.65	76.5	-1.92	± 10%	May.18,2024
D5GHzV2	1023	5850	78.6	8.13	81.3	3.44	± 10%	May.18,2024
Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=100mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D6.5GHzV2	1006	6500	296	28.8	288	-2.70	± 10%	May.19,2024
D7GHzV2	1007	7000	281	28.4	284	1.07	± 10%	May.19,2024

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 17 of 108

PD SYSTEM VERIFICATION

System check

The system was verified to be within ±0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check.

The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

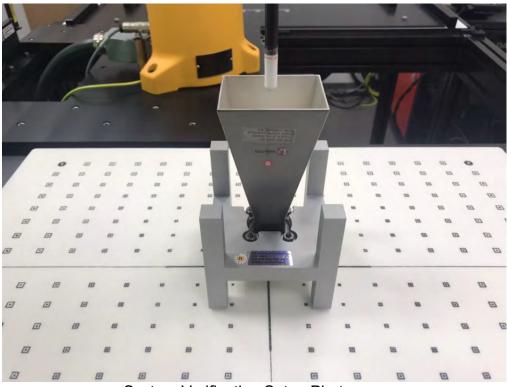

System Verification Setup Photo

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

台灣檢驗科技股份有限公司



Page: 18 of 108

System check result

The system was verified to be within ±0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check. The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

٠.	0111 1110 0		proma		ie ilialiai	40taron, p	01 110 101111		020	Renep Heres
	Frequency (MHz)	PD Verification Source (MHz)	Probe S/N	DAE S/N	Distance (mm)	Prad (mW)	Measured 4cm^2 (W/m^2)	Target 4cm^2 (W/m^2)	Deviation (dB)	Date
	10000	10G	9643	856	10	93.3	52.6	56.4	-0.30	May.20,2024

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 19 of 108

5 TEST CONFIGURATIONS

5.1 Test Environment

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

5.2 Test Note

- **General:** Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s).
- **General:** The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.
- **General:** During the SAR testing, the DASY system checks power drift by comparing the e-field strength of one specific location measured at the beginning with that measured at the end of the SAR testing.
- **General:** According to KDB447498D01v06, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is \leq 0.8 W/kg, when the transmission band is \leq 100 MHz.
- **General:** According to KDB865664D01v01r04, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- WLAN 2.4GHz: 802.11b DSSS SAR Test Requirements: SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
- WLAN 2.4GHz: 802.11g/n OFDM SAR Test Exclusion Requirements: SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- WLAN 5GHz: Initial Test Configuration: An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. Since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此起华廷用摄影测验之样只有含,同时此样只属是例如于。太阳华公司丰富纯可,太阳华公道测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 20 of 108

specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for subsequent test configuration.

- WLAN 5GHz: Based on FCC guidance, general principles of KDB248227D01 can be applied to 802.11ax to determine initial test configuration with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency band.
- WLAN 6GHz: Per October 2020 & April 2021 TCB Workshop Interim procedures and FCC guidance, start instead with a minimum of 5 test channels across the full band, then adapt and apply conducted power and SAR test reduction procedures of KDB Pub. 248227 v02r02. WIFI 6E SAR is measured by using 6-7GHz parameters per IEC/IEEE62209-1528:2020 and report also estimated absorbed PD (for reference purposes only, not specifically for compliance). For the highest SAR test configurations also measure incident PD (total) using mmW near-field probe and total-field/power-density reconstruction method.
- WLAN 6GHz: Per equipment manufacturer guidance, power density was measured at d=2mm with the grid step (0.0625λ) for determining compliance at d=2mm.
- WLAN 6GHz: According to October 2020 TCB Workshop Interim procedures, power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty > 30%. Total expanded uncertainty of 2.67 dB (85%) was used to determine the psPD measurement scaling factor.
- WLAN 6GHz: Per FCC guidance, for simultaneous transmission evaluation, using SAR sum and SPLSR for simultaneous transmit exclusion analyses and evaluations.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 隆北무方와마,此茲史廷田儀默剛建之粹모습룡, 同時世撰모儀歷朝國王。太親史王德太八司東西姓可,太司朝政道朝。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 21 of 108

Test position

Laptop mode SAR test position (0mm)

For laptop PC, according to KDB 616217 D04, SAR evaluation is required for the bottom surface of the keyboard. This EUT was tested in the base of EUT directly against the flat phantom. The required minimum test separation distance for incorporating transmitters and antennas into laptop computer display is determined with the display screen opened at an angle of 90° to the keyboard compartment.

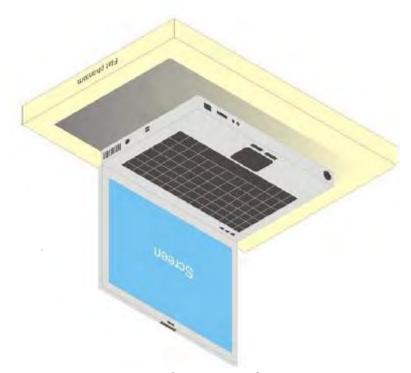


Illustration for Laptop Setup

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 22 of 108

6 MAXIMUM OUTPUT POWER

6.1 WLAN

MIMO

MIMO			Anin			
		I	Main T			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		15.50	15.49
	802.11b	6	2437	1Mbps	15.50	15.48
		11	2462	1	15.50	15.38
		1	2412		15.50	15.34
	802.11g	6	2437	6Mbps	15.50	15.37
		11	2462]	15.50	15.35
		1	2412		15.50	15.38
	802.11n20-HT0	6	2437	MCS0	15.50	15.45
		11	2462]	15.50	15.32
		1	2412	MCS0	15.50	15.38
	802.11ac20-VHT0	6	2437		15.50	15.35
		11	2462		15.50	15.41
	802.11ax20-HE0	1	2412	MCS0	15.50	15.40
		6	2437		15.50	15.44
2.45GHz		11	2462		15.50	15.46
2.43GHZ		1	2412		15.50	15.35
	802.11be20-EHT0	6	2437	MCS0	15.50	15.40
		11	2462		15.50	15.31
		3	2422		14.87	14.71
	802.11n40-HT0	6	2437	MCS0	15.50	15.40
		9	2452		14.26	14.07
		3	2422		14.87	14.69
	802.11ac40-VHT0	6	2437	MCS0	15.50	15.38
		9	2452]	14.26	14.16
		3	2422		14.87	14.76
	802.11ax40-HE0	6	2437	MCS0	15.50	15.45
		9	2452	<u> </u>	14.26	14.20
		3	2422		14.87	14.73
	802.11be40-EHT0	6	2437	MCS0	15.50	15.35
		9	2452		14.26	14.11

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 23 of 108

			Asia			
		N	Main I			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		14.00	13.90
	902.116	40	5200	GMbps	14.00	13.85
	802.11a	44	5220	6Mbps	14.00	13.79
		48	5240		14.00	13.90
		36	5180		14.00	13.85
	000 44 00 1170	40	5200	MCS0	14.00	13.86
	802.11n20-HT0	44	5220		14.00	13.93
		48	5240		14.00	13.84
	802.11ac20-VHT0	36	5180		14.00	13.82
		40	5200	MCCO	14.00	13.90
		44	5220	MCS0	14.00	13.81
		48	5240		14.00	13.94
		36	5180		14.00	13.87
	802.11ax20-HE0	40	5200	MOCO	14.00	13.82
		44	5220	MCS0	14.00	13.83
		48	5240		14.00	13.92
5 45 5 05 OUL		36	5180		14.00	13.90
5.15-5.25 GHz	000 445 -00 FUTO	40	5200	MCCO	14.00	13.93
	802.11be20-EHT0	44	5220	MCS0	14.00	13.84
		48	5240		14.00	13.86
	000 44: 40 UT0	38	5190	14000	14.00	13.94
	802.11n40-HT0	46	5230	MCS0	14.00	13.91
	000 44ee40 \/UTO	38	5190	MCCO	14.00	13.86
	802.11ac40-VHT0	46	5230	MCS0	14.00	13.85
	000 44 40 1150	38	5190	MCCC	14.00	13.84
	802.11ax40-HE0	46	5230	MCS0	14.00	13.86
	000 44b 40 EUTO	38	5190	MCCO	14.00	13.92
	802.11be40-EHT0	46	5230	MCS0	14.00	13.87
	802.11ac80-VHT0	42	5210	MCS0	14.00	13.95
	802.11ax80-HE0	42	5210	MCS0	14.00	13.89
	802.11be80-EHT0	42	5210	MCS0	14.00	13.91
	802.11ac160-VHT0	50	5250	MCS0	11.96	11.84
	802.11ax160-HE0	50	5250	MCS0	11.96	11.82
	802.11be160-EHT0	50	5250	MCS0	11.96	11.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

t (886-2) 2299-3279



Page: 24 of 108

	T	ľ	Main		1	
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		14.00	13.79
	000 44-	56	5280	CNAL	14.00	13.72
	802.11a	60	5300	6Mbps	14.00	13.78
		64	5320	1	14.00	13.73
		52	5260		14.00	13.77
	000 44m20 LITO	56	5280	MCS0	14.00	13.83
	802.11n20-HT0	60	5300	MCSU	14.00	13.83
		64	5320]	14.00	13.85
	802.11ac20-VHT0	52	5260		14.00	13.81
		56	5280	MCS0	14.00	13.78
		60	5300	IVICSU	14.00	13.84
		64	5320		14.00	13.78
	802.11ax20-HE0	52	5260		14.00	13.80
		56	5280	MCS0	14.00	13.81
		60	5300		14.00	13.82
5.25-5.35 GHz		64	5320		14.00	13.75
		52	5260		14.00	13.83
	802.11be20-EHT0	56	5280	MCS0	14.00	13.85
	002.11be20-E1110	60	5300	IVICSU	14.00	13.81
		64	5320		14.00	13.84
	802.11n40-HT0	54	5270	MCS0	14.00	13.79
	002.111140-1110	62	5310	MCSO	14.00	13.92
	802.11ac40-VHT0	54	5270	MCS0	14.00	13.80
	002.11a040-VITTU	62	5310	IVICOU	14.00	13.82
	802.11ax40-HE0	54	5270	MCS0	14.00	13.82
	OUZ. I TAX4U-ITEU	62	5310	IVICOU	14.00	13.79
	802.11be40-EHT0	54	5270	MCS0	14.00	13.80
		62	5310		14.00	13.75
	802.11ac80-VHT0	58	5290	MCS0	13.72	13.69
	802.11ax80-HE0	58	5290	MCS0	13.72	13.56
	802.11be80-EHT0	58	5290	MCS0	13.72	13.54

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 25 of 108

		ı	Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		14.00	13.88
	000.44	120	5600	014	14.00	13.90
	802.11a	140	5700	6Mbps	14.00	13.87
		144	5720	1	14.00	13.90
		100	5500		14.00	13.86
	802.11n20-HT0	120	5600	MCS0	14.00	13.91
	002.111120 - 1110	140	5700	IVICSU	14.00	13.89
		144	5720		14.00	13.93
		100	5500	MCS0	14.00	13.89
	802.11ac20-VHT0	120	5600		14.00	13.92
	002.118020-11110	140	5700		14.00	13.90
		144	5720		14.00	13.79
		100	5500		14.00	13.90
	802.11ax20-HE0	120	5600	MCS0	14.00	13.87
	002.11ax20-11L0	140	5700	WIGGO	14.00	13.91
		144	5720		14.00	13.71
		100	5500	1	14.00	13.82
	802.11be20-EHT0	120	5600	MCS0	14.00	13.85
	002.11be20-L1110	140	5700	IVICOU	14.00	13.89
		144	5720		14.00	13.82
		102	5510	1	14.00	13.62
	802.11n40-HT0	118	5590	MCS0	14.00	13.90
	002.111140-1110	134	5670	WIGGO	14.00	13.89
5.6GHz		142	5710		14.00	13.79
0.00112		102	5510	1	14.00	13.88
	802.11ac40-VHT0	118	5590	MCS0	14.00	13.96
	002.110040 11110	134	5670	Wioco	14.00	13.86
		142	5710		14.00	13.87
		102	5510	1	14.00	13.84
	802.11ax40-HE0	118	5590	MCS0	14.00	13.87
	002.1143(10.1120	134	5670		14.00	13.82
		142	5710		14.00	13.89
		102	5510	1	14.00	13.81
	802.11be40-EHT0	118	5590	MCS0	14.00	13.87
		134	5670		14.00	13.85
		142	5710		14.00	13.80
	000 44 00 1 11 7 5	106	5530		14.00	13.99
	802.11ac80-VHT0	122	5610	MCS0	14.00	13.95
		138	5690		14.00	13.89
	000 44 00 1150	106	5530	14000	14.00	13.91
	802.11ax80-HE0	122	5610	MCS0	14.00	13.87
		138	5690		14.00	13.90
	000 445 00 5550	106	5530	MOCO	14.00	13.90
	802.11be80-EHT0	122	5610	MCS0	14.00	13.88
	000 44 400 \ # 170	138	5690	14000	14.00	13.83
	802.11ac160-VHT0	114	5570	MCS0	12.13	11.97
	802.11ax160-HE0 802.11be160-EHT0	114 114	5570 5570	MCS0 MCS0	12.13 12.13	12.08 11.97

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 26 of 108

			Main			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		14.00	13.77
	802.11a	157	5785	6Mbps	14.00	13.81
		165	5825		14.00	13.79
		149	5745		14.00	13.74
	802.11n20-HT0	157	5785	MCS0	14.00	13.82
		165	5825		14.00	13.85
		149	5745		14.00	13.79
	802.11ac20-VHT0	157	5785	MCS0	14.00	13.81
		165	5825		14.00	13.80
		149	5745	MCS0	14.00	13.77
	802.11ax20-HE0	157	5785		14.00	13.79
		165	5825		14.00	13.81
5 00U-		149	5745		14.00	13.78
5.8GHz	802.11be20-EHT0	157	5785	MCS0	14.00	13.81
		165	5825		14.00	13.78
	000 11m10 LITO	151	5755	MCS0	14.00	13.86
	802.11n40-HT0	159	5795	IVICSU	14.00	13.74
	802.11ac40-VHT0	151	5755	MCS0	14.00	13.73
	002.11ac40-VH10	159	5795	MCSU	14.00	13.83
	902 11av40 LIFO	151	5755	MCS0	14.00	13.80
	802.11ax40-HE0	159	5795	IVICSU	14.00	13.75
	802.11be40-EHT0	151	5755	MCS0	14.00	13.80
	002.11be40-EH10	159	5795	IVICSU	14.00	13.83
	802.11ac80-VHT0	155	5775	MCS0	14.00	13.89
	802.11ax80-HE0	155	5775	MCS0	14.00	13.78
	802.11be80-EHT0	155	5775	MCS0	14.00	13.76

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

t (886-2) 2299-3279



Page: 27 of 108

		N	Main			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		169	5845		13.72	13.65
	802.11a	173	5865	6Mbps	13.76	13.60
		177	5885		13.79	13.70
		169	5845		14.00	13.84
	802.11n20-HT0	173	5865	MCS0	14.00	13.85
		177	5885		14.00	13.82
		169	5845		14.00	13.89
	802.11ac20-VHT0	173	5865	MCS0	14.00	13.93
		177	5885		14.00	13.85
		169	5845		14.00	13.87
	802.11ax20-HE0	173	5865	MCS0	14.00	13.89
		177	5885		14.00	13.85
		169	5845	MCS0	14.00	13.81
	802.11be20-EHT0	173	5865		14.00	13.82
5.9GHz		177	5885		14.00	13.91
	802.11n40-HT0	167	5835	MCS0	14.00	13.81
	002.111140-1110	175	5875	MCSU	14.00	13.92
	802.11ac40-VHT0	167	5835	MCS0	14.00	13.90
	002.11a040-V1110	175	5875	IVICOU	14.00	13.93
	802.11ax40-HE0	167	5835	MCS0	14.00	13.90
	002.11ax+0-11L0	175	5875	WCGO	14.00	13.80
	802.11be40-EHT0	167	5835	MCS0	14.00	13.91
	002.11DE40-L1110	175	5875	WCGO	14.00	13.86
	802.11ac80-VHT0	171	5855	MCS0	14.00	13.94
	802.11ax80-HE0	171	5855	MCS0	14.00	13.87
	802.11be80-EHT0	171	5855	MCS0	14.00	13.84
	802.11ac160-VHT0	163	5815	MCS0	13.47	13.32
	802.11ax160-HE0	163	5815	MCS0	13.47	13.31
	802.11be160-EHT0	163	5815	MCS0	13.47	13.39

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

> t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 28 of 108

			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		16.00	15.99
	802.11b	6	2437	1Mbps	16.00	15.90
		11	2462	1 .	16.00	15.81
		1	2412		16.00	15.91
	802.11g	6	2437	6Mbps	16.00	15.89
		11	2462	1	16.00	15.88
		1	2412		16.00	15.87
	802.11n20-HT0	6	2437	MCS0	16.00	15.85
		11	2462]	16.00	15.82
		1	2412	MCS0	16.00	15.89
	802.11ac20-VHT0	6	2437		16.00	15.83
		11	2462]	16.00	15.90
	802.11ax20-HE0	1	2412	MCS0	16.00	15.93
		6	2437		16.00	15.86
2.45GHz		11	2462		16.00	15.83
2.45GHZ		1	2412		16.00	15.94
	802.11be20-EHT0	6	2437	MCS0	16.00	15.86
		11	2462]	16.00	15.84
		3	2422		15.04	14.90
	802.11n40-HT0	6	2437	MCS0	16.00	15.85
		9	2452		14.58	14.47
		3	2422		15.04	14.96
	802.11ac40-VHT0	6	2437	MCS0	16.00	15.84
		9	2452		14.58	14.45
		3	2422		15.04	15.00
	802.11ax40-HE0	6	2437	MCS0	16.00	15.83
		9	2452		14.58	14.46
		3	2422]	15.04	14.83
	802.11be40-EHT0	6	2437	MCS0	16.00	15.86
		9	2452		14.58	14.45

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 29 of 108

			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		14.00	13.85
	802.11a	40	5200	6Mbpa	14.00	13.90
	002.11a	44	5220	6Mbps	14.00	13.90
		48	5240		14.00	13.87
		36	5180		14.00	13.88
	000 44-00 UTO	40	5200	MCCO	14.00	13.87
	802.11n20-HT0	44	5220	MCS0	14.00	13.90
		48	5240		14.00	13.83
		36	5180		14.00	13.86
	000 4400 \/LITO	40	5200	MCS0 14.00	13.88	
	802.11ac20-VHT0	44	5220	MCSU	14.00	13.83
		48	5240		14.00	13.88
		36	5180		14.00	13.95
	000 4400 1150	40	5200	14000	14.00	13.86
	802.11ax20-HE0	44	5220	MCS0	14.00	13.88
		48	5240		14.00	13.80
5 45 5 05 OH		36	5180		14.00	13.84
5.15-5.25 GHz	000 44h -00 FUTO	40	5200	MOCO	14.00	13.81
	802.11be20-EHT0	44	5220	MCS0	14.00	13.86
		48	5240		14.00	13.88
	000 44 40 1175	38	5190	14000	14.00	13.92
	802.11n40-HT0	46	5230	MCS0	14.00	13.89
	000 44 40 \/\	38	5190	14000	14.00	13.92
	802.11ac40-VHT0	46	5230	MCS0	14.00	13.90
	000 44 40 1150	38	5190	11000	14.00	13.89
	802.11ax40-HE0	46	5230	MCS0	14.00	13.89
	000 445 - 40 51170	38	5190	MCCC	14.00	13.93
	802.11be40-EHT0	46	5230	MCS0	14.00	13.94
	802.11ac80-VHT0	42	5210	MCS0	14.00	13.96
	802.11ax80-HE0	42	5210	MCS0	14.00	13.91
	802.11be80-EHT0	42	5210	MCS0	14.00	13.89
	802.11ac160-VHT0	50	5250	MCS0	12.65	12.58
	802.11ax160-HE0	50	5250	MCS0	12.65	12.56
	802.11be160-EHT0	50	5250	MCS0	12.65	12.54

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 30 of 108

			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		14.00	13.85
	000.44	56	5280	0.4	14.00	13.77
	802.11a	60	5300	6Mbps	14.00	13.91
		64	5320	1	14.00	13.86
		52	5260		14.00	13.84
	000 44: 00 LITO	56	5280	MOCO	14.00	13.95
	802.11n20-HT0	60	5300	MCS0	14.00	13.83
		64	5320		14.00	13.82
		52	5260		14.00	13.80
	000 4400 \/LITO	56	5280	MCS0	14.00	13.82
	802.11ac20-VHT0	60	5300		14.00	13.93
		64	5320]	14.00	13.88
		52	5260	14.00 14.00 14.00 14.00	13.76	
	000 44 5 200 1150	56	5280		14.00	13.78
	802.11ax20-HE0	60	5300	MCSU	14.00	13.84
5.25-5.35 GHz		64	5320		14.00	13.86
		52	5260		14.00	13.78
	000 44h -00 FUTO	56	5280	MCS0	14.00	13.79
	802.11be20-EHT0	60	5300	IVICSU	14.00	13.95
		64	5320]	14.00	13.85
	000 44×40 UT0	54	5270	MCCO	14.00	13.79
	802.11n40-HT0	62	5310	MCS0	14.00	13.78
	000 4440 \/UT0	54	5270	MCCO	14.00	13.83
	802.11ac40-VHT0	62	5310	MCS0	14.00	13.81
	802.11ax40-HE0	54	5270	MCS0	14.00	13.97
	002.11aX40-ΠΕU	62	5310	IVICSU	14.00	13.76
	802.11be40-EHT0	54	5270	MCS0	14.00	13.81
	002.110040-EF10	62	5310	IVICSU	14.00	13.80
	802.11ac80-VHT0	58	5290	MCS0	14.00	13.99
	802.11ax80-HE0	58	5290	MCS0	14.00	13.87
	802.11be80-EHT0	58	5290	MCS0	14.00	13.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

> t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 31 of 108

			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		14.00	13.73
	222.44	120	5600	1	14.00	13.86
	802.11a	140	5700	6Mbps	14.00	13.89
		144	5720	1	14.00	13.81
		100	5500		14.00	13.86
	000 44, 00 1170	120	5600		14.00	13.83
	802.11n20-HT0	140	5700	MCS0	14.00	13.87
		144	5720	1	14.00	13.81
		100	5500		14.00	13.93
	900 110 000 VIJTO	120	5600	MCS0	14.00	13.88
	802.11ac20-VHT0	140	5700	MCSU	14.00	13.82
		144	5720	1	14.00	13.89
		100	5500		14.00	13.86
	000 4400 1150	120	5600		14.00	13.86
	802.11ax20-HE0	140	5700	MCS0	14.00	13.85
		144	5720	1	14.00	
		100	5500		14.00	
	000 441 00 51170	120	5600		14.00	
	802.11be20-EHT0	140	5700	MCS0	14.00	
		144	5720	1	14.00	
		102	5510		14.00	13.86
	000 11 m 10 LITO	118	5590	MCSO	14.00	13.90
	802.11n40-HT0	134	5670	MCS0	14.00	13.88
5.0011-		142	5710	1	14.00	13.87
5.6GHz		102	5510		14.00	13.95
	000 44 40 \ // ITO	118	5590	MOSO	14.00	13.93 13.88 13.89 13.86 13.85 13.81 13.88 13.91 13.88 13.86 13.86 13.86 13.86
	802.11ac40-VHT0	134	5670	MCS0	14.00	13.94
		142	5710	1	14.00	13.91
		102	5510	MCS0	14.00	13.92
	802.11ax40-HE0	118	5590		14.00	13.94
	002.11ax40-nE0	134	5670	IVICSU	14.00	13.89
		142	5710		14.00	13.90
		102	5510		14.00	13.93
	802.11be40-EHT0	118	5590	MCS0	14.00	13.83
	002.110 04 0-EF110	134	5670	IVICSU	14.00	
		142	5710		14.00	13.87
		106	5530		14.00	13.93
	802.11ac80-VHT0	122	5610	MCS0	14.00	13.82
		138	5690		14.00	13.78
		106	5530]	14.00	13.91
	802.11ax80-HE0	122	5610	MCS0	14.00	13.89
		138	5690		14.00	13.79
		106	5530		14.00	13.87
	802.11be80-EHT0	122	5610	MCS0	14.00	13.87
		138	5690		14.00	13.86
	802.11ac160-VHT0	114	5570	MCS0	12.79	12.74
	802.11ax160-HE0	114	5570	MCS0	12.79	12.59
	802.11be160-EHT0	114	5570	MCS0	12.79	12.66

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 32 of 108

			Aux			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		14.00	13.83
	802.11a	157	5785	6Mbps	14.00	13.83
		165	5825		14.00	13.83
		149	5745		14.00	13.79
	802.11n20-HT0	157	5785	MCS0	14.00	13.86
		165	5825		14.00	13.86
		149	5745	MCS0	14.00	13.80
	802.11ac20-VHT0	157	5785		14.00	13.77
		165	5825		14.00 14.00 14.00	13.87
		149	5745		14.00	13.81
	802.11ax20-HE0	157	5785	MCS0	14.00	13.86 13.80 13.77 13.87
		165	5825		14.00	13.90
5.8GHz		149	5745		14.00	13.82
3.6GHZ	802.11be20-EHT0	157	5785	MCS0	14.00	13.89
		165	5825		14.00	13.81
	802.11n40-HT0	151	5755	MCS0	Rate Power + Max. Tolerance (dBm) 14.00	13.89
	002.111140-1110	159	5795	IVICOU	14.00	13.83
	802.11ac40-VHT0	151	5755	MCS0	14.00	13.80
	002.11a040-VA10	159	5795	IVICOU	14.00	13.92
	802.11ax40-HE0	151	5755	MCS0	14.00	13.81
	002.11dX40-FIEU	159	5795	IVICOU	14.00	13.84
	802.11be40-EHT0	151	5755	MCS0	14.00	13.80
	002.11DE4U-EN1U	159	5795		14.00	13.76
	802.11ac80-VHT0	155	5775	MCS0	14.00	13.99
	802.11ax80-HE0	155	5775	MCS0	14.00	13.82
	802.11be80-EHT0	155	5775	MCS0	14.00	13.85

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 33 of 108

	11					
			Aux			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		169	5845		14.00	13.87
	802.11a	173	5865	6Mbps	14.00	13.86
		177	5885		14.00	13.85
		169	5845		14.00	13.89
	802.11n20-HT0	173	5865	MCS0	14.00	13.84
		177	5885		14.00	13.86
		169	5845		14.00	13.87
	802.11ac20-VHT0	173	5865	MCS0	14.00	13.82
		177	5885		14.00	13.88
		169	5845	MCS0	14.00	13.81
	802.11ax20-HE0	173	5865		14.00	13.83
		177	5885		14.00	13.91
		169	5845		14.00	13.85
	802.11be20-EHT0	173	5865	MCS0	14.00	13.89
5.9GHz		177	5885		14.00	13.91
	802.11n40-HT0	167	5835	MCS0	14.00	13.93
	002.111140-1110	175	5875	MCSU	14.00	13.84
	802.11ac40-VHT0	167	5835	MCS0	14.00	13.85
	002.11a040-V1110	175	5875	IVICOU	14.00	13.86
	802.11ax40-HE0	167	5835	MCS0	14.00	13.91
	002.11ax+0-11L0	175	5875	WCGO	14.00	13.91
	802.11be40-EHT0	167	5835	MCS0	14.00	13.84
	002.11be40-L1110	175	5875	WCGO	14.00	13.89
	802.11ac80-VHT0	171	5855	MCS0	14.00	13.86
	802.11ax80-HE0	171	5855	MCS0	14.00	13.86
	802.11be80-EHT0	171	5855	MCS0	14.00	13.93
	802.11ac160-VHT0	163	5815	MCS0	14.00	13.98
	802.11ax160-HE0	163	5815	MCS0	14.00	13.84
	802.11be160-EHT0	163	5815	MCS0	14.00	13.90

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 34 of 108

SISO			<i>l</i> lain			
			nuii i			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		15.50	15.49
	802.11b	6	2437	1Mbps	15.50	15.48
		11	2462	·	15.50	15.38
		1	2412		15.50	15.43
	802.11g	6	2437	6Mbps	15.50	15.42
		11	2462	1	15.50	15.30
		1	2412		15.50	15.40
	802.11n20-HT0	6	2437	MCS0	15.50	15.37
		11	2462		15.50	15.32
		1	2412		15.50	15.40
	802.11ac20-VHT0	6	2437	MCS0	15.50	15.32
		11	2462]	15.50	15.36
		1	2412		15.50	15.45
	802.11ax20-HE0	6	2437	MCS0	15.50	15.40
2.45GHz		11	2462		15.50	15.34
2.43GHZ		1	2412		15.50	15.34
	802.11be20-EHT0	6	2437	MCS0	15.50	15.38
		11	2462]	15.50	15.37
		3	2422		15.50 15	15.34
	802.11n40-HT0	6	2437	MCS0	15.50	15.39
		9	2452		15.50	15.46
		3	2422		15.50	15.36
	802.11ac40-VHT0	6	2437	MCS0	15.50	15.34
		9	2452		15.50	15.41
		3	2422		15.50	15.41
	802.11ax40-HE0	6	2437	MCS0	15.50	15.38
		9	2452		15.50	15.42
		3	2422		15.50	15.39
	802.11be40-EHT0	6	2437	MCS0	15.50	15.38
		9	2452		15.50	15.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 35 of 108

			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		16.00	15.99
	802.11b	6	2437	1Mbps	16.00	15.90
		11	2462	1 '	16.00	15.81
		1	2412		16.00	15.81
	802.11g	6	2437	6Mbps	16.00	15.92
		11	2462	1 '	16.00	15.96
		1	2412		16.00	15.85
	802.11n20-HT0	6	2437	MCS0	16.00	15.93
		11	2462		16.00	15.91
		1	2412		16.00	15.96
	802.11ac20-VHT0	6	2437	MCS0	16.00	15.81
		11	2462		16.00	15.90
		1	2412		16.00 15.9 16.00 15.9	15.90
	802.11ax20-HE0	6	2437	MCS0	16.00	15.87
2.45GHz		11	2462]	16.00	15.81
2.45GHZ		1	2412		16.00	15.85
	802.11be20-EHT0	6	2437	MCS0	16.00	15.89
		11	2462]	16.00	15.85
		3	2422		16.00	15.84
	802.11n40-HT0	6	2437	MCS0	16.00	15.89
		9	2452]	16.00	15.89
		3	2422		16.00	15.93
	802.11ac40-VHT0	6	2437	MCS0	16.00	15.88
		9	2452	<u>] </u>	16.00	15.90
		3	2422		16.00	15.93
	802.11ax40-HE0	6	2437	MCS0	16.00	15.85
		9	2452	<u> </u>	16.00	15.86
		3	2422		16.00	15.89
	802.11be40-EHT0	6	2437	MCS0	16.00	15.90
		9	2452		16.00	15.88

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 36 of 108

6.2 **WLAN 6GHz**

MIMO I DI

/IMO_LF	-		Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	5955		-0.56	-0.69
	802.11a	45	6175	6Mbps	-2.74	-2.84
		93	6415		-2.35	-2.41
		1	5955]	2.54	2.37
	802.11n20-HT0	45	6175	MCS0	0.57	0.44
		93	6415		0.91	0.83
		1	5955	1	2.54	2.46
	802.11ac20-VHT0	45	6175	MCS0	0.57	0.42
		93	6415		0.91	0.80
		1	5955		2.54	2.49
	802.11ax20-HE0	45	6175	MCS0	0.57	0.47
		93	6415		0.91	0.80
		1	5955		2.54	2.36
	802.11be20-EHT0	45	6175	MCS0	0.57	0.46
		93	6415		0.91	0.73
		3	5965		5.49	5.30
	802.11n40-HT0	43	6165	MCS0	4.65	4.53
		91	6405		3.77	3.67
		3	5965		5.49	5.39
	802.11ac40-VHT0	43	6165	MCS0	4.65	4.54
		91	6405		3.77	3.64
	802.11ax40-HE0	3	5965	MCS0	5.49	5.39
U-NII-5		43	6165		4.65	4.53
		91	6405		3.77	3.73
6.2GHz		3	5965	MCS0	5.49	5.36
	802.11be40-EHT0	43	6165		4.65	4.45
		91	6405		3.77	3.65
		7	5985		7.35	7.27
	802.11ac80-VHT0	39	6145	MCS0	6.70	6.55
		87	6385		6.53	6.39
		7	5985		7.35	7.23
	802.11ax80-HE0	39	6145	MCS0	6.70	6.57
		87	6385		6.53	6.34
		7	5985		7.35	7.23
	802.11be80-EHT0	39	6145	MCS0	6.70	6.54
		87	6385		6.53	6.40
		15	6025		11.35	11.24
8	802.11ac160-VHT0	47	6185	MCS0	10.90	10.75
		79	6345		10.41	10.26
		15	6025		11.35	11.17
	802.11ax160-HE0	47	6185	MCS0	10.90	10.77
		79	6345	1	10.41	10.31
		15	6025		11.35	11.22
	802.11be160-EHT0	47	6185	MCS0	10.90	10.73
		79	6345	1	10.41	10.29
	000 441 000 51150	31	6105	14666	13.00	12.98
	802.11be320-EHT0	63	6265	MCS0	13.00	12.91

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 37 of 108

			Main			
			Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		97	6435		-1.00	-1.14
	802.11a	105	6475	6Mbps	-1.13	-1.26
		113	6515		-1.00	-1.19
		97	6435		2.33	2.24
	802.11n20-HT0	105	6475	MCS0	2.52	2.33
		113	6515		2.09	1.94
		97	6435		2.33	2.27
	802.11ac20-VHT0	105	6475	MCS0	2.52	2.40
		113	6515		2.09	1.96
	802.11ax20-HE0	97	6435		2.33	2.20
		105	6475	MCS0	2.52	2.34
		113	6515		2.09	1.89
		97	6435		2.33	2.23
	802.11be20-EHT0	105	6475	MCS0	2.52	2.41
		113	6515		2.09	1.93
U-NII-6	802.11n40-HT0	99	6445	MCS0	4.50	4.43
6.5GHz	002.111140-1110	107	6485	MCSU	4.85	4.74
0.5GHZ	802.11ac40-VHT0	99	6445	MCS0	4.50	4.41
	002.11ac40-VH10	107	6485	MCSU	4.85	4.78
	802.11ax40-HE0	99	6445	MCS0	4.50	4.32
	002.11ax40-11L0	107	6485	MCSU	4.85	4.77
	802.11be40-EHT0	99	6445	MCS0	4.50	4.40
	002.110640-21110	107	6485	WCSO	4.85	4.73
	802.11ac80-VHT0	103	6465	MCS0	7.71	7.60
	002.11acou-v1110	119	6545	WCSO	7.20	7.05
	802.11ax80-HE0	103	6465	MCS0	7.71	7.63
	002.11dA00-11E0	119	6545	141000	7.20	7.03
	802.11be80-EHT0	103	6465	MCS0	7.71	7.59
		119	6545		7.20	7.16
	802.11ac160-VHT0	111	6505	MCS0	11.09	10.90
	802.11ax160-HE0	111	6505	MCS0	13.00	12.86
	802.11be160-EHT0	111	6505	MCS0	11.09	10.97
	802.11be320-EHT0	95	6425	MCS0	13.00	12.88

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 38 of 108

			Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
	802.11a	117 149 181	6535 6695 6855	6Mbps	-1.31 -0.71 -0.87	-1.44 -0.83 -1.07
	802.11n20-HT0	117 149 181	6535 6695 6855	MCS0	1.68 2.36 2.47	1.52 2.27 2.40
	802.11ac20-VHT0	117 149 181	6535 6695 6855	MCS0	1.68 2.36 2.47	1.48 2.20 2.27
	802.11ax20-HE0	117 149 181	6535 6695 6855	MCS0	1.68 2.36 2.47	1.62 2.21 2.36
	802.11be20-EHT0	117 149 181	6535 6695 6855	MCS0	1.68 2.36 2.47	1.53 2.19 2.34
	802.11n40-HT0	115 147 179	6525 6685 6845	MCS0	4.96 4.51 4.62	4.85 4.44 4.48
	802.11ac40-VHT0	115 147 179	6525 6685 6845	MCS0	4.96 4.51 4.62	4.78 4.31 4.49
U-NII-7 6.7GHz	802.11ax40-HE0	115 147 179	6525 6685 6845	MCS0	4.96 4.51 4.62	4.80 4.38 4.50
	802.11be40-EHT0	115 147 179	6525 6685 6845	MCS0	4.96 4.51 4.62	4.77 4.35 4.47
	802.11ac80-VHT0	135 151 167	6625 6705 6785	MCS0	6.68 6.68 6.68	6.57 6.49 6.58
	802.11ax80-HE0	135 151 167	6625 6705 6785	MCS0	6.68 6.68 6.68	6.57 6.55 6.61
	802.11be80-EHT0	135 151 167	6625 6705 6785	MCS0	6.68 6.68 6.68	6.54 6.57 6.63
	802.11ac160-VHT0	143 175	6665 6825	MCS0	10.94 10.57	10.81 10.44
	802.11ax160-HE0	143 175	6665 6825	MCS0	10.94 10.57	10.80
	802.11be160-EHT0	143 175 127	6665 6825 6585	MCS0	10.94 10.57 13.00	10.87 10.41 12.99
	802.11be320-EHT0	159	6745	MCS0	13.00	12.99

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 39 of 108

			Main			
			IVIAIII			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		185	6875		-0.82	-0.94
	802.11a	209	6995	6Mbps	-0.98	-1.11
		233	7115		-1.02	-1.16
		185	6875		2.18	1.99
	802.11n20-HT0	209	6995	MCS0	2.59	2.41
		233	7115]	-8.72	-8.88
		185	6875		2.18	2.10
	802.11ac20-VHT0	209	6995	MCS0	2.59	2.52
		233	7115		-8.72	-8.84
	802.11ax20-HE0	185	6875		2.18	2.02
		209	6995	MCS0	2.59	2.46
		233	7115		-8.72	-8.87
		185	6875		2.18	2.02
	802.11be20-EHT0	209	6995	MCS0	2.59	2.44
		233	7115		-8.72	-8.83
	802.11n40-HT0	187	6885	MCS0	4.78	4.60
	002.1111 4 0-Π10	227	7085	MCSU	4.88	4.74
U-NII-8	000 44 40 \/UT0	187	6885	MCS0	4.78	4.63
7.0GHz	802.11ac40-VHT0	227	7085	MCSU	4.88	4.81
	802.11ax40-HE0	187	6885	MCS0	4.78	4.65
	002.11ax40-HE0	227	7085	MCSU	4.88	4.78
	802.11be40-EHT0	187	6885	MCS0	4.78	4.61
	002.11be40-L1110	227	7085	MCSU	4.88	4.75
		183	6865		6.42	6.37
	802.11ac80-VHT0	199	6945	MCS0	7.82	7.70
		215	7025		7.36	7.28
		183	6865		6.42	6.33
	802.11ax80-HE0	199	6945	MCS0	7.82	7.75
		215	7025		7.36	7.17
		183	6865	_	6.42	6.27
	802.11be80-EHT0	199	6945	MCS0	7.82	7.73
		215	7025		7.36	7.25
	802.11ac160-VHT0	207	6985	MCS0	11.31	11.20
	802.11ax160-HE0	207	6985	MCS0	13.00	12.87
	802.11be160-EHT0	207	6985	MCS0	11.31	11.22
	802.11be320-EHT0	191	6905	MCS0	13.00	12.96

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 40 of 108

Aux									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)			
	802.11a	1 45	5955 6175	6Mbps	-0.80 -3.09	-0.91 -3.21			
	802.11n20-HT0	93 1 45	6415 5955 6175	MCS0	-2.46 2.60 0.47	-2.64 2.47 0.37			
		93	6415 5955		1.03	0.91 2.48			
	802.11ac20-VHT0	45 93	6175 6415	MCS0	0.47 1.03	0.29 0.88			
	802.11ax20-HE0	1 45 93	5955 6175 6415	MCS0	2.60 0.47 1.03	2.47 0.31 0.90			
	802.11be20-EHT0	1 45 93	5955 6175 6415	MCS0	2.60 0.47 1.03	2.41 0.37 0.94			
	802.11n40-HT0	3 43	5965 6165	MCS0	6.00 6.12	5.91 6.02			
	802.11ac40-VHT0	0.459 3 0.424	6405 5965 6165	MCS0	4.85 6.00 6.12	4.72 5.88 6.05			
U-NII-5	802.11ax40-HE0	91 0.439 43	6405 5965 6165	MCS0	4.85 6.00 6.12	4.77 5.90 6.00			
6.2GHz	802.11be40-EHT0	91 3 43	6405 5965 6165	MCS0	4.85 6.00 6.12	4.76 5.88 5.95			
		91 7	6405 5985		4.85 7.87	4.72 7.71			
	802.11ac80-VHT0	39 87 7	6145 6385 5985	MCS0	7.47 7.10 7.87	7.39 7.01 7.75			
	802.11ax80-HE0	39 87	6145 6385	MCS0	7.47 7.10	7.73 7.32 7.00			
	802.11be80-EHT0	7 39	5985 6145	MCS0	7.87 7.47	7.79 7.33			
	802.11ac160-VHT0	87 15 47 79	6385 6025 6185 6345	MCS0	7.10 11.70 11.59 10.72	6.98 11.63 11.51 10.58			
	802.11ax160-HE0	15 47 79	6025 6185 6345	MCS0	11.70 11.59 10.72	11.65 11.47 10.60			
	802.11be160-EHT0	15 47 79	6025 6185 6345	MCS0	11.70 11.59 10.72	11.63 11.39 10.64			
	802.11be320-EHT0	31 63	6105 6265	MCS0	13.50 13.50	13.47 13.39			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

t (886-2) 2299-3279



Page: 41 of 108

			Δ			
	I		Aux			I
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		97	6435		-1.76	-1.93
	802.11a	105	6475	6Mbps	-1.54	-1.67
		113	6515		-1.30	-1.45
		97	6435		2.66	2.55
	802.11n20-HT0	105	6475	MCS0	2.44	2.35
		113	6515		2.51	2.38
	802.11ac20-VHT0	97	6435		2.66	2.49
		105	6475	MCS0	2.44	2.29
		113	6515		2.51	2.41
		97	6435		2.66	2.48
	802.11ax20-HE0	105	6475	MCS0	2.44	2.36
		113	6515		2.51	2.32
		97	6435		2.66	2.56
	802.11be20-EHT0	105	6475	MCS0	2.44	2.25
		113	6515		2.51	2.42
U-NII-6	802.11n40-HT0	99	6445	MCS0	5.15	5.06
6.5GHz	002.111140-1110	107	6485	MCSU	5.62	5.48
0.5GHZ	802.11ac40-VHT0	99	6445	MCS0	5.15	5.01
	002.11ac40-VH10	107	6485	MCSU	5.62	5.51
	802.11ax40-HE0	99	6445	MCS0	5.15	5.03
	002.11ax40-11L0	107	6485	MCSU	5.62	5.57
	802.11be40-EHT0	99	6445	MCS0	5.15	5.04
	002.110640-21110	107	6485	WCSO	5.62	5.53
	802.11ac80-VHT0	103	6465	MCS0	8.42	8.27
	002.11acou-v1110	119	6545	WCSO	7.89	7.75
	802.11ax80-HE0	103	6465	MCS0	8.42	8.33
	002.11ax00-11L0	119	6545	WOOO	7.89	7.78
	802.11be80-EHT0	103	6465	MCS0	8.42	8.36
		119	6545		7.89	7.74
	802.11ac160-VHT0	111	6505	MCS0	12.08	12.00
	802.11ax160-HE0	111	6505	MCS0	13.50	13.34
	802.11be160-EHT0	111	6505	MCS0	12.08	11.98
	802.11be320-EHT0	95	6425	MCS0	13.50	13.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 42 of 108

			Aux			
			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		117	6535		-1.78	-1.92
	802.11a	149	6695	6Mbps	-1.61	-1.74
		181	6855		-1.80	-1.90
		117	6535		1.53	1.42
	802.11n20-HT0	149	6695	MCS0	1.53	1.35
		0.215	6855		1.75	1.62
		117	6535		1.53	1.35
	802.11ac20-VHT0	149	6695	MCS0	1.53	1.33
		181	6855		1.75	1.61
		117	6535		1.53	1.37
	802.11ax20-HE0	149	6695	MCS0	1.53	1.38
		181	6855		1.75	1.65
		117	6535		1.53	1.40
	802.11be20-EHT0	149	6695	MCS0	1.53	1.42
		181	6855		1.75	1.64
		115	6525	1	5.57	5.46
	802.11n40-HT0	147	6685	MCS0	4.80	4.67
		179	6845		4.98	4.90
	000 44 40 10 10 170	115	6525	MCCO	5.57	5.41
	802.11ac40-VHT0	147	6685	MCS0	4.80	4.62
U-NII-7		179	6845		4.98	4.90
6.7GHz	802.11ax40-HE0	115	6525	MCS0	5.57	5.48
6.7GHZ	002.11ax40-⊓⊑0	147	6685		4.80	4.71
		179	6845 6525		4.98 5.57	4.79 5.40
	802.11be40-EHT0	115 147	6685	MCS0	4.80	4.63
	002.11bC+0-L1110	179	6845	10000	4.98	4.86
		135	6625		7.40	7.29
	802.11ac80-VHT0	151	6705	MCS0	7.40	7.29
	302.114300 11110	167	6785	555	7.40	7.26
		135	6625		7.40	7.26
	802.11ax80-HE0	151	6705	MCS0	7.40	7.28
		167	6785	1	7.40	7.26
		135	6625		7.40	7.20
	802.11be80-EHT0	151	6705	MCS0	7.40	7.34
		167	6785	1	7.40	7.20
	000 44 22400 \ // 170	143	6665	MOCO	11.99	11.88
	802.11ac160-VHT0	175	6825	MCS0	11.04	10.85
	900 11av460 UE0	143	6665	MCCO	11.99	11.87
	802.11ax160-HE0	175	6825	MCS0	11.04	10.89
	802.11be160-EHT0	143	6665	MCS0	11.99	11.91
	002.11DE10U-EN1U	175	6825	IVICOU	11.04	10.83
	802 11he320_EHT0	127	6585	MCS0	13.50	13.33
	802.11be320-EHT0	159	6745	IVIOOU	13.50	13.44

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,他都是好用魔影测验之样只有害,同时他接见魔鬼匆匆子。太祖华主领太公司事而验证,太司刘公道测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. _| No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 43 of 108

			Ausz			
	T	1	Aux	1		
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		185	6875		-1.72	-1.86
	802.11a	209	6995	6Mbps	-1.89	-2.04
		233	7115] [-1.79	-1.99
		185	6875		1.55	1.45
	802.11n20-HT0	209	6995	MCS0	1.95	1.84
		233	7115] [-9.62	-9.75
		185	6875		1.55	1.46
	802.11ac20-VHT0	209	6995	MCS0	1.95	1.82
		233	7115		-9.62	-9.82
	802.11ax20-HE0	185	6875		1.55	1.47
		209	6995	MCS0	1.95	1.86
		233	7115		-9.62	-9.71
		185	6875		1.55	1.41
	802.11be20-EHT0	209	6995	MCS0	1.95	1.82
		233	7115		-9.62	-9.76
	802.11n40-HT0	187	6885	MCS0	5.13	4.96
		227	7085	IVICSU	5.11	4.98
U-NII-8	000 4440 \/UT0	187	6885	MCS0	5.13	4.97
7.0GHz	802.11ac40-VHT0	227	7085	MCSU	5.11	5.01
	802.11ax40-HE0	187	6885	MCS0	5.13	5.01
	002.11ax40-HE0	227	7085	MCSU	5.11	4.97
	802.11be40-EHT0	187	6885	MCS0	5.13	5.02
	002.11be40-L1110	227	7085	MCSU	5.11	4.99
		183	6865		7.19	7.08
	802.11ac80-VHT0	199	6945	MCS0	8.48	8.35
		215	7025		8.23	8.10
		183	6865	_	7.19	7.05
	802.11ax80-HE0	199	6945	MCS0	8.48	8.34
		215	7025		8.23	8.14
		183	6865		7.19	7.11
	802.11be80-EHT0	199	6945	MCS0	8.48	8.36
		215	7025		8.23	8.09
	802.11ac160-VHT0	207	6985	MCS0	11.66	11.47
	802.11ax160-HE0	207	6985	MCS0	13.50	13.40
	802.11be160-EHT0	207	6985	MCS0	11.66	11.62
	802.11be320-EHT0	191	6905	MCS0	13.50	13.49

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 44 of 108

MIMO SP

MIMO_SI			Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
	802.11a	1 45	5955 6175	6Mbps	13.00 13.00	12.83 12.80
		93 1	6415 5955		13.00 13.00	12.91 12.80
	802.11n20-HT0	45 93	6175 6415	MCS0	13.00 13.00	12.86 12.87
	802.11ac20-VHT0	1 45 93	5955 6175 6415	MCS0	13.00 13.00 13.00	12.84 12.90 12.91
	802.11ax20-HE0	1 45 93	5955 6175 6415	MCS0	13.00 13.00 13.00	12.80 12.90 12.87
	802.11be20-EHT0	1 45 93	5955 6175 6415	MCS0	13.00 13.00	12.86 12.86 12.89
	802.11n40-HT0	3 43 91	5965 6165 6405	13.00 13.00 MCS0 13.00		12.88 12.90 12.89
	802.11ac40-VHT0	3 43 91	5965 6165 6405	MCS0	13.00 13.00 13.00 13.00	12.92 12.95 12.90
U-NII-5	802.11ax40-HE0	3 43 91	5965 6165 6405	MCS0	13.00 13.00 13.00	12.91 12.80 12.90
6.2GHz	802.11be40-EHT0	3 43	5965 6165	MCS0	13.00 13.00	12.91 12.85
	802.11ac80-VHT0	91 7 39	6405 5985 6145	MCS0	13.00 13.00 13.00	12.91 12.88 12.85
	802.11ax80-HE0	87 7 39	6385 5985 6145	MCS0	13.00 13.00 13.00	12.81 12.87 12.88
	802.11be80-EHT0	87 7 39 87	6385 5985 6145 6385	MCS0	13.00 13.00 13.00 13.00	12.86 12.92 12.87 12.82
	802.11ac160-VHT0	15 47 79	6025 6185 6345	MCS0	13.00 13.00 13.00 13.00	12.88 12.92 12.83
	802.11ax160-HE0	15 47 79	6025 6185 6345	MCS0	13.00 13.00 13.00	12.92 12.83 12.92
_	802.11be160-EHT0	15 47 79	6025 6185 6345	MCS0	13.00 13.00 13.00	12.80 12.80 12.83
	802.11be320-EHT0	31 63	6105 6265	MCS0	13.00 13.00	12.98 12.91

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,他都是结果做到的这种,他就是结果的。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

JOJ Talwari Ltu.



Page: 45 of 108

			Main			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
	802.11a	117 149 181	6535 6695 6855	6Mbps	13.00 13.00 13.00	12.85 12.89 12.94
	802.11n20-HT0	117 149 181	6535 6695 6855	MCS0	13.00 13.00 13.00	12.83 12.92 12.84
	802.11ac20-VHT0	117 149 181	6535 6695 6855	MCS0	13.00 13.00 13.00	12.92 12.88 12.83
	802.11ax20-HE0	117 149 181	6535 6695 6855	MCS0	13.00 13.00 13.00	12.89 12.91 12.87
	802.11be20-EHT0	117 149 181	6535 6695 6855	MCS0	13.00 13.00 13.00	12.84 12.86 12.93
	802.11n40-HT0	115 147 179	6525 6685 6845	MCS0	13.00 13.00 13.00	12.80 12.86 12.82
	802.11ac40-VHT0	115 147 179	6525 6685 6845	MCS0	13.00 13.00 13.00	12.85 12.82 12.80
U-NII-7 6.7GHz	802.11ax40-HE0	115 147 179	6525 6685 6845	MCS0	13.00 13.00 13.00	12.92 12.87 12.87
	802.11be40-EHT0	115 147 179	6525 6685 6845	MCS0	13.00 13.00 13.00	12.85 12.93 12.89
	802.11ac80-VHT0	135 151 167	6625 6705 6785	MCS0	13.00 13.00 13.00	12.84 12.86 12.87
	802.11ax80-HE0	135 151 167	6625 6705 6785	MCS0	13.00 13.00 13.00	12.91 12.83 12.92
	802.11be80-EHT0	135 151 167	6625 6705 6785	MCS0	13.00 13.00 13.00	12.91 12.86 12.90
	802.11ac160-VHT0	143 175	6665 6825	MCS0	13.00 13.00	12.94 12.82
	802.11ax160-HE0	143 175	6665 6825	MCS0	13.00 13.00	12.92 12.88
	802.11be160-EHT0	143 175 127	6665 6825 6585	MCS0	13.00 13.00 13.00	12.93 12.85 12.99
	802.11be320-EHT0	159	6745	MCS0	13.00	12.99

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 46 of 108

Aux									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)			
		1	5955		13.50	13.35			
	802.11a	45	6175	6Mbps	13.50	13.33			
		93	6415	1 '	13.50	13.36			
		1	5955		13.50	13.37			
	802.11n20-HT0	45	6175	MCS0	13.50	13.38			
		93	6415		13.50	13.34			
		1	5955		13.50	13.37			
	802.11ac20-VHT0	45	6175	MCS0	13.50	13.39			
		93	6415		13.50	13.39			
		1	5955		13.50	13.37			
	802.11ax20-HE0	45	6175	MCS0	13.50	13.40			
		93	6415		13.50	13.45			
		1	5955		13.50	13.38			
	802.11be20-EHT0	45	6175	MCS0	13.50	13.39			
		93	6415		13.50	13.44			
		3	5965		13.50	13.36			
	802.11n40-HT0	43	6165	MCS0	13.50	13.35			
		0.459	6405		13.50	13.42			
		3	5965		13.50	13.39			
	802.11ac40-VHT0	0.424	6165	MCS0	13.50	13.39			
		91	6405		13.50	13.32			
		0.439	5965		13.50	13.35			
U-NII-5	802.11ax40-HE0	43	6165	MCS0	13.50	13.33			
6.2GHz		91	6405		13.50	13.41			
0.2GHZ		3	5965	MCS0	13.50	13.36			
	802.11be40-EHT0	43	6165		13.50	13.40			
		91	6405		13.50	13.39			
		7	5985		13.50	13.38			
	802.11ac80-VHT0	39	6145	MCS0	13.50	13.33			
		87	6385		13.50	13.37			
		7	5985		13.50	13.40			
	802.11ax80-HE0	39	6145	MCS0	13.50	13.42			
		87	6385		13.50	13.34			
		7	5985		13.50	13.32			
	802.11be80-EHT0	39	6145	MCS0	13.50	13.40			
		87	6385		13.50	13.39			
		15	6025	1	13.50	13.34			
	802.11ac160-VHT0	47	6185	MCS0	13.50	13.42			
		79	6345		13.50	13.38			
		15	6025	1	13.50	13.37			
	802.11ax160-HE0	47	6185	MCS0	13.50	13.39			
		79	6345		13.50	13.31			
		15	6025	1	13.50	13.35			
	802.11be160-EHT0	47	6185	MCS0	13.50	13.32			
		79	6345		13.50	13.36			
	802.11be320-EHT0	31	6105	MCS0	13.50	13.47			
	302.1106020-LITTU	63	6265	IVICOU	13.50	13.39			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 47 of 108

			Aux			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
	802.11a	117 149 181	6535 6695 6855	6Mbps	13.50 13.50 13.50	13.26 13.37 13.33
	802.11n20-HT0	117 149 0.215	6535 6695 6855	MCS0	13.50 13.50 13.50	13.33 13.30 13.37
	802.11ac20-VHT0	117 149 181	6535 6695 6855	MCS0	13.50 13.50 13.50	13.39 13.42 13.39
	802.11ax20-HE0	117 149 181	6535 6695 6855	MCS0	13.50 13.50 13.50	13.27 13.30 13.31
	802.11be20-EHT0	117 149 181	6535 6695 6855	MCS0	13.50 13.50 13.50	13.33 13.32 13.34
	802.11n40-HT0	115 147 179	6525 6685 6845	MCS0	13.50 13.50 13.50	13.38 13.26 13.31
	802.11ac40-VHT0	115 147 179	6525 6685 6845	MCS0	13.50 13.50 13.50	13.35 13.35 13.36
U-NII-7 6.7GHz	802.11ax40-HE0	115 147 179	6525 6685 6845	MCS0	13.50 13.50 13.50	13.34 13.24 13.35
	802.11be40-EHT0	115 147 179	6525 6685 6845	MCS0	13.50 13.50 13.50	13.29 13.33 13.26
	802.11ac80-VHT0	135 151 167	6625 6705 6785	MCS0	13.50 13.50 13.50	13.27 13.28 13.31
	802.11ax80-HE0	135 151 167	6625 6705 6785	MCS0	13.50 13.50 13.50	13.33 13.31 13.31
	802.11be80-EHT0	135 151 167	6625 6705 6785	MCS0	13.50 13.50 13.50	13.32 13.37 13.27
	802.11ac160-VHT0	143 175	6665 6825	MCS0	13.50 13.50	13.39 13.33
	802.11ax160-HE0	143 175	6665 6825	MCS0	13.50 13.50	13.33 13.30
	802.11be160-EHT0	143 175 127	6665 6825 6585	MCS0	13.50 13.50 13.50	13.32 13.31 13.33
	802.11be320-EHT0	159	6745	MCS0	13.50	13.33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 48 of 108

6.3 Bluetooth

MIMO Aux

<u>/</u>	101/1							
			1Mbps		2Mbps		3Mbps	
Mode	Channel	Frequency (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
	CH 00	2402		10.21		5.47		5.66
BR/EDR	CH 39	2441	10.65	10.63	6.45	5.53	6.45	5.55
	CH 78	2480		9.95		4.87		4.88

MIMO Main

	viaiii											
			1Mbps		2Mbps		3Mbps					
Mode	Channel (MHz) CH 00 2402	Frequency (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)				
	CH 00	2402		10.52		6.88		6.72				
BR/EDR	CH 39	2441	11.53	10.66	7.65	6.73	7.65	6.65				
	CH 78	2480		9.93		6.62		6.13				

SISO_Aux

3130_7	ux										
			1Mbps		2Mbps		3Mbps				
Mode	Channel	(MHz) T	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)			
	CH 00	2402		14.16		10.67		10.66			
BR/EDR	CH 39	2441	15.48	14.48	11.45	10.58	11.45	10.50			
	CH 78	2480		13.78		9.87		9.88			

SISO Main

<u> </u>	Idiii									
			1Mbps		2Mbps		3Mbps			
Mode	Channel (MF	Frequency (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)		
	CH 00	2402		14.44		10.32		10.38		
BR/EDR	CH 39	2441	15.48	14.89	11.45	11.18	11.45	11.19		
	CH 78	2480		13.60		10.48		10.47		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. [李北只有的时,他想生在用席料调建了梯口名書,同时他接口席问题的一个,本想也上领于八司書而述可,不可如心海剿。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

JOS Talwari Etd.



Page: 49 of 108

MIMO Aux

IVIIIVIO_AUX									
Mada	Channal	Frequency	(GFSK					
Mode	Channel	(MHz)	Max. Rated Avg.Power + Max. Tolerance (dBm)	Average Output Power (dBm)					
	CH 00	2402		8.61					
BLE_1M	CH 19	2440	9.22	8.82					
	CH 39	2480		7.83					
Mode	Channel	Frequency		GFSK					
Mode	Charmer	(MHz)	Max. Rated Avg.Power + Max. Tolerance (dBm)	Average Output Power (dBm)					
	CH 00	2402		8.54					
BLE_2M	CH 19	2440	9.22	8.64					
	CH 39	2480		7.87					

MIMO Main

IVIIIVIO_IVIAIII									
Mode	Channel	Frequency	C	GFSK					
Mode	Channel	(MHz)	Max. Rated Avg.Power + Max. Tolerance (dBm)	Average Output Power (dBm)					
	CH 00	2402		9.48					
BLE_1M	CH 19	2440	10.33	9.55					
	CH 39	2480		9.21					
Mode	Channel	Frequency		GFSK					
Wode	Charmer	(MHz)	Max. Rated Avg.Power + Max. Tolerance (dBm)	Average Output Power (dBm)					
	CH 00	2402		9.78					
BLE_2M	CH 19	2440	10.32	9.42					
	CH 39	2480		9.22					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 50 of 108

SISO Aux

<u>0100_/\u0x</u>										
Mada	Chanal	Frequency	GFSK							
Mode	Channel	(MHz)	Max. Rated Avg.Power + Max. Tolerance (dBm)	Average Output Power (dBm)						
	CH 00	2402		12.52						
BLE_1M	CH 19	2440	13.86	12.93						
	CH 39	2480		11.98						
Mode	Channel	Frequency	(GFSK						
Mode	Chaine	(MHz)	Max. Rated Avg.Power + Max. Tolerance (dBm)	Average Output Power (dBm)						
	CH 00	2402		12.59						
BLE_2M	CH 19	2440	13.85	12.87						
	CH 39	2480		11.99						

SISO Main

<u> </u>								
Mada	Chanal	Frequency	(GFSK				
Mode	Channel	(MHz)	Max. Rated Avg.Power + Max. Tolerance (dBm)	Average Output Power (dBm)				
	CH 00	2402		12.57				
BLE_1M	CH 19	2440	13.86	12.94				
	CH 39	2480		11.98				
Mode	Channel	Frequency		GFSK				
Wode	Chaine	(MHz)	Max. Rated Avg.Power + Max. Tolerance (dBm)	Average Output Power (dBm)				
	CH 00	2402		12.51				
BLE_2M	CH 19	2440	13.85	12.88				
	CH 39	2480		11.98				

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.




Page: 51 of 108

SGS

DUTY CYCLE

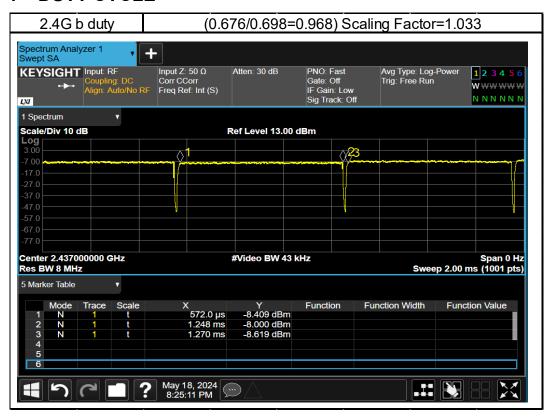

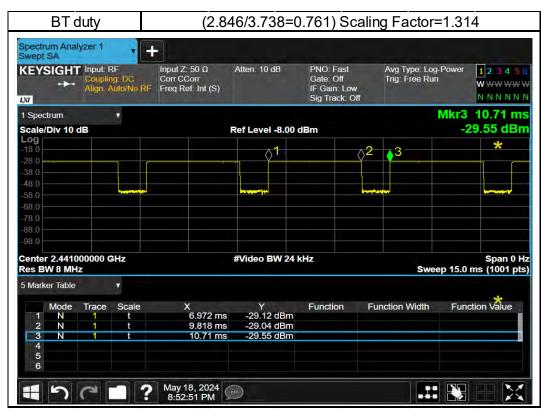



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 52 of 108

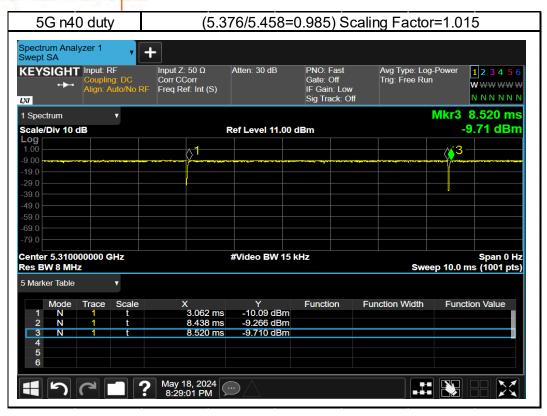

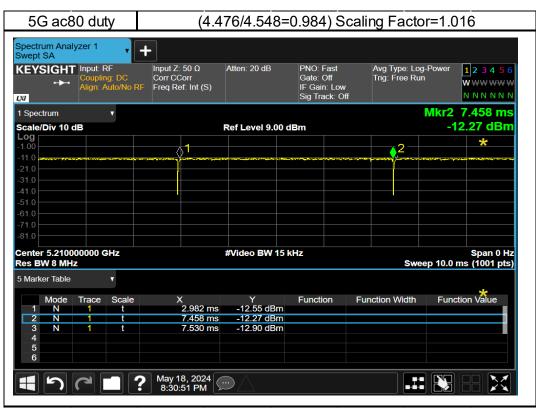



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 53 of 108

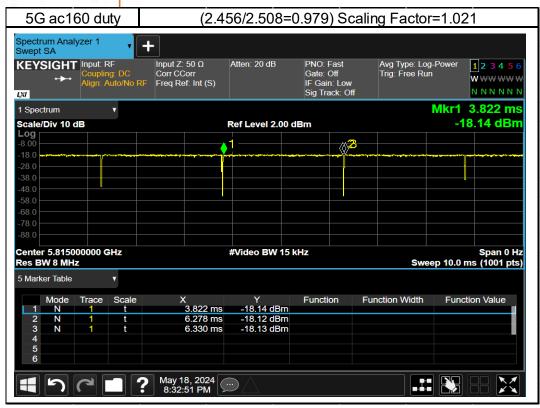

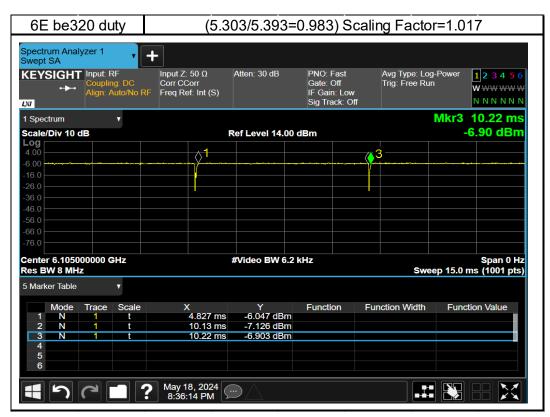

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

S Taiwan Ltd. _| No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 54 of 108

8 SUMMARY OF RESULTS

8.1 Decision rules

Reported measurement data comply with Test Methodology in section 1.1.

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

8.2 Summary of SAR Results

WLAN

** = / \												
Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	ID
WLAN 802.11b	Main	Bottom Surface	0	1	2412	15.50	15.49	1.03	100.23%	0.441	0.457	001
WLAN 802.11b	Main	Bottom Surface	0	6	2437	15.50	15.48	1.03	100.46%	0.424	0.440	-
WLAN 802.11b	Main	Bottom Surface	0	11	2462	15.50	15.38	1.03	102.80%	0.428	0.455	-
Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	ID
Bluetooth(GFSK)	Main	Bottom Surface	0	39	2441	15.48	14.89	1.31	114.55%	0.209	0.315	002
Biddisolii(Gi Git)	TVIAIT1	Dottom Ganado		00		Max. Rated Avg.	Measured					002
Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)	Duty cycle scaling	Power scaling	Measured	over 1g (W/kg) Reported	ID
WLAN 802.11ac(80M) 5.2G	Main	Bottom Surface	0	42	5210	14.00	13.95	1.02	101.16%	0.469	0.482	003
Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg) Reported	ID
WLAN 802.11n(40M) 5.3G	Main	Bottom Surface	0	62	5310	14.00	13.92	1.02	101.86%	0.572	0.591	004
Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	ID
WLAN 802.11ac(80M) 5.6G	Main	Bottom Surface	0	106	5530	14.00	13.99	1.02	100.23%	0.418	0.426	005
WLAN 802.11ac(80M) 5.6G	Main	Bottom Surface	0	122	5610	14.00	13.95	1.02	101.16%	0.405	0.416	-
WLAN 802.11ac(80M) 5.6G	Main	Bottom Surface	0	138	5690	14.00	13.89	1.02	102.57%	0.392	0.408	-
Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	ID
WLAN 802.11ac(80M) 5.8G	Main	Bottom Surface	0	155	5775	14.00	13.89	1.02	102.57%	0.578	0.602	006
Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	ID
WLAN 802.11ac(80M) 5.9G	Main	Bottom Surface	0	171	5855	14.00	13.94	1.02	101.39%	0.521	0.539	007
Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	ID
WLAN 802.11b	Aux	Bottom Surface	0	1	2412	16.00	15.99	1.03	100.23%	0.352	0.364	008
WLAN 802.11b	Aux	Bottom Surface	0	6	2437	16.00	15.90	1.03	102.33%	0.328	0.347	-
WLAN 802.11b	Aux	Bottom Surface	0	11	2462	16.00	15.81	1.03	104.47%	0.313	0.338	-
Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg) Reported	ID
Bluetooth(GFSK)	Aux	Bottom Surface	0	39	2441	15.48	14.48	1.31	125.89%	0.185	0.306	009
Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg) Reported	ID
WLAN 802.11ac(80M) 5.2G	Aux	Bottom Surface	0	42	5210	14.00	13.96	1.02	100.93%	0.568	0.582	010
Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg) Reported	ID
WLAN 802.11ac(80M) 5.3G	Aux	Bottom Surface	0	58	5290	14.00	13.99	1.02	100.23%	0.427	0.435	011
Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	ID
WLAN 802.11ac(80M) 5.6G	Aux	Bottom Surface	0	106	5530	14.00	13.93	1.02	101.62%	0.770	0.795	012
WLAN 802.11ac(80M) 5.6G	Aux	Bottom Surface	0	122	5610	14.00	13.82	1.02	104.23%	0.750	0.794	-
WLAN 802.11ac(80M) 5.6G	Aux	Bottom Surface	0	138	5690	14.00	13.78	1.02	105.20%	0.738	0.789	-
Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg) Reported	ID
WLAN 802.11ac(80M) 5.8G	Aux	Bottom Surface	0	155	5775	14.00	13.99	1.02	100.23%	1.000	1.018	013
WLAN 802.11ac(80M) 5.8G	Aux	Bottom Surface	0	155	5775	14.00	13.99	1.02	100.23%	0.982	1.000	-
Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	ID
WLAN 802.11ac(160M) 5.9G	Aux	Bottom Surface	0	163	5815	14.00	13.98	1.02	100.46%	1.000	1.026	014
WLAN 802.11ac(160M) 5.9G	Aux	Bottom Surface	0	163	5815	14.00	13.98	1.02	100.46%	0.974	0.999	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之缘具负责,同时此模具做是例如于。木型生主领水公司事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. _| No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw



Page: 55 of 108

WLAN 6GHz

Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR			W/m^2 (4cm^2)	ID	
						` ,	, ,			Measured	Reported	Measured	Reported		
U-NII-5 6.2GHz 802.11be(320M)	Main	Bottom Surface	0	31	6105	13.00	12.98	1.02	100.46%	0.692	0.707	5.04	5.149	-	
U-NII-5 6.2GHz 802.11be(320M)	Main	Bottom Surface	0	63	6265	13.00	12.91	1.02	102.09%	0.703	0.730	5.11	5.306	015	
Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR			W/m^2 (4cm^2)	ID	
						Tolerance (dBm)	(dBm)			Measured	Reported	Measured	Reported		
U-NII-6 6.5GHz 802.11be(320M)	Main	Bottom Surface	0	95	6425	13.00	12.88	1.02	102.80%	0.800	0.836	5.83	6.095	016	
U-NII-6 6.5GHz 802.11be(320M)	Main	Bottom Surface	0	95	6425	13.00	12.88	1.02	102.80%	0.785	0.821	5.72	5.980	-	
Band	Antenna	Position	Distance (mm)	(mm) Channel (MHz) Power + Max. Avg. Power se		Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated APD	ID				
	Tolerance (dBm)		(dBm)	ŭ	ű	Measured	Reported	Measured	Reported						
U-NII-7 6.7GHz 802.11be(320M)	Main	Bottom Surface	0	127	6585	13.00	12.99	1.02	100.23%	0.941	0.959	6.95	7.084	017	
U-NII-7 6.7GHz 802.11be(320M)	Main	Bottom Surface	0	159	6745	13.00	12.88	1.02	102.80%	0.836	0.874	5.24	5.478	-	
U-NII-7 6.7GHz 802.11be(320M)	Main	Bottom Surface	0	127	6585	13.00	12.99	1.02	100.23%	0.912	0.930	6.74	6.870	-	
Band	Antenna	Position	Distance (mm)	Channel	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		Estimated APD	ID		
			()		(Tolerance (dBm)	(dBm)			Measured	Reported	Measured	Reported		
U-NII-8 7.0GHz 802.11be(320M)	Main	Bottom Surface	0	191	6905	13.00	12.96	1.02	100.93%	0.654	0.671	4.85	4.978	018	
Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated APD	W/m^2 (4cm^2)	ID	
			` '		, ,	Tolerance (dBm)	(dBm)	Ť	Ť	Measured	Reported	Measured	Reported		
U-NII-5 6.2GHz 802.11be(320M)	Aux	Bottom Surface	0	31	6105	13.50	13.47	1.02	100.69%	0.593	0.607	4.69	4.803	019	
U-NII-5 6.2GHz 802.11be(320M)	Aux	Bottom Surface	0	63	6265	13.50	13.39	1.02	102.57%	0.448	0.467	3.66	3.818	-	
Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated APD	W/m^2 (4cm^2)	ID	
			()		(11.1.12)	Tolerance (dBm)	(dBm)	County	oodg	Measured	Reported	Measured	Reported		
U-NII-6 6.5GHz 802.11be(320M)	Aux	Bottom Surface	0	95	6425	13.50	13.42	1.02	101.86%	0.433	0.449	3.68	3.812	020	
Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling		Averaged SAR over 1g (W/kg)		W/m^2 (4cm^2)	ID	
						Tolerance (dBm)	(dBm)		-	Measured	Reported	Measured	Reported		
U-NII-7 6.7GHz 802.11be(320M)	Aux	Bottom Surface	0	159	6745	13.50	13.44	1.02	101.39%	0.384	0.396	2.65	2.733	021	
Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		Estimated APD	ID		
						` ,	, ,			Measured	Reported	Measured	Reported		
U-NII-8 7.0GHz 802.11be(320M)	Aux	Bottom Surface	0	191	6905	13.50	13.49	1.02	100.23%	0.319	0.325	2.58	2.630	022	

Note:

Reported SAR = measured SAR * Power scaling * Duty cycle scaling Reported APD = measured APD * Power scaling * Duty cycle scaling

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format

documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 56 of 108

Summary of PD Results

			Distance		Freq.	Max. Rated Avg.	Measured	Tune-up	Duty cycle	Measurement		PD res	ult(4cm)		
Band	Antenna	Position	(mm)	Channel	(MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)	Scaling Scaling	scaling	uncertainty	Measured Total psPD (W/m^2)	Reported Total psPD (W/m^2)	Measured Normal psPD (W/m^2)	Reported Normal psPD (W/m^2)	ID
WLAN 6E 802.11be(320M)	Main	Bottom Surface	2	31	6105	13.00	12.98	100.46%	1.02	1.55	3.960	6.271	3.250	5.147	023
U-NII-5	Main	Bottom Surface	2	63	6265	13.00	12.91	102.09%	1.02	1.55	4.140	6.663	3.140	5.053	024
WLAN 6E 802.11be(320M) U-NII-6	Main	Bottom Surface	2	95	6425	13.00	12.88	102.80%	1.02	1.55	4.080	6.612	3.290	5.331	025
WLAN 6E 802.11be(320M) U-NII-7	Main	Bottom Surface	2	127	6585	13.00	12.99	100.23%	1.02	1.55	5.180	8.184	4.140	6.541	026
WLAN 6E 802.11be(320M) U-NII-8	Main	Bottom Surface	2	191	6905	13.00	12.96	100.93%	1.02	1.55	3.680	5.855	2.510	3.993	027
			Distance		_	Max. Rated Avg.	Measured	_				PD res	ult(4cm)		
Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)	Tune-up Scaling	Duty cycle scaling	Measurement uncertainty	Measured Total psPD (W/m^2)	0.459	Measured Normal psPD (W/m^2)	Reported Normal psPD (W/m^2)	ID
WLAN 6E 802.11be(320M)	Aux	Bottom Surface	2	31	6105	13.50	13.47	100.69%	1.02	1.55	4.110	6.524	3.420	5.428	028
U-NII-5	Aux	Bottom Surface	2	63	6265	13.50	13.39	102.57%	1.02	1.55	3.260	0.424	2.330	3.767	029
WLAN 6E 802.11be(320M) U-NII-6	Aux	Bottom Surface	2	95	6425	13.50	13.42	101.86%	1.02	1.55	3.700	0.439	2.540	4.078	030
WLAN 6E 802.11be(320M) U-NII-7	Aux	Bottom Surface	2	159	6745	13.50	13.44	101.39%	1.02	1.55	2.470	3.948	2.140	3.420	031
WLAN 6E 802.11be(320M)															

Note:

Reported PD = measured PD * Power scaling * Duty cycle scaling * Uncertainty scaling

8.4 Reporting statements of conformity

The conformity statement in this report is based solely on the test results, measurement uncertainty is excluded.

Conclusion 8.5

The device is compliant because all the standalone results are less than their corresponding criteria.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 57 of 108

SIMULTANEOUS TRANSMISSION ANALYSIS

9.1 **Simultaneous Transmission Scenarios:**

Simultaneous Transmission configurations	Body
WLAN 2.4GHz Main + WLAN 2.4GHz Aux	Yes
WLAN 2.4GHz Main + BT Aux	Yes
WLAN 2.4GHz Aux + BT Main	Yes
WLAN 2.4GHz Main + WLAN 2.4GHz Aux + WLAN 5GHz Main + WLAN 5GHz Aux	Yes
WLAN 5GHz Main + WLAN 5GHz Aux	Yes
WLAN 5GHz Aux + BT Main	Yes
WLAN 5GHz Main + BT Aux	Yes
WLAN 5GHz Main + WLAN 5GHz Aux + BT Main	Yes
WLAN 5GHz Main + WLAN 5GHz Aux + BT Aux	Yes
WLAN 5GHz Main + WLAN 5GHz Aux + BT Main + BT Aux	Yes
WLAN 6GHz Aux + BT Main	Yes
WLAN 6GHz Main + BT Aux	Yes
WLAN 6GHz Main + WLAN 6GHz Aux	Yes
WLAN 6GHz Main + WLAN 6GHz Aux + BT Main	Yes
WLAN 6GHz Main + WLAN 6GHz Aux + BT Aux	Yes
WLAN 2.4GHz Main + WLAN 2.4GHz Aux + WLAN 6GHz Main + WLAN 6GHz Aux	Yes
WLAN 6GHz Main + WLAN 6GHz Aux + BT Main + BT Aux	Yes

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 58 of 108

9.2 Estimated SAR calculation

According to KDB447498 D01v06 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

Estimated SAR =
$$\frac{\text{Max. tune up power (mW)}}{\text{Min. test separation distance(mm)}} \times \frac{\sqrt{\text{f(GHz)}}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

9.3 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by (SAR1 + SAR2)^1.5/Ri, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司




Page: 59 of 108


Simultaneous Transmission Combination

					FCC Rep	orted SAR				Scenario 1	Scenario 2	Scenario 3	Scenario 4	Scenario 5	Scenario 6	Scenario 7	Scenario 8	Scenario 9	Scenario 10	Scenario 11	Scenario 12	Scenario 13	Scenario 14	Scenario 15	Scenario 16	Scenario 17
		2	3	4	5	6	7	00	9	2+3	2+7	3+6	2+3+4+5	4+5	5+6	4+7	4+5+6	4+5+7	4+5+6+7	6+9	7+8	8+9	6+8+9	7+8+9	2+3+8+9	6+7+8+9
Exposure Pos	aition	2.4GHz WLAN Main	2.4GHz WLAN Aux	SGHz WLAN Main	5GHz WLAN Aux	Bluetooth Main	Bluelooth Aux	6GHz WLAN Main	6GHz WLAN Aux	Summed	Summed	Summed	Summed	Summed	Summed	Summed	Summed	Summed	Summed	Summed	Summed	Summed	Summed	Summed	Summed	Summed
		1g SAR (Wkg)	1g SAR (Wkg)	1g SAR (Wikg)	1g SAR (Wkg)	1g SAR (Wikg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (Wkg)	1g SAR (Wkg)	1g SAR (W/kg)	1g SAR (Wikg)	1g SAR (Wkg)	1g SAR (Wikg)											
Bottom Surface	0	0.457	0.354	0.602	1.026	0.315	0.306	0.959	0.607	0.821	0.763	0.679	2.449	1.628	1.341	0.903	1.943	1.934	2.249	0.922	1.265	1.401	1.881	1.872	2.387	2.187

	Scenario 4												
Position	Conditions	SAR Value	Coordinates (cm)			ΣSAR	Peak Location	SPLSR	Simultaneous Transmission SAR				
FOSILIOIT	Conditions	(W/kg)	х	У	z	(W/kg)	Separation Distance (mm)	SFLSK	Test				
Bottom	WLAN 2.4G Main + WLAN 5G Main	1.059	-10.60	-9.86	-0.30	-	-	-	-				
Surface	WLAN 2.4G Aux + WLAN 5G Aux	1.390	-10.76	9.46	-0.30	2.449	193.21	0.020	SPLSR ≤ 0.04, Not required				

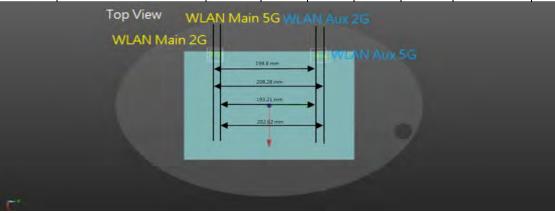

				Scenario 5	& 9				
Position	Conditions	SAR Value	Co	oordinates (d	cm)	ΣSAR	Peak Location	SPLSR	Simultaneous Transmission SAR
Position	Conditions	(W/kg)	х	у	z	(W/kg)	Separation Distance (mm)	OI LOIK	Test
	WLAN 5G Main	0.602	-10.60	-9.86	-0.30	-	-	-	-
Bottom Surface	WLAN 5G Aux	1.026	-10.30	10.40	-0.30	1.628	202.62	0.010	SPLSR ≤ 0.04, Not required
	WLAN5G Aux + BT Aux	1.332	-11.02	9.86	-0.31	1.934	197.24	0.014	SPLSR ≤ 0.04, Not required

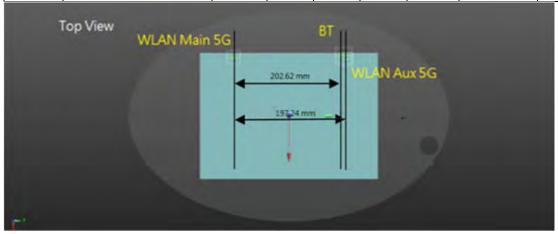


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 60 of 108

	Scenario 8												
Position	Conditions	SAR Value	Co	Coordinates (cm)			Peak Location	SPLSR	Simultaneous Transmission SAR				
Position	Conditions	(W/kg)	х	у	Z	(W/kg)	Separation Distance (mm)	SPLSK	Test				
Bottom	WLAN 5G Aux	1.026	-10.30	10.40	-0.30	-	-	-	-				
Surface	WLAN5G Main + BT Main	0.917	-10.60	-9.86	-0.30	1.943	202.62	0.013	SPLSR ≤ 0.04, Not required				

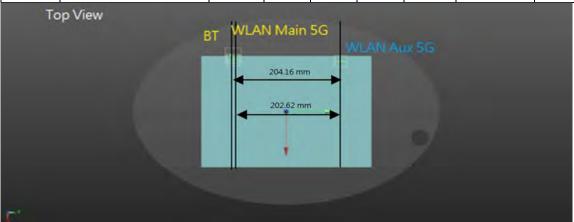

	Scenario 10												
Position	Conditions	SAR Value	Coordinates (cm)			ΣSAR	Peak Location	SPLSR	Simultaneous Transmission SAR				
Position	Conditions	(W/kg)	х	у	Z	(W/kg)	Separation Distance (mm)	SPLSK	Test				
Bottom	WLAN 5G Main + BT Main	0.917	-10.60	-9.86	-0.30	-	•	i	-				
Surface	Surface WLAN 5G Aux + BT Aux		-11.02	9.86	-0.31	2.249	197.24	0.017	SPLSR ≤ 0.04, Not required				

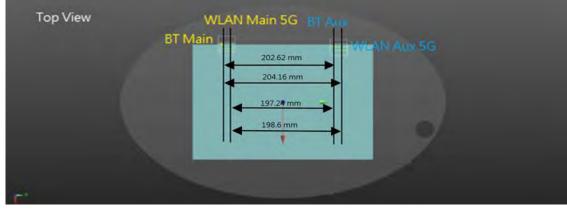


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 61 of 108

	Scenario 15												
Position	Conditions	SAR Value	Co	Coordinates (cm)			Peak Location	SPLSR	Simultaneous Transmission SAR				
FOSILIOII	Conditions	(W/kg)	х	у	Z	(W/kg)	Separation Distance (mm)	SPLSR	Test				
Bottom	WLAN 6G Main	0.959	-10.50	-9.78	-0.30	-	-	-	-				
Surface	WLAN6G Aux + BT Aux	0.913	-11.02	9.86	-0.31	1.872	196.47	0.013	SPLSR ≤ 0.04, Not required				

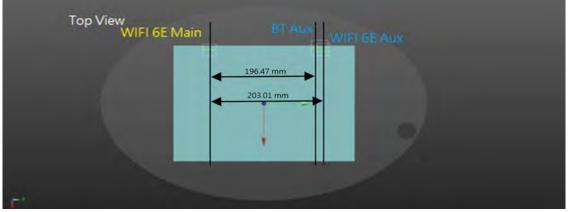

	Scenario 14												
Position	Conditions	SAR Value	Coordinates (cm)			ΣSAR	Peak Location	SPLSR	Simultaneous Transmission SAR				
Position	Conditions	(W/kg)	х	у	Z	(W/kg)	Separation Distance (mm)	SPLOK	Test				
Bottom	WLAN 6G Aux	0.607	-10.68	10.52	-0.30	-	-	-	-				
Surface	WLAN6G Main + BT Main	1.274	-10.50	-9.78	-0.30	1.881	203.01	0.013	SPLSR ≤ 0.04, Not required				

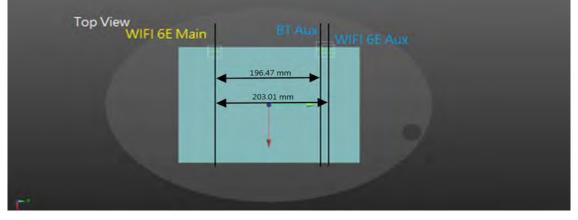


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 62 of 108

	Scenario 16												
Position	Conditions	SAR Value	Co	oordinates (c	em)	ΣSAR	Peak Location	SPLSR	Simultaneous Transmission SAR				
Position		(W/kg)	х	у	Z	(W/kg)	Separation Distance (mm)	SPLSK	Test				
Bottom	WLAN 2.4G Main + WLAN 6G Main	1.416	-10.50	-9.78	-0.30	-	•	-	-				
Surface	WLAN 2.4G Aux + WLAN 6G Aux	0.971	-10.76	9.46	-0.30	2.387	192.42	0.019	SPLSR ≤ 0.04, Not required				

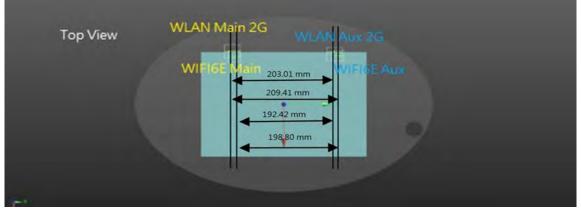

	Scenario 17												
Position	Conditions	SAR Value	Coordinates (cm)			ΣSAR	Peak Location	SPLSR	Simultaneous Transmission SAR				
FOSILIOII	Conditions	(W/kg)	х	У	Z	(W/kg)	Separation Distance (mm)	SPLSR	Test				
Bottom	WLAN 6G Main + BT Main	1.274	-10.50	-9.78	-0.30	-	-	-	-				
Surface	WLAN 6G Aux + BT Aux	0.913	-11.02	9.86	-0.12	2.187	196.48	0.016	SPLSR ≤ 0.04, Not required				

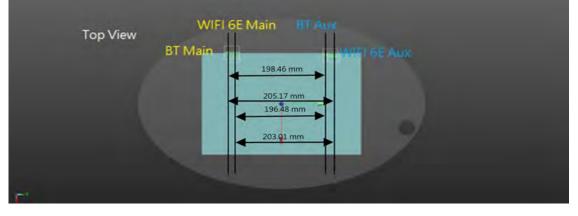

9.4 Conclusion

The simultaneous transmission is compliant because both SAR sum and/or SPLSR are less than their corresponding criteria.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 63 of 108

10 INSTRUMENTS LIST

		Equi	pment List		
Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
SPEAG	Data acquisition Electronics	DAE4	856	Apr/22/2024	Apr/21/2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	7509	Apr/23/2024	Apr/22/2025
SPEAG	E-field Probe for Near Field Application	EUmmWV4	9643	Aug/04/2023	Aug/03/2024
SPEAG	System Validation Dipole	D2450V2	727	Apr/22/2024	Apr/21/2025
SPEAG	System Validation Dipole	D5GHzV2	1023	Jan/24/2024	Jan/23/2025
SPEAG	System Validation Dipole	D6.5GHzV2	1006	Aug/16/2023	Aug/15/2024
SPEAG	System Validation Dipole	D7GHzV2	1007	Aug/16/2023	Aug/15/2024
SPEAG	5G Verification Source 10GHz	5G-Veri10	1070	Aug/08/2023	Aug/07/2024
SPEAG	Dielectric Assessment Kit	DAKS-3.5	1053	Feb/21/2024	Feb/20/2025
R&S	MXG Analog Signal Generator	SMB100A03	182996	Mar/29/2024	Mar/28/2025
Agilent	Dual-directional coupler	772D	MY46151258	Sep/26/2023	Sep/25/2024
Agilent	Dual-directional coupler	778D	MY46151242	Sep/26/2023	Sep/25/2024
EMCI	Amplifier	EMC 074225P	980155	Calibration not required	Calibration no required
EMCI	Amplifier	EMC 2830P	980156	Calibration not required	Calibration no required
R&S	Power Sensor	NRP18S	109065	Oct/23/2023	Oct/22/2024
R&S	Power Meter	NRX	102034	Dec/13/2023	Dec/12/2024
R&S	Power Sensor	NRP18S	101974	Nov/21/2023	Nov/20/2024
SPEAG	Software	DASY 6 V16.0.2.136	N/A	Calibration not required	Calibration no required
SPEAG	Software	DASY 52 V52.10.4.152 7	N/A	Calibration not required	Calibration no required
SPEAG	Software	DASY 6 mmWave V2.4.2.62	N/A	Calibration not required	Calibration no required
SPEAG	Phantom	ELI	N/A	Calibration not required	Calibration no required
SPEAG	Phantom	mmWave Phantom	N/A	Calibration not required	Calibration no required
TECPEL	Digital thermometer	DTM-303A	TP131515	Jun/02/2023	Jun/01/2024

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是结果做新测验之样具有害,同时他接具做是例如于。未想生主概未从司事而连可,无可如必指制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 64 of 108

11 UNCERTAINTY BUDGET

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	00
Isotropy , Axial	3.50%	R	√ 3	1.732	1	1	2.02%	2.02%	œ
Isotropy, Hemispherical	9.60%	R	√ 3	1.732	1	1	5.54%	5.54%	00
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√ 3	1.732	1	1	0.58%	0.58%	œ
Linearity	4.70%	R	√ 3	1.732	1	1	2.71%	2.71%	00
Detection Limits	1.00%	R	√ 3	1.732	1	1	0.58%	0.58%	00
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	00
Response time	0.80%	R	√ 3	1.732	1	1	0.46%	0.46%	00
Integration Time	2.60%	R	√ 3	1.732	1	1	1.50%	1.50%	00
Measurement drift (class A evaluation)	1.75%	R	√ 3	1.732	1	1	1.01%	1.01%	00
RF ambient condition - noise	3.00%	R	√ 3	1.732	1	1	1.73%	1.73%	00
RF ambient conditions - reflections	3.00%	R	√ 3	1.732	1	1	1.73%	1.73%	00
Probe positioner Mechanical restrictions	0.40%	R	√ 3	1.732	1	1	0.23%	0.23%	8
Probe Positioning with respect to phantom shell	2.90%	R	√ 3	1.732	1	1	1.67%	1.67%	8
Post-processing	1.00%	R	√ 3	1.732	1	1	0.58%	0.58%	00
Max SAR Eval	1.00%	R	√ 3	1.732	1	1	0.58%	0.58%	00
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√ 3	1.732	1	1	2.89%	2.89%	œ
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√ 3	1.732	1	1	2.31%	2.31%	8
Liquid permittivity (mea.)	1.62%	N	1	1	0.64	0.43	1.04%	0.70%	М
Liquid Conductivity (mea.)	1.57%	N	1	1	0.6	0.49	0.94%	0.77%	М
Combined standard uncertainty		RSS					11.80%	11.75%	
Expant uncertainty (95% confidence interval), K=2							23.60%	23.51%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有验证,他就是结果成果的证明,不可能以推翻。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. _| No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 65 of 108

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	∞
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	8
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	1.31%	N	1	1	0.64	0.43	0.84%	0.56%	М
Liquid Conductivity (mea.)	1.05%	N	1	1	0.6	0.49	0.63%	0.51%	М
Combined standard uncertainty		RSS					11.47%	11.43%	
Expant uncertainty (95% confidence interval), K=2							22.93%	22.87%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 66 of 108

DASY6 Uncertainty Budget According to IEC/IEEE 62209-1528 (Frequency band: 6GHz - 10GHz range)

	1	<u>queriey</u>	Dana	00112		71 1Z 1 U	·· <u>9</u> -/	
а	b	С	d		е	е	f=b * e / d	f=b * e / d
Source of Uncertainty	Uncertainty Value (±%)	Probability Distributioin	Div.	Div. Value	(ci) 1g	(ci) 10g	Std. uncertainty (1g) (±%)	Std. uncertainty (10g) (±%)
Measurement system errors								
Probe calibration	18.6	N	2	2	1	1	9.3	9.3
Probe Calibration Drift	1.7	R	√3	1.732	1	1	1.0	1.0
Probe Linearity	4.7	R	√3	1.732	1	1	2.7	2.7
Broadband Signal	2.8	R	√3	1.732	1	1	1.6	1.6
Probe Isotropy	7.6	R	√3	1.732	1	1	4.4	4.4
Data Acquisition	0.3	N	1	1	1	1	0.3	0.3
RF Ambient	1.8	N	1	1	1	1	1.8	1.8
Probe positioning	0.2	N	1	1	0.67	0.67	0.1	0.1
Data Processing	3.5	N	1	1	1	1	3.5	3.5
Phantom and device errors	•	•	•					
Conductivity (meas.)DAK	2.5	N	1	1	0.78	0.71	2.0	1.8
Conductivity (temp.)BB	2.4	R	√3	1.732	0.78	0.71	1.1	1.0
Phantom Permittivity	14.0	R	√3	1.732	0.5	0.5	4.0	4.0
Distance DUT - TSL	2.0	N	1	1	2	2	4.0	4.0
Device Positioning (±0.5mm)	1.0	N	1	1	1	1	1.0	1.0
Device Holder	3.6	N	1	1	1	1	3.6	3.6
DUT Modulationm	2.4	R	√3	1.732	1	1	1.4	1.4
Time-average SAR	0.0	R	√3	1.732	1	1	0.0	0.0
DUT drift	2.5	N	1	1	1	1	2.5	2.5
Val Antenna Unc.	0.0	N	1	1	1	1	0.0	0.0
Unc. Input Power	0.0	N	1	1	1	1	0.0	0.0
Correction to the SAR results	•							
Deviation to Target	1.90	N	1	1	1	0.84	1.9	1.6
SAR scaling		R	√3	1.732	1	1	0.0	0.0
Combined Std. uncertainty							14.0	13.9
Expanded Std. uncertainty (95% confidence interval), K=2							28.0	27.8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 67 of 108

cDASY6 Module mmWave Uncertainty Budget for PD Evaluation Distances to the Antennas ≧λ/ 5 In Compliance with IEC/IEEE 63195

а	b	С	d		е	f=b * e / d	g
Source of Uncertainty	Uncertainty Value (+-dB)	Probability Distributioin	Div.	Div. Value	ci	Std. uncertainty (+-dB)	(vi) Veff
Uncertainty terms dependent on th	e measurement	system					
Probe calibration	0.49	N	1	1	1	0.49	œ
Probe correction	0.00	R	√3	1.732	1	0.00	00
Frequency response (BW ≦1GHz)	0.20	R	√3	1.732	1	0.12	œ
Sensor cross coupling	0.00	R	√3	1.732	1	0.00	00
Isotropy	0.50	R	√3	1.732	1	0.29	œ
Linearity	0.20	R	√3	1.732	1	0.12	œ
Probe scattering	0.00	R	√3	1.732	1	0.00	œ
Probe positioning offset	0.30	R	√3	1.732	1	0.17	œ
Probe positioning repeatability	0.04	R	√3	1.732	1	0.02	œ
Sensor mechanical offset	0.00	R	√3	1.732	1	0.00	œ
Probe spatial resolution	0.00	R	√3	1.732	1	0.00	∞
Field impedance dependance	0.00	R	√3	1.732	1	0.00	∞
Amplitude and phase drift	0.00	R	√3	1.732	1	0.00	∞
Amplitude and phase noise	0.04	R	√3	1.732	1	0.02	∞
Measurement area truncation	0.00	R	√3	1.732	1	0.00	∞
Data acquisition	0.03	N	1	1	1	0.03	00
Sampling	0.00	R	√3	1	1	0.00	œ
Field reconstruction	2.00	R	√3	1.732	1	1.15	∞
Forward transformation	0.00	R	√3	1.732	1	0.00	œ
Power density scaling	-	R	√3	1.732	1	-	œ
Spatial averaging	0.10	R	√3	1.732	1	0.06	∞
System detection limit	0.04	R	√3	1.732	1	0.02	œ
Uncertainty terms dependent on th	e DUT and envir	onmental facto	ors				1
Probe coupling with DUT	0.00	R	√3	1.732	1	0.00	œ
Modulation response	0.40	R	√3	1.732	1	0.23	00
Integration time	0.00	R	√3	1.732	1	0.00	œ
Response time	0.00	R	√3	1.732	1	0.00	∞
Device holder influence	0.10	R	√3	1.732	1	0.06	œ
DUT alignment	0.00	R	√3	1.732	1	0.00	00
RF ambient conditions	0.04	R	√3	1.732	1	0.02	œ
Ambient reflections	0.04	R	√3	1.732	1	0.02	00
Immunity / secondary reception	0.00	R	√3	1.732	1	0.00	œ
Drift of the DUT	-	R	√3	1.732	1	-	00
Combined Std. uncertainty						1.33	
Expanded Std. uncertainty (95% confidence interval), K=2	†					2.67	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,他都是好用魔影测验之样只有害,同时他接见魔鬼匆匆子。太祖华主领太公司事而验证,太司刘公道测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

iGS Taiwan Ltd. _| No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 68 of 108

12 SAR MEASUREMENT RESULTS

Date: 2024/5/16

ID: 001

Report No.: TESA2404000186EN

WLAN 802.11b_Body_Bottom Surface_CH 1_0mm_Main

Communication System: WLAN 2.45G; Frequency: 2412 MHz; Duty cycle= 1:1.033 Medium parameters used: f = 2412 MHz; $\sigma = 1.75 \text{ S/m}$; $\epsilon_r = 38.924$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7509; ConvF(7.56, 7.46, 7.87) @ 2412 MHz; Calibrated: 2024/4/23

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2024/4/22

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.622 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.682 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.809 W/kg

SAR(1 g) = 0.441 W/kg; SAR(10 g) = 0.208 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 52.9%

Maximum value of SAR (measured) = 0.602 W/kg

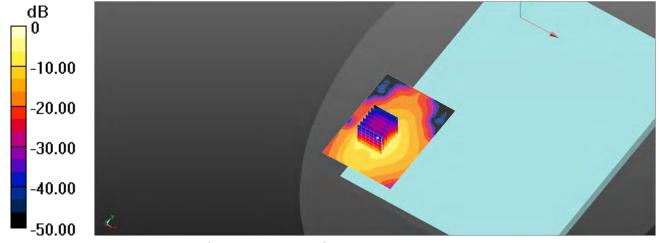

0 dB = 0.622 W/kg = -2.06 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 69 of 108

Date: 2024/5/16

ID: 002

Report No.: TESA2404000186EN

Bluetooth(GFSK) Body Bottom Surface CH 39 0mm Main

Communication System: Bluetooh; Frequency: 2441 MHz; Duty cycle= 1:1.314

Medium parameters used: f = 2441 MHz; $\sigma = 1.777 \text{ S/m}$; $\varepsilon_r = 38.804$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7509; ConvF(7.56, 7.46, 7.87) @ 2441 MHz; Calibrated: 2024/4/23

- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2024/4/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.246 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.237 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.333 W/kg

SAR(1 q) = 0.209 W/kq; SAR(10 q) = 0.116 W/kq

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.2%

Maximum value of SAR (measured) = 0.252 W/kg

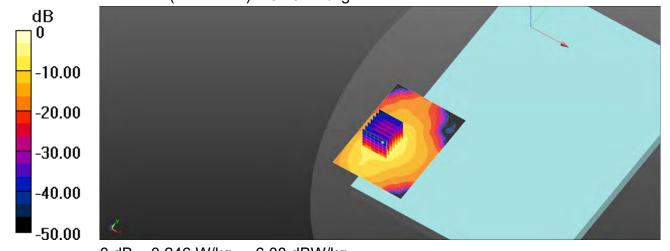

0 dB = 0.246 W/kg = -6.08 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.sgs.com.tw



Page: 70 of 108

Date: 2024/5/17

ID: 003

Report No.: TESA2404000186EN

WLAN 802.11ac(80M) 5.2G Body Bottom Surface CH 42 0mm Main

Communication System: WLAN 5G; Frequency: 5210 MHz; Duty cycle= 1:1.016 Medium parameters used: f = 5210 MHz; σ = 4.697 S/m; ε_r = 36.325; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 SN7509; ConvF(5.56, 5.53, 5.83) @ 5210 MHz; Calibrated: 2024/4/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2024/4/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.862 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.432 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 q) = 0.469 W/kq; SAR(10 q) = 0.167 W/kq

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 58.2%

Maximum value of SAR (measured) = 0.855 W/kg

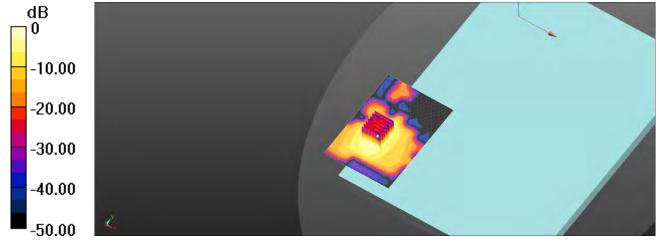

0 dB = 0.855 W/kg = -0.68 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 71 of 108

Date: 2024/5/17

ID: 004

Report No. :TESA2404000186EN

WLAN 802.11n(40M) 5.3G Body Bottom Surface CH 62 0mm Main

Communication System: WLAN 5G; Frequency: 5310 MHz; Duty cycle= 1:1.015 Medium parameters used: f = 5310 MHz; σ = 4.803 S/m; ε_r = 36.073; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN7509; ConvF(5.56, 5.53, 5.83) @ 5310 MHz; Calibrated: 2024/4/23

- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2024/4/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.12 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.237 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 q) = 0.572 W/kq; SAR(10 q) = 0.203 W/kq

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 1.06 W/kg

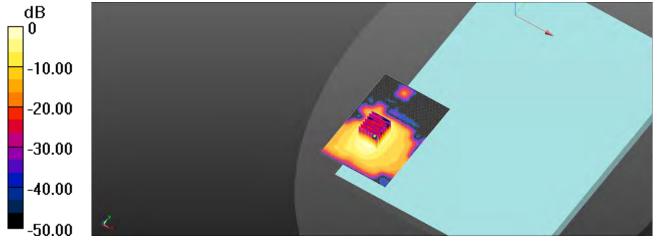

0 dB = 1.06 W/kg = 0.25 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



Page: 72 of 108

Date: 2024/5/17

ID: 005

Report No.: TESA2404000186EN

WLAN 802.11ac(80M) 5.6G Body Bottom Surface CH 106 0mm Main

Communication System: WLAN 5G; Frequency: 5530 MHz; Duty cycle= 1:1.016 Medium parameters used: f = 5530 MHz; $\sigma = 4.926 \text{ S/m}$; $\varepsilon_r = 35.525$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.0°C

DASY5 Configuration:

Probe: EX3DV4 - SN7509; ConvF(4.79, 4.73, 5.07) @ 5530 MHz; Calibrated: 2024/4/23

- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2024/4/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.857 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.938 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 q) = 0.418 W/kq; SAR(10 q) = 0.144 W/kq

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 0.793 W/kg

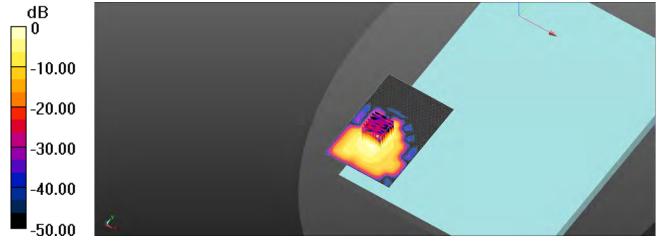

0 dB = 0.793 W/kg = -1.01 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 73 of 108

Date: 2024/5/18

ID: 006

Report No.: TESA2404000186EN

WLAN 802.11ac(80M) 5.8G Body Bottom Surface CH 155 0mm Main

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty cycle= 1:1.016 Medium parameters used: f = 5775 MHz; $\sigma = 5.17$ S/m; $\varepsilon_r = 34.872$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 SN7509; ConvF(5.08, 5.01, 5.36) @ 5775 MHz; Calibrated: 2024/4/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2024/4/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.17 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.232 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 2.28 W/kg

SAR(1 q) = 0.578 W/kq; SAR(10 q) = 0.180 W/kq

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 53.9%

Maximum value of SAR (measured) = 1.16 W/kg

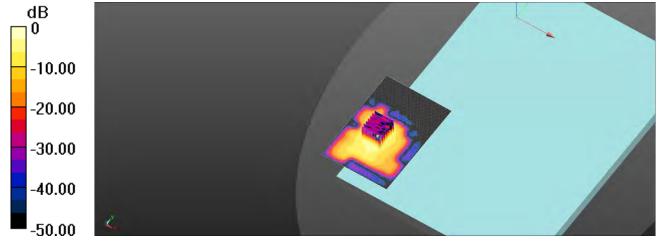

0 dB = 1.16 W/kg = 0.64 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 74 of 108

Date: 2024/5/18

ID: 007

Report No.: TESA2404000186EN

WLAN 802.11ac(80M) 5.9G Body Bottom Surface CH 171 0mm Main

Communication System: WLAN 5G; Frequency: 5855 MHz; Duty cycle= 1:1.016 Medium parameters used: f = 5855 MHz; $\sigma = 5.244$ S/m; $\varepsilon_r = 34.674$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7509; ConvF(5.08, 5.01, 5.36) @ 5855 MHz; Calibrated: 2024/4/23

- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2024/4/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.04 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.621 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 q) = 0.521 W/kq; SAR(10 q) = 0.159 W/kq

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 1.05 W/kg

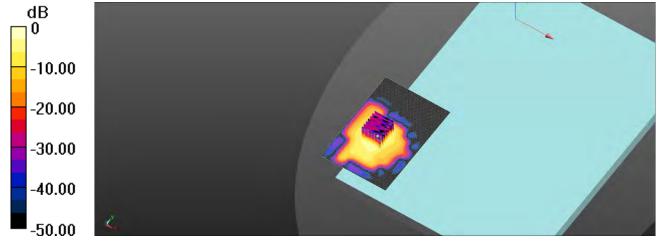

0 dB = 1.05 W/kg = 0.21 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488 t (886-2) 2299-3279



Page: 75 of 108

Date: 2024/5/16

ID: 008

Report No.: TESA2404000186EN

WLAN 802.11b Body Bottom Surface CH 1 0mm Aux

Communication System: WLAN 2.45G; Frequency: 2412 MHz; Duty cycle= 1:1.033 Medium parameters used: f = 2412 MHz; $\sigma = 1.75 \text{ S/m}$; $\varepsilon_r = 38.924$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7509; ConvF(7.56, 7.46, 7.87) @ 2412 MHz; Calibrated: 2024/4/23

- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2024/4/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.504 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.24 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.681 W/kg

SAR(1 q) = 0.352 W/kq; SAR(10 q) = 0.162 W/kq

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 49.8%

Maximum value of SAR (measured) = 0.508 W/kg

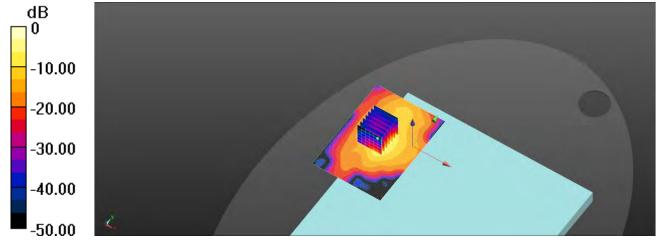

0 dB = 0.504 W/kg = -2.98 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 76 of 108

Date: 2024/5/16

ID: 009

Report No.: TESA2404000186EN

Bluetooth(GFSK) Body Bottom Surface CH 39 0mm Aux

Communication System: Bluetooh; Frequency: 2441 MHz; Duty cycle= 1:1.314

Medium parameters used: f = 2441 MHz; $\sigma = 1.777 \text{ S/m}$; $\varepsilon_r = 38.804$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7509; ConvF(7.56, 7.46, 7.87) @ 2441 MHz; Calibrated: 2024/4/23

- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2024/4/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.237 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.337 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 q) = 0.185 W/kq; SAR(10 q) = 0.087 W/kq

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 49.1%

Maximum value of SAR (measured) = 0.256 W/kg

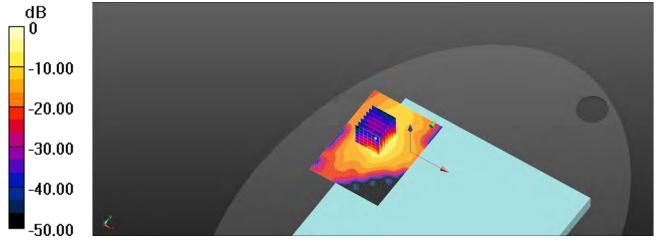

0 dB = 0.237 W/kg = -6.25 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 77 of 108

Date: 2024/5/17

ID: 010

Report No.: TESA2404000186EN

WLAN 802.11ac(80M) 5.2G Body Bottom Surface CH 42 0mm Aux

Communication System: WLAN 5G; Frequency: 5210 MHz; Duty cycle= 1:1.016 Medium parameters used: f = 5210 MHz; σ = 4.697 S/m; ε_r = 36.325; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN7509; ConvF(5.56, 5.53, 5.83) @ 5210 MHz; Calibrated: 2024/4/23

- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2024/4/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.05 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.827 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 q) = 0.568 W/kq; SAR(10 q) = 0.200 W/kq

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 58.6%

Maximum value of SAR (measured) = 1.06 W/kg

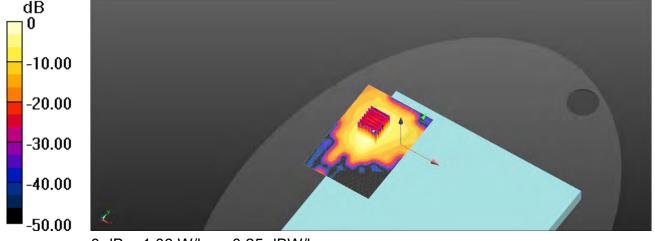

0 dB = 1.06 W/kg = 0.25 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 78 of 108

Date: 2024/5/17

ID: 011

Report No.: TESA2404000186EN

WLAN 802.11ac(80M) 5.3G Body Bottom Surface CH 58 0mm Aux

Communication System: WLAN 5G; Frequency: 5290 MHz; Duty cycle= 1:1.016 Medium parameters used: f = 5290 MHz; $\sigma = 4.78 \text{ S/m}$; $\varepsilon_r = 36.124$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN7509; ConvF(5.56, 5.53, 5.83) @ 5290 MHz; Calibrated: 2024/4/23

- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2024/4/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.813 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.421 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 q) = 0.427 W/kq; SAR(10 q) = 0.146 W/kq

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 57.9%

Maximum value of SAR (measured) = 0.801 W/kg

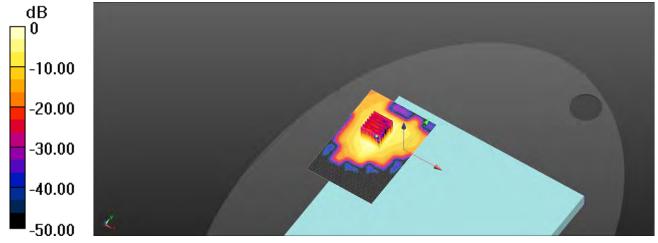

0 dB = 0.801 W/kg = -0.96 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 79 of 108

Date: 2024/5/17

ID: 012

Report No.: TESA2404000186EN

WLAN 802.11ac(80M) 5.6G Body Bottom Surface CH 106 0mm Aux

Communication System: WLAN 5G; Frequency: 5530 MHz; Duty cycle= 1:1.016 Medium parameters used: f = 5530 MHz; $\sigma = 4.926 \text{ S/m}$; $\varepsilon_r = 35.525$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.0°C

DASY5 Configuration:

Probe: EX3DV4 - SN7509; ConvF(4.79, 4.73, 5.07) @ 5530 MHz; Calibrated: 2024/4/23

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2024/4/22

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.37 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.236 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 2.94 W/kg

SAR(1 q) = 0.770 W/kq; SAR(10 q) = 0.257 W/kq

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 55.2%

Maximum value of SAR (measured) = 1.45 W/kg

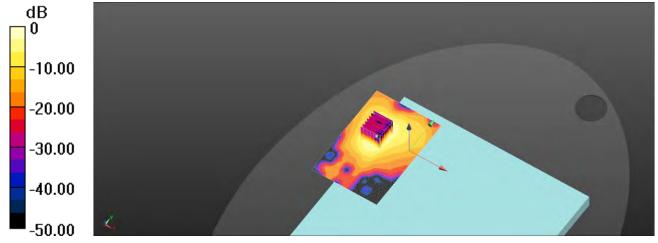

0 dB = 1.45 W/kg = 1.61 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 80 of 108

Date: 2024/5/18

ID: 013

Report No.: TESA2404000186EN

WLAN 802.11ac(80M) 5.8G Body Bottom Surface CH 155 0mm Aux

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty cycle= 1:1.016 Medium parameters used: f = 5775 MHz; $\sigma = 5.17 \text{ S/m}$; $\varepsilon_r = 34.872$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7509; ConvF(5.08, 5.01, 5.36) @ 5775 MHz; Calibrated: 2024/4/23

- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2024/4/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.79 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 12.43 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 3.86 W/kg

SAR(1 g) = 1 W/kg; SAR(10 g) = 0.318 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 1.96 W/kg

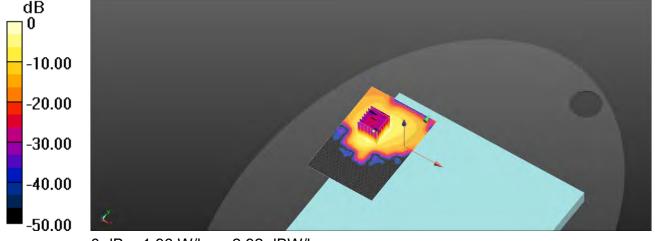

0 dB = 1.96 W/kg = 2.92 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 81 of 108

Date: 2024/5/18

ID: 014

Report No.: TESA2404000186EN

WLAN 802.11ac(160M) 5.9G Body Bottom Surface CH 163 0mm Aux

Communication System: WLAN 5G; Frequency: 5815 MHz; Duty cycle= 1:1.021 Medium parameters used: f = 5815 MHz; $\sigma = 5.203 \text{ S/m}$; $\varepsilon_r = 34.775$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7509; ConvF(5.08, 5.01, 5.36) @ 5815 MHz; Calibrated: 2024/4/23

- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2024/4/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.79 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.63 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 3.73 W/kg

SAR(1 g) = 1 W/kg; SAR(10 g) = 0.326 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 1.95 W/kg

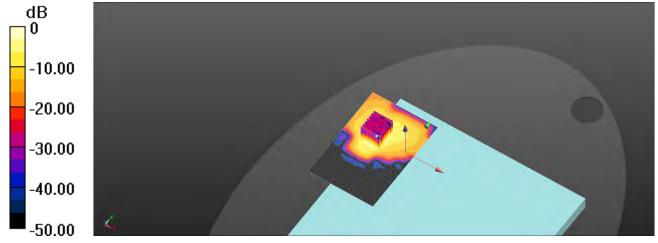

0 dB = 1.95 W/kg = 2.90 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 82 of 108

ID: 015

Report No.: TESA2404000186EN

Measurement Report_U-NII-5 6.2GHz 802.11be(320M)_Body_Bottom Surface_CH 63_0mm_Main

Ambient temperature: 22.2°C; Liquid temperature: 21.7°C

Exposure Conditions

Phantom Section,	Position, Test Distance	Frequency [MHz],Channel	Conversion	TSL Conductivity	TSL
TSL	[mm]	Number	Factor	[S/m]	Permittivity
Flat, HSL	Bottom Surface, 0.00	6265.0, 63	5.22	5.71	34.014

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7509, 2024-4-23	DAE4 Sn856. 2024-04-22

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-19	2024-05-19
psSAR1g [W/kg]	0.652	0.703
psSAR8g [W/kg]	0.238	0.255
psSAR10g [W/kg]	0.208	0.222
psPDab (4.0cm2, sq) [W/m2]		5.11
Power Drift [dB]	-0.02	0.03
M2/M1 [%]		56.7
Dist 3dB Peak [mm]		7.4

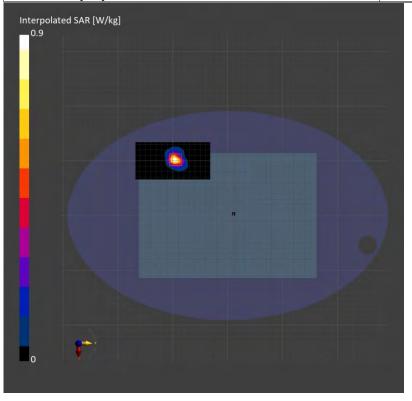

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除北只有铅明,此起华红用陈彤测过了薛里名李,同既此楼里陈尼阿四千。大起华土德大八司事五英可,不可测心掉剩。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 83 of 108

ID: 016

Report No.: TESA2404000186EN

Measurement Report_U-NII-6 6.5GHz 802.11be(320M)_Body_Bottom Surface_CH 95_0mm_Main

Ambient temperature: 22.2°C; Liquid temperature: 21.7°C

Exposure Conditions

Phantom Section,	Position, Test Distance	Frequency [MHz],Channel	Conversion	TSL Conductivity	TSL
TSL	[mm]	Number	Factor	[S/m]	Permittivity
Flat, HSL	Bottom Surface, 0.00	6425.0, 95	5.22	5.872	33.646

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7509, 2024-4-23	DAE4 Sn856. 2024-04-22

Scans Setup

	Area Scan	Zoom Scan	
Grid Extents [mm]	68.0 x 136.0	22.0 x 22.0 x 22.0	
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4	
Sensor Surface [mm]	3.0	1.4	

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-19	2024-05-19
psSAR1g [W/kg]	0.749	0.800
psSAR8g [W/kg]	0.271	0.291
psSAR10g [W/kg]	0.237	0.254
psPDab (4.0cm2, sq) [W/m2]		5.83
Power Drift [dB]	0.05	-0.02
M2/M1 [%]		55.3
Dist 3dB Peak [mm]		7.5

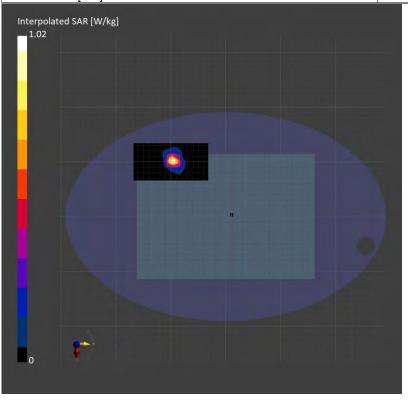

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 84 of 108

ID: 017

Report No.: TESA2404000186EN

Measurement Report_U-NII-7 6.7GHz 802.11be(320M)_Body_Bottom Surface_CH 127_0mm_Main

Ambient temperature: 22.2°C; Liquid temperature: 21.7°C

Exposure Conditions

Phantom Section,	Position, Test Distance	Frequency [MHz],Channel	Conversion	TSL Conductivity	TSL
TSL	[mm]	Number	Factor	[S/m]	Permittivity
Flat, HSL	Bottom Surface, 0.00	6585.0, 127	5.22	6.031	33.278

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7509, 2024-4-23	DAE4 Sn856. 2024-04-22

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-19	2024-05-19
psSAR1g [W/kg]	0.902	0.941
psSAR8g [W/kg]	0.334	0.348
psSAR10g [W/kg]	0.293	0.304
psPDab (4.0cm2, sq) [W/m2]		6.95
Power Drift [dB]	-0.11	-0.14
M2/M1 [%]		54.6
Dist 3dB Peak [mm]		7.6

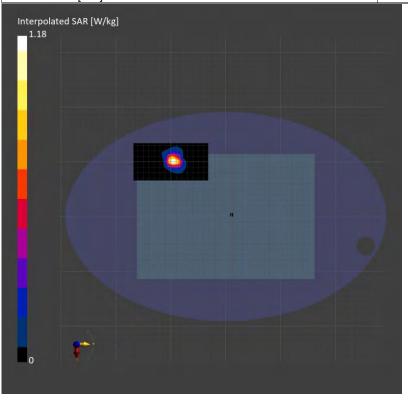

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 85 of 108

ID: 018

Report No.: TESA2404000186EN

Measurement Report_U-NII-8 7.0GHz 802.11be(320M)_Body_Bottom Surface_CH 191_0mm_Main

Ambient temperature: 22.3°C; Liquid temperature: 21.9°C

Exposure Conditions

Phantom Section,	Position, Test Distance	Frequency [MHz],Channel	Conversion	TSL Conductivity	TSL
TSL	[mm]	Number	Factor	[S/m]	Permittivity
Flat, HSL	Bottom Surface, 0.00	6905.0, 191	5.47	6.352	32.543

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7509, 2024-4-23	DAE4 Sn856. 2024-04-22

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-19	2024-05-19
psSAR1g [W/kg]	0.637	0.654
psSAR8g [W/kg]	0.240	0.242
psSAR10g [W/kg]	0.212	0.212
psPDab (4.0cm2, sq) [W/m2]		4.85
Power Drift [dB]	-0.03	-0.02
M2/M1 [%]		53.0
Dist 3dB Peak [mm]		7.5

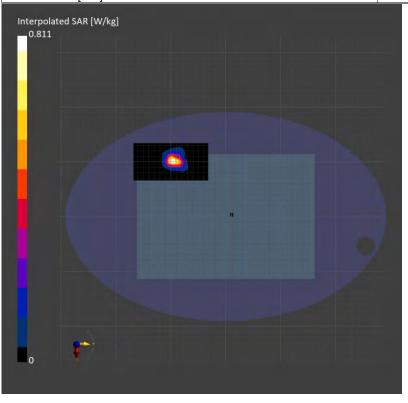

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 86 of 108

ID: 019

Report No.: TESA2404000186EN

Measurement Report_U-NII-5 6.2GHz 802.11be(320M)_Body_Bottom Surface_CH 31_0mm_Aux

Ambient temperature: 22.2°C; Liquid temperature: 21.7°C

Exposure Conditions

Phantom Section,	Position, Test Distance	Frequency [MHz],Channel	Conversion	TSL Conductivity	TSL
TSL	[mm]	Number	Factor	[S/m]	Permittivity
Flat, HSL	Bottom Surface, 0.00	6105.0, 31	5.22	5.552	34.382

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7509, 2024-4-23	DAE4 Sn856. 2024-04-22

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-19	2024-05-19
psSAR1g [W/kg]	0.577	0.593
psSAR8g [W/kg]	0.220	0.235
psSAR10g [W/kg]	0.195	0.207
psPDab (4.0cm2, sq) [W/m2]		4.69
Power Drift [dB]	0.11	-0.13
M2/M1 [%]		57.7
Dist 3dB Peak [mm]		8.0

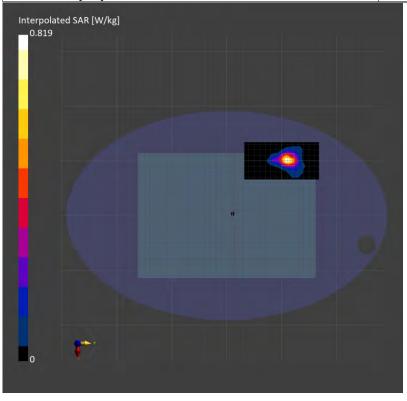

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

t (886-2) 2299-3279



Page: 87 of 108

ID: 020

Report No.: TESA2404000186EN

Measurement Report_U-NII-6 6.5GHz 802.11be(320M)_Body_Bottom Surface_CH 95_0mm_Aux

Ambient temperature: 22.2°C; Liquid temperature: 21.7°C

Exposure Conditions

Phantom Section,	Position, Test Distance	Frequency [MHz],Channel	Conversion	TSL Conductivity	TSL
TSL	[mm]	Number	Factor	[S/m]	Permittivity
Flat, HSL	Bottom Surface, 0.00	6425.0, 95	5.22	5.872	33.646

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7509, 2024-4-23	DAE4 Sn856. 2024-04-22

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-19	2024-05-19
psSAR1g [W/kg]	0.440	0.433
psSAR8g [W/kg]	0.179	0.184
psSAR10g [W/kg]	0.161	0.165
psPDab (4.0cm2, sq) [W/m2]		3.68
Power Drift [dB]	0.05	-0.02
M2/M1 [%]		55.8
Dist 3dB Peak [mm]		8.3

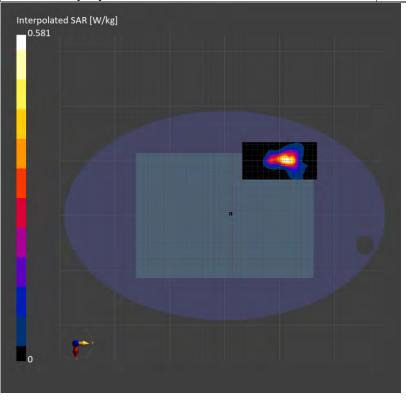

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 88 of 108

ID: 021

Report No.: TESA2404000186EN

Measurement Report_U-NII-7 6.7GHz 802.11be(320M)_Body_Bottom Surface_CH 159_0mm_Aux

Ambient temperature: 22.2°C; Liquid temperature: 21.7°C

Exposure Conditions

Phantom Section,	Position, Test Distance	Frequency [MHz],Channel	Conversion	TSL Conductivity	TSL
TSL	[mm]	Number	Factor	[S/m]	Permittivity
Flat, HSL	Bottom Surface, 0.00	6745.0, 159	5.22	6.19	32.91

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7509, 2024-4-23	DAE4 Sn856, 2024-04-22

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-19	2024-05-19
psSAR1g [W/kg]	0.355	0.384
psSAR8g [W/kg]	0.124	0.133
psSAR10g [W/kg]	0.110	0.116
psPDab (4.0cm2, sq) [W/m2]		2.65
Power Drift [dB]	-0.04	-0.05
M2/M1 [%]		53.0
Dist 3dB Peak [mm]		7.5

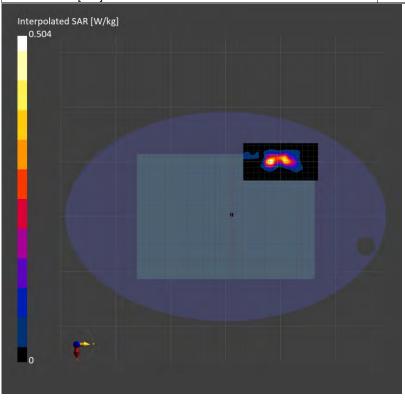

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 89 of 108

ID: 022

Report No.: TESA2404000186EN

Measurement Report_U-NII-8 7.0GHz 802.11be(320M)_Body_Bottom Surface_CH 191_0mm_Aux

Ambient temperature: 22.3°C; Liquid temperature: 21.9°C

Exposure Conditions

Phantom Section,	Position, Test Distance	Frequency [MHz],Channel	Conversion	TSL Conductivity	TSL
TSL	[mm]	Number	Factor	[S/m]	Permittivity
Flat, HSL	Bottom Surface, 0.00	6905.0, 191	5.47	6.352	32.543

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7509, 2024-4-23	DAE4 Sn856. 2024-04-22

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-19	2024-05-19
psSAR1g [W/kg]	0.309	0.319
psSAR8g [W/kg]	0.122	0.129
psSAR10g [W/kg]	0.108	0.114
psPDab (4.0cm2, sq) [W/m2]		2.58
Power Drift [dB]	-0.05	-0.04
M2/M1 [%]		48.4
Dist 3dB Peak [mm]		5.9

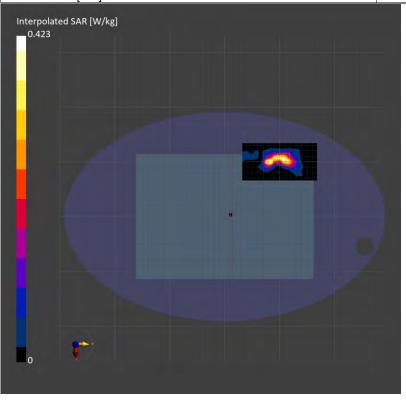

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 90 of 108

13 PD MEASUREMENT RESULTS

ID: 023

Report No.: TESA2404000186EN

Measurement Report Bottom Surface, U-NII-5, Main

IEEE 802.11be (320MHz, MCS0, 99pc duty cycle), Channel 31 (6105.0 MHz)

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	Bottom Surface, 2.00	6105.0, 31	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air -	EUmmWV4 - SN9643_F1-55GHz, 2023-08-04	DAE4 Sn856, 2024-04-22

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2024-05-20
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	3.25
psPDtot+ [W/m²]	3.96
psPDmod+ [W/m²]	4.74
E _{max} [V/m]	59.1
Power Drift [dB]	0.11

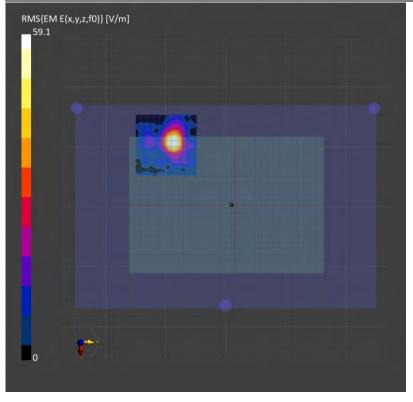

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 91 of 108

ID: 024

Report No.: TESA2404000186EN

Measurement Report_Bottom Surface, U-NII-5, Main

IEEE 802.11be (320MHz, MCS0, 99pc duty cycle), Channel 63 (6265.0 MHz)

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	Bottom Surface, 2.00	6265.0, 63	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air -	EUmmWV4 - SN9643_F1-55GHz, 2023-08-04	DAE4 Sn856, 2024-04-22

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2024-05-20
Avg. Area [cm ²]	4.00
psPDn+ [W/m²]	3.14
psPDtot+ [W/m²]	4.14
psPDmod+ [W/m²]	4.86
E _{max} [V/m]	56.5
Power Drift [dB]	-0.04

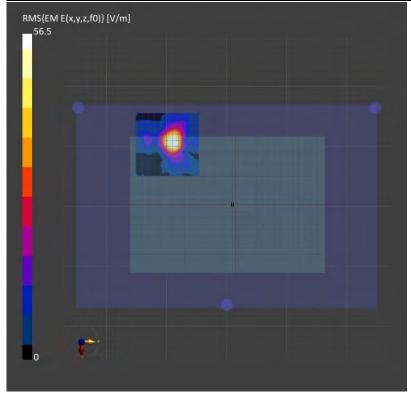

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報华结甲攝影測建立幾只有著,同時世幾只攝展例の主。大報华主標太公司書面對可,不可可以複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 92 of 108

ID: 025

Report No.: TESA2404000186EN

Measurement Report_Bottom Surface, U-NII-6, Main

IEEE 802.11be (320MHz, MCS0, 99pc duty cycle), Channel 95 (6425.0 MHz)

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	Bottom Surface, 2.00	6425.0, 95	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air -	EUmmWV4 - SN9643_F1-55GHz, 2023-08-04	DAE4 Sn856, 2024-04-22

Scans Setup

ound outup	
Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2024-05-20
Avg. Area [cm ²]	4.00
psPDn+ [W/m²]	3.29
psPDtot+ [W/m²]	4.08
psPDmod+ [W/m²]	4.68
E _{max} [V/m]	53.7
Power Drift [dB]	0.13

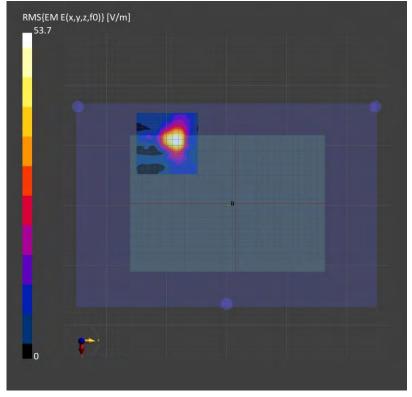

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 93 of 108

ID: 026

Report No.: TESA2404000186EN

Measurement Report_Bottom Surface, U-NII-7, Main

IEEE 802.11be (320MHz, MCS0, 99pc duty cycle), Channel 127 (6585.0 MHz)

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz],Channel Number	Conversion Factor
5G	Bottom Surface, 2.00	6585.0, 127	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air -	EUmmWV4 - SN9643_F1-55GHz, 2023-08-04	DAE4 Sn856, 2024-04-22

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2024-05-20
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	4.14
psPDtot+ [W/m²]	5.18
psPDmod+ [W/m²]	5.81
E _{max} [V/m]	59.5
Power Drift [dB]	0.16

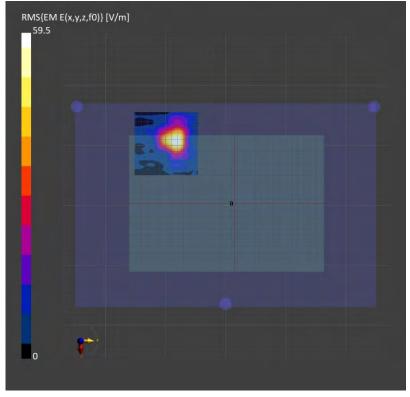

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 94 of 108

ID: 027

Report No.: TESA2404000186EN

Measurement Report_Bottom Surface, U-NII-8, Main

IEEE 802.11be (320MHz, MCS0, 99pc duty cycle), Channel 191 (6905.0 MHz)

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	Bottom Surface, 2.00	6905.0, 191	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air -	EUmmWV4 - SN9643 F1-55GHz, 2023-08-04	DAE4 Sn856, 2024-04-22

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2024-05-20
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	2.51
psPDtot+ [W/m²]	3.68
psPDmod+ [W/m²]	4.07
E _{max} [V/m]	49.9
Power Drift [dB]	0.03

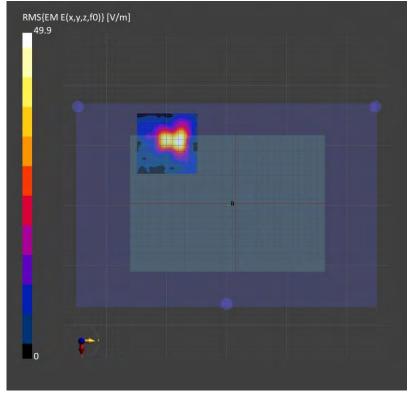

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 95 of 108

ID: 028

Report No.: TESA2404000186EN

Measurement Report_Bottom Surface, U-NII-5, Aux

IEEE 802.11be (320MHz, MCS0, 99pc duty cycle), Channel 31 (6105.0 MHz)

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	Bottom Surface, 2.00	6105.0, 31	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air -	EUmmWV4 - SN9643 F1-55GHz, 2023-08-04	DAE4 Sn856, 2024-04-22

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2024-05-20
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	3.42
psPDtot+ [W/m²]	4.11
psPDmod+ [W/m²]	4.76
E _{max} [V/m]	58.3
Power Drift [dB]	0.08

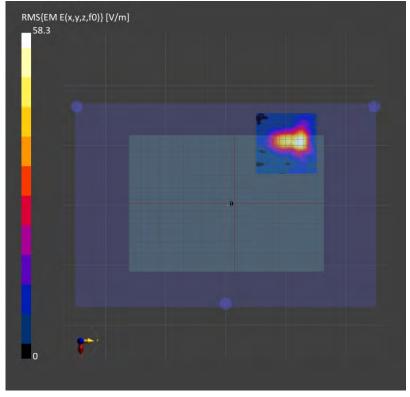

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 96 of 108

ID: 029

Report No.: TESA2404000186EN

Measurement Report_Bottom Surface, U-NII-5, Aux

IEEE 802.11be (320MHz, MCS0, 99pc duty cycle), Channel 63 (6265.0 MHz)

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	Bottom Surface, 2.00	6265.0, 63	1.0

Hardware Setup


Pha	ntom	Medium	Probe, Calibration Date	DAE, Calibration Date
mm'	Wave	Air -	EUmmWV4 - SN9643 F1-55GHz, 2023-08-04	DAE4 Sn856, 2024-04-22

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2024-05-20
Avg. Area [cm ²]	4.00
psPDn+ [W/m²]	2.33
psPDtot+ [W/m²]	3.26
psPDmod+ [W/m²]	3.88
E _{max} [V/m]	52.8
Power Drift [dB]	-0.07

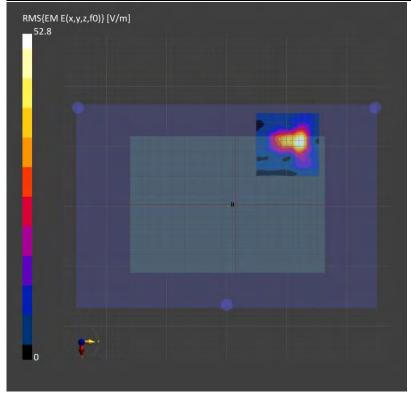

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報华结甲攝影測建立幾只有著,同時世幾只攝展例の主。大報华主標太公司書面對可,不可可以複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Page: 97 of 108

ID: 030

Report No.: TESA2404000186EN

Measurement Report_Bottom Surface, U-NII-6, Aux

IEEE 802.11be (320MHz, MCS0, 99pc duty cycle), Channel 95 (6425.0 MHz)

Exposure Conditions

Ph	antom Section	Position, Test Distance [mm]	Frequency [MHz],Channel Number	Conversion Factor
5G	i	Bottom Surface, 2.00	6425.0, 95	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air -	EUmmWV4 - SN9643_F1-55GHz, 2023-08-04	DAE4 Sn856, 2024-04-22

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2024-05-20
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.54
psPDtot+ [W/m²]	3.70
psPDmod+ [W/m²]	4.34
E _{max} [V/m]	56.2
Power Drift [dB]	0.10

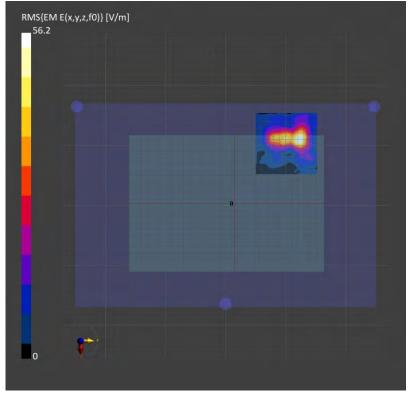

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報华结甲攝影測建立幾只有著,同時世幾只攝展例の主。大報华主標太公司書面對可,不可可以複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 98 of 108

ID: 031

Report No.: TESA2404000186EN

Measurement Report_Bottom Surface, U-NII-7, Aux

IEEE 802.11be (320MHz, MCS0, 99pc duty cycle), Channel 159 (6745.0 MHz)

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz],Channel Number	Conversion Factor
5G	Bottom Surface, 2.00	6745.0, 159	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air -	EUmmWV4 - SN9643 F1-55GHz, 2023-08-04	DAE4 Sn856, 2024-04-22

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2024-05-20
Avg. Area [cm ²]	4.00
psPDn+ [W/m²]	2.14
psPDtot+ [W/m²]	2.47
psPDmod+ [W/m²]	2.76
E _{max} [V/m]	41.1
Power Drift [dB]	-0.17

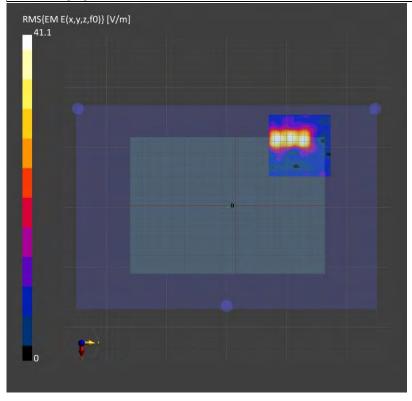

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報华结甲攝影測建立幾只有著,同時世幾只攝展例の主。大報华主標太公司書面對可,不可可以複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 99 of 108

ID: 032

Report No.: TESA2404000186EN

Measurement Report_Bottom Surface, U-NII-8, Aux

IEEE 802.11be (320MHz, MCS0, 99pc duty cycle), Channel 191 (6905.0 MHz)

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz], Channel Number	Conversion Factor
5G	Bottom Surface, 2.00	6905.0, 191	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air -	EUmmWV4 - SN9643_F1-55GHz, 2023-08-04	DAE4 Sn856, 2024-04-22

Scans Setup

ound outup	
Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2024-05-20
Avg. Area [cm ²]	4.00
psPDn+ [W/m²]	2.53
psPDtot+ [W/m²]	2.73
psPDmod+ [W/m²]	2.97
E _{max} [V/m]	44.4
Power Drift [dB]	0.12

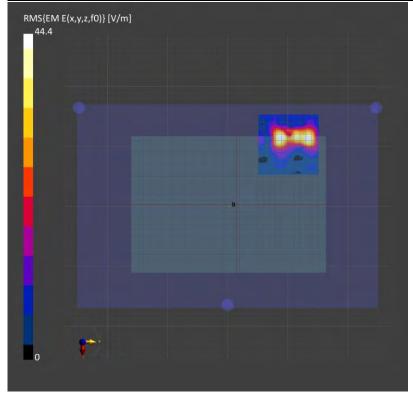

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報华结甲攝影測建立幾只有著,同時世幾只攝展例の主。大報华主標太公司書面對可,不可可以複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司 t (886-2) 2



Page: 100 of 108

14 SAR SYSTEM CHECK RESULTS

Date: 2024/5/16

Report No.: TESA2404000186EN

Dipole 2450 MHz SN:727

Communication System: CW; Frequency: 2450 MHz; Duty cycle= 1:1

Medium parameters used: f = 2450 MHz; $\sigma = 1.786 \text{ S/m}$; $\varepsilon_r = 38.767$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7509; ConvF(7.56, 7.46, 7.87) @ 2450 MHz; Calibrated: 2024/4/23

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2024/4/22

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x61x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 22.1 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.3 V/m: Power Drift = 0.04 dB


Peak SAR (extrapolated) = 26.9 W/kg

SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.39 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 51.4%

Maximum value of SAR (measured) = 20.1 W/kg

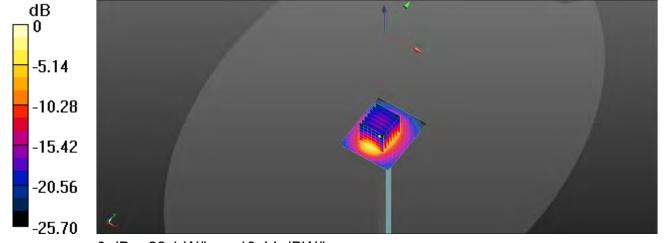

0 dB = 22.1 W/kg = 13.44 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 101 of 108

Date: 2024/5/17

Report No.: TESA2404000186EN Dipole 5250 MHz_SN:1023

Communication System: CW; Frequency: 5250 MHz; Duty cycle= 1:1

Medium parameters used: f = 5250 MHz; $\sigma = 4.739 \text{ S/m}$; $\varepsilon_r = 36.223$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN7509; ConvF(5.56, 5.53, 5.83) @ 5250 MHz; Calibrated: 2024/4/23

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2024/4/22

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x61x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 15.9 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 54.28 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 31.5 W/kg

SAR(1 g) = 7.76 W/kg; SAR(10 g) = 2.22 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 55.5%

Maximum value of SAR (measured) = 16.0 W/kg

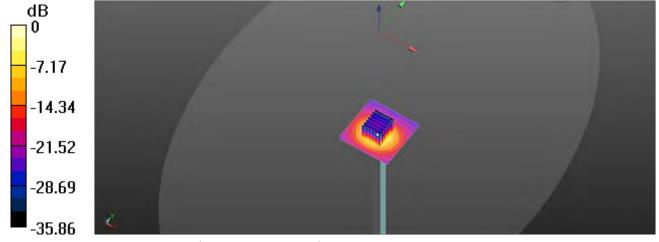

0 dB = 16.0 W/kg = 12.04 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 102 of 108

Date: 2024/5/17

Report No.: TESA2404000186EN Dipole 5600 MHz_SN:1023

Communication System: CW; Frequency: 5600 MHz; Duty cycle= 1:1

Medium parameters used: f = 5600 MHz; $\sigma = 4.998 \text{ S/m}$; $\varepsilon_r = 35.349$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.0°C

DASY5 Configuration:

Probe: EX3DV4 - SN7509; ConvF(4.79, 4.73, 5.07) @ 5600 MHz; Calibrated: 2024/4/23

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2024/4/22

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x61x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.6 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 56.23 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 32.8 W/kg

SAR(1 g) = 8.22 W/kg; SAR(10 g) = 2.42 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 54.3%

Maximum value of SAR (measured) = 16.3 W/kg

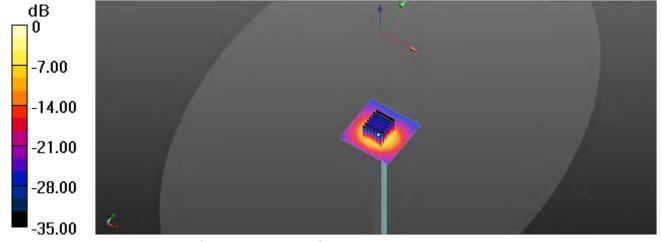

0 dB = 16.3 W/kg = 12.12 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Page: 103 of 108

Date: 2024/5/18

Report No.: TESA2404000186EN Dipole 5750 MHz_SN:1023

Communication System: CW; Frequency: 5750 MHz; Duty cycle= 1:1

Medium parameters used: f = 5750 MHz; $\sigma = 5.147 \text{ S/m}$; $\varepsilon_r = 34.974$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7509; ConvF(5.08, 5.01, 5.36) @ 5750 MHz; Calibrated: 2024/4/23

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2024/4/22

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x61x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 15.9 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 52.17 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 32.6 W/kg

SAR(1 g) = 7.65 W/kg; SAR(10 g) = 2.16 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 15.9 W/kg

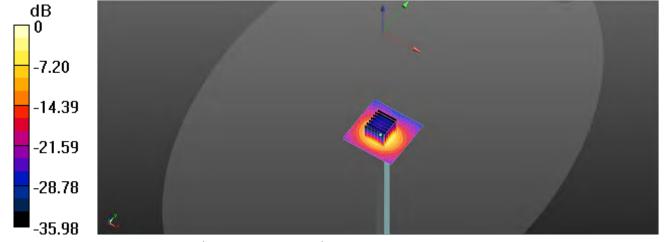

0 dB = 15.9 W/kg = 12.01 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 104 of 108

Date: 2024/5/18

Report No. :TESA2404000186EN Dipole 5850 MHz_SN:1023

Communication System: CW; Frequency: 5850 MHz; Duty cycle= 1:1

Medium parameters used: f = 5850 MHz; $\sigma = 5.239 \text{ S/m}$; $\varepsilon_r = 34.685$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7509; ConvF(5.12, 5.16, 5.51) @ 5850 MHz; Calibrated: 2023/4/23

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn856; Calibrated: 2024/4/22

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x61x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.9 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 52.93 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 34.6 W/kg

SAR(1 g) = 8.13 W/kg; SAR(10 g) = 2.3 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 16.9 W/kg

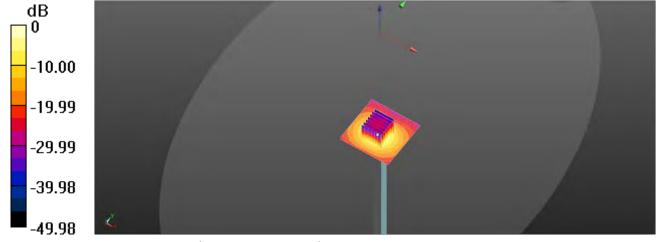

0 dB = 16.9 W/kg = 12.28 dBW/kg

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

JOS Talwari Etd.



Page: 105 of 108

Report No.: TESA2404000186EN

Measurement Report Dipole_D6500-SN:1006

Ambient temperature: 22.2°C; Liquid temperature: 21.7°C

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 5.00	5.22		33.473

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7509, 2024-4-23	DAE4 Sn856, 2024-04-22

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	36.0 x 51.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	6.0 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-19	2024-05-19
psSAR1g [W/kg]	25.0	28.8
psSAR8g [W/kg]	5.99	6.46
psSAR10g [W/kg]	4.94	5.30
psPDab (4.0cm2, sq) [W/m2]		129
Power Drift [dB]	-0.04	-0.08
M2/M1 [%]		52.9
Dist 3dB Peak [mm]		5.6

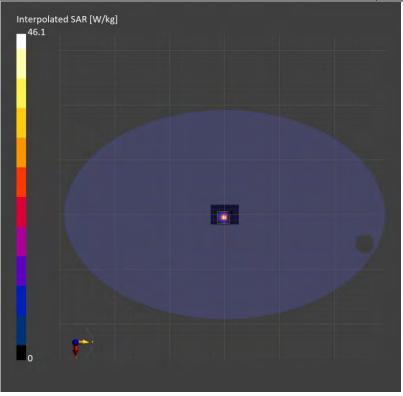

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 106 of 108

Report No.: TESA2404000186EN

Measurement Report Dipole_D7000-SN:1007

Ambient temperature: 22.3°C; Liquid temperature: 21.9°C

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 5.00	5.47	6.447	32.324

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI	EX3DV4 - SN7509, 2024-4-23	DAE4 Sn856, 2024-04-22

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	36.0 x 45.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	6.0 x 7.5	3.0 x 3.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-19	2024-05-19
psSAR1g [W/kg]	25.2	28.4
psSAR8g [W/kg]	5.80	6.23
psSAR10g [W/kg]	4.81	5.10
psPDab (4.0cm2, sq) [W/m2]		125
Power Drift [dB]	0.03	0.05
M2/M1 [%]		52.3
Dist 3dB Peak [mm]		4.9

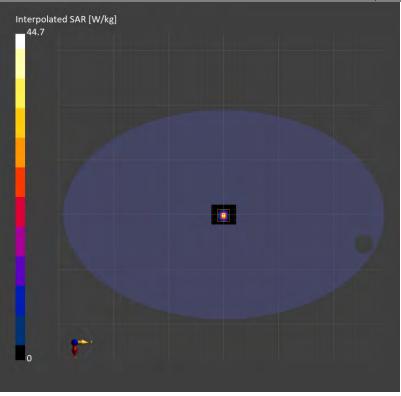

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 107 of 108

15 PD SYSTEM CHECK RESULTS

Report No.: TESA2404000186EN

Measurement Report

5G Verification Source 10GHz-SN:1070

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	FRONT, 10.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air -	EUmmWV4 - SN9643_F1-55GHz, 2023-08-04	DAE4 Sn856, 2024-04-22

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0

Measurement Results

mododi omoni ricodito	
Scan Type	5G Scan
Date	2024-05-20
Avg. Area [cm ²]	4.00
psPDn+ [W/m²]	52.4
psPDtot+ [W/m²]	52.6
psPDmod+ [W/m²]	52.7
E _{max} [V/m]	156
Power Drift [dB]	0.02

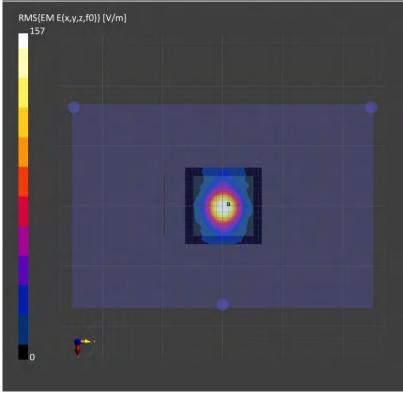

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除北只有铅明,此起华红用陈彤测过了薛里名李,同既此楼里陈尼阿四千。大起华土德大八司事五英可,不可测心掉剩。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw



Page: 108 of 108

Refer to separated files for the following appendixes.

- 16.1 SAR_Appendix A Photographs
- 16.2 SAR Appendix B DAE & Probe Cal. Certificate
- SAR Appendix C Phantom Description & Dipole Cal. Certificate 16.3

- End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.