



Product	Smart Handheld		
Test Mode	26dB Occupied Bandwidth		
Date of Test	2009/02/27	Test Site	CTR
Test Condition	WCDMA BAND V HSUPA		

WCDMA BAND V HSUPA - Packet Switched (HSUPA Mode CH 4132)

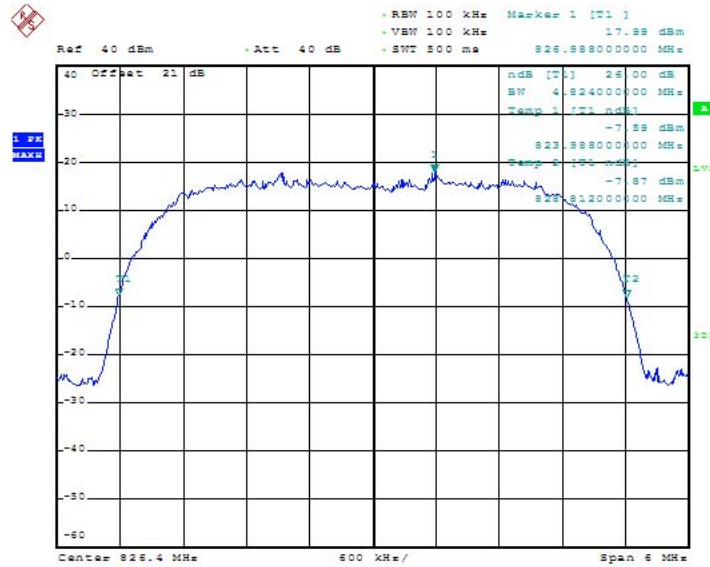

Date: 27.FEB.2009 15:50:32


WCDMA BAND V HSUPA - Packet Switched (HSUPA Mode CH 4183)

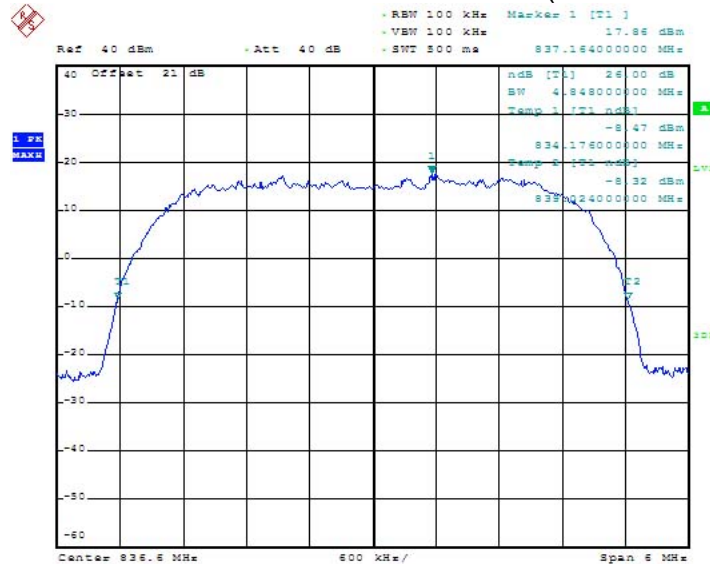

Date: 27.FEB.2009 15:54:50

Product	Smart Handheld		
Test Mode	26dB Occupied Bandwidth		
Date of Test	2009/02/27	Test Site	CTR
Test Condition	WCDMA BAND V HSUPA		


WCDMA BAND V HSUPA - Packet Switched (HSUPA Mode CH 4233)

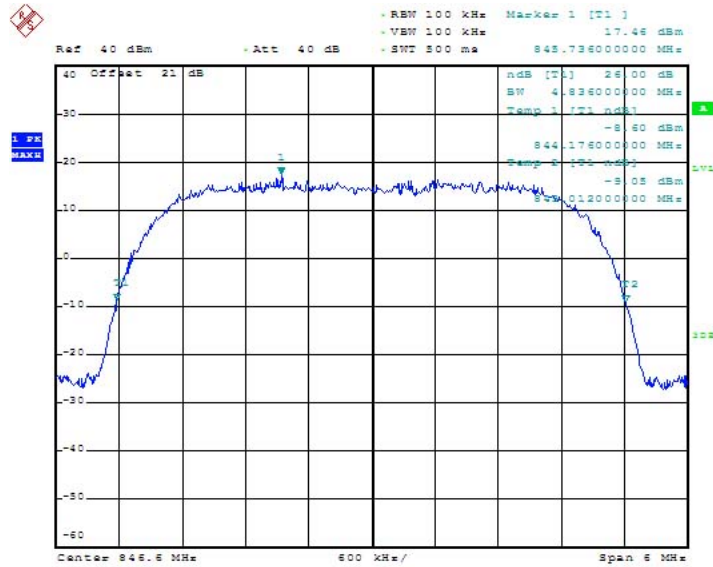

Date: 27.FEB.2009 15:56:19


Product	Smart Handheld		
Test Mode	26dB Occupied Bandwidth		
Date of Test	2009/02/27	Test Site	CTR
Test Condition	WCDMA BAND II		

WCDMA BAND II (WCDMA Mode CH 9262)

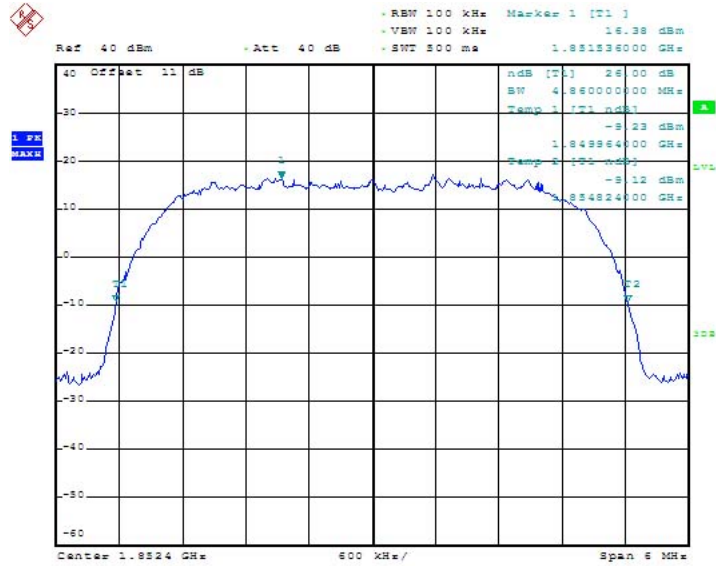

Date: 27.FEB.2009 15:13:21


WCDMA BAND II (WCDMA Mode CH 9400)

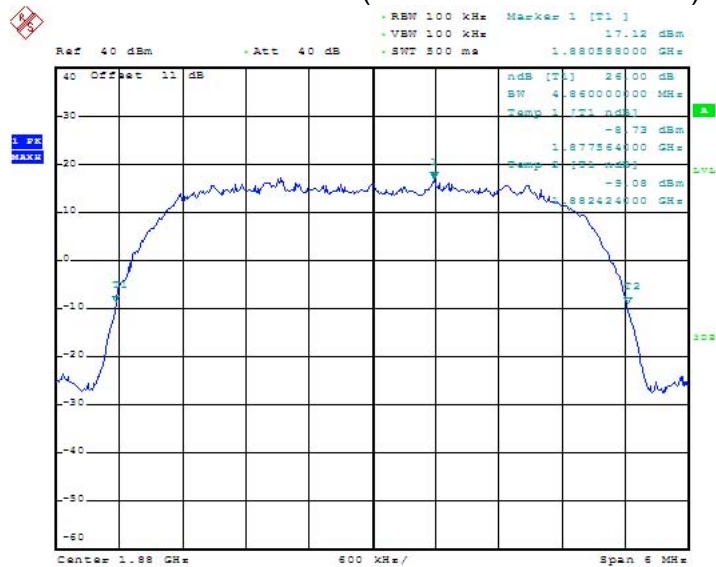

Date: 27.FEB.2009 15:11:59

Product	Smart Handheld		
Test Mode	26dB Occupied Bandwidth		
Date of Test	2009/02/27	Test Site	CTR
Test Condition	WCDMA BAND II		


WCDMA BAND II (WCDMA Mode CH 9538)

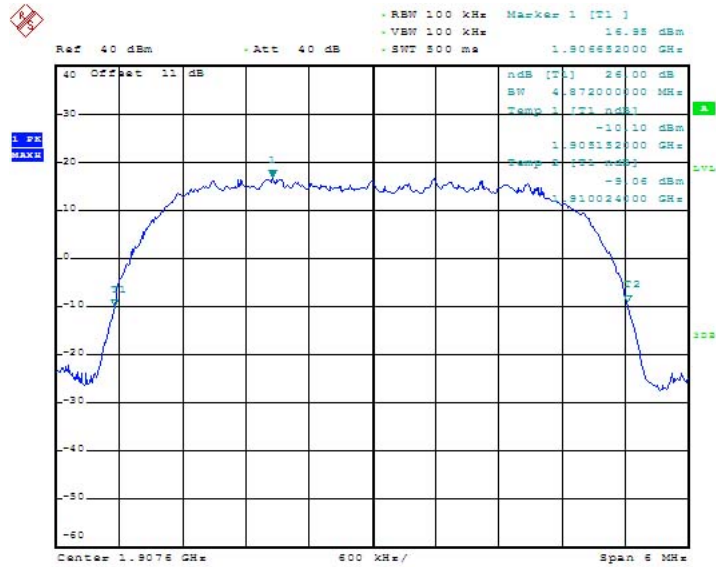

Date: 27.FEB.2009 15:11:25


Product	Smart Handheld		
Test Mode	26dB Occupied Bandwidth		
Date of Test	2009/02/27	Test Site	CTR
Test Condition	WCDMA BAND II HSDPA		

WCDMA BAND II HSDPA - Packet Switched (HSDPA Mode CH 9262)

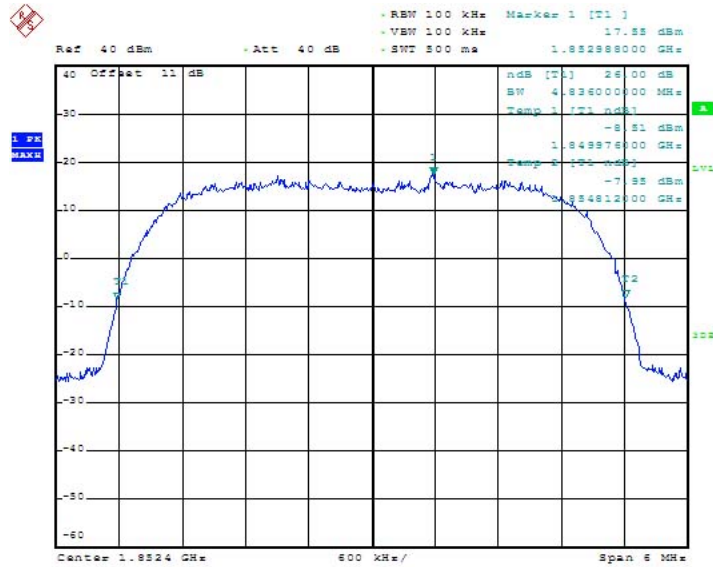

Date: 27.FEB.2009 15:30:21


WCDMA BAND II HSDPA - Packet Switched (HSDPA Mode CH 9400)

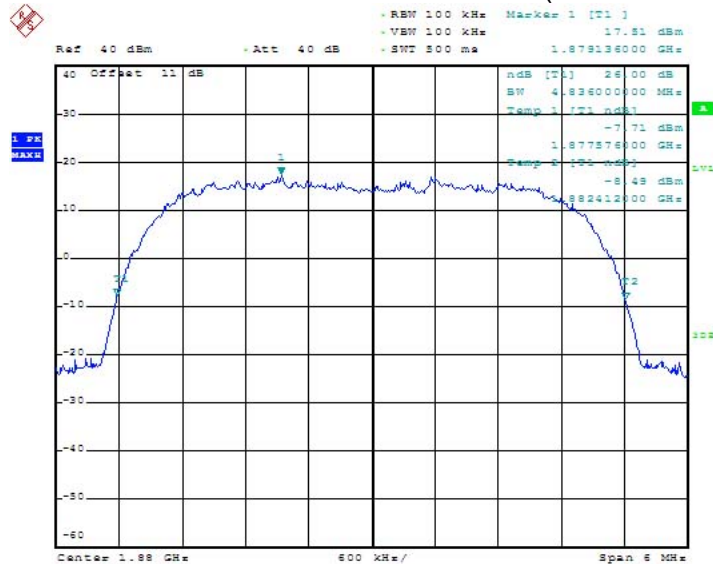

Date: 27.FEB.2009 15:28:49

Product	Smart Handheld		
Test Mode	26dB Occupied Bandwidth		
Date of Test	2009/02/27	Test Site	CTR
Test Condition	WCDMA BAND II HSDPA		


WCDMA BAND II HSDPA - Packet Switched (HSDPA Mode CH 9538)

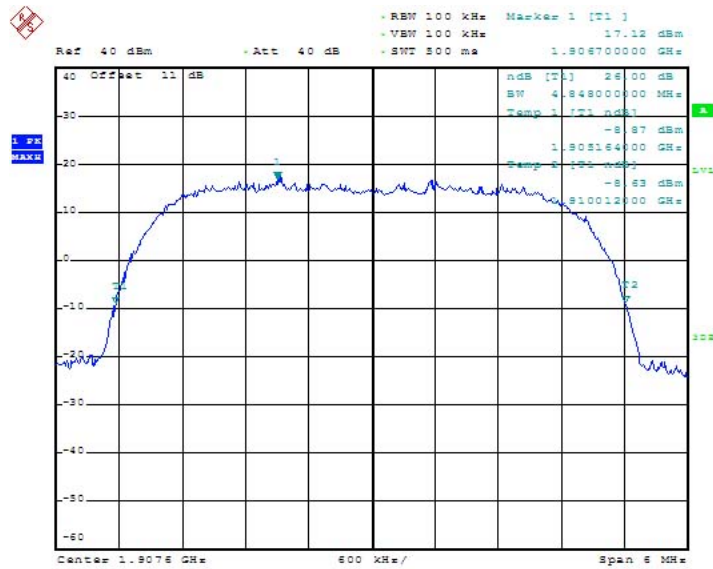

Date: 27.FEB.2009 15:28:13


Product	Smart Handheld		
Test Mode	26dB Occupied Bandwidth		
Date of Test	2009/02/27	Test Site	CTR
Test Condition	WCDMA BAND II HSUPA		

WCDMA BAND II HSUPA - Packet Switched (HSUPA Mode CH 9262)

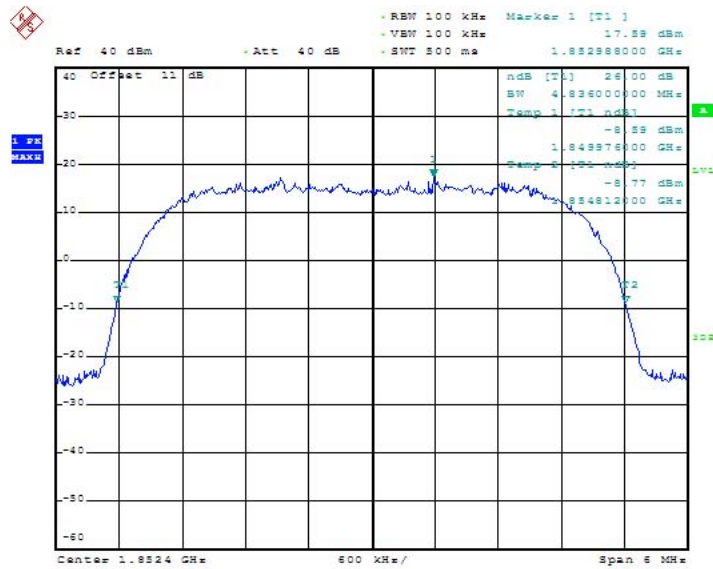

Date: 27.FEB.2009 15:24:31


WCDMA BAND II HSUPA - Packet Switched (HSUPA Mode CH 9400)

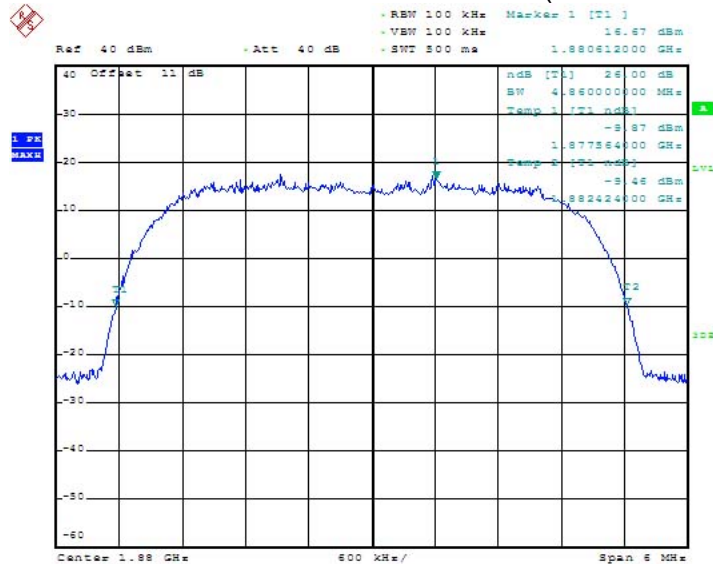

Date: 27.FEB.2009 15:25:45

Product	Smart Handheld		
Test Mode	26dB Occupied Bandwidth		
Date of Test	2009/02/27	Test Site	CTR
Test Condition	WCDMA BAND II HSUPA		

WCDMA BAND II HSUPA - Packet Switched (HSUPA Mode CH 9538)

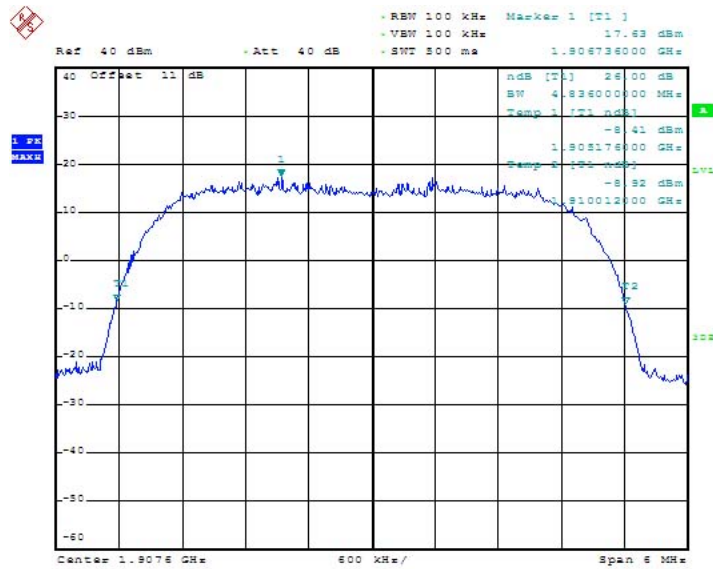

Date: 27.FEB.2009 15:26:15

4. Spurious Emission At Antenna Terminals (+/-1MHz)


4.1. Test Equipment

The following test equipments are used during the spurious emission test

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer (9K-40GHz)	R&S	FSP40/100170	Nov ., 2008
Universal Radio Communication Tester	R & S	CMU200 / 104846	Apr., 2008
Directional coupler	Agilent	87300C / MY44300353	Aug., 2008
Directional coupler	Agilent	778D-012/ 50550	Aug., 2008

Note: All equipments upon which need to be calibrated are with calibration period of 1 year.

4.2. Setup

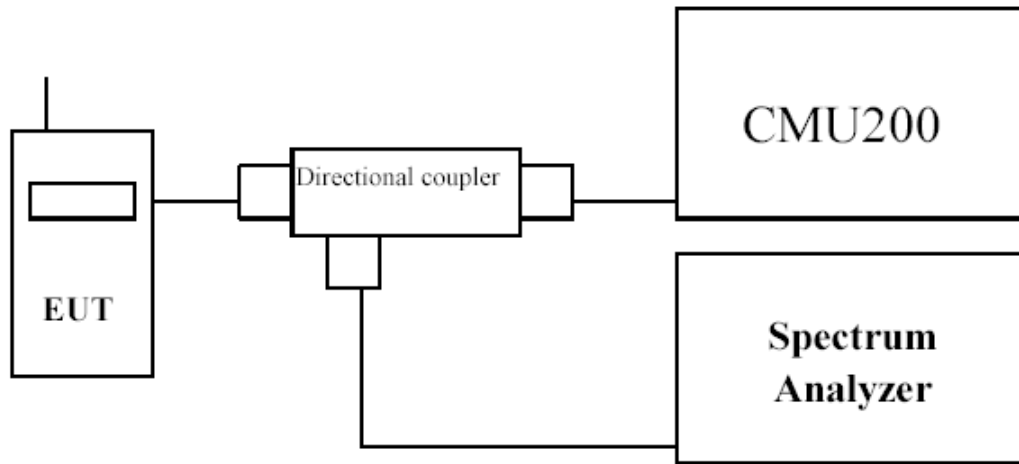

4.3. Limits

Cellular Band Transmitter limits for narrowband spurious emission

Lower Block Edge Test Frequencies	Upper Block Edge Test Frequencies
Block A Channel : 128 Frequency : 824.2 MHz	Block B Channel : 251 Frequency : 848.8 MHz

PCS Band Transmitter limits for narrowband spurious emission

Lower Block Edge Test Channels/Frequencies	Upper Block Edge Test Channels/Frequencies
Block A Channel : 512 Frequency : 1850.2 MHz	Block C Channel : 810 Frequency : 1909.8 MHz

4.4. Test Procedure

In accordance with Part 22.917 and 24.238, at least 1% of the emission bandwidth was used for the resolution and video bandwidths up to 1MHz away from the Block Edge. At greater than 1MHz, the resolution and video bandwidth were increased to 1MHz.

The reference power and path losses of all channels used for testing in each frequency block were measured.


4.5. Test Specification

According to Part 2.1049, 22.917,24.238.

4.6. Test Result of Spurious Emission At Antenna Terminals (+/-1MHz)


Product	Smart Handheld		
Test Mode	Spurious Emission At Antenna Terminals (+/-1MHz)		
Date of Test	2009/02/26	Test Site	CTR
Test Condition	Block Edge Test (GSM 850)		

GSM 850 Lower Channel 128 (824.2MHz)

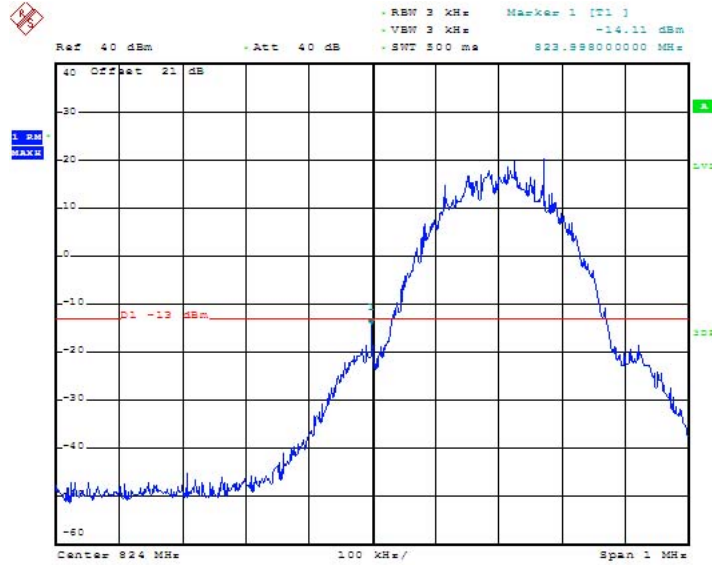

Date: 26.FEB.2009 14:35:36


GSM 850 Upper Channel 251(848.8MHz)

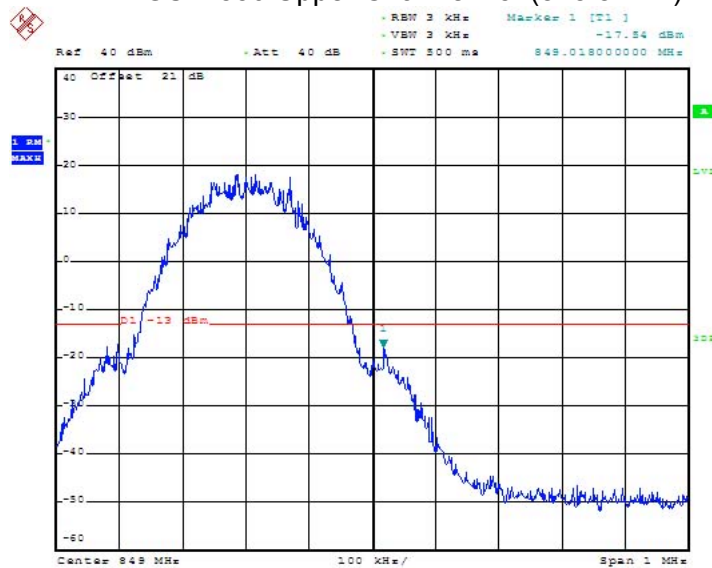

Date: 26.FEB.2009 14:37:04


Product	Smart Handheld		
Test Mode	Spurious Emission At Antenna Terminals (+/-1MHz)		
Date of Test	2009/02/26	Test Site	CTR
Test Condition	Block Edge Test (GSM 850 GPRS)		

GSM 850 GPRS Lower Channel 128 (824.2MHz)

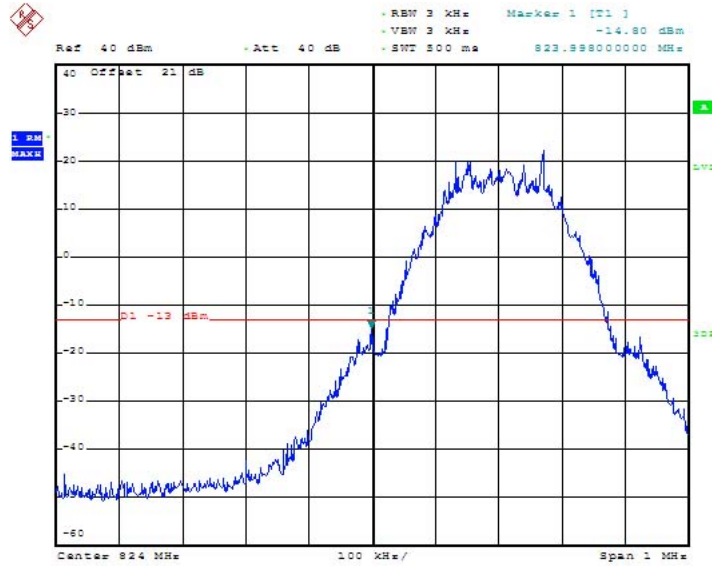

Date:26.FEB.2009 14:41:43


GSM 850 GPRS Upper Channel 251(848.8MHz)

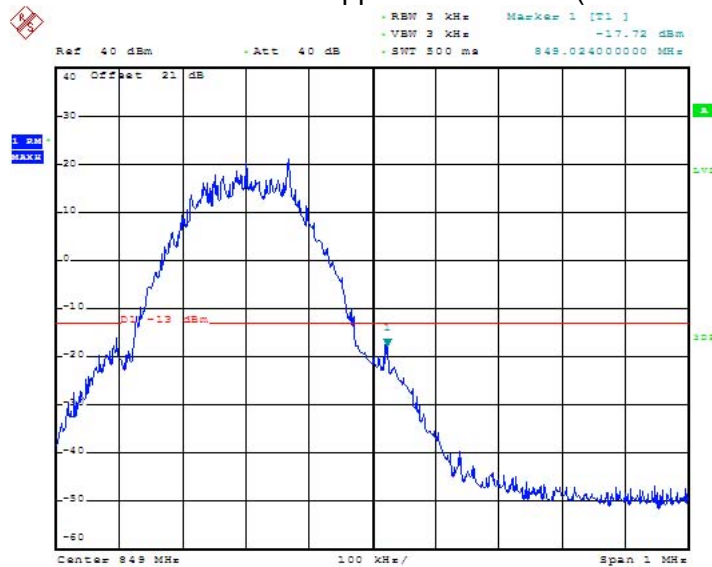

Date:26.FEB.2009 14:42:18


Product	Smart Handheld		
Test Mode	Spurious Emission At Antenna Terminals (+/-1MHz)		
Date of Test	2009/02/26	Test Site	CTR
Test Condition	Block Edge Test (GSM 850 EGPRS)		

GSM 850 EGPRS Lower Channel 128 (824.2MHz)

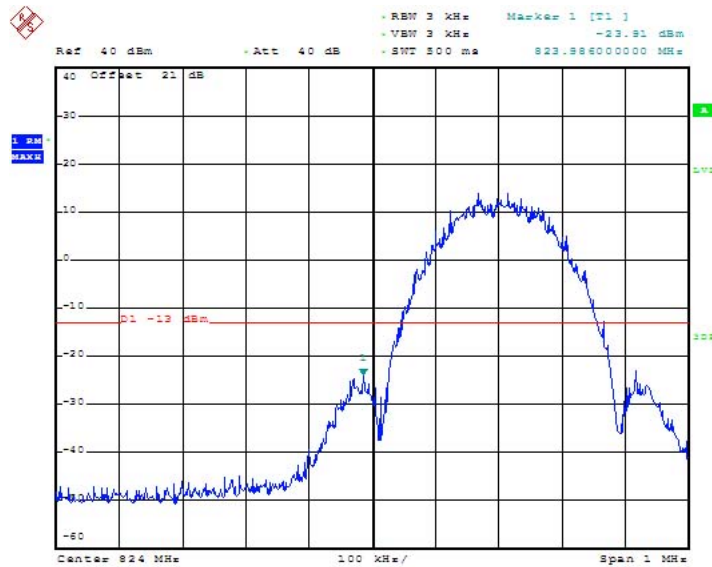

Date:26.FEB.2009 14:39:27


GSM 850 EGPRS Upper Channel 251(848.8MHz)

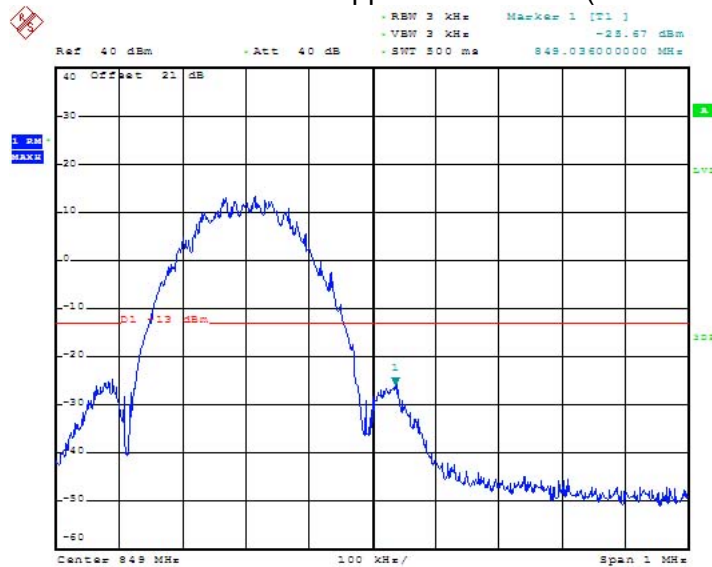

Date:26.FEB.2009 14:38:42


Product	Smart Handheld		
Test Mode	Spurious Emission At Antenna Terminals (+/-1MHz)		
Date of Test	2009/02/26	Test Site	CTR
Test Condition	Block Edge Test (PCS 1900)		

PCS 1900 Lower Channel 512 (1850.2MHz)

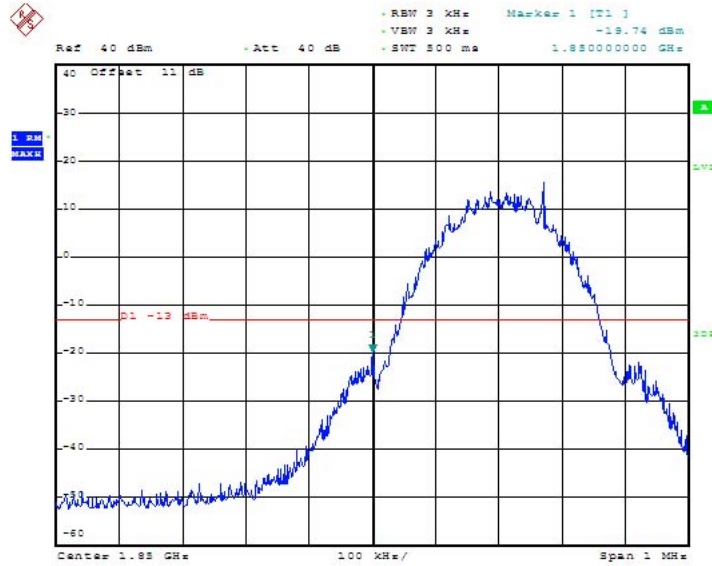

Date: 26.FEB.2009 14:47:51


PCS 1900 Upper Channel 810(1910.0MHz)

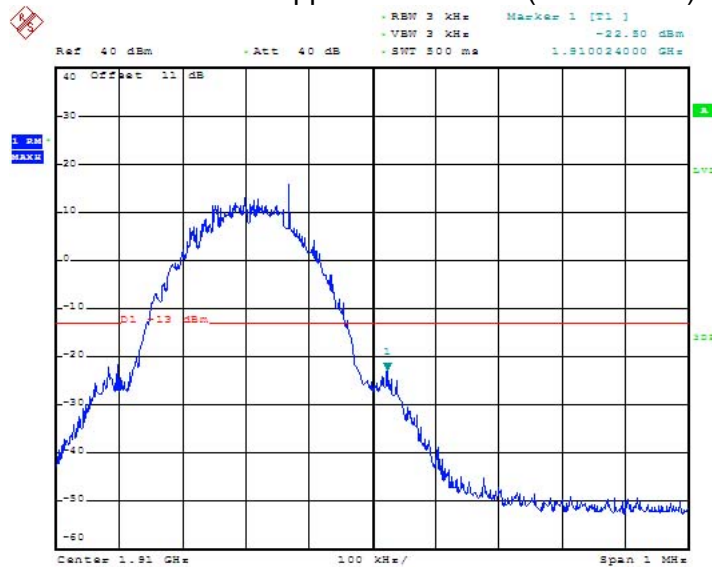

Date: 26.FEB.2009 14:48:36


Product	Smart Handheld		
Test Mode	Spurious Emission At Antenna Terminals (+/-1MHz)		
Date of Test	2009/02/26	Test Site	CTR
Test Condition	Block Edge Test (PCS 1900 GPRS)		

PCS 1900 GPRS Lower Channel 512 (1850.2MHz)

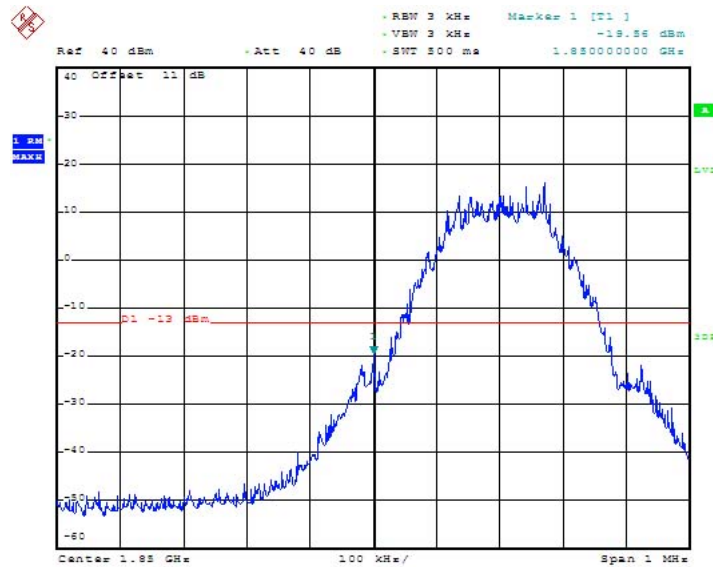

Date:26.FEB.2009 14:51:23


PCS 1900 GPRS Upper Channel 810(1910.0MHz)

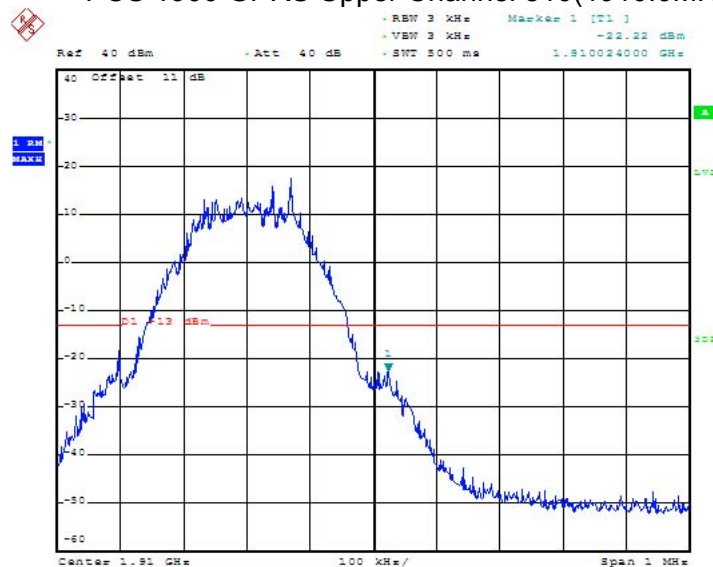

Date:26.FEB.2009 14:52:15


Product	Smart Handheld		
Test Mode	Spurious Emission At Antenna Terminals (+/-1MHz)		
Date of Test	2009/02/26	Test Site	CTR
Test Condition	Block Edge Test (PCS 1900 EGPRS)		

PCS 1900 EGPRS Lower Channel 512 (1850.2MHz)

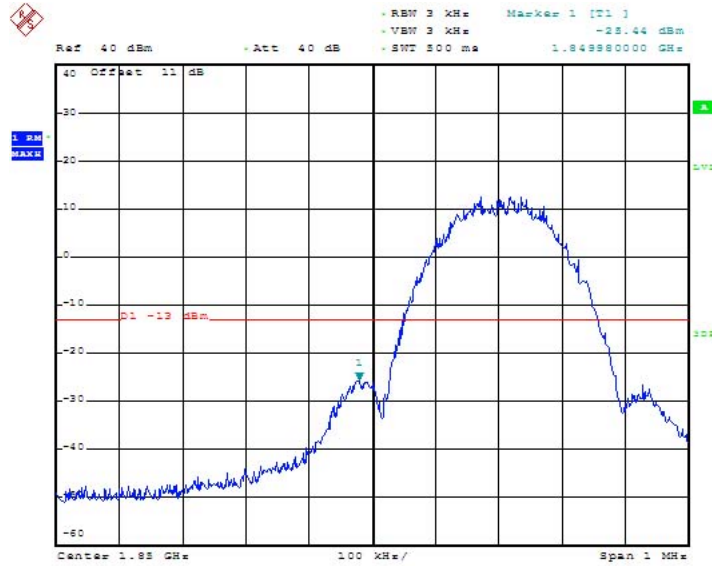

Date:26.FEB.2009 14:54:57


PCS 1900 EGPRS Upper Channel 810(1910.0MHz)

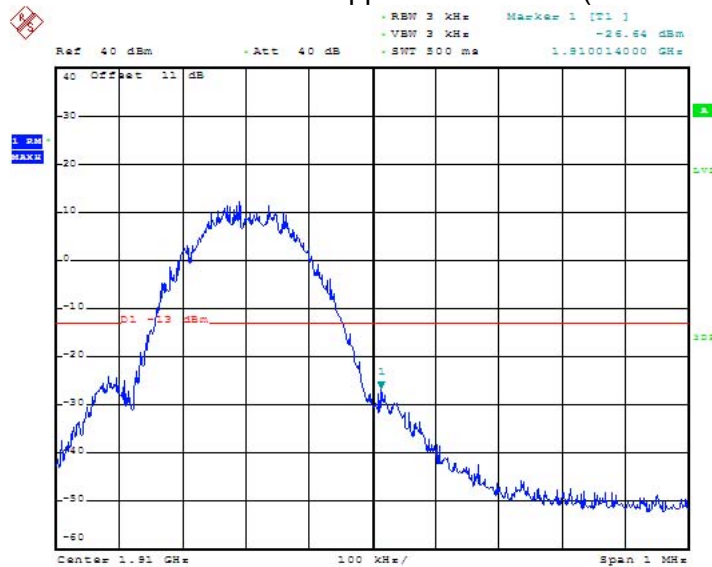

Date:26.FEB.2009 14:55:38


Product	Smart Handheld		
Test Mode	Spurious Emission At Antenna Terminals (+/-1MHz)		
Date of Test	2009/02/27	Test Site	CTR
Test Condition	Block Edge Test (WCDMA BAND V)		

WCDMA BAND V Lower Channel 4132 (826.4MHz)

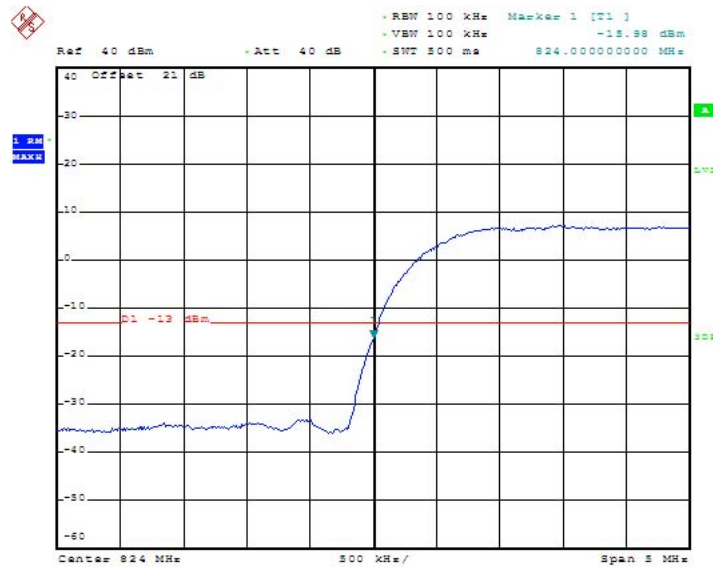

Date: 27.FEB.2009 03:18:05


WCDMA BAND V Upper Channel 4233 (4233MHz)

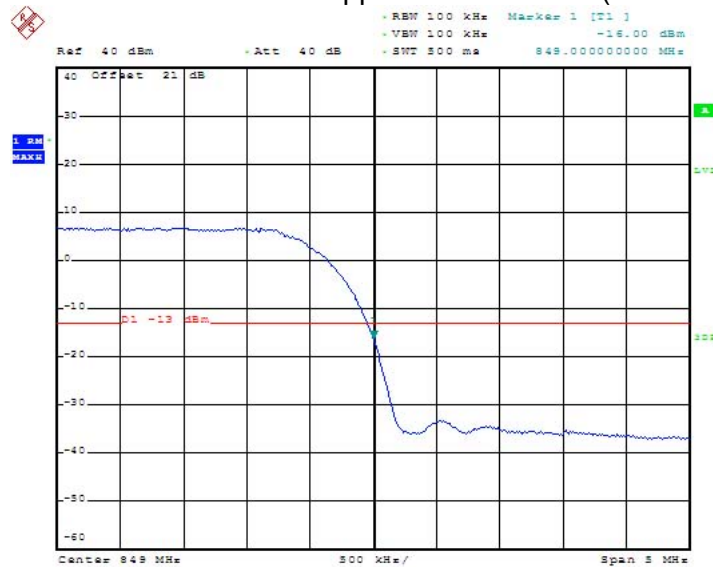

Date: 27.FEB.2009 03:18:40


Product	Smart Handheld		
Test Mode	Spurious Emission At Antenna Terminals (+/-1MHz)		
Date of Test	2009/02/27	Test Site	CTR
Test Condition	Block Edge Test (WCDMA BAND V HSDPA)		

WCDMA BAND V HSDPA Lower Channel 4132 (826.4MHz)

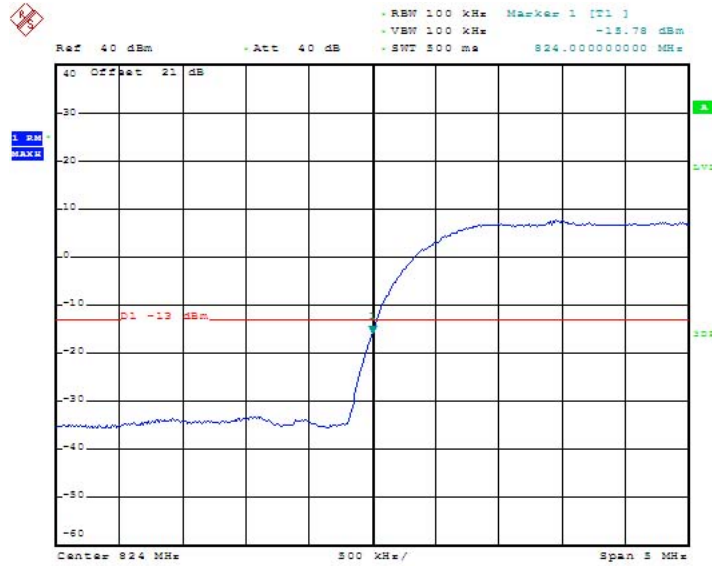

Date: 27.FEB.2009 03:17:24


WCDMA BAND V HSDPA Upper Channel 4233 (4233MHz)

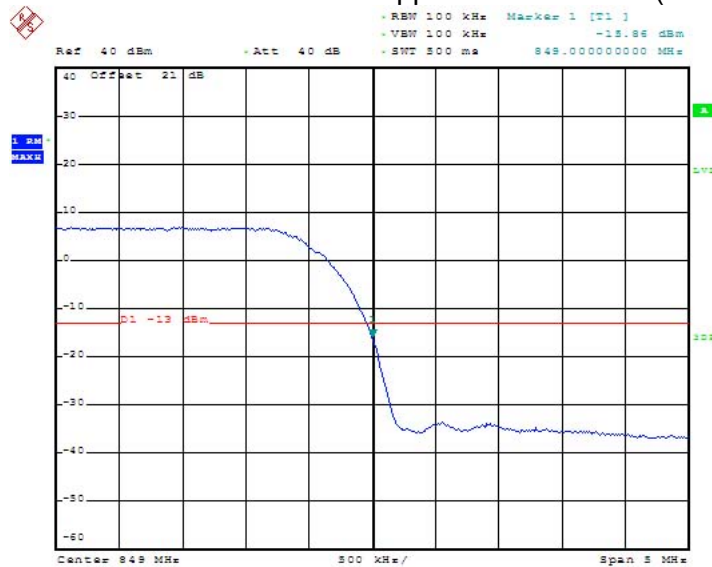

Date: 27.FEB.2009 03:16:47


Product	Smart Handheld		
Test Mode	Spurious Emission At Antenna Terminals (+/-1MHz)		
Date of Test	2009/02/27	Test Site	CTR
Test Condition	Block Edge Test (WCDMA BAND V HSDPA)		

WCDMA BAND V HSDPA Lower Channel 4132 (826.4MHz)

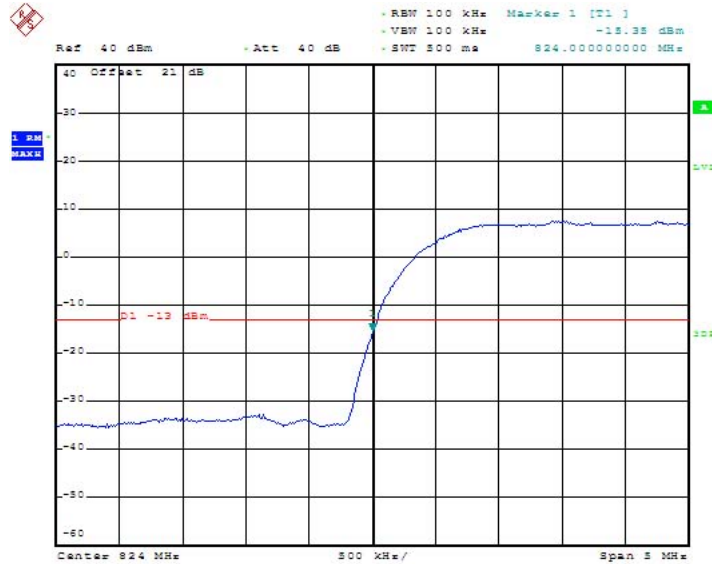

Date: 27.FEB.2009 03:13:57


WCDMA BAND V HSDPA Upper Channel 4233 (4233MHz)

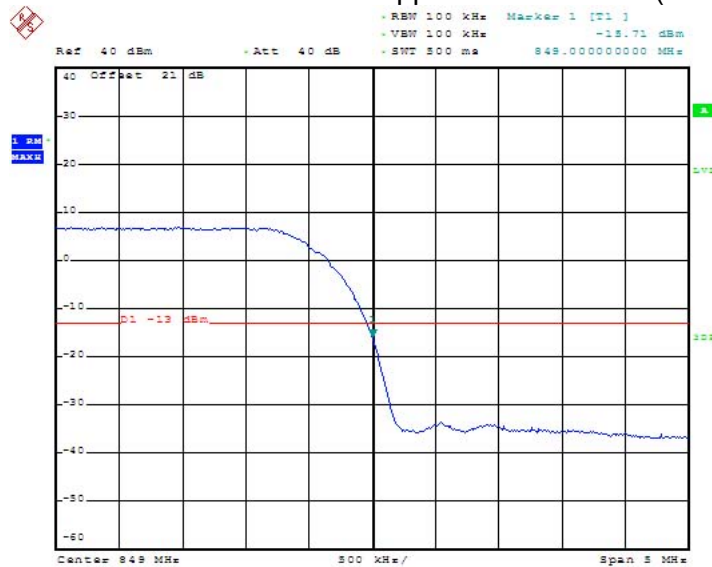

Date: 27.FEB.2009 03:15:44


Product	Smart Handheld		
Test Mode	Spurious Emission At Antenna Terminals (+/-1MHz)		
Date of Test	2009/02/27	Test Site	CTR
Test Condition	Block Edge Test (WCDMA BAND II)		

WCDMA BAND II Lower Channel 9262 (1.8524GHz)

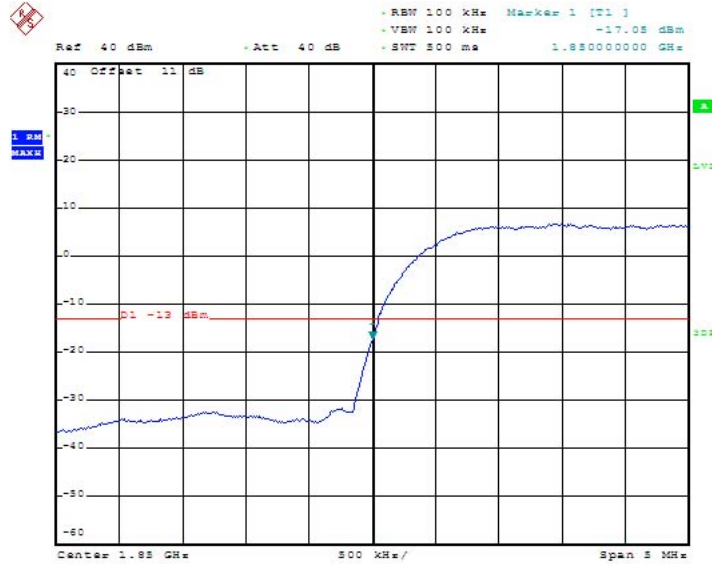

Date: 27.FEB.2009 03:22:28


WCDMA BAND II Upper Channel 9538 (1.9076GHz)

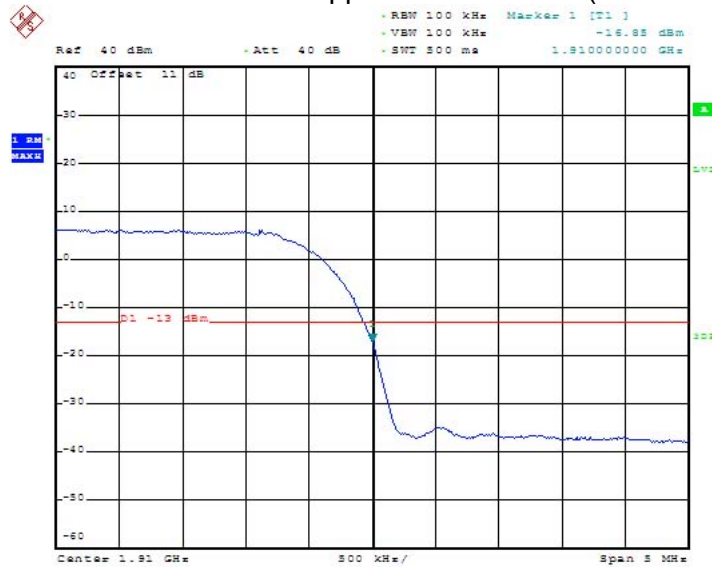

Date: 27.FEB.2009 03:23:05


Product	Smart Handheld		
Test Mode	Spurious Emission At Antenna Terminals (+/-1MHz)		
Date of Test	2009/02/27	Test Site	CTR
Test Condition	Block Edge Test (WCDMA BAND II HSDPA)		

WCDMA BAND II HSDPA Lower Channel 9262 (1.8524GHz)

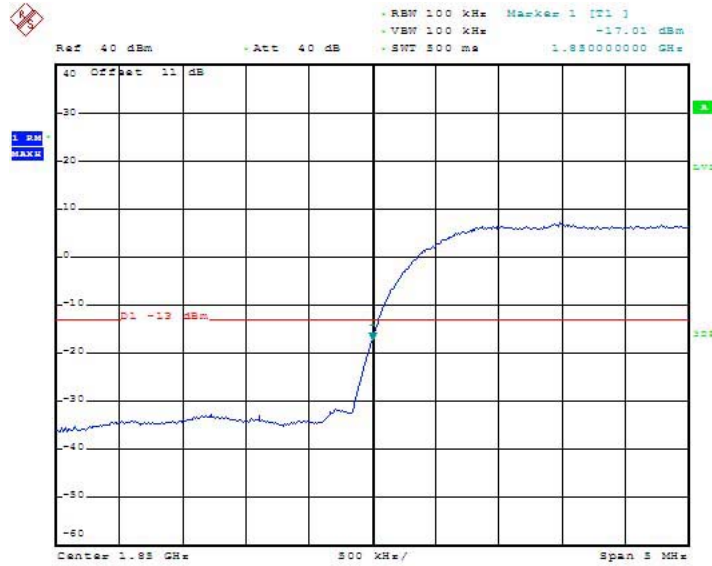

Date: 27.FEB.2009 03:25:02


WCDMA BAND II HSDPA Upper Channel 9538 (1.9076GHz)

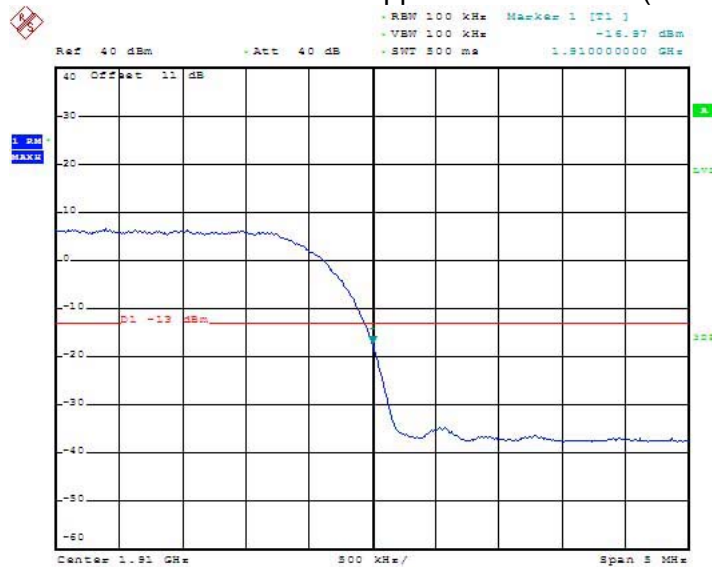

Date: 27.FEB.2009 03:25:39


Product	Smart Handheld		
Test Mode	Spurious Emission At Antenna Terminals (+/-1MHz)		
Date of Test	2009/02/27	Test Site	CTR
Test Condition	Block Edge Test (WCDMA BAND II HSDPA)		

WCDMA BAND II HSDPA Lower Channel 9262 (1.8524GHz)

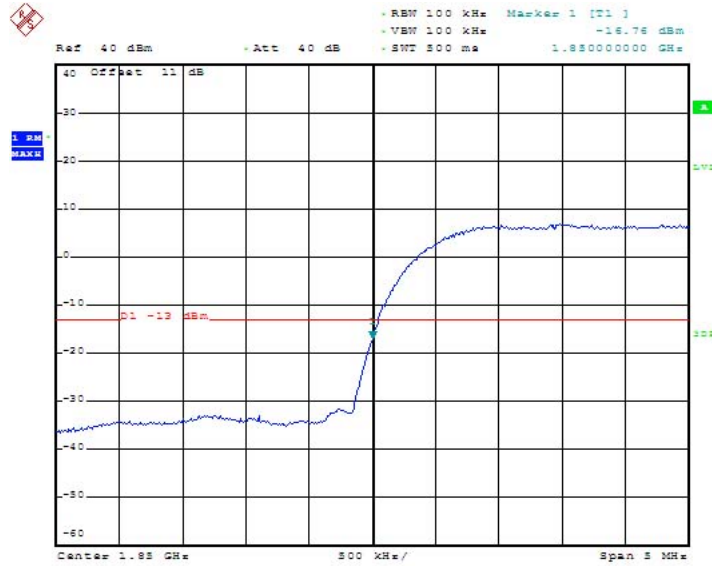

Date: 27.FEB.2009 03:27:54

WCDMA BAND II HSDPA Upper Channel 9538 (1.9076GHz)

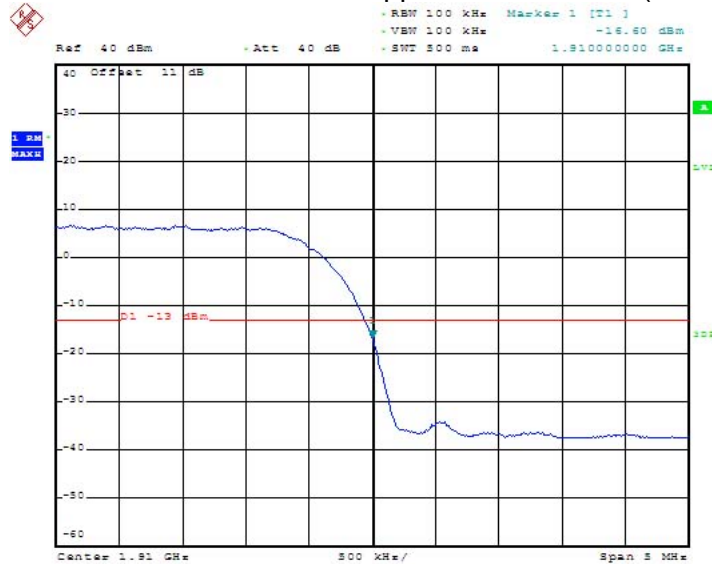

Date: 27.FEB.2009 03:27:17

5. Spurious Emission

5.1. Test Equipment


The following test equipments are used during the radiated emission test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒CTR	Spectrum Analyzer (9K-40GHz)	R&S	FSP40/100170	Nov ., 2008
	Dual Directional couple	Agilent	778D-012/50550	Aug , 2008
	Directional coupler	Agilent	87300C/ MY44300353	Aug ., 2008
☒SITE3	Universal Radio Communication Tester	R & S	CMU200 / 104846	Apr ., 2008
	Bilog Antenna	Schaffner Chase	CBL6112B/2921	Aug ., 2008
	Broadband Horn Antenna	Schwarzbeck	BBHA9170/497	Sep ., 2008
	Horn Antenna	Schwarzbeck	BBHA9120D/ 305	Sep ., 2008
	Pre-Amplifier	QTK	N/A	N/A
	Microwave Amplifier (0.5GHZ-26.5GHZ)	Agilent	83017A/ MY39500682	Aug ., 2008
	Spectrum Analyzer	Agilent	N9020A/ MY48010570	Apr., 2008
	Universal Radio Communication Tester	R & S	CMU200 / 104846	Apr ., 2008


Note: 1. All equipments that need to be calibrated are with calibration period of 1 year.

5.2. Test Setup

6.2.1.1 Spurious emissions at antenna terminals.

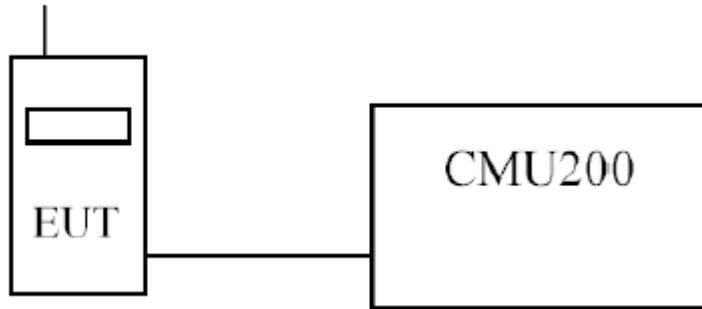

6.2.1.2 Field strength of spurious radiation.

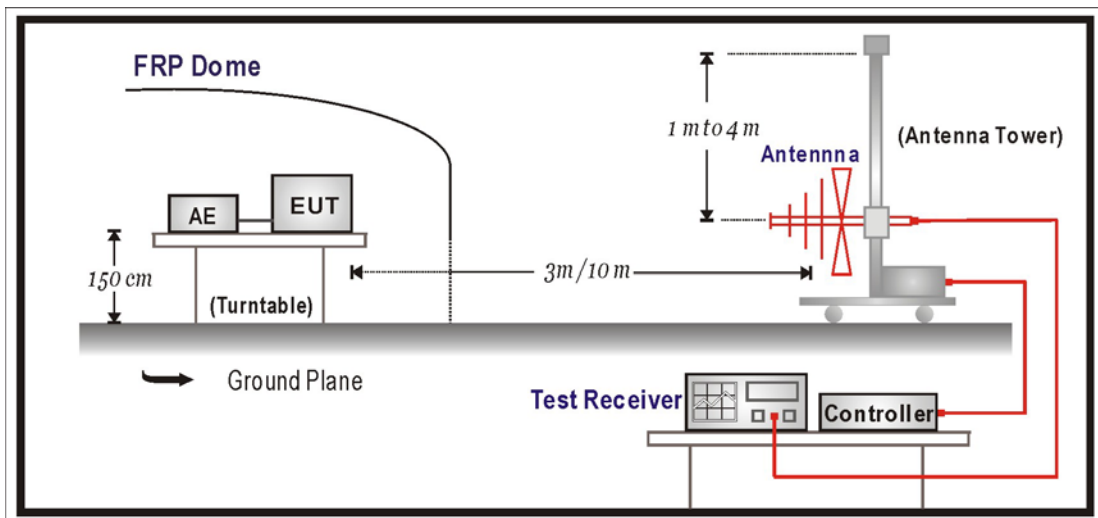

5.3. Limits

Limit	$<-13\text{dBm}$
-------	------------------

$43 + 10\text{Log}(P)$ down on the carrier where P is the power in Watts.

5.4. Test Procedure

In accordance with Part 2.1051, the spurious emissions from the antenna terminal were measured. The transmitter output power was attenuated using a combination of filters and attenuators and the frequency spectrum investigated from 9kHz to 20GHz. The EUT was set to transmit on full power. The EUT was tested on bottom, middle and top channels for both power levels. The resolution and video bandwidth was set to 1MHz in accordance with Part 22.917&24.238 The spectrum analyzer detector was set to Max Hold.

In addition, measurements were made up to the 10th harmonic of the fundamental.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to TIA/EIA 603-C on radiated measurement.

5.5. Test Specification


According to Part 2.1051, 2.1053, 22.917(a), 24.238(b).

5.6. Test Result of Spurious Emission

Product	Smart Handheld		
Test Mode	Spurious Emission (Conducted)		
Date of Test	2009/02/26	Test Site	CTR
Test Condition	GSM 850	Test Range	30MHz~10GHz

GSM 850 Middle-Channel 189

Frequency (MHz)	Reading Level (dBm)	Path Loss (dB)	Emission Level (dBm)	Limit (dBm)
1670	-46.36	0.58	-45.78	-13
2509.2	-55.16	0.7	-54.46	-13
3345.6	-54.72	1.01	-53.71	-13
4182	-62.51	1.18	-61.33	-13
5018.4	-68.14	1.23	-66.91	-13
5854.8	-67.86	1.45	-66.41	-13
6691.2	-51.88	1.56	-50.32	-13
7527.6	-59.49	1.59	-57.90	-13
8364	-55.27	1.82	-53.45	-13

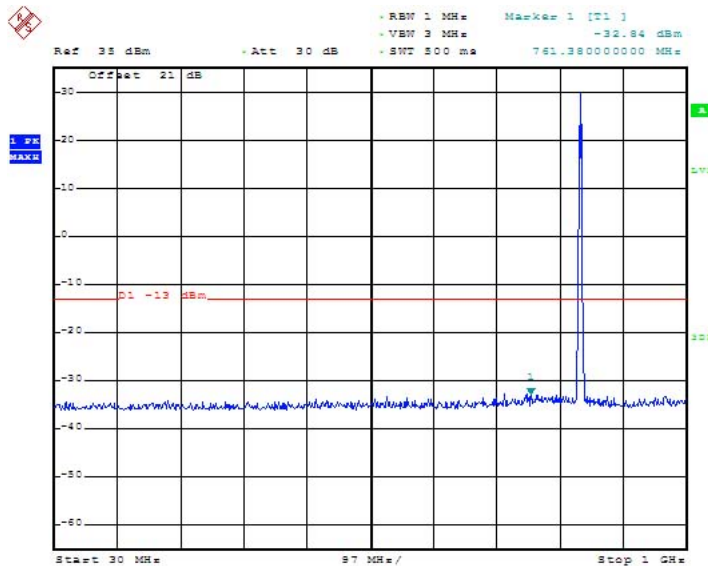

Date: 26.FEB.2009 07:39:28