



Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6525	-5.39	-5.26	-2.48	5.00	Pass
6685	-5.68	-5.55	-2.77	5.00	Pass
6845	-5.71	-5.58	-2.80	5.00	Pass

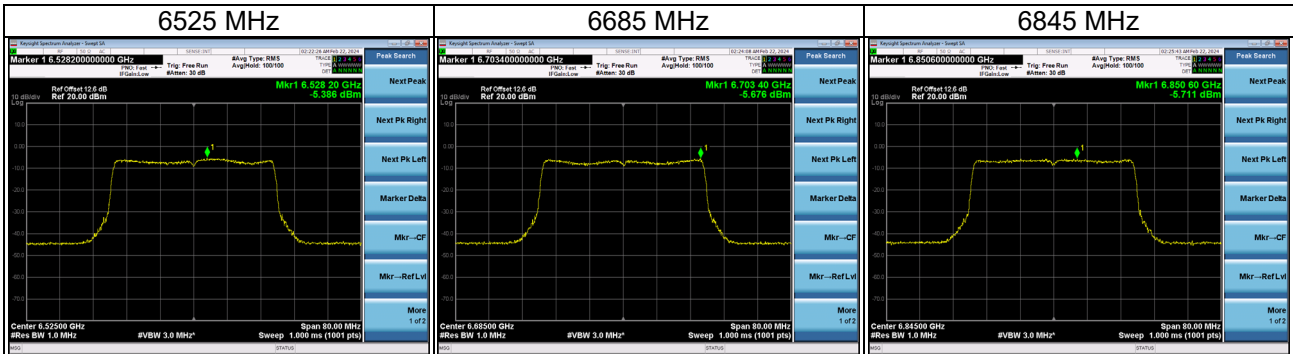

Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6885	-5.77	-5.64	-2.86	5.00	Pass
7085	-5.58	-5.45	-2.67	5.00	Pass

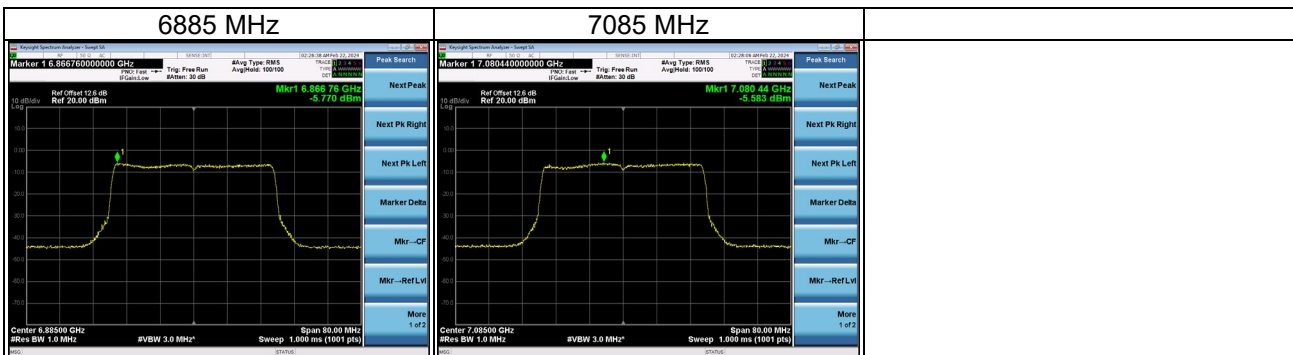


Test Mode	IEEE 802.11be (EHT40)_ Total
-----------	------------------------------


Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
5965	-2.14	-2.01	0.77	5.00	Pass
6165	-2.13	-2.01	0.77	5.00	Pass
6405	-2.29	-2.16	0.62	5.00	Pass
6445	-2.24	-2.11	0.67	5.00	Pass
6485	-1.86	-1.73	1.05	5.00	Pass
6525	-1.97	-1.84	0.94	5.00	Pass
6685	-1.81	-1.68	1.10	5.00	Pass
6845	-1.95	-1.82	0.96	5.00	Pass
6885	-2.10	-1.97	0.81	5.00	Pass
7085	-2.01	-1.88	0.90	5.00	Pass

Test Mode	IEEE 802.11be (EHT80)_ Ant 1
-----------	------------------------------


Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
5985	-4.30	-4.16	-1.38	5.00	Pass
6145	-4.51	-4.36	-1.58	5.00	Pass
6385	-4.89	-4.74	-1.96	5.00	Pass

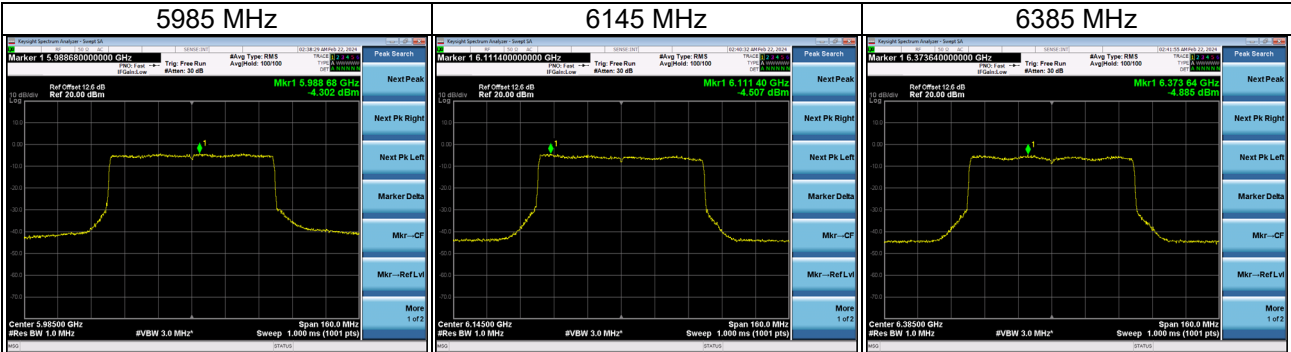


Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6465	-4.75	-4.60	-1.82	5.00	Pass
6545	-4.82	-4.67	-1.89	5.00	Pass

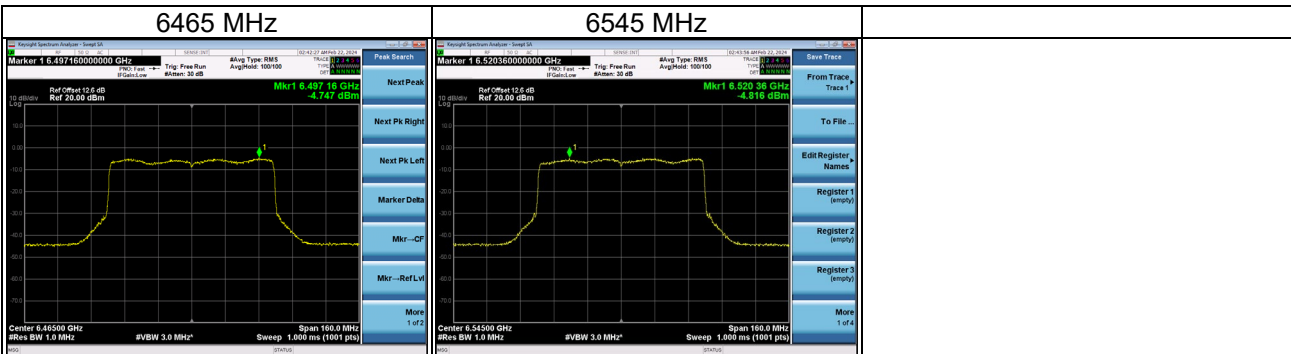

Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6625	-4.26	-4.11	-1.33	5.00	Pass
6785	-4.43	-4.29	-1.51	5.00	Pass

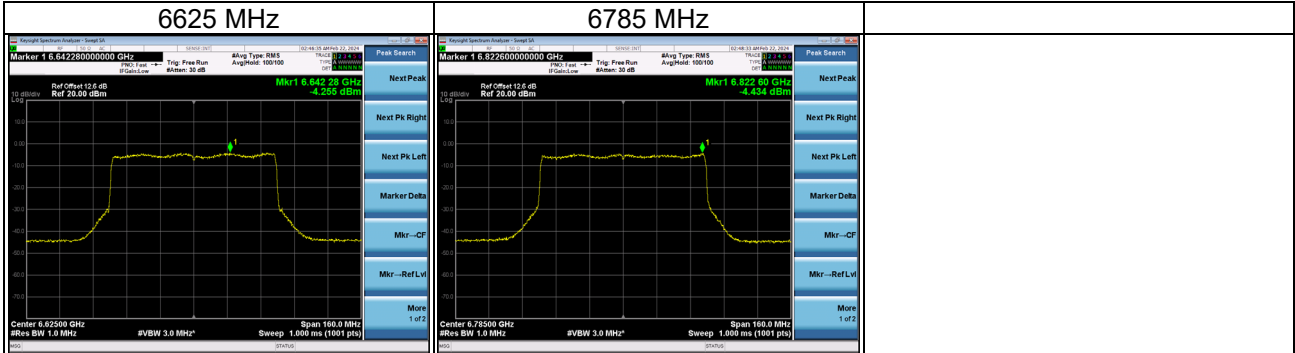


Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6865	-4.15	-4.00	-1.22	5.00	Pass
6945	-4.65	-4.51	-1.73	5.00	Pass
7025	-4.67	-4.53	-1.75	5.00	Pass

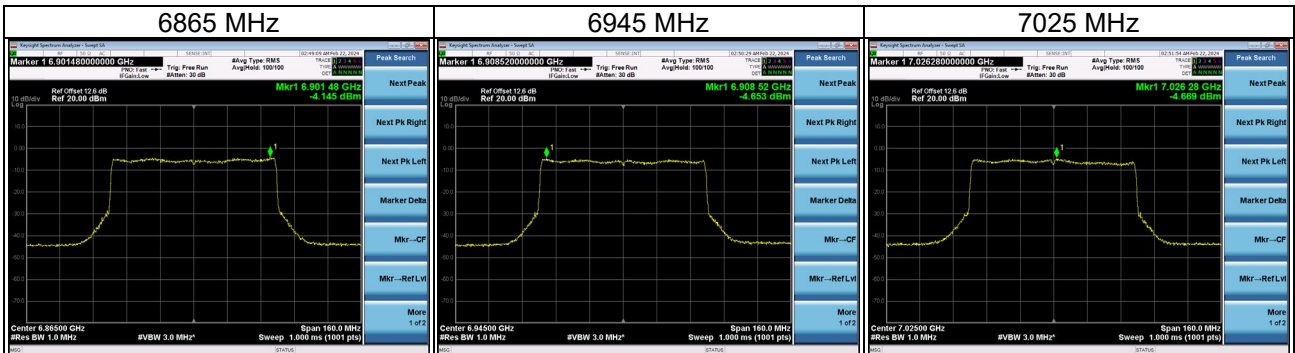


Test Mode	IEEE 802.11be (EHT80)_ Ant 2
-----------	------------------------------


Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
5985	-5.46	-5.31	-2.53	5.00	Pass
6145	-5.45	-5.30	-2.52	5.00	Pass
6385	-5.52	-5.37	-2.59	5.00	Pass

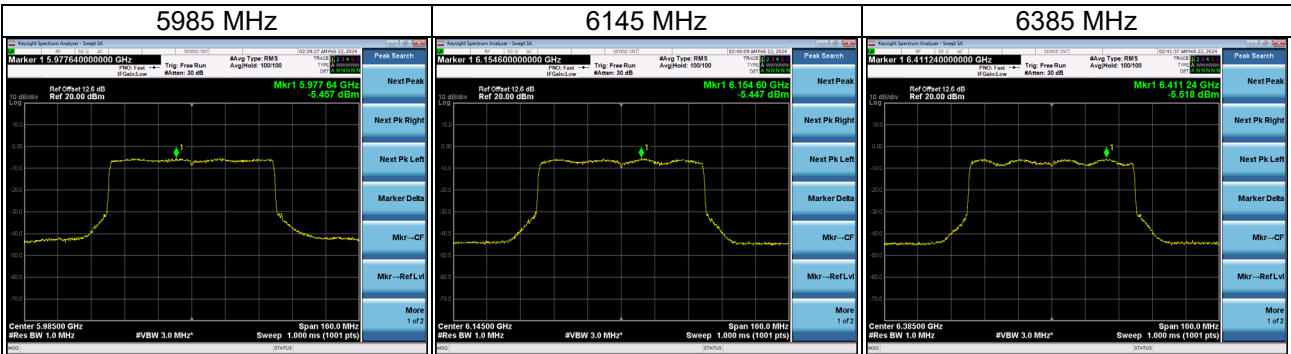


Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6465	-5.33	-5.18	-2.40	5.00	Pass
6545	-5.02	-4.87	-2.09	5.00	Pass

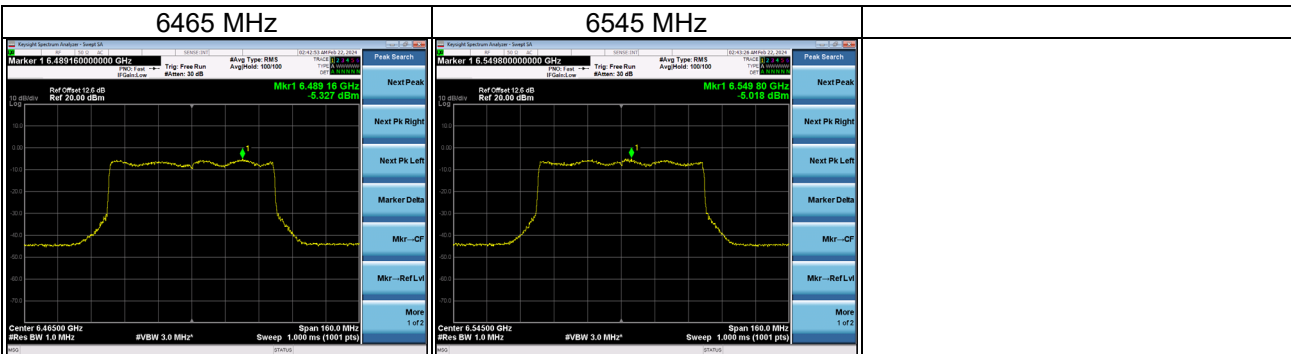

Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6625	-5.46	-5.31	-2.53	5.00	Pass
6785	-5.78	-5.63	-2.85	5.00	Pass

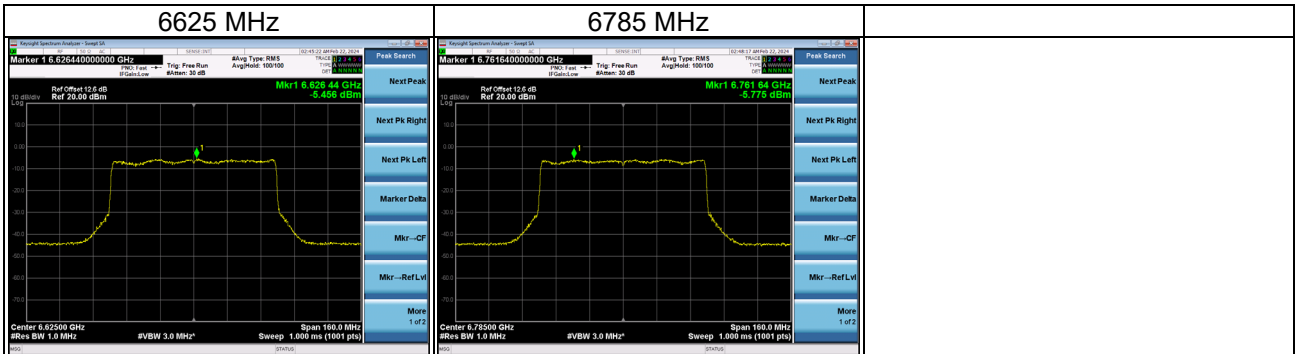

Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6865	-5.66	-5.52	-2.74	5.00	Pass
6945	-5.81	-5.67	-2.89	5.00	Pass
7025	-5.56	-5.41	-2.63	5.00	Pass

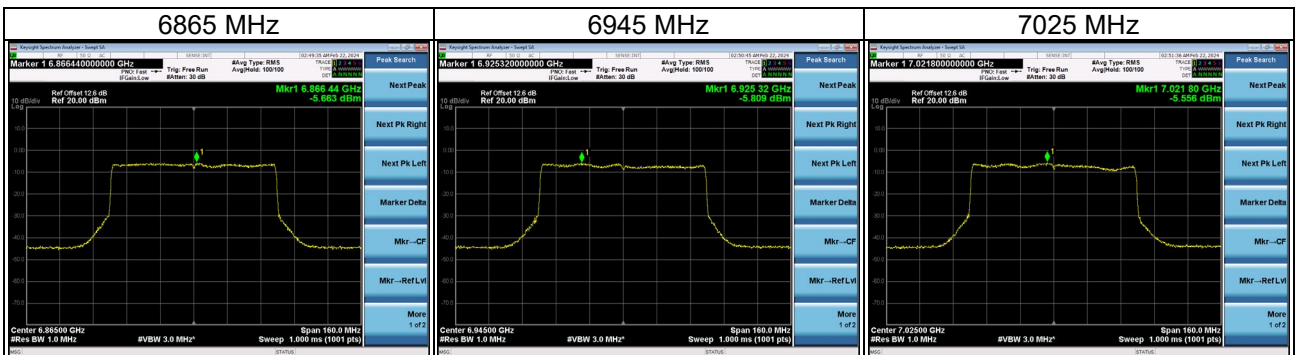


Test Mode	IEEE 802.11be (EHT80)_ Total
-----------	------------------------------

Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
5985	-1.83	-1.69	1.09	5.00	Pass
6145	-1.94	-1.80	0.98	5.00	Pass
6385	-2.18	-2.04	0.74	5.00	Pass
6465	-2.02	-1.87	0.91	5.00	Pass
6545	-1.91	-1.76	1.02	5.00	Pass
6625	-1.80	-1.66	1.12	5.00	Pass
6785	-2.04	-1.90	0.88	5.00	Pass
6865	-1.83	-1.68	1.10	5.00	Pass
6945	-2.18	-2.04	0.74	5.00	Pass
7025	-2.08	-1.94	0.84	5.00	Pass

Test Mode	IEEE 802.11be (EHT160)_ Ant 1
-----------	-------------------------------

Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6025	-4.51	-4.40	-1.62	5.00	Pass
6345	-4.90	-4.78	-2.00	5.00	Pass

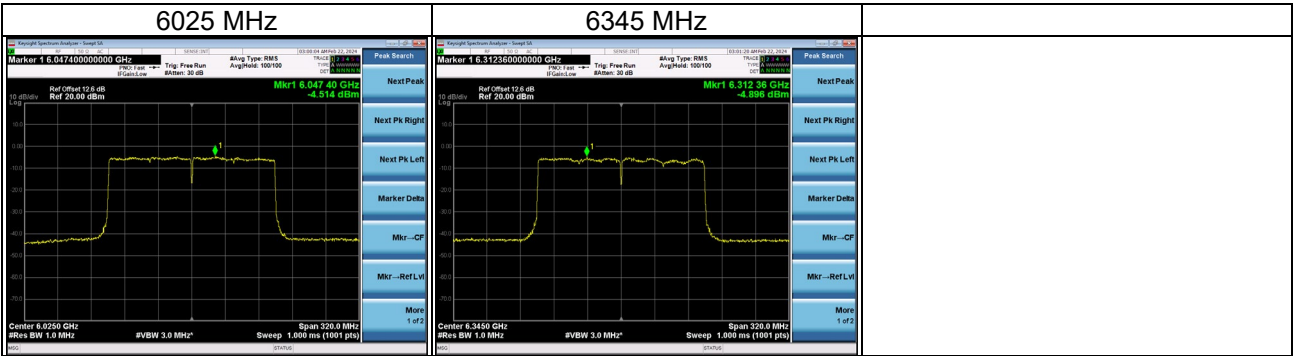

Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6505	-4.91	-4.80	-2.02	5.00	Pass





Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6665	-4.67	-4.55	-1.77	5.00	Pass




Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6985	-4.70	-4.58	-1.80	5.00	Pass



Test Mode	IEEE 802.11be (EHT160)_ Ant 2
-----------	-------------------------------


Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6025	-5.73	-5.61	-2.83	5.00	Pass
6345	-5.39	-5.28	-2.50	5.00	Pass

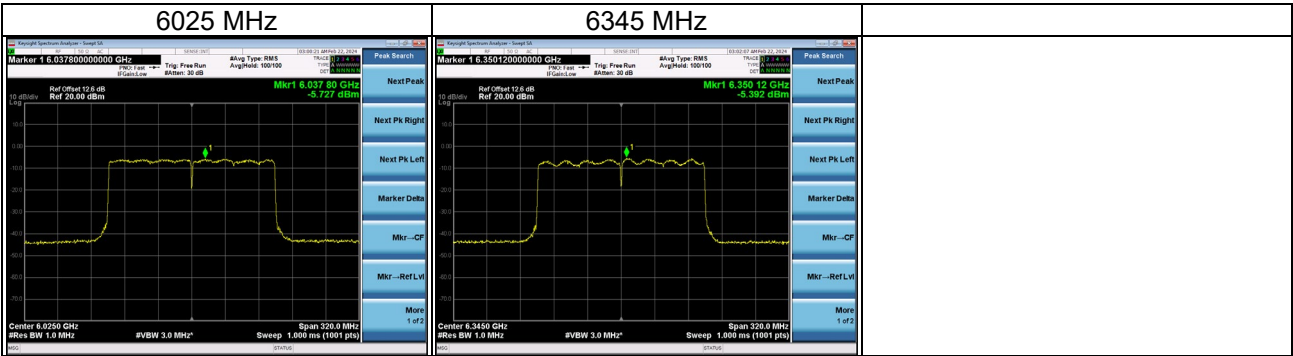

Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6505	-5.30	-5.18	-2.40	5.00	Pass



Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6665	-5.49	-5.38	-2.60	5.00	Pass

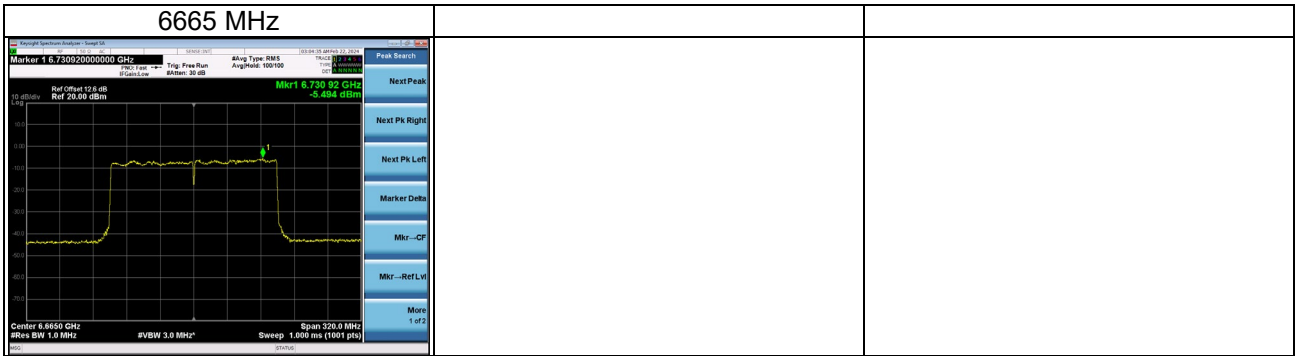

Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6985	-4.96	-4.85	-2.07	5.00	Pass




Test Mode	IEEE 802.11be (EHT160)_ Total
-----------	-------------------------------

Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6025	-2.07	-1.95	0.83	5.00	Pass
6345	-2.13	-2.01	0.77	5.00	Pass
6505	-2.09	-1.98	0.80	5.00	Pass
6665	-2.05	-1.93	0.85	5.00	Pass
6985	-1.82	-1.70	1.08	5.00	Pass

Test Mode	IEEE 802.11be (EHT320)_ Ant 1
-----------	-------------------------------


Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6105	-4.55	-4.32	-1.54	5.00	Pass
6265	-4.20	-3.97	-1.19	5.00	Pass

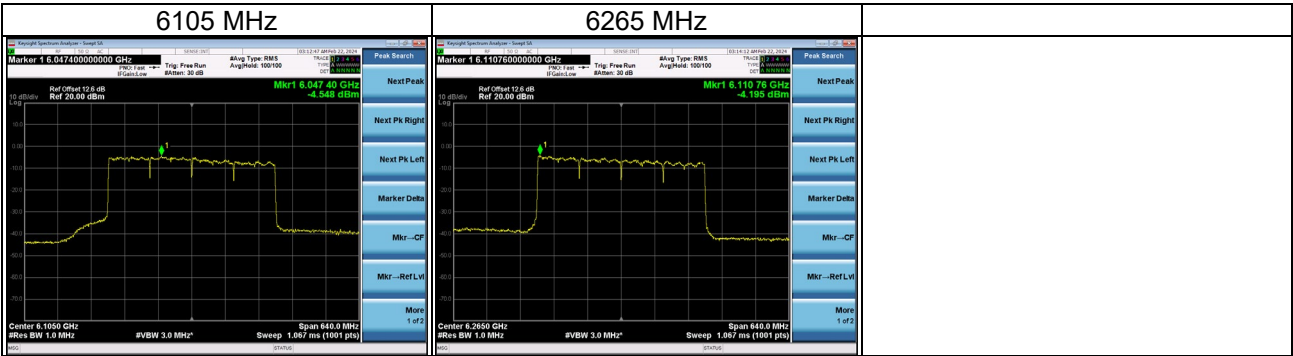

Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6425	-5.04	-4.82	-2.04	5.00	Pass



Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6585	-4.35	-4.12	-1.34	5.00	Pass
6745	-4.26	-4.03	-1.25	5.00	Pass

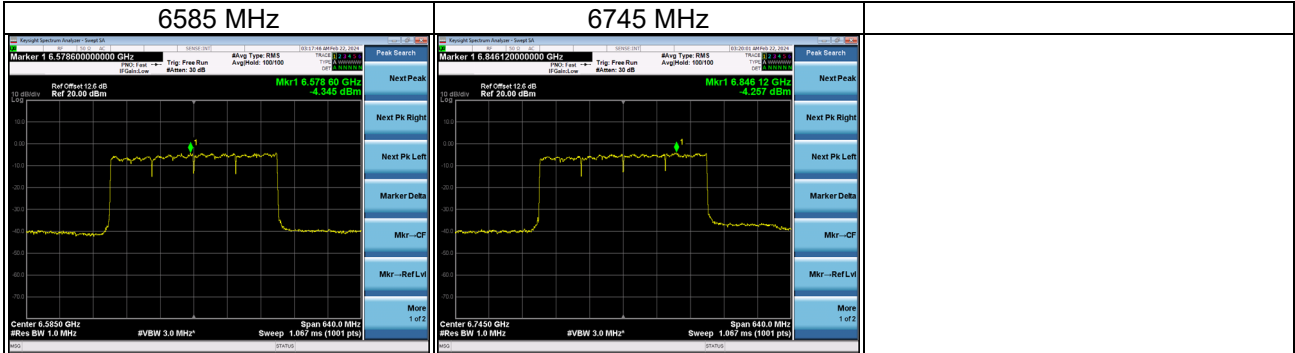


Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6905	-4.91	-4.68	-1.90	5.00	Pass



Test Mode	IEEE 802.11be (EHT320)_ Ant 2
-----------	-------------------------------


Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6105	-5.90	-5.67	-2.89	5.00	Pass
6265	-5.60	-5.37	-2.59	5.00	Pass

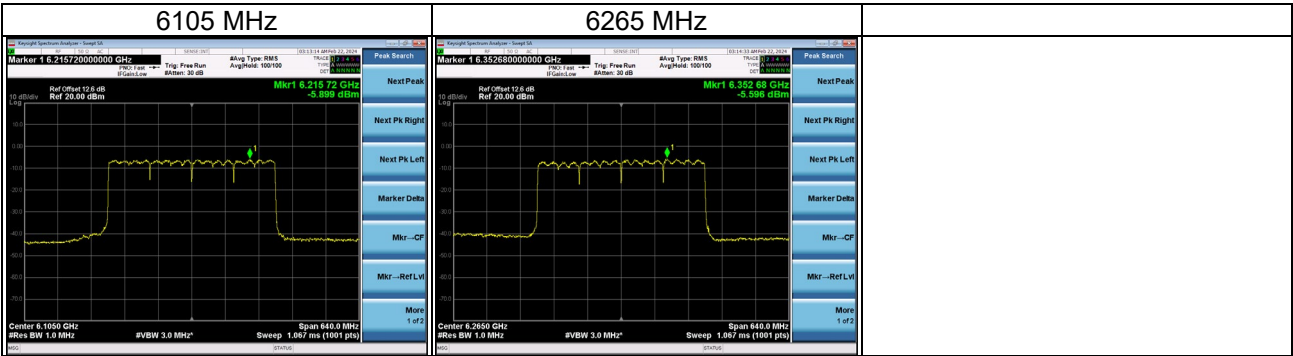

Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6425	-5.39	-5.16	-2.38	5.00	Pass



Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6585	-5.23	-5.01	-2.23	5.00	Pass
6745	-5.44	-5.22	-2.44	5.00	Pass

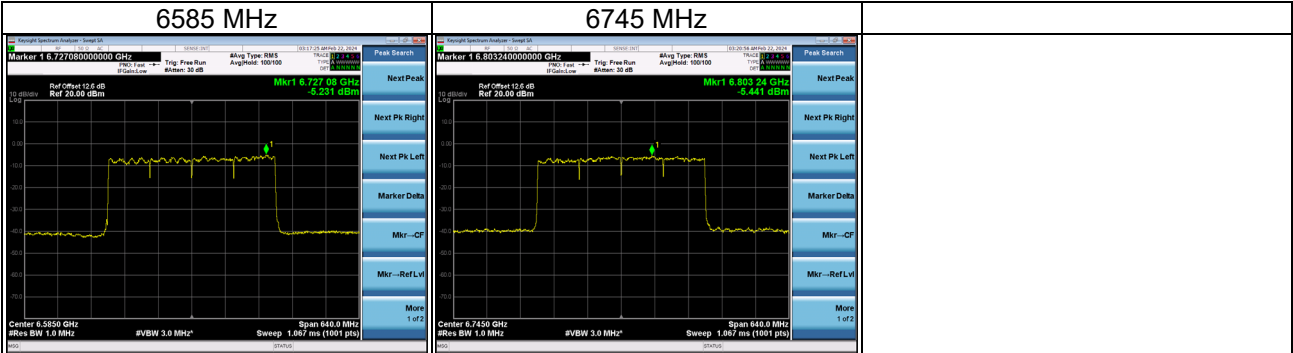

Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6905	-6.39	-6.16	-3.38	5.00	Pass




Test Mode	IEEE 802.11be (EHT320)_ Total
-----------	-------------------------------

Test Frequency (MHz)	Power Spectral Density (dBm/MHz)	Power Spectral Density + Duty Factor (dBm/MHz)	e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Spectral Density Maximum Limit (dBm/MHz)	Result
6105	-2.16	-1.94	0.84	5.00	Pass
6265	-1.83	-1.60	1.18	5.00	Pass
6425	-2.20	-1.98	0.80	5.00	Pass
6585	-1.76	-1.53	1.25	5.00	Pass
6745	-1.80	-1.57	1.21	5.00	Pass
6905	-2.58	-2.35	0.43	5.00	Pass

## **APPENDIX D UNDESIRABLE EMISSIONS - 9 KHZ TO 30 MHZ**



Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/15
Test Frequency	7115 MHz	Polarization	Vertical
Temp	23°C	Hum.	56%

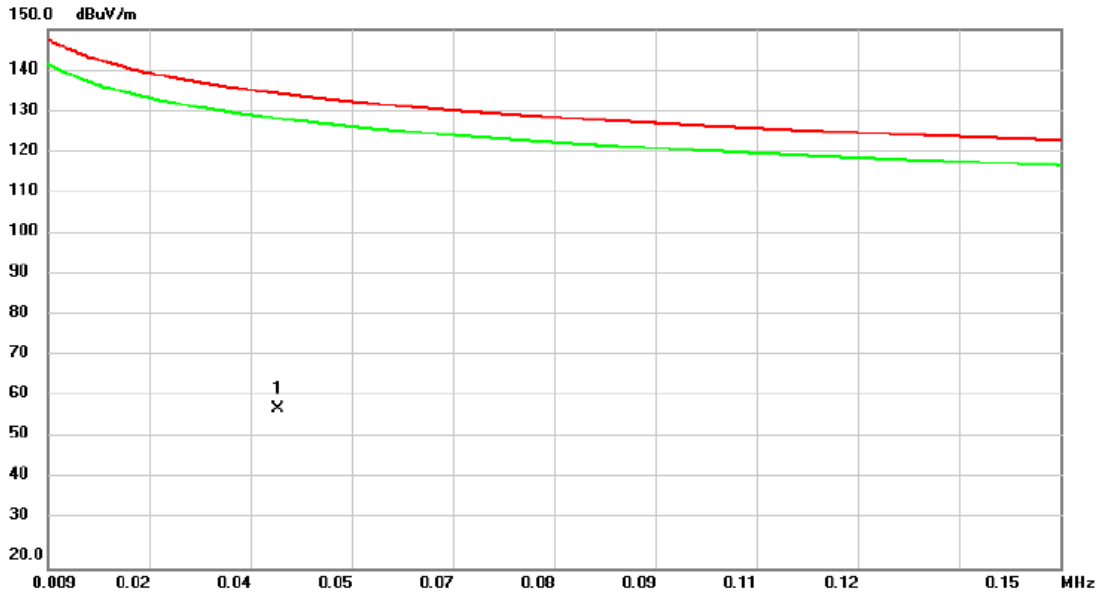


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.0410	32.86	25.52	58.38	134.43	-76.05	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/15
Test Frequency	7115 MHz	Polarization	Vertical
Temp	23°C	Hum.	56%

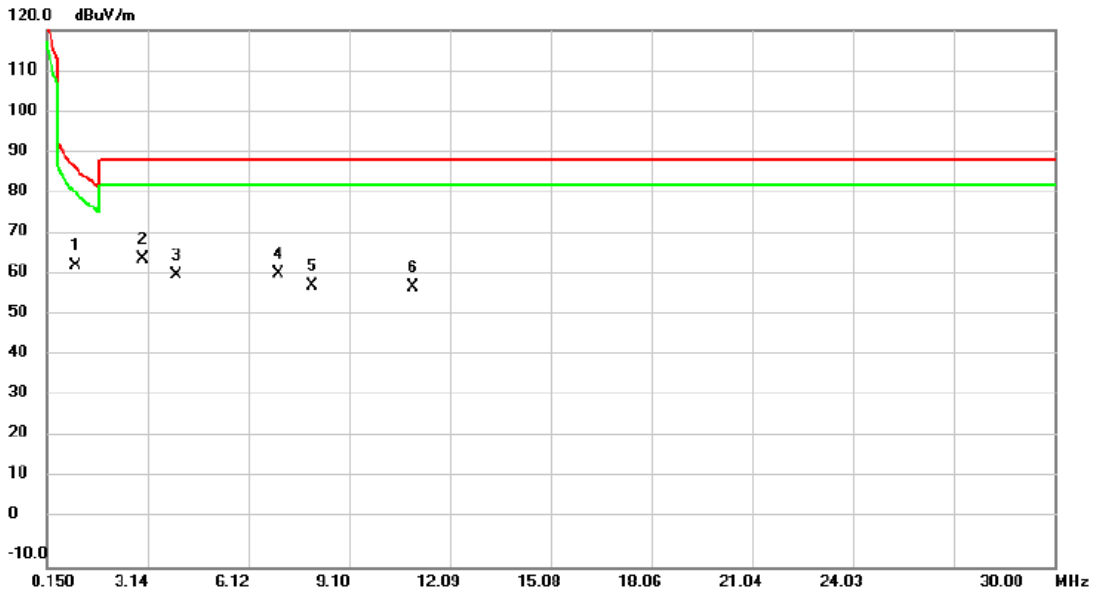


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1 *	1.0007	62.11	0.83	62.94	86.67	-23.73	QP	
2	3.0007	68.53	-3.79	64.74	88.62	-23.88	QP	
3	3.9997	64.75	-4.12	60.63	88.62	-27.99	QP	
4	7.0006	64.92	-3.96	60.96	88.62	-27.66	QP	
5	7.9996	61.90	-3.70	58.20	88.62	-30.42	QP	
6	11.0004	60.92	-3.29	57.63	88.62	-30.99	QP	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/15
Test Frequency	7115 MHz	Polarization	Horizontal
Temp	23°C	Hum.	56%

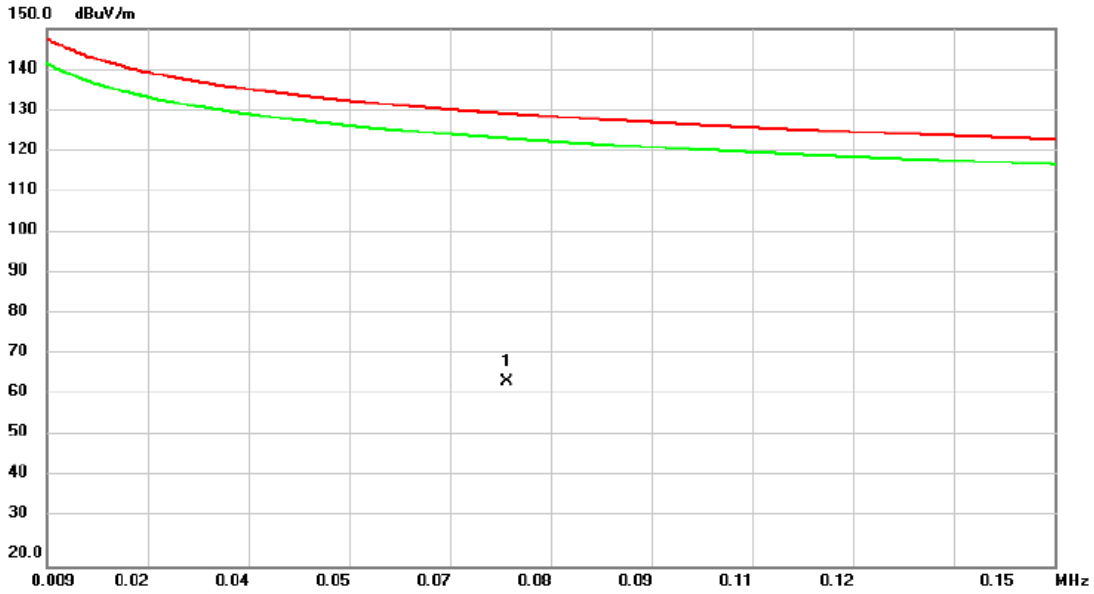


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.0734	44.45	20.17	64.62	129.37	-64.75	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/15
Test Frequency	7115 MHz	Polarization	Horizontal
Temp	23°C	Hum.	56%

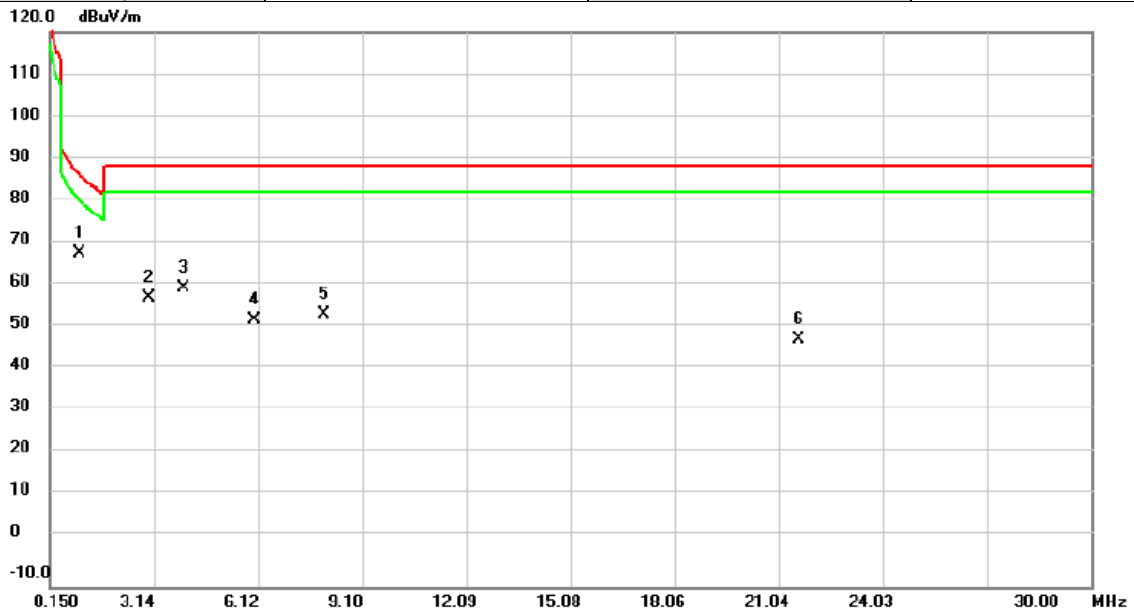


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	0.9997	67.36	0.83	68.19	86.68	-18.49	QP	
2		2.9997	61.53	-3.79	57.74	88.62	-30.88	QP	
3		3.9997	64.29	-4.12	60.17	88.62	-28.45	QP	
4		6.0006	56.64	-4.21	52.43	88.62	-36.19	QP	
5		8.0006	57.59	-3.70	53.89	88.62	-34.73	QP	
6		21.6400	51.49	-3.34	48.15	88.62	-40.47	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

**APPENDIX E UNDESIRABLE EMISSIONS - 30 MHZ TO 1 GHZ**

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/15
Test Frequency	7115 MHz	Polarization	Vertical
Temp	23°C	Hum.	56%

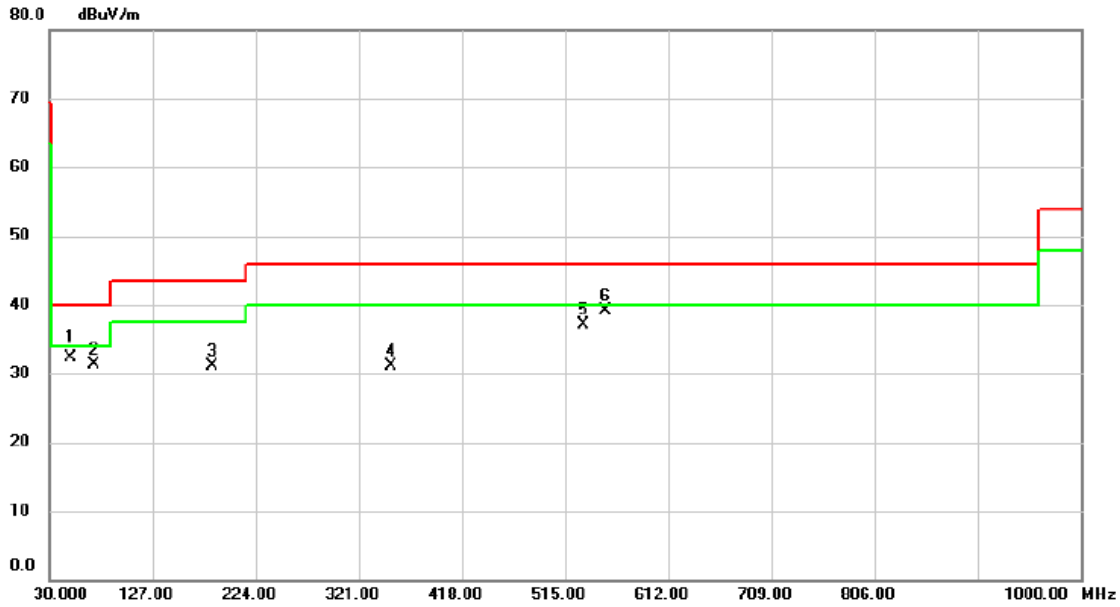


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		50.1113	43.56	-11.25	32.31	40.00	-7.69	QP	
2		72.0010	45.80	-14.51	31.29	40.00	-8.71	peak	
3		182.7427	44.61	-13.56	31.05	43.50	-12.45	peak	
4		351.0700	41.20	-10.16	31.04	46.00	-14.96	peak	
5		532.4277	42.77	-5.71	37.06	46.00	-8.94	peak	
6	*	553.0240	44.31	-5.30	39.01	46.00	-6.99	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/15
Test Frequency	7115 MHz	Polarization	Horizontal
Temp	23°C	Hum.	56%

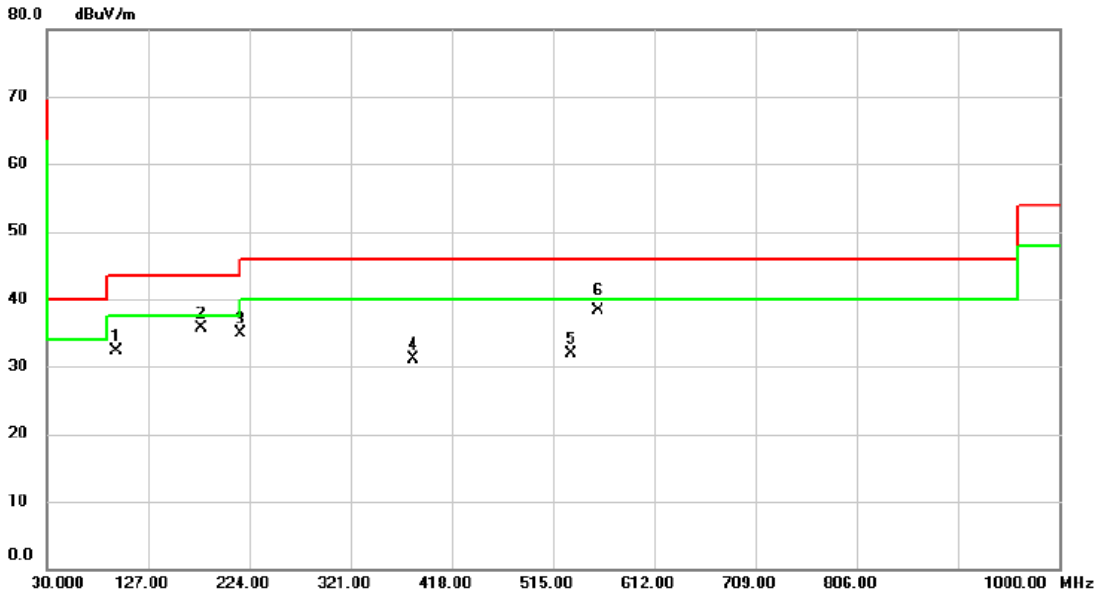

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	96.9970	49.26	-16.99	32.27	43.50	-11.23	peak	
2	178.5585	48.76	-13.09	35.67	43.50	-7.83	peak	
3	215.4554	50.01	-15.20	34.81	43.50	-8.69	peak	
4	380.5205	40.22	-9.21	31.01	46.00	-14.99	peak	
5	532.9630	37.53	-5.70	31.83	46.00	-14.17	peak	
6 *	558.2082	43.56	-5.16	38.40	46.00	-7.60	QP	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX F UNDESIRABLE EMISSIONS - ABOVE 1 GHZ**



Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5955MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

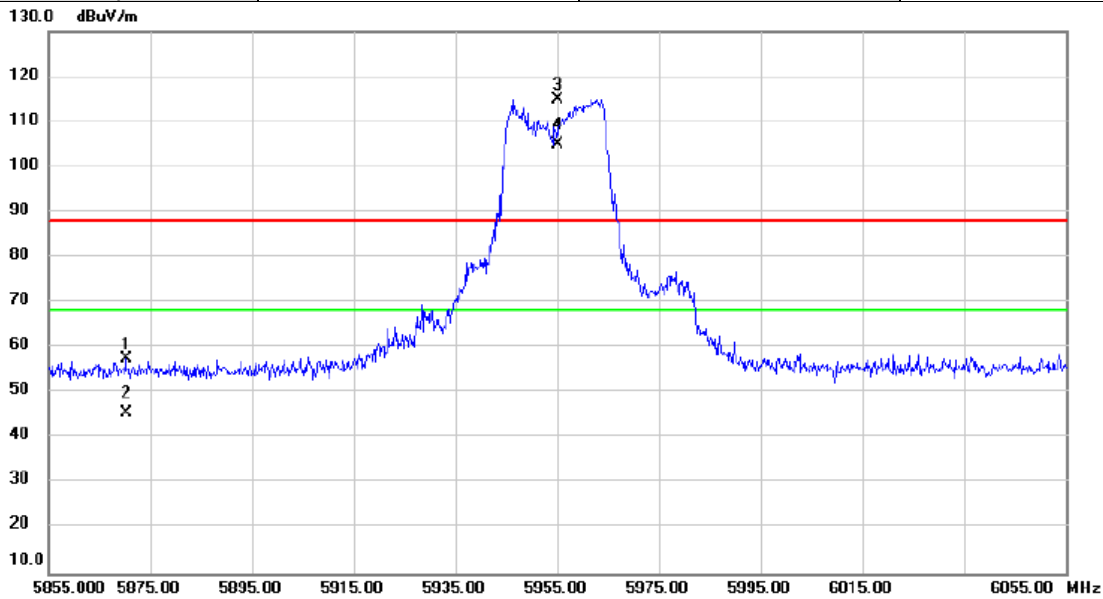


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5870.267	55.44	2.15	57.59	88.20	-30.61	peak	
2	5870.267	43.26	2.15	45.41	68.20	-22.79	AVG	
3 X	5955.000	112.62	2.35	114.97	88.20	26.77	peak	No Limit
4 *	5955.000	102.51	2.35	104.86	68.20	36.66	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	6415MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

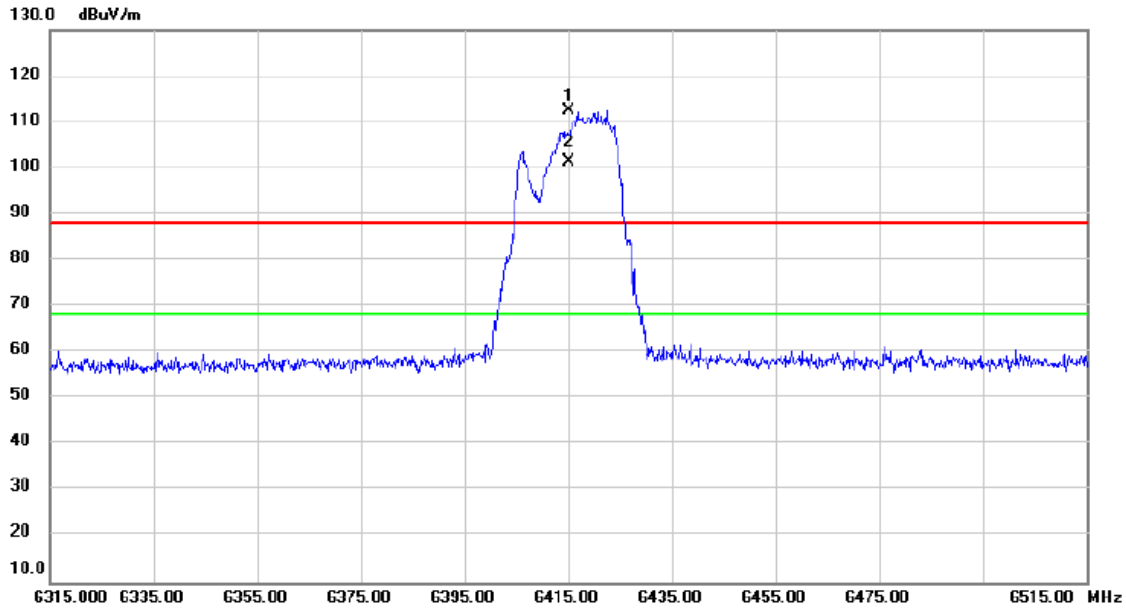


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	6415.000	107.82	4.60	112.42	88.20	24.22	peak	No Limit
2	*	6415.000	96.63	4.60	101.23	68.20	33.03	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	6435MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

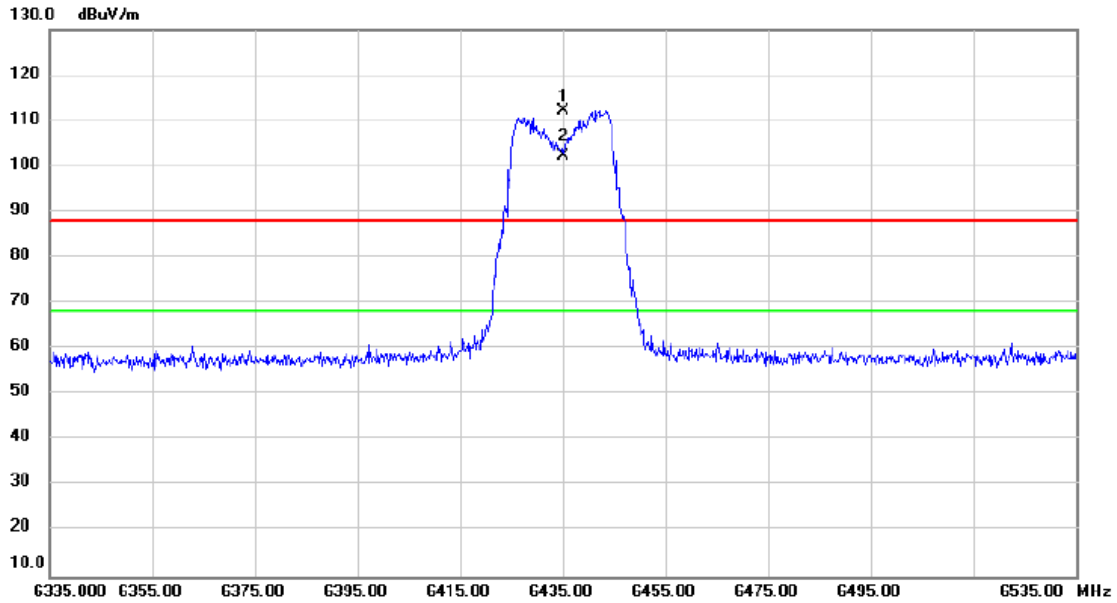


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6435.000	107.55	4.70	112.25	88.20	24.05	peak	No Limit
2	*	6435.000	97.43	4.70	102.13	68.20	33.93	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	6515MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

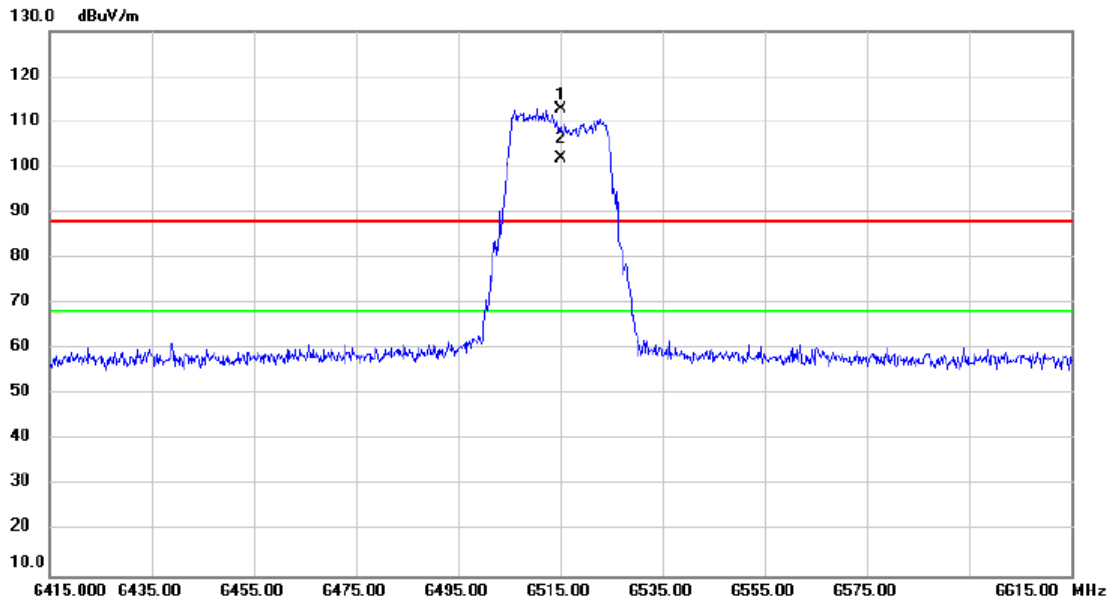


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6515.000	107.78	5.07	112.85	88.20	24.65	peak	No Limit
2	*	6515.000	96.87	5.07	101.94	68.20	33.74	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	6535MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

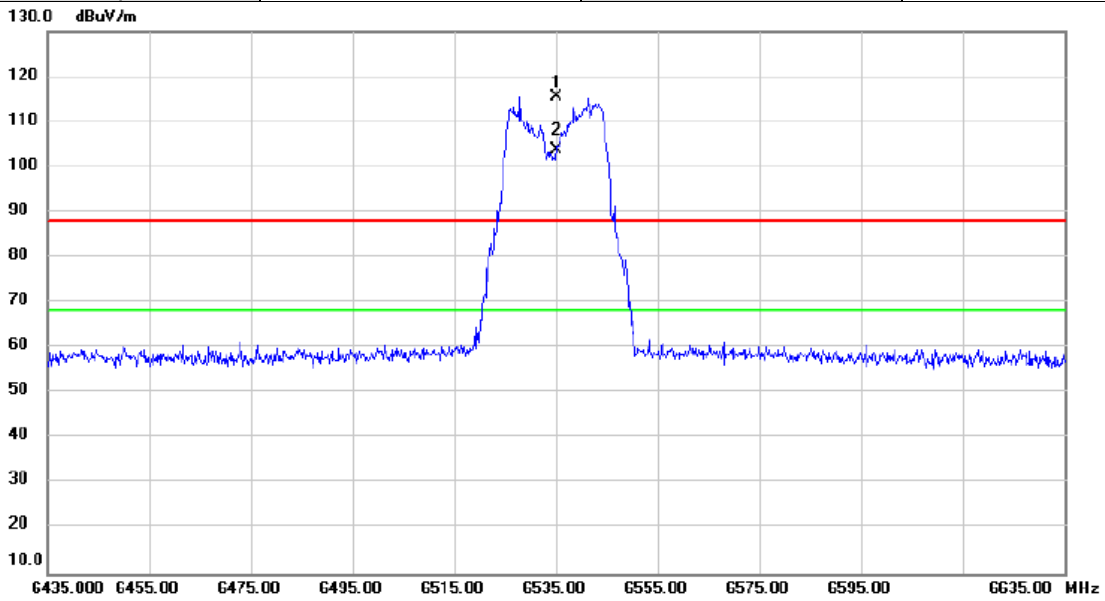


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	6535.000	110.44	5.10	115.54	88.20	27.34	peak	No Limit
2	*	6535.000	98.60	5.10	103.70	68.20	35.50	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	6855MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

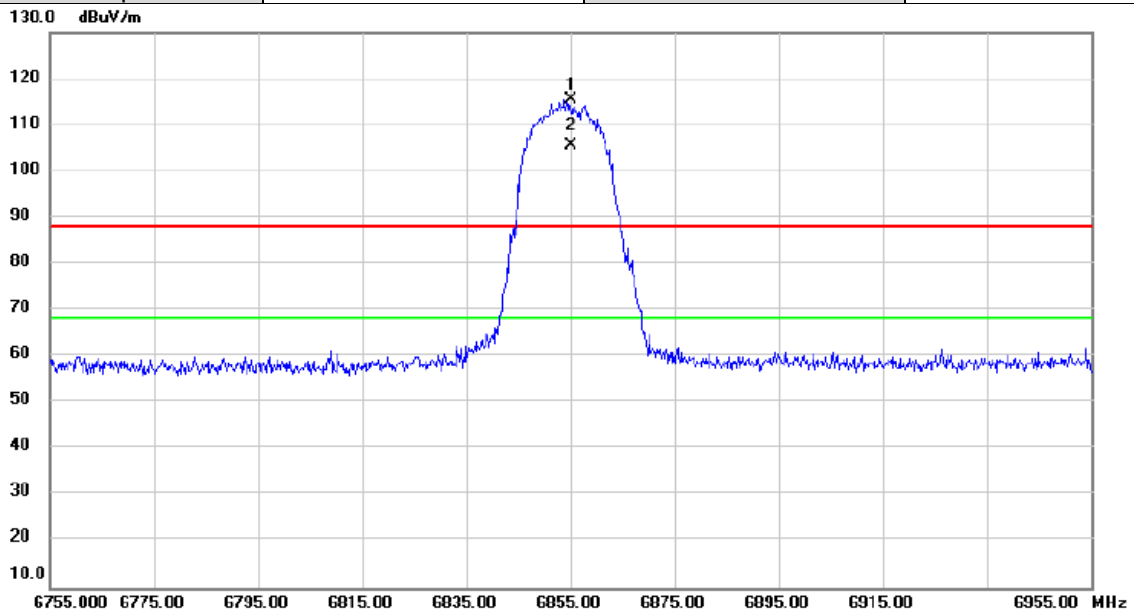


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	6855.000	109.71	5.68	115.39	88.20	27.19	peak	No Limit
2	*	6855.000	99.73	5.68	105.41	68.20	37.21	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	6875MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

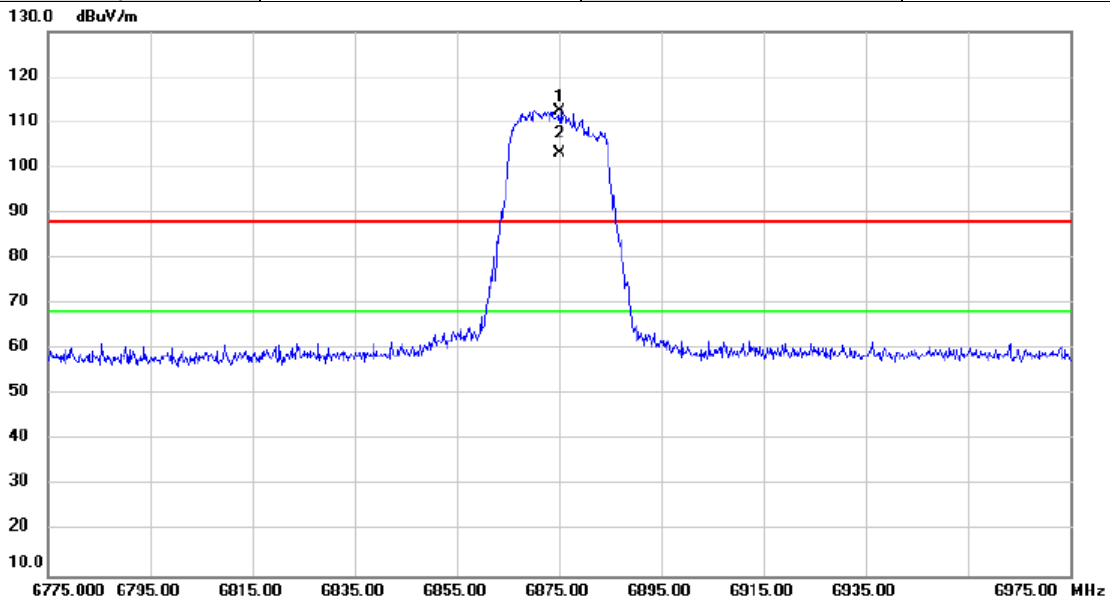


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	6875.000	106.74	5.72	112.46	88.20	24.26	peak	No Limit
2	*	6875.000	97.45	5.72	103.17	68.20	34.97	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	7115MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

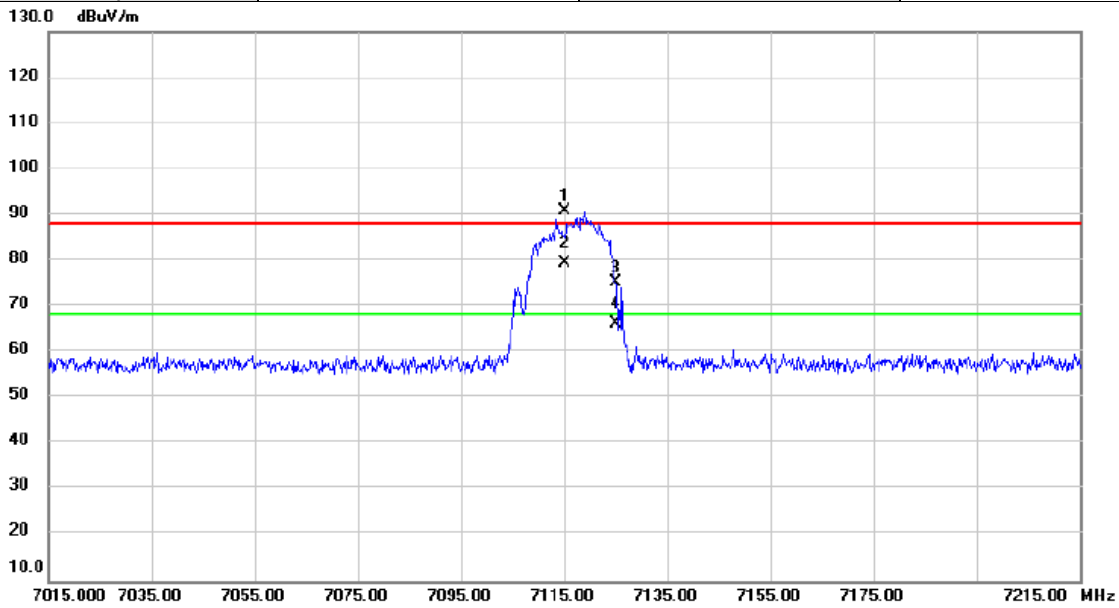


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	7115.000	84.82	5.93	90.75	88.20	2.55	peak	No Limit
2	*	7115.000	73.42	5.93	79.35	68.20	11.15	AVG	No Limit
3		7125.000	69.19	5.93	75.12	88.20	-13.08	peak	
4		7125.000	60.18	5.93	66.11	68.20	-2.09	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	5965MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

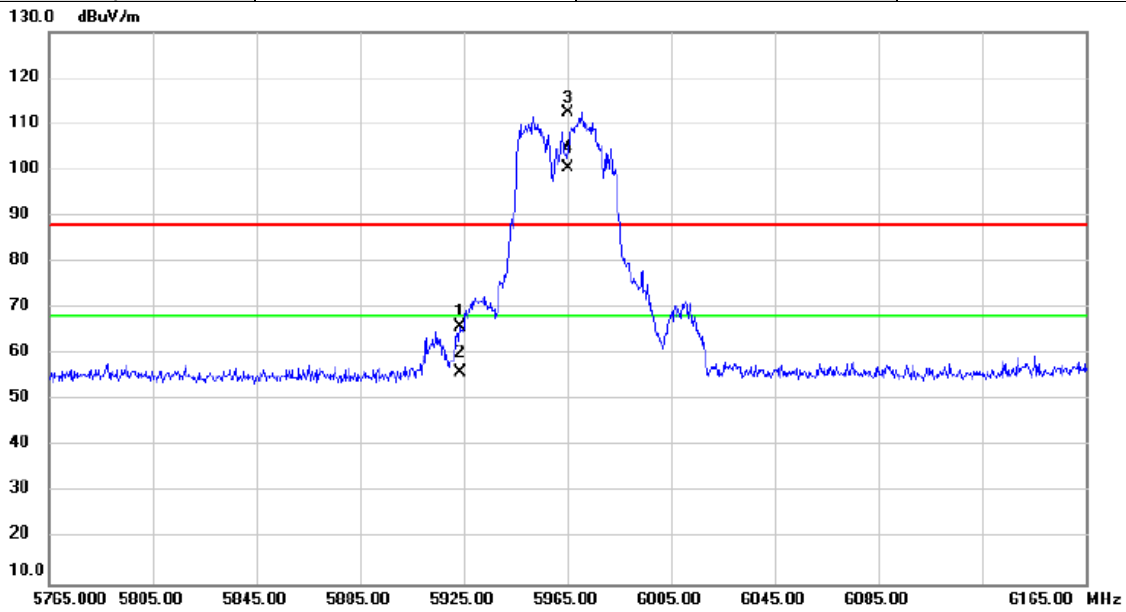


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5923.773	63.70	2.27	65.97	88.20	-22.23	peak	
2		5923.773	53.80	2.27	56.07	68.20	-12.13	AVG	
3	X	5965.000	110.11	2.38	112.49	88.20	24.29	peak	No Limit
4	*	5965.000	98.07	2.38	100.45	68.20	32.25	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	6405MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

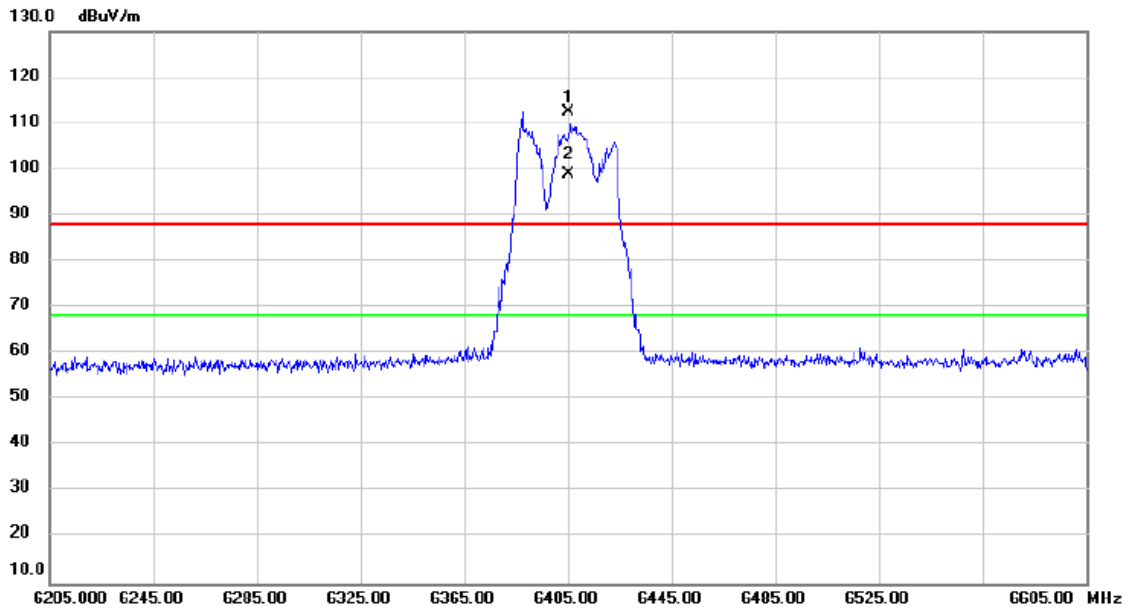


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6405.000	107.82	4.55	112.37	88.20	24.17	peak	No Limit
2	*	6405.000	94.42	4.55	98.97	68.20	30.77	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	6445MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

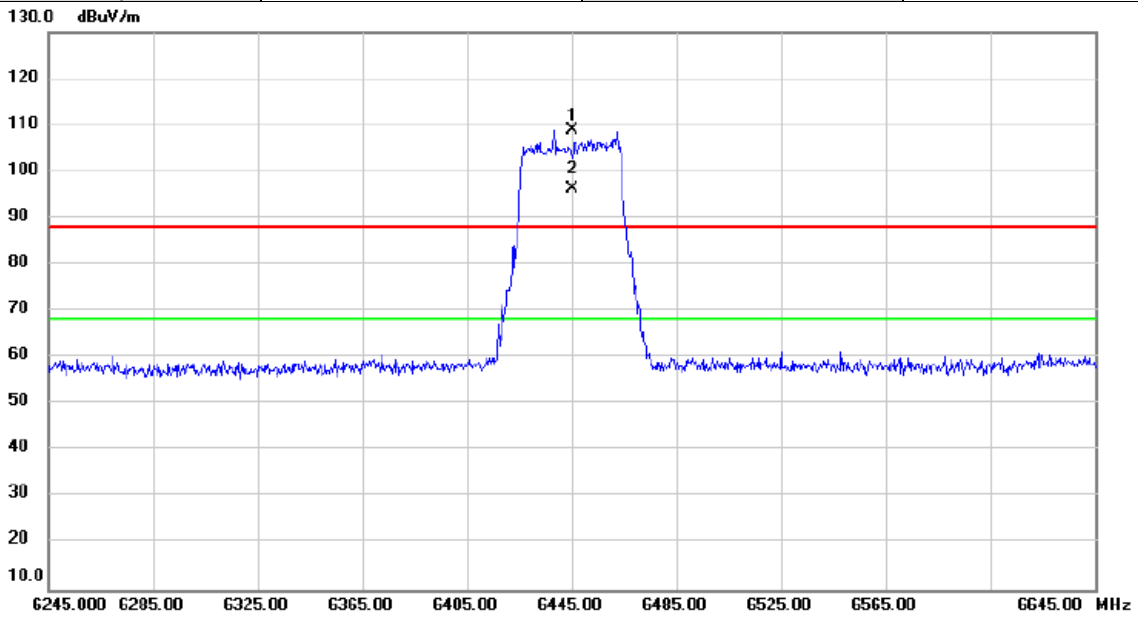


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6445.000	103.98	4.76	108.74	88.20	20.54	peak	No Limit
2	*	6445.000	91.41	4.76	96.17	68.20	27.97	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	6485MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

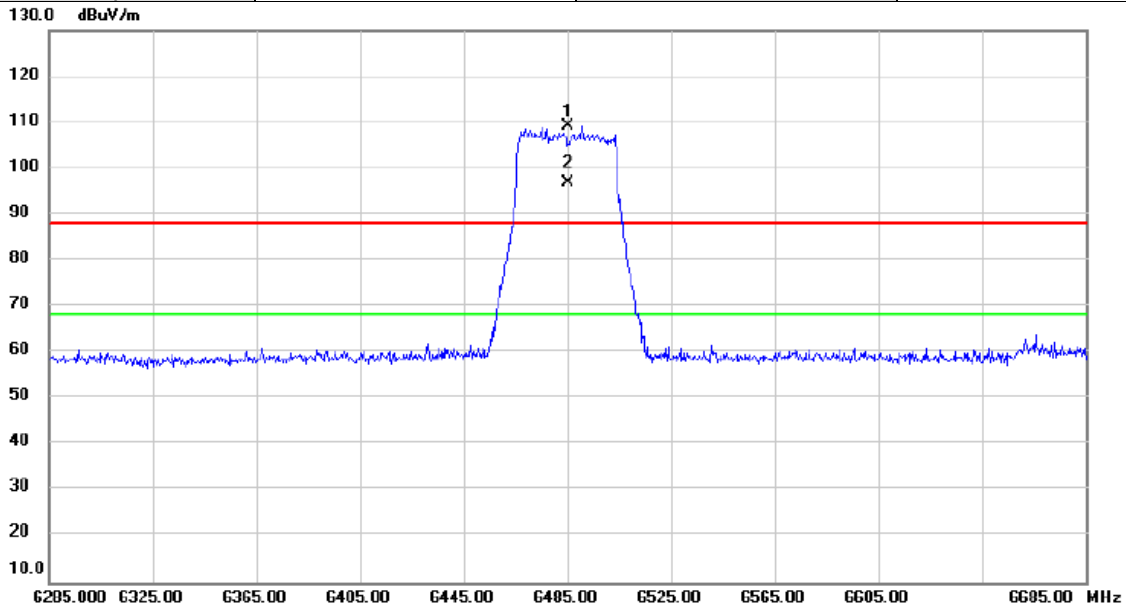


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6485.000	104.17	4.96	109.13	88.20	20.93	peak	No Limit
2	*	6485.000	91.90	4.96	96.86	68.20	28.66	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	6525MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

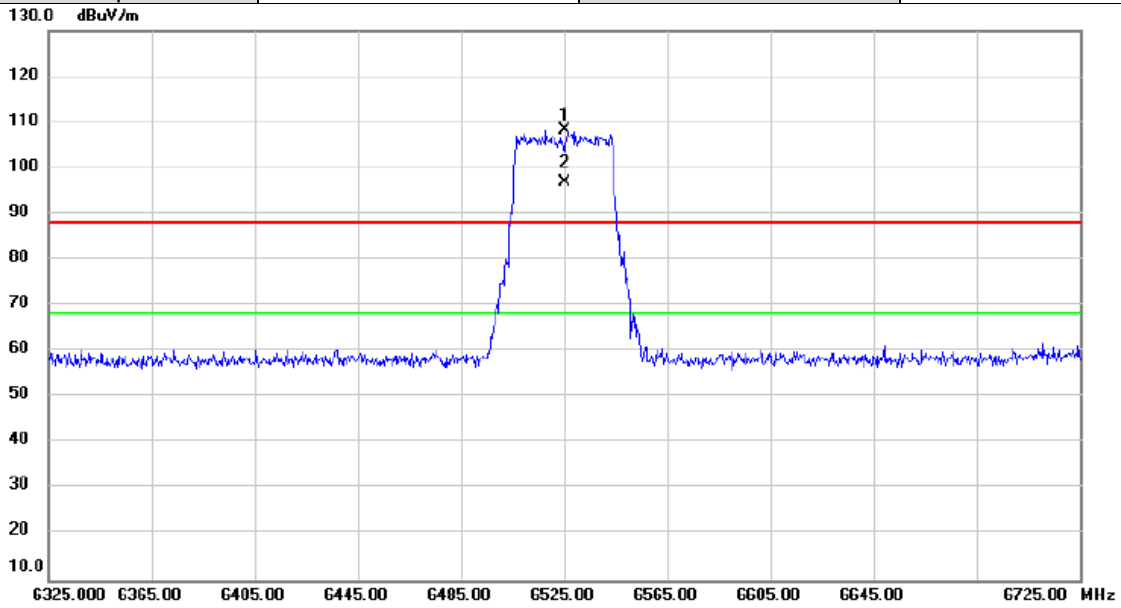


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	6525.000	103.18	5.09	108.27	88.20	20.07	peak	No Limit
2	*	6525.000	91.74	5.09	96.83	68.20	28.63	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	6845MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

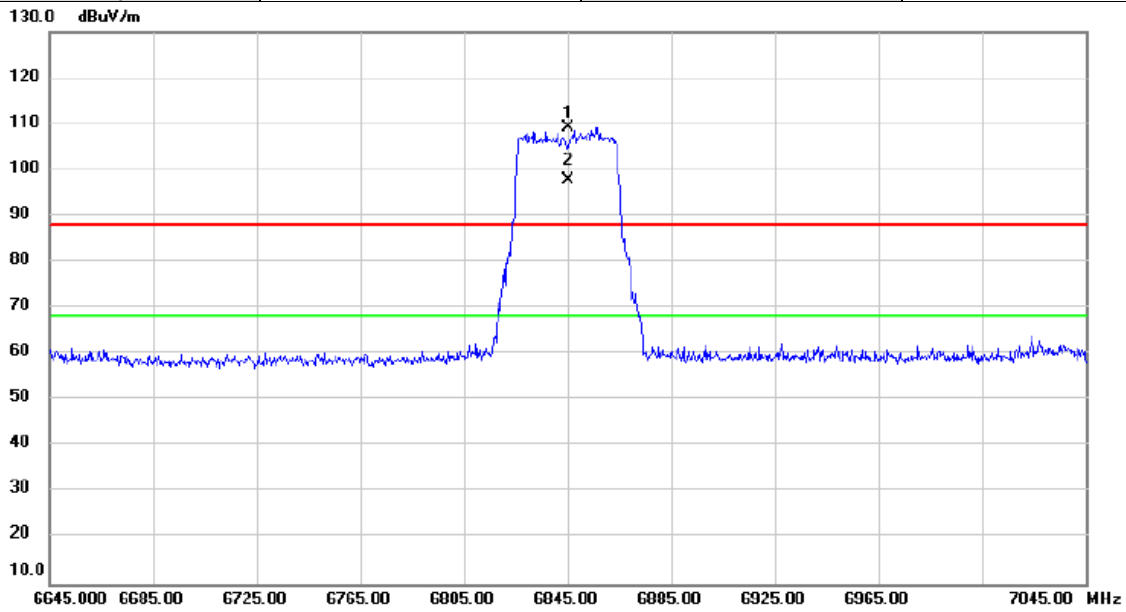


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	6845.000	103.52	5.67	109.19	88.20	20.99	peak	No Limit
2	*	6845.000	92.20	5.67	97.87	68.20	29.67	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	6885MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

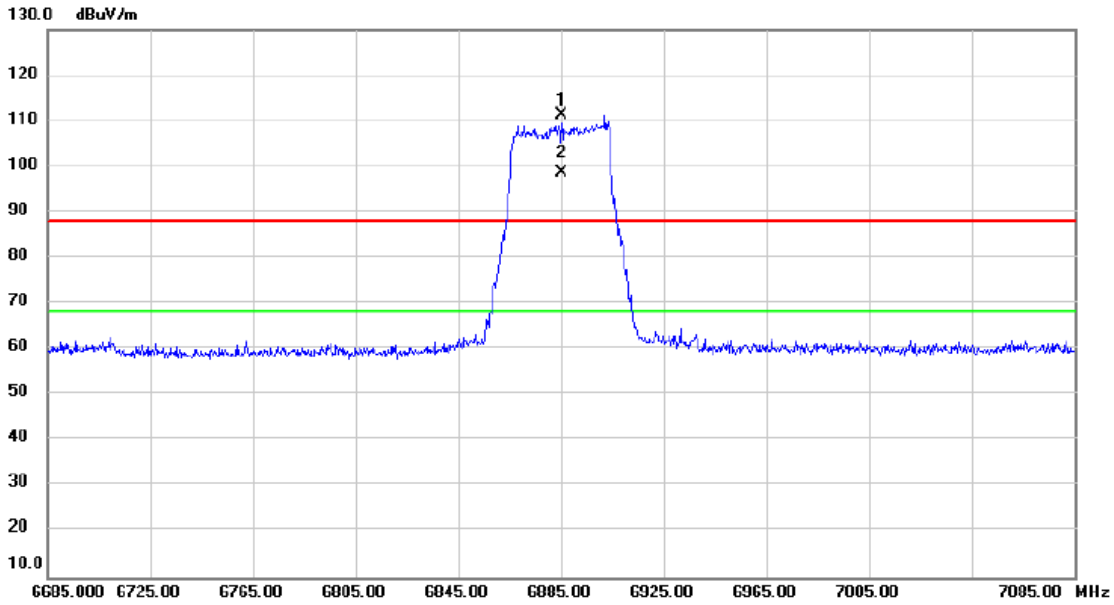


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6885.000	105.61	5.73	111.34	88.20	23.14	peak	No Limit
2	*	6885.000	93.00	5.73	98.73	68.20	30.53	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	7085MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

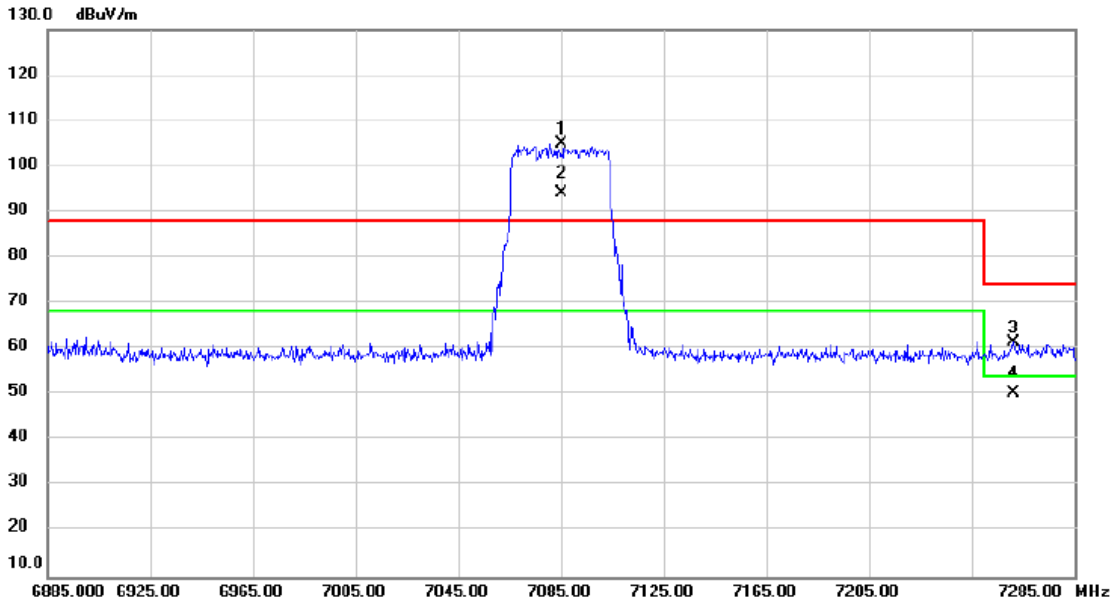


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	7085.000	98.87	5.94	104.81	88.20	16.61	peak	No Limit
2	*	7085.000	88.27	5.94	94.21	68.20	26.01	AVG	No Limit
3		7261.200	55.64	5.91	61.55	74.00	-12.45	peak	
4		7261.200	44.32	5.91	50.23	54.00	-3.77	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/12/13
Test Frequency	5985MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

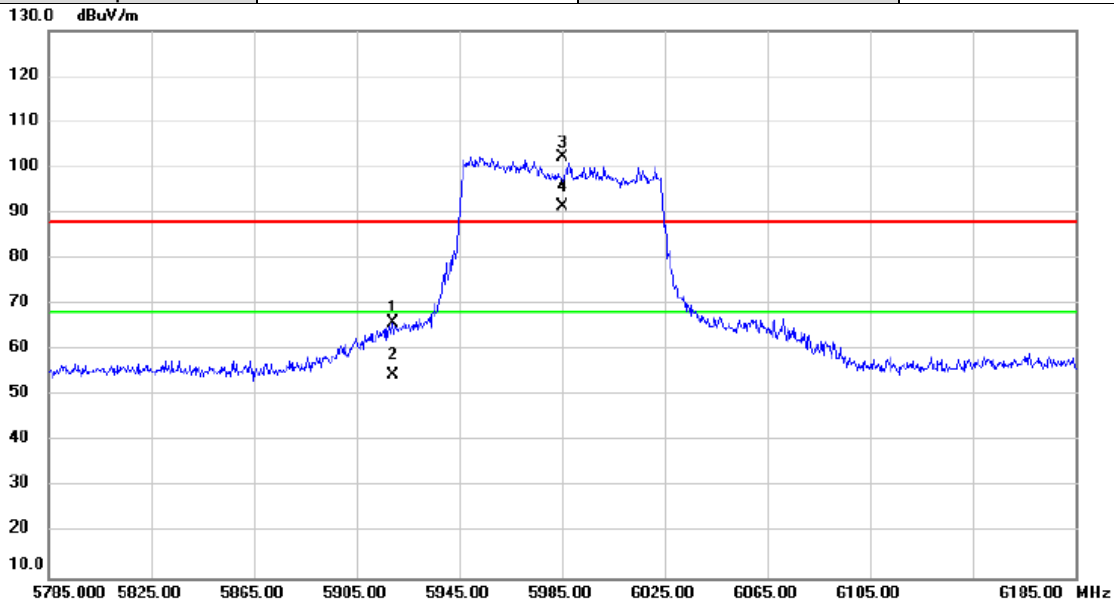


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5919.227	63.69	2.26	65.95	88.20	-22.25	peak	
2		5919.227	52.40	2.26	54.66	68.20	-13.54	AVG	
3	X	5985.000	99.92	2.42	102.34	88.20	14.14	peak	No Limit
4	*	5985.000	89.15	2.42	91.57	68.20	23.37	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/12/13
Test Frequency	6385MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

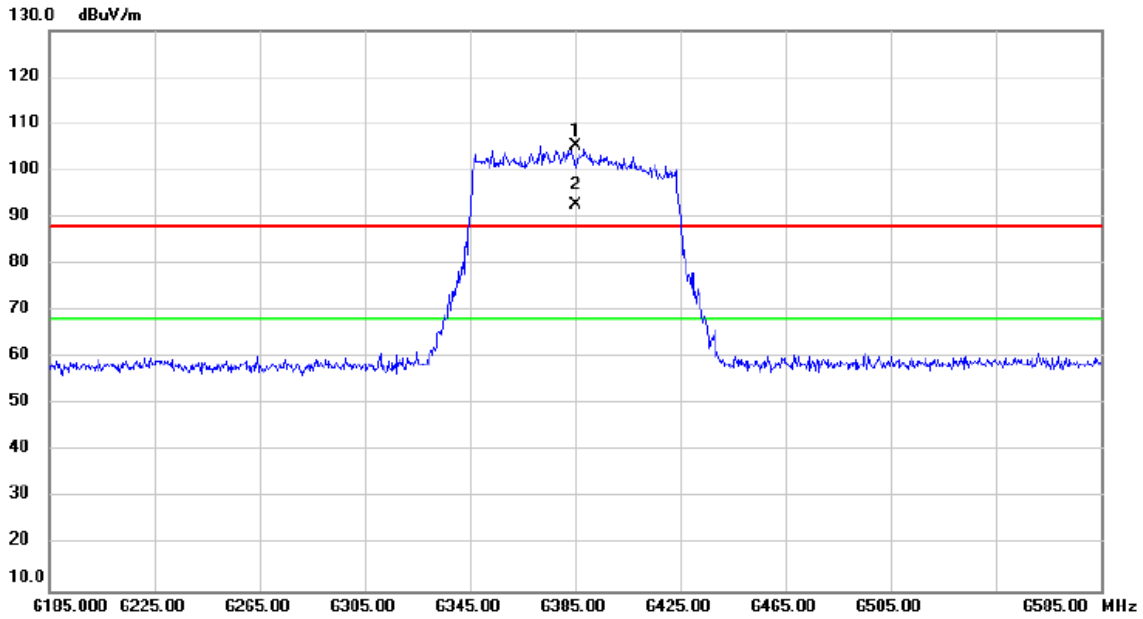


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6385.000	100.68	4.45	105.13	88.20	16.93	peak	No Limit
2	*	6385.000	88.24	4.45	92.69	68.20	24.49	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/12/14
Test Frequency	6465MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

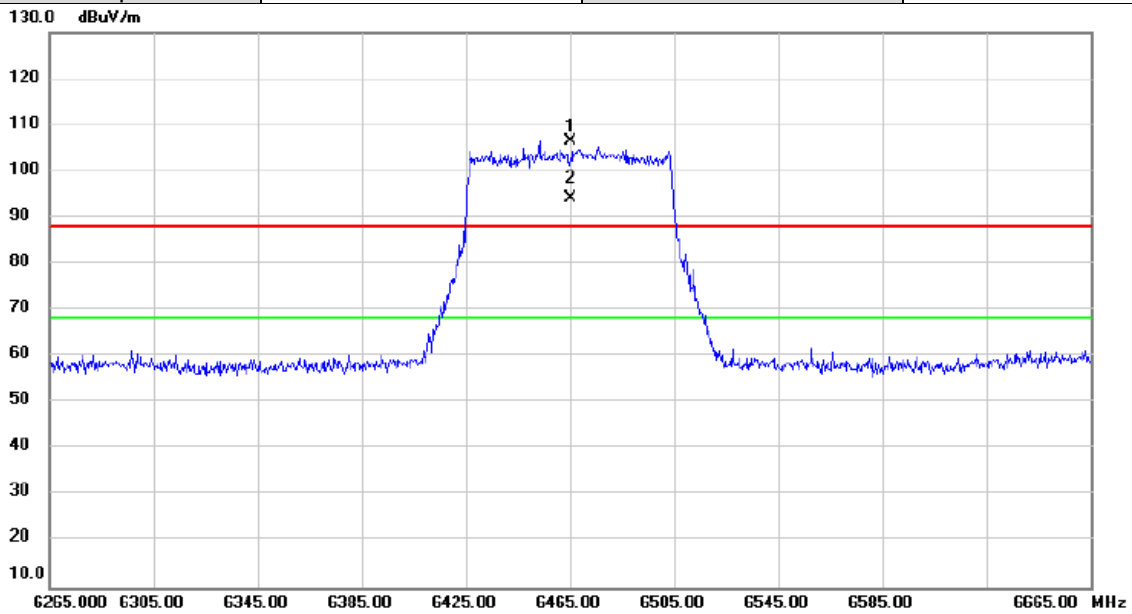


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	6465.000	101.67	4.86	106.53	88.20	18.33	peak	No Limit
2	*	6465.000	89.19	4.86	94.05	68.20	25.85	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/12/14
Test Frequency	6545MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

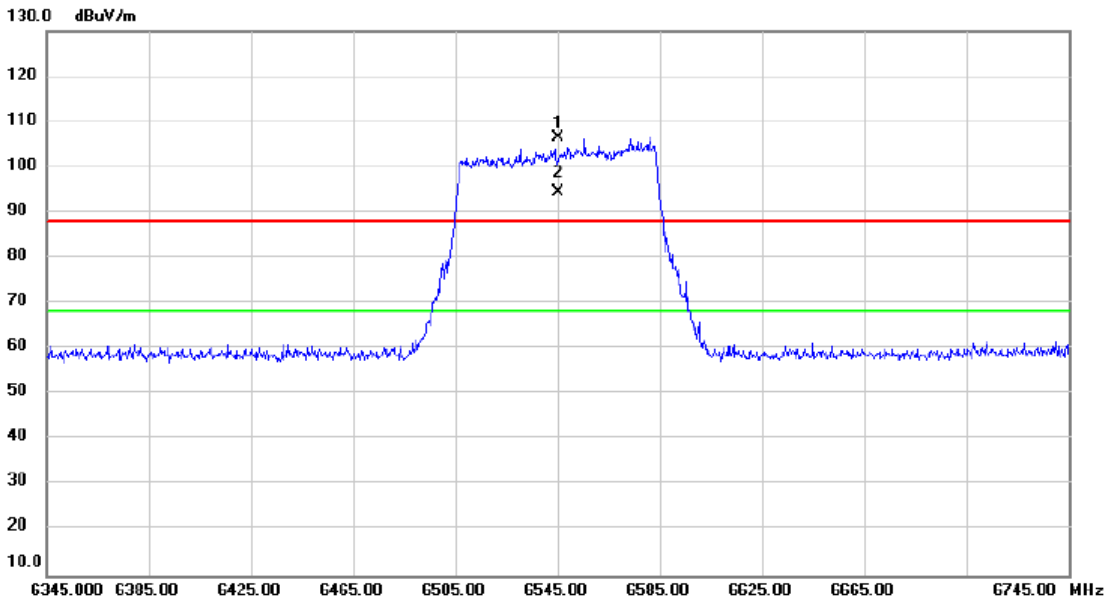


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6545.000	101.23	5.12	106.35	88.20	18.15	peak	No Limit
2	*	6545.000	89.41	5.12	94.53	68.20	26.33	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/12/14
Test Frequency	6625MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

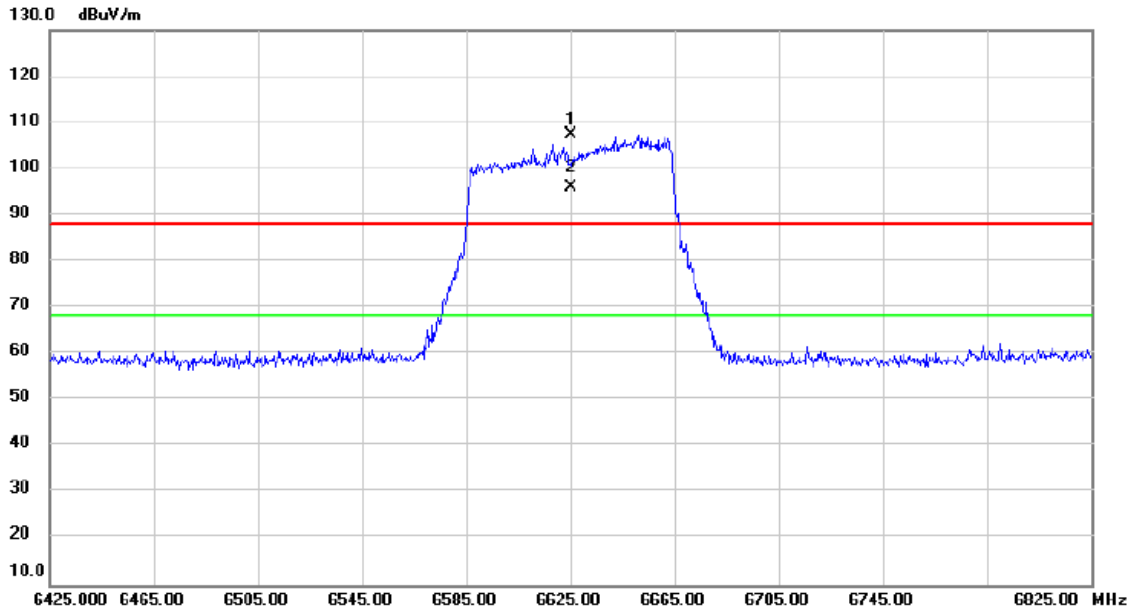


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6625.000	102.06	5.27	107.33	88.20	19.13	peak	No Limit
2	*	6625.000	90.64	5.27	95.91	68.20	27.71	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/12/14
Test Frequency	6785MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

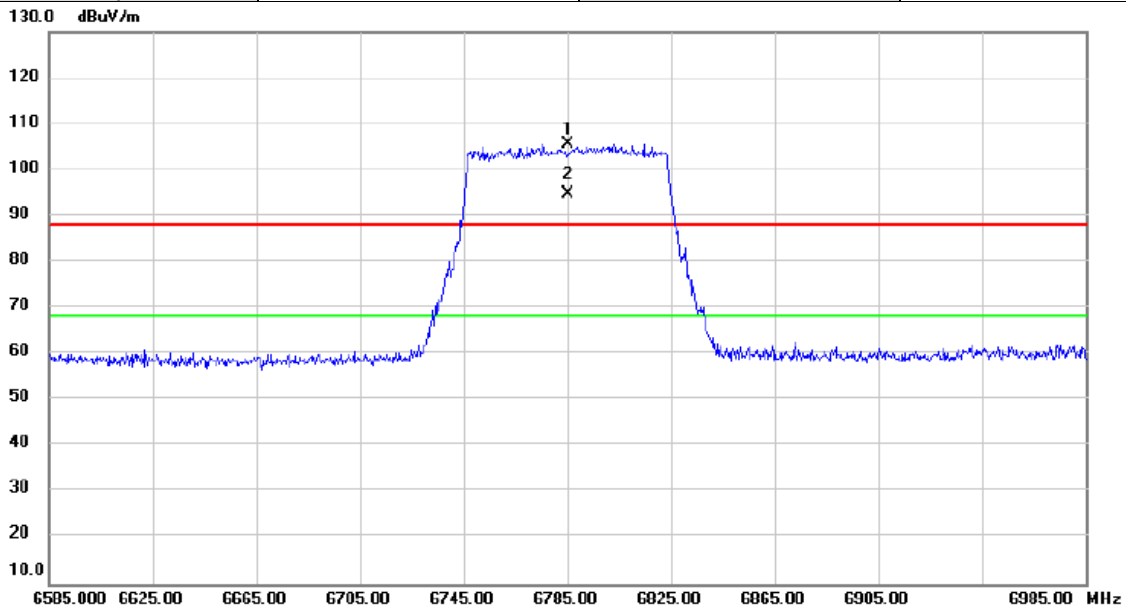


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	6785.000	100.10	5.55	105.65	88.20	17.45	peak	No Limit
2	*	6785.000	89.18	5.55	94.73	68.20	26.53	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/12/14
Test Frequency	6865MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

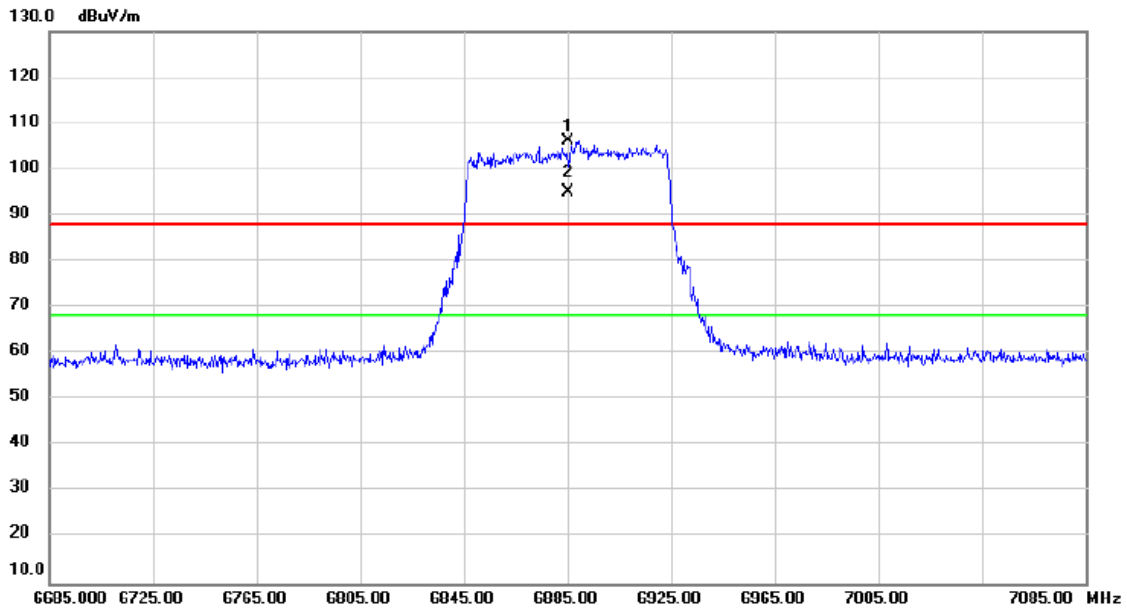


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	6885.000	100.30	5.73	106.03	88.20	17.83	peak	No Limit
2	*	6885.000	89.28	5.73	95.01	68.20	26.81	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/12/14
Test Frequency	7025MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

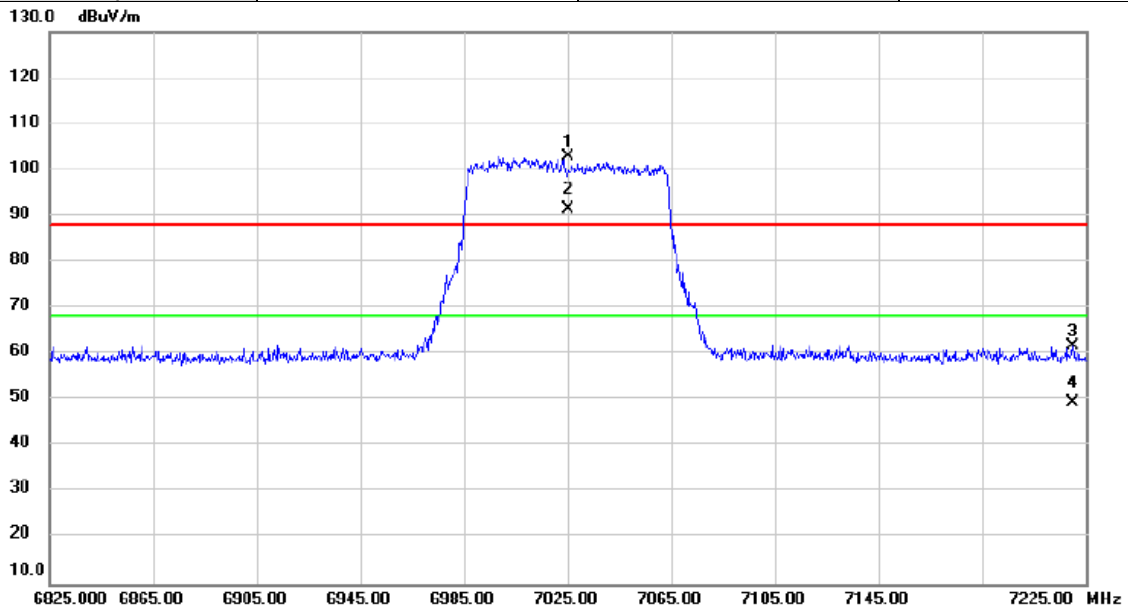


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	7025.000	96.95	5.94	102.89	88.20	14.69	peak	No Limit
2	*	7025.000	85.62	5.94	91.56	68.20	23.36	AVG	No Limit
3		7219.987	55.85	5.93	61.78	88.20	-26.42	peak	
4		7219.987	43.51	5.93	49.44	68.20	-18.76	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/12/14
Test Frequency	6025MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

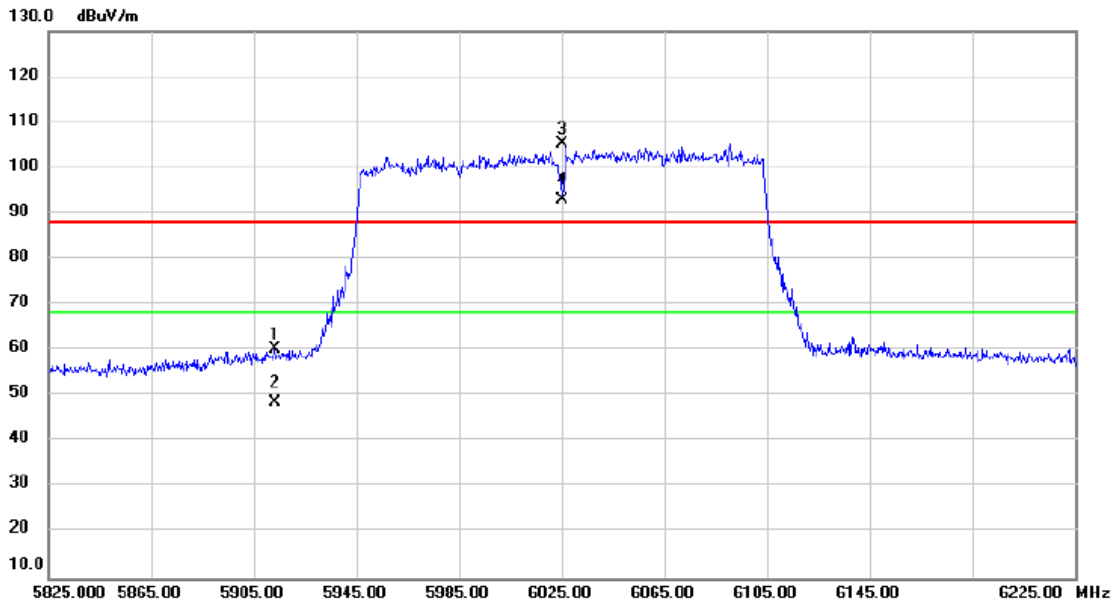


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5913.400	58.02	2.25	60.27	88.20	-27.93	peak	
2		5913.400	46.27	2.25	48.52	68.20	-19.68	AVG	
3	X	6025.000	102.58	2.58	105.16	88.20	16.96	peak	No Limit
4	*	6025.000	90.37	2.58	92.95	68.20	24.75	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/12/14
Test Frequency	6345MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

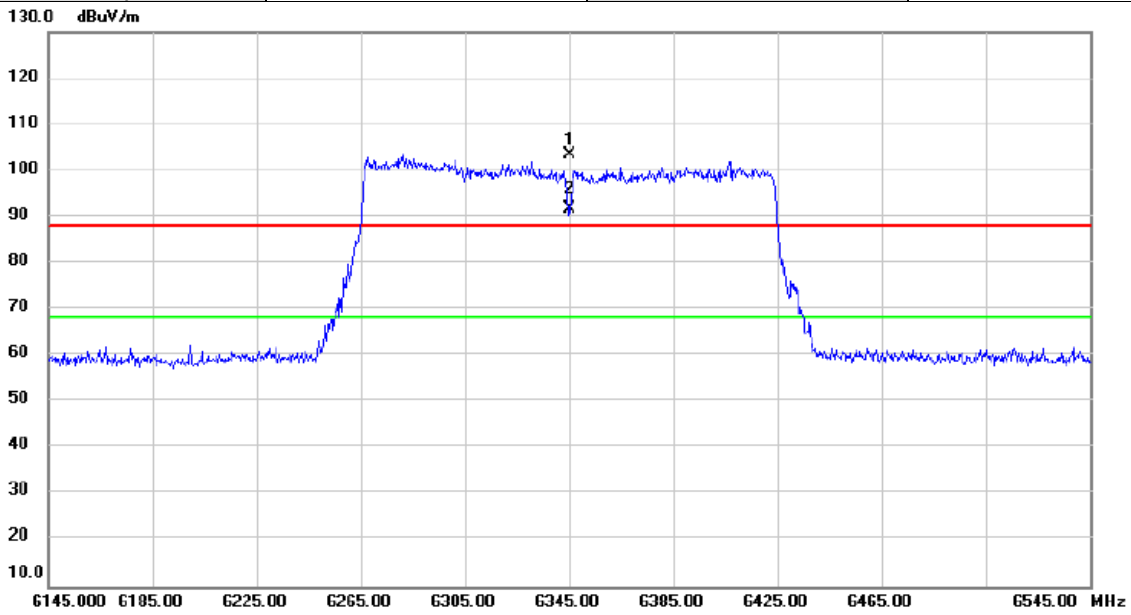


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6345.000	99.12	4.24	103.36	88.20	15.16	peak	No Limit
2	*	6345.000	87.55	4.24	91.79	68.20	23.59	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/12/14
Test Frequency	6505MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

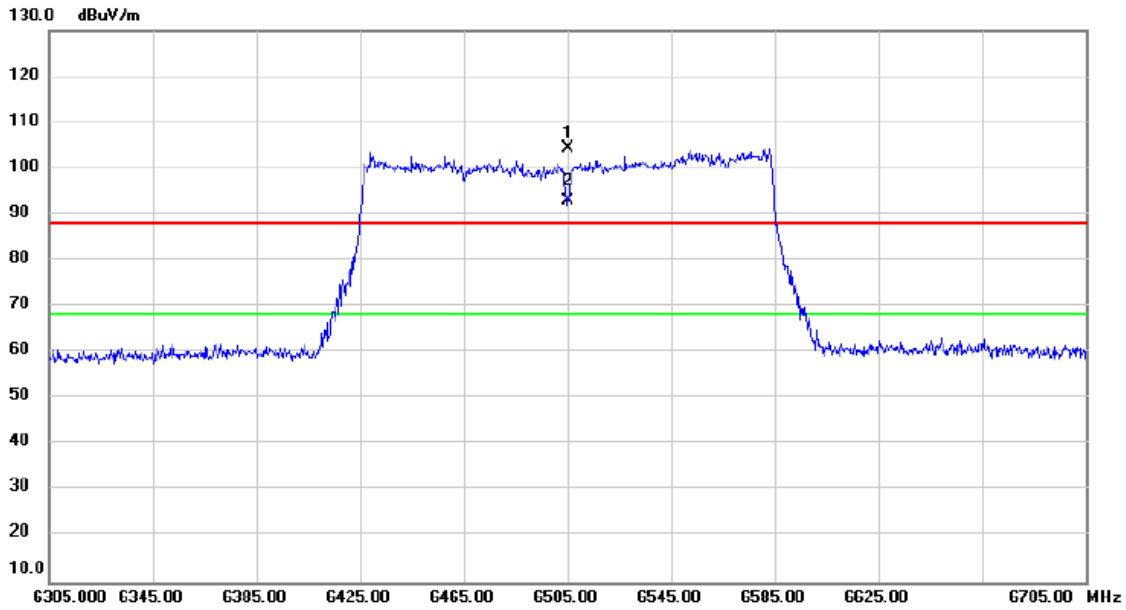


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6505.000	99.27	5.05	104.32	88.20	16.12	peak	No Limit
2	*	6505.000	87.96	5.05	93.01	68.20	24.81	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/12/14
Test Frequency	6665MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

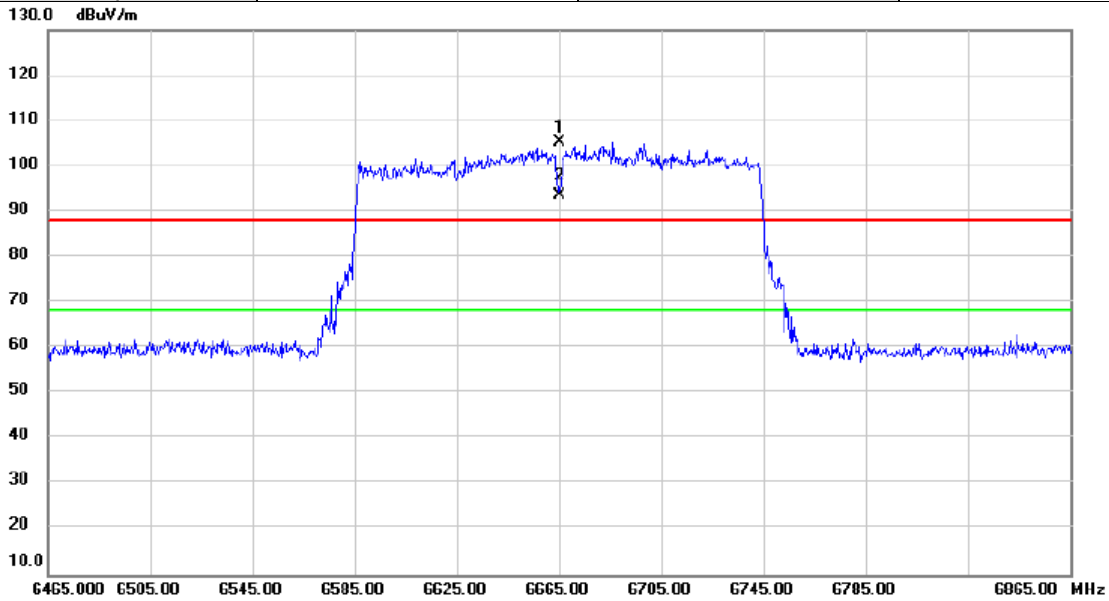


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6665.000	99.92	5.34	105.26	88.20	17.06	peak	No Limit
2	*	6665.000	88.30	5.34	93.64	68.20	25.44	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/12/14
Test Frequency	6985MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

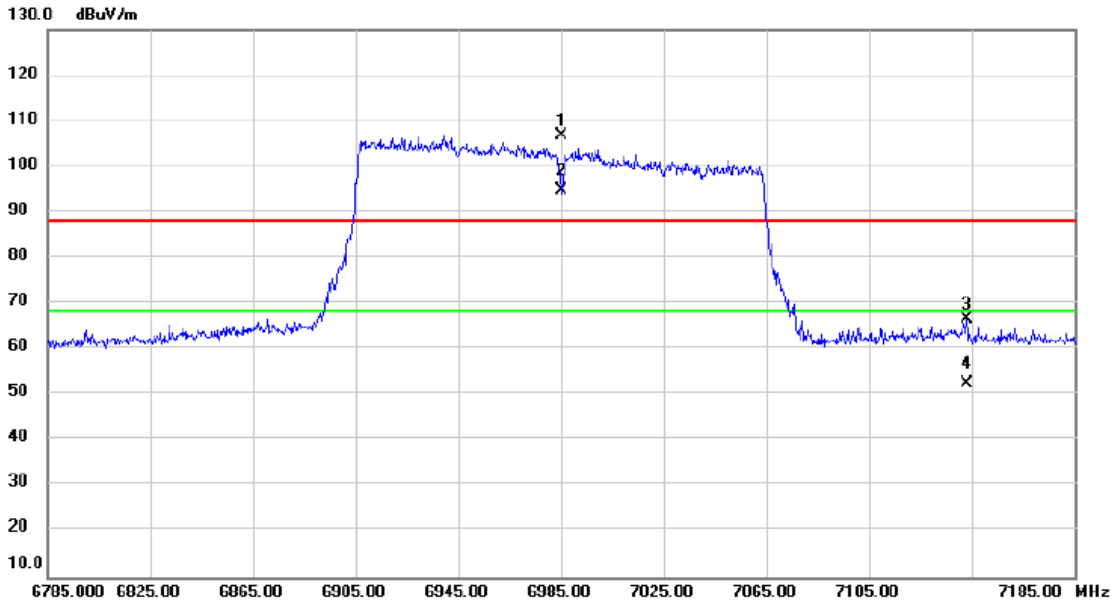


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	6985.000	100.76	5.92	106.68	88.20	18.48	peak	No Limit
2	*	6985.000	88.73	5.92	94.65	68.20	26.45	AVG	No Limit
3		7142.960	60.66	5.93	66.59	88.20	-21.61	peak	
4		7142.960	46.53	5.93	52.46	68.20	-15.74	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/14
Test Frequency	5955MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

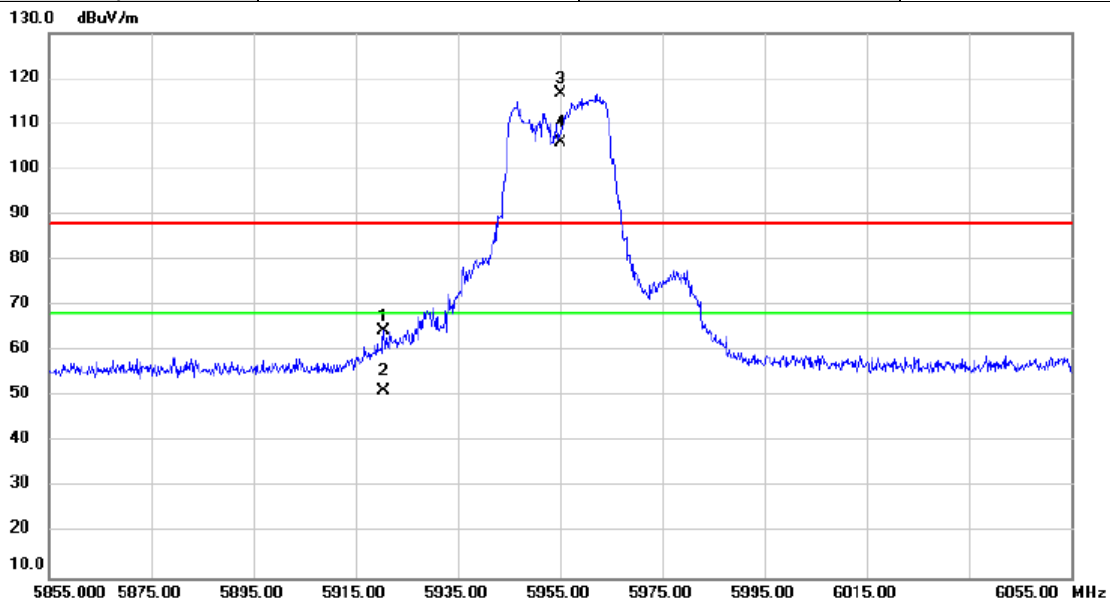


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5920.553	62.09	2.27	64.36	88.20	-23.84	peak	
2		5920.553	48.86	2.27	51.13	68.20	-17.07	AVG	
3	X	5955.000	114.18	2.35	116.53	88.20	28.33	peak	No Limit
4	*	5955.000	103.55	2.35	105.90	68.20	37.70	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/14
Test Frequency	6415MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

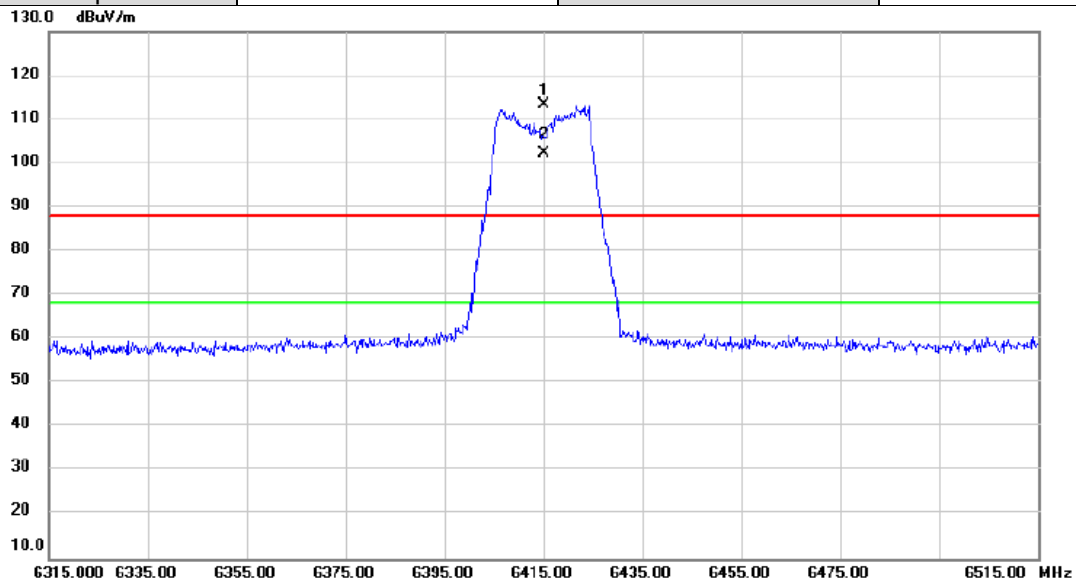


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6415.000	108.65	4.60	113.25	88.20	25.05	peak	No Limit
2	*	6415.000	97.69	4.60	102.29	68.20	34.09	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/14
Test Frequency	6435MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

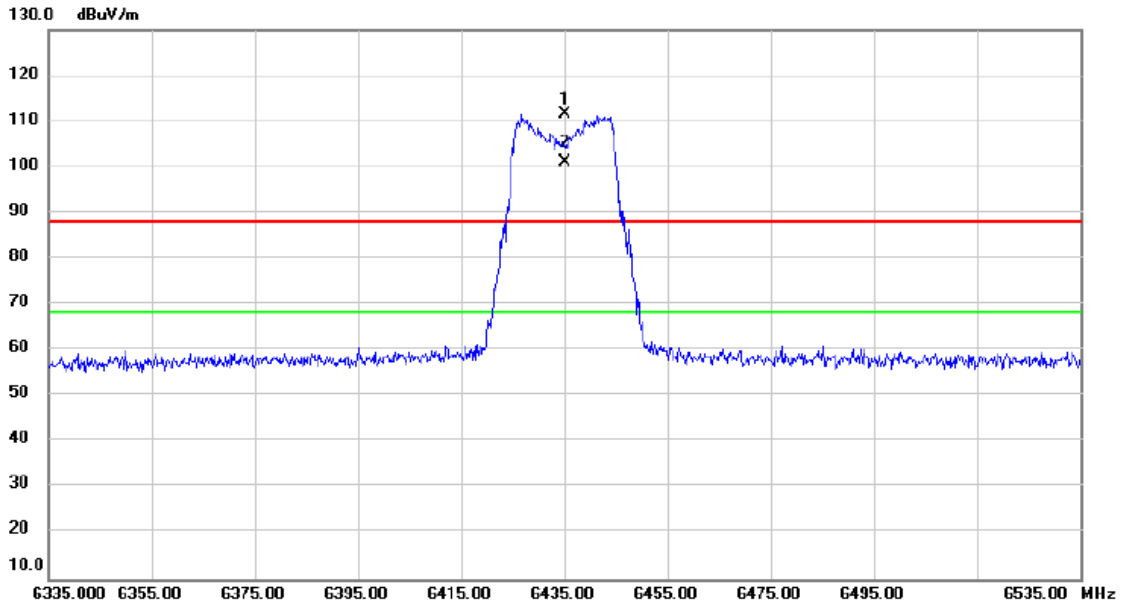


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6435.000	106.75	4.70	111.45	88.20	23.25	peak	No Limit
2	*	6435.000	96.33	4.70	101.03	68.20	32.83	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/14
Test Frequency	6515MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

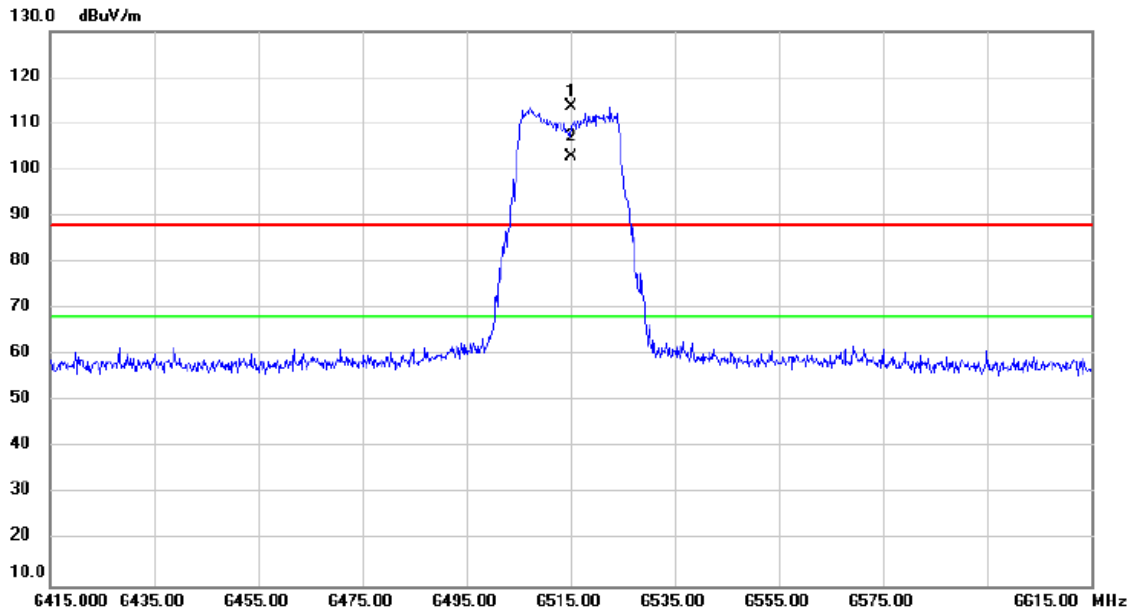


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6515.000	108.68	5.07	113.75	88.20	25.55	peak	No Limit
2	*	6515.000	97.74	5.07	102.81	68.20	34.61	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/14
Test Frequency	6535MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

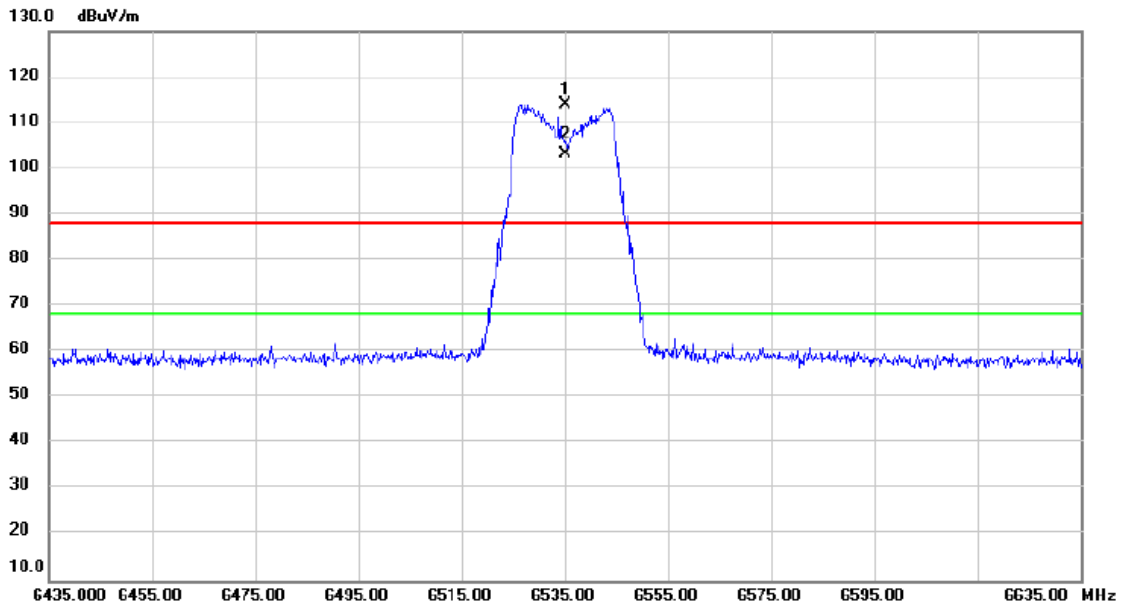


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6535.000	108.96	5.10	114.06	88.20	25.86	peak	No Limit
2	*	6535.000	98.07	5.10	103.17	68.20	34.97	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/14
Test Frequency	6855MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

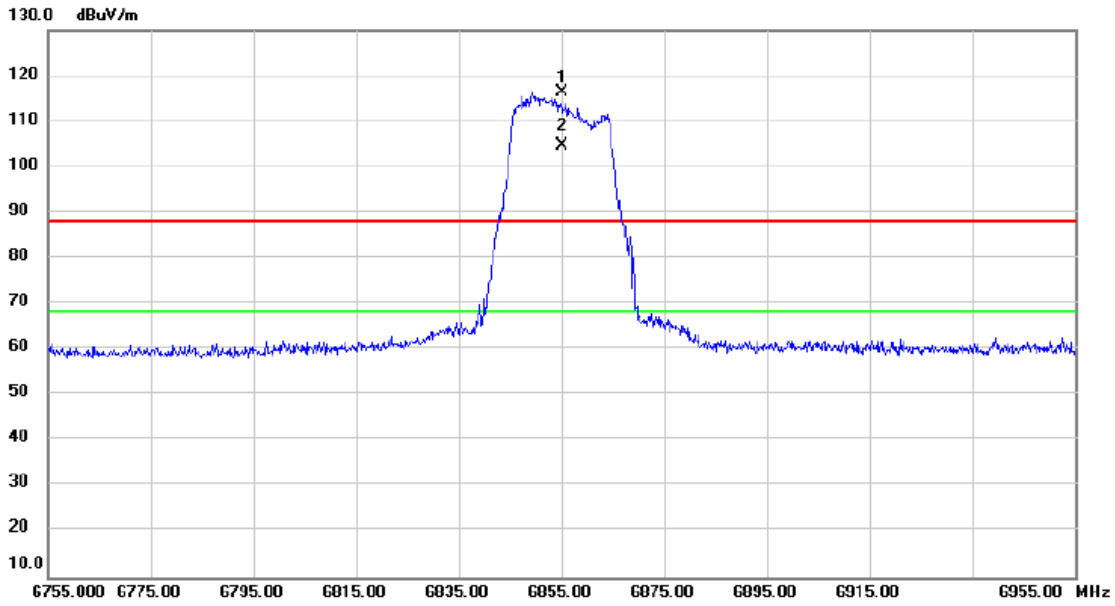


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6855.000	110.58	5.68	116.26	88.20	28.06	peak	No Limit
2	*	6855.000	99.12	5.68	104.80	68.20	36.60	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/14
Test Frequency	6875MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

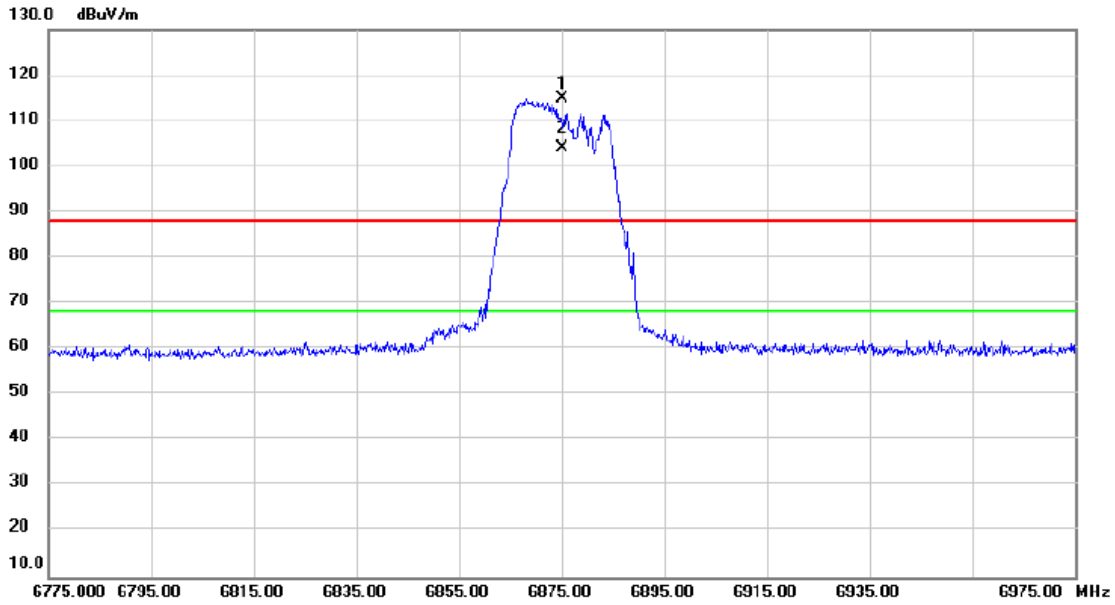


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	6875.000	109.27	5.72	114.99	88.20	26.79	peak	No Limit
2	*	6875.000	98.40	5.72	104.12	68.20	35.92	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/1/9
Test Frequency	7115MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

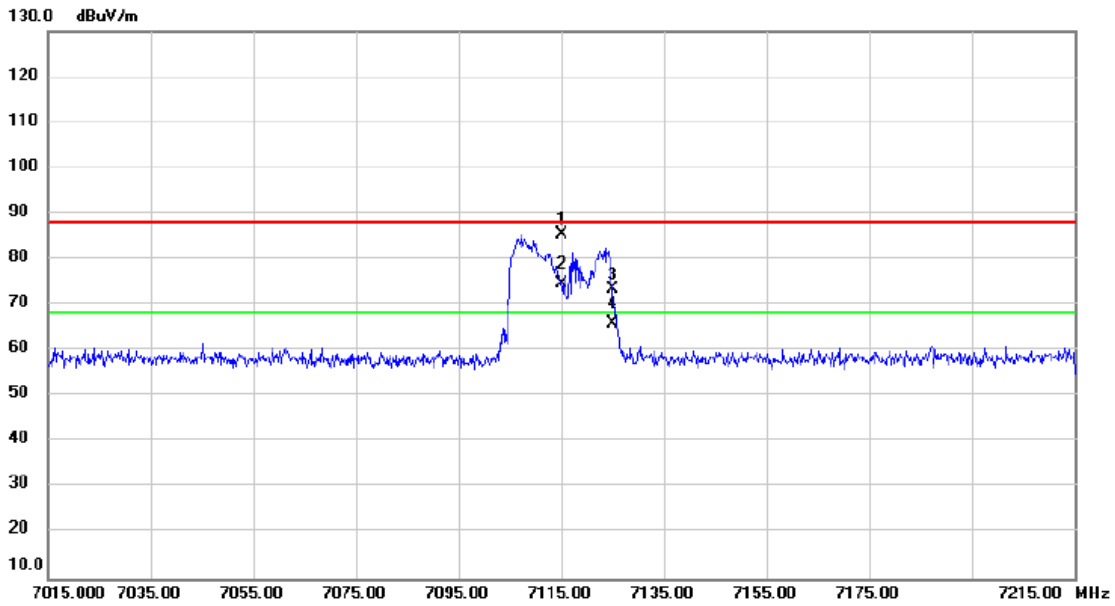


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		7115.000	79.47	5.93	85.40	88.20	-2.80	peak	No Limit
2	*	7115.000	68.69	5.93	74.62	68.20	6.42	AVG	No Limit
3		7125.000	67.61	5.93	73.54	88.20	-14.66	peak	
4		7125.000	60.12	5.93	66.05	68.20	-2.15	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/14
Test Frequency	5965MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

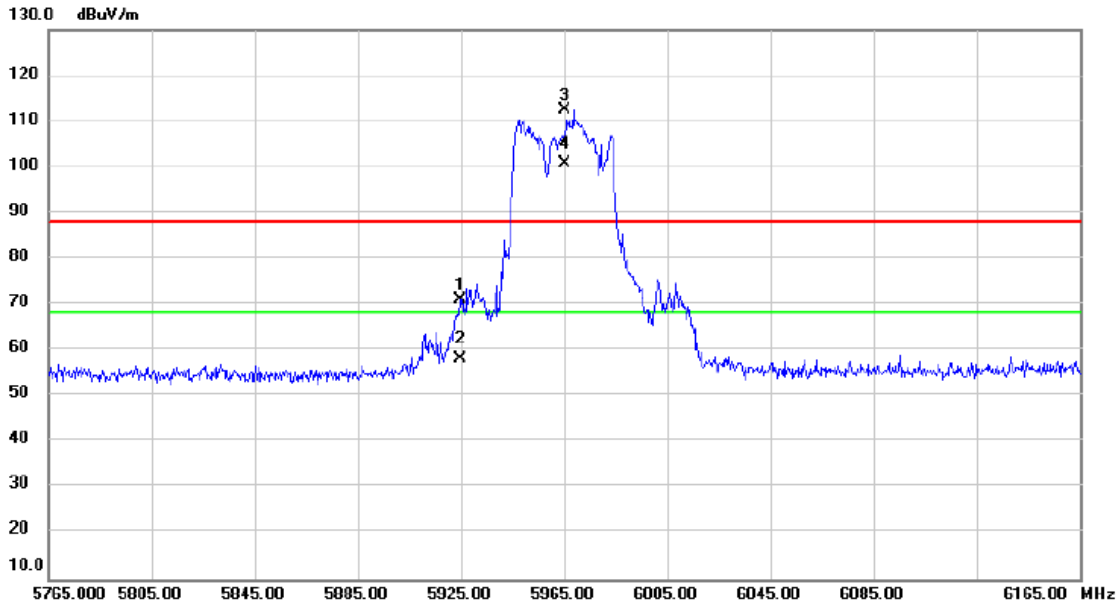


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5924.933	68.71	2.27	70.98	88.20	-17.22	peak	
2		5924.933	55.79	2.27	58.06	68.20	-10.14	AVG	
3	X	5965.000	110.13	2.38	112.51	88.20	24.31	peak	No Limit
4	*	5965.000	98.47	2.38	100.85	68.20	32.65	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/14
Test Frequency	6405MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

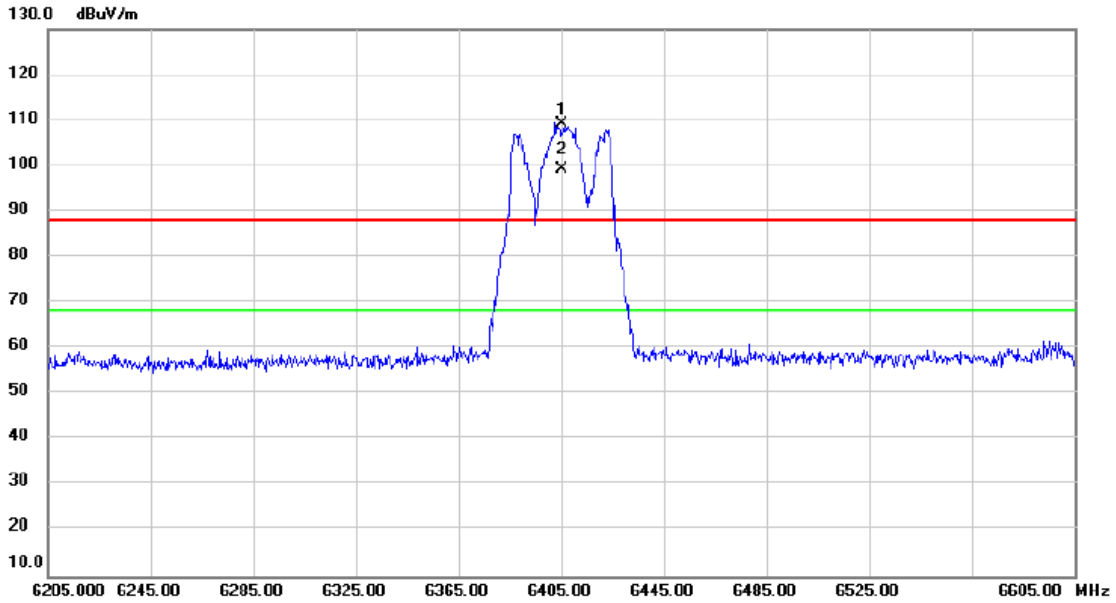


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	6405.000	104.75	4.55	109.30	88.20	21.10	peak	No Limit
2	*	6405.000	94.71	4.55	99.26	68.20	31.06	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/14
Test Frequency	6445MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

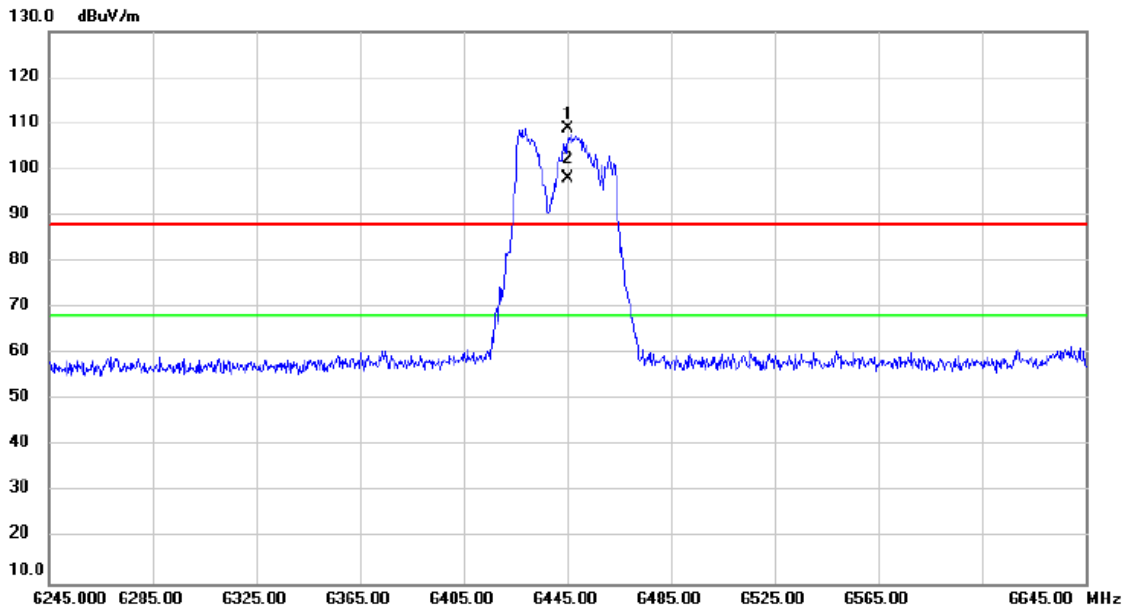


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	6445.000	104.18	4.76	108.94	88.20	20.74	peak	No Limit
2	*	6445.000	93.34	4.76	98.10	68.20	29.90	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/14
Test Frequency	6485MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

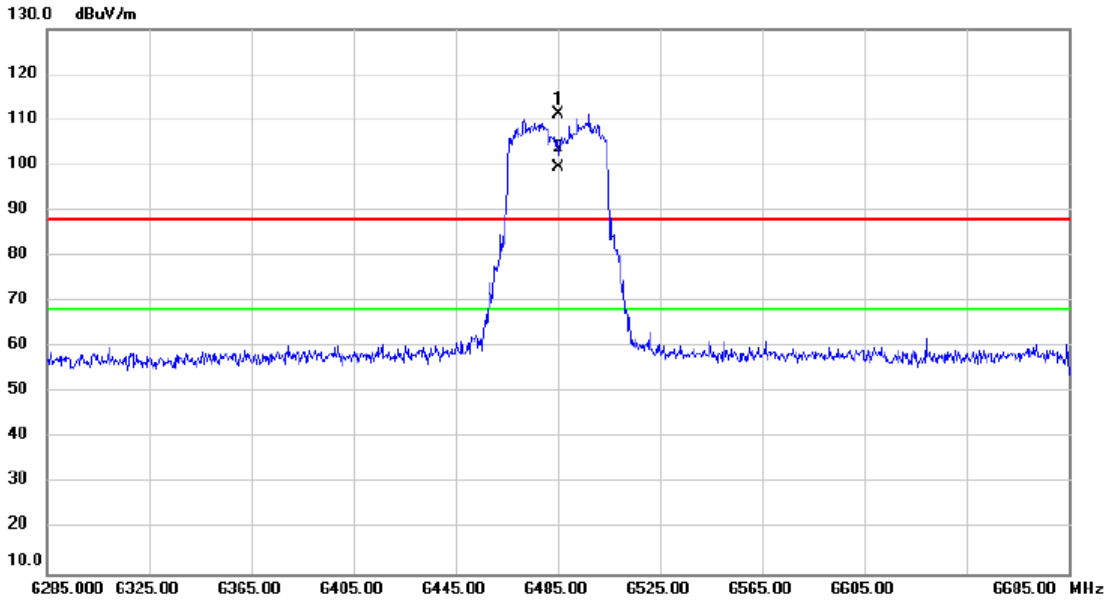


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	6485.000	106.17	4.96	111.13	88.20	22.93	peak	No Limit
2	*	6485.000	94.53	4.96	99.49	68.20	31.29	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/14
Test Frequency	6525MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

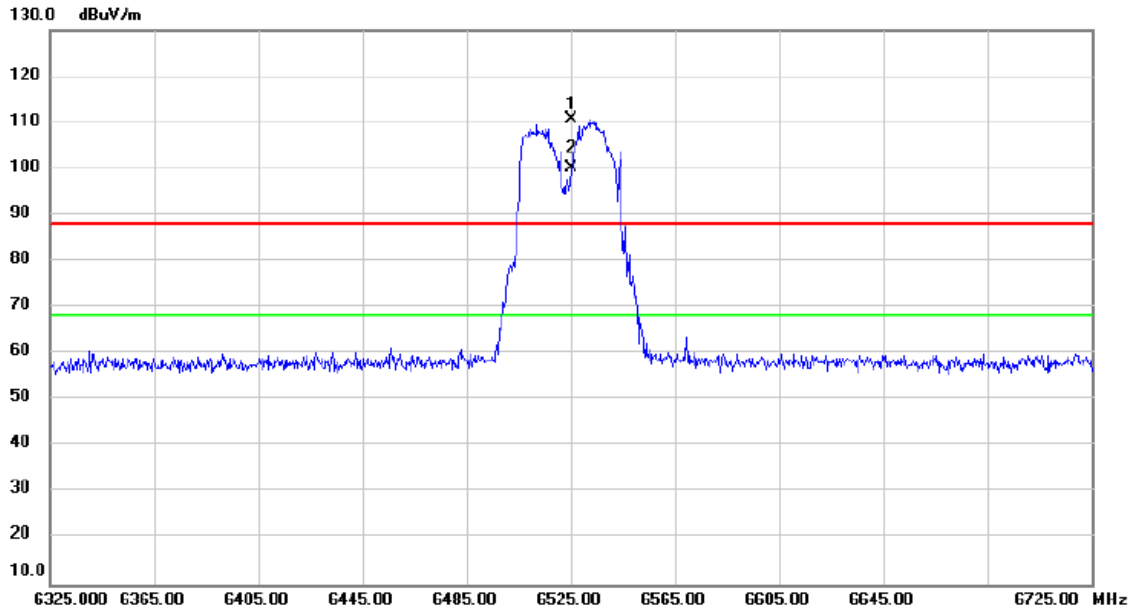


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6525.000	105.58	5.09	110.67	88.20	22.47	peak	No Limit
2	*	6525.000	95.12	5.09	100.21	68.20	32.01	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/14
Test Frequency	6845MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

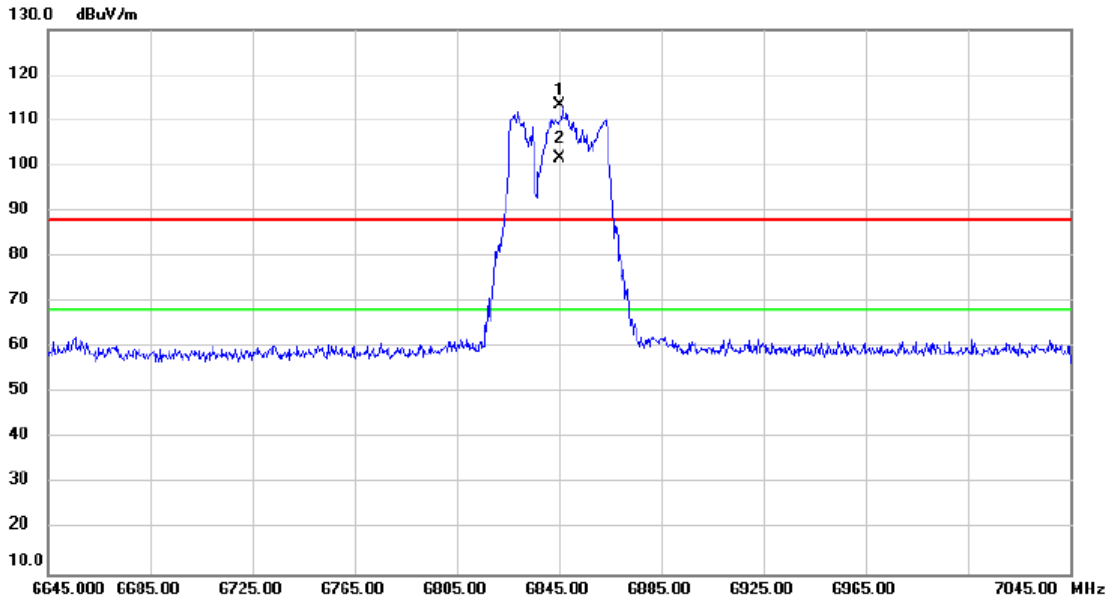


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	6845.000	107.55	5.67	113.22	88.20	25.02	peak	No Limit
2	*	6845.000	96.03	5.67	101.70	68.20	33.50	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/14
Test Frequency	6885MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

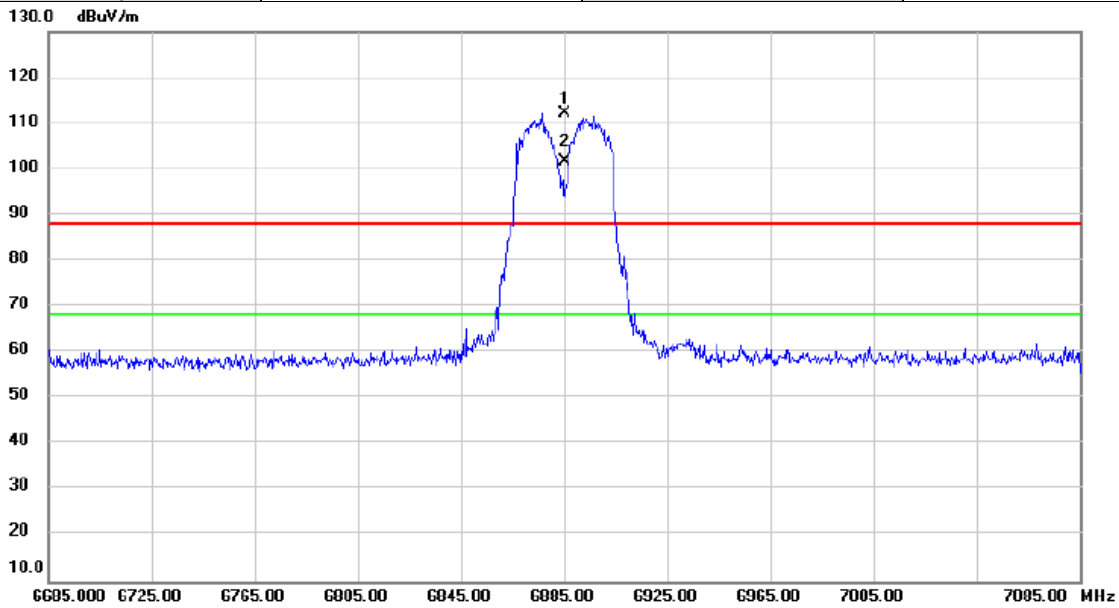


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6885.000	106.50	5.73	112.23	88.20	24.03	peak	No Limit
2	*	6885.000	95.90	5.73	101.63	68.20	33.43	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/14
Test Frequency	7085MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

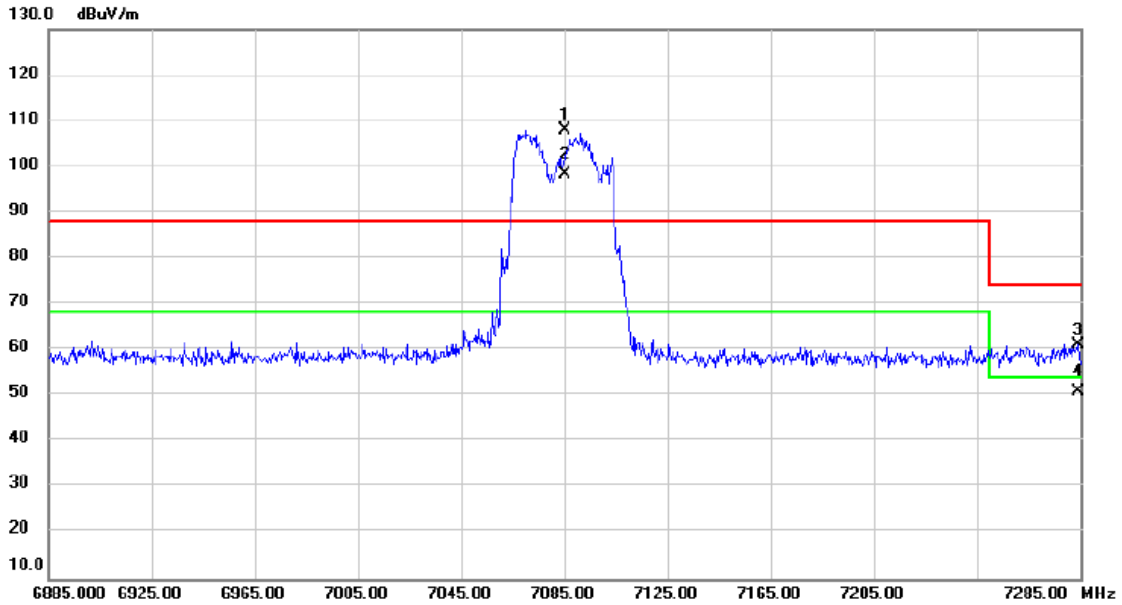


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	7085.000	101.88	5.94	107.82	88.20	19.62	peak	No Limit
2	*	7085.000	92.51	5.94	98.45	68.20	30.25	AVG	No Limit
3		7284.067	55.36	5.91	61.27	74.00	-12.73	peak	
4		7284.067	44.93	5.91	50.84	54.00	-3.16	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2023/12/14
Test Frequency	5985MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

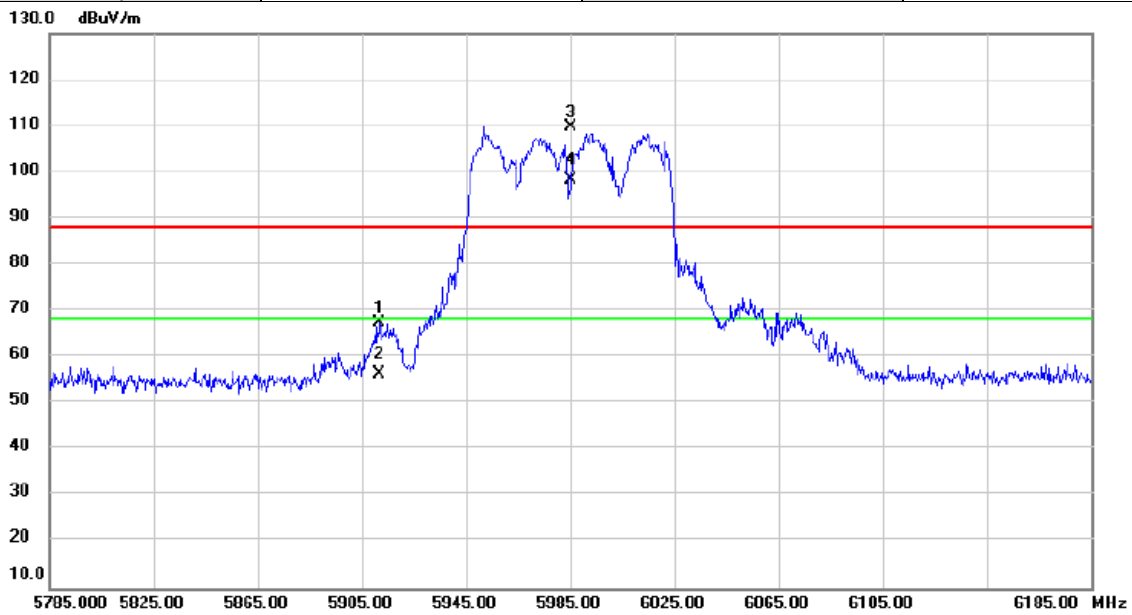


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5911.840	65.16	2.24	67.40	88.20	-20.80	peak	
2		5911.840	54.07	2.24	56.31	68.20	-11.89	AVG	
3	X	5985.000	107.20	2.42	109.62	88.20	21.42	peak	No Limit
4	*	5985.000	96.08	2.42	98.50	68.20	30.30	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2023/12/14
Test Frequency	6385MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

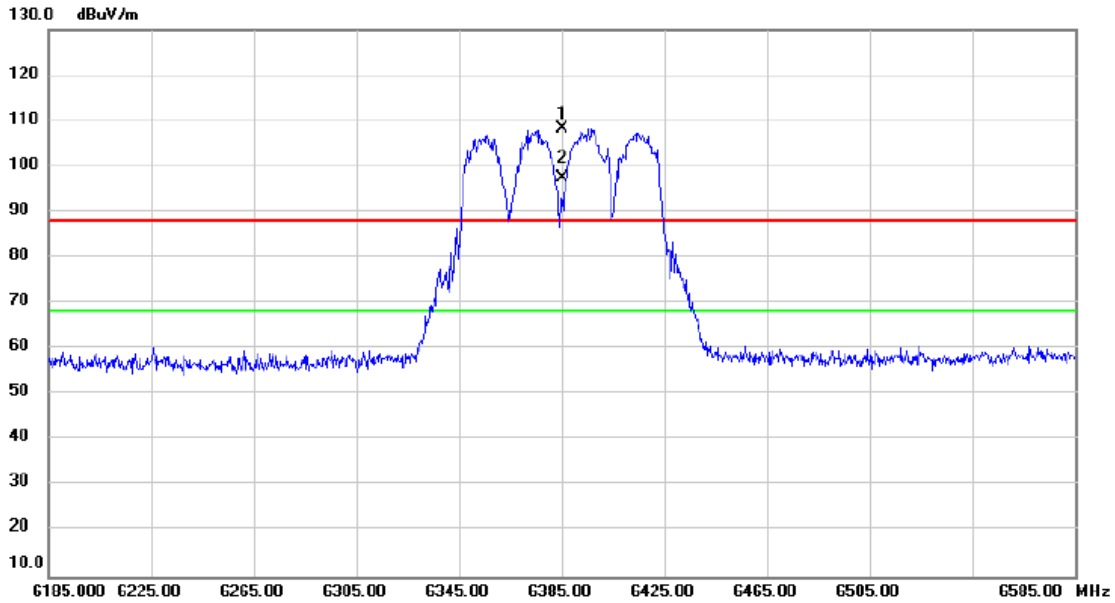


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	6385.000	103.93	4.45	108.38	88.20	20.18	peak	No Limit
2	*	6385.000	93.08	4.45	97.53	68.20	29.33	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2023/12/14
Test Frequency	6465MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

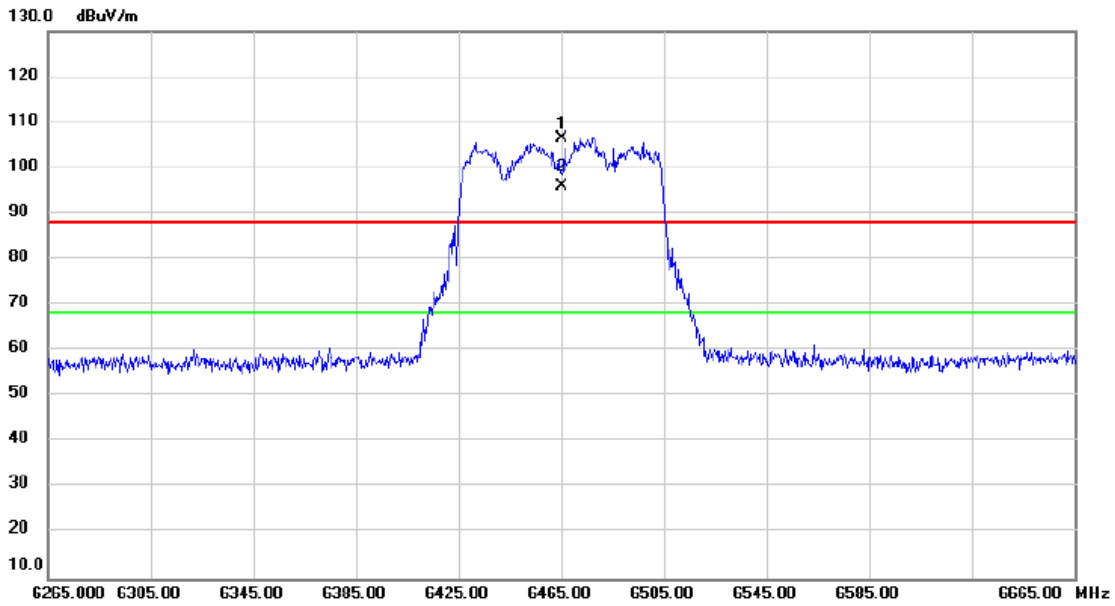


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6465.000	101.65	4.86	106.51	88.20	18.31	peak	No Limit
2	*	6465.000	91.20	4.86	96.06	68.20	27.86	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11be (EHT80)	Test Date	2023/12/14
Test Frequency	6545MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

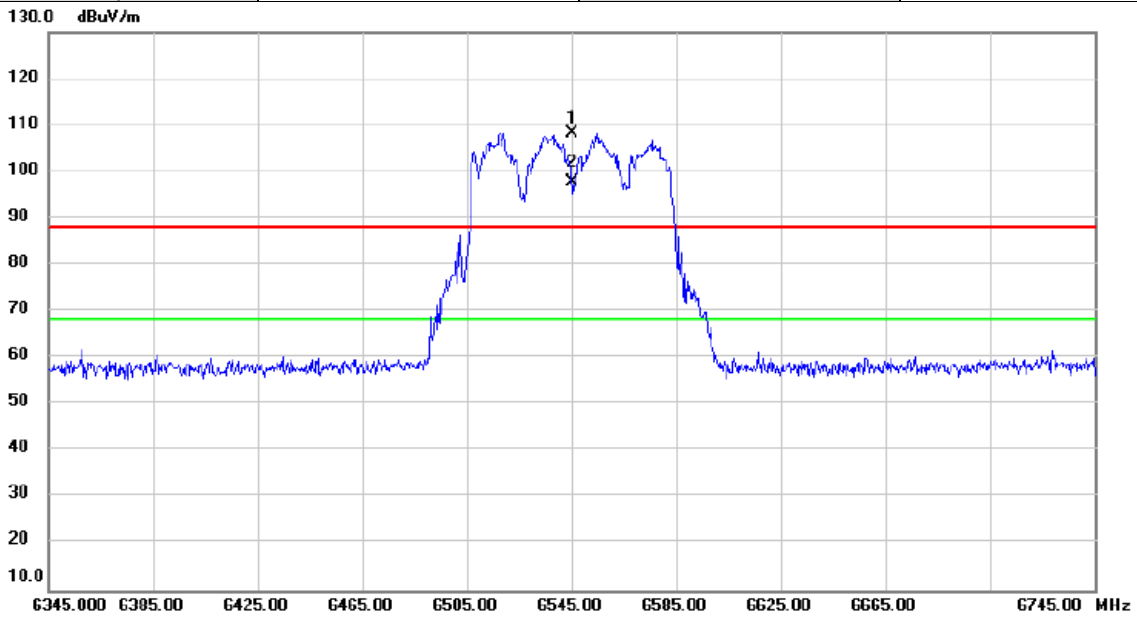


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6545.000	103.22	5.12	108.34	88.20	20.14	peak	No Limit
2	*	6545.000	92.61	5.12	97.73	68.20	29.53	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2023/12/14
Test Frequency	6625MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

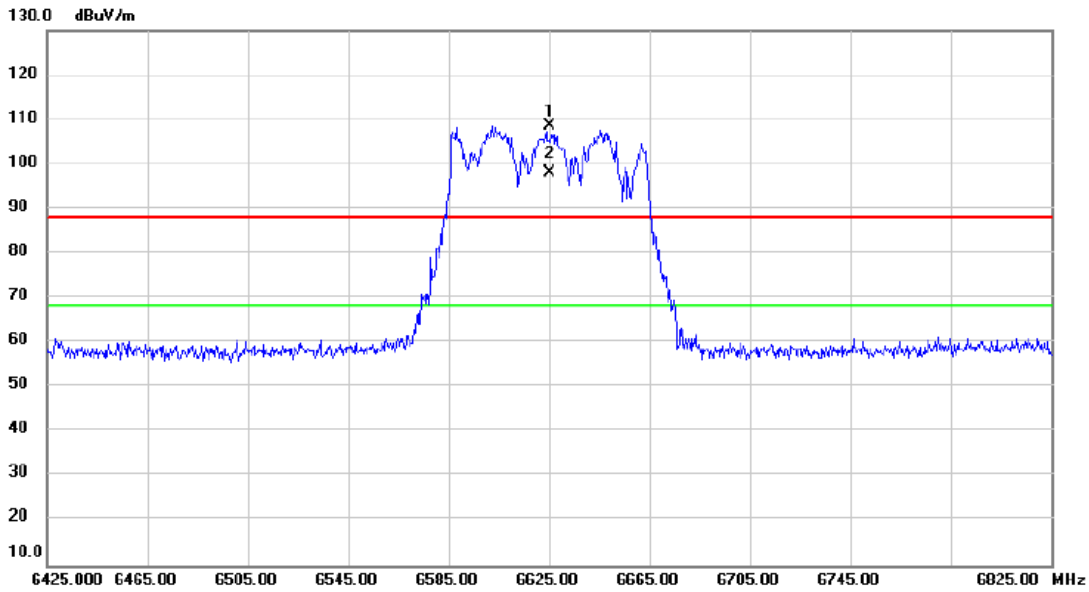


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	6625.000	103.14	5.27	108.41	88.20	20.21	peak	No Limit
2	*	6625.000	92.93	5.27	98.20	68.20	30.00	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2023/12/14
Test Frequency	6785MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

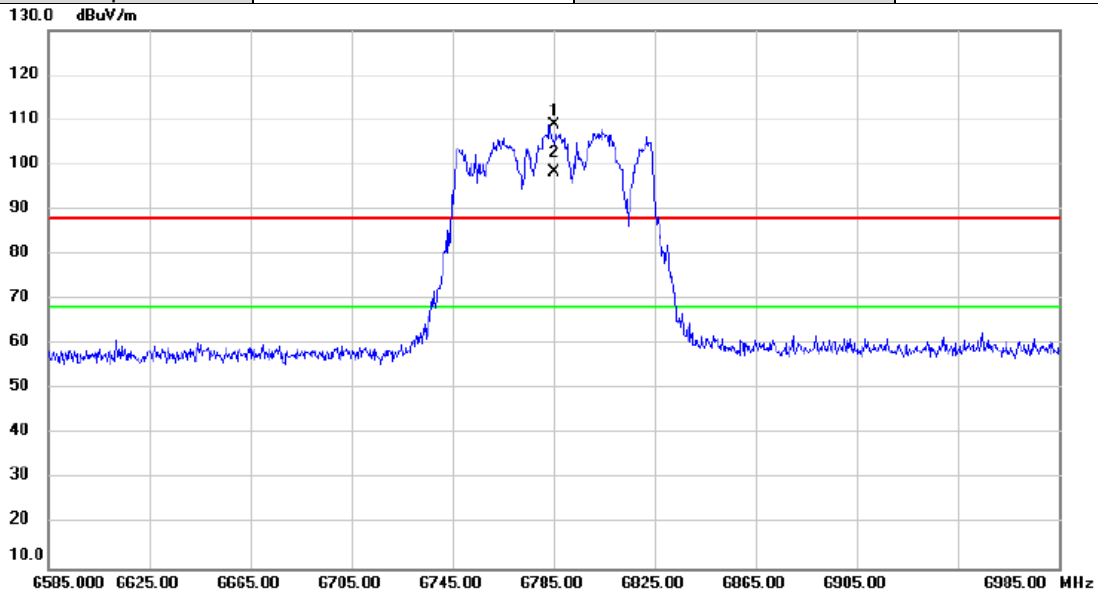


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	6785.000	103.16	5.55	108.71	88.20	20.51	peak	No Limit
2	*	6785.000	92.75	5.55	98.30	68.20	30.10	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2023/12/14
Test Frequency	6865MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

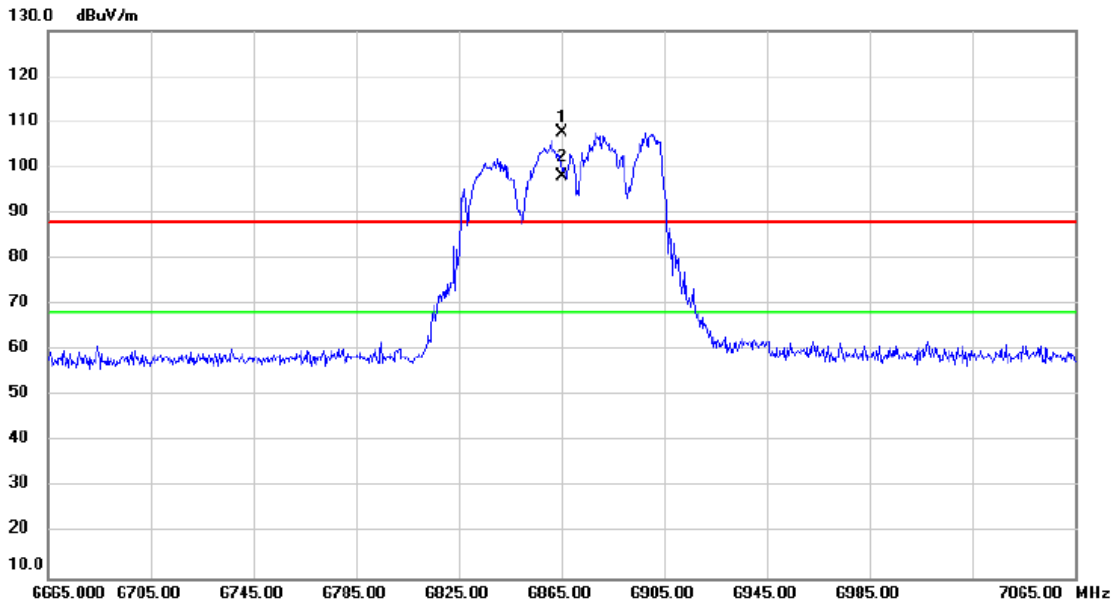


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6865.000	101.90	5.71	107.61	88.20	19.41	peak	No Limit
2	*	6865.000	92.49	5.71	98.20	68.20	30.00	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2023/12/14
Test Frequency	7025MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

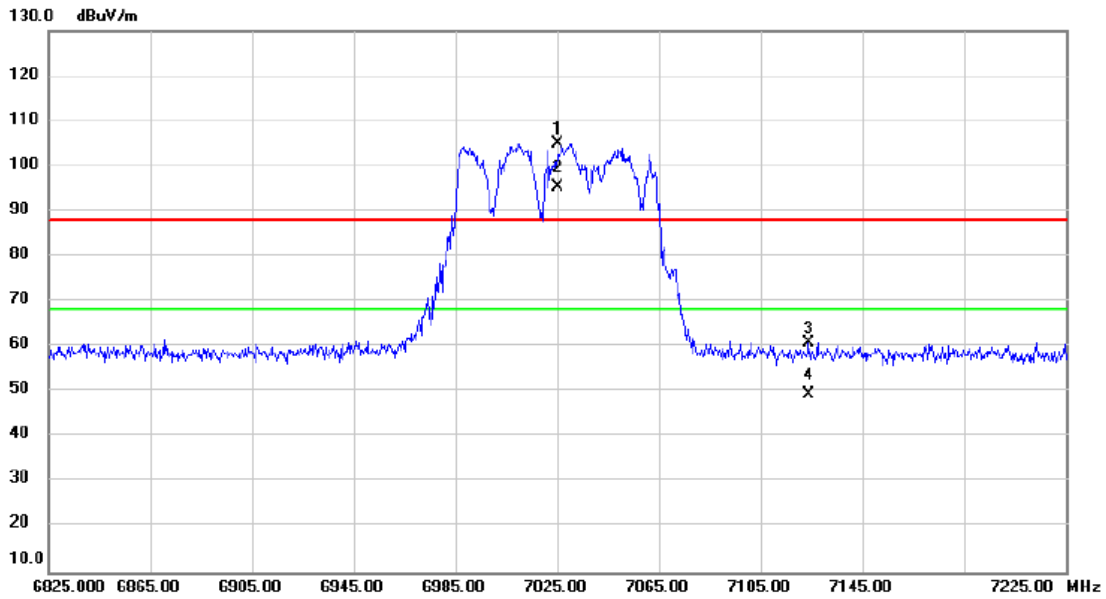


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	7025.000	99.09	5.94	105.03	88.20	16.83	peak	No Limit
2	*	7025.000	89.33	5.94	95.27	68.20	27.07	AVG	No Limit
3		7123.667	54.91	5.93	60.84	88.20	-27.36	peak	
4		7123.667	43.53	5.93	49.46	68.20	-18.74	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2023/12/14
Test Frequency	6025MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

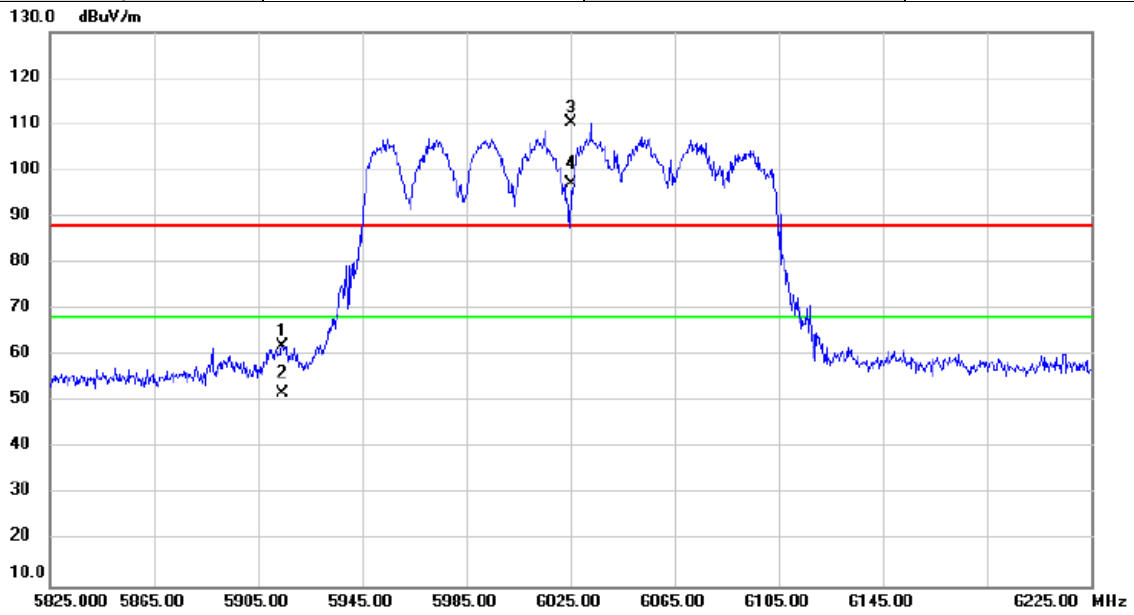


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5914.320	59.80	2.26	62.06	88.20	-26.14	peak	
2		5914.320	49.57	2.26	51.83	68.20	-16.37	AVG	
3	X	6025.000	107.84	2.58	110.42	88.20	22.22	peak	
4	*	6025.000	94.71	2.58	97.29	68.20	29.09	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2023/12/14
Test Frequency	6345MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

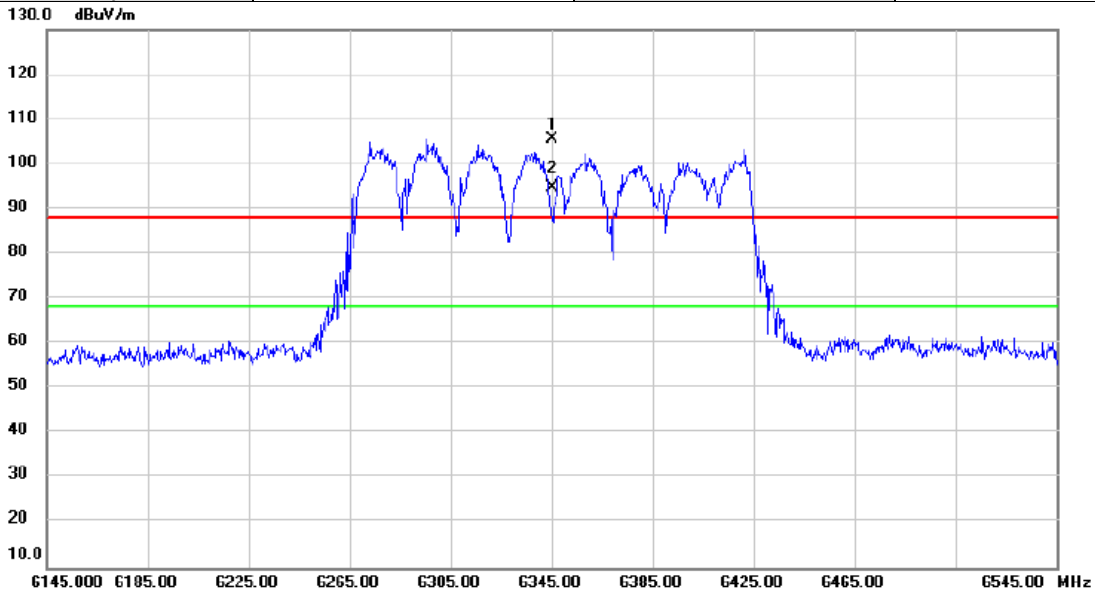


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6345.000	101.23	4.24	105.47	88.20	17.27	peak	No Limit
2	*	6345.000	90.38	4.24	94.62	68.20	26.42	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2023/12/14
Test Frequency	6505MHz	Polarization	Vertical
Temp	23°C	Hum.	57%

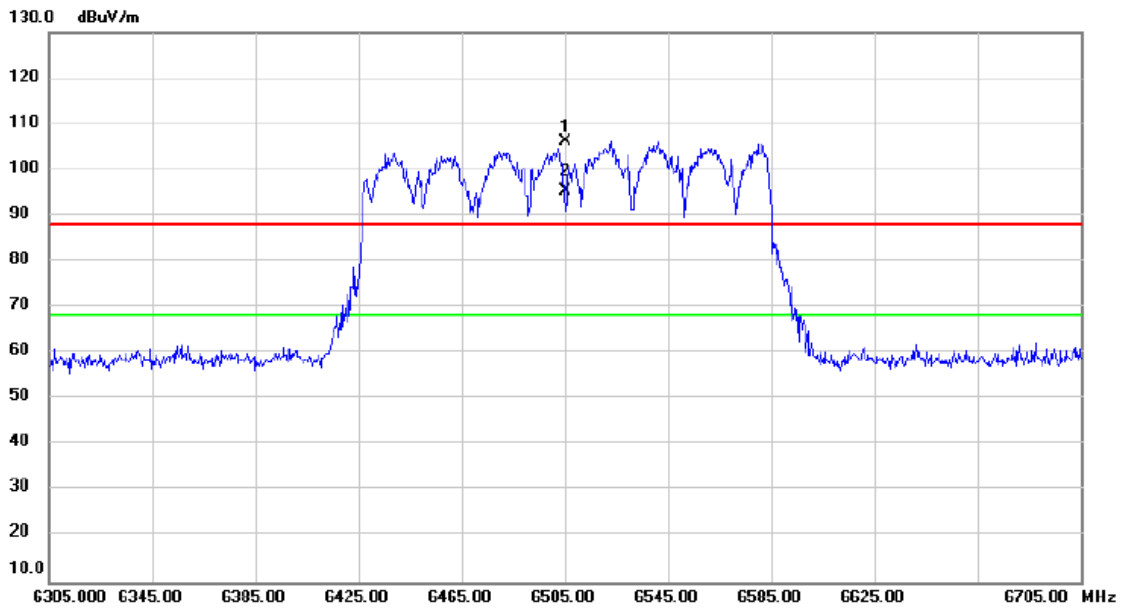

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	6505.000	101.16	5.05	106.21	88.20	18.01	peak	No Limit
2	*	6505.000	90.41	5.05	95.46	68.20	27.26	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.