


Test Mode	IEEE 802.11ac (VHT160)	Test Date	2023/12/13
Test Frequency	5570MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

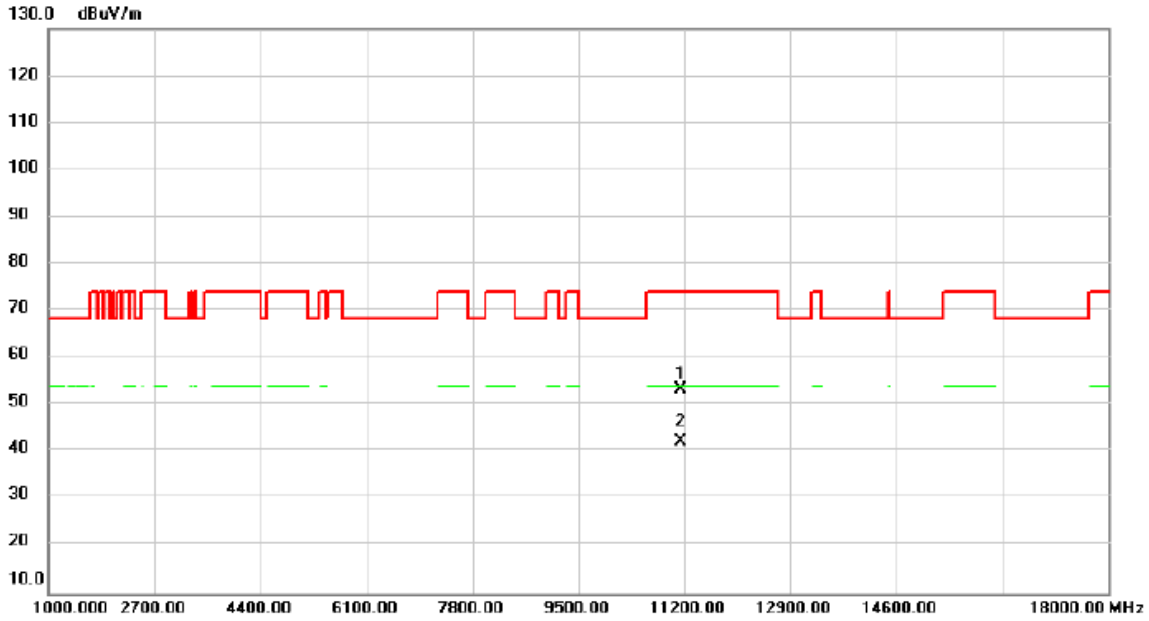


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11140.00	46.82	6.52	53.34	74.00	-20.66	peak	
2	*	11140.00	35.69	6.52	42.21	54.00	-11.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2023/12/13
Test Frequency	5570MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

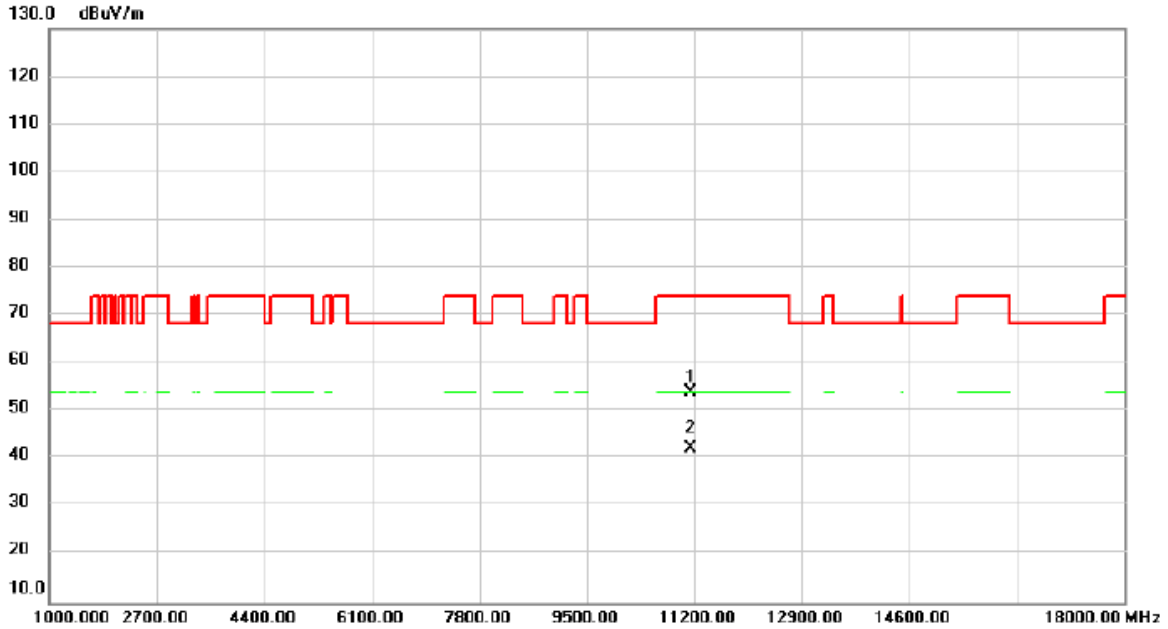


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11140.00	47.29	6.52	53.81	74.00	-20.19	peak	
2	*	11140.00	35.70	6.52	42.22	54.00	-11.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5180MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

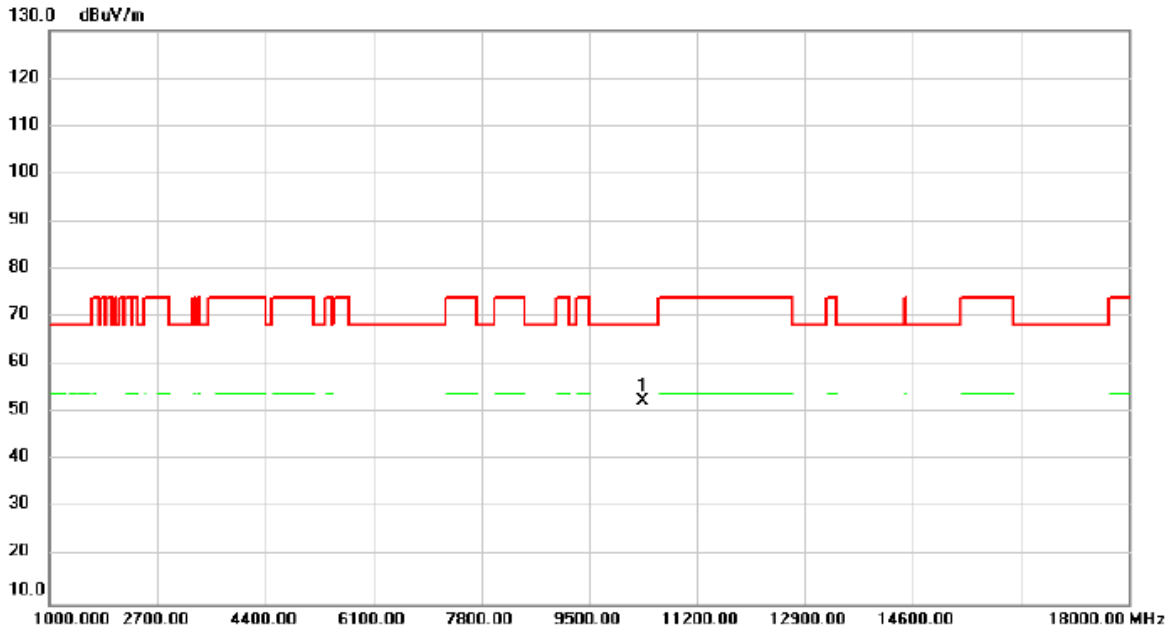


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10360.00	47.03	5.53	52.56	68.20	-15.64	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5180MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

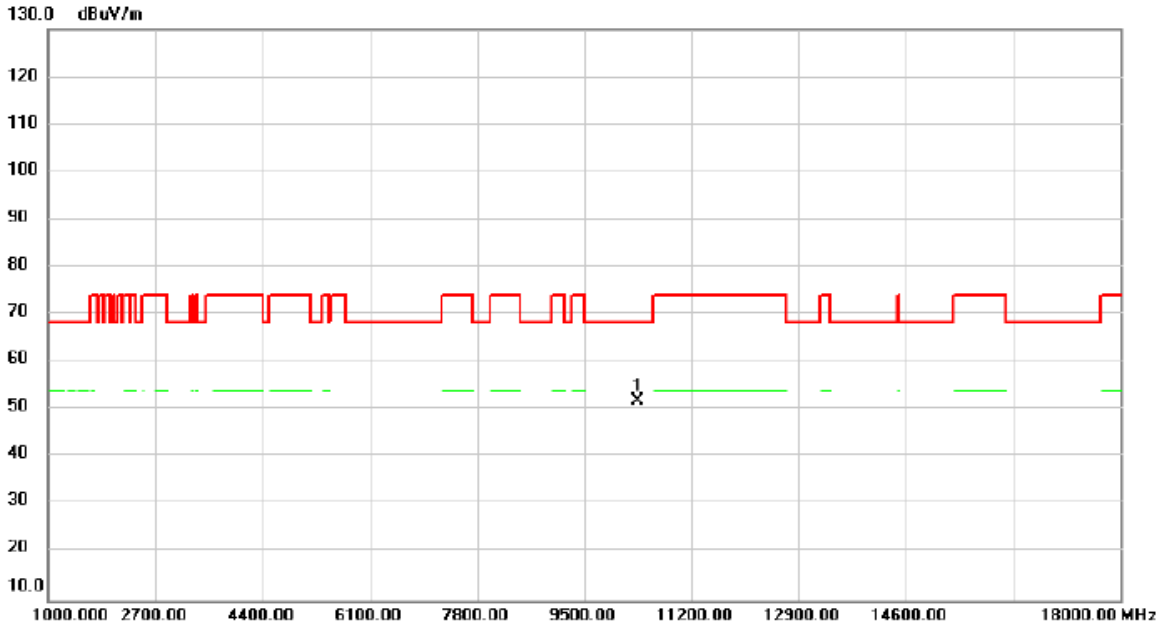


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	46.25	5.53	51.78	68.20	-16.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5200MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

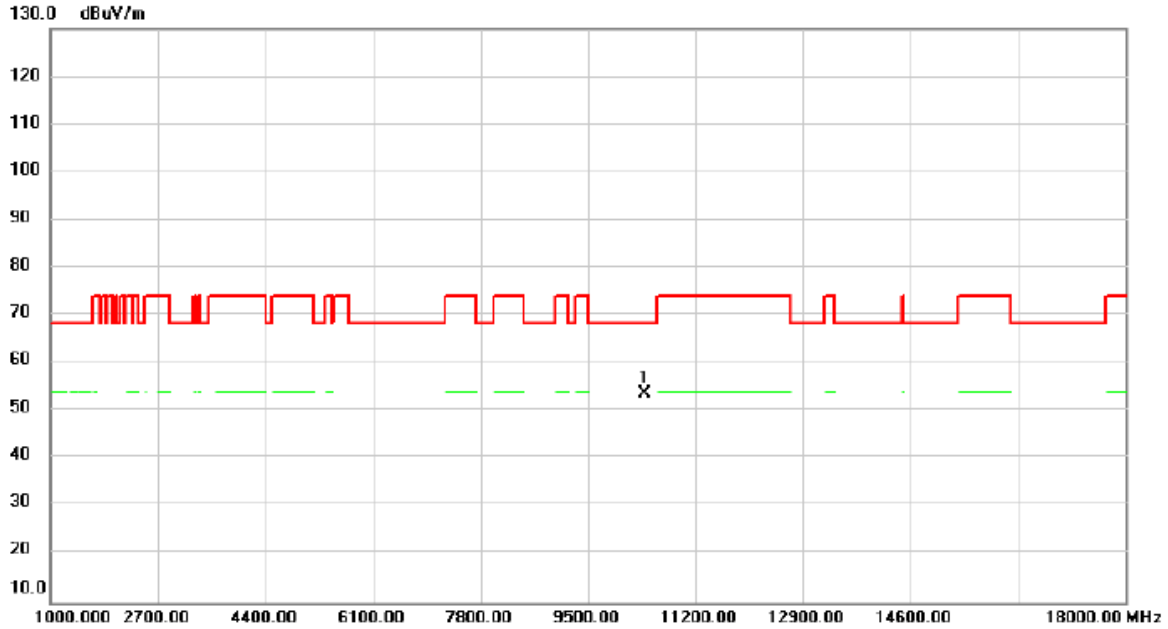


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	48.13	5.45	53.58	68.20	-14.62	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5200MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

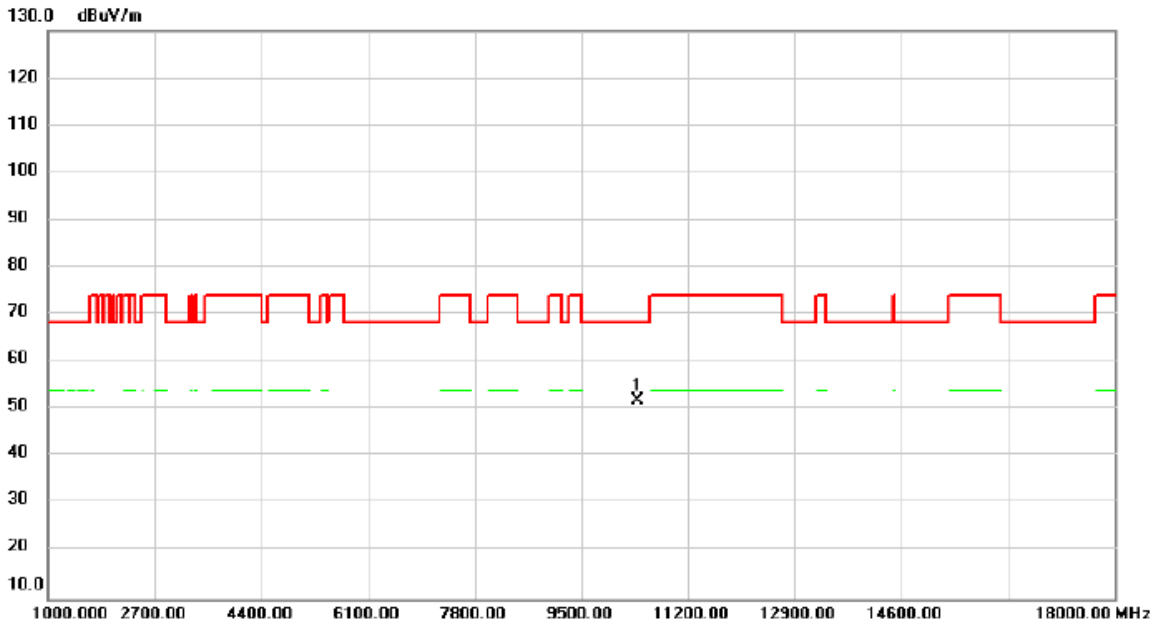


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	46.54	5.45	51.99	68.20	-16.21	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5240MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

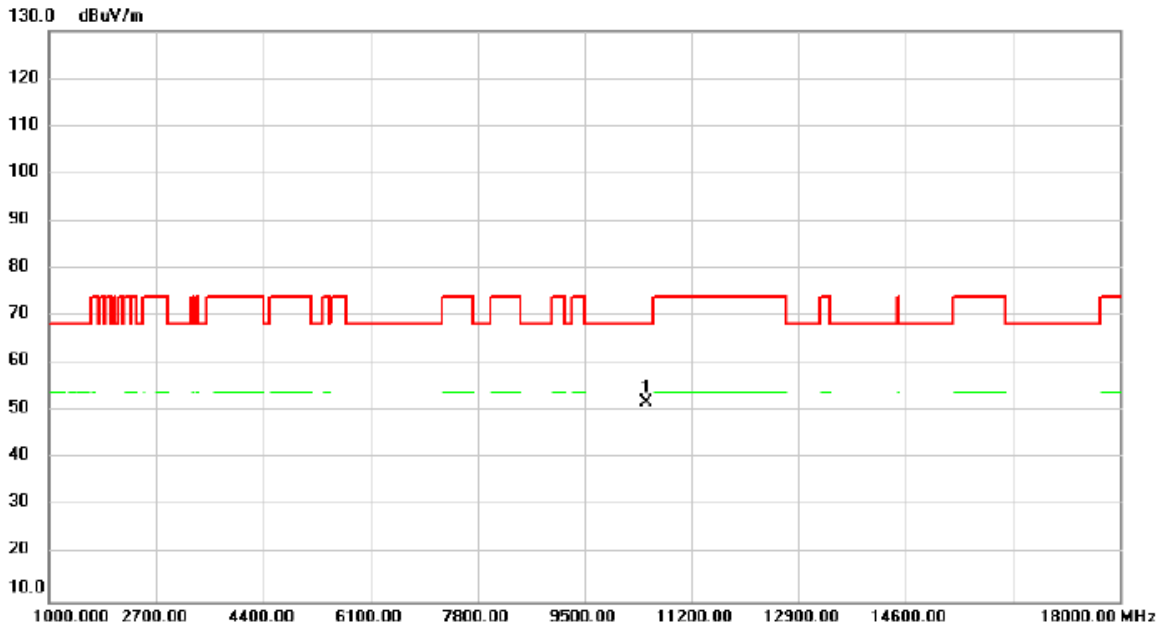


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	46.62	5.31	51.93	68.20	-16.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5240MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

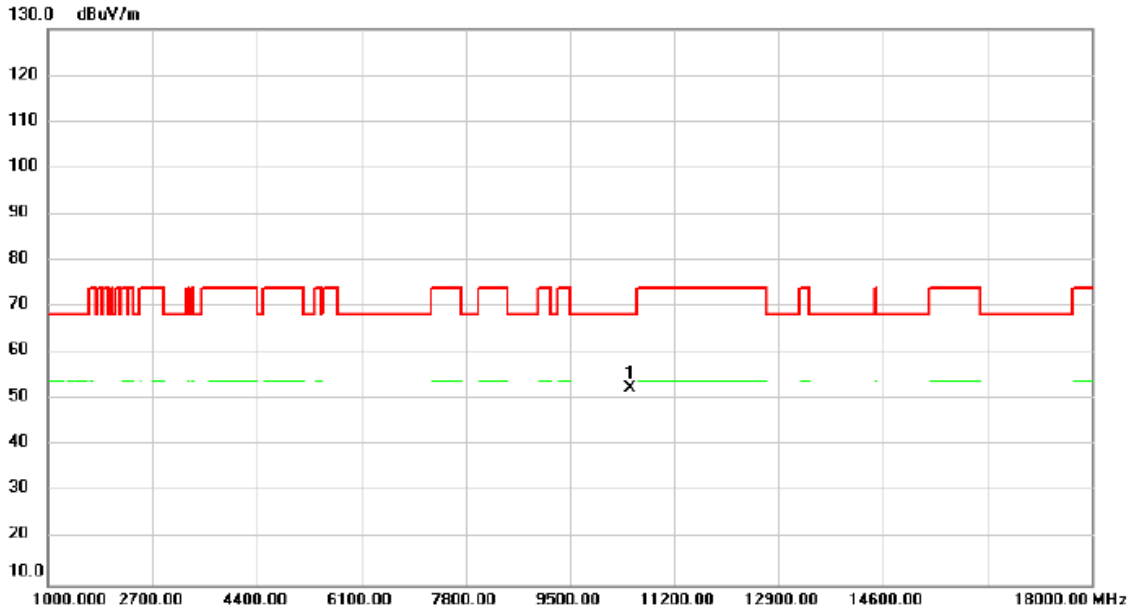


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	47.08	5.31	52.39	68.20	-15.81	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5260MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

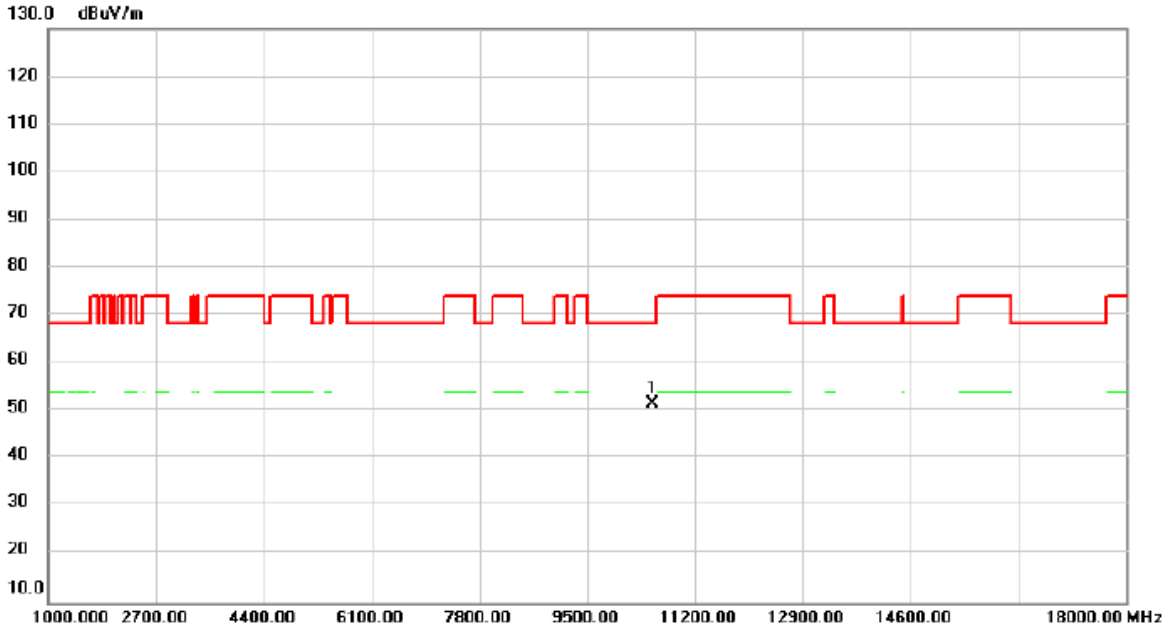


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	46.31	5.32	51.63	68.20	-16.57	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5260MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

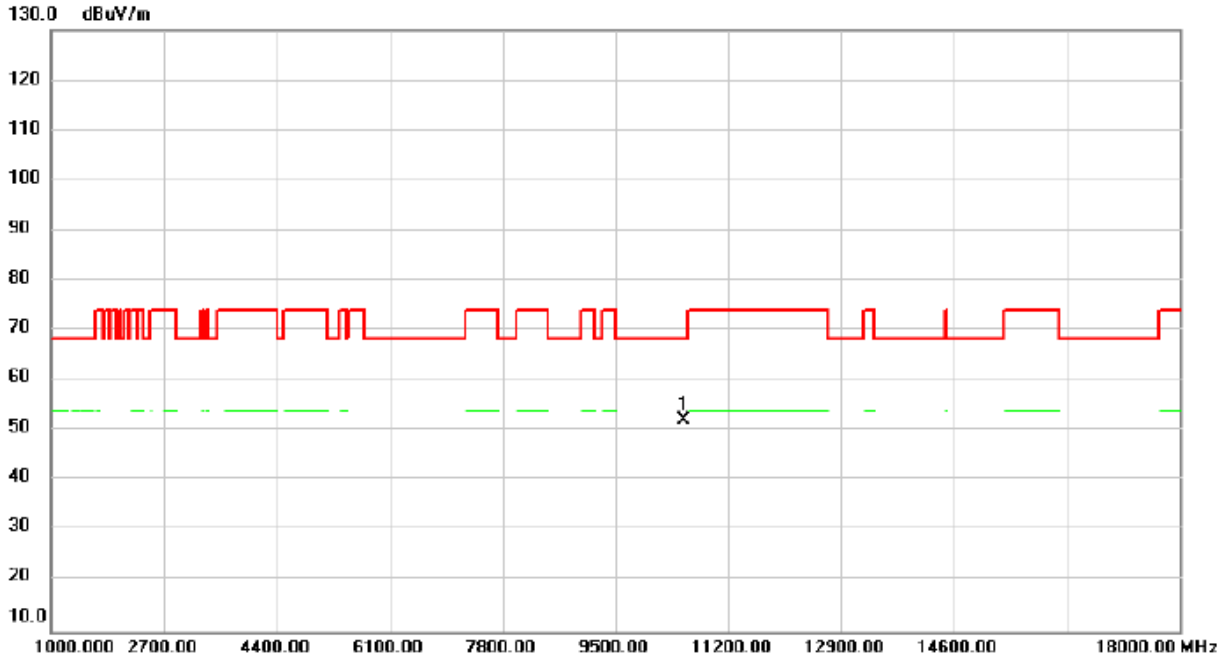


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	46.78	5.32	52.10	68.20	-16.10	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5300MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

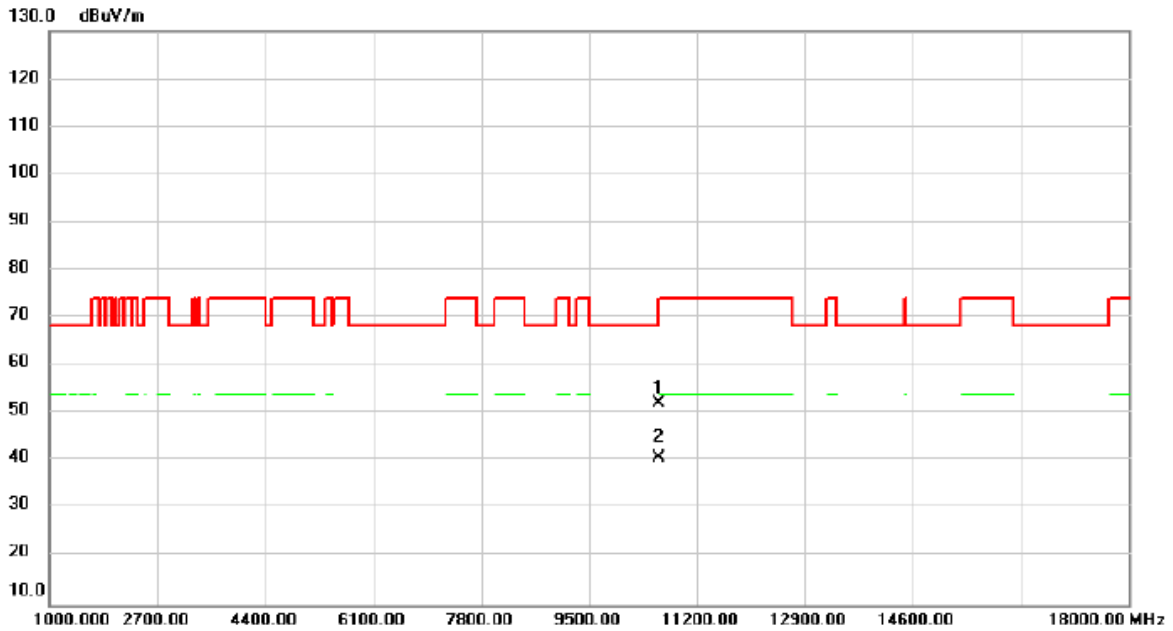


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.00	46.67	5.51	52.18	68.20	-16.02	peak	
2	*	10600.00	35.36	5.51	40.87	54.00	-13.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5300MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

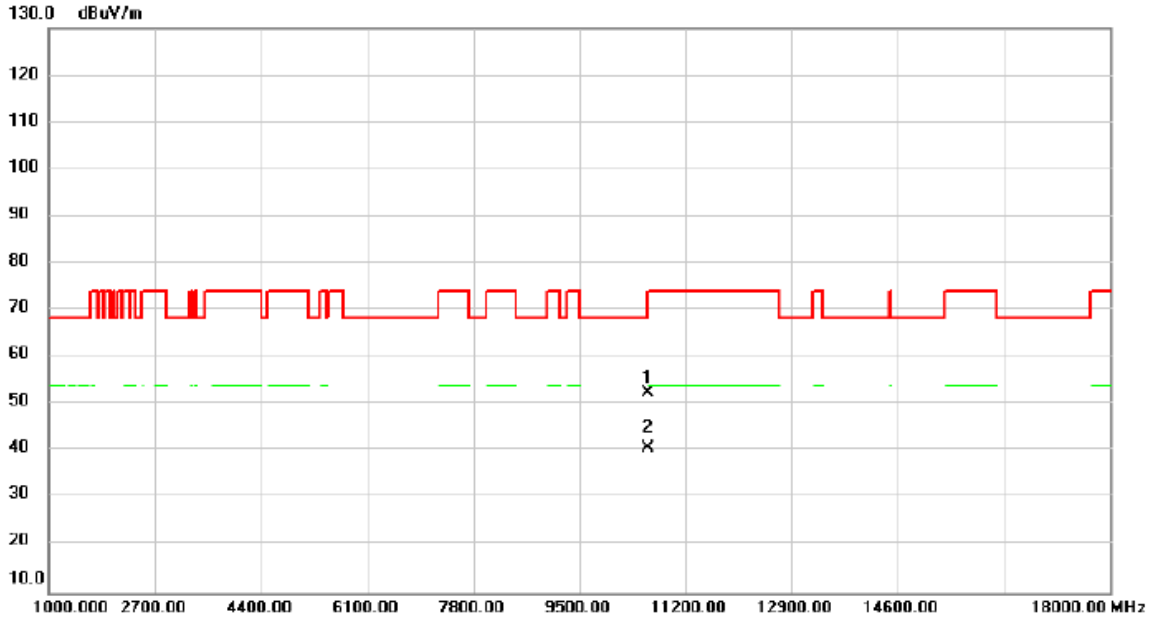


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.00	46.82	5.51	52.33	68.20	-15.87	peak	
2	*	10600.00	35.31	5.51	40.82	54.00	-13.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5320MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

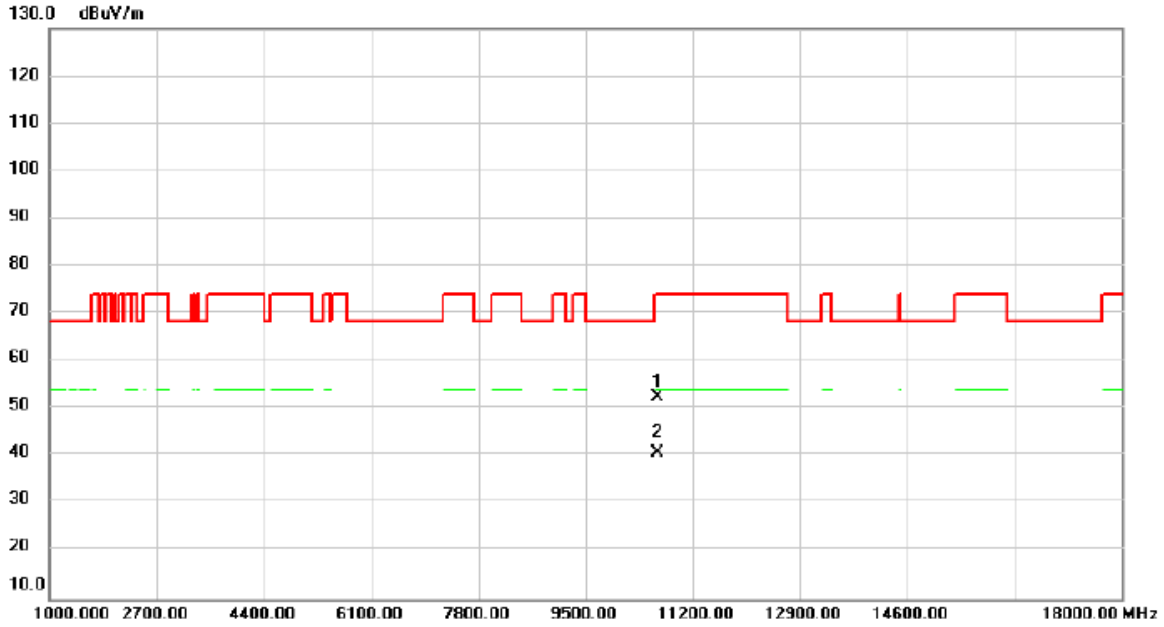


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	46.97	5.61	52.58	74.00	-21.42	peak	
2	*	10640.00	35.17	5.61	40.78	54.00	-13.22	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5320MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

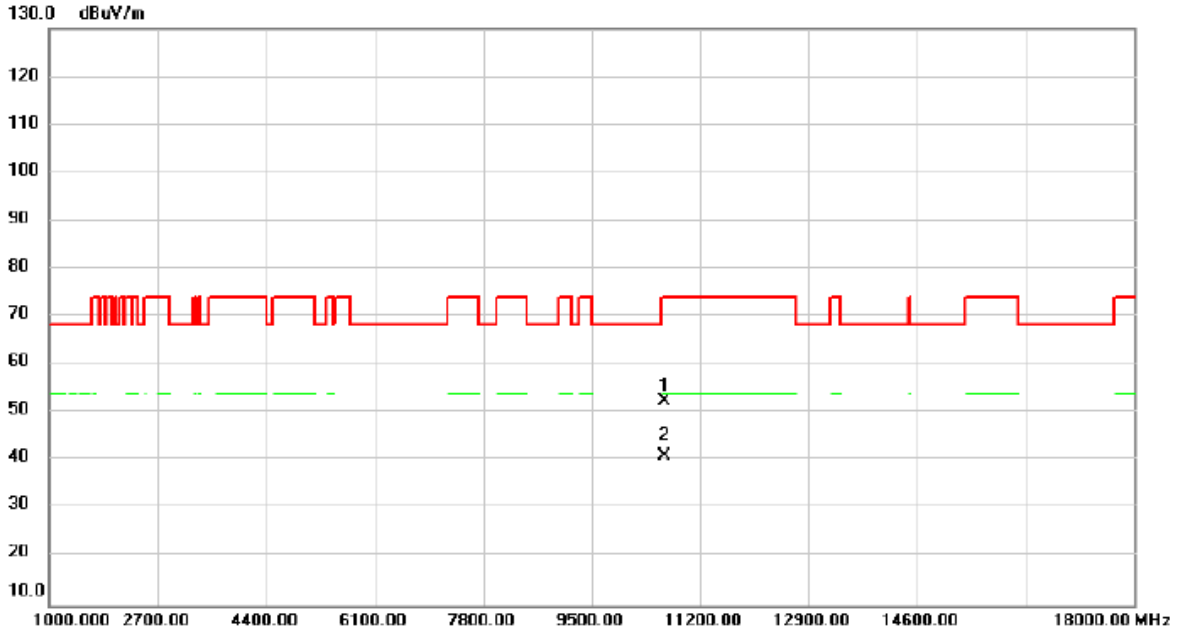


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	46.76	5.61	52.37	74.00	-21.63	peak	
2	*	10640.00	35.39	5.61	41.00	54.00	-13.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5500MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

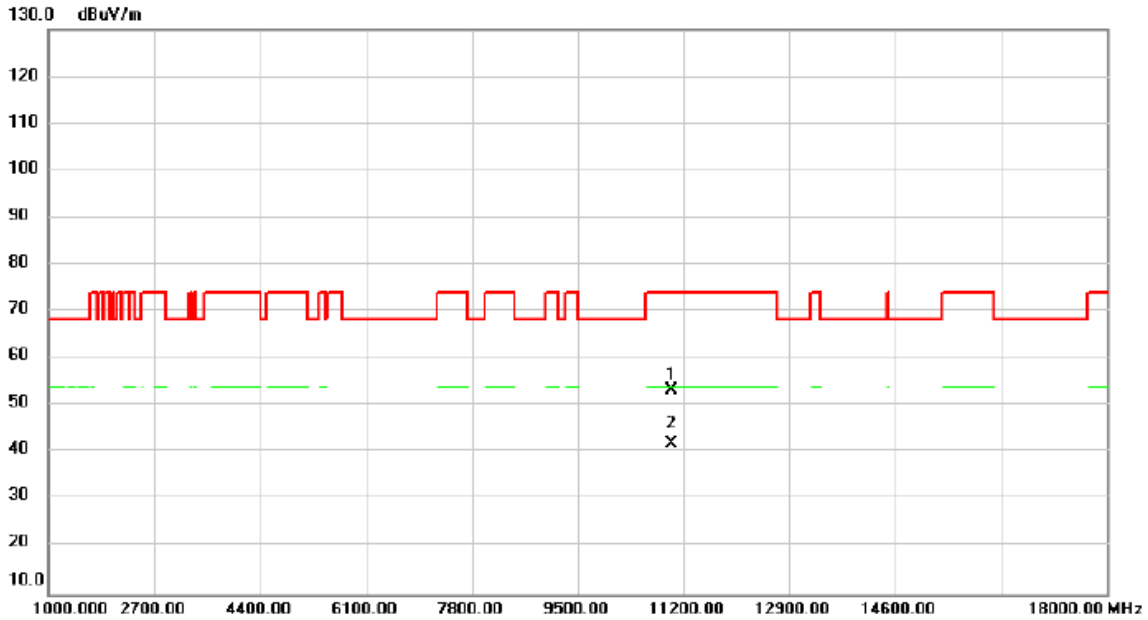


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	46.85	6.44	53.29	74.00	-20.71	peak	
2	*	11000.00	35.60	6.44	42.04	54.00	-11.96	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5500MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

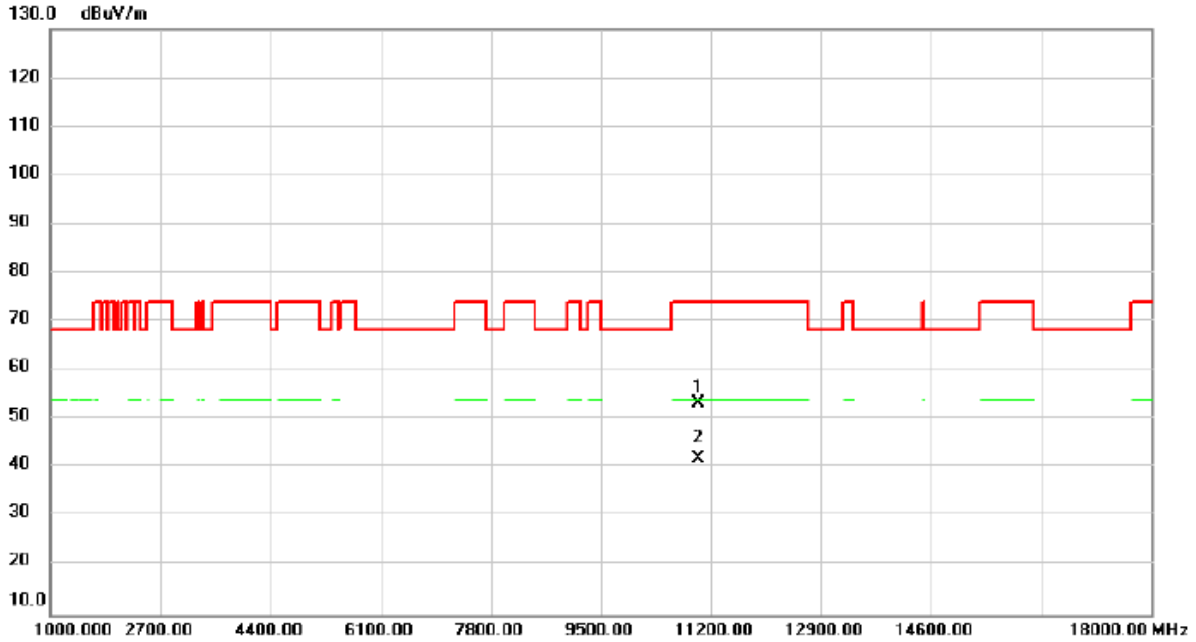


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	46.83	6.44	53.27	74.00	-20.73	peak	
2	*	11000.00	35.57	6.44	42.01	54.00	-11.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5580MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

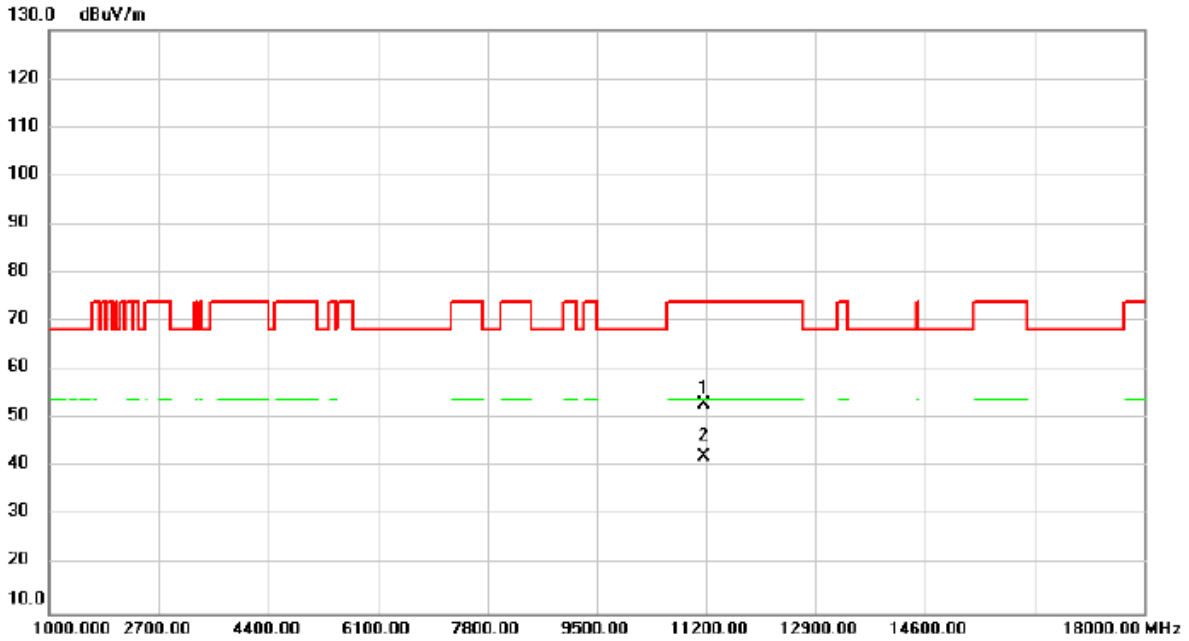


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	46.50	6.54	53.04	74.00	-20.96	peak	
2	*	11160.00	35.61	6.54	42.15	54.00	-11.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5580MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

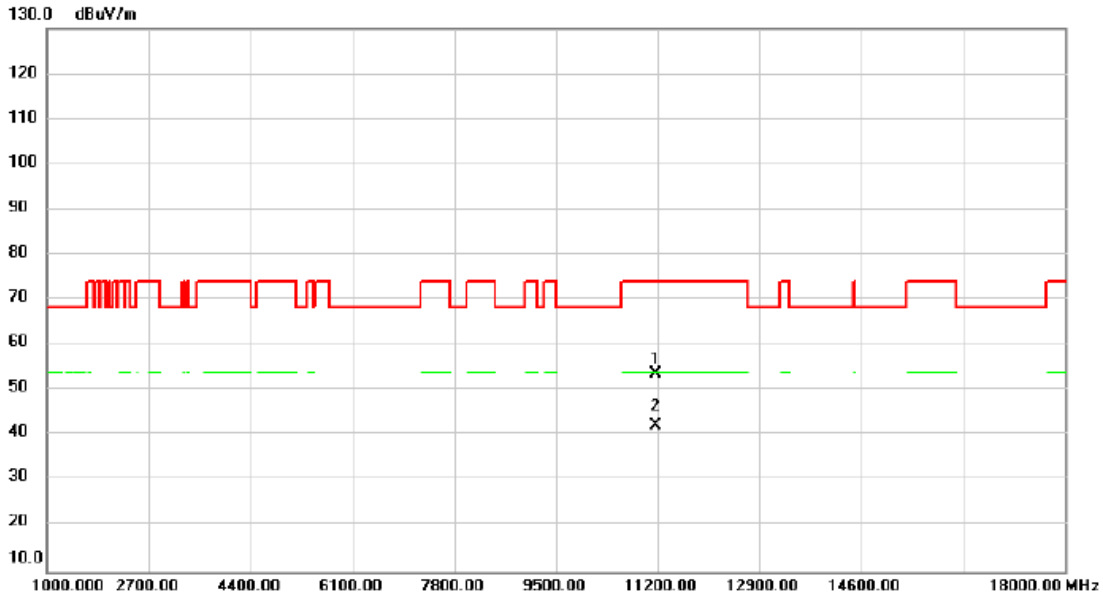


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	47.22	6.54	53.76	74.00	-20.24	peak	
2	*	11160.00	35.66	6.54	42.20	54.00	-11.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5700MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

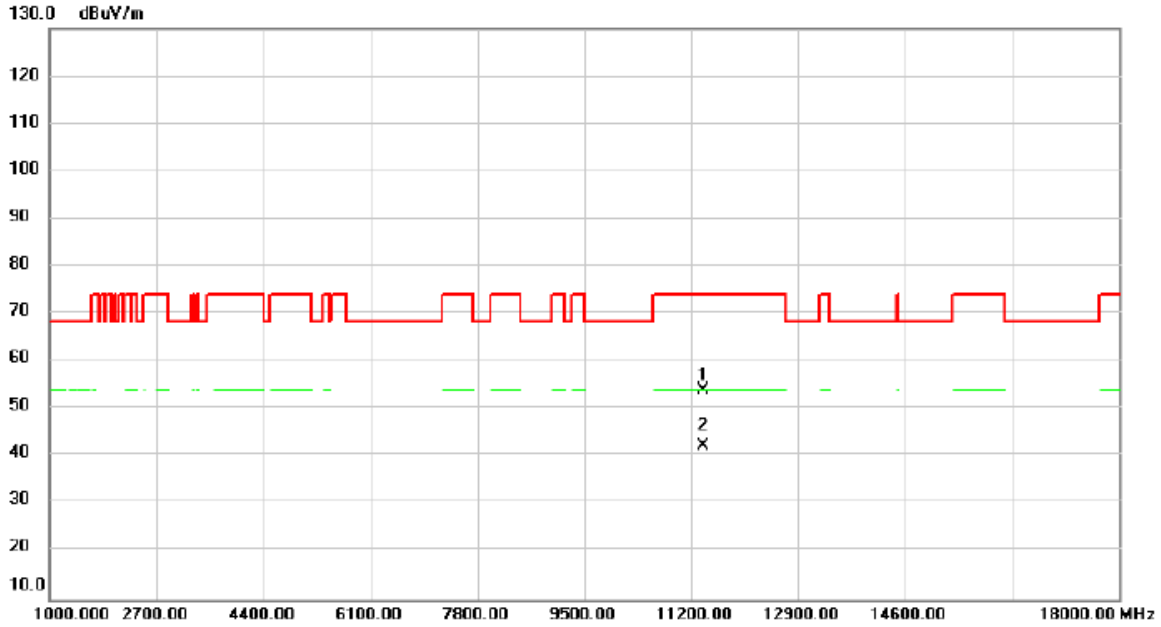


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	47.17	6.68	53.85	74.00	-20.15	peak	
2	*	11400.00	35.62	6.68	42.30	54.00	-11.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5700MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

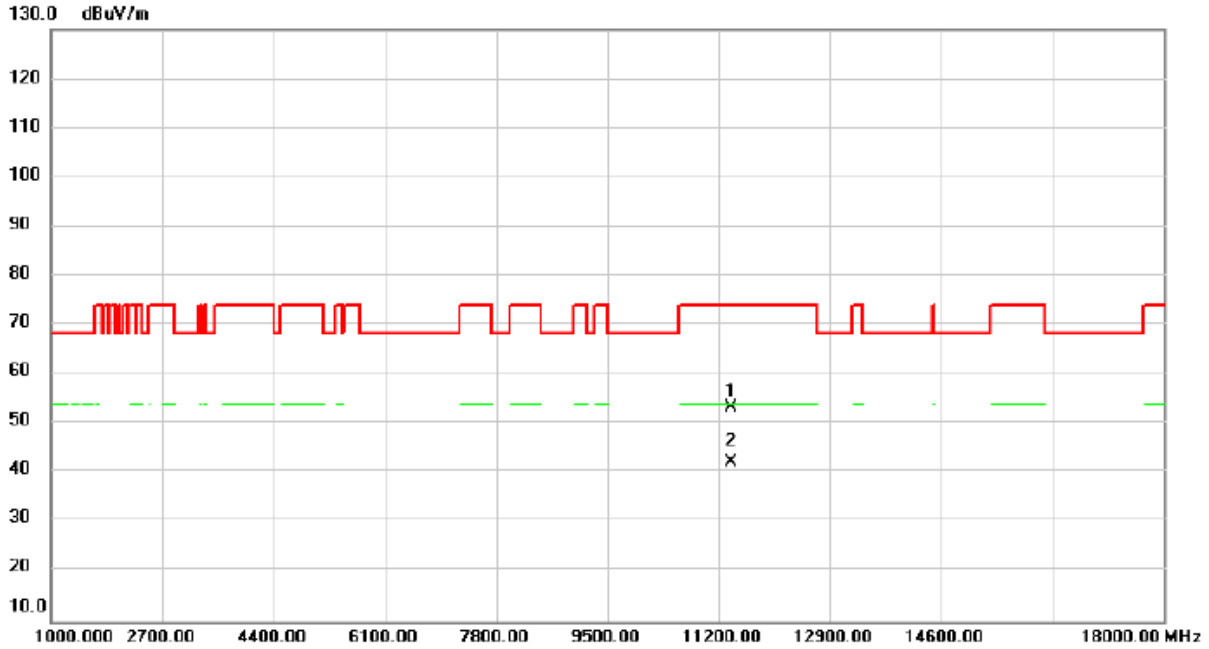


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	46.80	6.68	53.48	74.00	-20.52	peak	
2	*	11400.00	35.60	6.68	42.28	54.00	-11.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5745MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

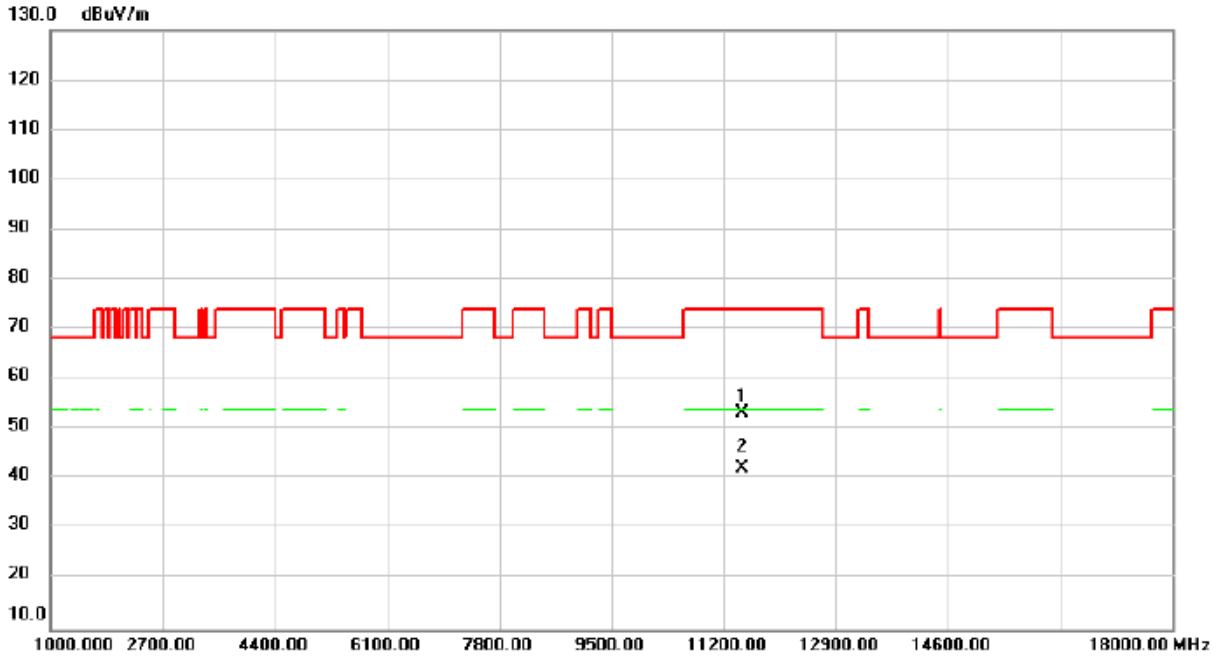


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	46.57	6.74	53.31	74.00	-20.69	peak	
2	*	11490.00	35.48	6.74	42.22	54.00	-11.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5745MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

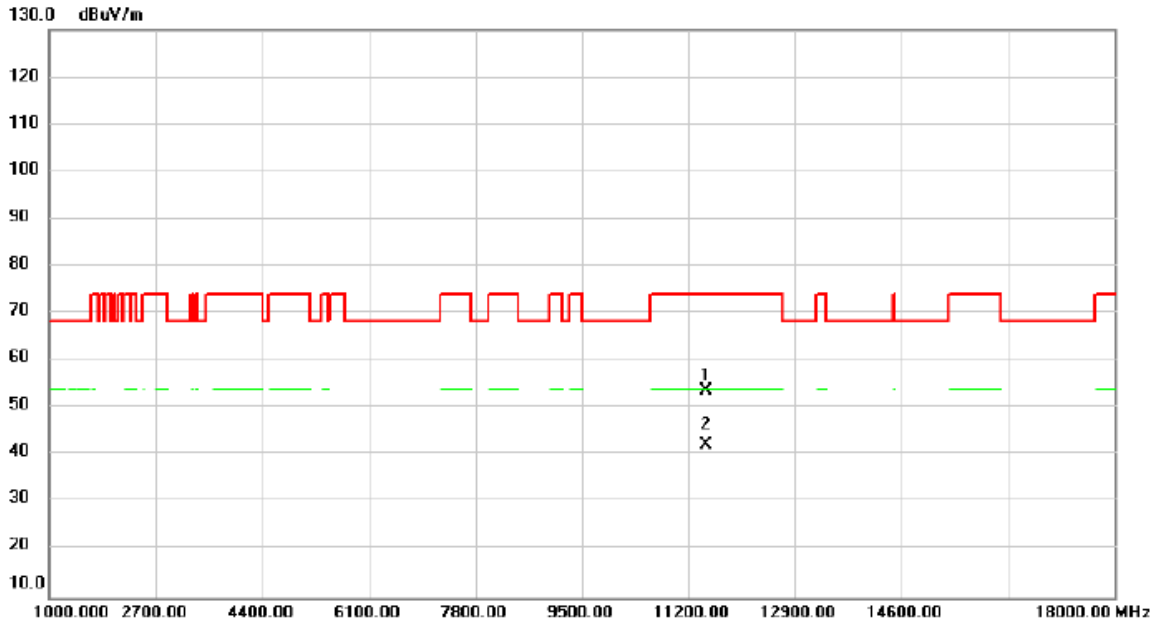


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	47.00	6.74	53.74	74.00	-20.26	peak	
2	*	11490.00	35.60	6.74	42.34	54.00	-11.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5785MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

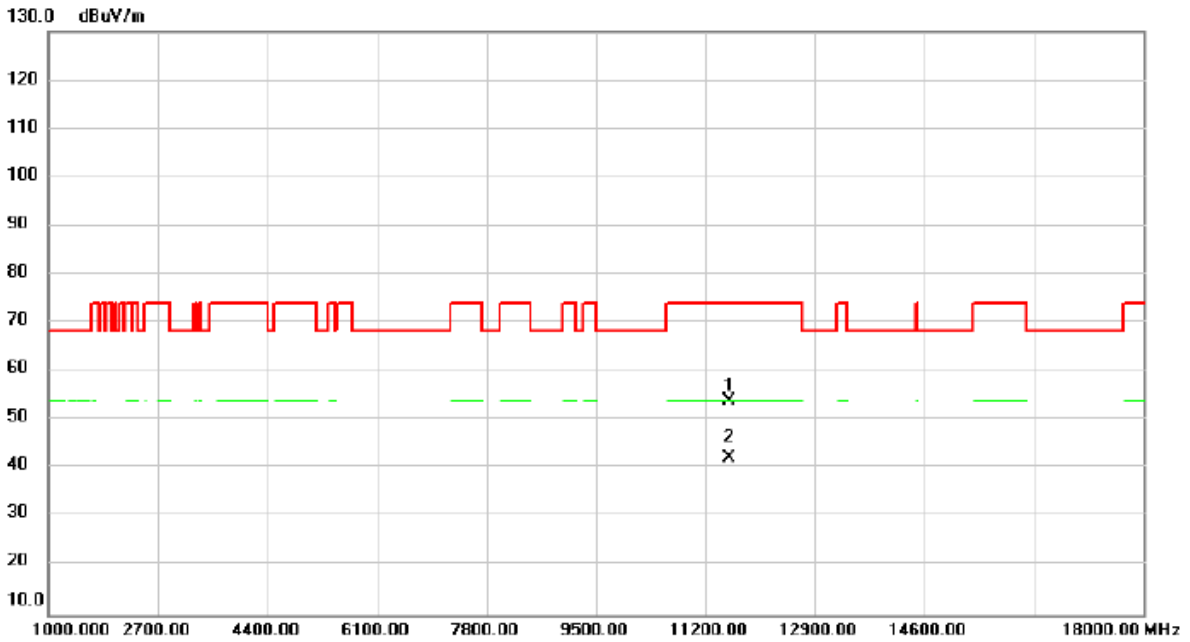


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	47.20	6.70	53.90	74.00	-20.10	peak	
2	*	11570.00	35.40	6.70	42.10	54.00	-11.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5785MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

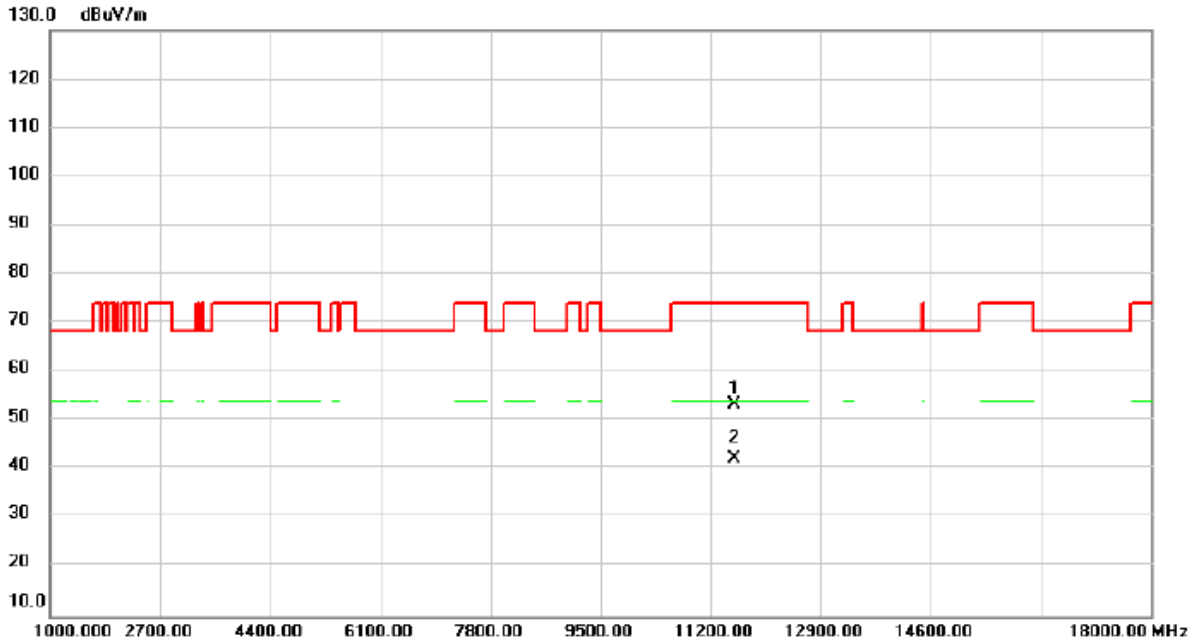


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	46.65	6.70	53.35	74.00	-20.65	peak	
2	*	11570.00	35.44	6.70	42.14	54.00	-11.86	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5825MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

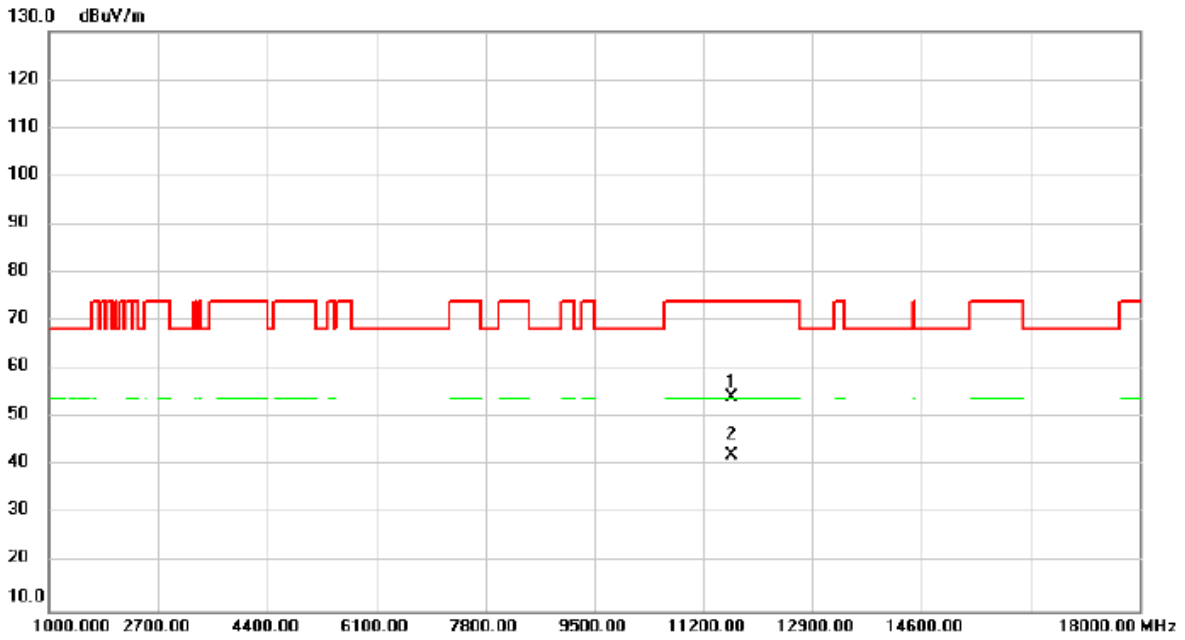


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	47.69	6.64	54.33	74.00	-19.67	peak	
2	*	11650.00	35.59	6.64	42.23	54.00	-11.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/12/13
Test Frequency	5825MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

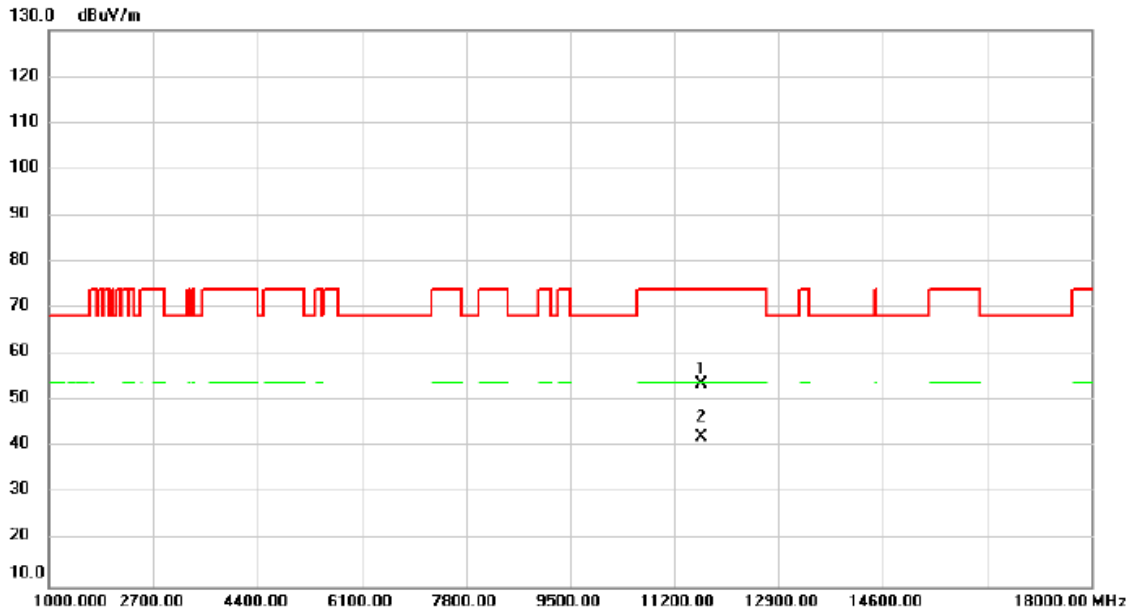


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	46.98	6.64	53.62	74.00	-20.38	peak	
2	*	11650.00	35.49	6.64	42.13	54.00	-11.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	5190MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

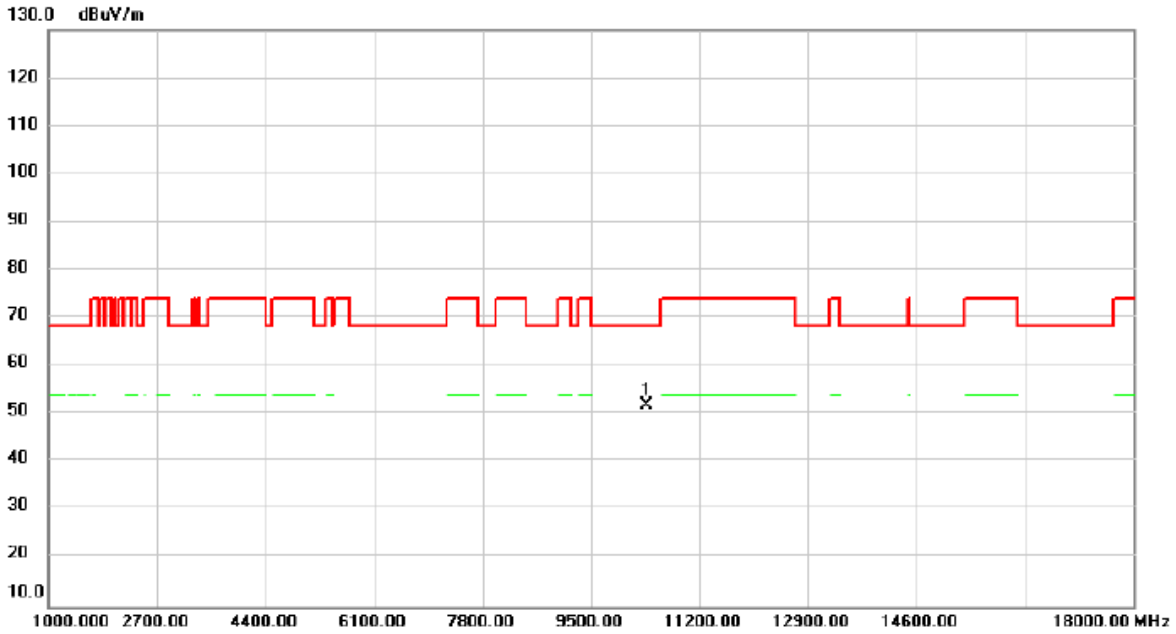


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10380.00	46.39	5.50	51.89	68.20	-16.31	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	5190MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

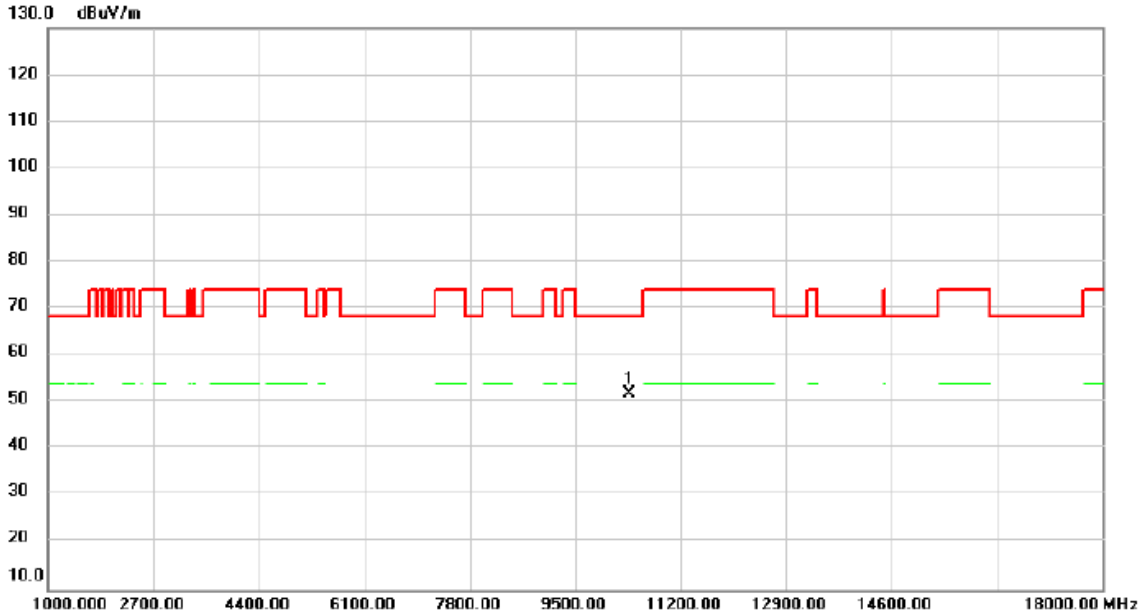


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10380.00	46.41	5.50	51.91	68.20	-16.29	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	5230MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

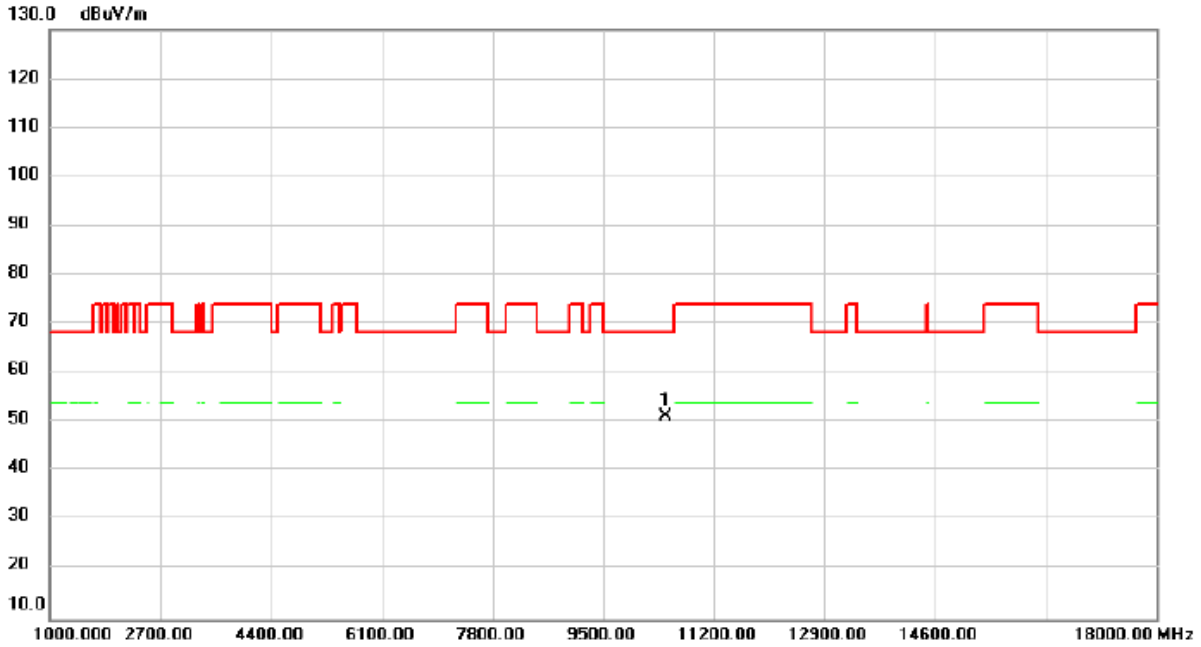


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	45.97	5.36	51.33	68.20	-16.87	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	5230MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

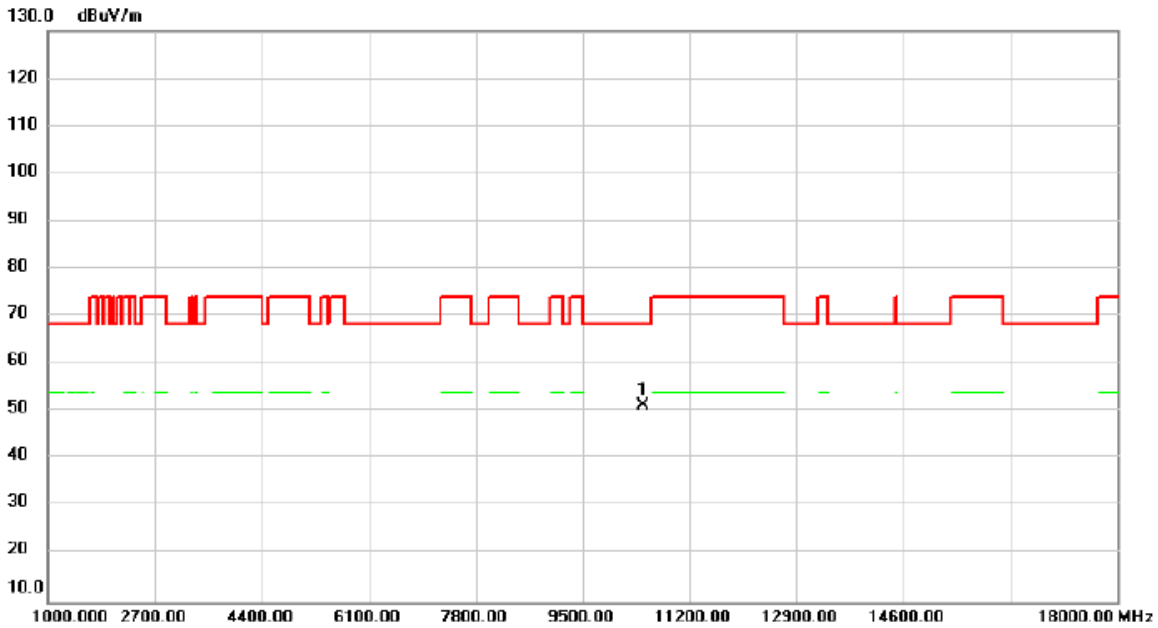


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10460.00	45.94	5.36	51.30	68.20	-16.90	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	5270MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

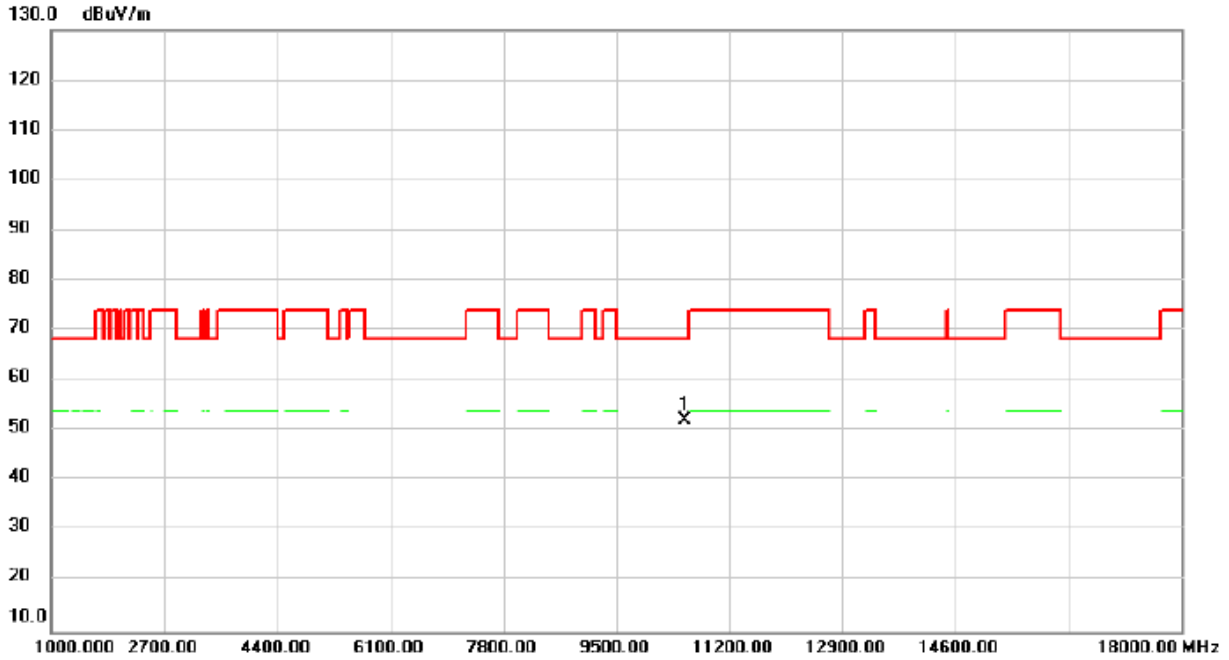


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10540.00	46.84	5.38	52.22	68.20	-15.98	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	5270MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

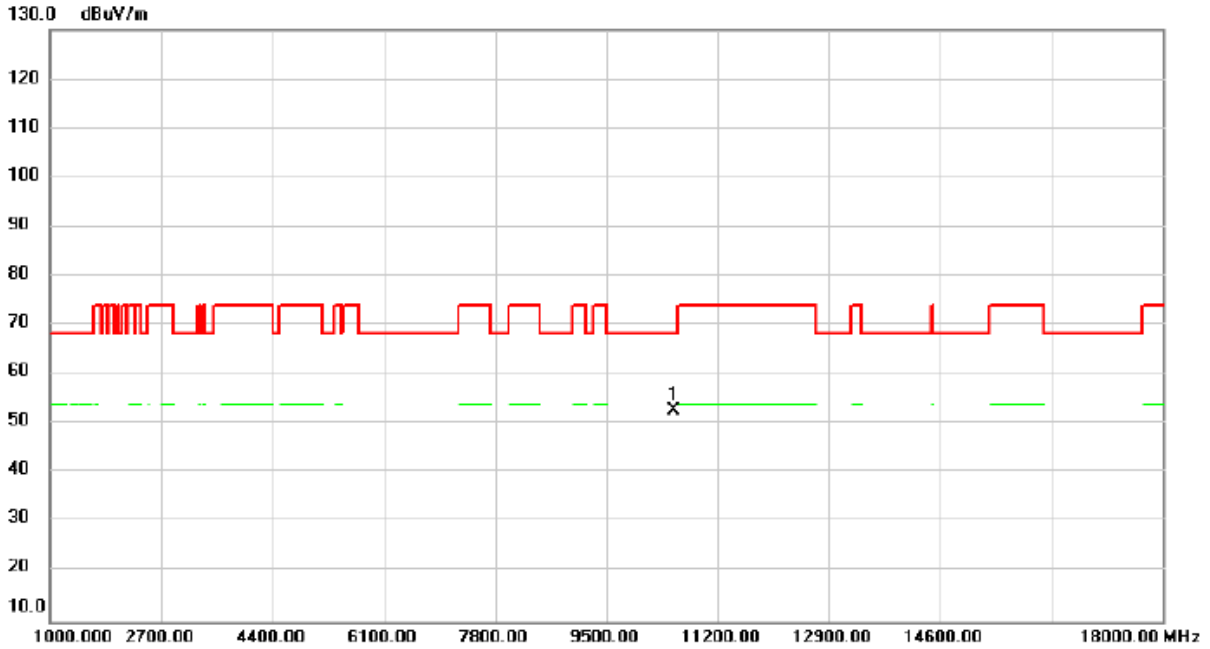


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	47.39	5.38	52.77	68.20	-15.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	5310MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

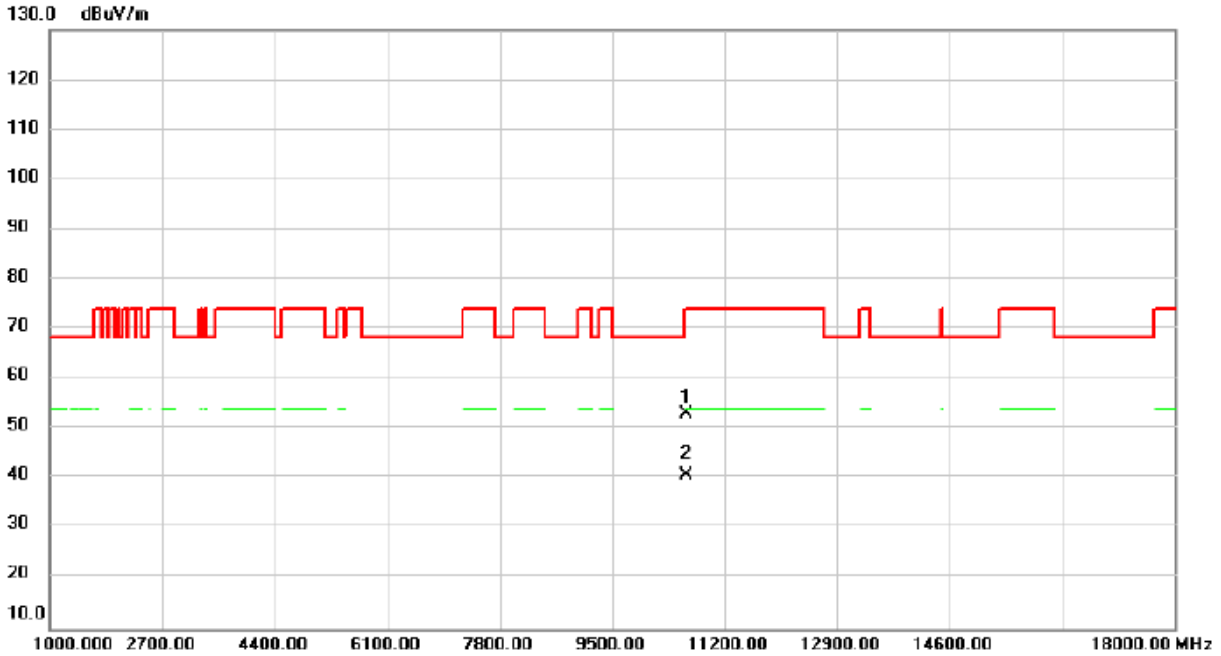


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	47.50	5.56	53.06	74.00	-20.94	peak	
2	*	10620.00	35.15	5.56	40.71	54.00	-13.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	5310MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

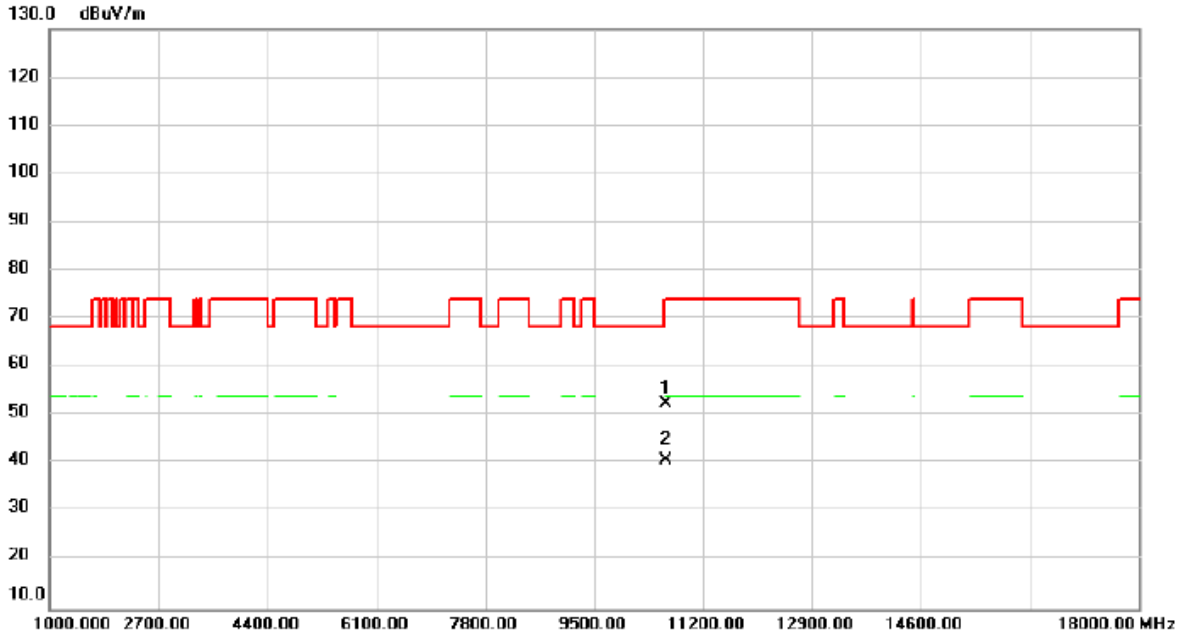


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10620.00	46.79	5.56	52.35	74.00	-21.65	peak	
2	*	10620.00	35.17	5.56	40.73	54.00	-13.27	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	5510MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

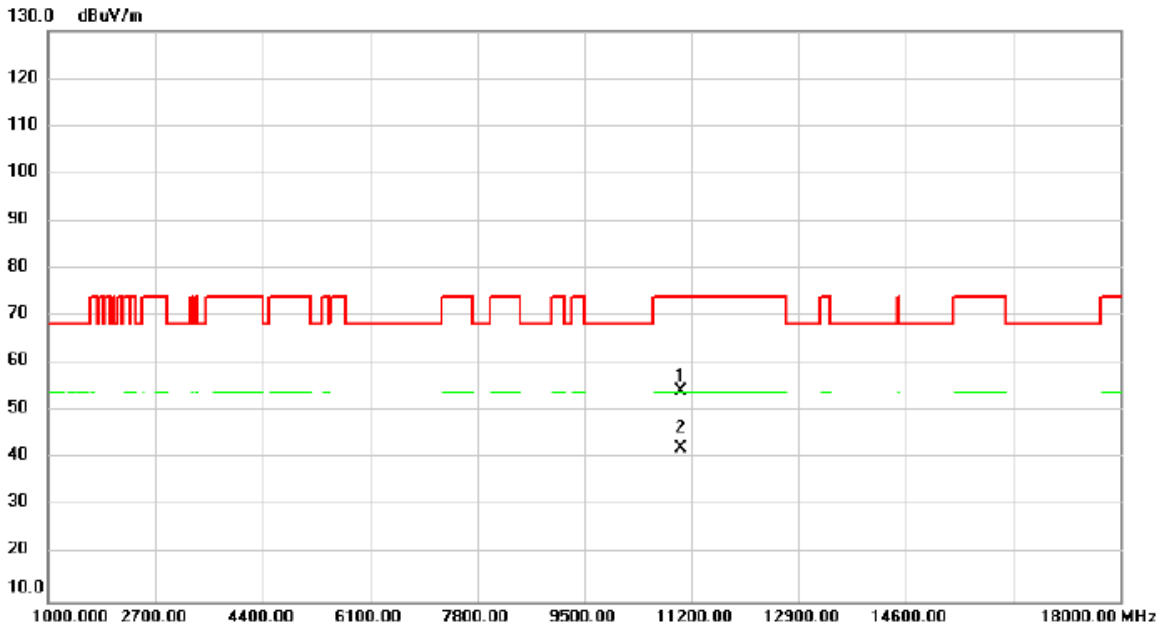


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	47.86	6.45	54.31	74.00	-19.69	peak	
2	*	11020.00	35.67	6.45	42.12	54.00	-11.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	5510MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

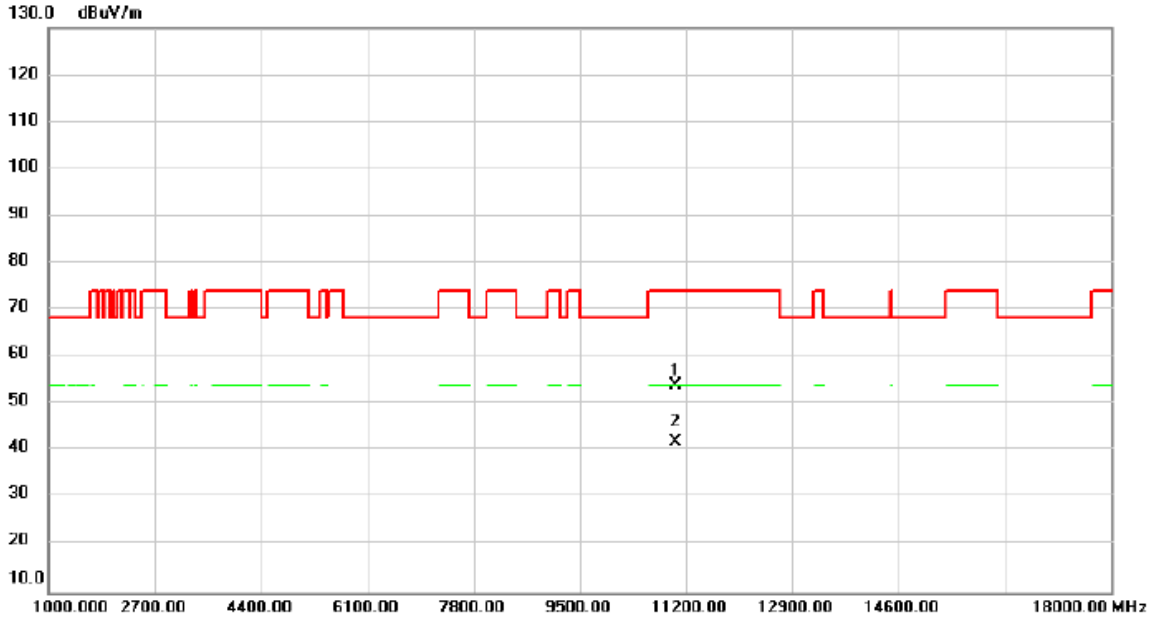


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	47.40	6.45	53.85	74.00	-20.15	peak	
2	*	11020.00	35.63	6.45	42.08	54.00	-11.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	5550MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

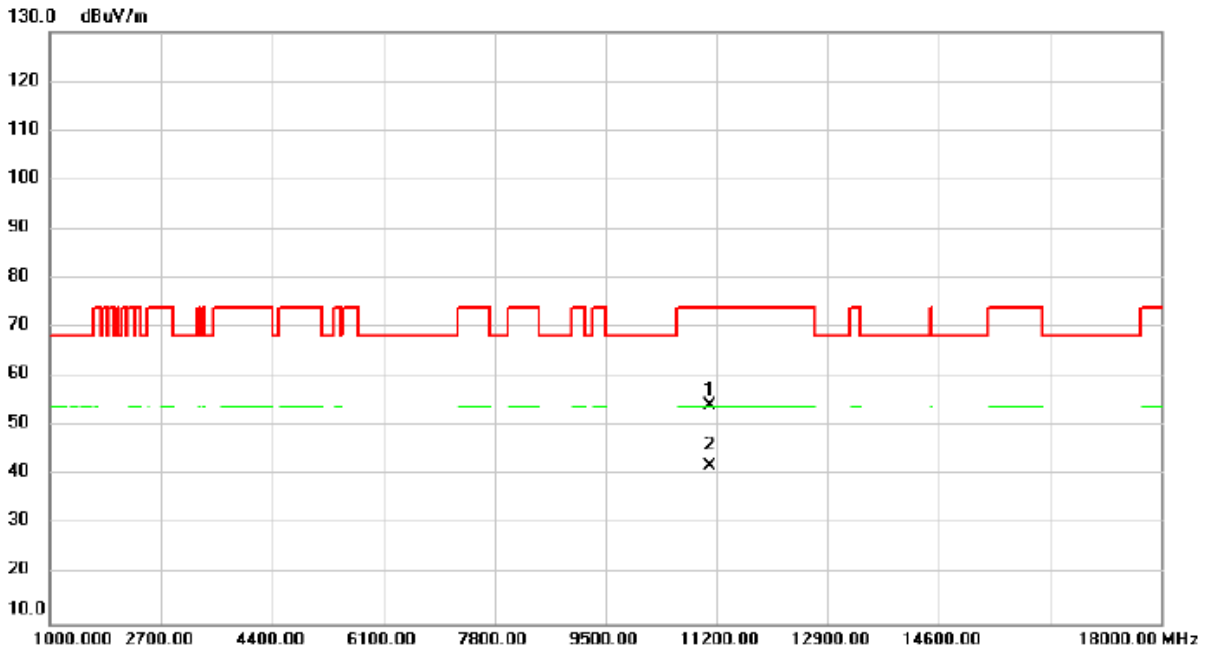


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	47.81	6.51	54.32	74.00	-19.68	peak	
2	*	11100.00	35.54	6.51	42.05	54.00	-11.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	5550MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

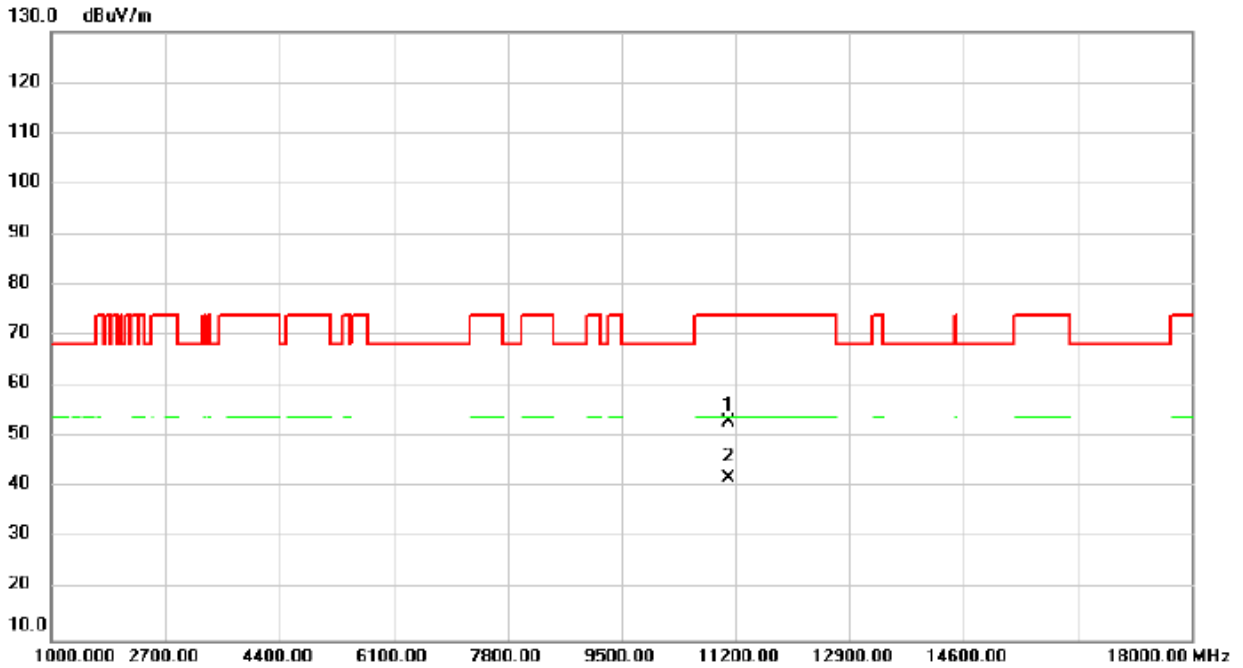


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	46.65	6.51	53.16	74.00	-20.84	peak	
2	*	11100.00	35.52	6.51	42.03	54.00	-11.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	5670MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

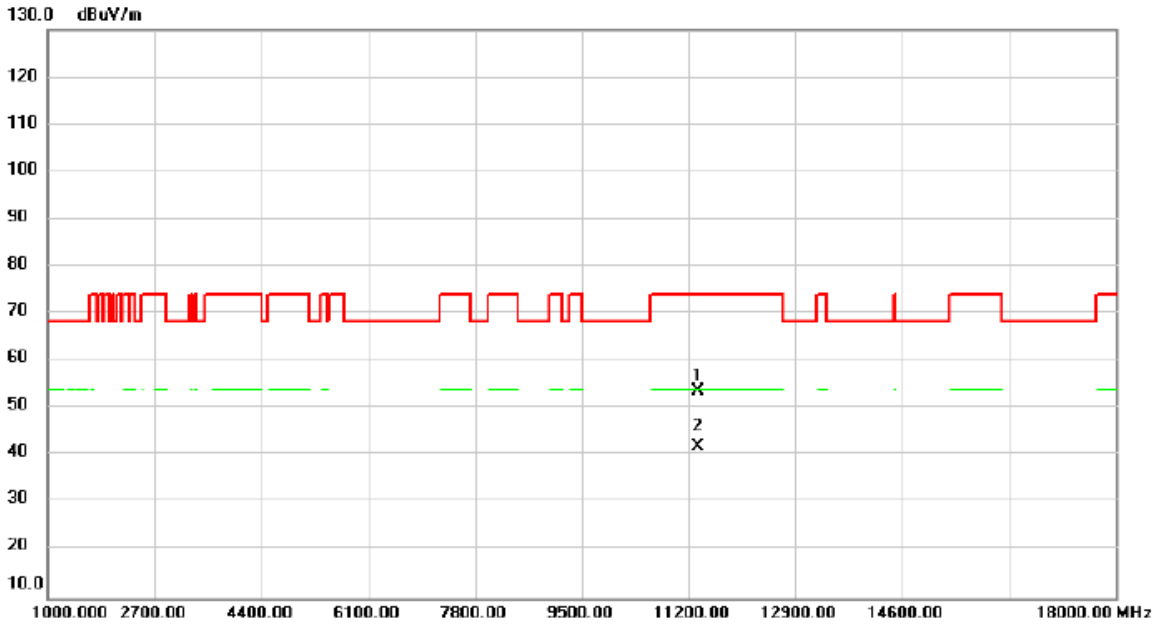


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	47.12	6.65	53.77	74.00	-20.23	peak	
2	*	11340.00	35.38	6.65	42.03	54.00	-11.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	5670MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

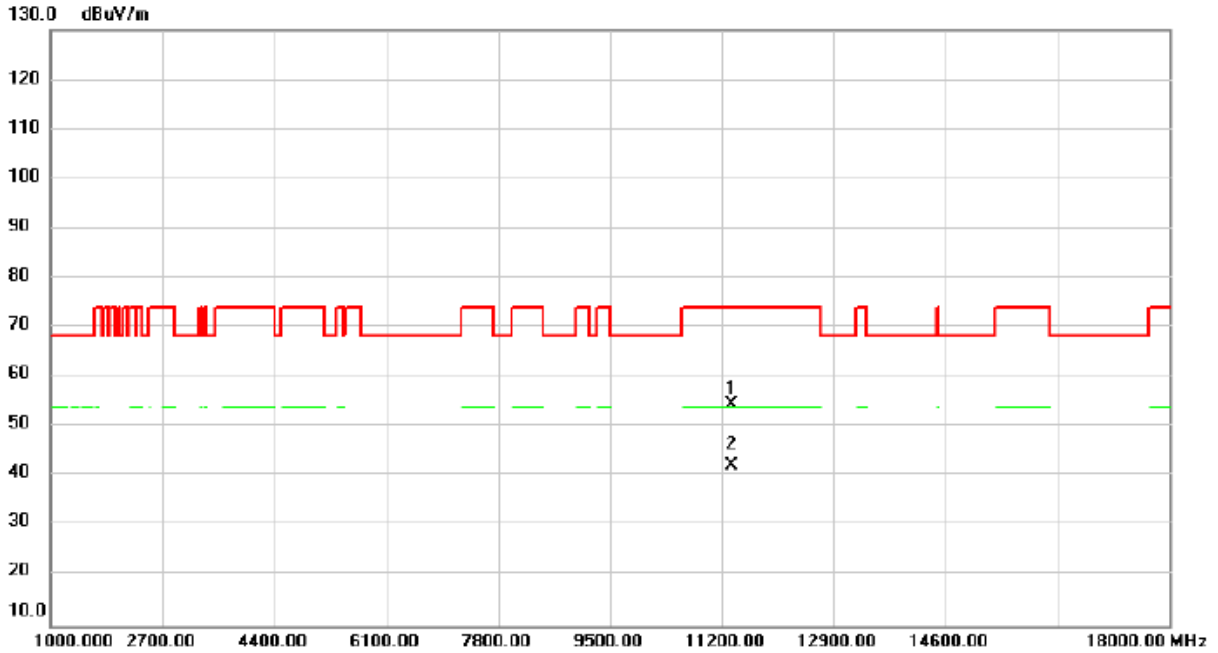


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	47.80	6.65	54.45	74.00	-19.55	peak	
2	*	11340.00	35.48	6.65	42.13	54.00	-11.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	5755MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

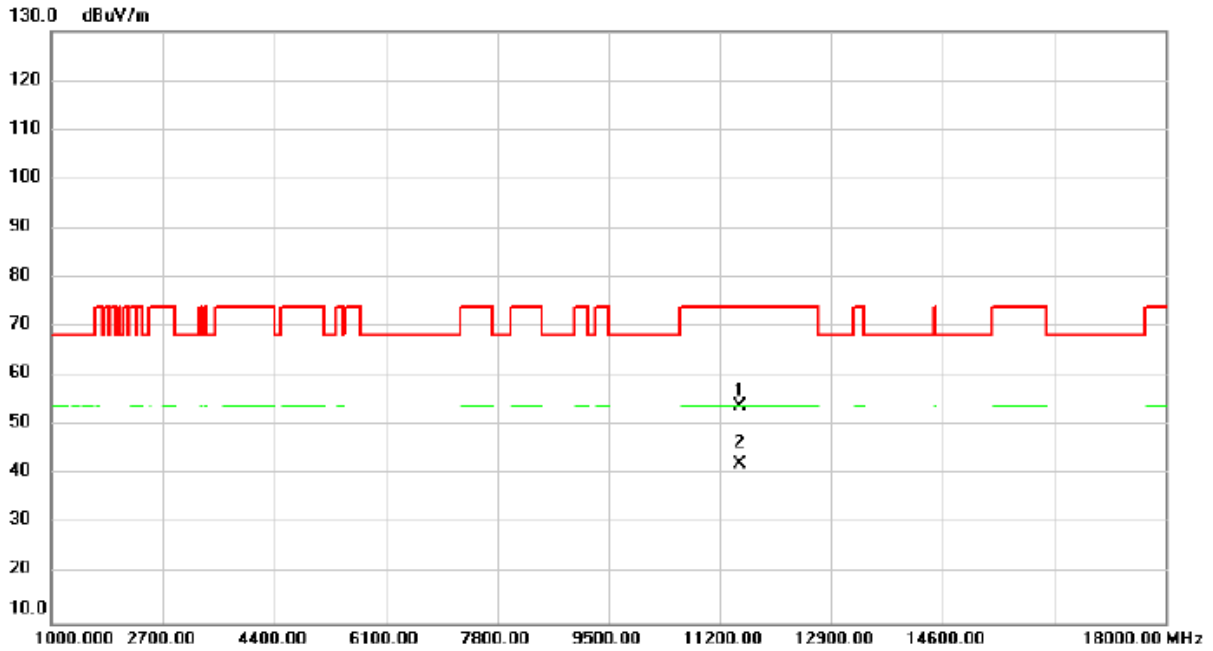


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11510.00	47.16	6.74	53.90	74.00	-20.10	peak	
2	*	11510.00	35.51	6.74	42.25	54.00	-11.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	5755MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

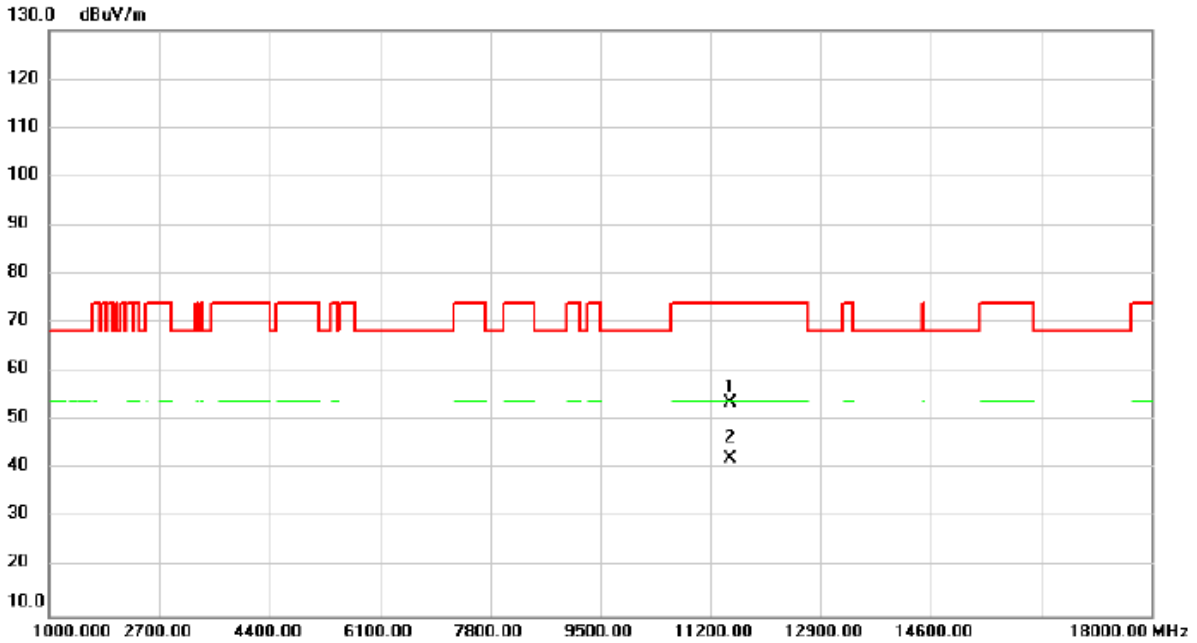


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11510.00	46.86	6.74	53.60	74.00	-20.40	peak	
2	*	11510.00	35.46	6.74	42.20	54.00	-11.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	5795MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

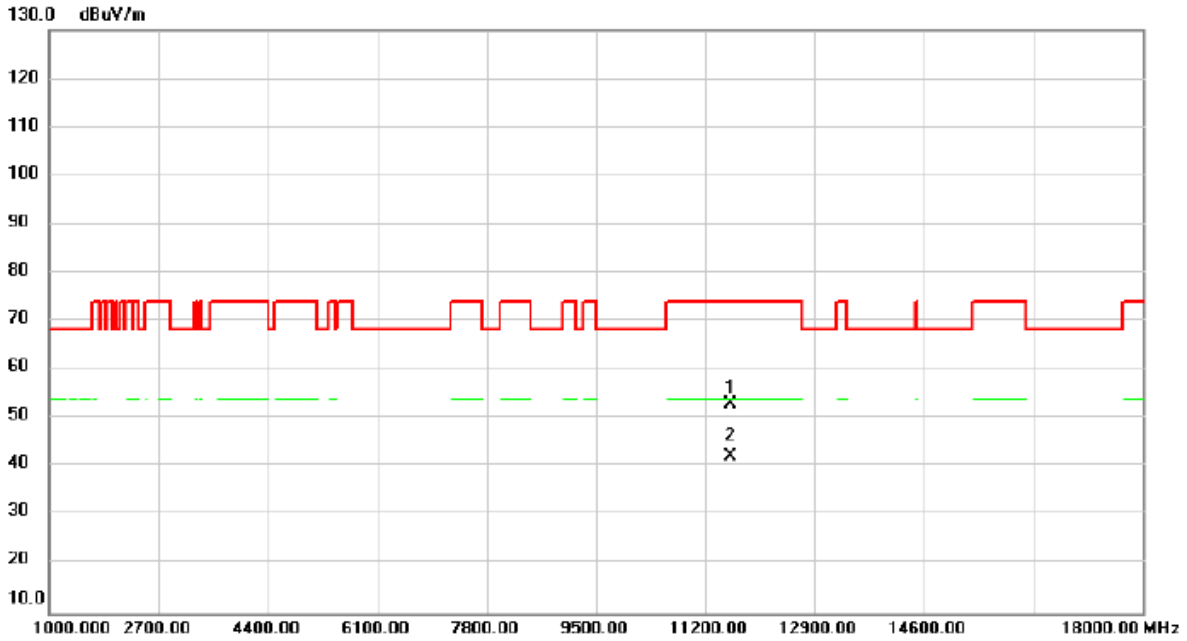


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	46.42	6.68	53.10	74.00	-20.90	peak	
2	*	11590.00	35.58	6.68	42.26	54.00	-11.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/12/13
Test Frequency	5795MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

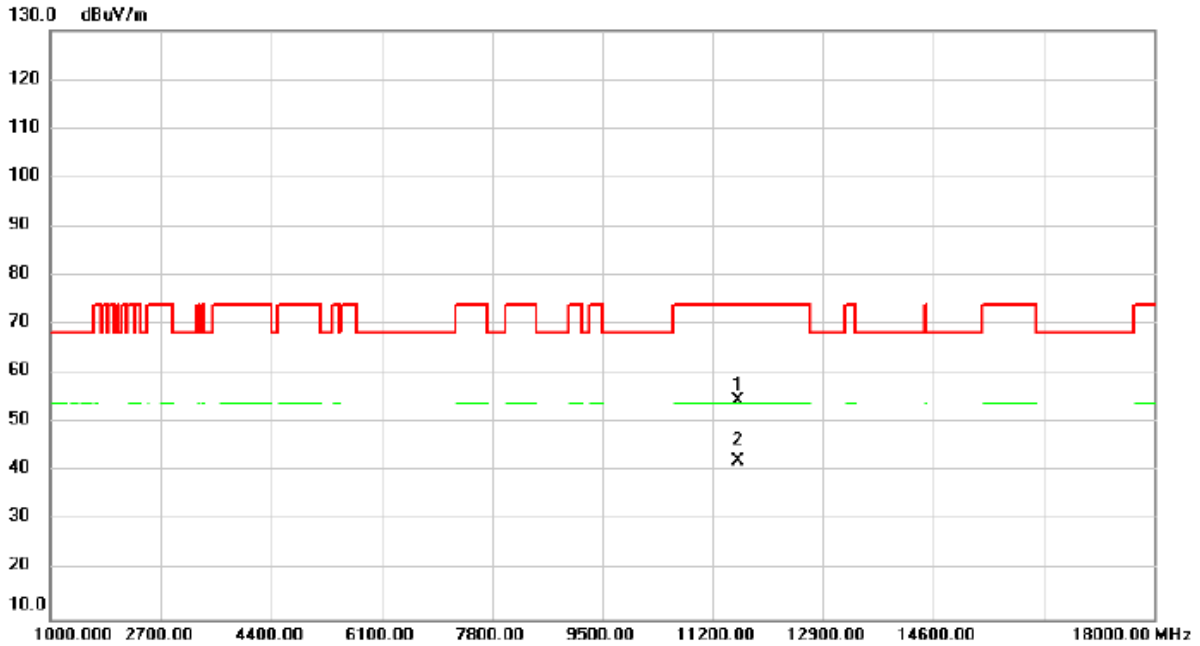


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	47.85	6.68	54.53	74.00	-19.47	peak	
2	*	11590.00	35.48	6.68	42.16	54.00	-11.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/12/13
Test Frequency	5210MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

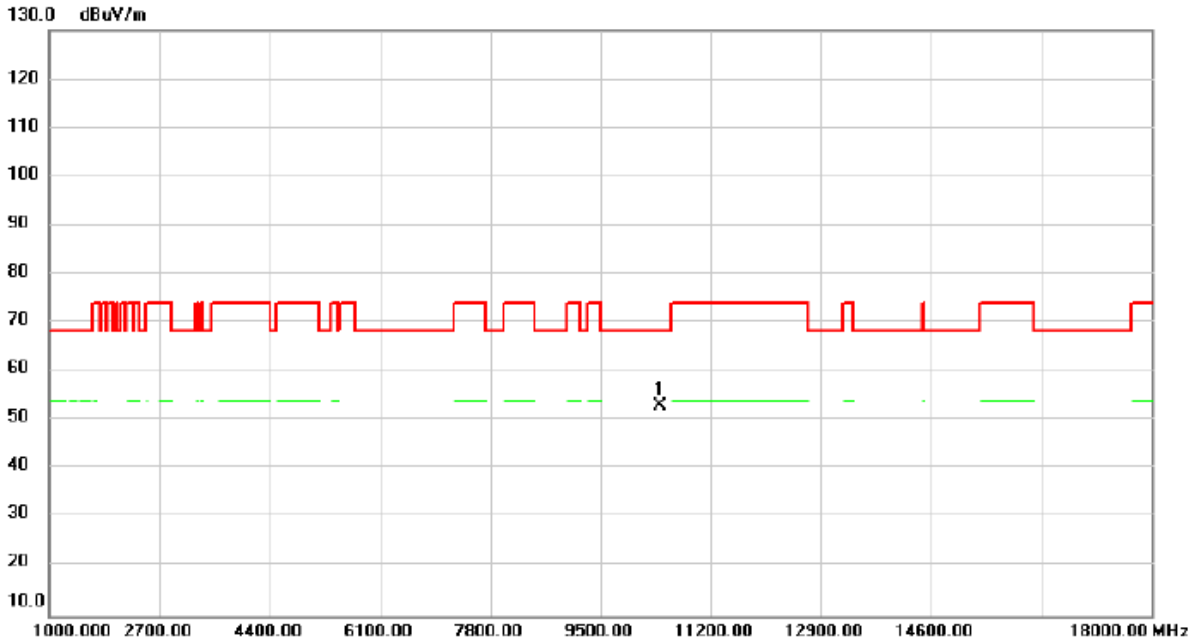


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10420.00	47.59	5.42	53.01	68.20	-15.19	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/12/13
Test Frequency	5210MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

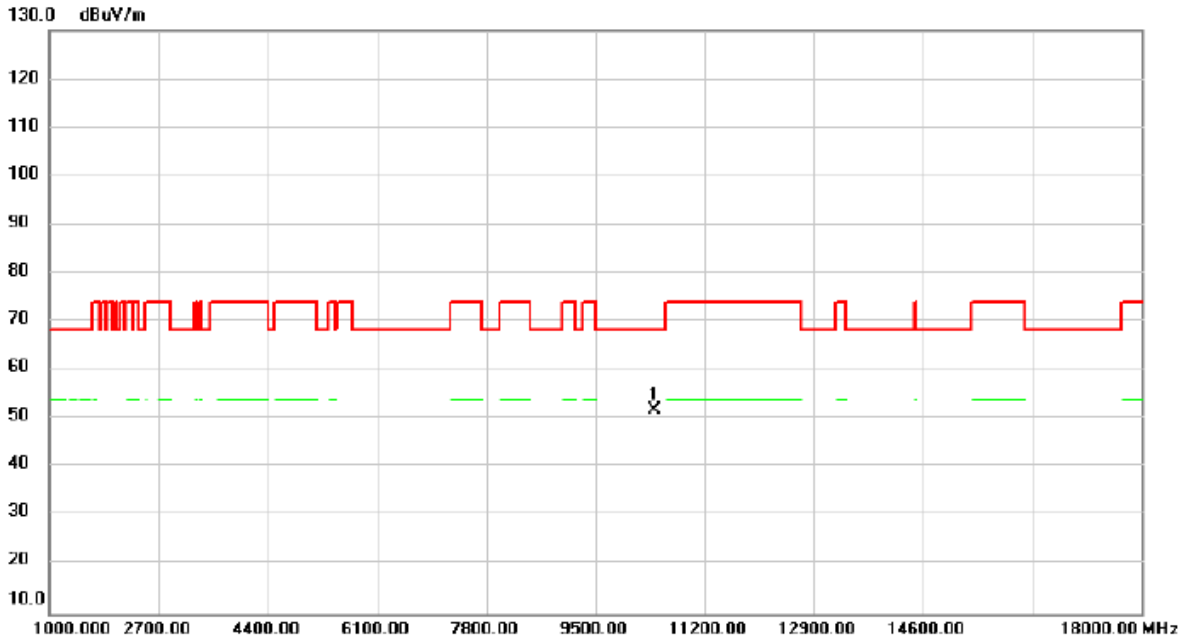


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	46.45	5.42	51.87	68.20	-16.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/12/13
Test Frequency	5290MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

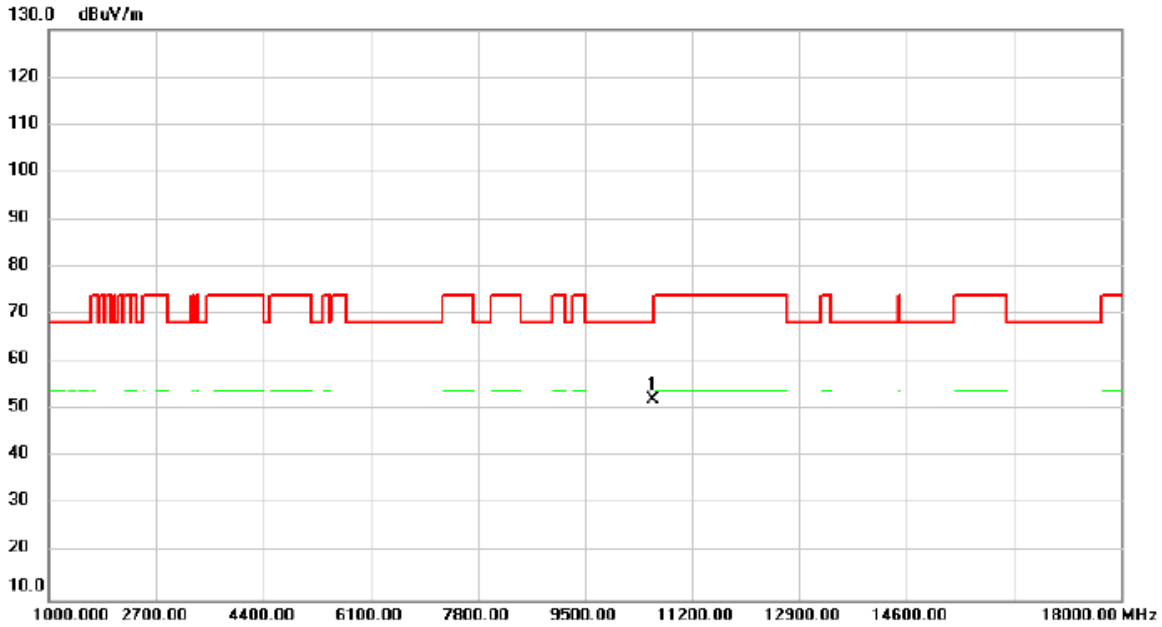


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	46.84	5.46	52.30	68.20	-15.90	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/12/13
Test Frequency	5290MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

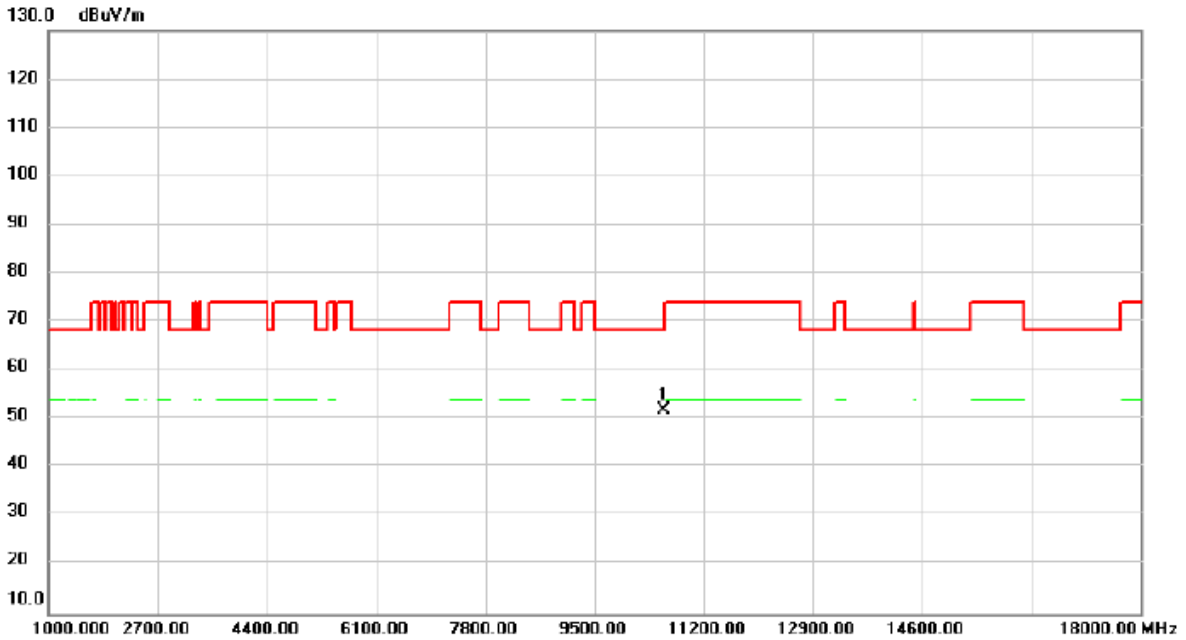


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10580.00	46.28	5.46	51.74	68.20	-16.46	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/12/13
Test Frequency	5530MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

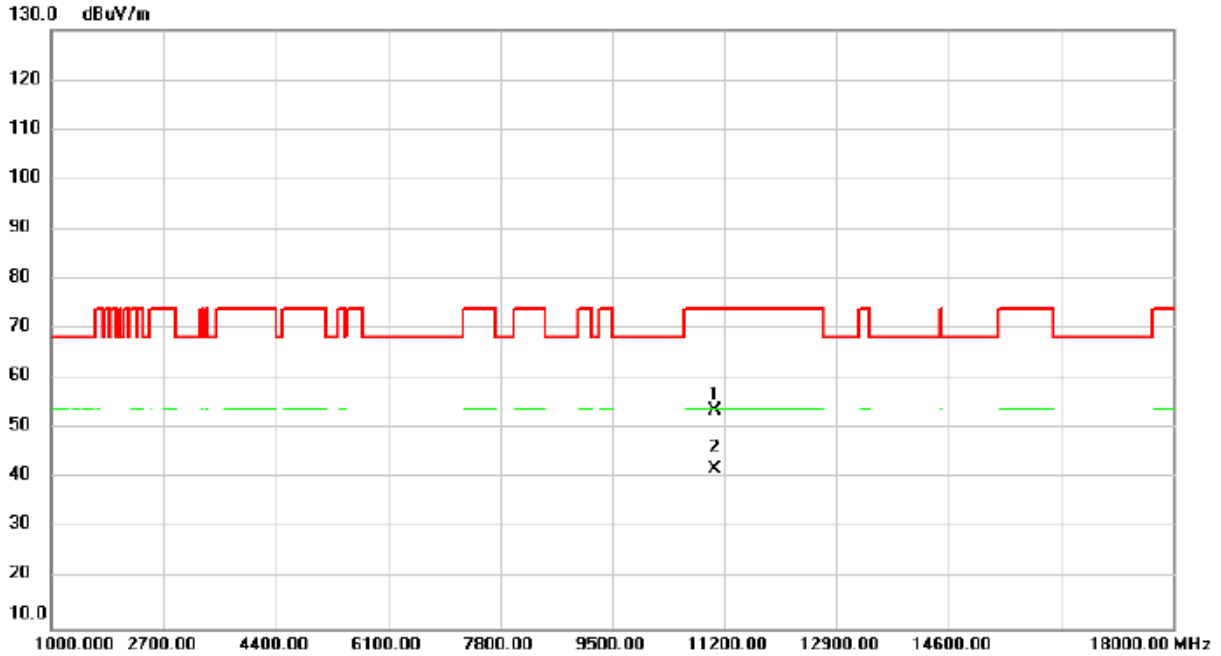


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	47.21	6.48	53.69	74.00	-20.31	peak	
2	*	11060.00	35.52	6.48	42.00	54.00	-12.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/12/13
Test Frequency	5530MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

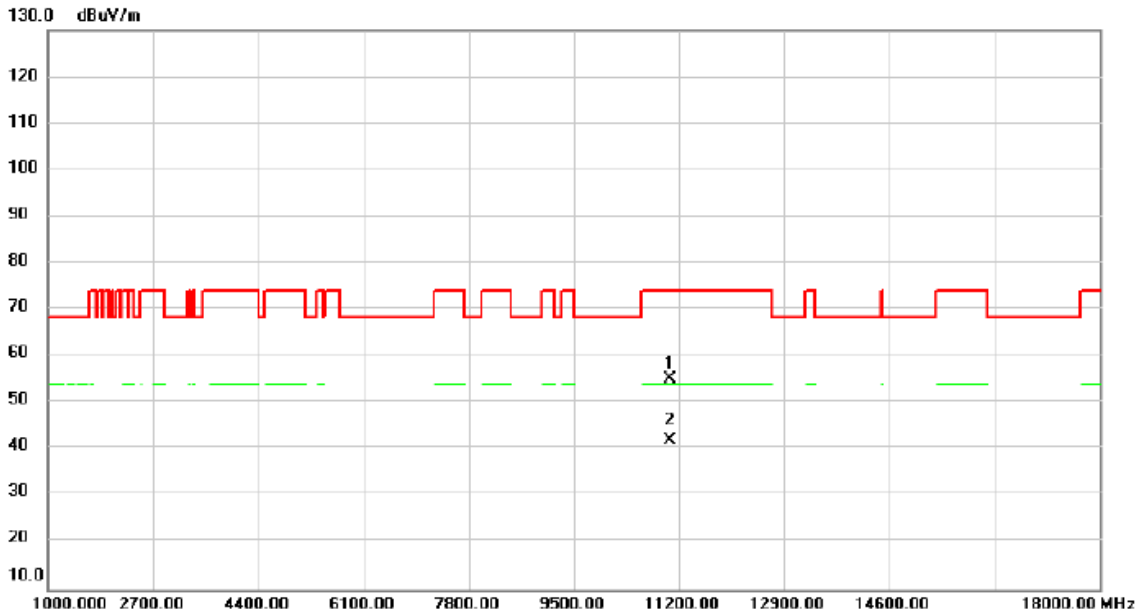


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	48.64	6.48	55.12	74.00	-18.88	peak	
2	*	11060.00	35.58	6.48	42.06	54.00	-11.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/12/13
Test Frequency	5610MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

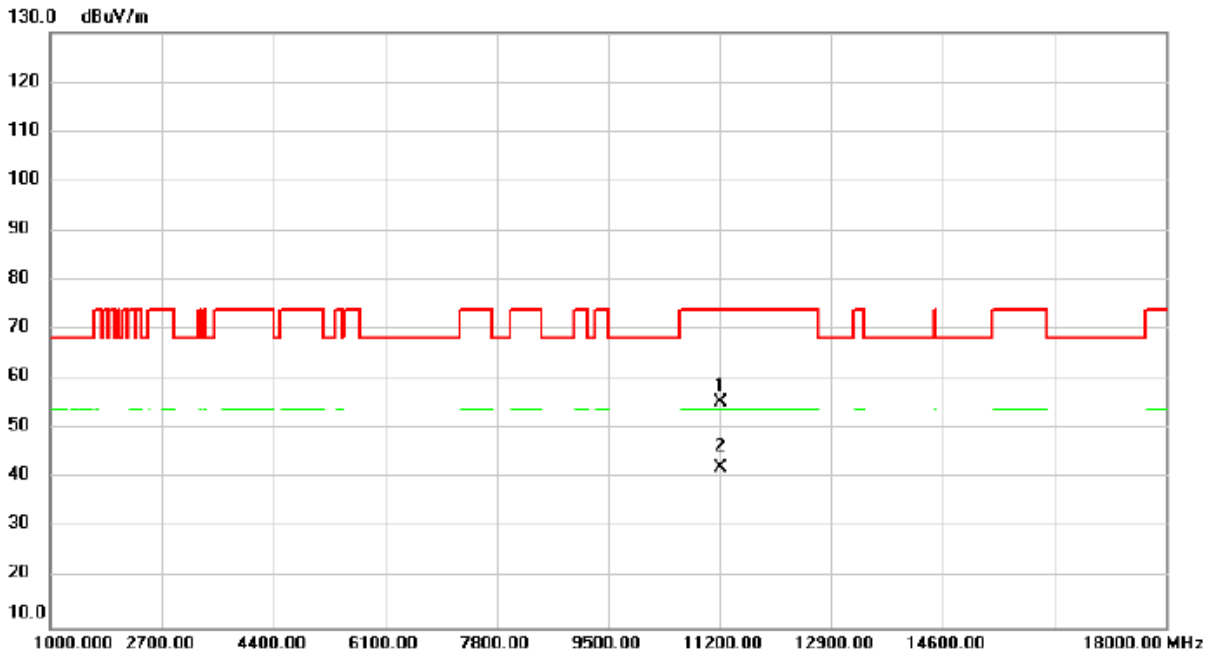


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	48.86	6.57	55.43	74.00	-18.57	peak	
2	*	11220.00	35.83	6.57	42.40	54.00	-11.60	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/12/13
Test Frequency	5610MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

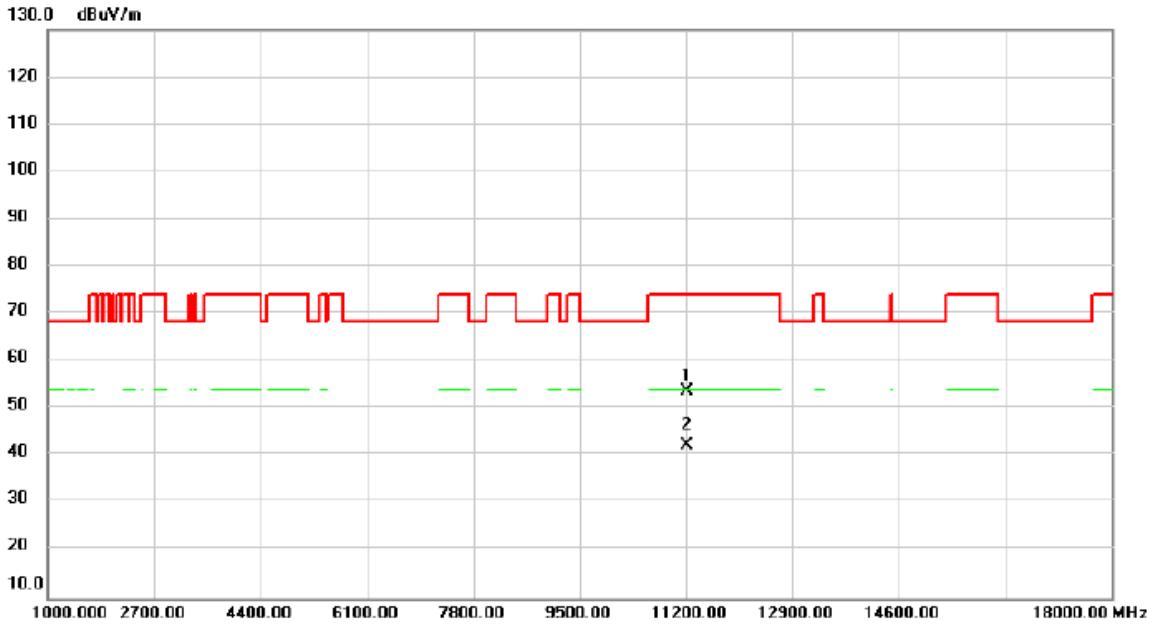


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	47.23	6.57	53.80	74.00	-20.20	peak	
2	*	11220.00	35.71	6.57	42.28	54.00	-11.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/12/13
Test Frequency	5775MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

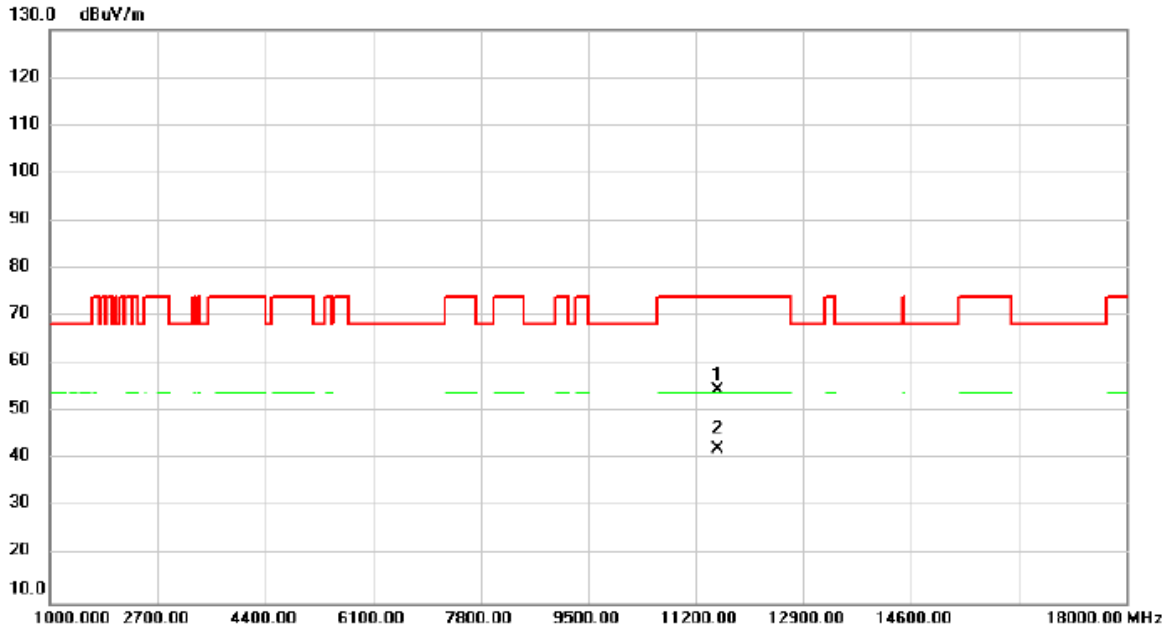


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	47.72	6.71	54.43	74.00	-19.57	peak	
2	*	11550.00	35.48	6.71	42.19	54.00	-11.81	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/12/13
Test Frequency	5775MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

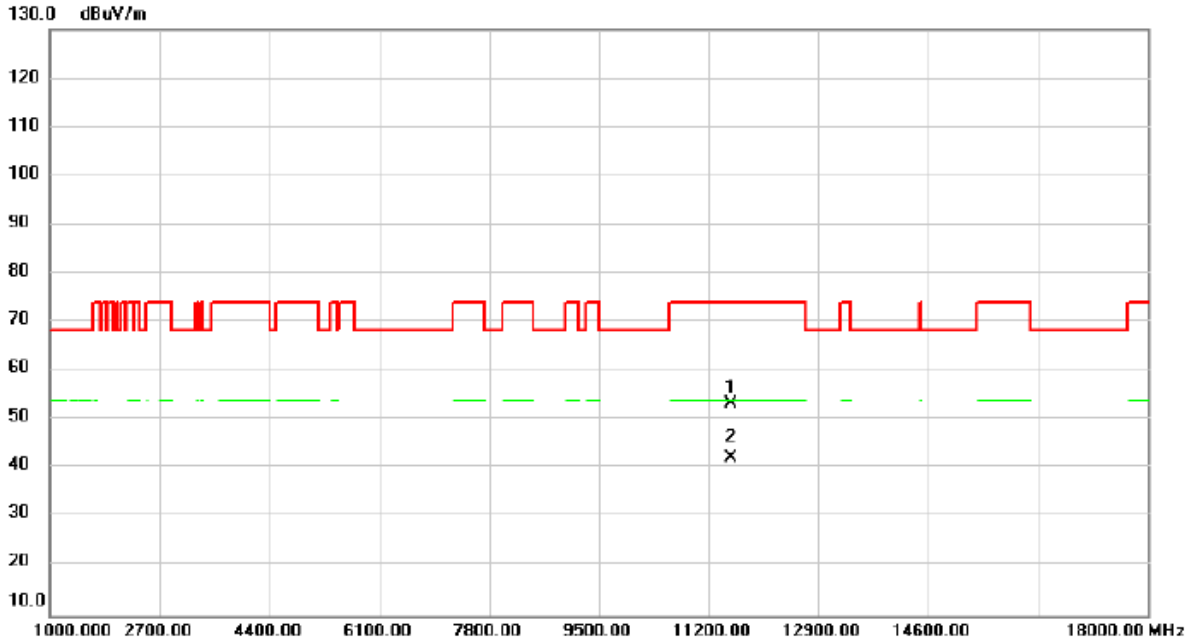


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	46.49	6.71	53.20	74.00	-20.80	peak	
2	*	11550.00	35.42	6.71	42.13	54.00	-11.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/12/13
Test Frequency	5250MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

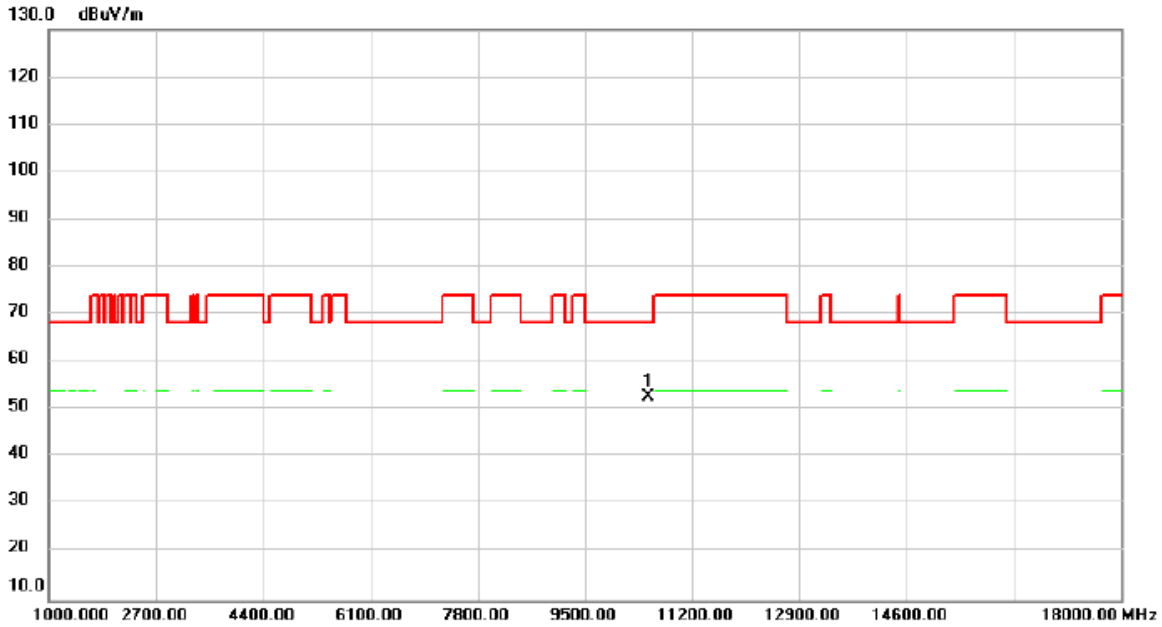


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10500.00	47.50	5.28	52.78	68.20	-15.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/12/13
Test Frequency	5250MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

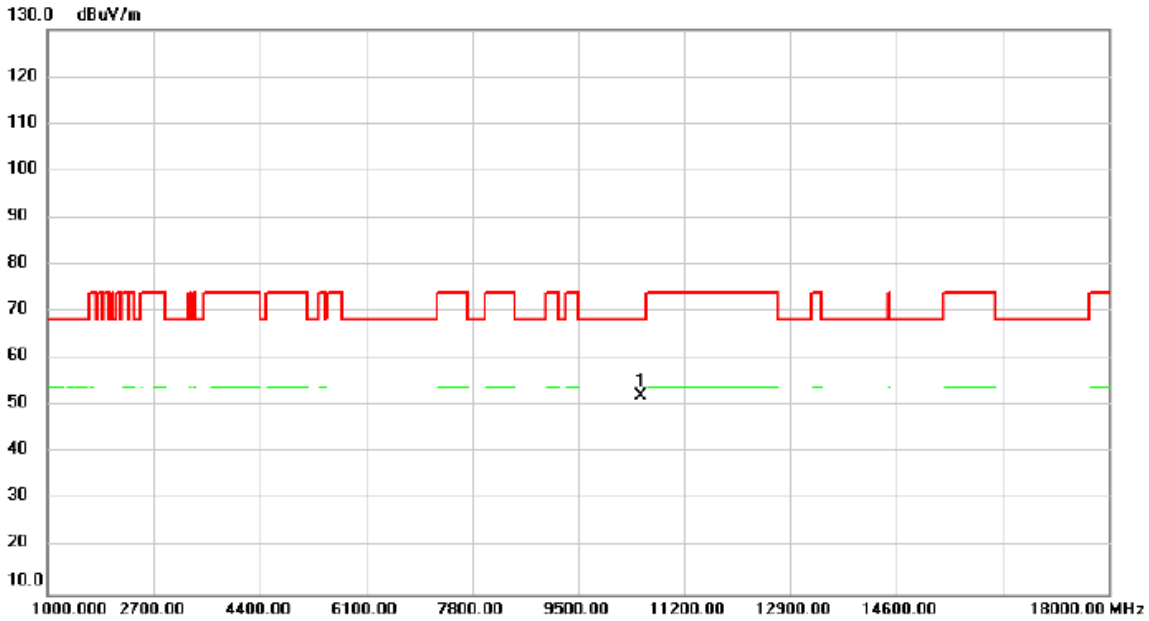


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10500.00	46.76	5.28	52.04	68.20	-16.16	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/12/13
Test Frequency	5570MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

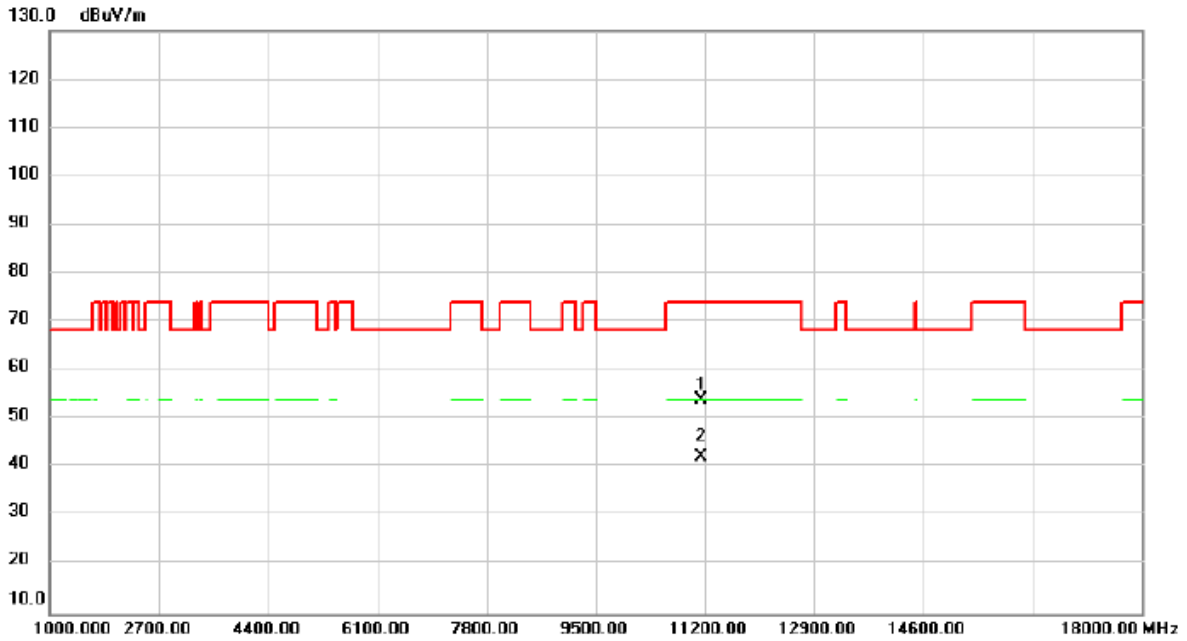


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11140.00	47.41	6.52	53.93	74.00	-20.07	peak	
2	*	11140.00	35.67	6.52	42.19	54.00	-11.81	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/12/13
Test Frequency	5570MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

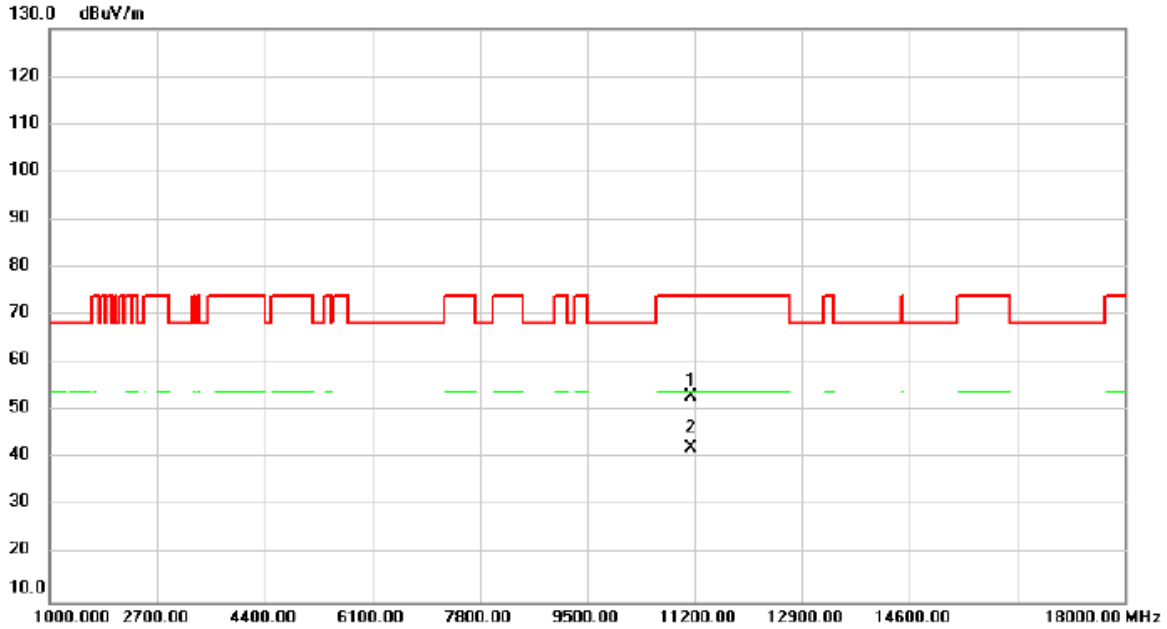


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11140.00	46.52	6.52	53.04	74.00	-20.96	peak	
2	*	11140.00	35.70	6.52	42.22	54.00	-11.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5180MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

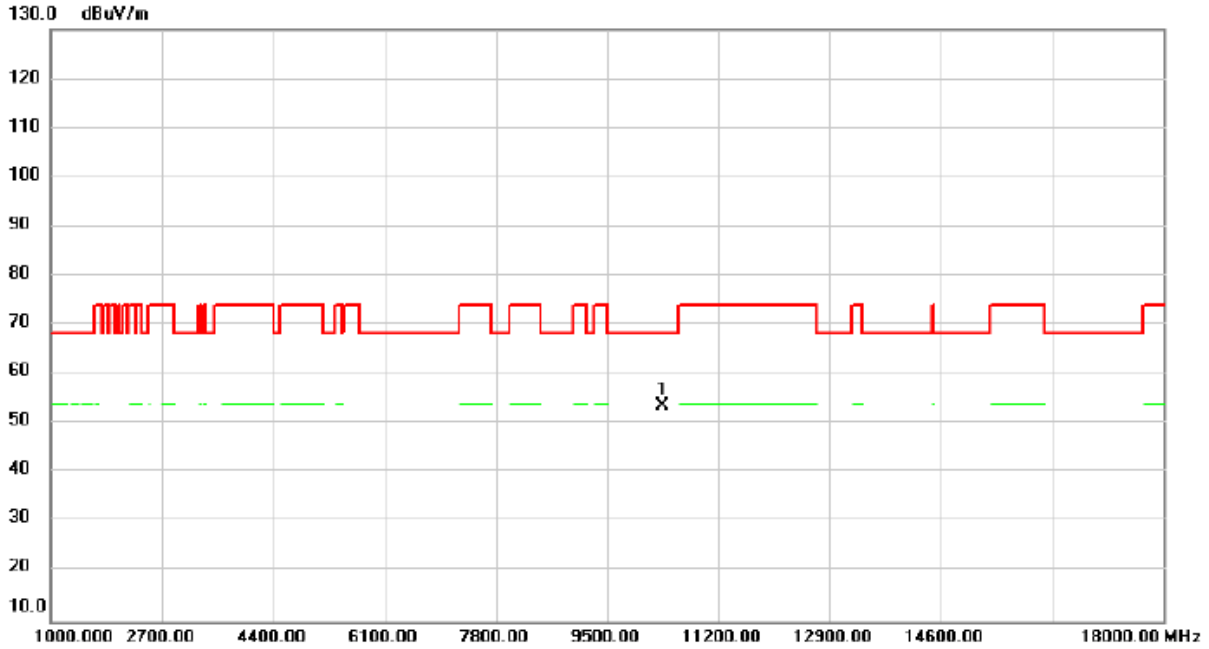


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10360.00	48.13	5.53	53.66	68.20	-14.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5180MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

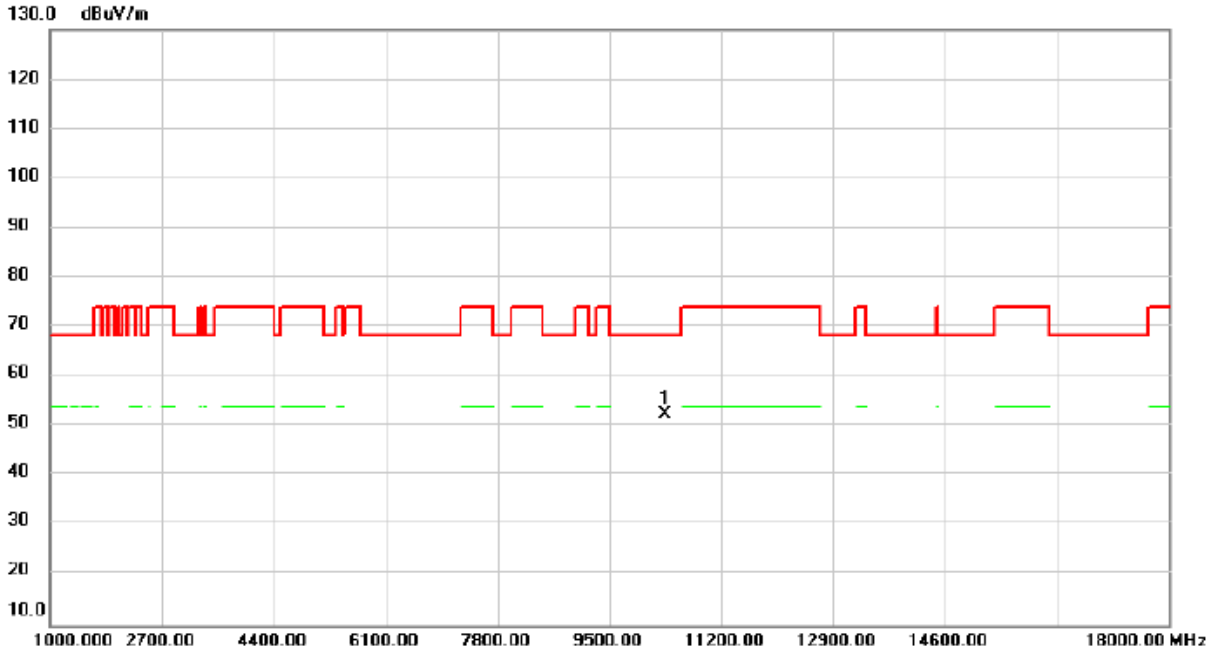


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10360.00	46.90	5.53	52.43	68.20	-15.77	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5200MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

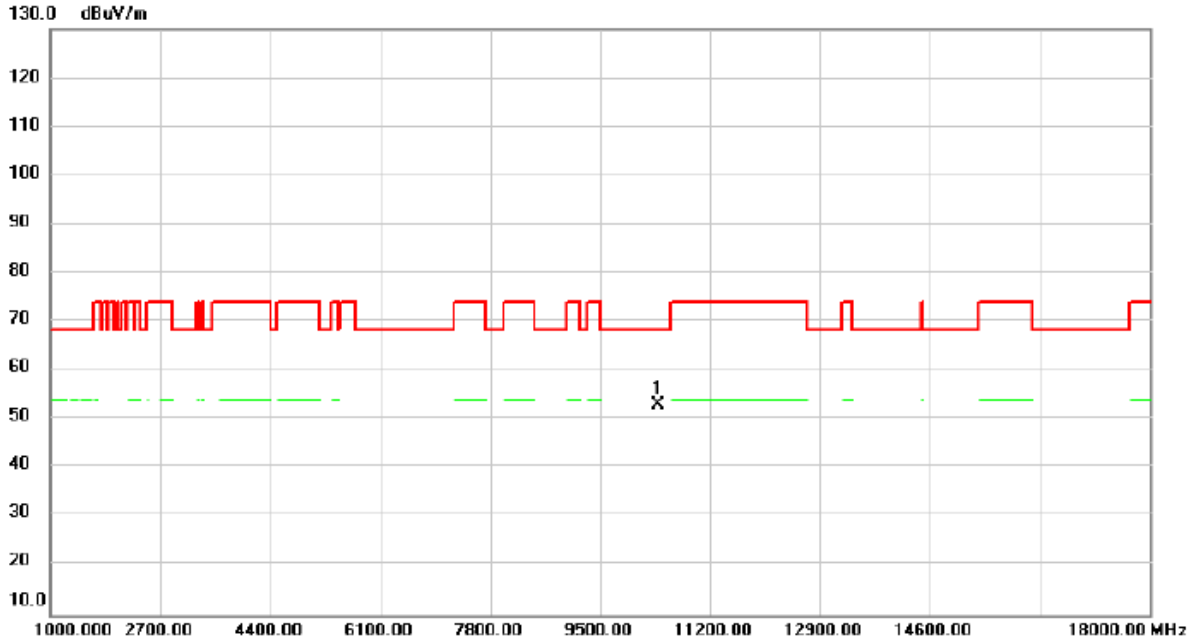


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10400.00	47.60	5.45	53.05	68.20	-15.15	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5200MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

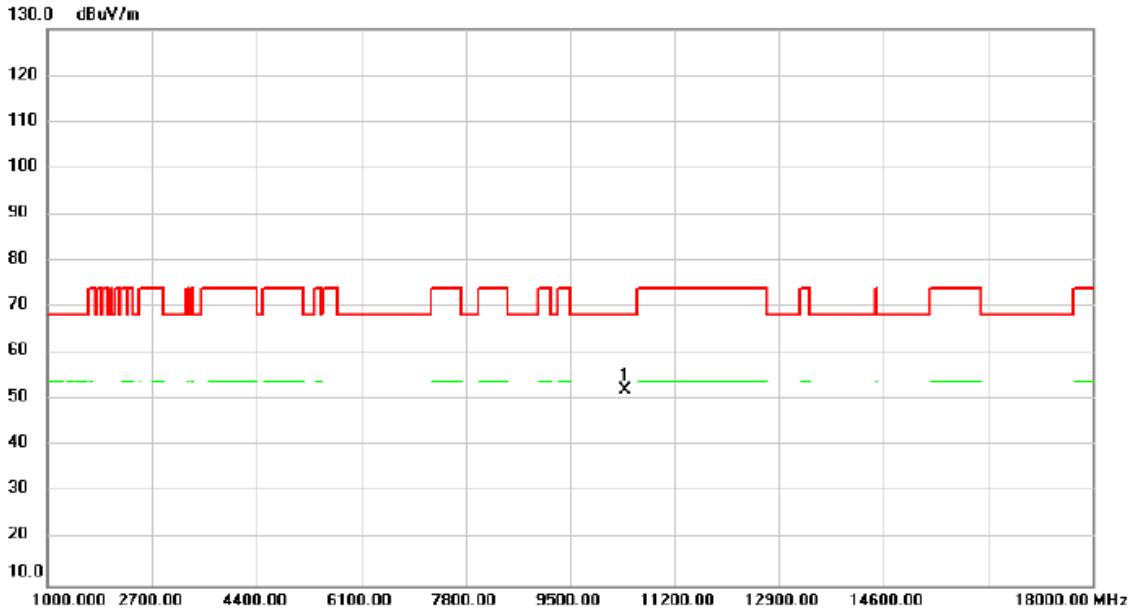


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10400.00	46.84	5.45	52.29	68.20	-15.91	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5240MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

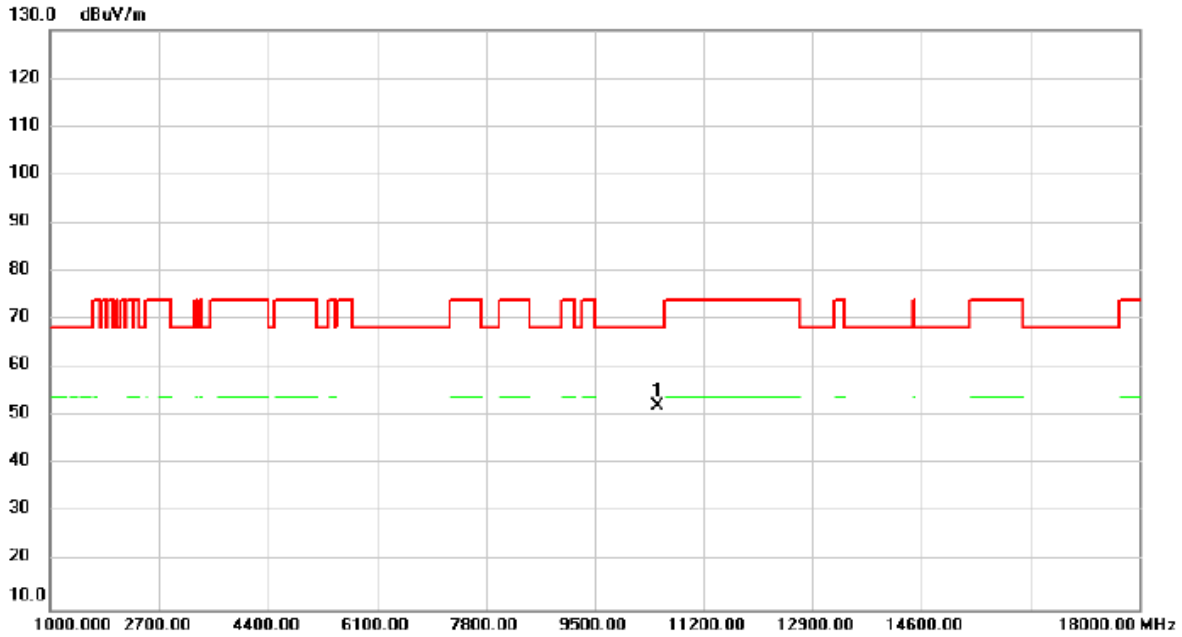


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10480.00	46.90	5.31	52.21	68.20	-15.99	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5240MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

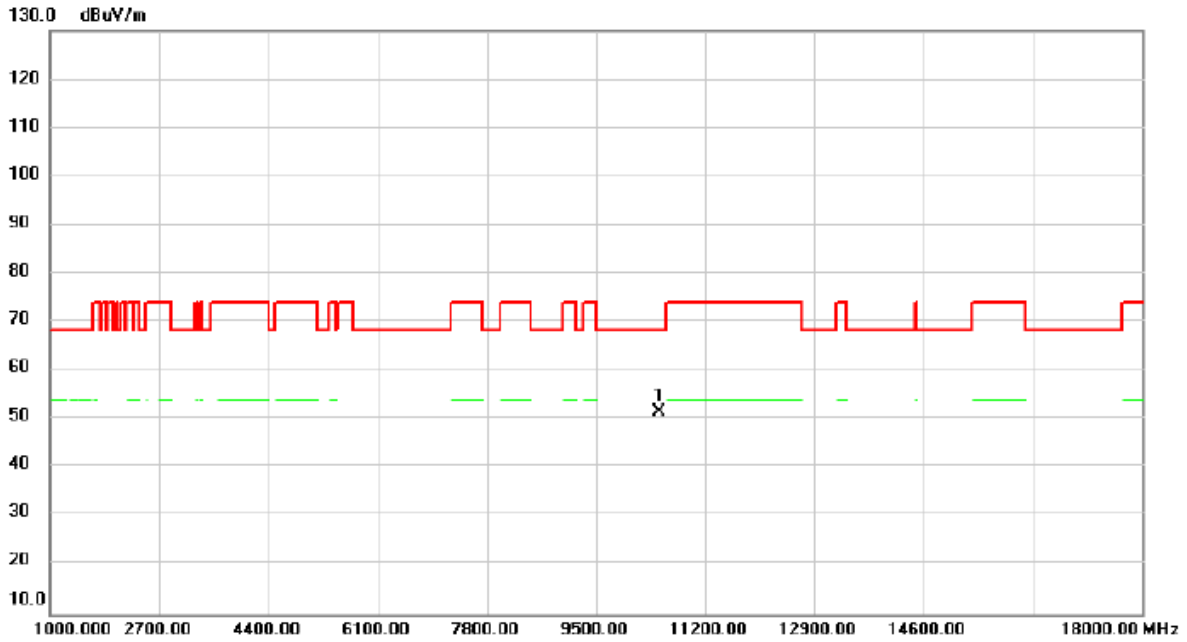


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	46.24	5.31	51.55	68.20	-16.65	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5260MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

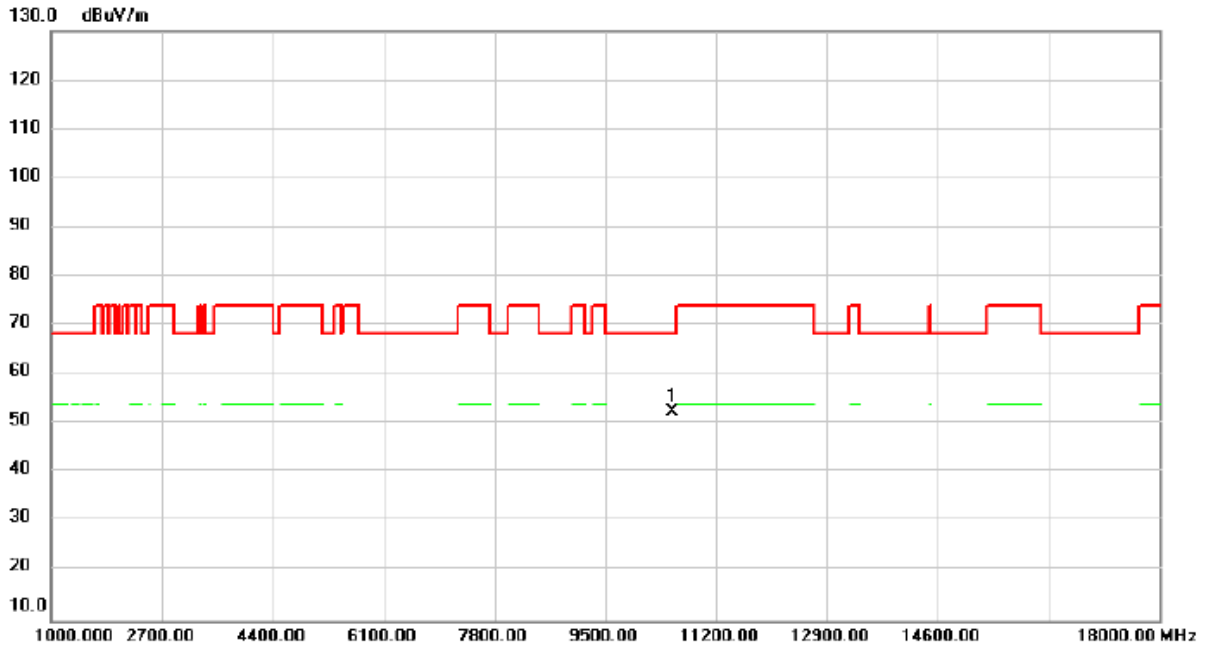


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10520.00	47.26	5.32	52.58	68.20	-15.62	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5260MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

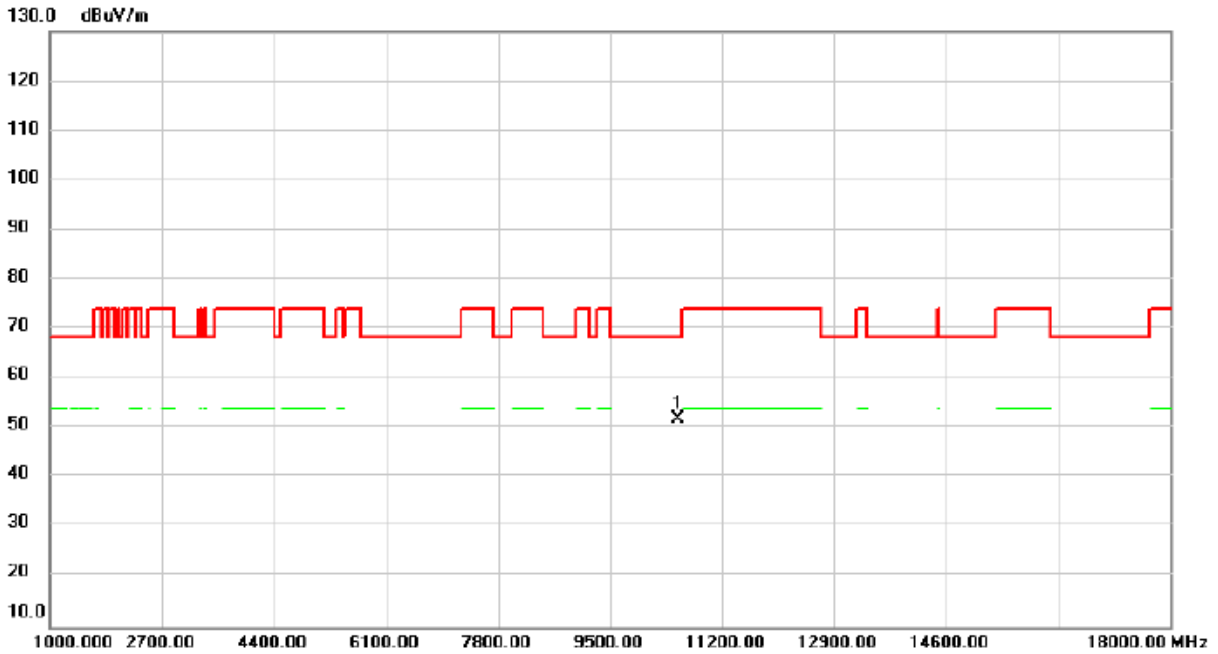


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10520.00	46.41	5.32	51.73	68.20	-16.47	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5300MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

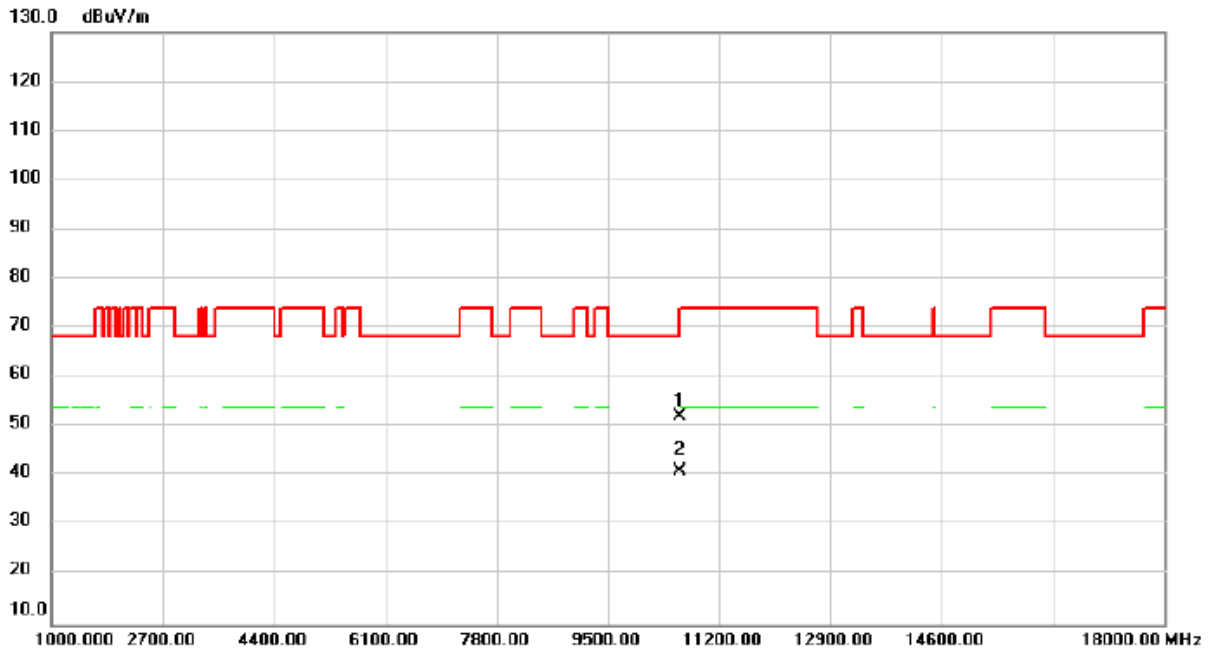


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.00	46.68	5.51	52.19	68.20	-16.01	peak	
2	*	10600.00	35.62	5.51	41.13	54.00	-12.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5300MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

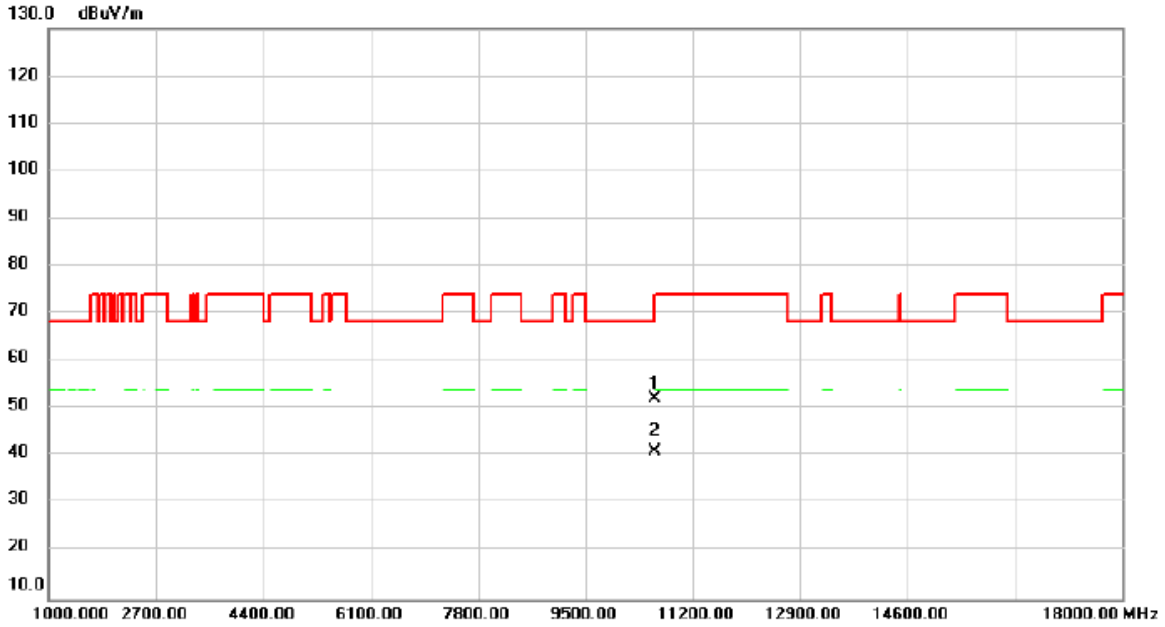


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.00	46.54	5.51	52.05	68.20	-16.15	peak	
2	*	10600.00	35.42	5.51	40.93	54.00	-13.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5320MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

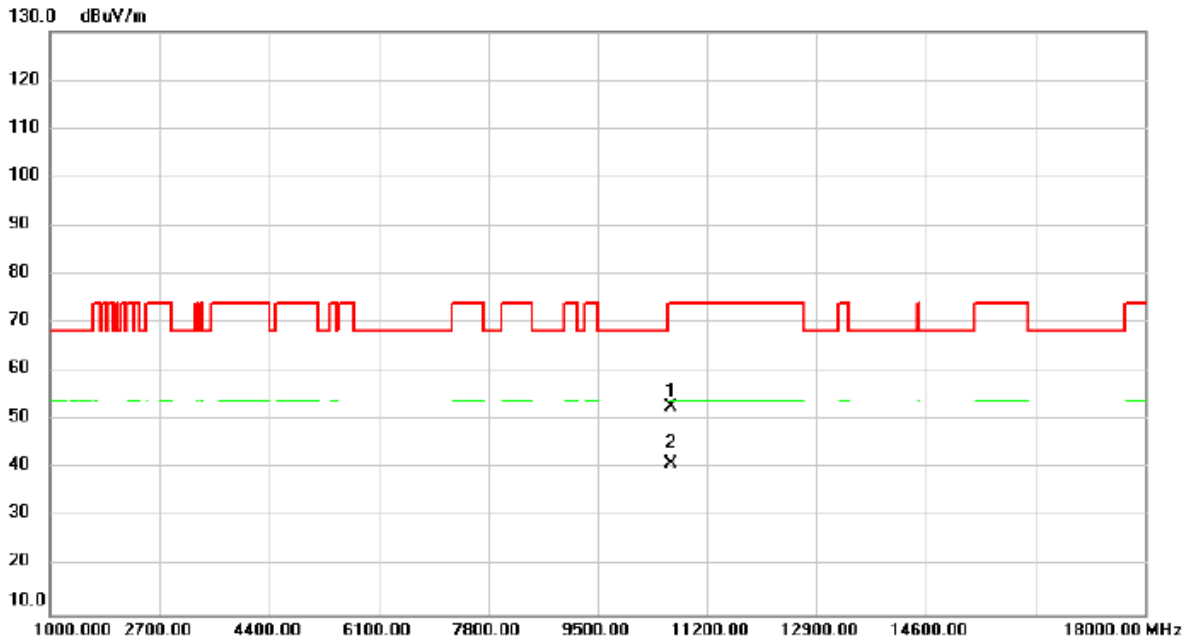


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	47.13	5.61	52.74	74.00	-21.26	peak	
2	*	10640.00	35.30	5.61	40.91	54.00	-13.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5320MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

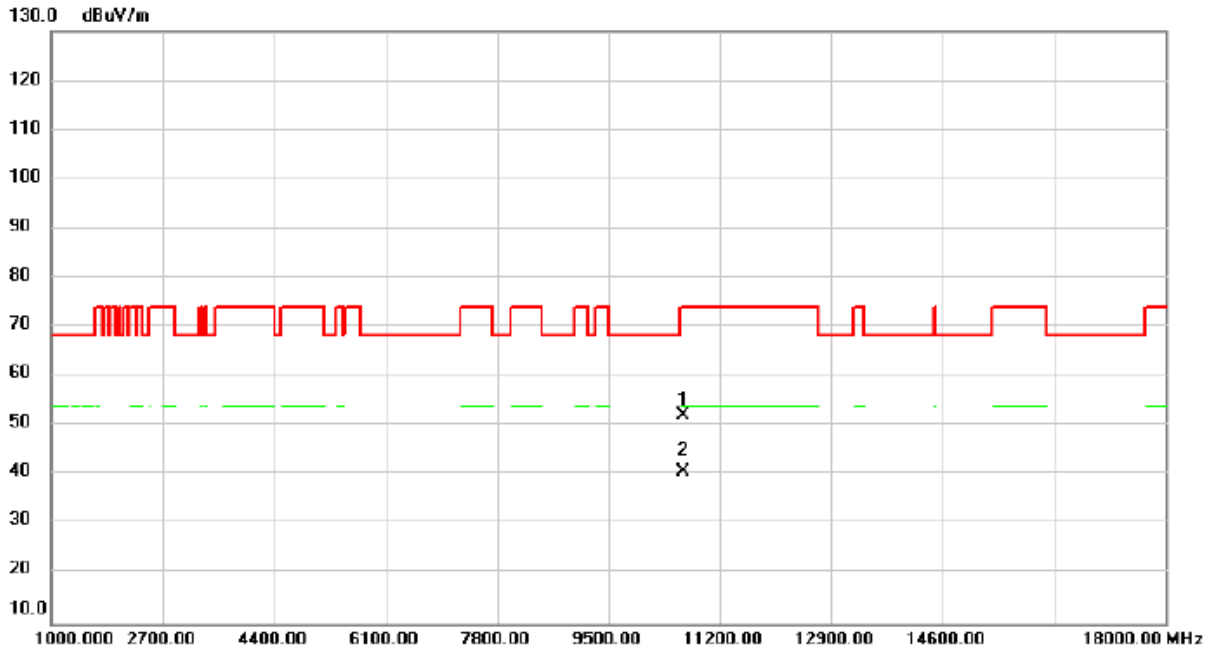


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	46.48	5.61	52.09	74.00	-21.91	peak	
2	*	10640.00	35.22	5.61	40.83	54.00	-13.17	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5500MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

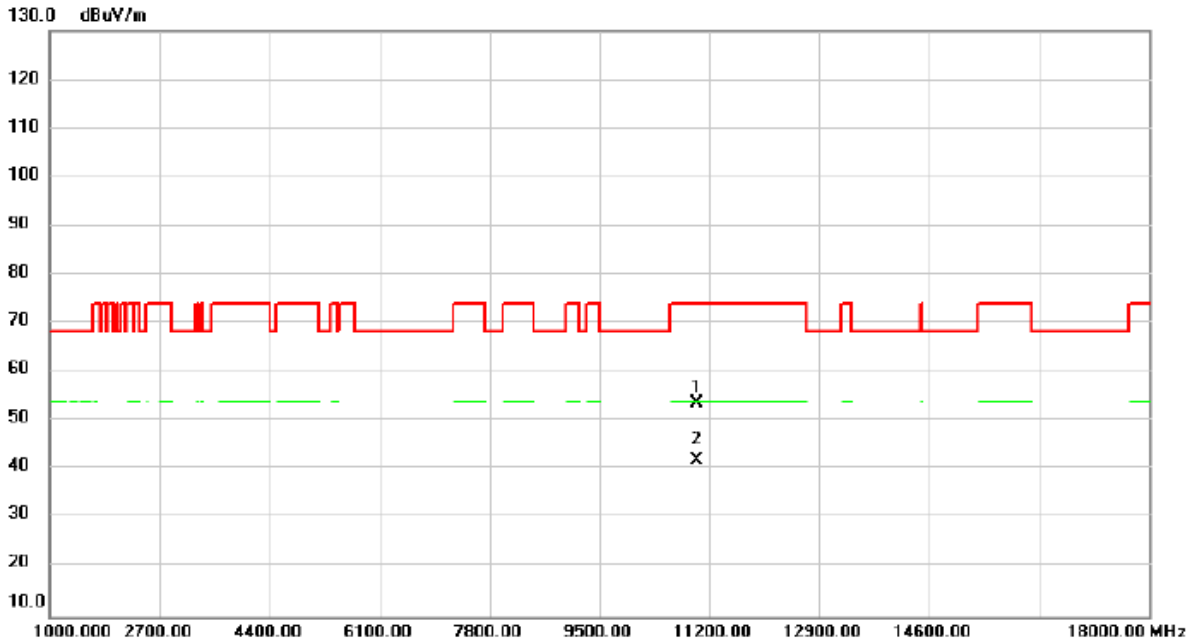

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11000.00	47.33	6.44	53.77	74.00	-20.23	peak	
2	*	11000.00	35.60	6.44	42.04	54.00	-11.96	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5500MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

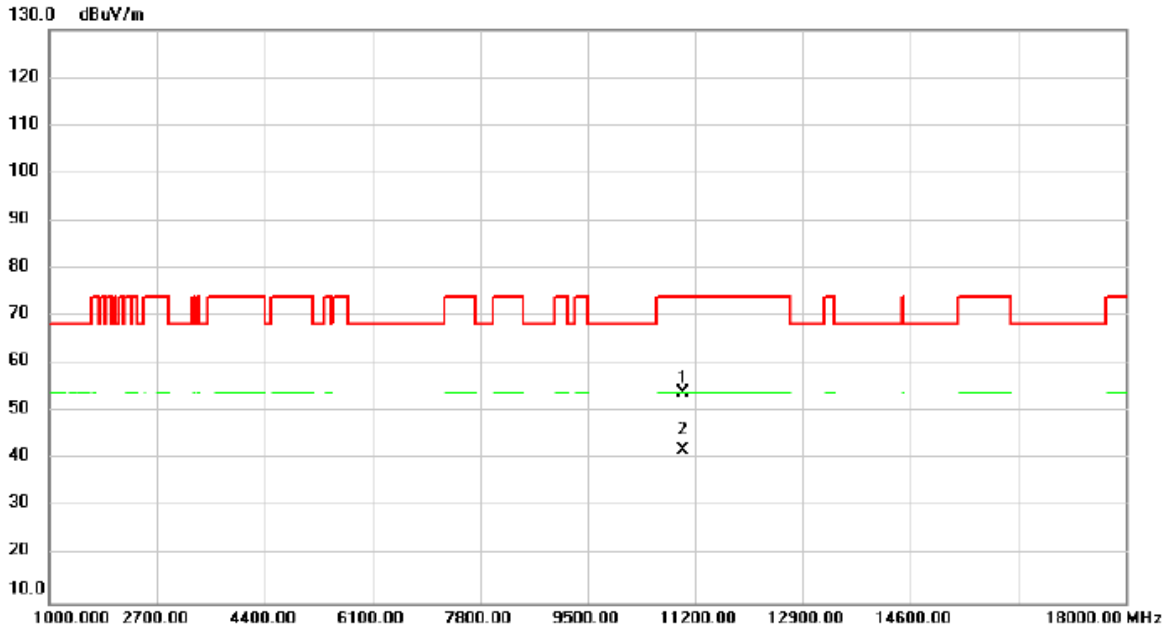


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	47.52	6.44	53.96	74.00	-20.04	peak	
2	*	11000.00	35.43	6.44	41.87	54.00	-12.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5580MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

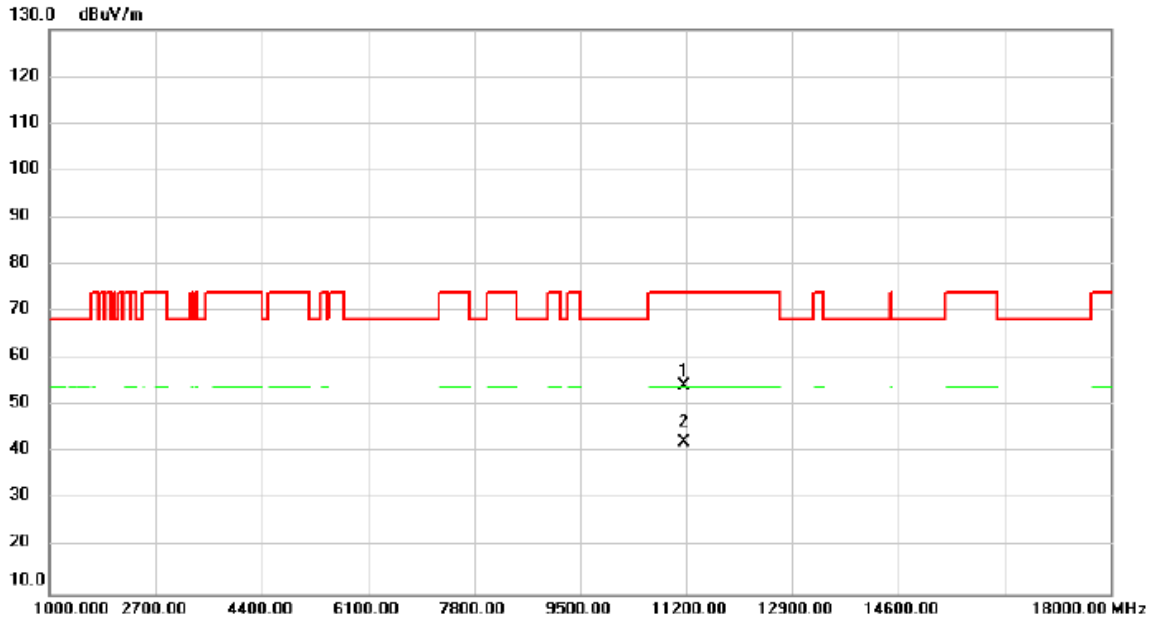


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	47.76	6.54	54.30	74.00	-19.70	peak	
2	*	11160.00	35.63	6.54	42.17	54.00	-11.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5580MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

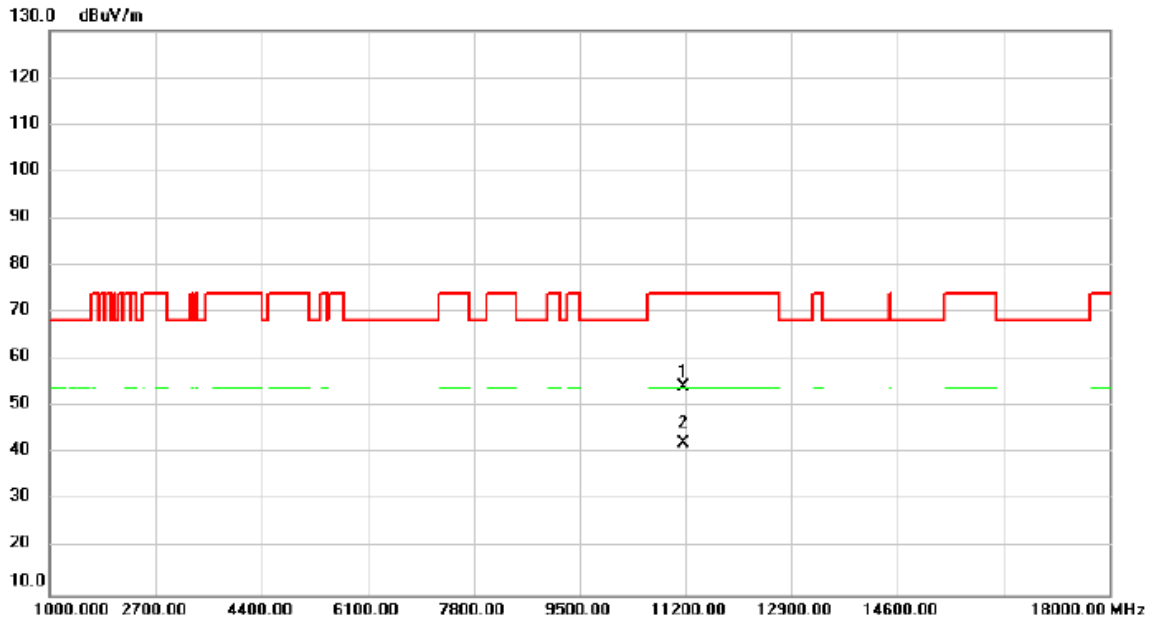


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	47.62	6.54	54.16	74.00	-19.84	peak	
2	*	11160.00	35.70	6.54	42.24	54.00	-11.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5700MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

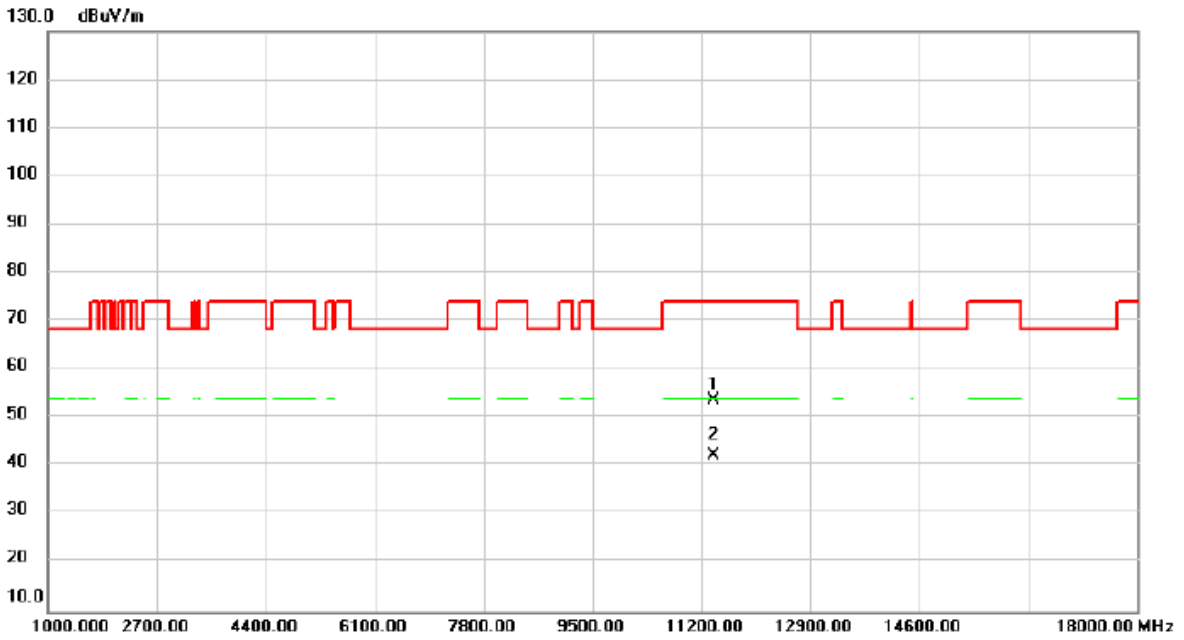


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	46.98	6.68	53.66	74.00	-20.34	peak	
2	*	11400.00	35.64	6.68	42.32	54.00	-11.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5700MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

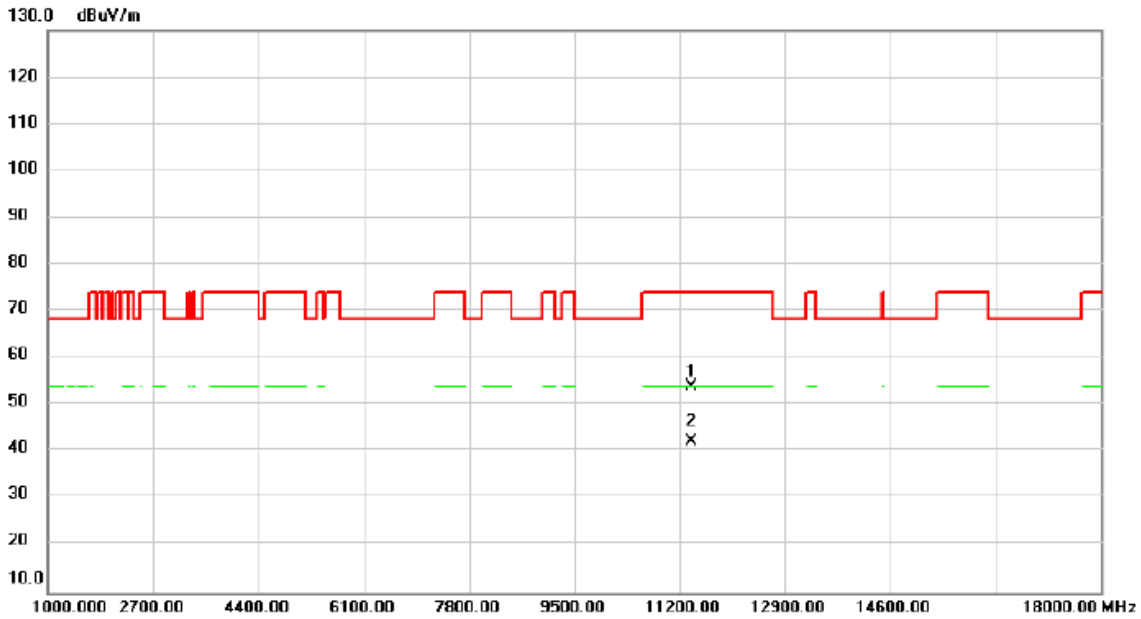


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	47.22	6.68	53.90	74.00	-20.10	peak	
2	*	11400.00	35.62	6.68	42.30	54.00	-11.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5745MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

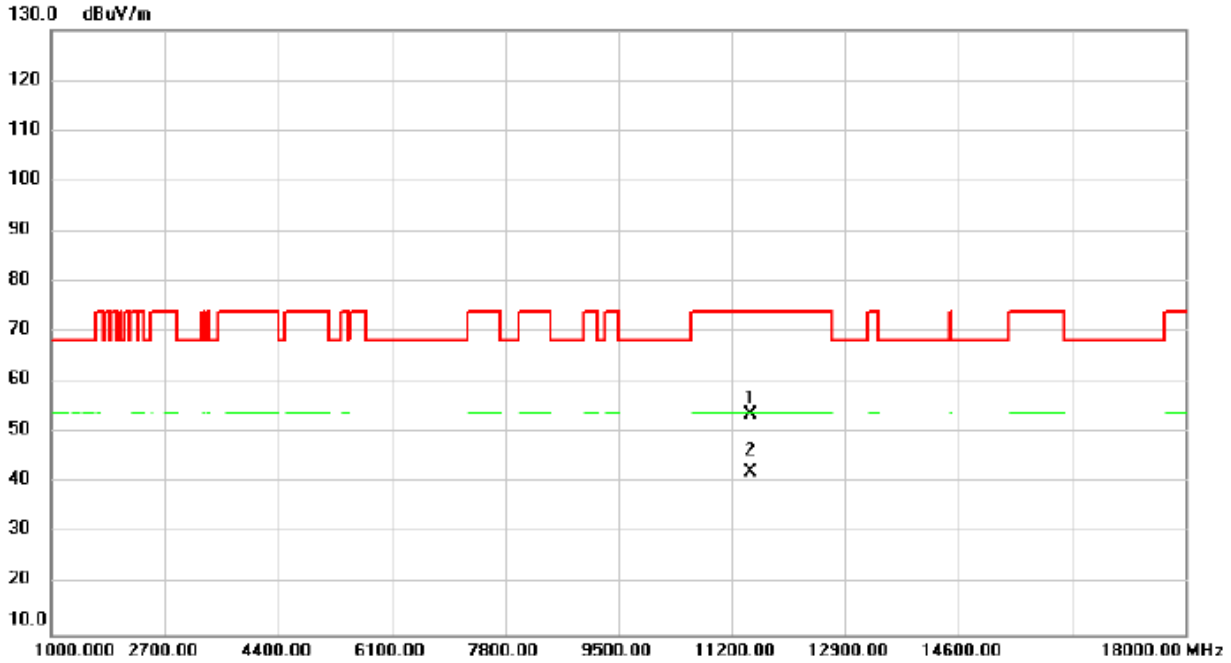


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	46.98	6.74	53.72	74.00	-20.28	peak	
2	*	11490.00	35.52	6.74	42.26	54.00	-11.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5745MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

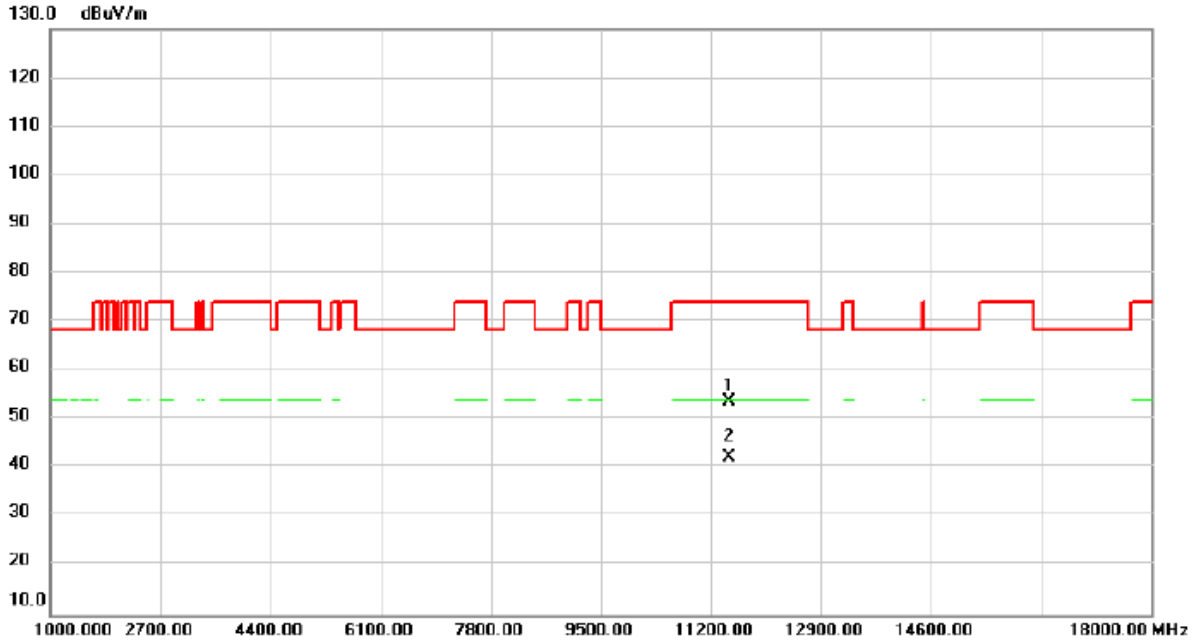


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	46.82	6.74	53.56	74.00	-20.44	peak	
2	*	11490.00	35.57	6.74	42.31	54.00	-11.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5785MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

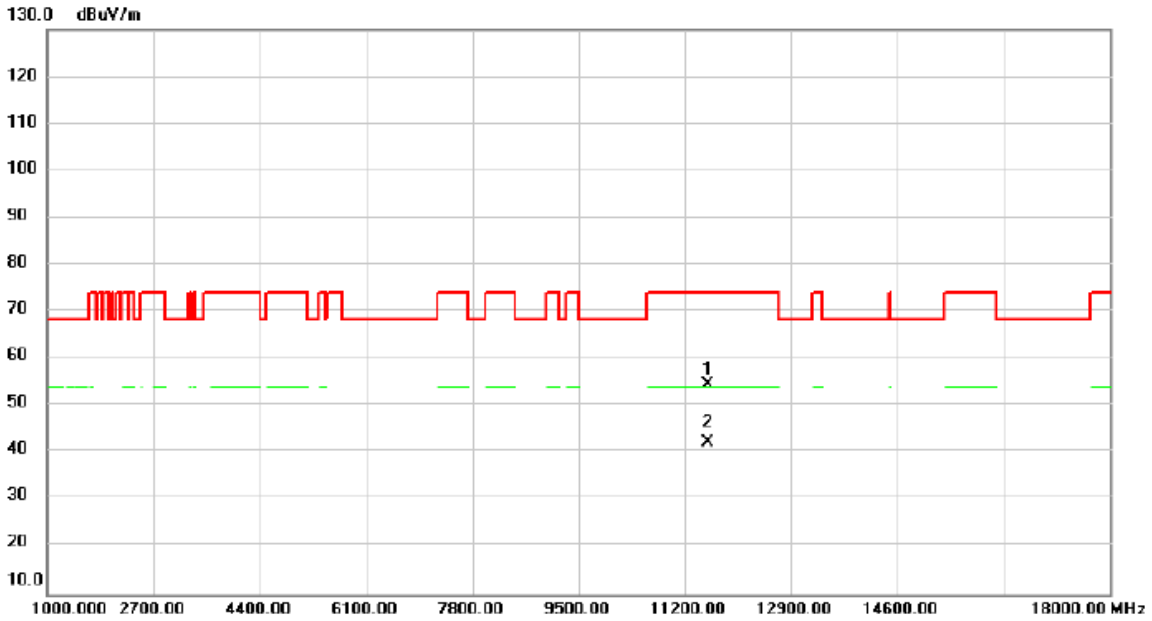


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	47.97	6.70	54.67	74.00	-19.33	peak	
2	*	11570.00	35.45	6.70	42.15	54.00	-11.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5785MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

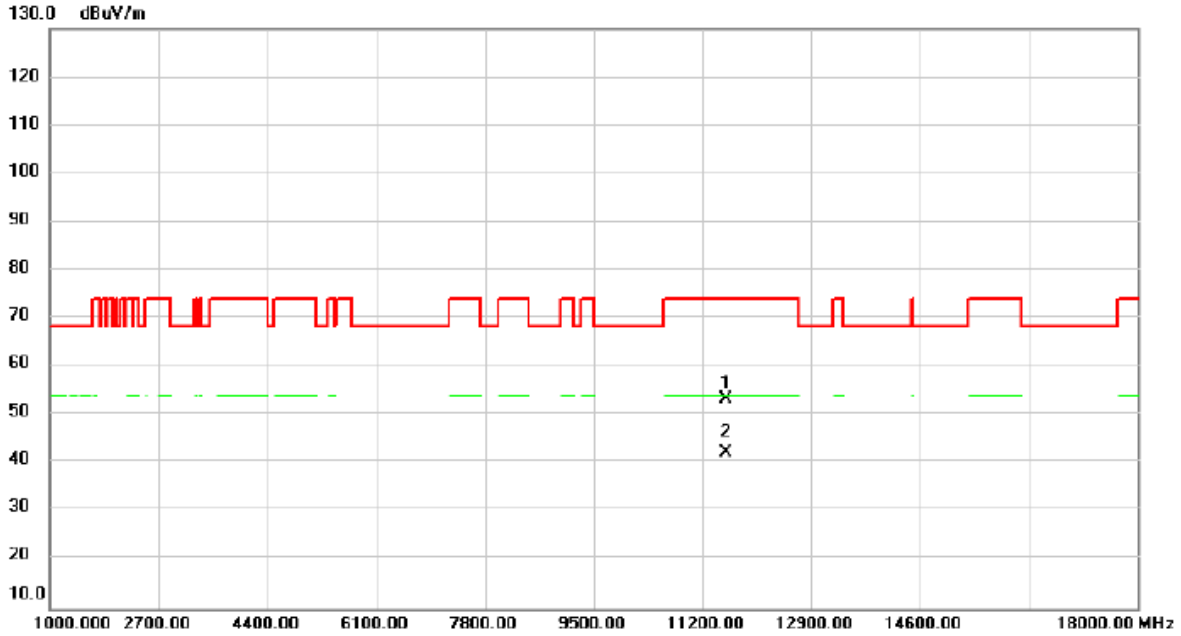


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	46.65	6.70	53.35	74.00	-20.65	peak	
2	*	11570.00	35.54	6.70	42.24	54.00	-11.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5825MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

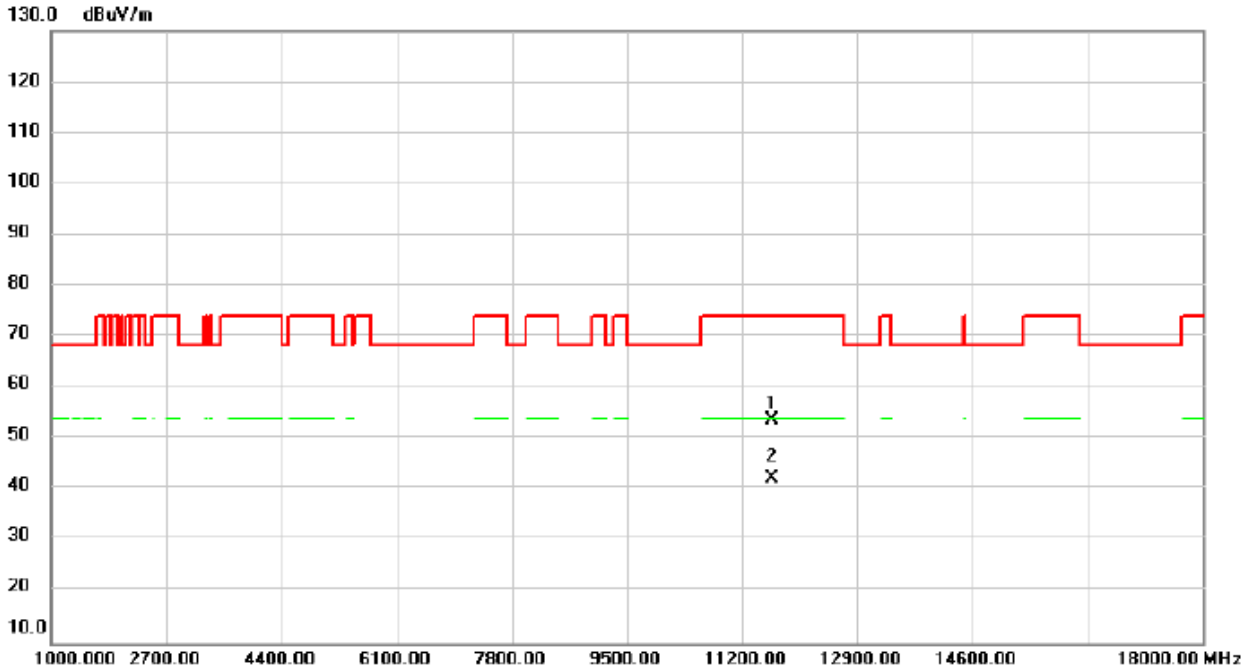


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	46.96	6.64	53.60	74.00	-20.40	peak	
2	*	11650.00	35.58	6.64	42.22	54.00	-11.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2023/12/13
Test Frequency	5825MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

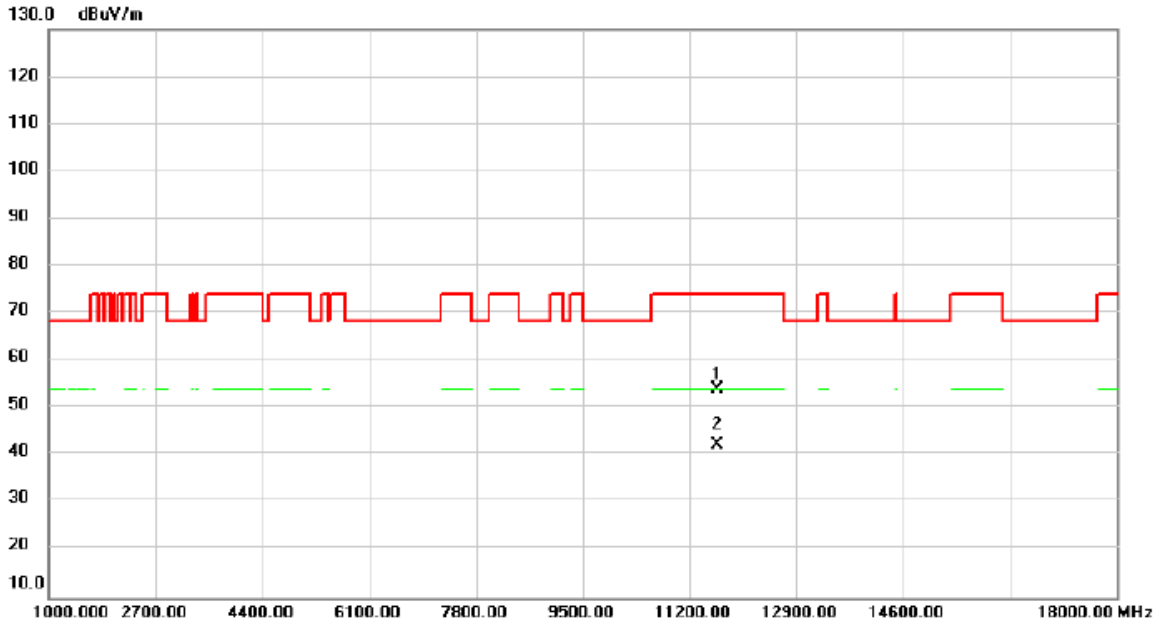


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	47.39	6.64	54.03	74.00	-19.97	peak	
2	*	11650.00	35.71	6.64	42.35	54.00	-11.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/13
Test Frequency	5190MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

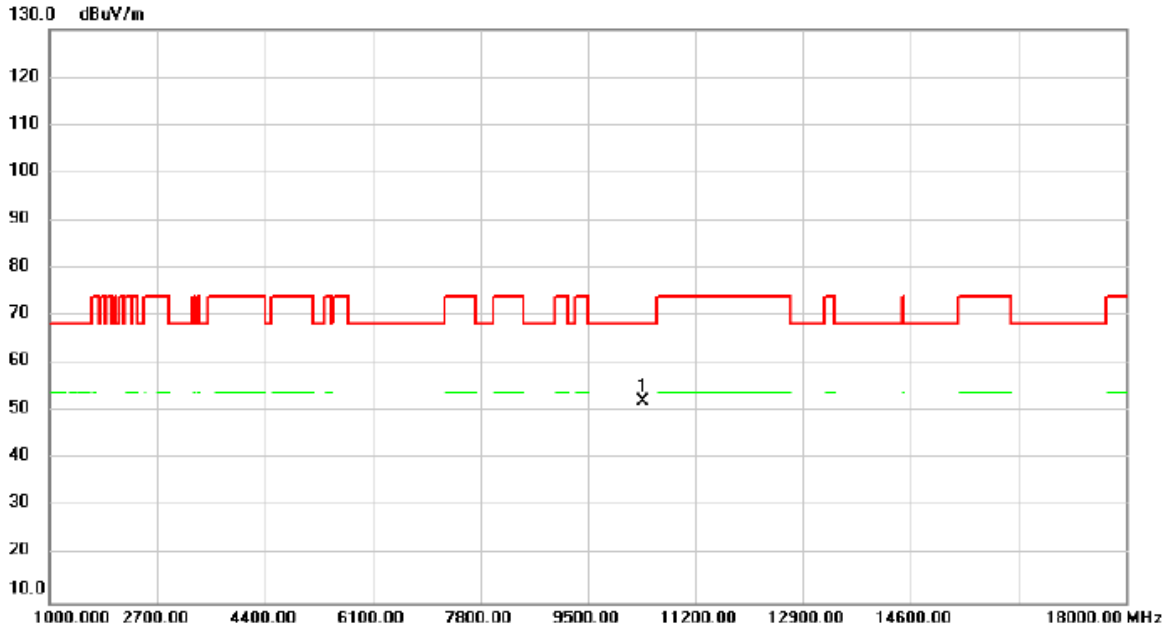


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	46.62	5.50	52.12	68.20	-16.08	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/13
Test Frequency	5190MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

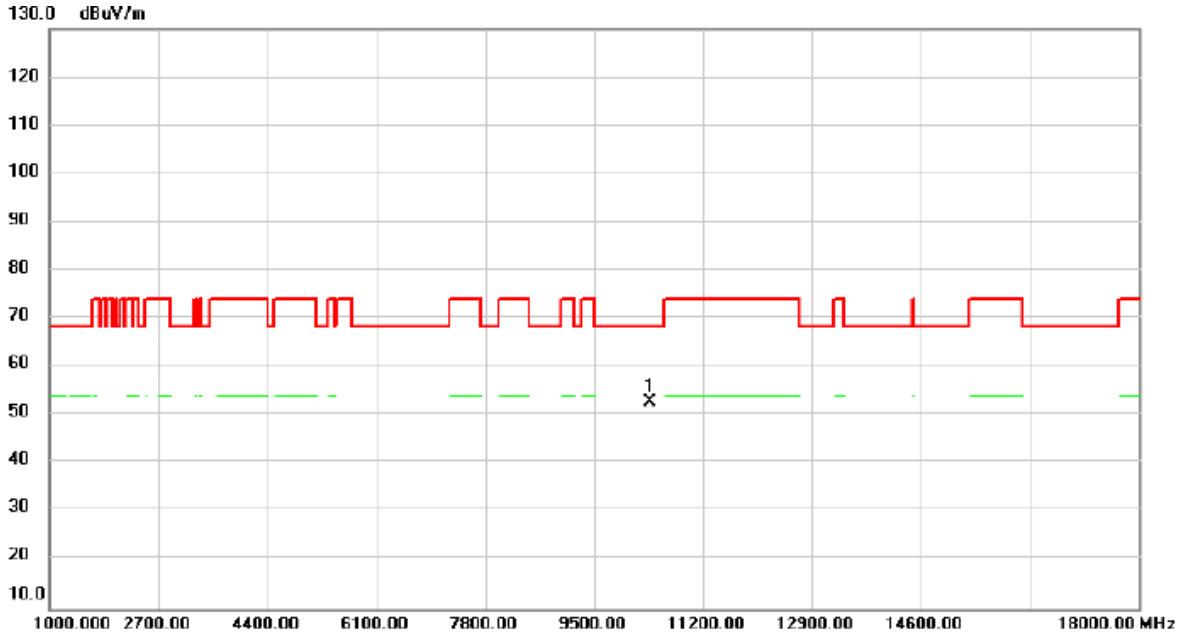


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10380.00	47.37	5.50	52.87	68.20	-15.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/13
Test Frequency	5230MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

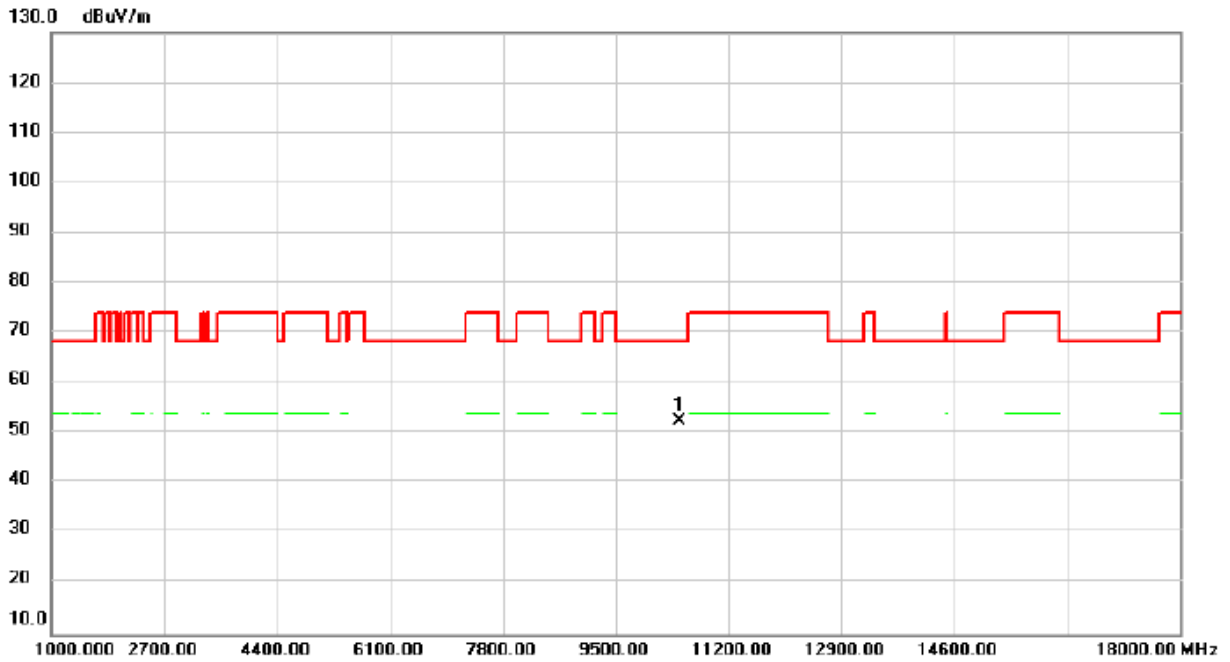


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10460.00	47.03	5.36	52.39	68.20	-15.81	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/13
Test Frequency	5230MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

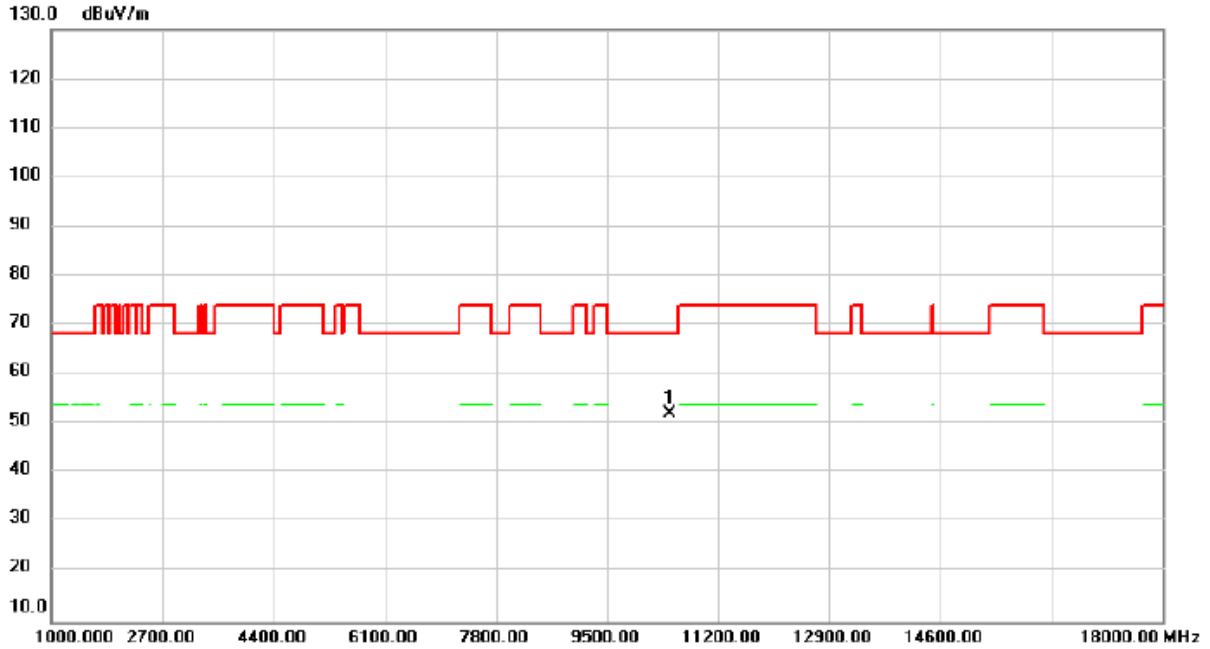


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	46.79	5.36	52.15	68.20	-16.05	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/13
Test Frequency	5270MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

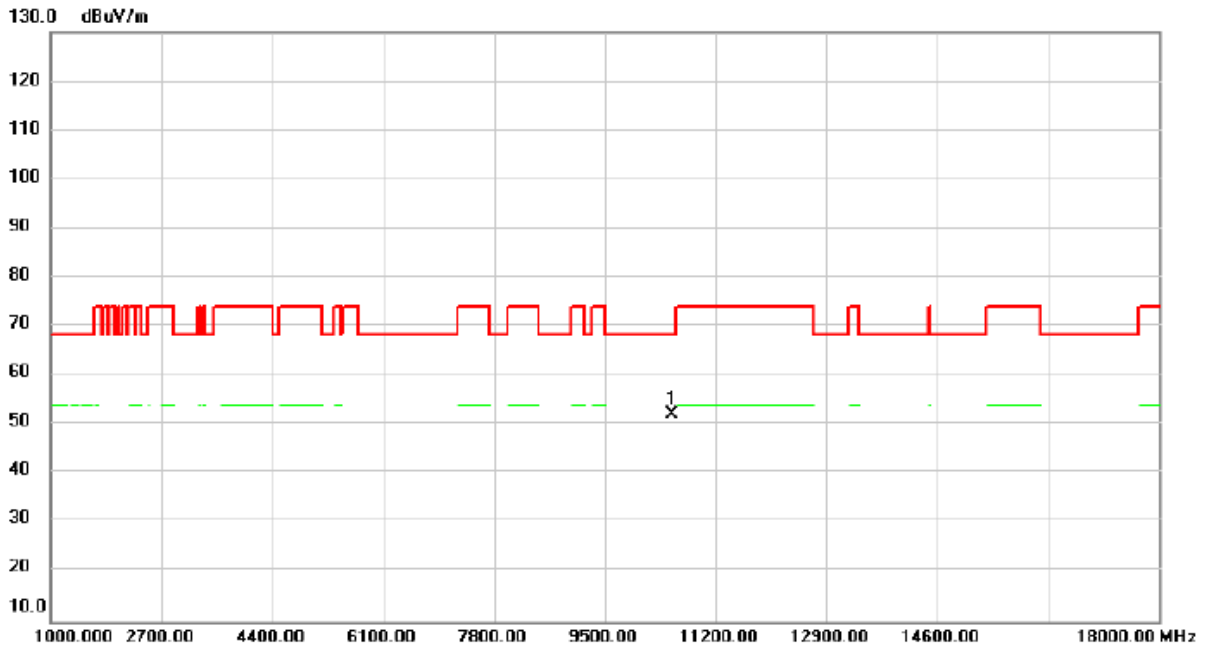


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	46.74	5.38	52.12	68.20	-16.08	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/13
Test Frequency	5270MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

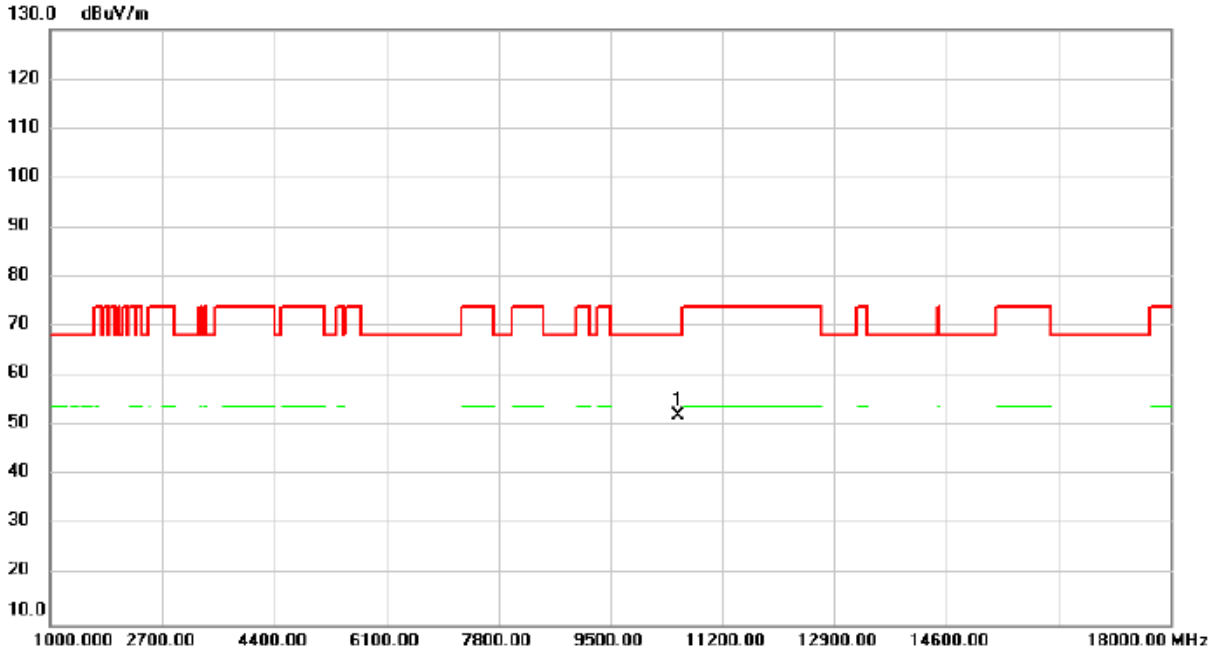


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10540.00	46.65	5.38	52.03	68.20	-16.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/13
Test Frequency	5310MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

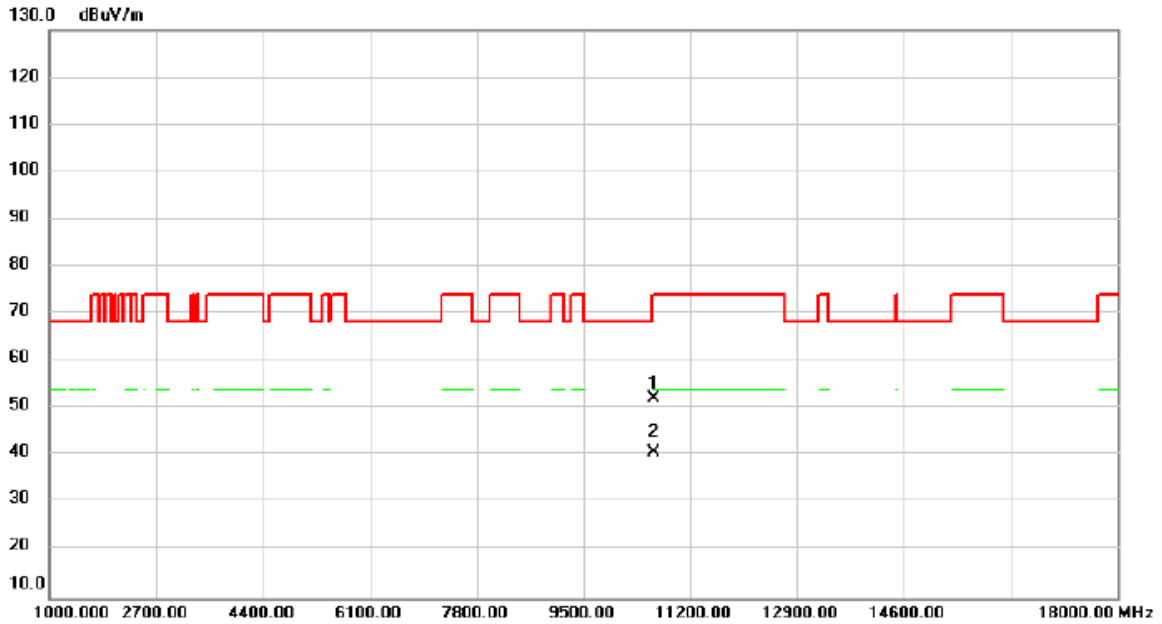


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	46.56	5.56	52.12	74.00	-21.88	peak	
2	*	10620.00	35.19	5.56	40.75	54.00	-13.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/13
Test Frequency	5310MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

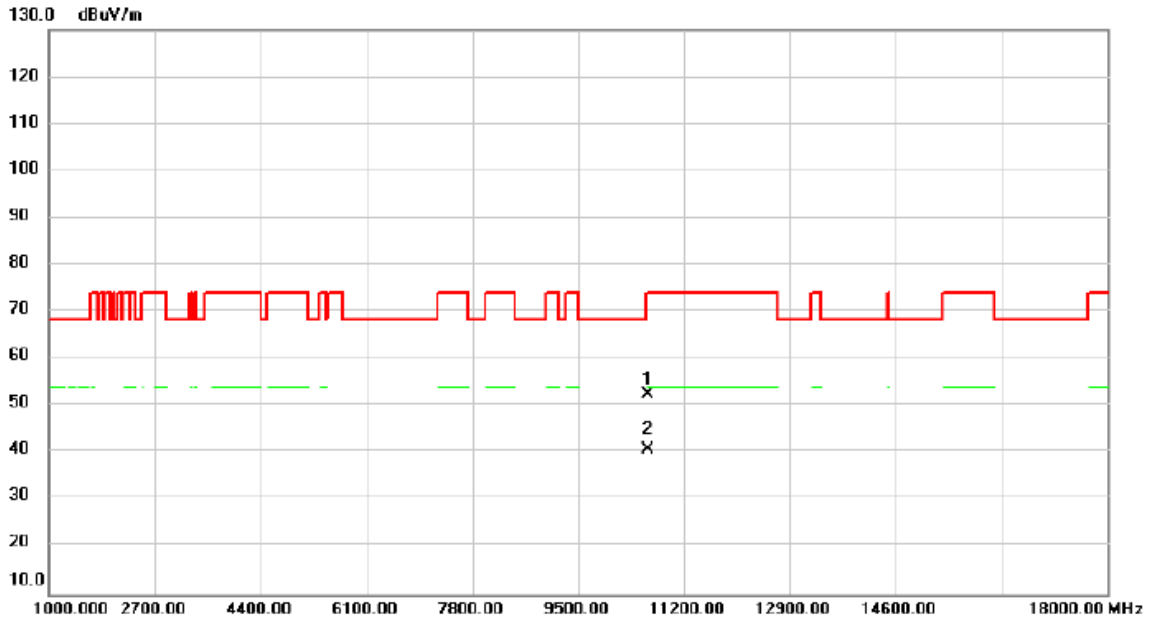


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	46.88	5.56	52.44	74.00	-21.56	peak	
2	*	10620.00	35.19	5.56	40.75	54.00	-13.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/13
Test Frequency	5510MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

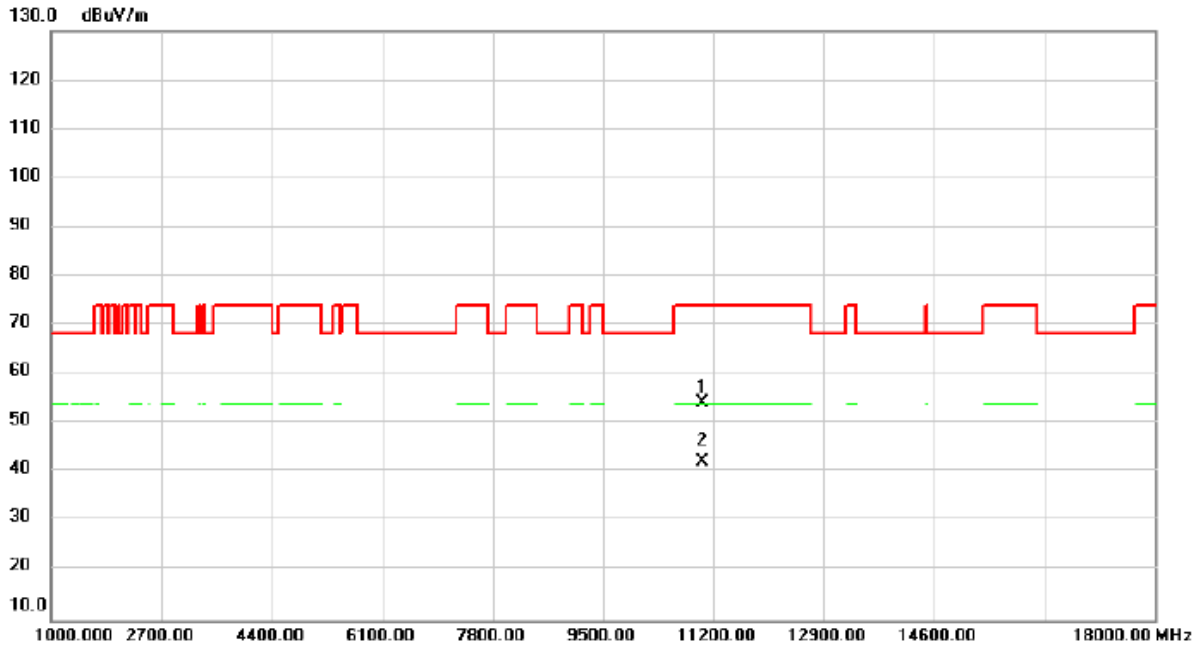


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	47.90	6.45	54.35	74.00	-19.65	peak	
2	*	11020.00	35.68	6.45	42.13	54.00	-11.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/13
Test Frequency	5510MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

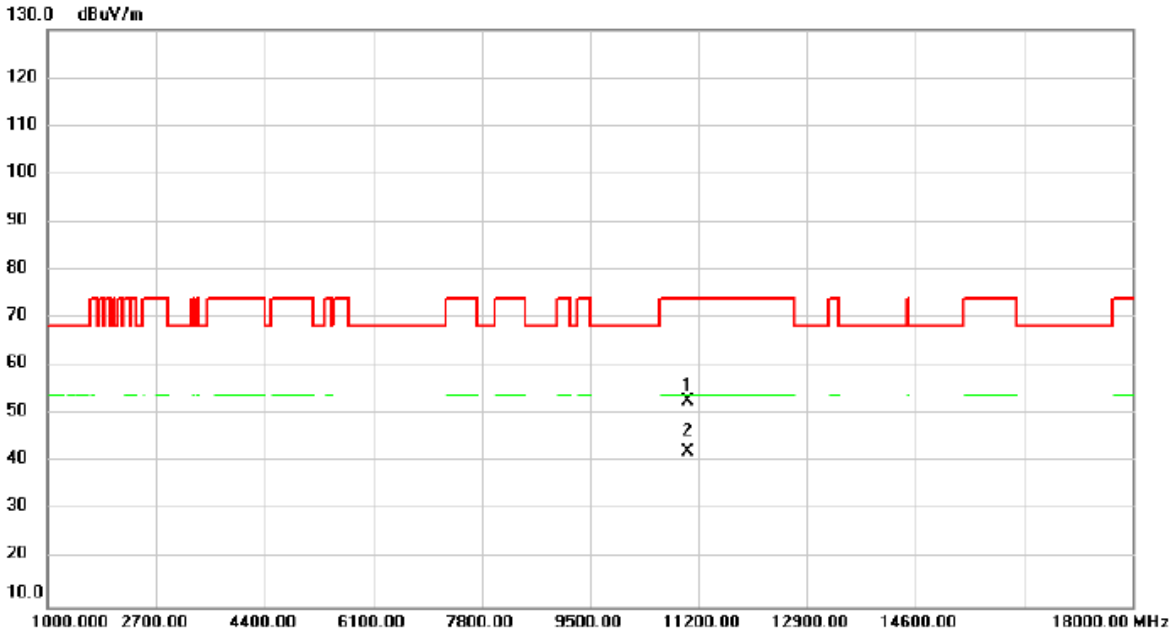


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	46.34	6.45	52.79	74.00	-21.21	peak	
2	*	11020.00	35.70	6.45	42.15	54.00	-11.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/13
Test Frequency	5550MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

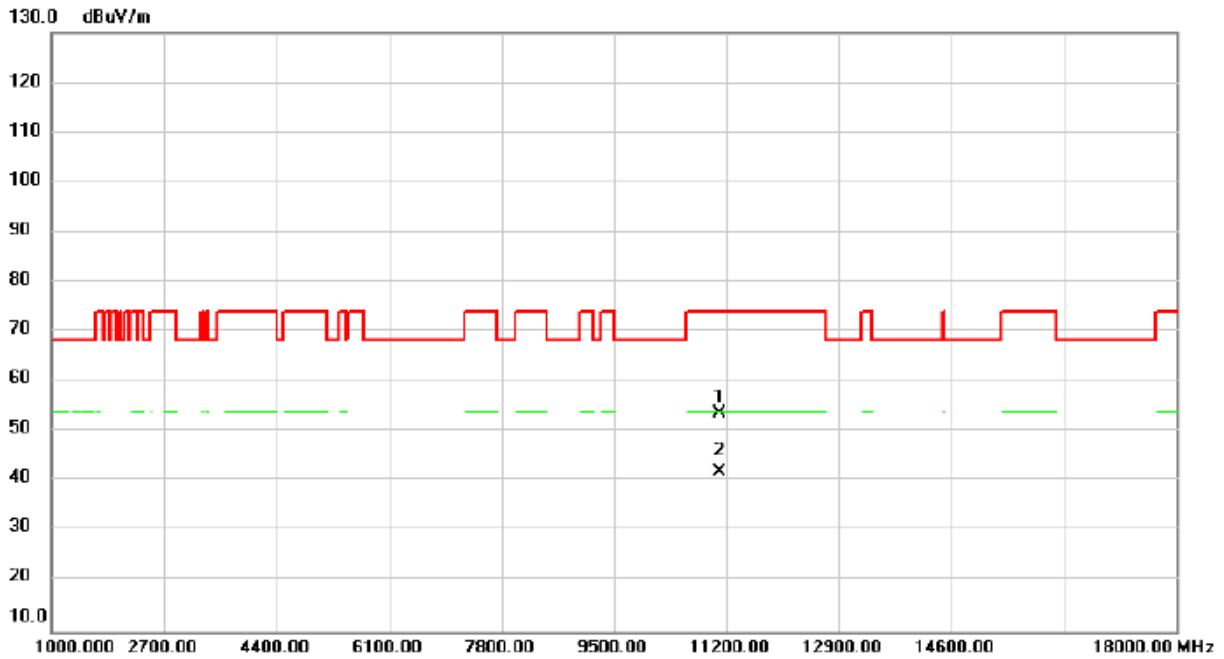

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	47.12	6.51	53.63	74.00	-20.37	peak	
2	*	11100.00	35.58	6.51	42.09	54.00	-11.91	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/13
Test Frequency	5550MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

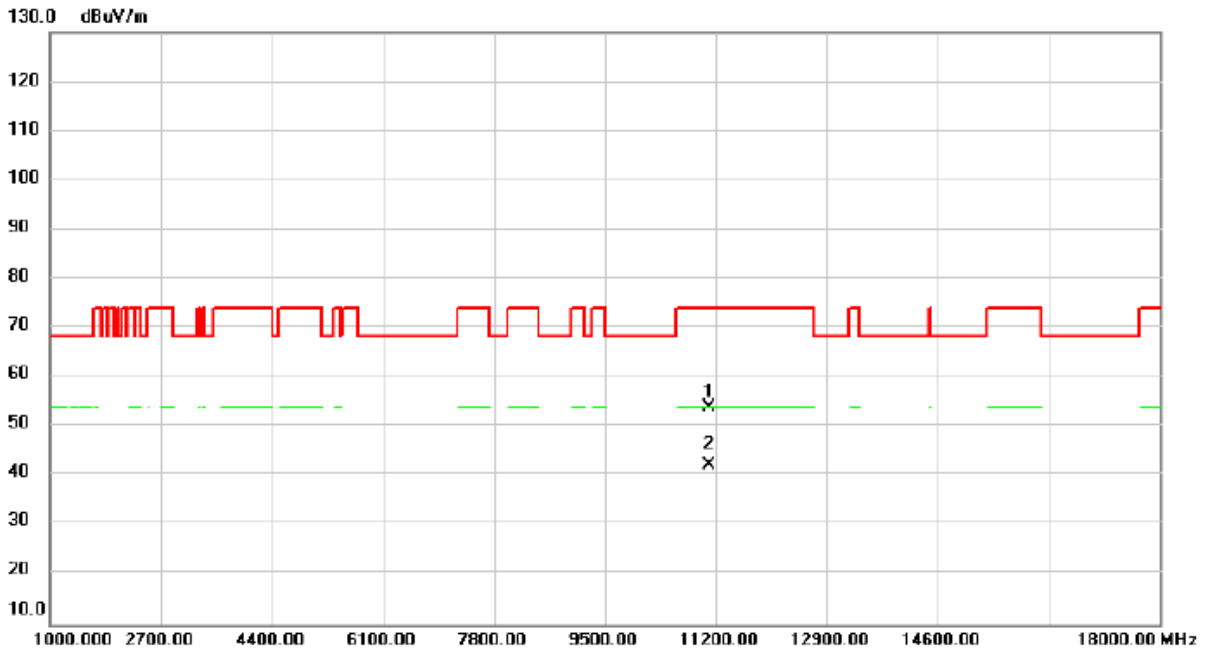


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	47.51	6.51	54.02	74.00	-19.98	peak	
2	*	11100.00	35.65	6.51	42.16	54.00	-11.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/13
Test Frequency	5670MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

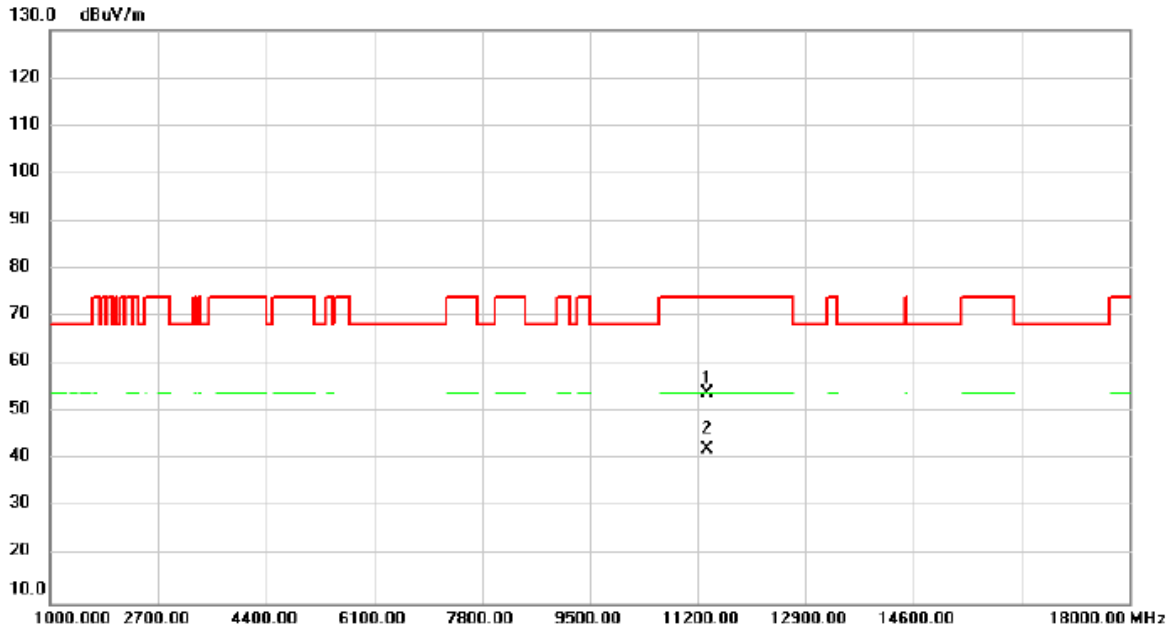


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	47.30	6.65	53.95	74.00	-20.05	peak	
2	*	11340.00	35.50	6.65	42.15	54.00	-11.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/13
Test Frequency	5670MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

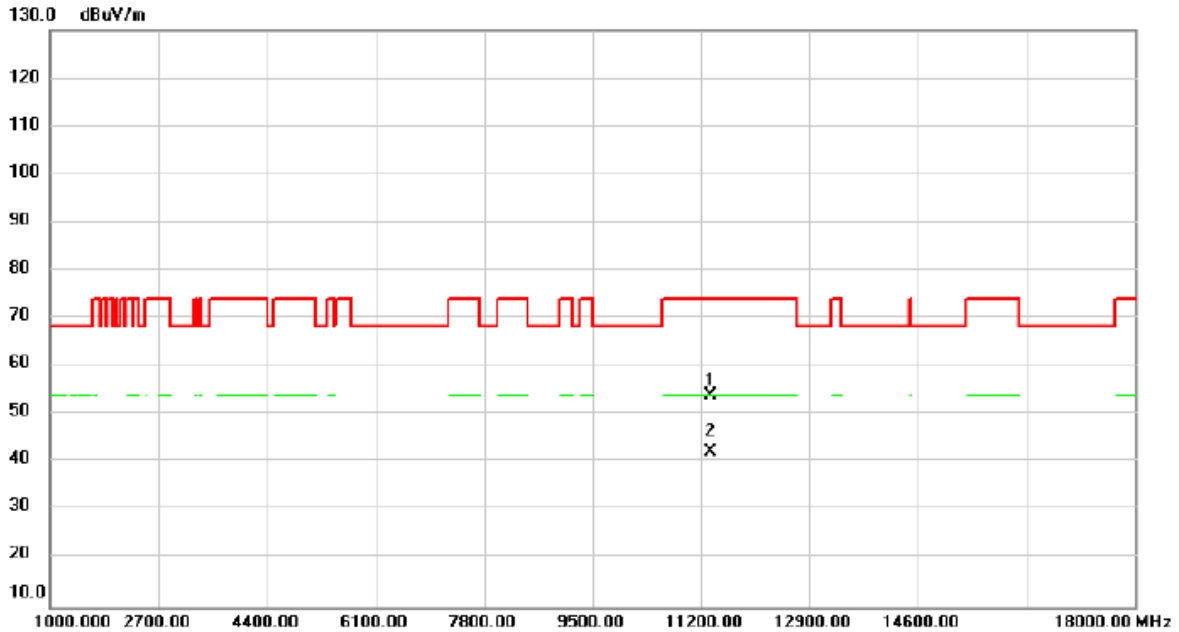


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	47.35	6.65	54.00	74.00	-20.00	peak	
2	*	11340.00	35.46	6.65	42.11	54.00	-11.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/13
Test Frequency	5755MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

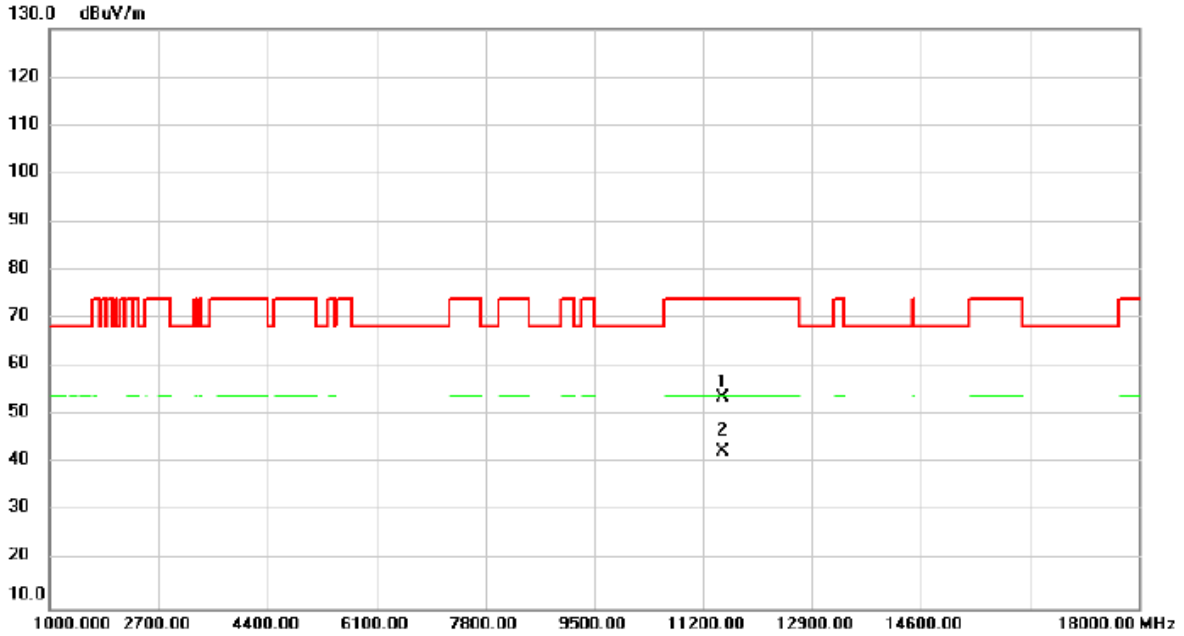


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11510.00	46.92	6.74	53.66	74.00	-20.34	peak	
2	*	11510.00	35.68	6.74	42.42	54.00	-11.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/13
Test Frequency	5755MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

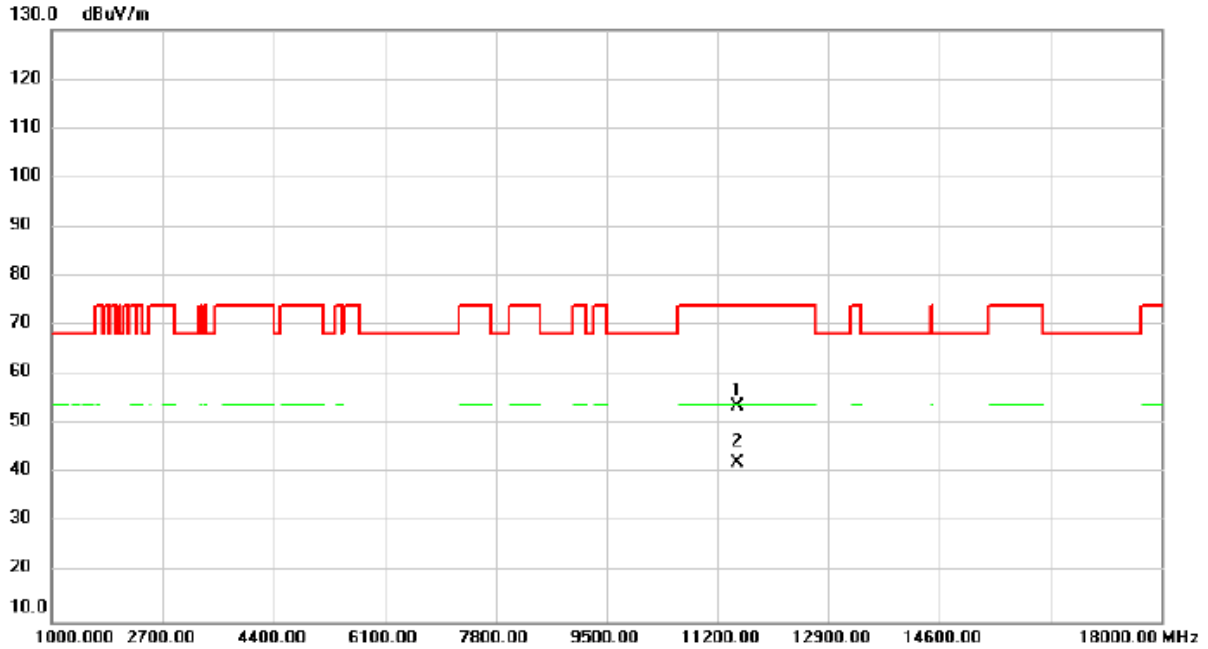


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11510.00	46.98	6.74	53.72	74.00	-20.28	peak	
2	*	11510.00	35.66	6.74	42.40	54.00	-11.60	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/13
Test Frequency	5795MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

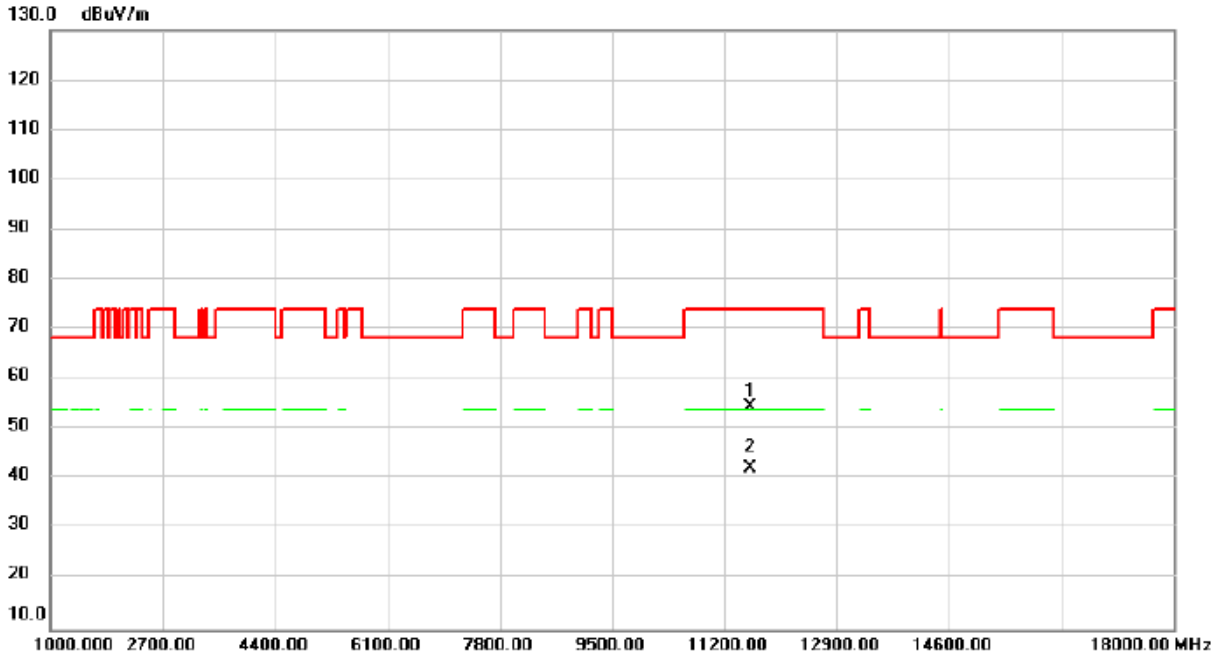


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	47.78	6.68	54.46	74.00	-19.54	peak	
2	*	11590.00	35.58	6.68	42.26	54.00	-11.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2023/12/13
Test Frequency	5795MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

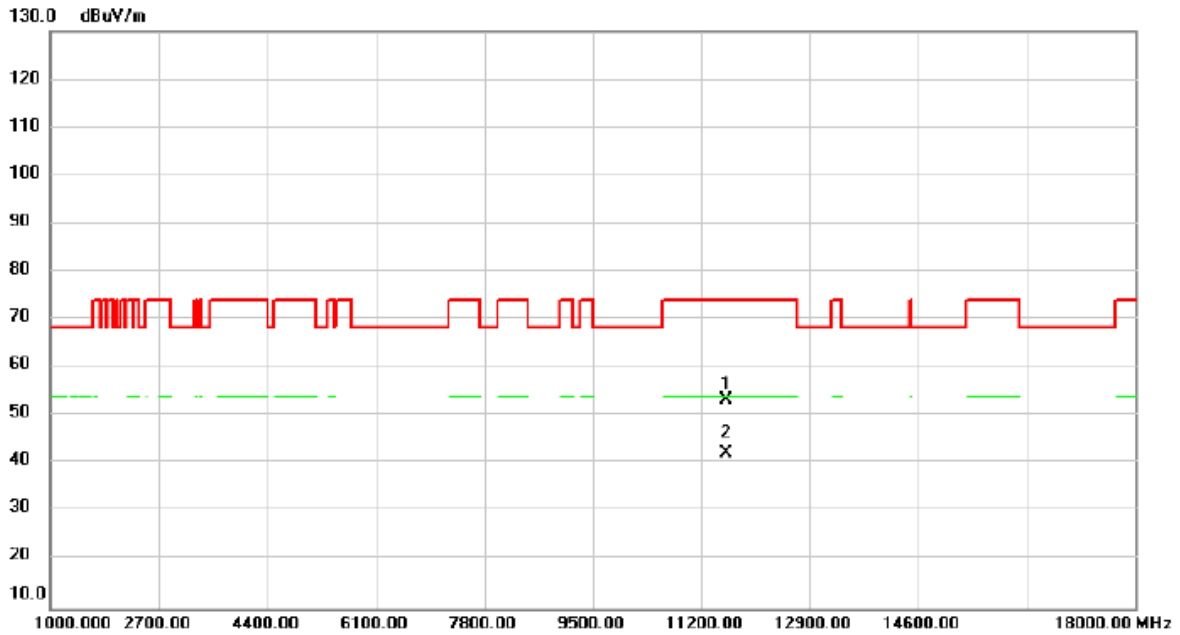


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	46.67	6.68	53.35	74.00	-20.65	peak	
2	*	11590.00	35.72	6.68	42.40	54.00	-11.60	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2023/12/13
Test Frequency	5210MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

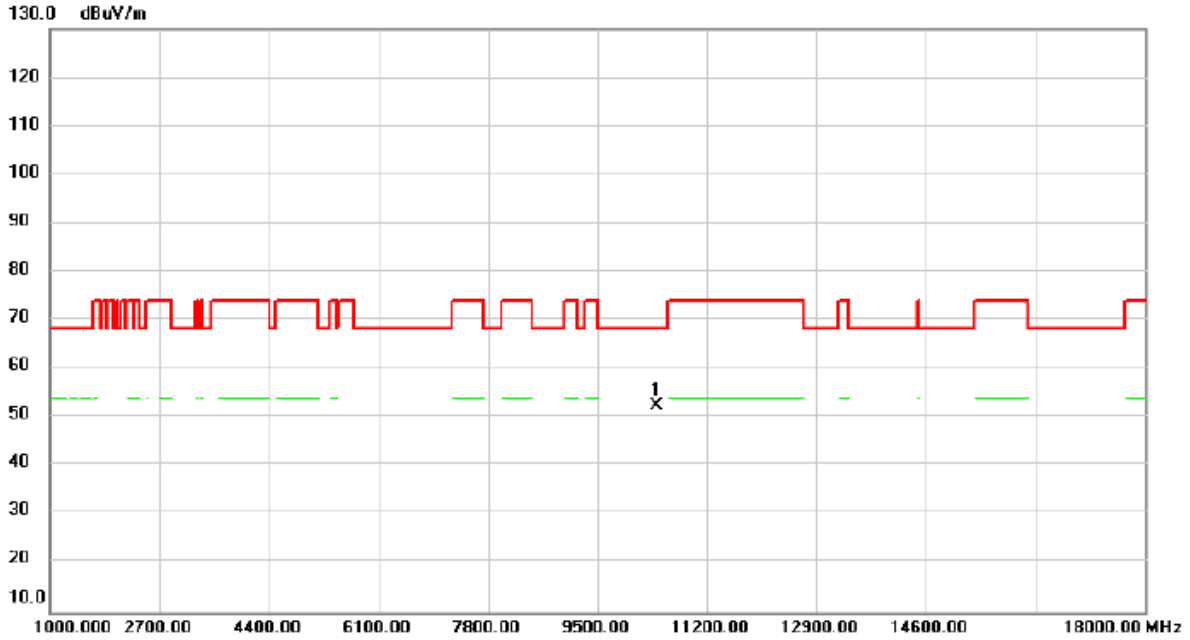


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	47.18	5.42	52.60	68.20	-15.60	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2023/12/13
Test Frequency	5210MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

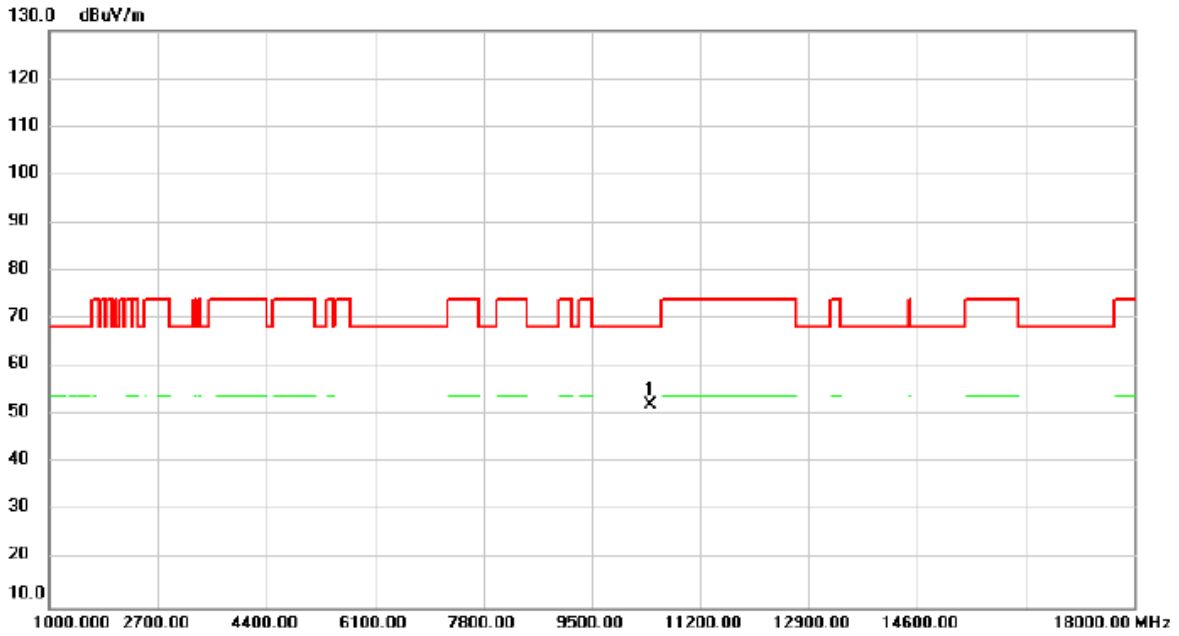


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	46.88	5.42	52.30	68.20	-15.90	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2023/12/13
Test Frequency	5290MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

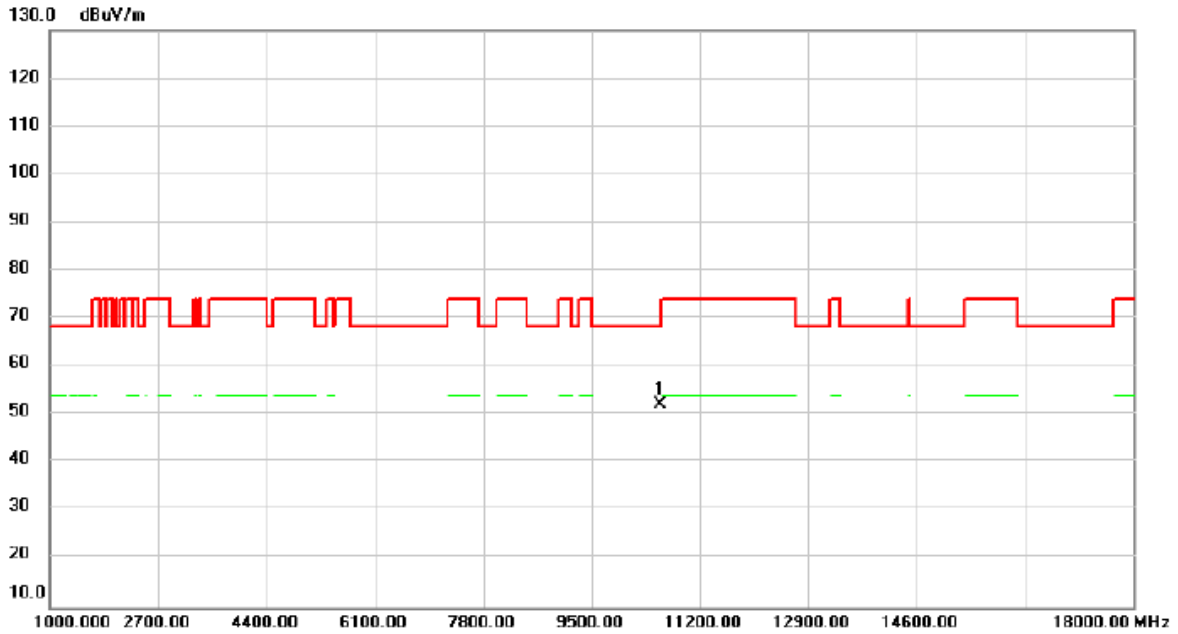


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	46.66	5.46	52.12	68.20	-16.08	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2023/12/13
Test Frequency	5290MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

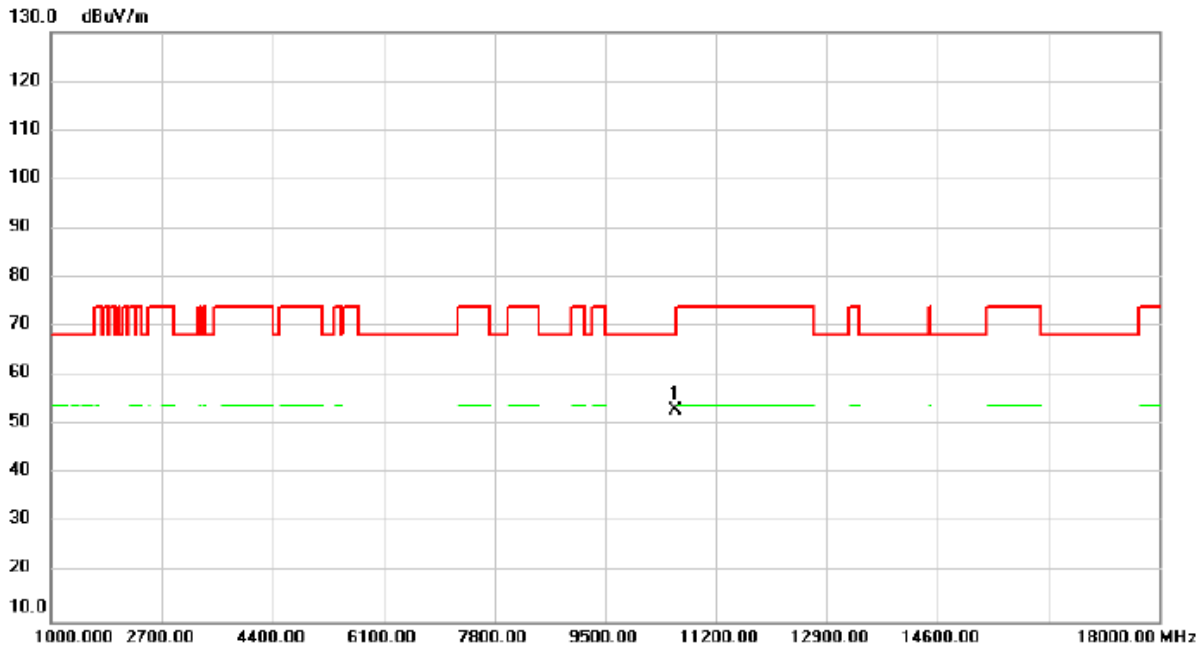


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	47.60	5.46	53.06	68.20	-15.14	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2023/12/13
Test Frequency	5530MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

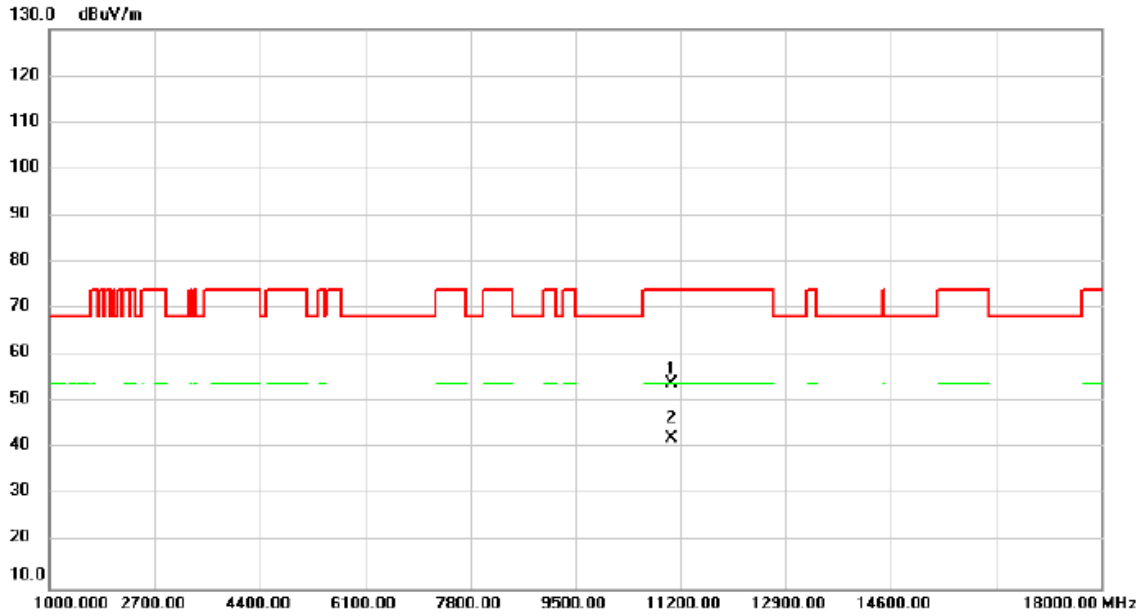


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	47.38	6.48	53.86	74.00	-20.14	peak	
2	*	11060.00	35.70	6.48	42.18	54.00	-11.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2023/12/13
Test Frequency	5530MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

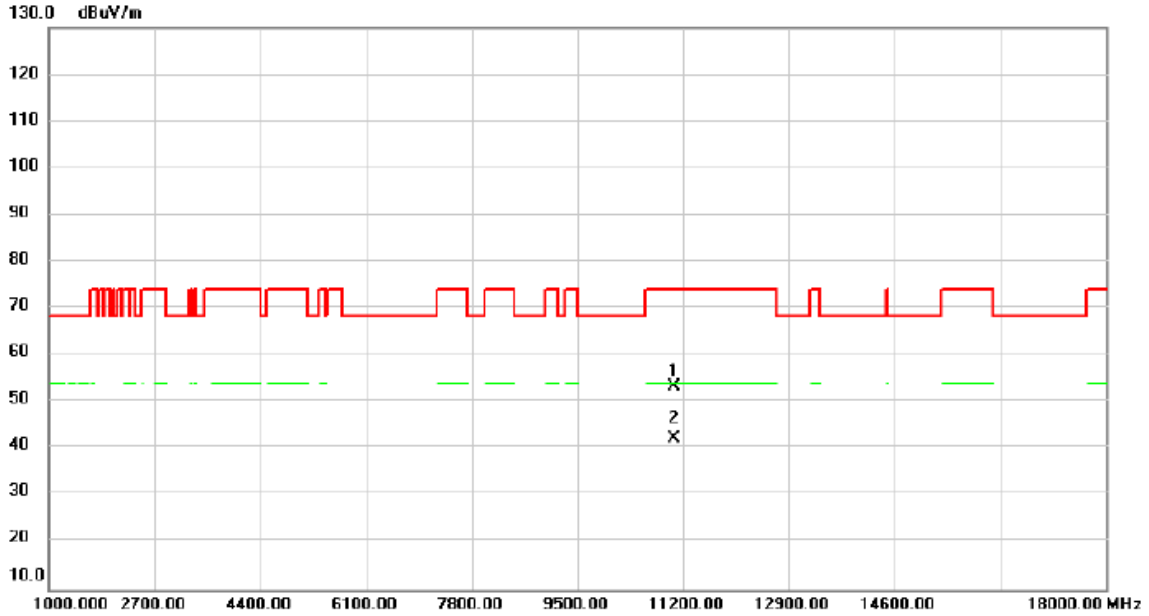


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	47.01	6.48	53.49	74.00	-20.51	peak	
2	*	11060.00	35.74	6.48	42.22	54.00	-11.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2023/12/13
Test Frequency	5610MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

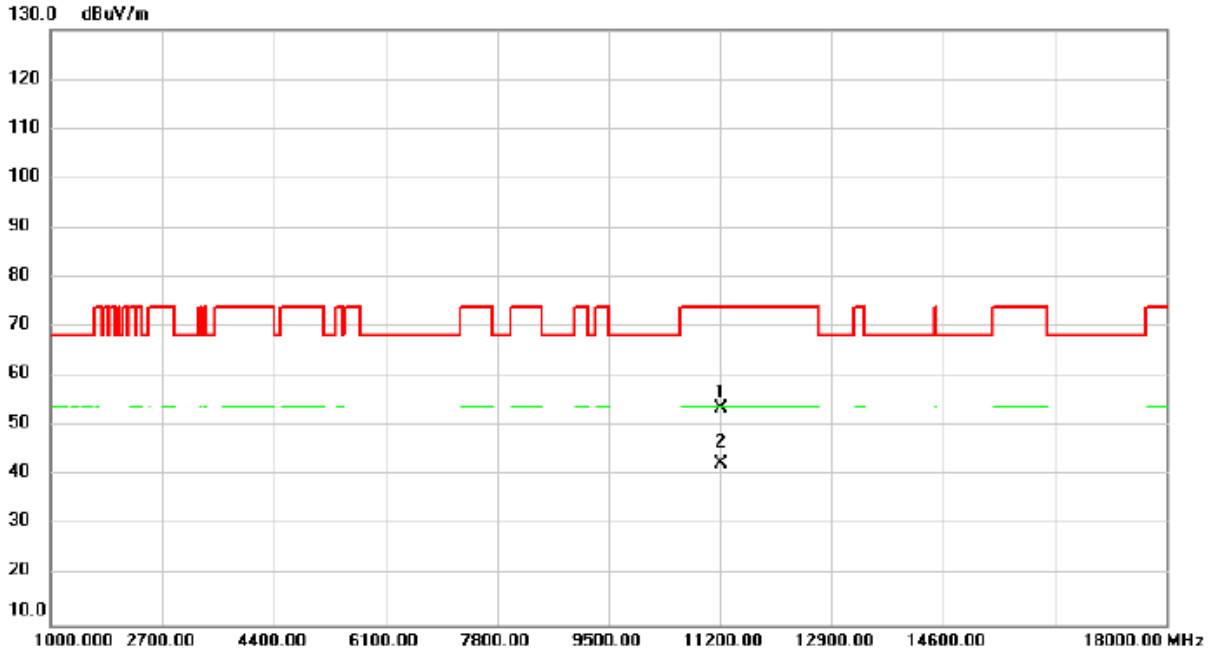


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	47.23	6.57	53.80	74.00	-20.20	peak	
2	*	11220.00	35.93	6.57	42.50	54.00	-11.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2023/12/13
Test Frequency	5610MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

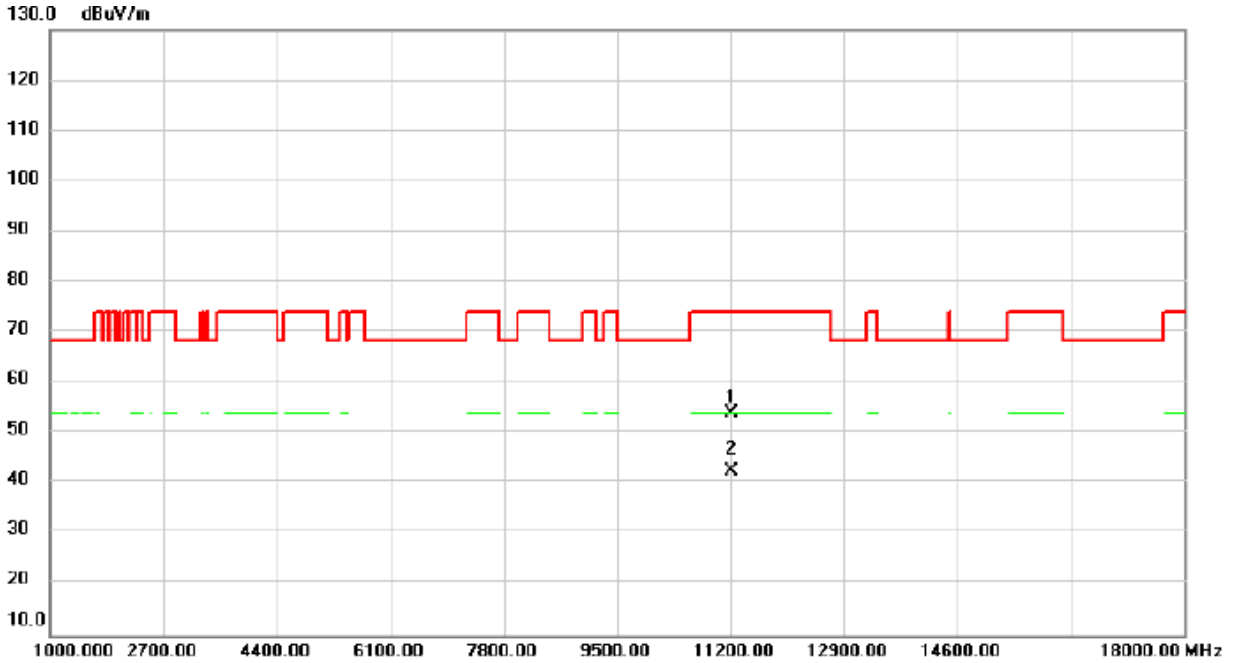


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	47.32	6.57	53.89	74.00	-20.11	peak	
2	*	11220.00	35.86	6.57	42.43	54.00	-11.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2023/12/13
Test Frequency	5775MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

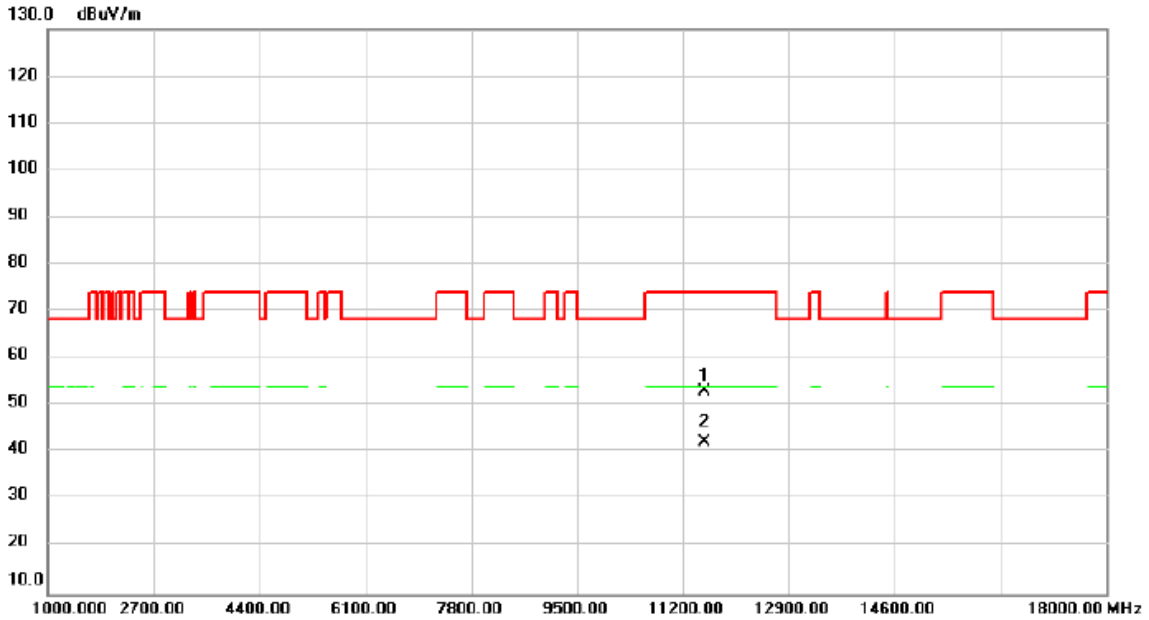


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	46.24	6.71	52.95	74.00	-21.05	peak	
2	*	11550.00	35.63	6.71	42.34	54.00	-11.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2023/12/13
Test Frequency	5775MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

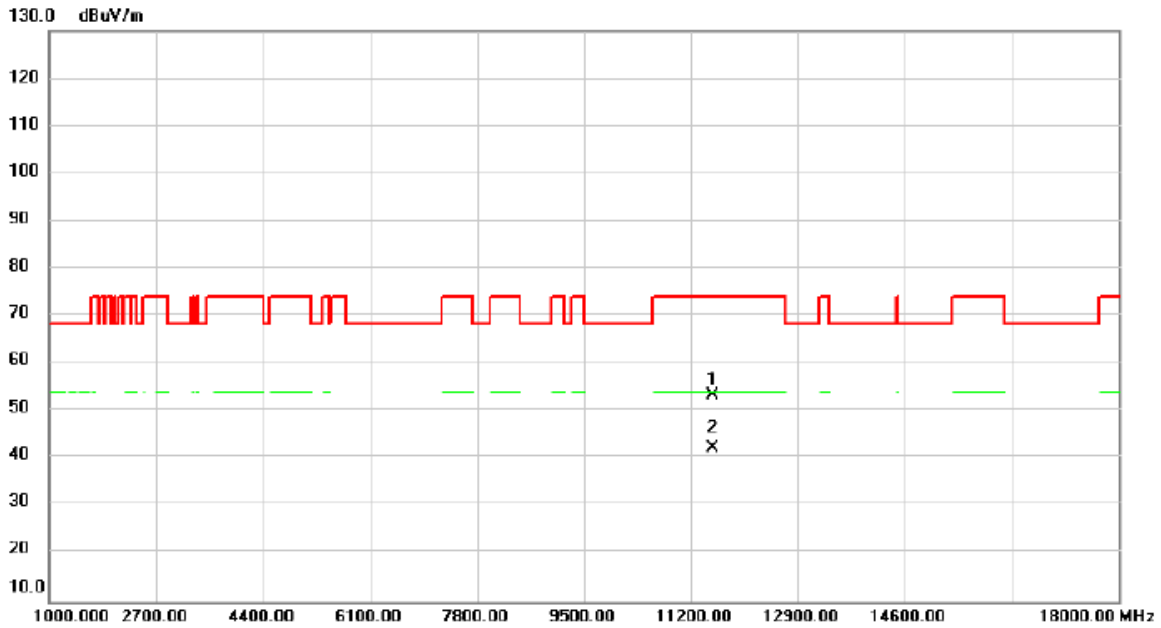


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	46.75	6.71	53.46	74.00	-20.54	peak	
2	*	11550.00	35.50	6.71	42.21	54.00	-11.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2023/12/13
Test Frequency	5250MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

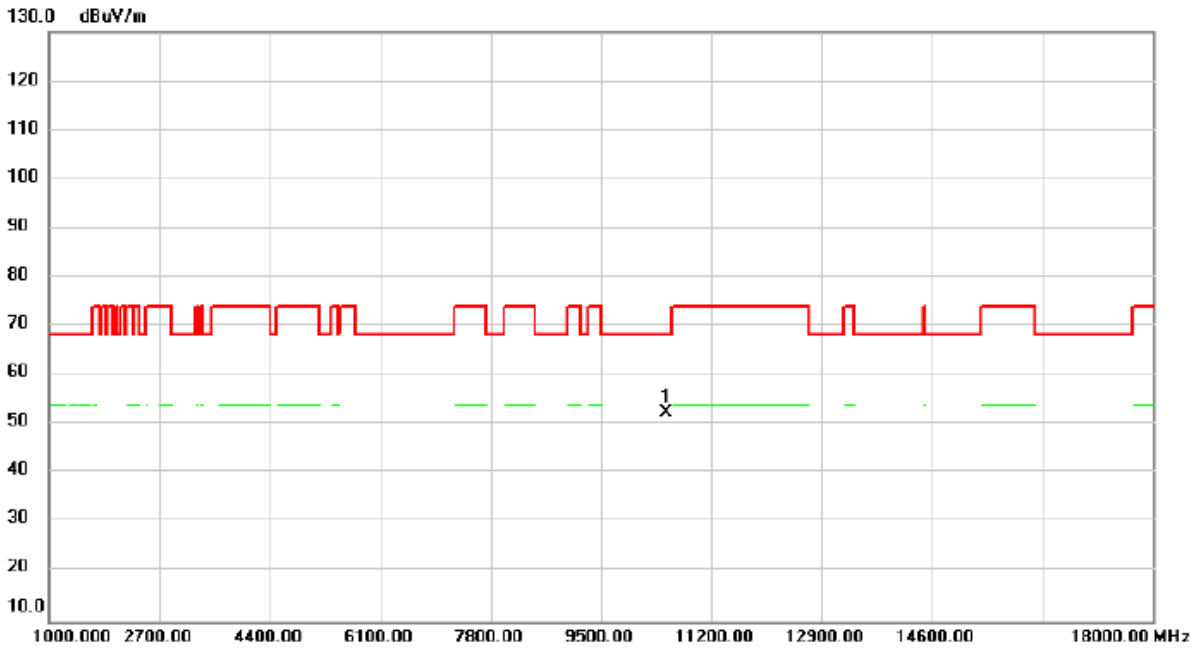


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10500.00	47.25	5.28	52.53	68.20	-15.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2023/12/13
Test Frequency	5250MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

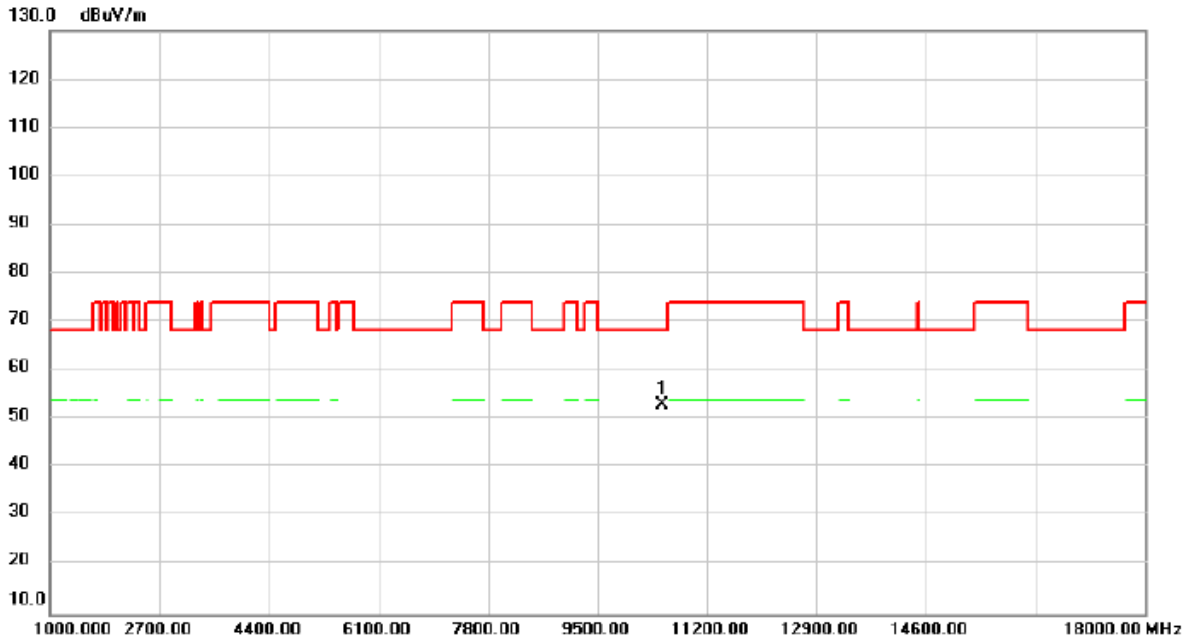


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10500.00	47.87	5.28	53.15	68.20	-15.05	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2023/12/13
Test Frequency	5570MHz	Polarization	Vertical
Temp	22°C	Hum.	59%

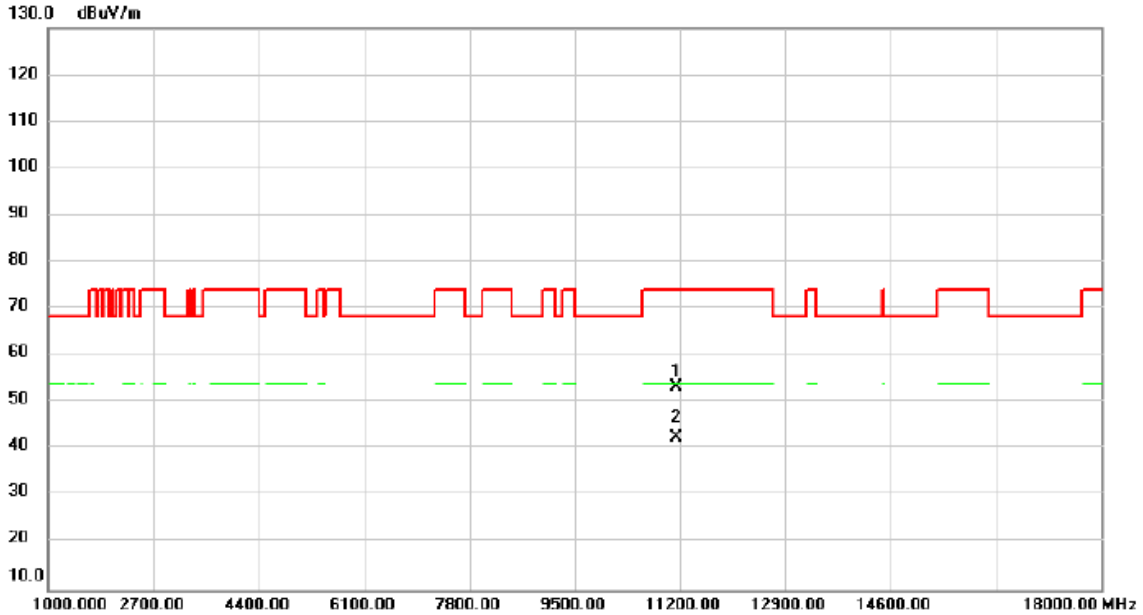


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11140.00	46.77	6.52	53.29	74.00	-20.71	peak	
2	*	11140.00	35.90	6.52	42.42	54.00	-11.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2023/12/13
Test Frequency	5570MHz	Polarization	Horizontal
Temp	22°C	Hum.	59%

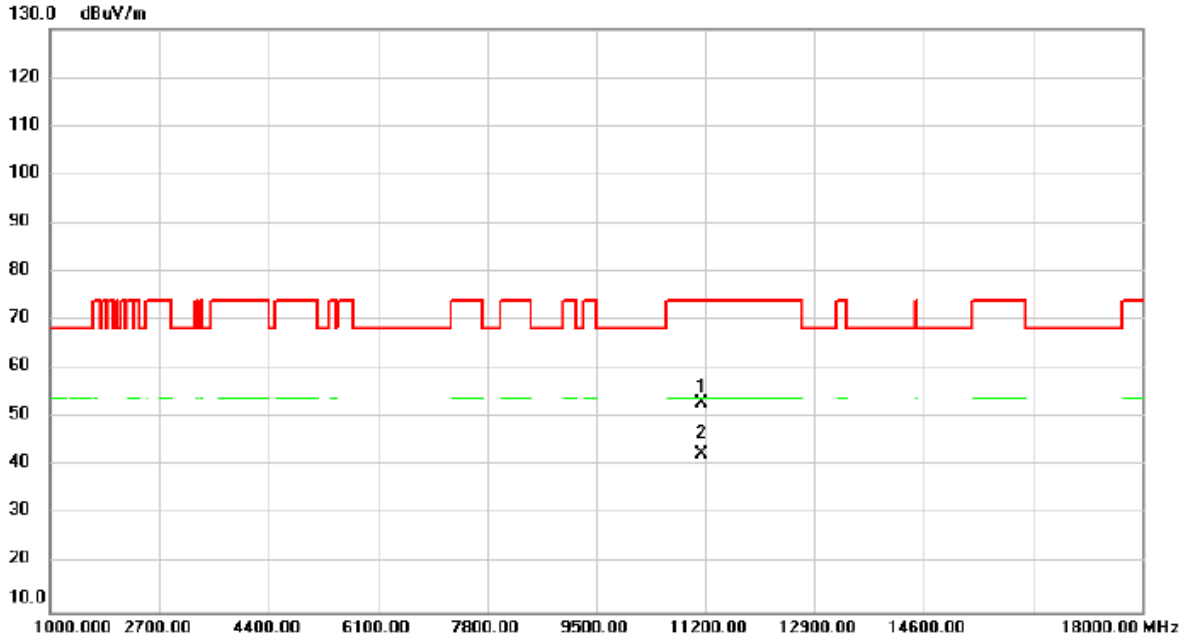


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11140.00	46.62	6.52	53.14	74.00	-20.86	peak	
2	*	11140.00	35.97	6.52	42.49	54.00	-11.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/12/15
Test Frequency	5700MHz	Polarization	Vertical
Temp	21°C	Hum.	58%

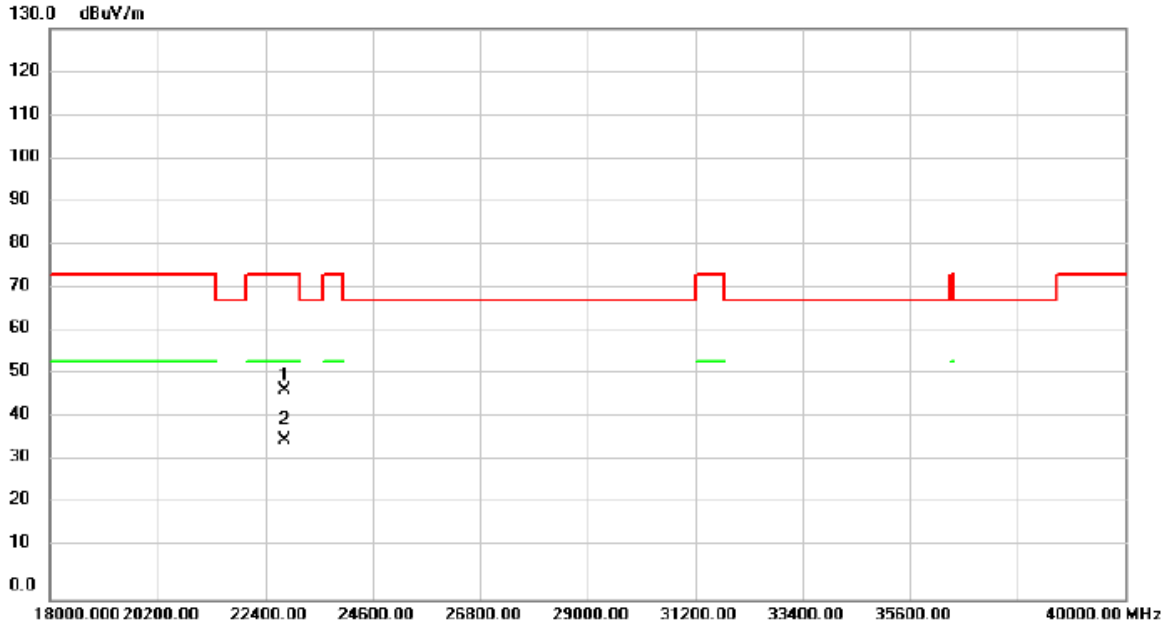


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		22800.00	51.72	-3.97	47.75	74.00	-26.25	peak	
2	*	22800.00	40.26	-3.97	36.29	54.00	-17.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/12/15
Test Frequency	5700MHz	Polarization	Horizontal
Temp	21°C	Hum.	58%

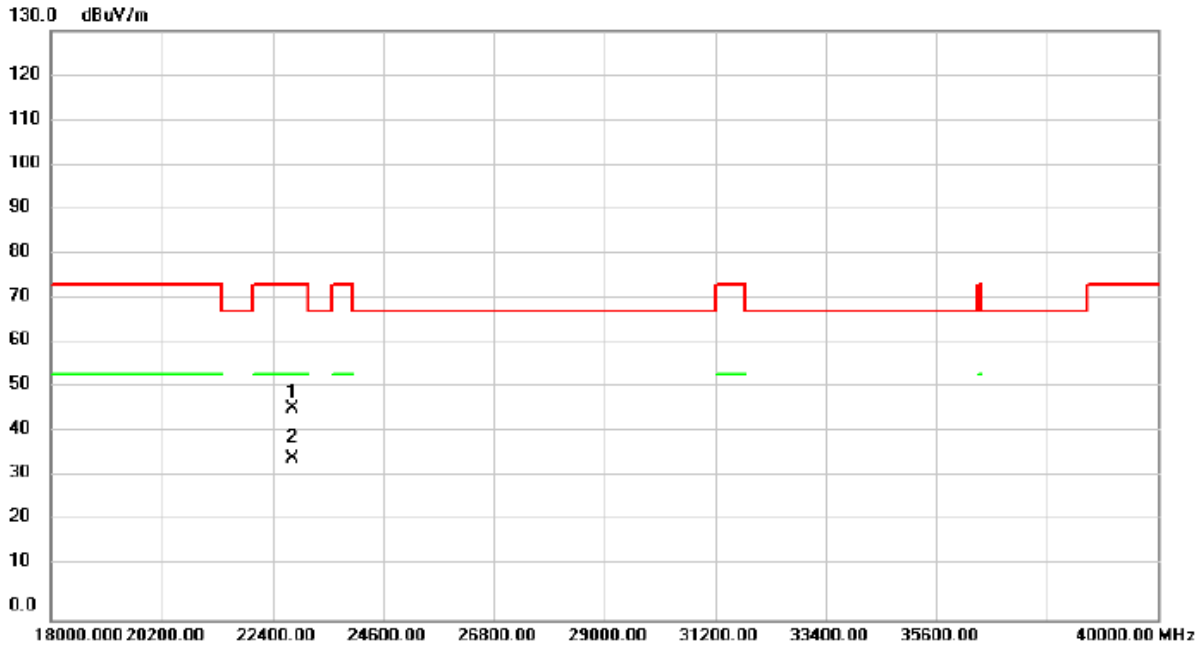

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		22800.00	50.63	-3.97	46.66	74.00	-27.34	peak	
2	*	22800.00	39.52	-3.97	35.55	54.00	-18.45	AVG	



REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


APPENDIX E BANDWIDTH

Test Mode	IEEE 802.11a_Ant.1
-----------	--------------------


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5180	23.29	17.30	No limit
5200	22.89	17.40	No limit
5240	23.00	17.30	No limit

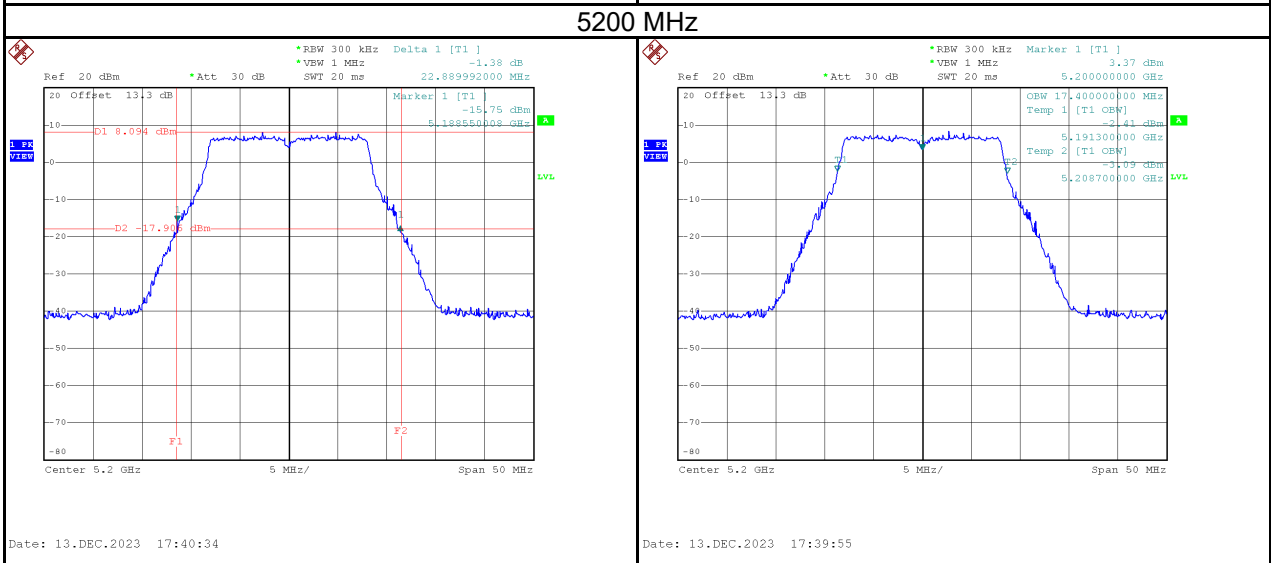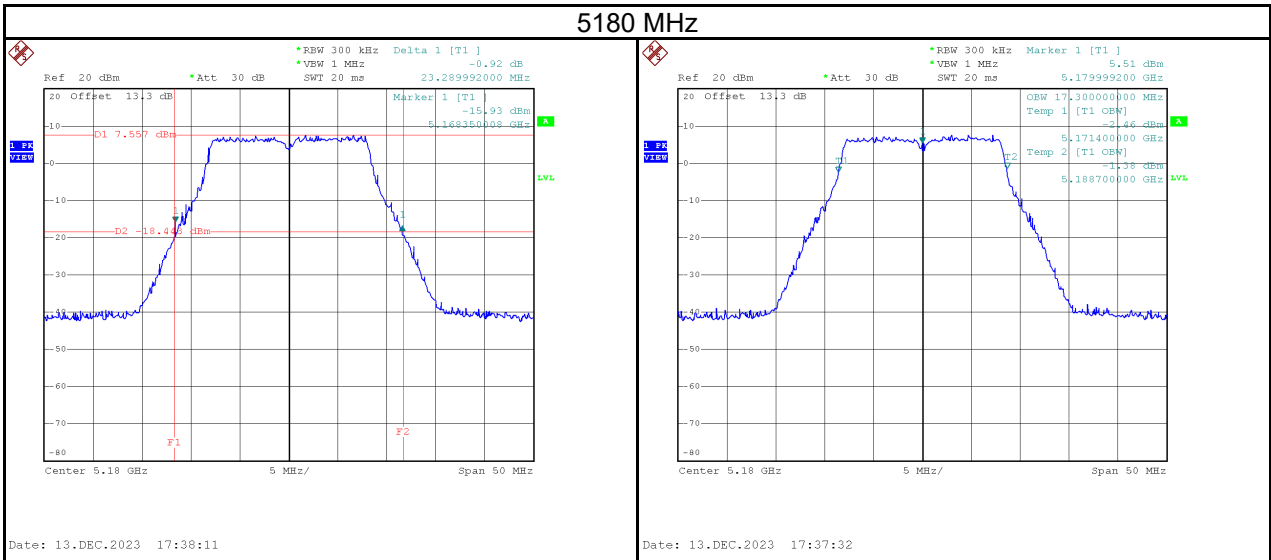

5240 MHz

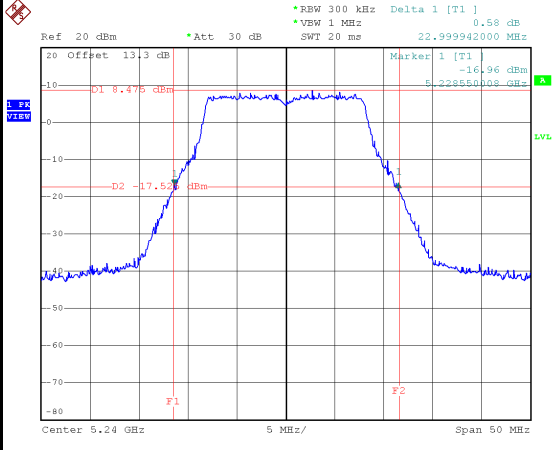



Date: 13.DEC.2023 17:42:04

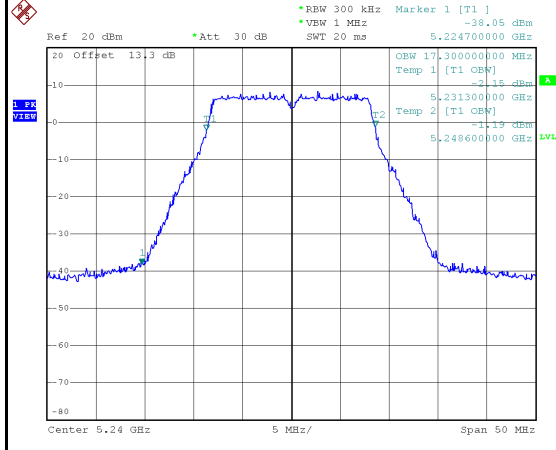



Date: 13.DEC.2023 17:41:26

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5260	23.29	17.40	No limit
5300	23.35	17.40	No limit
5320	23.39	17.30	No limit


5260 MHz

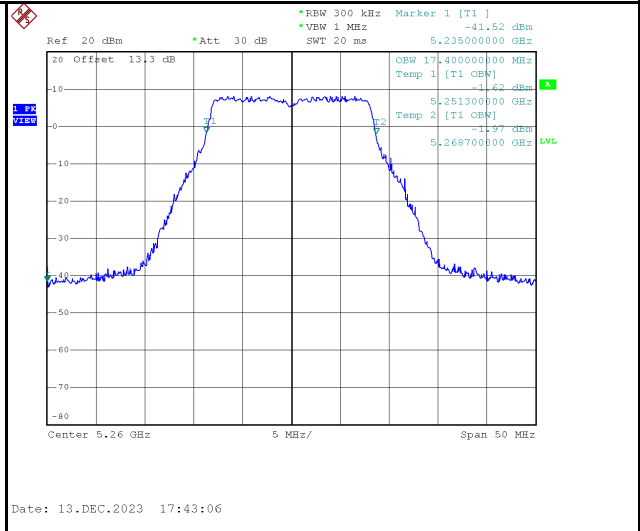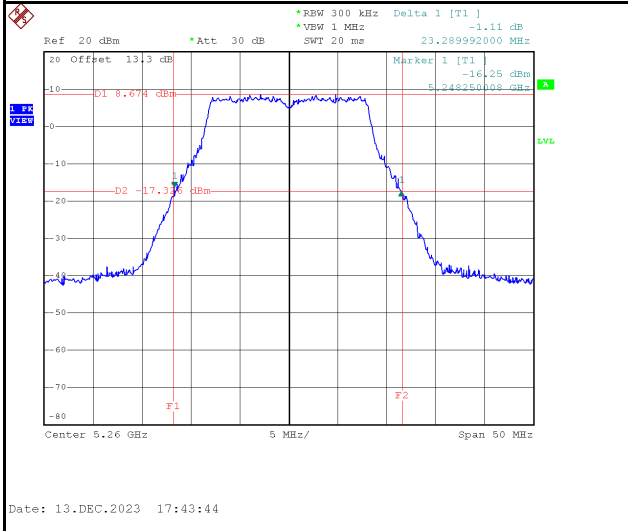


5300 MHz

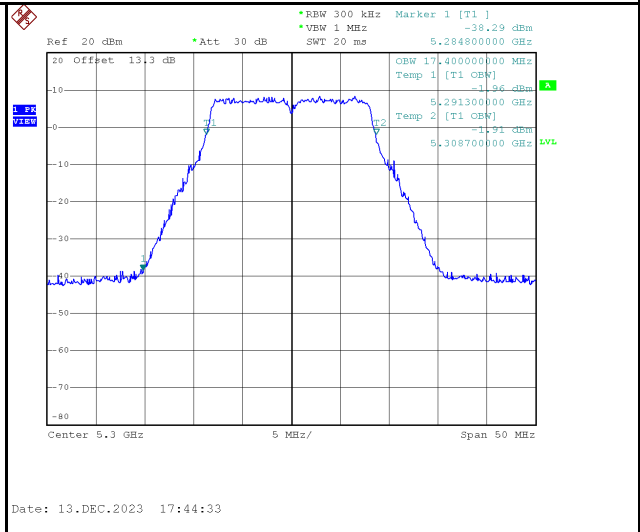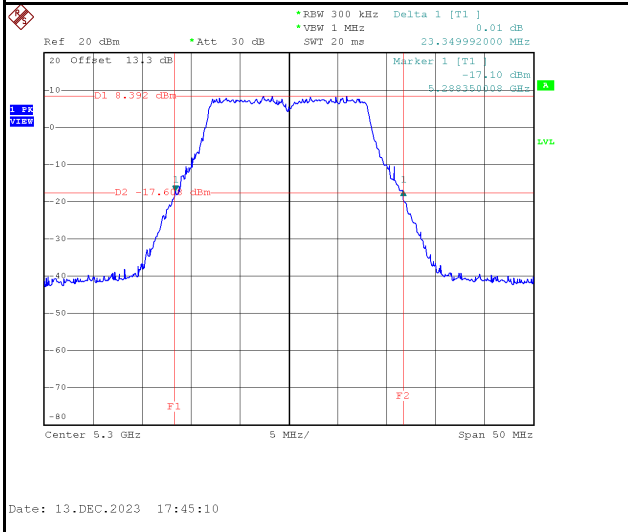

5320 MHz


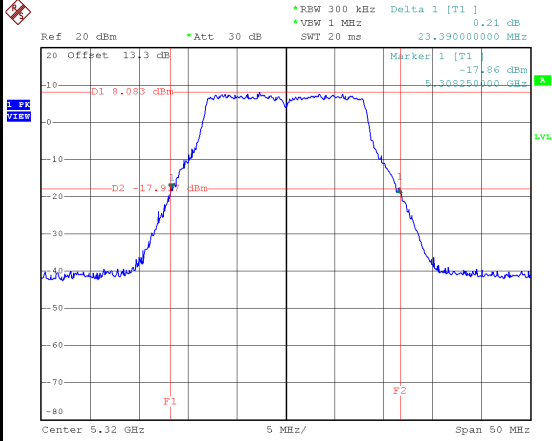


Date: 13.DEC.2023 17:46:43

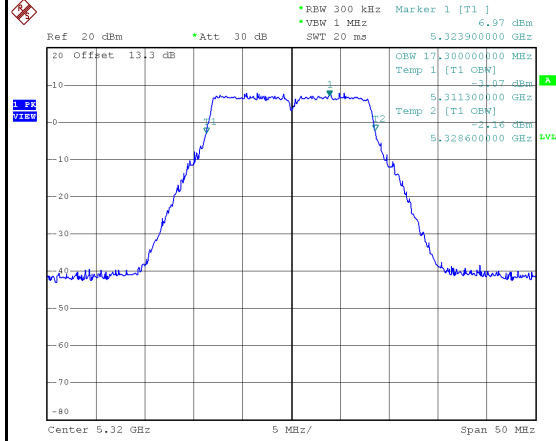


Date: 13.DEC.2023 17:46:05

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5500	23.25	17.30	No limit
5580	23.15	17.30	No limit
5700	23.25	17.40	No limit

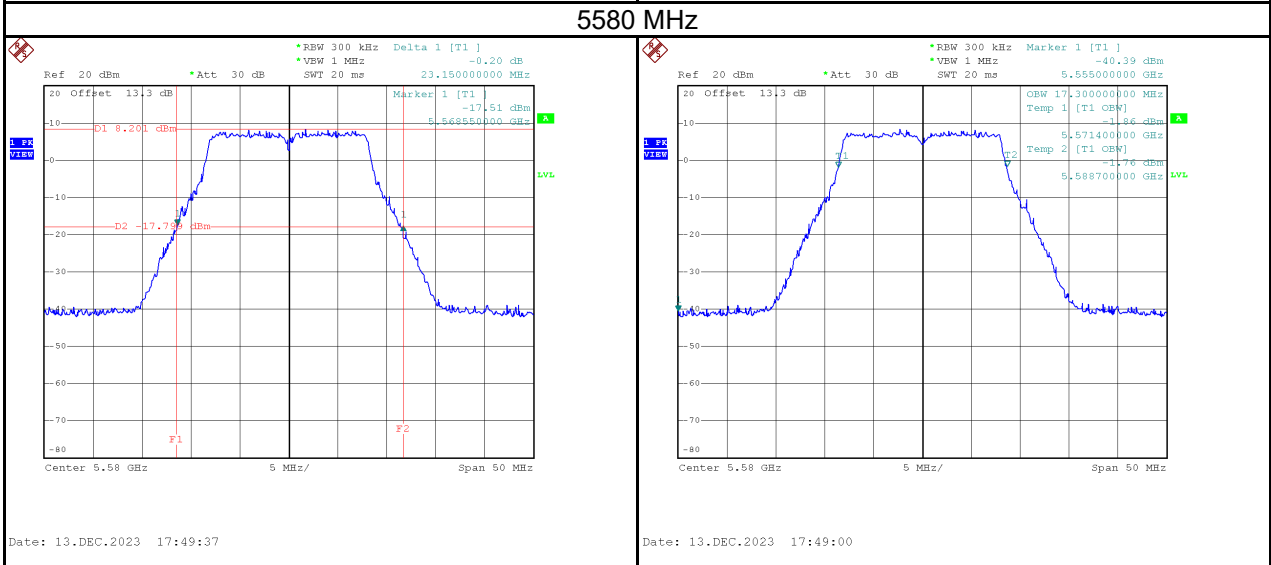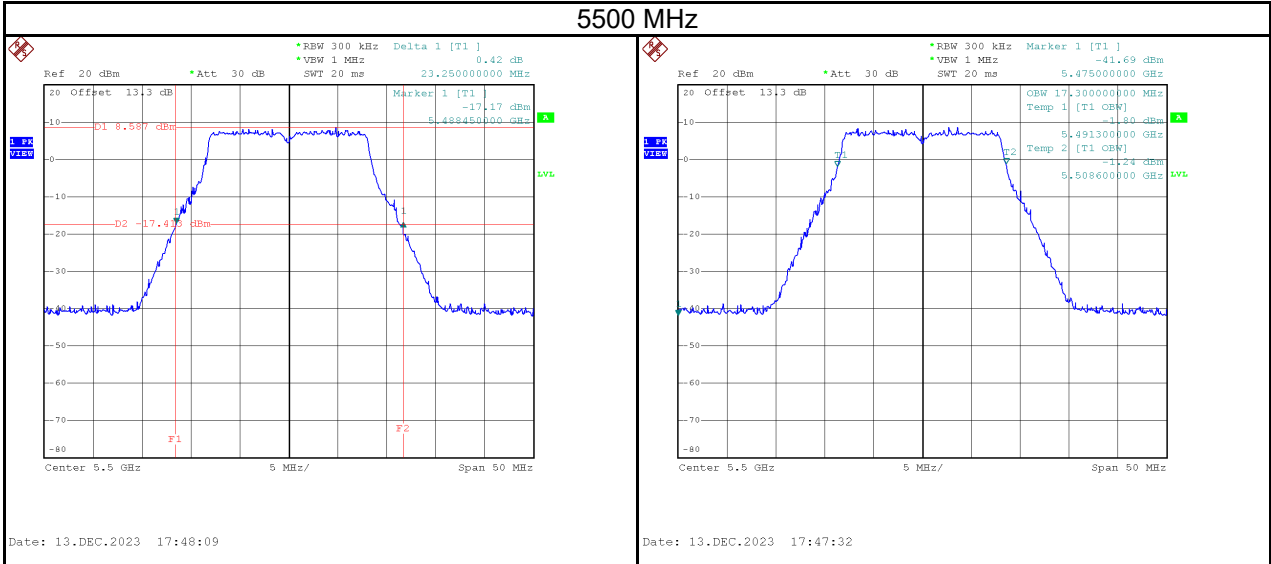


Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5745	16.50	17.40	500	Pass
5785	16.50	17.30	500	Pass
5825	16.39	17.30	500	Pass

5745 MHz

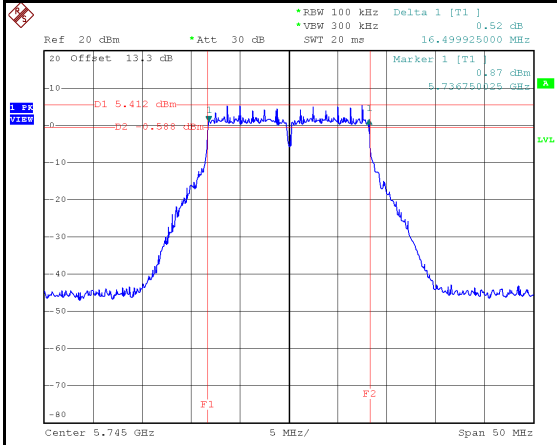


Date: 13.DEC.2023 17:52:57

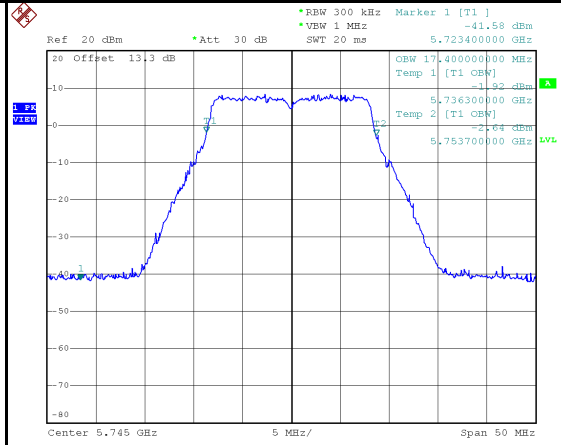


Date: 13.DEC.2023 17:52:10

5785 MHz

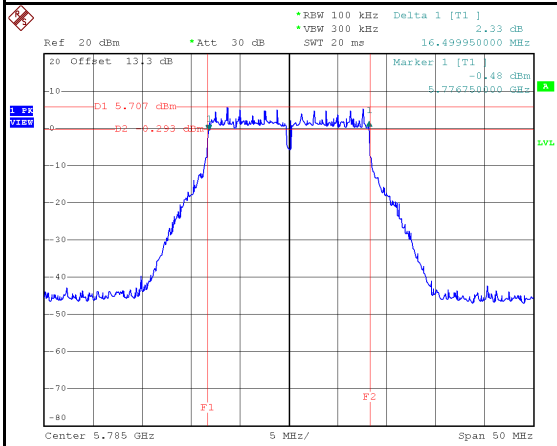


Date: 13.DEC.2023 17:54:29

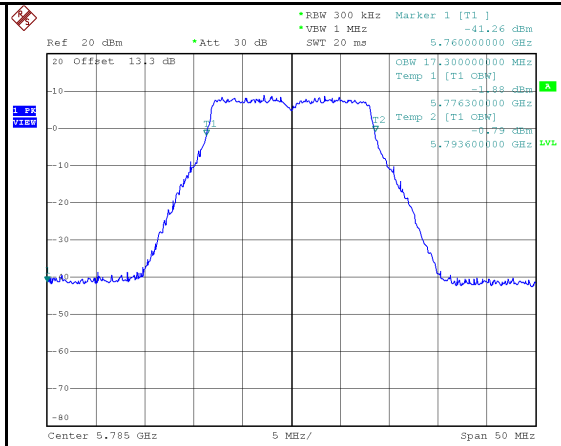


Date: 13.DEC.2023 17:53:44

5825 MHz

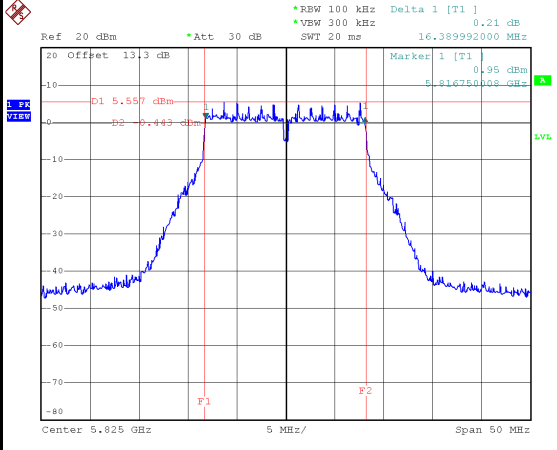



Date: 13.DEC.2023 17:57:05

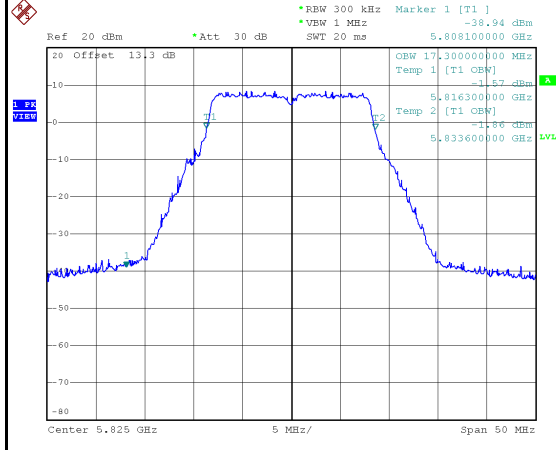


Date: 13.DEC.2023 17:56:19

Test Mode	IEEE 802.11n (HT20)_Ant.1
-----------	---------------------------


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5180	23.65	18.30	No limit
5200	23.59	18.30	No limit
5240	23.69	18.30	No limit

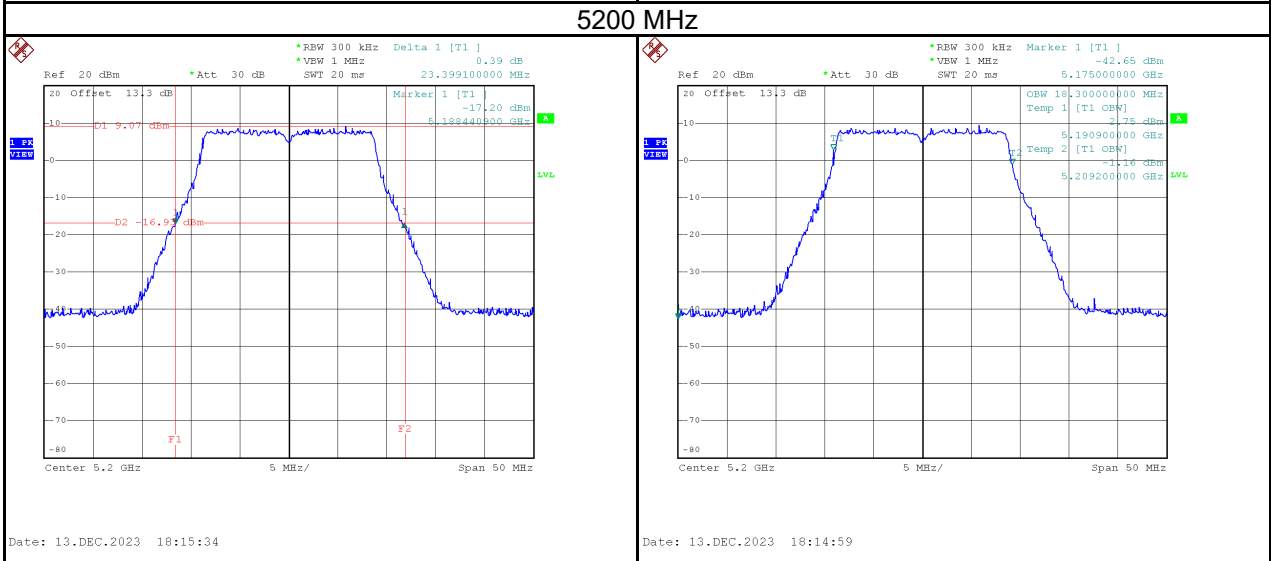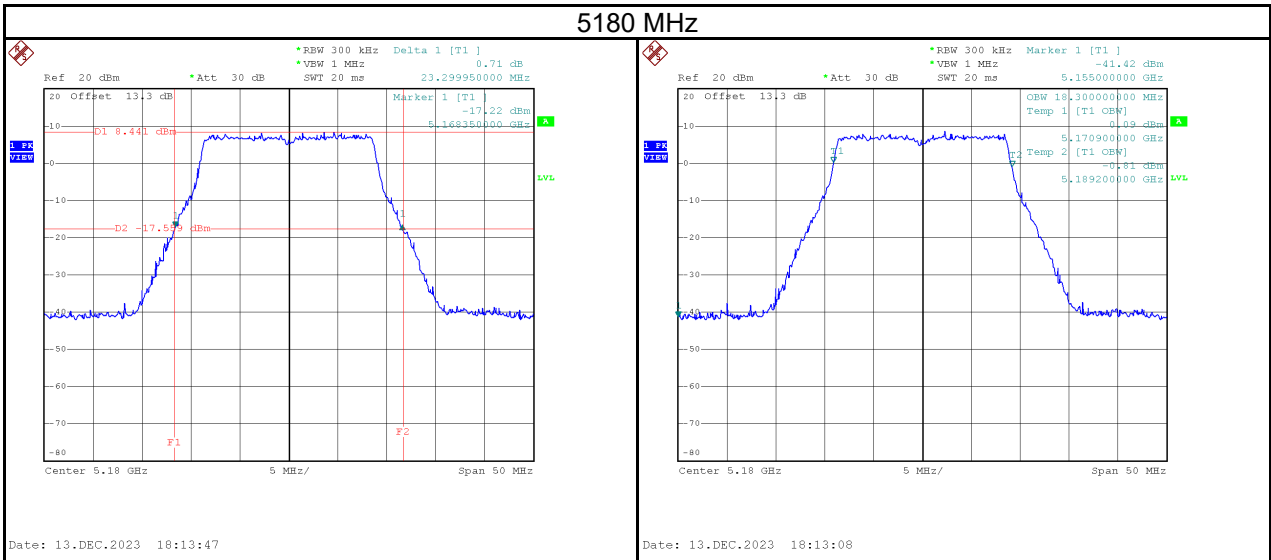

5240 MHz

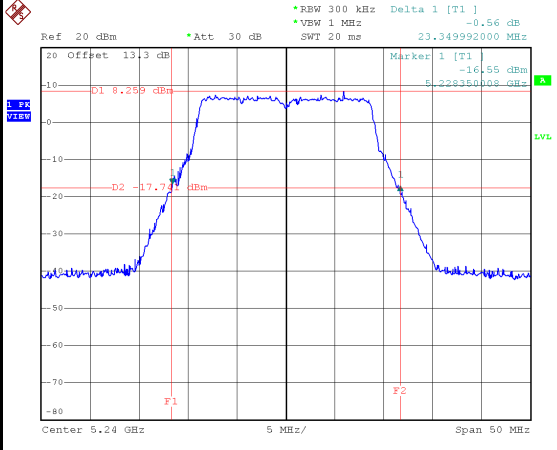



Date: 13.DEC.2023 18:19:04

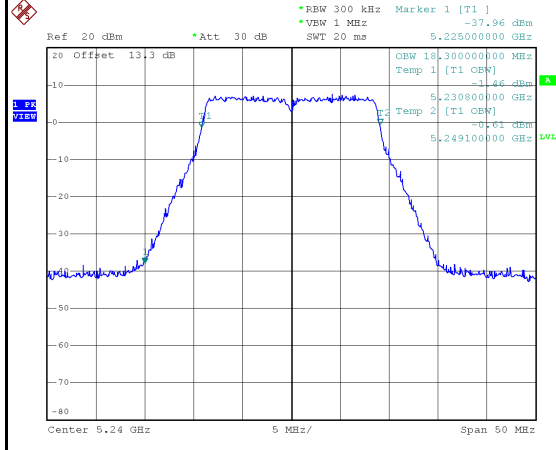



Date: 13.DEC.2023 18:18:29

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5260	23.85	18.40	No limit
5300	23.95	18.20	No limit
5320	24.05	18.30	No limit


5260 MHz

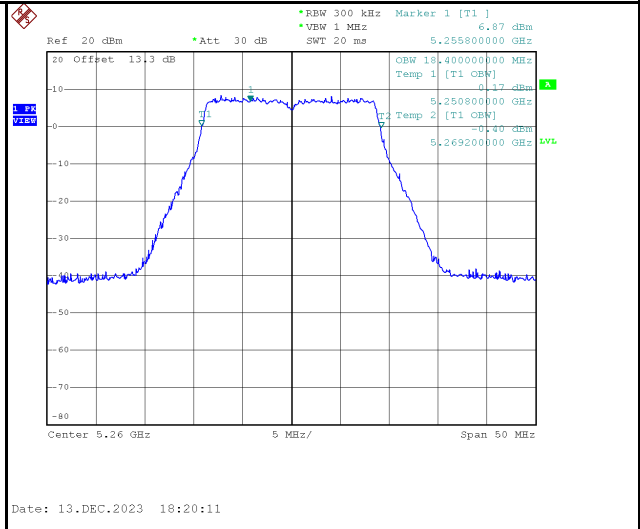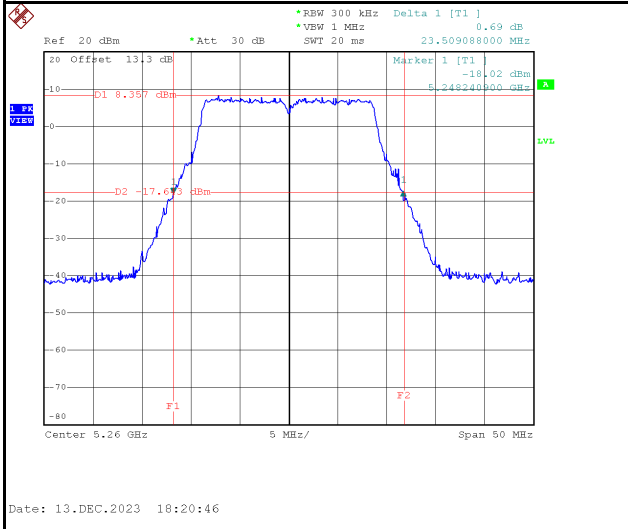


5300 MHz

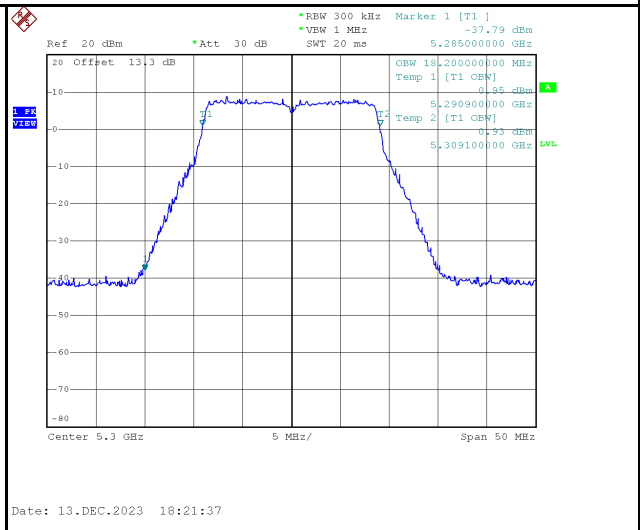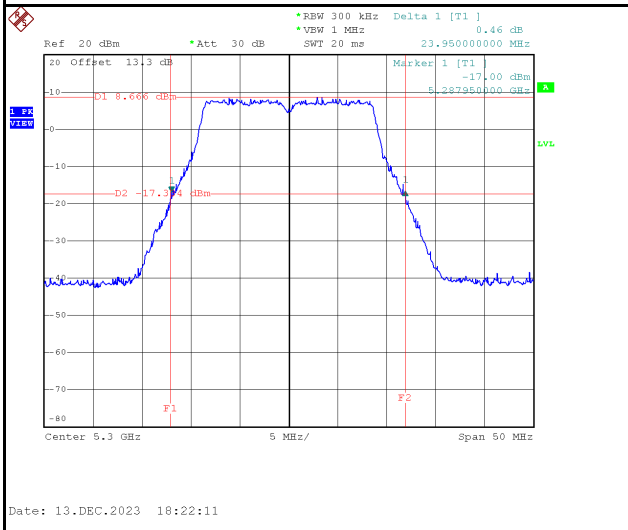

5320 MHz

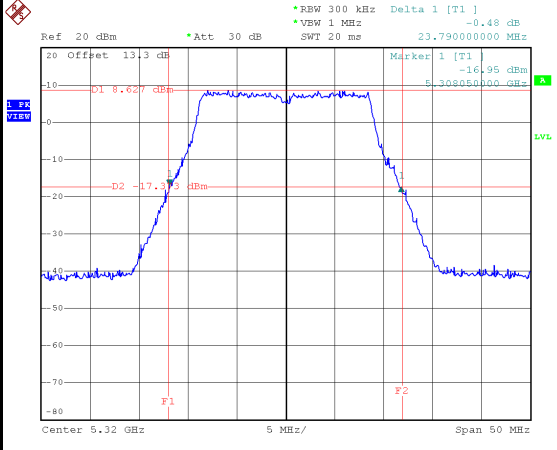



Date: 13.DEC.2023 18:24:08

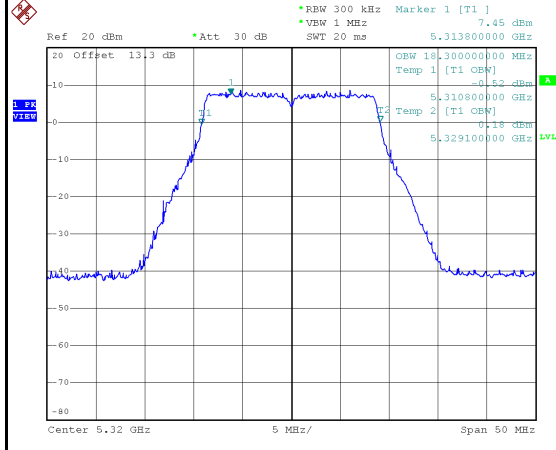



Date: 13.DEC.2023 18:23:30

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5500	24.09	18.30	No limit
5580	24.15	18.40	No limit
5700	23.71	18.30	No limit


5500 MHz

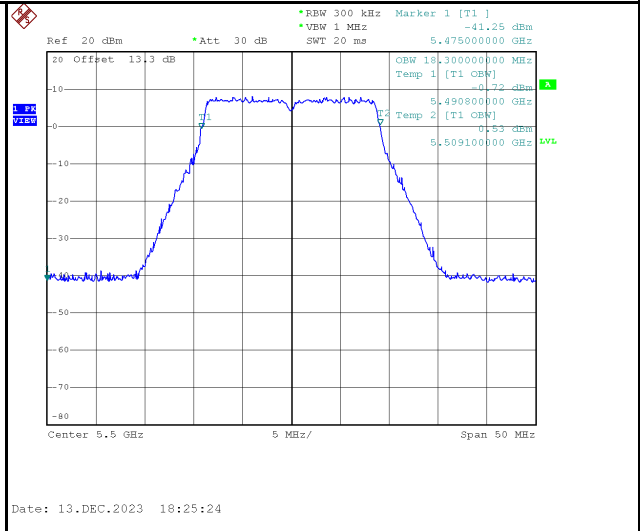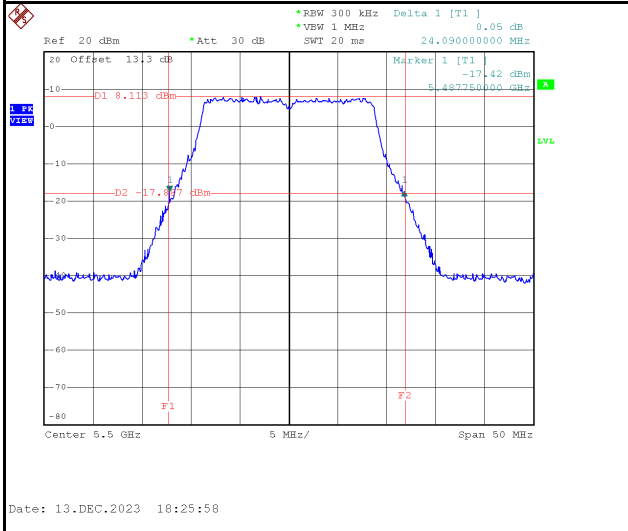


5580 MHz

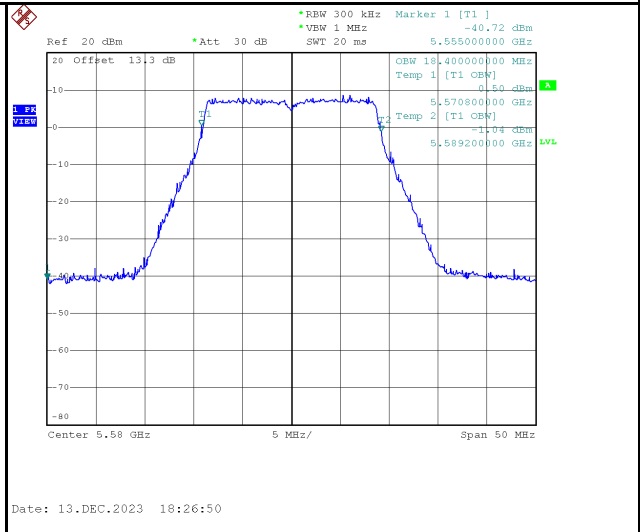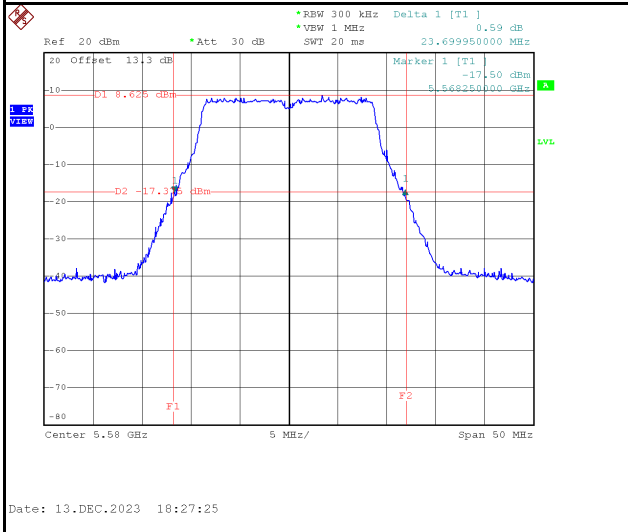

5700 MHz

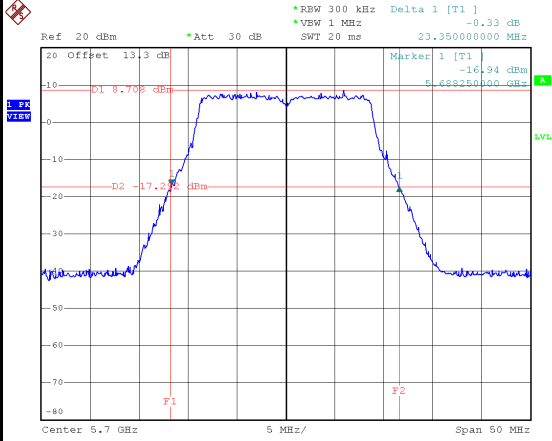


Date: 13.DEC.2023 18:28:54

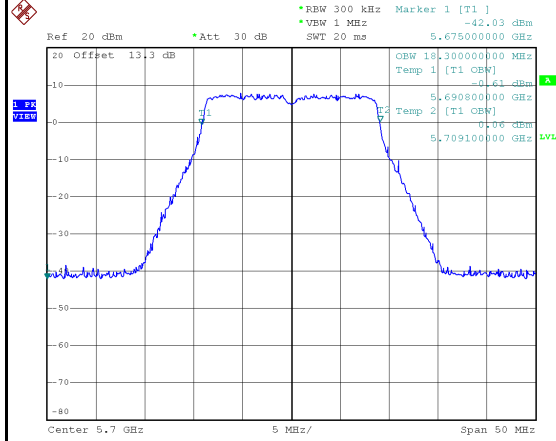


Date: 13.DEC.2023 18:28:19

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5745	17.80	18.30	500	Pass
5785	17.70	18.30	500	Pass
5825	17.65	18.30	500	Pass

5745 MHz

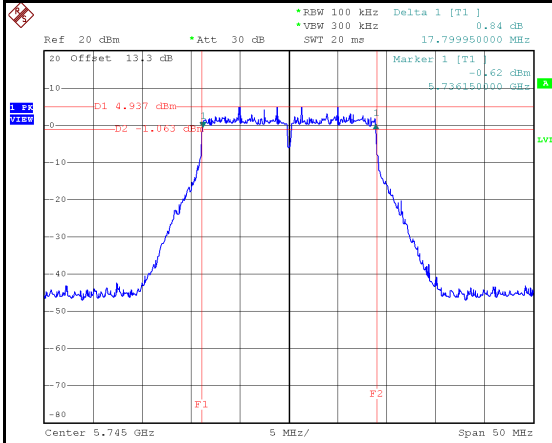


Date: 13.DEC.2023 10:30:22

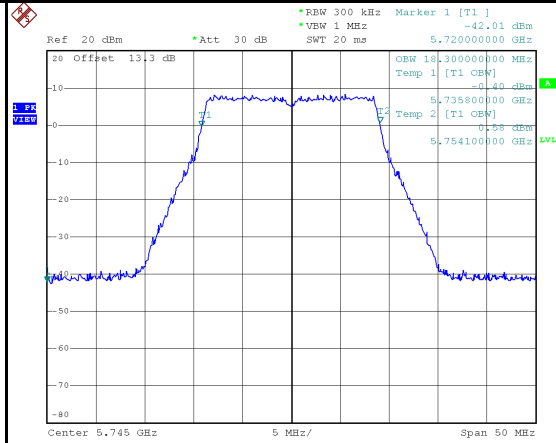


Date: 13.DEC.2023 10:29:41

5785 MHz

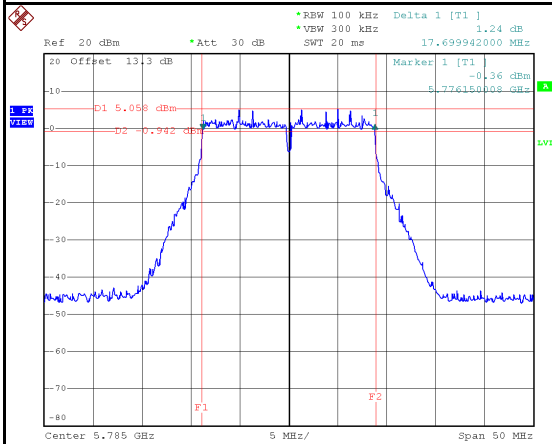


Date: 13.DEC.2023 10:31:53

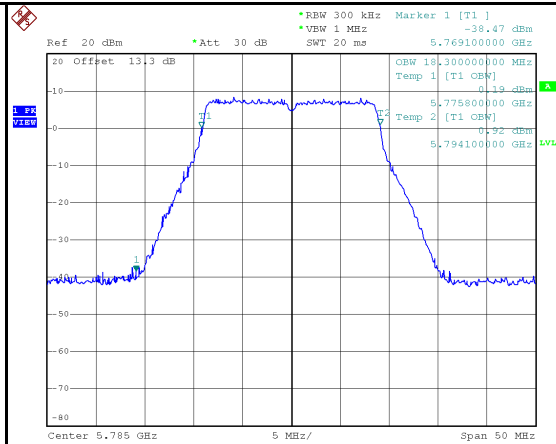


Date: 13.DEC.2023 10:31:11

5825 MHz

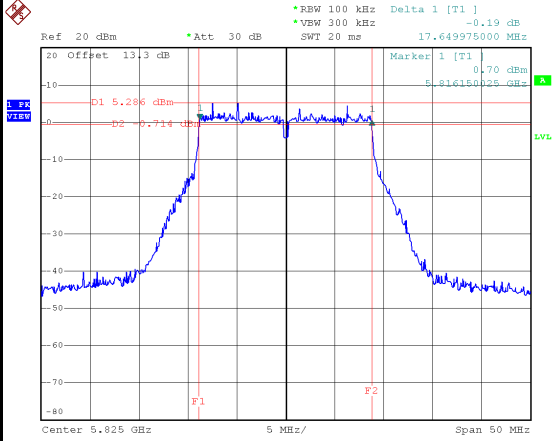



Date: 13.DEC.2023 18:33:26

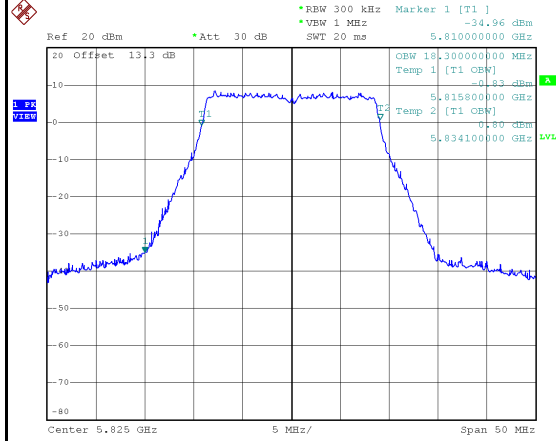

Date: 13.DEC.2023 18:32:43



Test Mode	IEEE 802.11n (HT40)_Ant.1
-----------	---------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5190	41.30	37.80	No limit
5230	41.90	38.00	No limit

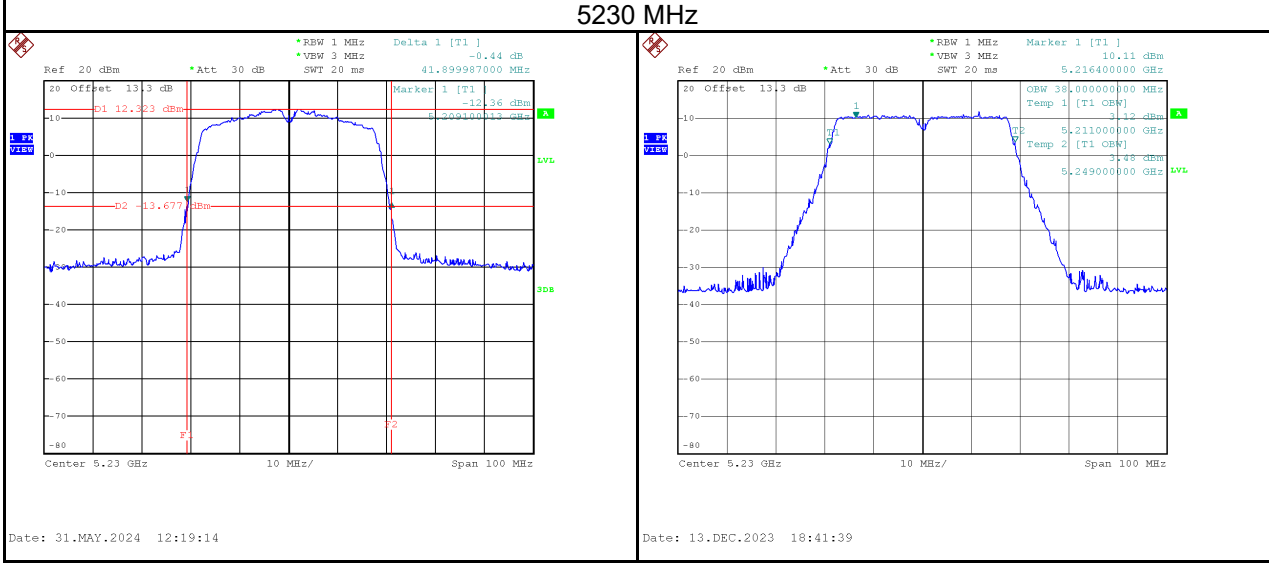
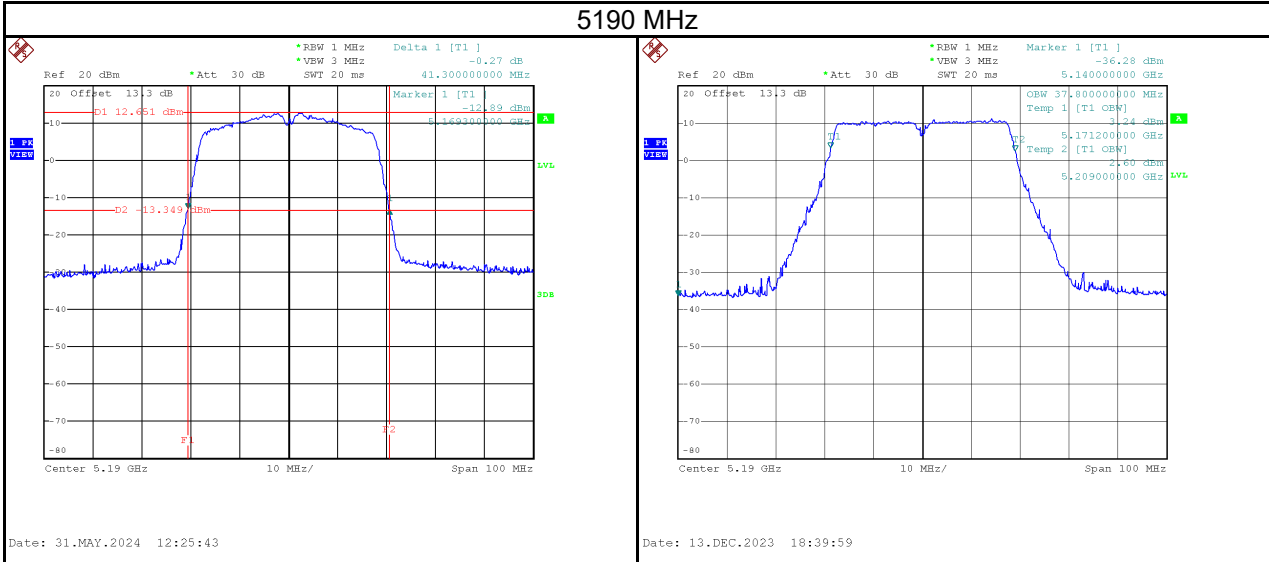


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5270	47.30	38.00	No limit
5310	41.70	38.00	No limit

5270 MHz

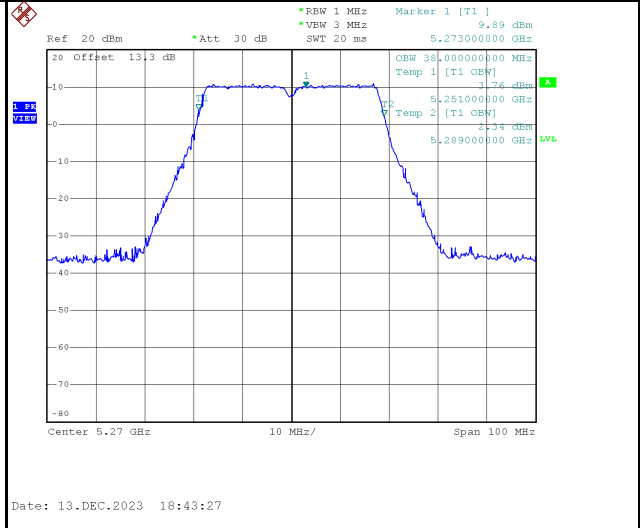
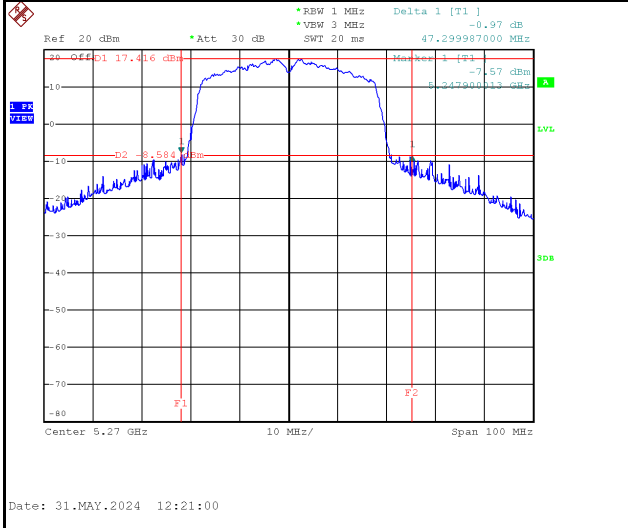


5310 MHz

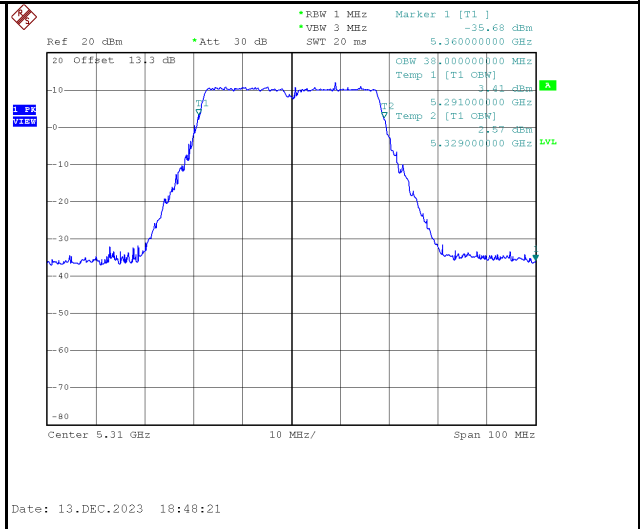
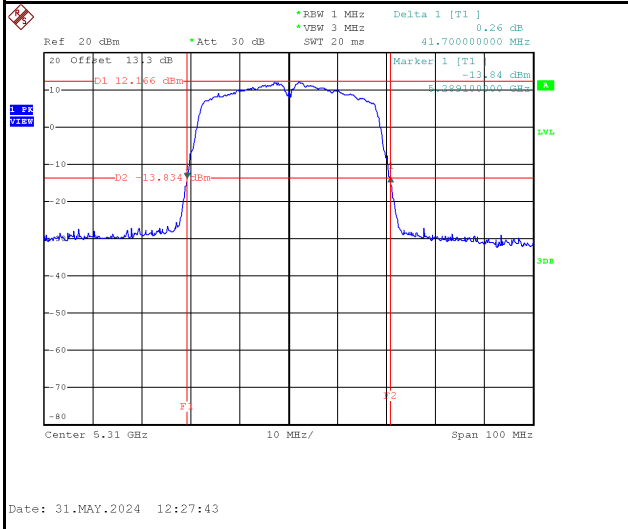


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5510	41.39	38.00	No limit
5550	41.70	38.00	No limit
5670	41.70	38.00	No limit


5510 MHz

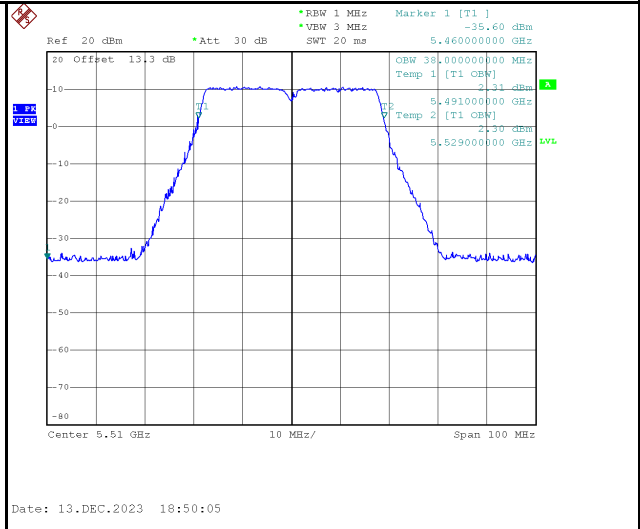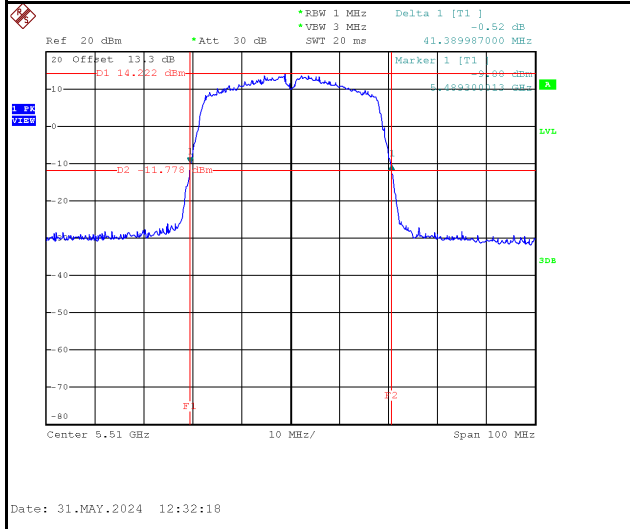


5550 MHz

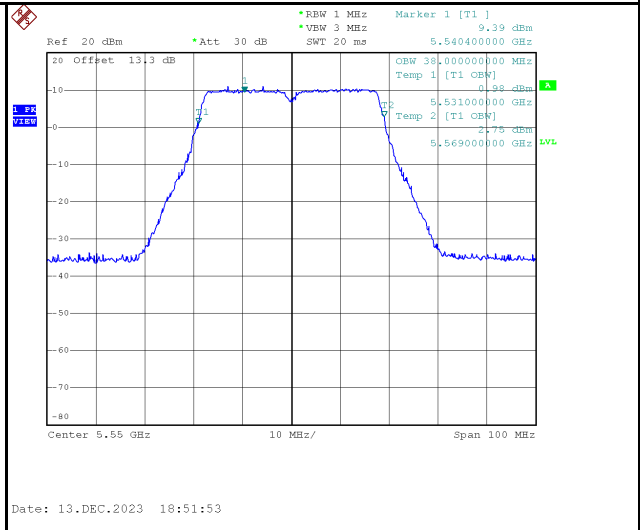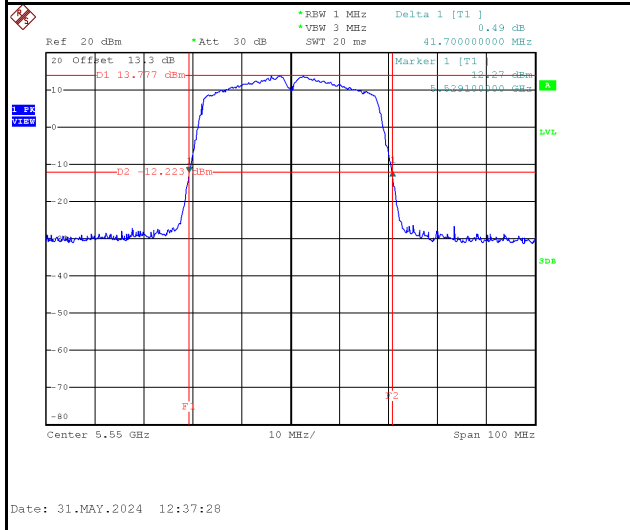

5670 MHz

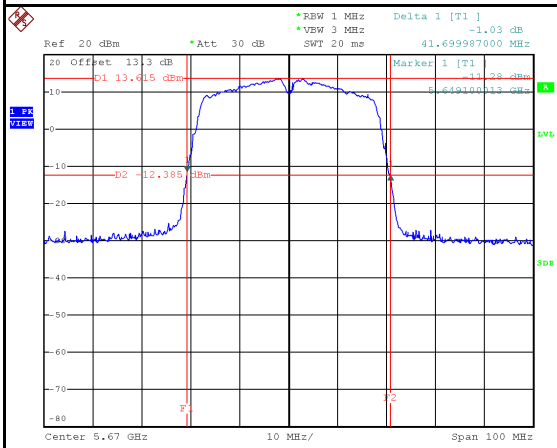


Date: 31.MAY.2024 12:40:26

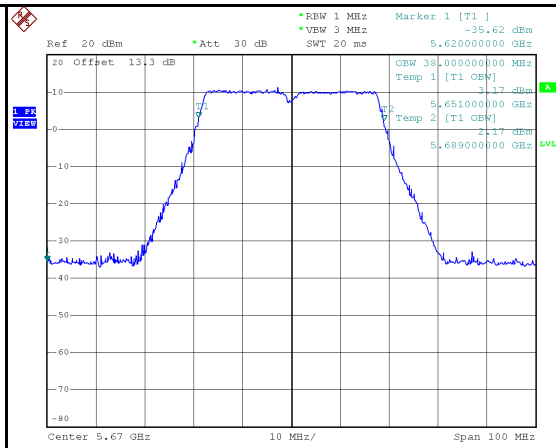


Date: 13.DEC.2023 18:53:43

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5755	34.59	38.00	500	Pass
5795	35.39	38.00	500	Pass

5755 MHz

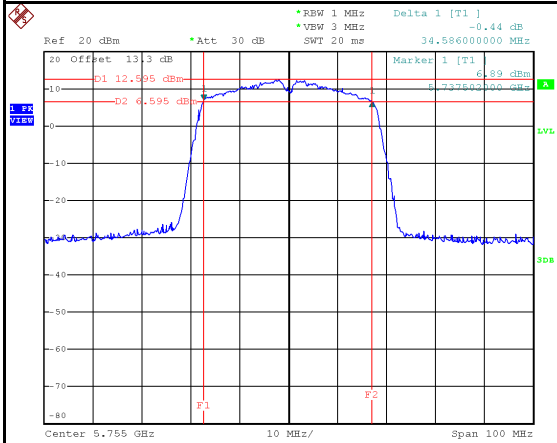


Date: 31.MAY.2024 12:43:30

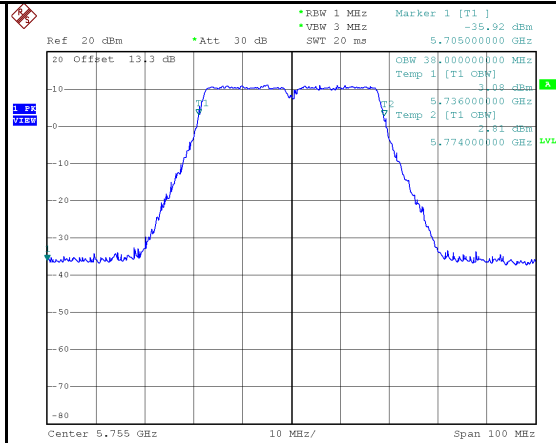


Date: 13.DEC.2023 18:55:25

5795 MHz

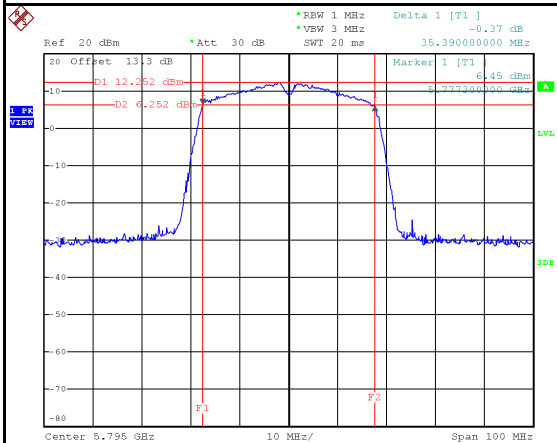


Date: 31.MAY.2024 12:45:10

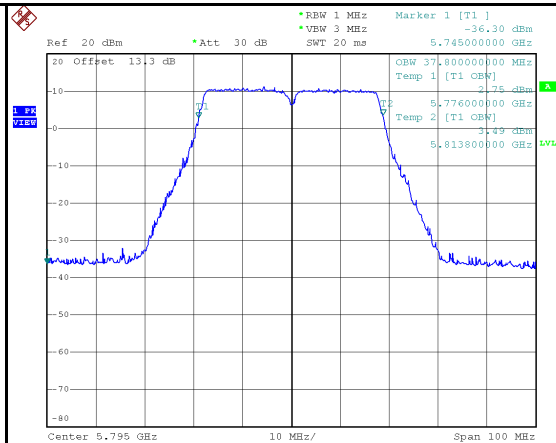


Date: 13.DEC.2023 18:57:19

Test Mode	IEEE 802.11ac (VHT80)_Ant.1
-----------	-----------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5210	95.60	77.20	No limit


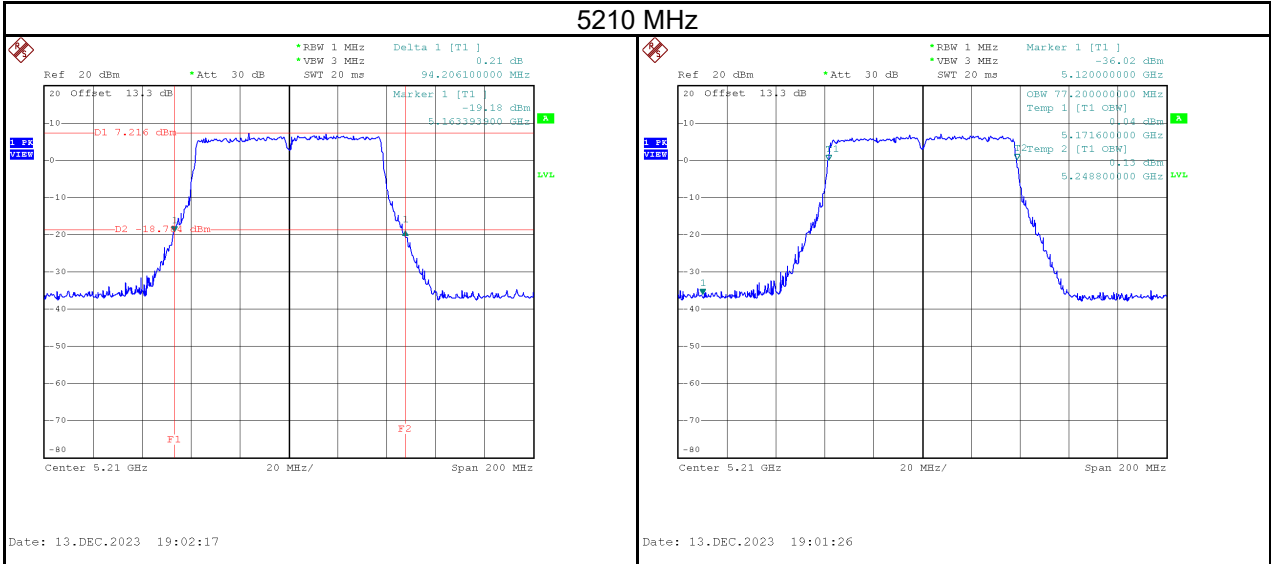


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5290	96.00	77.20	No limit


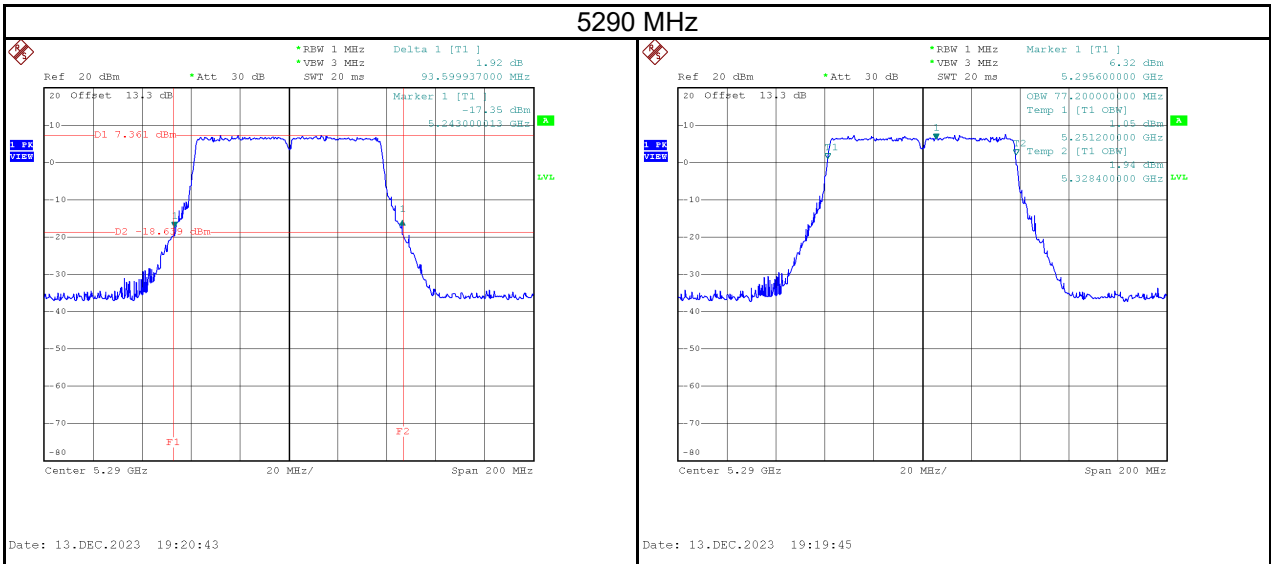


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5530	94.60	76.80	No limit
5610	93.40	76.80	No limit


5530 MHz

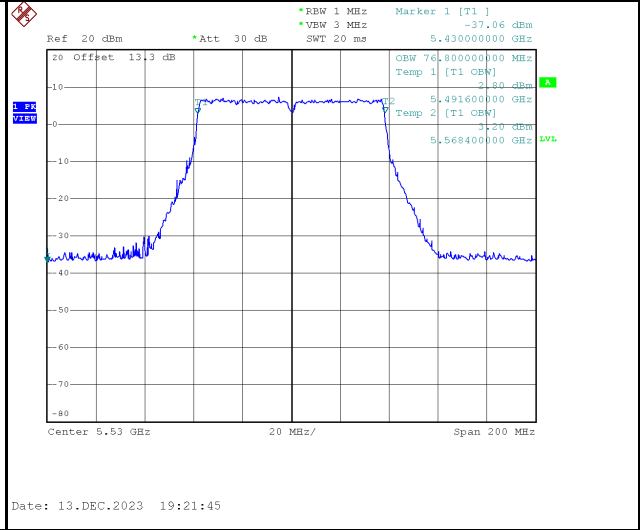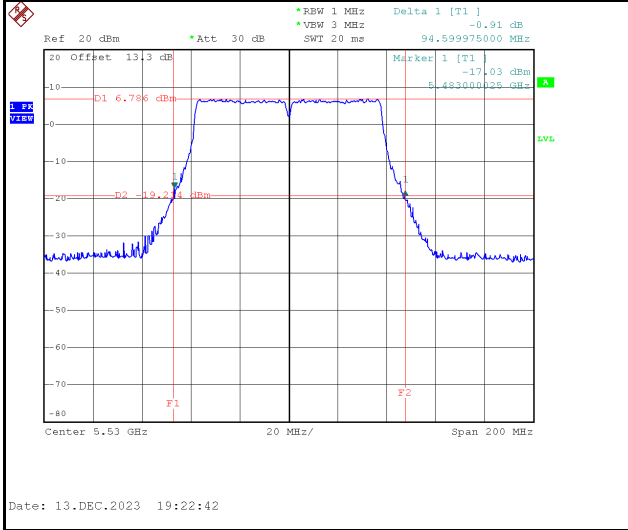

5610 MHz

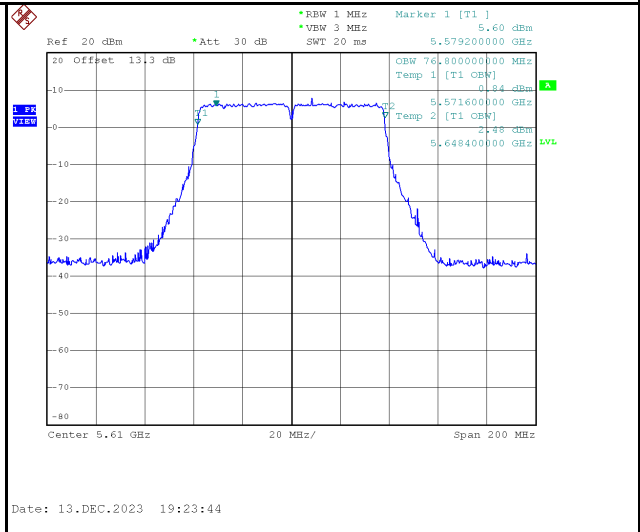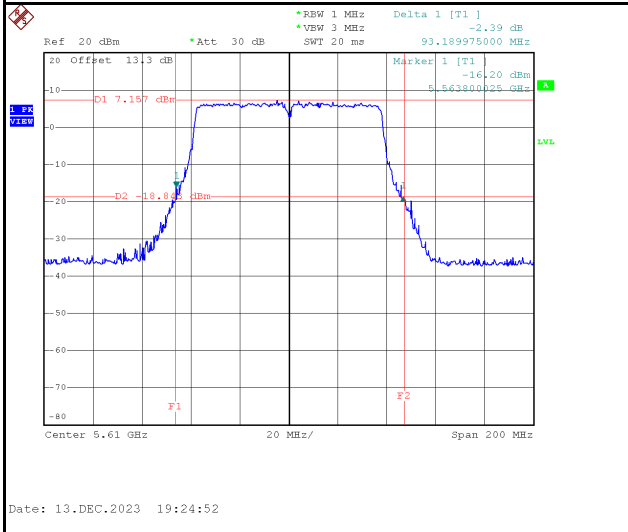


Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5775	75.40	77.20	500	Pass

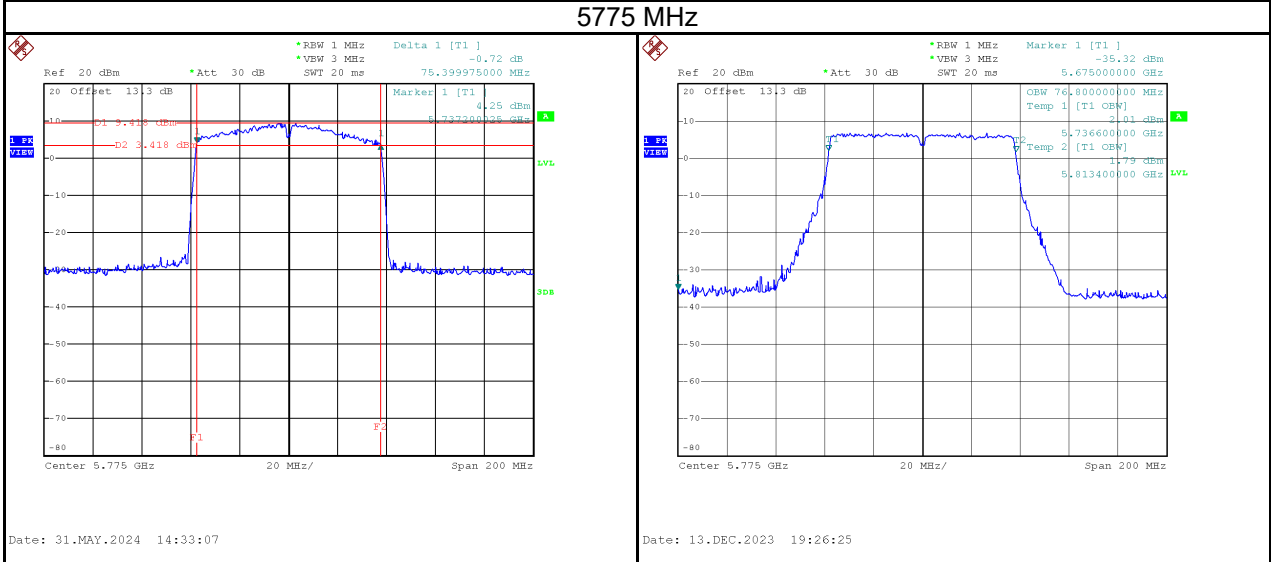


Test Mode	IEEE 802.11ac (VHT160)_Ant.1
-----------	------------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5250	167.60	156.80	No limit


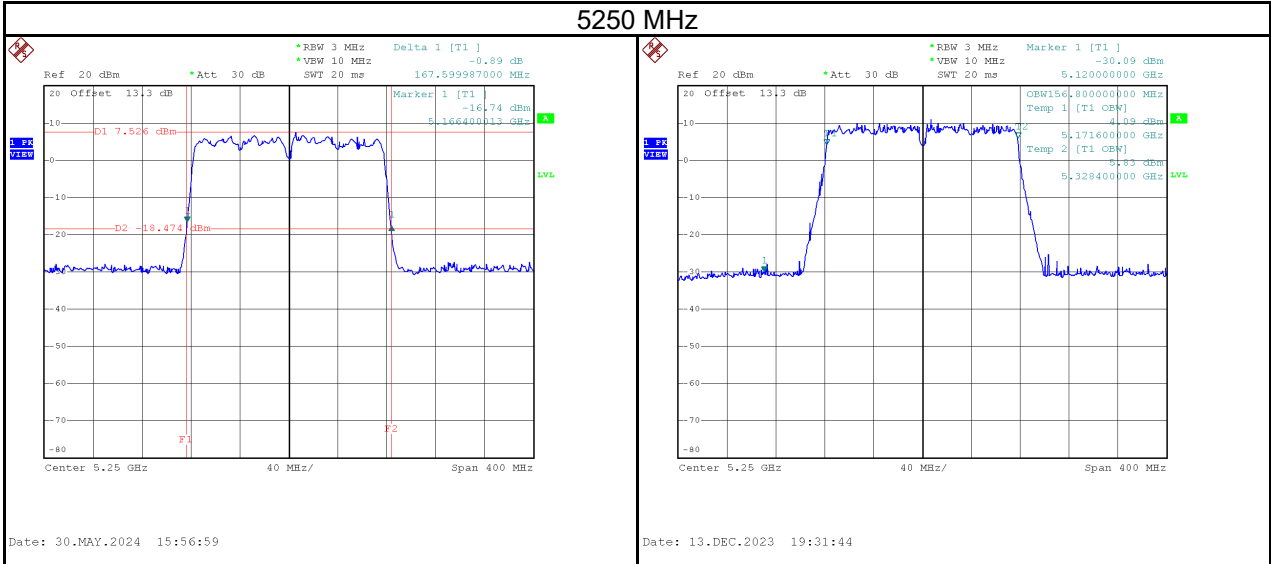


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5570	168.00	156.80	No limit

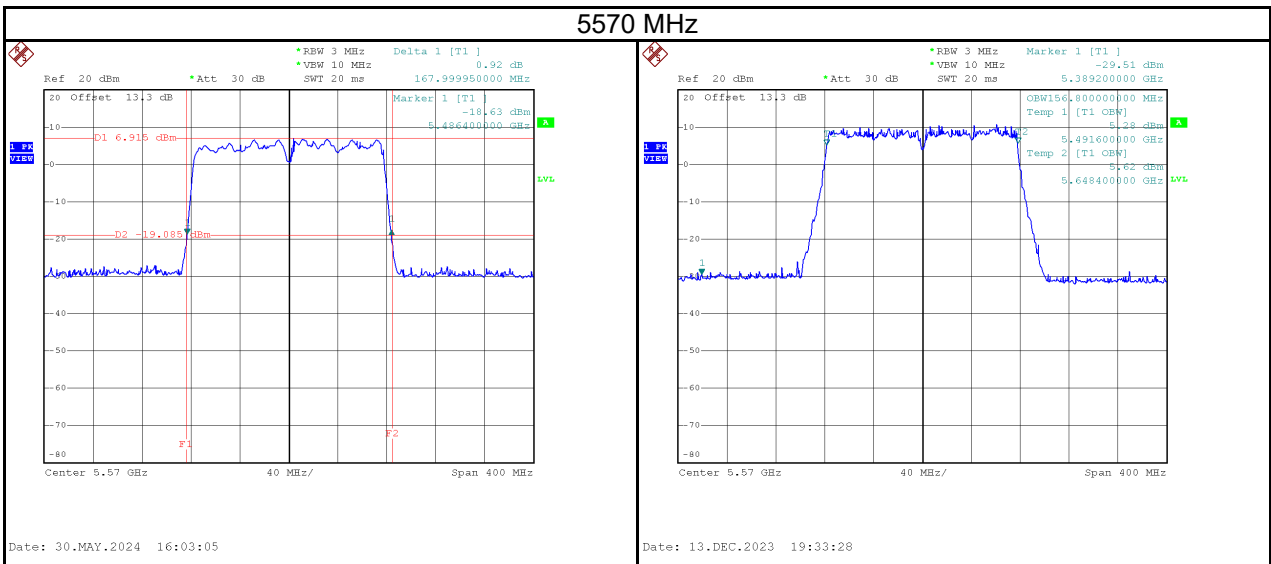


Test Mode	IEEE 802.11ax (HE20)_Ant.1
-----------	----------------------------


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5180	23.35	19.20	No limit
5200	23.55	19.30	No limit
5240	23.56	19.20	No limit

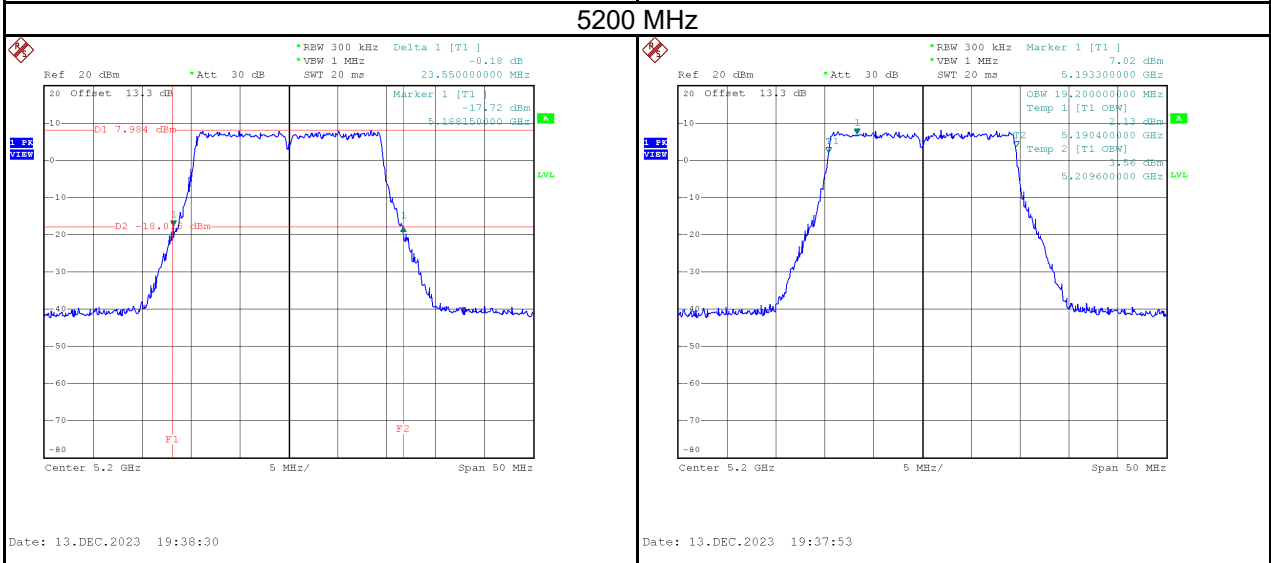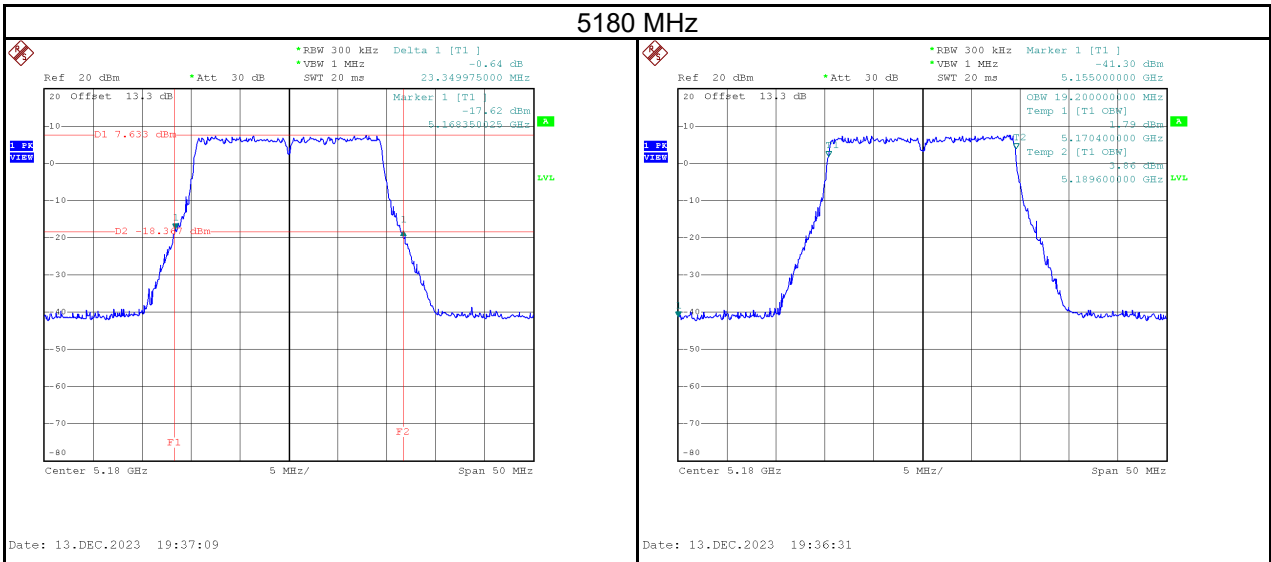

5240 MHz

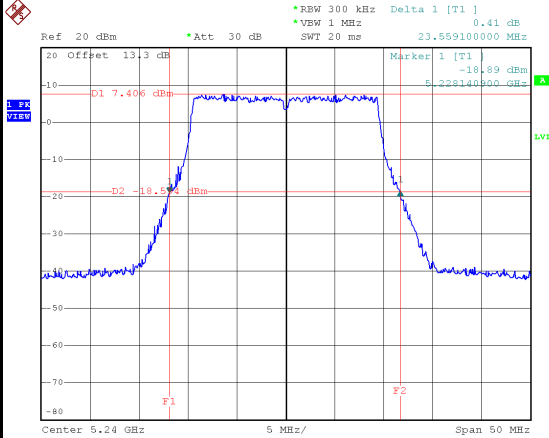

Date: 13.DEC.2023 19:39:53

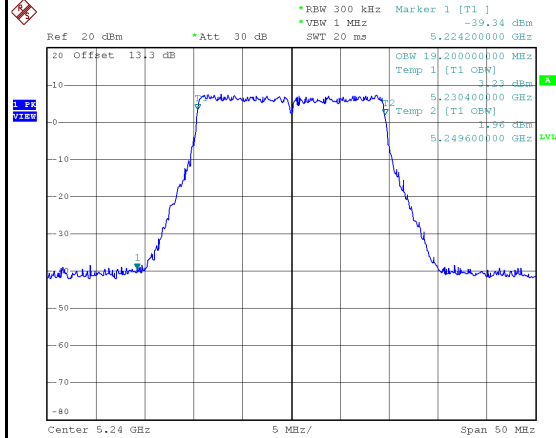

Date: 13.DEC.2023 19:39:18

