#01 802.11b_Bottom Face_0cm_Ch11_Earphone

DUT: 112908-06

Communication System: 802.11b ; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: MSL_2450_110830 Medium parameters used: f = 2462 MHz; σ = 1.98 mho/m; ε_r = 52.7; ρ = 1000 kg/m^3
Ambient Temperature：22.8 ℃; Liquid Temperature：21.8 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3792; ConvF(6.67, 6.67, 6.67); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch11/Area Scan (101x141x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.266 mW/g

Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.459 V/m; Power Drift = -0.039 dB
Peak SAR (extrapolated) = 0.491 W/kg
SAR(1 g) = 0.236 mW/g; SAR(10 g) = 0.112 mW/g
Maximum value of SAR (measured) = 0.260 mW/g

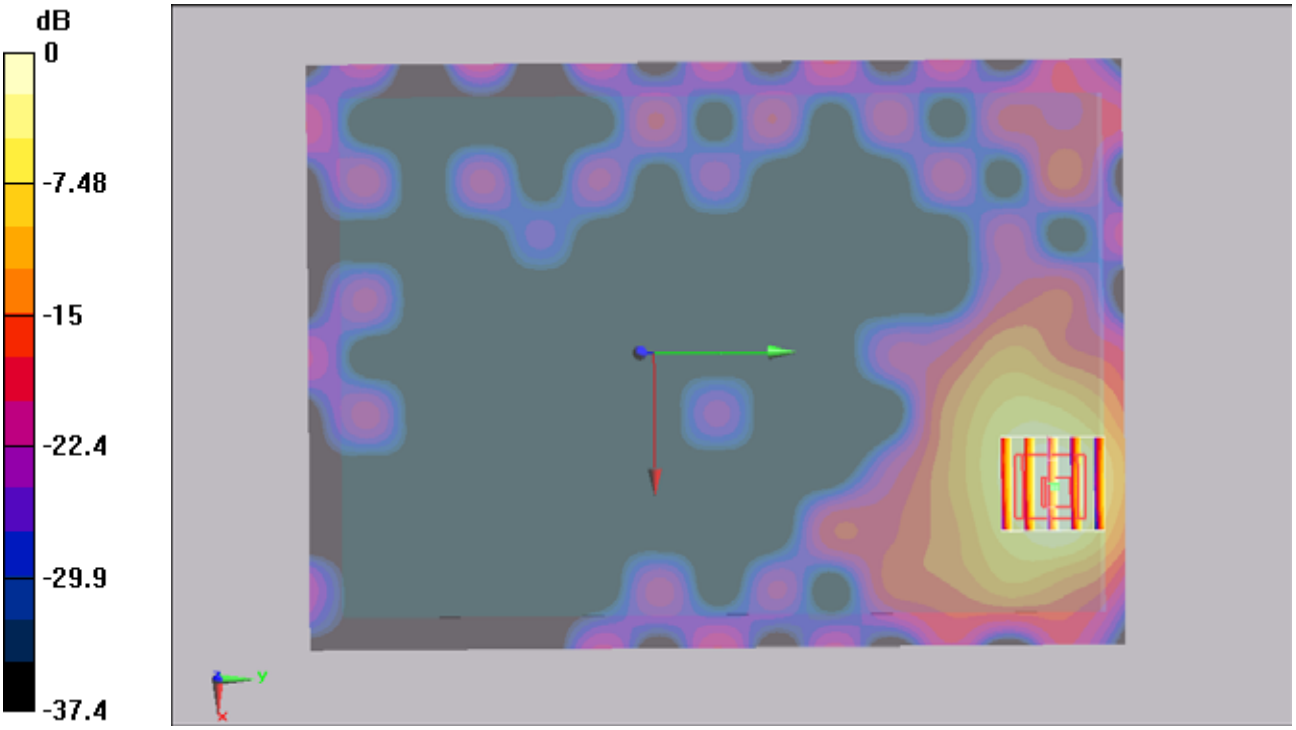

0 dB = 0.260mW/g

#01 802.11b_Bottom Face_0cm_Ch11_Earphone_2D

DUT: 112908-06

Communication System: 802.11b ; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: MSL_2450_110830 Medium parameters used: f = 2462 MHz; σ = 1.98 mho/m; ε_r = 52.7; ρ = 1000 kg/m^3
Ambient Temperature：22.8 °C; Liquid Temperature：21.8 °C

DASY5 Configuration:
- Probe: EX3DV4 - SN3792; ConvF(6.67, 6.67, 6.67); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch11/Area Scan (101x141x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 0.266 mW/g

Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.459 V/m; Power Drift = -0.039 dB
Peak SAR (extrapolated) = 0.491 W/kg
SAR(1 g) = 0.236 mW/g; SAR(10 g) = 0.112 mW/g
Maximum value of SAR (measured) = 0.260 mW/g