

Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 1 of 38

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 22 SUBPART H, PART 24 SUBPART E AND INDUSTRY CANADA RSS-132 and RSS-133 CLASS II PC REPORT

For

Product Description: UNDP-1 PCI Express Mini Card

Trade Name: Acer, Gateway, Packard Bell

Model Name of Host: MS2296, MS2297, MS2298, MS2299

Model Difference of Host: CPU Difference

Model No. for WWAN FCC: UNDP - 1

Module IC: UNDP - 1

FCC ID: HLZUNDP-1A

IC: 1754F-UNDP1A

Report No.: EH/2010/20032

Issue Date: Mar. 02, 2010

FCC Rule Part: 2, 22H & 24E

IC Rule Part: RSS 132 Issue 2 and RSS 133 Issue 5

Prepared for: Acer Incorperated

8F,88, Sec. 1, Hsin Tai Wu Rd. Hsichih Taipei Hsien 221

Prepared by: SGS Taiwan Ltd.

Electronics & Communication Laboratory

No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei

County, Taiwan.

Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除处果有种用,使现在结果像针侧针之棒里含度,同时使使用度原物的手,未可能够更加,不可能够更加。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

 台灣檢驗科技股份有限公司
 t (886-2) 2299-3279
 f (886-2) 2298-0488
 www.tw.sgs.com

 Member of SGS Group



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 2 of 38

CERTIFICATION OF COMPLIANCE

Applicant: Acer Incorperated

8F,88, Sec. 1, Hsin Tai Wu Rd. Hsichih Taipei Hsien 221

Product Description: UNDP-1 PCI Express Mini Card

Trade Name: Acer, Gateway, Packard Bell

FCC ID: HLZUNDP-1A IC: 1754F-UNDP1A

MS2296, MS2297, MS2298, MS2299 Model No of the host

Model Difference CPU difference

of Host:

Marketing Name: Aspire 1830T, Aspire 1551, dot U, EC19C, dot A, EC13N, Aspire One

753, Aspire One 721, LT35, LT34

Model No. for WWAN FCC:UNDP-1 Modular: IC: UNDP-1

File Number: EH/2010/20032

Date of test: Feb. 22, 2010 ~ Feb. 25, 2010

Date of EUT Received: Feb. 22, 2010

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA-603-C-2004, Issue 2 of RSS-Gen and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rule PART 22 subpart H, PART 24 subpart E and IC standards RSS-132 Issue 2, Issue 5 of RSS-133.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Brean Chang	Date:	Mar. 02, 2010
Prepared By:	Brian Chang / Engineer Mark Chung	Date:	Mar. 02, 2010
	Mark Chung / Project Engineer		
Approved By:	Timent Su	Date:	Mar. 02, 2010

Vincent Su / Manager

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責、同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.

t (886-2) 2299-3279 f (886-2) 2298-0488 台灣檢驗科技股份有限公司

www.tw.sgs.com



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 3 of 38

Version

Version No.	Date	Description
00	Mar. 02, 2010	Initial creation of document

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

台灣檢驗科技股份有限公司

Unless otherwise stated the results shown in this test report tere only to the sample(s) tested and such sample(s) are retained to 30 days only.
We 非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com Member of SGS Group



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 4 of 38

Table of Contents

1.	GEN	NERAL INFORMATION	5
	1.1	Host Description	5
	1.2	Related Submittal(s) / Grant (s)	8
	1.3	Test Methodology	8
	1.4	Test Facility	8
	1.5	Special Accessories	8
	1.6	Equipment Modifications	8
2.	SYS	TEM TEST CONFIGURATION	9
	2.1	EUT Configuration	9
	2.2	EUT Exercise	9
	2.3	Test Procedure	9
	2.4	Configuration of Tested System	10
3.	SUN	MARY OF TEST RESULTS	11
4.	DES	CRIPTION OF TEST MODES	11
5.	RF I	POWER OUTPUT/ MAXMUM POWER REDUCTION MEASUREMENT	12
	5.1	Standard Applicable:	12
	5.2	Test Set-up:	12
	5.3	Measurement Procedure:	12
	5.4	Measurement Equipment Used:	12
	5.5	Measurement Result:	13
6.	ERF	P/EIRP MEASUREMENT	14
	6.1	Standard Applicable	14
	6.2	Test SET-UP (Block Diagram of Configuration)	14
	6.3	Measurement Procedure	16
	6.4	Measurement Equipment Used:	17
	6.5	Measurement Result	17
	Meas	surement Result:	18
7.	FIE	LD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	19
	7.1	Standard Applicable	
	7.2	EUT Setup (Block Diagram of Configuration)	19
	7.3	Measurement Procedure	20
	7.4	Measurement Equipment Used:	20
	7.5	Measurement Result	20

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report tere only to the sample(s) tested and such sample(s) are retained to 30 days only.
We 非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 5 of 38

GENERAL INFORMATION

1.1 **Host Description**

General Information of Notebook

Host Name:	Notebook Computer				
Brand Name:	Acer, Gateway, Packard Bell				
Model Name:	MS2296, MS2	2297, MS2298, MS2299			
Model Difference of Host:	CPU difference				
Marketing Name:	Aspire 1830T, Aspire 1551, dot U, EC19C, dot A, EC13N, Aspire One 753, Aspire One 721, LT35, LT34				
Model No. for WWAN Module:	FCC: UNDP-1	1			
	11.1 Vdc Li-I	on battery or 19Vdc from AC/DC adapter			
Power Supply:	Battery:	Model No.:AL10C31, Supplier: SANYO			
	Adapter : Model: PA-1300-04, supplier: LITE-ON TECHNOLOGY CORPORATION				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488 台灣檢驗科技股份有限公司 www.tw.sgs.com Member of SGS Group



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 6 of 38

GSM / WCDMA / CDMA:

GSM / WCDMA / CDMA:						
	GSM / GPRS 850, Class 10	824.2 MHz- 848.8 MHz	33 dBm			
	EDGE 850, Class 10	824.2 MHz- 848.8 MHz	27 dBm			
	GSM / GPRS 900, Class 10	880.2MHz – 914.8MH	33 dBm			
	EDGE 900, Class 10	880.2MHz – 914.8MH	27 dBm			
	GSM / GPRS 1800, Class 10	1710.2MHz-1784.8MHz	30 dBm			
	EDGE 1800, Class 10	1710.2MHz-1784.8MHz	26 dBm			
Cellular Phone Standards Frequency Range:	GSM / GPRS 1900, Class 10	1850.2MHz – 1909.8MHz	30 dBm			
	EDGE 1900, Class 10	1850.2MHz – 1909.8MHz	26 dBm			
	WCDMA/HSUPA/HSDPA Band I	1922.4MHz – 1977.6MHz	24 dBm			
	WCDMA/HSUPA/HSDPA Band II	1852.4MHz – 1907.6MHz	24 dBm			
	WCDMA/HSUPA/HSDPA Band V	826.4MHz - 846.6MHz	24 dBm			
	CDMA2000 /Cellular Band	824.7MHz – 848.31MHz	24 dBm			
	CDMA2000/PCS Band	1851.25 – 1908.75 MHz	24 dBm			
IMEI:	355449021664453					
Hardware Version:	P7					
Software Version:	D4357					
WWAN module FCC ID:	HLZUNDP-1A					
WWAN module IC ID:	1754F-UNDP1A					
	Adding Acer's UNDP-1 PCI Express Mini Card on MS2296, MS2297,					
Class II	MS2298, MS2299 series notebook computer for the corresponding brand					
Permissive change:	Aspire 1830T, Aspire 1551, dot U, EC19C, dot A, EC13N, Aspire One					
	753, Aspire One 721, LT35, LT34.					
	22H(GMSK): 824.2 - 848.8 MHz: 248KGXW					
	24E(GMSK): 1850.2 – 1909.8 MHz: 250KGXW					
Type of Emission:	22H(8PSK): 824.2 - 848.8 MHz:	: 248KG7W				
	24E(8PSK): 1850.2 – 1909.8 MHz: 245KG7W					
	22H(WCDMA): 826.4 - 846.6 MHz: 4M18F9W					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 7 of 38

	24E(WCDMA): 1852.4 – 1907.5 MHz: 4M19F9W
	22H(CDMA2000): 824.7 – 848.31 MHz: 1M28F9W
	24E(CDMA2000): 1851.25 – 1908.75 MHz: 1M28F9W
	22H(GMSK): 824.2 - 848.8 MHz: 1.986W/32.98dBm
	24E(GMSK): 1850.2 – 1909.8 MHz: 0.885W/29.47dBm
Transmit power	22H(8PSK): 824.2 - 848.8 MHz: 0.607W/27.83dBm
(Conducted Power) Listed	24E(8PSK): 1850.2 – 1909.8 MHz: 0.48W/26.81dBm
in Test Report/Original	22H(WCDMA): 826.4 - 846.6 MHz: 0.277W/24.42dBm
Grant:	24E(WCDMA): 1852.4 – 1907.5 MHz: 0.286W/24.56dBm
	22H(CDMA2000): 824.7 – 848.31 MHz: 0.31 W/24.91dBm
	24E(CDMA2000): 1851.25 – 1908.75 MHz: 0.289W/24.61dBm

This test report applies for GPRS/EDGE 850, GPRS/EDGE 1900, WCDMA/HSUPA/HSDPA Band II/V bands & CDMA2000 Ceullar / PCS band.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sgs.com



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 8 of 38

Related Submittal(s) / Grant (s) 1.2

This submittal(s) (test report) is intended for FCC ID: HLZUNDP-1A filing to comply with Section Part 22 subpart H, Part 24 subpart E of the FCC CFR 47 Rules. And IC: <u>1754F-UNDP1A</u> filing to comply with RSS-132 and Issue 5 of RSS-133

1.3 **Test Methodology**

Both conducted and radiated testing were performed according to the procedures document on TIA/EIA-603-C-2004 and FCC CFR 47 2.1046, 2.1053, RSS-132, Issue 5 of RSS-133 and Issue 2 of RSS-Gen.

1.4 **Test Facility**

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-1

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 & 10 meters) and FCC Registration Number: 94644.

1.5 **Special Accessories**

Not available for this EUT intended for grant.

1.6 **Equipment Modifications**

Not available for this EUT intended for grant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemn fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only n. Attention is drawn to the limitation of liability, indemniand within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.

t (886-2) 2299-3279

f (886-2) 2298-0488 www tw sas com



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 9 of 38

SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Measurement at Antenna Port:

According to measurement procured TIA/EIA 603C, the EUT is placed on a turn table which is 0.8 m above ground plane. A low loss of RF cable was used to connect the antenna port of EUT to measurement equipment.

2.3.2 Radiated Emissions (ERP/EIRP):

According to measurement procured TIA/EIA 603C, issue 2 of RSS-Gen and TIA/EIA IS-98 for Mobile stations. The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements.

A standard antenna was used to replace the EUT and connect to the SG. Adjust the SG output level to reach the max emission level which were measured above.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms_and_conditions.htm and. for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.

f (886-2) 2298-0488

www.tw.sas.com Member of SGS Group



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 10 of 38

2.4 Configuration of Tested System

Fig. 1-1 Configuration for Radiated Emission

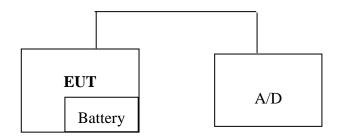


Fig. 1-2Configuration (Remote Side, on the corner)




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1.	Universal Radio Communication Tester	R&S	CMU200	102189	Shielded	Un-shielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless orienwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com Member of SGS Group



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 11 of 38

SUMMARY OF TEST RESULTS

FCC Rules	IC Rules	Description Of Test	Result
\$2.1046(a) \$22.913(a)(2) \$24.232(c)	§4.8 (RSS-Gen) §4.4 (RSS-132) §6.4 (RSS-133)	ERP/ EIRP measurement	Compliant
\$2.1053 \$22.917(a) \$24.238(a)	§4.9 (RSS-Gen) §4.5 (RSS-132) §6.5 (RSS-133)	Field Strength of Spurious Radiation	Compliant

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Set EUT power control "all up bits" for all test mode through base station.

The Channel Low, Mid and High for each type of bands with rated data rate were chosen for above testing.

The field strength of ERP/EIRP power and spurious radiation emission were measured as EUT stand up position for both GPRS 850 and 1900 bands were reported which has worst data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless orienwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sgs.com Member of SGS Group



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010


Page: 12 of 38

5. RF POWER OUTPUT/ MAXMUM POWER REDUCTION MEASUREMENT

5.1 Standard Applicable:

FCC 24.232(C) Peak Power Measurement, 22.913(a)(2), RSS-132 4.4, & RSS-133 6.4.

5.2 Test Set-up:

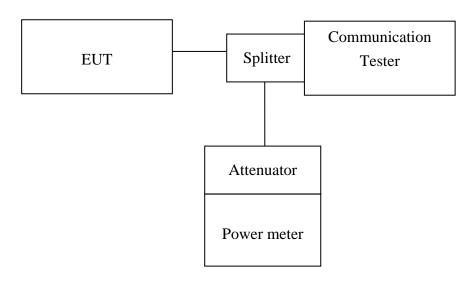

Note: Measurement setup for testing on Antenna connector

5.3 Measurement Procedure:

The transmitter output was connected to a calibrated attenuator, the other end of which was connected to a power meter. Transmitter output was read off the power meter in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to the power meter reaing. It was used for EUT and Base station setting.

5.4 Measurement Equipment Used:

Refer to section 2.4 in this report

台灣檢驗科技股份有限公司

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com Member of SGS Group



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 13 of 38

5.5 Measurement Result:

EUT Mode	Frequency (MHz)	СН	Path Loss (dB)	AVer.age Power (1TS) (dBm)	AVer.age Power (2TS) (dBm)
GPRS 850 (Class 10)	824.20	128	0.8	32.50	32.50
	836.60	190	0.8	32.60	32.60
	848.80	251	0.8	32.62	32.62

EUT Mode	Frequency (MHz)	СН	Path Loss (dB)	AVer.age Power (1TS) (dBm)	AVer.age Power (2TS) (dBm)
GPRS 1900 (Class 10)	1850.2	512	0.8	29.13	29.13
	1880.0	661	0.8	29.10	29.00
	1909.8	810	0.8	29.10	29.00

Note: For the Avg. power of others modulation, GSM 850/1900, EDGE 850/1900, WCDMA B2/B5, and CDMA2000 Cellular/PCS Band. Please refer to SAR Report. No: ES/2010/ 20006

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.

t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sgs.com Member of SGS Group



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 14 of 38

6. ERP/EIRP MEASUREMENT

6.1 Standard Applicable

According to FCC §2.1046

FCC 22.913(a)(2) Mobile station are limited to 7W ERP.


FCC 24.232(c) Mobile station are limited to 2W EIRP.

According to issue 5 of RSS-133 §6.4. The peak e.i.r.p. for transmitters operating in the band 1850-1910 MHz shall not exceed the limits given in SRSP-510.

According to issue 2 of RSS 132, section 4.4. The transmitter output power shall not exceed the limits given in SRSP-503.

6.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

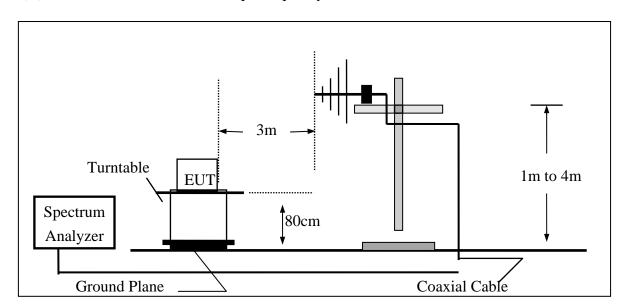

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

台灣檢驗科技股份有限公司

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 **134** 號

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com


Member of SGS Group




Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 15 of 38

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

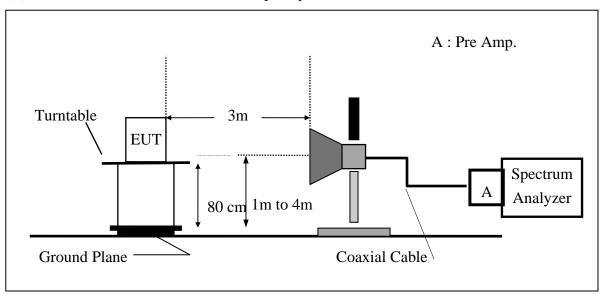

(C) Substituted Method Test Set-UP

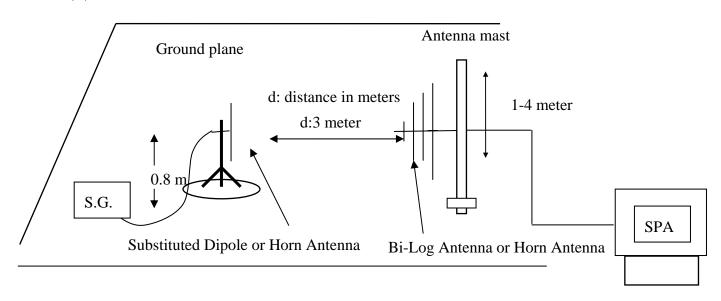

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless orienwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.

t (886-2) 2299-3279



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 16 of 38

6.3 Measurement Procedure

The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.

During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows:

EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by a horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:

ERP = S.G. output (dBm) + Antenna Gain (dBd) - Cable Loss (dB)

EIRP = S.G. output (dBm) + Antenna Gain (dBi) - Cable Loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms_and_conditions.htm and. for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.

t (886-2) 2299-3279 f (886-2) 2298-0488



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 17 of 38

6.4 Measurement Equipment Used:

ERP, EIRP MEASUREMENT EQUIPMENT List 966 Chamber								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	R&S	FSP 40	100034	02/12/2010	02/11/2011			
Bilog Antenna	SCHWAZBECK	VULB9160	9160-3136	11/15/2009	11/14/2010			
Dipole Antenna	SCHWAZBECK	VHAP	908/909	07/10/2008	07/09/2010			
Dipole Antenna	SCHWAZBECK	UHAP	891/892	07/10/2008	07/09/2010			
Hor.n antenna	SCHWAZBECK	BBHA 9120D	309	01/22/2008	01/21/2010			
Horn antenna	SCHWAZBECK	BBHA 9120D	9120D-673	05/09/2008	05/08/2010			
Signal Generator	R&S	SMR40	100210	01/22/2010	01/21/2011			
Signal Generator	Agilent	E4438C	MY45093613	06/11/2009	06/10/2010			
Pre-Amplifier	Agilent	8447D	1937A02834	11/30/2009	11/29/2010			
Pre-Amplifier	Agilent	8449B	3008A01973	01/05/2009	01/04/2010			
Attenuator	Mini-Circuit	BW-S20W5	001	07/05/2009	07/04/2010			
Attenuator	Mini-Circuit	BW-S10W5	001	07/05/2009	07/04/2010			
Attenuator	Mini-Circuit	BW-S6W5	001	07/05/2009	07/04/2010			
Radio Communication Analyzer	R&S	CMU200	102189	05/13/2008	05/12/2010			
Turn Table	HD	DT420	N/A	N.C.R	N.C.R			
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R			
Controller	HD	HD100	N/A	N.C.R	N.C.R			
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	01/05/2010	01/04/2011			
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	01/05/2010	01/04/2011			
Filter 800-1000	Micro-Tronics	BRM13462	1	01/05/2010	01/04/2011			
Filter 1800-2000	Micro-Tronics	BRM13463	1	01/05/2010	01/04/2011			
3m Site	SGS	966 chamber	N/A	11/08/2009	11/09/2010			

6.5 Measurement Result

Refer to following pages for detail.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 18 of 38

Measurement Result:

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
	824.20	128	**	V	123.32	36.93	-7.87	3.62	25.43	38.45
GPRS 850	024.20	120	Н	Н	123.41	37.14	-7.87	3.62	25.64	38.45
	836.60	.60 190	100	V	123.87	37.62	-7.88	3.65	26.09	38.45
			190 H	Н	Н	122.50	36.27	-7.88	3.65	24.74
	848.80	80 251	251	V	124.12	38.00	-7.88	3.68	26.44	38.45
	848.80		Н	Н	122.03	35.84	-7.88	3.68	24.28	38.45

Remark:

(1) The RBW, VBW of SPA for frequency RBW=300 KHz, VBW=1MHz

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
	1850.20	512	**	V	117.07	12.68	9.90	5.56	17.02	33.00
	1030.20	312	Н	Н	118.57	14.39	9.90	5.56	18.73	33.00
GPRS 1900	1880.00	661	661 H	V	115.47	11.11	9.99	5.61	15.49	33.00
GFKS 1900		001		Н	116.44	12.30	9.99	5.61	16.67	33.00
	1000.80	810	Н	V	117.19	12.86	10.08	5.66	17.28	33.00
	1909.80			Н	119.05	14.94	10.08	5.66	19.36	33.00

Remark:

(1) The RBW, VBW of SPA for frequency RBW=300 KHz, VBW=1MHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 19 of 38

7. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

7.1 Standard Applicable

According to FCC §2.1053,

FCC §22.917(a),§24.238(a) the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than 43 + 10 log (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)

According to RSS-132 §4.5 and RSS-133 §6.5

Out-of-Block Emissions

a. Mobile stations must comply with subsection i. below.

In the first 1.0MHz band immediately outside and adjacent to the licensee's frequency block. the power of emissions per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in watts) by at least $43 + 10 \log (P)$, dB.

b. After the first 1.0 MHz (for equipment that complies with a.i. of this subsection) or 1.5 MHz (for equipment that complies with a.ii.of this subsection), the power of emissions shall be attenuated below the transmitter output power by at least $43 + 10 \log (P)$, dB, per any MHz of bandwidth.

(Note: If the test result using 1% of the emission bandwidth is used, then power integration over 1.0 MHz is required; alternatively, the spectrum analyser resolution and video bandwidths can be increased to 1.0 MHz for this measurement).

Out-of-Sub-band Emissions

Outside the sub-bands 1850-1910 MHz and 1930-1990 MHz, the attenuation shall be equal to or greater than the out-of-block emission limits in Section 6.5.1.

7.2 EUT Setup (Block Diagram of Configuration)

Refer to section 5.2 for details

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279

www.tw.sgs.com



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 20 of 38

7.3 Measurement Procedure

The EUT was placed on a non-conductive; the measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequencies (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method.

ERP in frequency band 824.2 - 848.80MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows:

EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by a horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

ERP = S.G. output (dBm) + Antenna Gain(dBd) - Cable Loss <math>(dB)

EIRP = S.G. output (dBm) + Antenna Gain(dBi) – Cable Loss (dB)

7.4 Measurement Equipment Used:

Refer to section 5.4 for details

7.5 Measurement Result

Refer to attach tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 21 of 38

Radiated Spurious Emission Measurement Result: GPRS 850 Mode

Operation Mode : TX CH Low Mode Feb, 24, 2010

Fundamental Frequency Test By: Brian : 824.20 MHz Temperature Pol: Ver : 25°℃

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
104.69	45.87	V	-55.62	-7.76	1.38	-64.76	-13.00	-51.76
198.78	47.90	V	-53.77	-7.84	1.71	-63.32	-13.00	-50.32
216.24	44.42	V	-56.75	-7.86	1.80	-66.40	-13.00	-53.40
245.34	44.55	V	-55.52	-7.89	1.96	-65.37	-13.00	-52.37
897.18	34.57	V	-50.26	-7.95	3.78	-61.99	-13.00	-48.99
960.23	34.19	V	-50.19	-8.00	3.91	-62.10	-13.00	-49.10
824.00	78.36	V	-8.03	-7.87	3.62	-19.53	-13.00	-6.53
1648.40	49.23	V	-55.35	9.29	5.23	-51.29	-13.00	-38.29
2472.60	54.48	V	-46.53	10.08	6.53	-42.98	-13.00	-29.98
3296.80	39.40	V	-59.47	12.17	7.71	-55.02	-13.00	-42.02
4121.00	39.50	V	-56.62	12.61	8.86	-52.87	-13.00	-39.87
4945.20		V		12.65	9.74		-13.00	
5769.40		V		13.55	10.54		-13.00	
6593.60		V		12.05	11.30		-13.00	
7417.80		V		11.49	12.10		-13.00	
8242.00		V		11.48	12.71		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 40GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- $4 \text{ ERP/EIRP } (dBm) = SG \text{ Setting}(dBm) + Antenna Gain } (dB/dBi) Cable loss } (dB)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless orienwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.

t (886-2) 2299-3279 f (886-2) 2298-0488



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 22 of 38

Radiated Spurious Emission Measurement Result: GPRS 850 Mode

Operation Mode : TX CH Low Mode Feb, 24, 2010

Fundamental Frequency Test By: Brian : 824.20 MHz **Temperature** Pol: Hor : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
99.84	44.81	Н	-58.20	-7.76	1.36	-67.32	-13.00	-54.32
250.19	47.35	Н	-51.86	-7.89	1.99	-61.74	-13.00	-48.74
269.59	45.22	Н	-53.39	-7.90	2.06	-63.35	-13.00	-50.35
280.26	43.33	Н	-54.95	-7.91	2.10	-64.95	-13.00	-51.95
332.64	41.43	Н	-55.93	-7.74	2.29	-65.96	-13.00	-52.96
960.23	33.47	Н	-50.68	-8.00	3.91	-62.59	-13.00	-49.59
824.00	78.11	Н	-8.16	-7.87	3.62	-19.66	-13.00	-6.66
1648.40	44.50	Н	-59.90	9.29	5.23	-55.84	-13.00	-42.84
2472.60	51.88	Н	-49.03	10.08	6.53	-45.48	-13.00	-32.48
3296.80	36.36	Н	-62.74	12.17	7.71	-58.28	-13.00	-45.28
4121.00	34.88	Н	-61.37	12.61	8.86	-57.62	-13.00	-44.62
4945.20		Н		12.65	9.74		-13.00	
5769.40		Н		13.55	10.54		-13.00	
6593.60		Н		12.05	11.30		-13.00	
7417.80		Н		11.49	12.10		-13.00	
8242.00		Н		11.48	12.71		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 40GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- $4 \text{ ERP/EIRP } (dBm) = SG \text{ Setting}(dBm) + Antenna Gain } (dB/dBi) Cable loss } (dB)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless orienwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 23 of 38

Radiated Spurious Emission Measurement Result: GPRS 850 Mode

Operation Mode : TX CH Mid Mode Test Date: Feb, 24, 2010

Fundamental Frequency: 836.60 MHz Test By: Brian Pol: Ver Temperature : 25℃

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
92.08	46.42	V	-56.51	-7.75	1.29	-65.55	-13.00	-52.55
198.78	45.63	V	-56.04	-7.84	1.71	-65.59	-13.00	-52.59
216.24	44.47	V	-56.70	-7.86	1.80	-66.35	-13.00	-53.35
240.49	44.24	V	-56.01	-7.88	1.94	-65.83	-13.00	-52.83
332.64	39.52	V	-58.33	-7.74	2.29	-68.36	-13.00	-55.36
921.43	32.32	V	-52.37	-7.97	3.83	-64.17	-13.00	-51.17
1673.20	49.93	V	-54.63	9.36	5.27	-50.53	-13.00	-37.53
2509.80	56.23	V	-44.55	10.09	6.58	-41.05	-13.00	-28.05
3346.40	43.50	V	-55.36	12.28	7.79	-50.88	-13.00	-37.88
4183.00	41.39	V	-54.50	12.62	8.93	-50.81	-13.00	-37.81
5019.60		V		12.67	9.81		-13.00	
5856.20		V		13.68	10.62		-13.00	
6692.80		V		11.95	11.39		-13.00	
7529.40		V		11.45	12.20		-13.00	
8366.00		V		11.59	12.81		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 40GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless orienwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only

and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 24 of 38

Radiated Spurious Emission Measurement Result: GPRS 850 Mode

Operation Mode : TX CH Mid Mode Test Date: Feb, 24, 2010

Fundamental Frequency: 836.60 MHz Test By: Brian Pol: Temperature Hor : 25°℃

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
90.14	46.10	Н	-57.63	-7.75	1.27	-66.65	-13.00	-53.65
198.78	44.73	Н	-56.83	-7.84	1.71	-66.37	-13.00	-53.37
252.13	44.72	Н	-54.43	-7.89	2.00	-64.32	-13.00	-51.32
332.64	41.68	Н	-55.68	-7.74	2.29	-65.71	-13.00	-52.71
504.33	37.03	Н	-56.27	-7.72	2.81	-66.81	-13.00	-53.81
715.79	33.45	Н	-57.13	-7.86	3.35	-68.34	-13.00	-55.34
972.84	33.73	Н	-50.34	-8.00	3.95	-62.29	-13.00	-49.29
1673.20	45.53	Н	-58.85	9.36	5.27	-54.75	-13.00	-41.75
2509.80	54.90	Н	-45.80	10.09	6.58	-42.30	-13.00	-29.30
3346.40	36.65	Н	-62.41	12.28	7.79	-57.93	-13.00	-44.93
4183.00	37.09	Н	-58.94	12.62	8.93	-55.25	-13.00	-42.25
5019.60		Н		12.67	9.81		-13.00	
5856.20		Н		13.68	10.62		-13.00	
6692.80		Н		11.95	11.39		-13.00	
7529.40		Н		11.45	12.20		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 40GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless orienwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only

and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279

SGS Taiwan Ltd.

f (886-2) 2298-0488

www.tw.sgs.com Member of SGS Group



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 25 of 38

Radiated Spurious Emission Measurement Result: GPRS 850 Mode

Operation Mode : TX CH High Mode Test Date: Feb, 24, 2010

Fundamental Frequency: 848.80 MHz Test By: Brian Pol: Ver Temperature : 25℃

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
92.08	45.18	V	-57.75	-7.75	1.29	-66.79	-13.00	-53.79
104.69	44.83	V	-56.66	-7.76	1.38	-65.80	-13.00	-52.80
198.78	45.39	V	-56.28	-7.84	1.71	-65.83	-13.00	-52.83
240.49	44.54	V	-55.71	-7.88	1.94	-65.53	-13.00	-52.53
332.64	39.99	V	-57.86	-7.74	2.29	-67.89	-13.00	-54.89
919.49	33.73	V	-50.97	-7.97	3.83	-62.76	-13.00	-49.76
850.00	79.87	V	-6.24	-7.88	3.68	-17.80	-13.00	-4.80
1697.60	50.46	V	-54.08	9.44	5.31	-49.95	-13.00	-36.95
2546.40	51.35	V	-49.29	10.20	6.63	-45.73	-13.00	-32.73
3395.20	39.54	V	-59.31	12.38	7.87	-54.80	-13.00	-41.80
4244.00	39.35	V	-56.31	12.63	9.00	-52.68	-13.00	-39.68
5092.80		V		12.74	9.88		-13.00	
5941.60		V		13.81	10.70		-13.00	
6790.40		V		11.86	11.48		-13.00	
7639.20		V		11.40	12.27		-13.00	
8488.00		V		11.70	12.91		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 40GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Onless orienwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.

t (886-2) 2299-3279



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 26 of 38

Radiated Spurious Emission Measurement Result: GPRS 850 Mode

Operation Mode : TX CH High Mode Test Date: Feb, 24, 2010

Fundamental Frequency: 848.80 MHz Test By: Brian Pol: Temperature Hor : 25℃

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
99.84	45.15	Н	-57.86	-7.76	1.36	-66.98	-13.00	-53.98
198.78	44.27	Н	-57.29	-7.84	1.71	-66.83	-13.00	-53.83
252.13	45.10	Н	-54.05	-7.89	2.00	-63.94	-13.00	-50.94
266.68	44.33	Н	-54.37	-7.90	2.05	-64.32	-13.00	-51.32
332.64	41.21	Н	-56.15	-7.74	2.29	-66.18	-13.00	-53.18
934.04	33.20	Н	-51.21	-7.98	3.85	-63.05	-13.00	-50.05
850.00	75.16	Н	-11.03	-7.88	3.68	-22.59	-13.00	-9.59
1697.60	50.64	Н	-53.71	9.44	5.31	-49.58	-13.00	-36.58
2546.40	49.67	Н	-50.93	10.20	6.63	-47.37	-13.00	-34.37
3395.20	35.45	Н	-63.58	12.38	7.87	-59.06	-13.00	-46.06
4244.00	34.39	Н	-61.42	12.63	9.00	-57.80	-13.00	-44.80
5092.80		Н		12.74	9.88		-13.00	
5941.60		Н		13.81	10.70		-13.00	
6790.40		Н		11.86	11.48		-13.00	
7639.20		Н		11.40	12.27		-13.00	
8488.00		Н		11.70	12.91		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 40GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless orienwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 27 of 38

Radiated Spurious Emission Measurement Result: GPRS 1900 Mode

Operation Mode : TX CH Low Mode Test Date: Feb, 24, 2010

Fundamental Frequency: 1850.20MHz Test By: Brian Pol: Ver Temperature : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
92.08	45.39	V	-57.54	-7.75	1.29	-66.58	-13.00	-53.58
104.69	45.66	V	-55.83	-7.76	1.38	-64.97	-13.00	-51.97
201.69	45.52	V	-56.20	-7.84	1.72	-65.76	-13.00	-52.76
240.49	44.98	V	-55.27	-7.88	1.94	-65.09	-13.00	-52.09
271.53	42.06	V	-57.12	-7.90	2.07	-67.09	-13.00	-54.09
890.39	32.70	V	-52.31	-7.94	3.77	-64.02	-13.00	-51.02
1850.00	76.77	V	-27.62	9.90	5.56	-23.28	-13.00	-10.28
3700.40	41.17	V	-56.76	12.61	8.31	-52.46	-13.00	-39.46
5550.60	46.34	V	-44.50	13.23	10.33	-41.60	-13.00	-28.60
7400.80		V		11.50	12.08		-13.00	
9251.00		V		11.92	13.50		-13.00	
11101.20		V		11.66	15.11		-13.00	
12951.40		V		13.63	16.60		-13.00	
14801.60		V		12.76	17.95		-13.00	
16651.80		V		15.92	19.14		-13.00	
18502.00		V		18.75	10.40		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB				
	80MHz -1000MHz: 3.76dB				
	1GHz - 40GHz: 4.45dB				

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless orienwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 28 of 38

Radiated Spurious Emission Measurement Result: GPRS 1900 Mode

Operation Mode : TX CH Low Mode Test Date: Feb, 24, 2010

Fundamental Frequency: 1850.20MHz Test By: Brian Pol: Temperature Hor : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
96.93	44.35	Н	-58.88	-7.76	1.33	-67.97	-13.00	-54.97
198.78	43.21	Н	-58.35	-7.84	1.71	-67.89	-13.00	-54.89
255.04	45.08	Н	-53.98	-7.89	2.01	-63.88	-13.00	-50.88
264.74	44.81	Н	-53.95	-7.90	2.04	-63.89	-13.00	-50.89
332.64	40.36	Н	-57.00	-7.74	2.29	-67.03	-13.00	-54.03
955.38	33.22	Н	-50.96	-8.00	3.90	-62.85	-13.00	-49.85
1850.00	76.91	Н	-27.27	9.90	5.56	-22.93	-13.00	-9.93
3700.40	39.79	Н	-58.25	12.61	8.31	-53.95	-13.00	-40.95
5550.60	41.13	Н	-49.92	13.23	10.33	-47.02	-13.00	-34.02
7400.80		Н		11.50	12.08		-13.00	
9251.00		Н		11.92	13.50		-13.00	
11101.20		Н		11.66	15.11		-13.00	
12951.40		Н		13.63	16.60		-13.00	
14801.60		Н		12.76	17.95		-13.00	
16651.80		Н		15.92	19.14		-13.00	
18502.00		Н		18.75	10.40		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB					
	80MHz -1000MHz: 3.76dB					
	1GHz - 40GHz: 4.45dB					

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless orienwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 29 of 38

Radiated Spurious Emission Measurement Result: GPRS 1900 Mode

Operation Mode : TX CH Mid Mode Feb, 24, 2010

Fundamental Frequency: 1880MHz Test By: Brian **Temperature** Pol: Ver : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
90.14	46.91	V	-56.27	-7.75	1.27	-65.29	-13.00	-52.29
101.78	46.54	V	-55.22	-7.76	1.37	-64.34	-13.00	-51.34
198.78	46.55	V	-55.12	-7.84	1.71	-64.67	-13.00	-51.67
240.49	45.05	V	-55.20	-7.88	1.94	-65.02	-13.00	-52.02
276.38	42.42	V	-56.60	-7.91	2.08	-66.60	-13.00	-53.60
945.68	32.76	V	-51.87	-8.00	3.87	-63.74	-13.00	-50.74
3760.00	39.86	V	-57.80	12.60	8.39	-53.58	-13.00	-40.58
5640.00	37.83	V	-52.75	13.36	10.41	-49.80	-13.00	-36.80
7520.00		V		11.45	12.19		-13.00	
9400.00		V		11.93	13.61		-13.00	
11280.00		V		11.92	15.27		-13.00	
13160.00		V		13.33	16.71		-13.00	
15040.00		V		13.76	18.15		-13.00	
16920.00		V		15.27	19.32		-13.00	
18800.00		V		18.68	16.58		-13.00	

	30MHz - 80MHz: 5.04dB					
Measurement uncertainty	80MHz -1000MHz: 3.76dB					
	1GHz - 40GHz: 4.45dB					

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless orienwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 30 of 38

Radiated Spurious Emission Measurement Result: GPRS 1900 Mode

Operation Mode : TX CH Mid Mode Feb, 24, 2010

Fundamental Frequency: 1880MHz Test By: Brian Temperature Pol: Hor : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
90.14	45.27	Н	-58.46	-7.75	1.27	-67.48	-13.00	-54.48
99.84	44.86	Н	-58.15	-7.76	1.36	-67.27	-13.00	-54.27
250.19	44.72	Н	-54.49	-7.89	1.99	-64.37	-13.00	-51.37
288.99	43.52	Н	-54.48	-7.91	2.13	-64.53	-13.00	-51.53
332.64	40.81	Н	-56.55	-7.74	2.29	-66.58	-13.00	-53.58
890.39	33.50	Н	-51.61	-7.94	3.77	-63.31	-13.00	-50.31
3760.00	43.06	Н	-54.71	12.60	8.39	-50.50	-13.00	-37.50
5640.00	34.64	Н	-56.11	13.36	10.41	-53.16	-13.00	-40.16
7520.00		Н		11.45	12.19		-13.00	
9400.00		Н		11.93	13.61		-13.00	
11280.00		Н		11.92	15.27		-13.00	
13160.00		Н		13.33	16.71		-13.00	
15040.00		Н		13.76	18.15		-13.00	
16920.00		Н		15.27	19.32		-13.00	
18800.00		Н		18.68	16.58		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 40GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless orienwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 SGS Taiwan Ltd. f (886-2) 2298-0488

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

www.tw.sgs.com



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 31 of 38

Radiated Spurious Emission Measurement Result: GPRS 1900 Mode

Operation Mode : TX CH High Mode Feb, 24, 2010

Fundamental Frequency: 1909.8 MHz Test By: Brian **Temperature** Pol: Ver : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
92.08	45.83	V	-57.10	-7.75	1.29	-66.14	-13.00	-53.14
101.78	45.91	V	-55.85	-7.76	1.37	-64.97	-13.00	-51.97
203.63	44.94	V	-56.70	-7.84	1.73	-66.28	-13.00	-53.28
250.19	44.41	V	-55.47	-7.89	1.99	-65.35	-13.00	-52.35
606.18	34.92	V	-54.57	-7.79	3.05	-65.41	-13.00	-52.41
880.69	32.95	V	-52.33	-7.92	3.75	-64.00	-13.00	-51.00
1910.00	77.33	V	-27.00	10.08	5.66	-22.58	-13.00	-9.58
3819.60	39.15	V	-58.24	12.60	8.47	-54.11	-13.00	-41.11
5729.40	42.56	V	-47.76	13.49	10.50	-44.76	-13.00	-31.76
7639.20		V		11.40	12.27		-13.00	
9549.00		V		11.95	13.74		-13.00	
11458.80		V		12.17	15.43		-13.00	
13368.60		V		12.97	16.82		-13.00	
15278.40		V		15.00	18.29		-13.00	
17188.20		V		14.47	19.52		-13.00	
19098.00		V		18.66	20.78		-13.00	

	30MHz - 80MHz: 5.04dB					
Measurement uncertainty	80MHz -1000MHz: 3.76dB					
	1GHz - 40GHz: 4.45dB					

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 32 of 38

Radiated Spurious Emission Measurement Result: GPRS 1900 Mode

Operation Mode : TX CH High Mode Feb, 24, 2010

Fundamental Frequency: 1909.8 MHz Test By: Brian **Temperature** Pol: Hor : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
85.29	46.70	Н	-56.97	-7.75	0.67	-65.38	-13.00	-52.38
99.84	45.00	Н	-58.01	-7.76	1.36	-67.13	-13.00	-54.13
250.19	45.50	Н	-53.71	-7.89	1.99	-63.59	-13.00	-50.59
288.99	41.95	Н	-56.05	-7.91	2.13	-66.10	-13.00	-53.10
332.64	40.54	Н	-56.82	-7.74	2.29	-66.85	-13.00	-53.85
887.48	33.20	Н	-51.99	-7.93	3.76	-63.68	-13.00	-50.68
1910.00	77.92	Н	-26.19	10.08	5.66	-21.77	-13.00	-8.77
3819.60	39.40	Н	-58.11	12.60	8.47	-53.97	-13.00	-40.97
5729.40	40.11	Н	-50.34	13.49	10.50	-47.35	-13.00	-34.35
7639.20		Н		11.40	12.27		-13.00	
9549.00		Н		11.95	13.74		-13.00	
11458.80		Н		12.17	15.43		-13.00	
13368.60		Н		12.97	16.82		-13.00	
15278.40		Н		15.00	18.29		-13.00	
17188.20		Н		14.47	19.52		-13.00	
19098.00		Н		18.66	20.78		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 40GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 33 of 38

Radiated Spurious Emission Measurement Result (below 1GHz) (worst case for each band)

Operation Mode GPRS 850 RX CH Low Mode **Test Date** Feb. 24, 2010

Fundamental Frequency 824.20 MHz Test By Brian Temperature Pol Ver./Hor 25 °C

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
90.14	V	Peak	47.84	-17.62	30.22	43.50	-13.28
101.78	V	Peak	45.83	-16.87	28.96	43.50	-14.54
198.78	V	Peak	47.40	-15.56	31.84	43.50	-11.66
232.73	V	Peak	44.85	-14.37	30.48	46.00	-15.52
250.19	V	Peak	45.60	-13.74	31.86	46.00	-14.14
931.13	V	Peak	32.58	-1.04	31.54	46.00	-14.46
90.14	Н	Peak	45.79	-17.62	28.17	43.50	-15.33
96.93	Н	Peak	46.06	-17.16	28.90	43.50	-14.60
255.04	Н	Peak	44.86	-13.69	31.17	46.00	-14.83
288.99	Н	Peak	43.20	-13.23	29.97	46.00	-16.03
332.64	Н	Peak	40.31	-12.16	28.15	46.00	-17.85
919.49	Н	Peak	32.87	-1.04	31.83	46.00	-14.17

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless orienwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 34 of 38

Operation Mode GPRS 1900 RX CH High Mode Test Date Feb, 24, 2010

Fundamental Frequency 1909.8 MHz Test By Brian Temperature 25 °C Pol Ver./Hor

Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
90.14	V	Peak	47.78	-17.62	30.16	43.50	-13.34
101.78	V	Peak	46.90	-16.87	30.03	43.50	-13.47
198.78	V	Peak	45.44	-15.56	29.88	43.50	-13.62
237.58	V	Peak	45.30	-14.22	31.08	46.00	-14.92
303.54	V	Peak	39.61	-12.93	26.68	46.00	-19.32
877.78	V	Peak	33.10	-1.49	31.61	46.00	-14.39
90.14	Н	Peak	45.09	-17.62	27.47	43.50	-16.03
99.84	Н	Peak	44.53	-17.01	27.52	43.50	-15.98
256.98	Н	Peak	44.05	-13.67	30.38	46.00	-15.62
266.68	Н	Peak	44.12	-13.57	30.55	46.00	-15.45
284.14	Н	Peak	42.78	-13.28	29.50	46.00	-16.50
897.18	Н	Peak	32.70	-1.11	31.59	46.00	-14.41

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz •
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless orienwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan/台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 35 of 38

Radiated Spurious Emission Measurement Result (above 1GHz) (worst case for each band)

Operation Mode GPRS 850 RX CH Low Test Date Feb, 24, 2010

Fundamental Frequency 824.2 MHz Test By Brian Temperature 25° C Pol Ver.

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1648.4						74.00	54.00		Н
2472.6						74.00	54.00		Н
3296.8						74.00	54.00		Н
4121.0						74.00	54.00		Н
4945.2						74.00	54.00		Н
5508.0	36.20		7.52	43.72		74.00	54.00	-10.28	Н

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 3MHz, VBW= 1MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

台灣檢驗科技股份有限公司

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台 北縣五股工業區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com Member of SGS Group



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 36 of 38

Operation Mode GPRS 850 RX CH Low Test Date Feb, 24, 2010

Fundamental Frequency 824.2 MHz Test By Brian Temperature 25 $^{\circ}\mathrm{C}$ Pol Hor

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1648.4						74.00	54.00		Н
2472.6						74.00	54.00		Н
3296.8						74.00	54.00		Н
4121.0						74.00	54.00		Н
4773.0	35.68		5.93	41.61		74.00	54.00	-12.39	Н
4945.2						74.00	54.00		Н

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 3MHz, VBW= 1MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台 北縣五股工業區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sgs.com



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 37 of 38

GPRS 1900 RX CH High Test Date Operation Mode Feb, 24, 2010

Fundamental Frequency 1909.8 MHz Test By Brian Temperature 25°C Pol Ver.

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
3819.6						74.00	54.00		Н
5004.0	34.52		6.45	40.97		74.00	54.00	-13.03	Н
5729.4						74.00	54.00		Н
7639.2						74.00	54.00		Н
9549.0						74.00	54.00		Н
11458.8						74.00	54.00		Н

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS columno
- (4) Spectrum Peak Setting: 1GHz-40GHz, RBW= 3MHz, VBW= 1MHz, Sweep time= 200
- (5) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless orienwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 SGS Taiwan Ltd.



Report No.: EH/2010/20032 Issue Date: Mar. 02, 2010

Page: 38 of 38

GPRS 1900 RX CH High Test Date Operation Mode Feb, 24, 2010

Fundamental Frequency 1909.8 MHz Test By Brian Temperature 25 °C Pol Hor

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
3819.6						74.00	54.00		Н
4808.0	35.37		6.04	41.41		74.00	54.00	-12.59	Н
5729.4						74.00	54.00		Н
7639.2						74.00	54.00		Н
9549.0						74.00	54.00		H
11458.8						74.00	54.00		Н

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting: 1GHz-40GHz, RBW= 3MHz, VBW= 1MHz, Sweep time= 200
- (5) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面評可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com Member of SGS Group