

Exemption from RF Exposure

FCC ID: HLZWPC2

To whom it may concern,

WCPTI-S is WPC module. Pursuant to KDB 680106 D01 v02, it meets the requirements indicated in section 5.2 b) and could be excluded from KDB inquiry.

a) Power transfer frequency is less than 1 MHz

The transfer frequency is below 1MHz.

b) Output power from each primary coil is less than 5 watts

The device has output power is less than 5 watt.

c) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils


The device has single coil.

d) Client device is inserted in or placed directly in contact with the transmitter

N/A, the module may apply transmitter or receiver to decide by manufacturer.

e) The maximum coupling surface area of the transmit (charging) device is between 60 cm² and 400 cm²

The max coupling surface area is 16.610 cm².

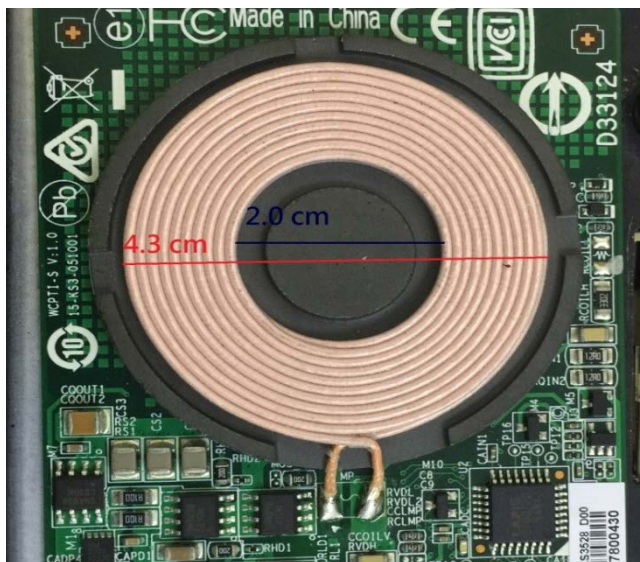

f) Aggregate leakage fields at 10 cm surrounding the device from all simultaneous transmitting coils are demonstrated to be less than 30% of the MPE limit.

The aggregate leakage field is less than 30% of limit. Please refer to MPE.