



Intermec
COMPONENT SPECIFICATION

APPROVED SUPPLIERS

Manufacturer	Address/Telephone	805-612	Manufacturer's Designation
The Clip Company	9974 Scripps Ranch Boulevard, #331 San Diego, CA 92131-1825 (858) 549-3121	-001	ITMC964POLY

- 1.0 Scope:** This specification describes the requirements for a belt clip kit consisting of one each belt clip assembly, one each mating tab, and a pan head screw used to mount the tab to the hand held terminal.
- 2.0 Quality Assurance:** Intermec Receiving Inspection reserves the right to use AQL sampling techniques when inspecting a lot.
- 3.0 Packaging:** Assembly is supplied in kit form in containers capable of protecting the device from damage and/or contamination in common carrier shipping and handling.
- 4.0 Markings:** Individual kit shipping bags will be labeled to include the Intermec part number (in both human readable and in bar coded forms). Major shipping cartons will be marked to include the Intermec part number, and the quantity within.


REVISION HISTORY

Rev.	File No.	Description of Change	Date	Approved
A	C3487	Release	10/11/02	J S
B	C3599	Add manufacturer's part number, Revise ¶4.0	1/23/03	J S

REVISION LEVEL	B	A	A																						
SHEET NUMBER	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
COMPONENT ENGR.	DATE		Intermec Technologies Corp.										TITLE												
J. McROBERTS	10/09/02												BELT CLIP KIT, CLIP AND TAB STYLE												
COGNIZANT ENGR.	DATE		550 Second Street S.E.										DRAWING NO.												
K. BRAGINTON	- - -		Cedar Rapids, IA 52401										805-612-001												
APPROVED	DATE		Telephone No. (319) 369-3100																						
K. VORHIES by JS	10/11/02		Facsimile No. (319) 369-3453										Sheet 1 of 3												

5.0 Materials:

- 5.1 Belt Clip Assembly (1 each): Five-piece assembly consisting of a molded blended polycarbonate and ABS resin U-shaped clip, stainless steel coil-spring loaded molded blended polycarbonate and ABS resin release button, and a molded blended polycarbonate and ABS resin belt clip secured by a tempered steel spring. Molded plastic parts are a black color with textured exterior surface finish, and spring steel has a black finish
 - 5.2 Tab (1 each): One-piece black molded blended polycarbonate and ABS resin stand-off button shaped tab with recessed mounting hole on the center line axis
 - 5.3 Mounting Hardware (1 each): #4-40 by 3/8 inch stainless steel with black oxide finish (#1 point drive) Philips pan head screw with thread retaining nylon patch
 - 5.4 Instructions (1 ea.): Installation instructions, Intermecc P/N 962-000-023
 - 5.5 Bag (1 each): 2 x 3 inch clear polypropylene bag with zip-lock closure
 - 5.6 Label (1 each): Coated white adhesive paper with thermal print supplied attached to the above bag
- 6.0 Outline Drawing (inch):** Belt Clip

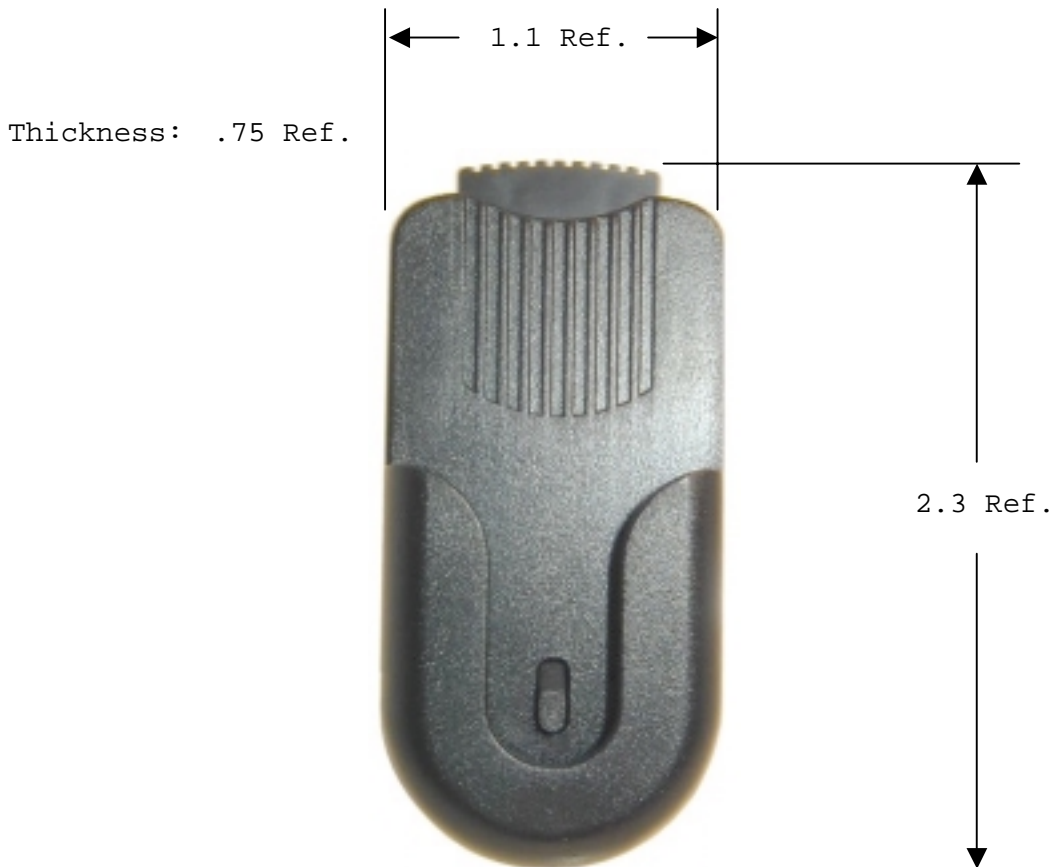

7.0 Installation Instructions (Ref.):

**Belt Clip Installation
Instructions**

1. Remove one of the hand strap screws.
2. Attach tab with included screw.
3. Slide tab into belt clip to use.
4. To release press belt clip release tab down and lift up on 700 Mobile Computer.



Technologies Corporation

6001 36th Avenue West
Everett, WA 98203
www.intermec.com

© 2002 Intermec Technologies Corp.
All Rights Reserved

700 Belt Clip Installation Instructions
July, 2002



96200023 REV A