

# FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart C § 15.249

**Equipment** : **Wireless Dongle**  
**Model No.** : **RG-G5, RG-xy (x=0~9, A~Z, y=0~9, A~Z)**  
**Brand Name** : **N/A**  
**Filing Type** : **New Application**  
**Applicant** : **KEY MOUSE ELECTRONIC ENTERPRISE CO., LTD.**  
No. 3, Wugong 5th Rd., Sinjhuang City, Taipei County 242,  
Taiwan, R.O.C.  
**FCC ID** : **HQKKMERGG5J**  
**Manufacturer** : **DONGGUAN EASTECH ELECTRICAL PRODUCTS CO., LTD.**  
No.182, Kuiqing Rd.Qinghuang Industrial District, Qingxi  
Town,Dongguan City,Guangdong,523650,China  
**Received Date** : Mar. 09, 2010  
**Final Test Date** : Mar. 18, 2010

## Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



***SPORTON International Inc.***

No. 52 Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

**Table of Contents**

**1 SUMMARY OF THE TEST RESULT ..... 2**

**2 GENERAL INFORMATION..... 3**

2.1 Product Details ..... 3

2.2 Table for Carrier Frequencies ..... 3

2.3 Table for Test Modes ..... 4

2.4 Table for Testing Locations ..... 4

2.5 Table for Supporting Units..... 4

2.6 EUT Operation during Test ..... 4

2.7 Test Configuration ..... 5

**3 TEST RESULT ..... 6**

3.1 AC Power Line Conducted Emissions Measurement..... 6

3.2 Field Strength of Fundamental Emissions Measurement..... 10

3.3 20dB Spectrum Bandwidth Measurement..... 13

3.4 Radiated Emissions Measurement..... 16

3.5 Band Edge Emissions Measurement ..... 28

3.6 Antenna Requirements..... 30

**4 LIST OF MEASURING EQUIPMENTS ..... 31**

**5 TEST LOCATION..... 32**

**6 TAF CERTIFICATE OF ACCREDITATION ..... 33**

**APPENDIX A. TEST PHOTOS ..... A1 ~ A6**

**APPENDIX B. PHOTOGRAPHS OF EUT ..... B1 ~ B3**

### History of This Test Report

Original Issue Date: Mar. 24, 2010

Report No.: FR030812ZG

- No additional attachment.
- Additional attachment were issued as following record:

Attachment No.	Issue Date	Description


# CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart C § 15.249

Equipment : Wireless Dongle  
Model No. : RG-G5, RG-xy (x=0~9, A~Z, y=0~9, A~Z)  
Brand Name : N/A  
Applicant : KEY MOUSE ELECTRONIC ENTERPRISE CO., LTD.  
No. 3, Wugong 5th Rd., Sinjhuang City, Taipei County 242,  
Taiwan, R.O.C.

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Mar. 09, 2010 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu

**SPORTON International Inc.**

No. 52 Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

1 SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	5.54 dB
3.2	15.249(a)	Field Strength of Fundamental Emissions	Complies	18.76 dB
3.3	15.215(c)	20dB Spectrum Bandwidth	Complies	-
3.4	15.249(a)/(d)	Radiated Emissions	Complies	3.72 dB
3.5	15.249(d)	Band Edge Emissions	Complies	5.88 dB
3.6	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Field Strength of Fundamental Emissions	±0.8dB	Confidence levels of 95%
20dB Spectrum Bandwidth	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

**2 GENERAL INFORMATION**

**2.1 Product Details**

Items	Description
Power Type	5Vdc from system
Modulation	GFSK
Frequency Range	2400 ~ 2483.5MHz
Channel Number	64
Channel Band Width (99%)	1.16 MHz
Max. Field Strength	75.24 dBuV/m at 3m (Average)
Antenna	Internal Antenna (Without any antenna connector)

**2.2 Table for Carrier Frequencies**

Frequency Band	Frequency Group1		Frequency Group2	
2400 ~ 2483.5MHz	2407 MHz	2442 MHz	2405 MHz	2443 MHz
	2408 MHz	2447 MHz	2406 MHz	2444 MHz
	2412 MHz	2451 MHz	2409 MHz	2446 MHz
	2414 MHz	2452 MHz	2410 MHz	2448 MHz
	2417 MHz	2457 MHz	2411 MHz	2449 MHz
	2420 MHz	2458 MHz	2413 MHz	2453 MHz
	2421 MHz	2459 MHz	2415 MHz	2455 MHz
	2422 MHz	2460 MHz	2416 MHz	2456 MHz
	2427 MHz	2461 MHz	2418 MHz	2462 MHz
	2428 MHz	2465 MHz	2419 MHz	2463 MHz
	2431 MHz	2468 MHz	2423 MHz	2464 MHz
	2435 MHz	2469 MHz	2425 MHz	2466 MHz
	2436 MHz	2472 MHz	2429 MHz	2467 MHz
	2437 MHz	2473 MHz	2430 MHz	2470 MHz
	2438 MHz	2475 MHz	2432 MHz	2471 MHz
	2439 MHz	2476 MHz	2434 MHz	2474 MHz

**2.3 Table for Test Modes**

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Frequency	Ant.
Field Strength of Fundamental Emissions 20dB Spectrum Bandwidth	CTX	2405 MHz / 2439 MHz / 2476 MHz	1
Radiated Emissions 9kHz~1GHz	Normal Mode	-	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	CTX	2405 MHz / 2439 MHz / 2476 MHz	1
Band Edge Emissions	CTX	2405 MHz / 2476 MHz	1

Note: CTX=continuously transmitting

**2.4 Table for Testing Locations**

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
CO01-HY	Conduction	Hwa Ya	93596	IC 4086B-1
03CH02-HY	SAC	Hwa Ya	643075	IC 4086B-1
TH01-HY	OVEN Room	Hwa Ya	-	-

Semi Anechoic Chamber (SAC).

**2.5 Table for Supporting Units**

Support Unit	Brand	Model	FCC ID	Remark
Notebook	DELL	E5500	DoC	Conducted
Modem	ACEEX	DM 1414	IFAXDM1414	
Headset	HAWK	03-MSB301	DoC	
Notebook	DELL	D505	DoC	Radiated

**2.6 EUT Operation during Test**

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating “H” pattern was used as the test software.

Conducted-

The NB sends “H” messages to the panel, and the panel displays “H” patterns on the screen.

The NB sends “H” messages to the modem.


Radiated-

Executed “ATMEL RF” to keep transmitting signals at fixed frequency.


2.7 Test Configuration

2.7.1 Radiation Emissions Test Configuration

For radiated emissions 9kHz~1GHz

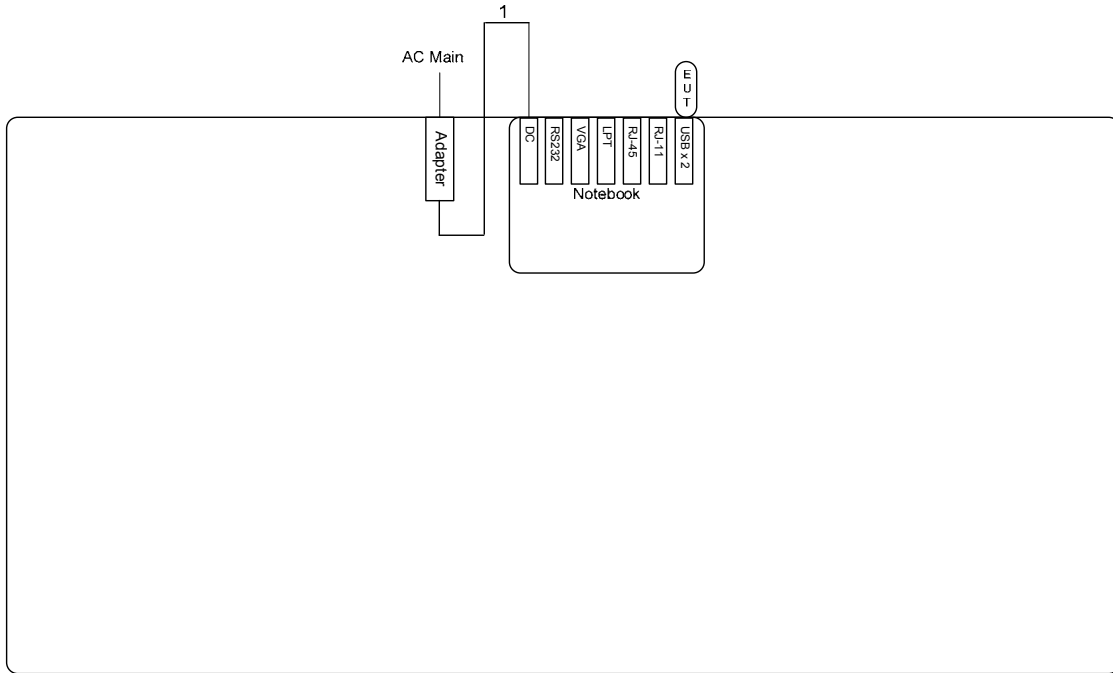

For radiated emissions above 1GHz

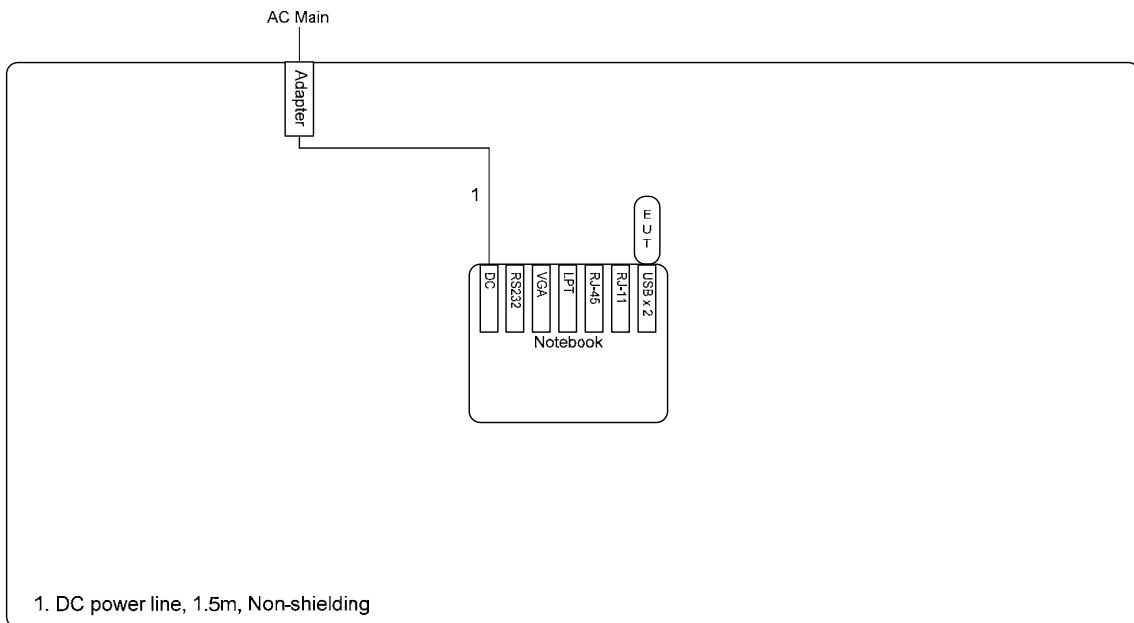



### 3 TEST RESULT

#### 3.1 AC Power Line Conducted Emissions Measurement

##### 3.1.1 Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

**Class A**

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	79	66
0.5~30	73	60

**Class B**

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

##### 3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

##### 3.1.3 Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

3.1.4 Test Setup Layout

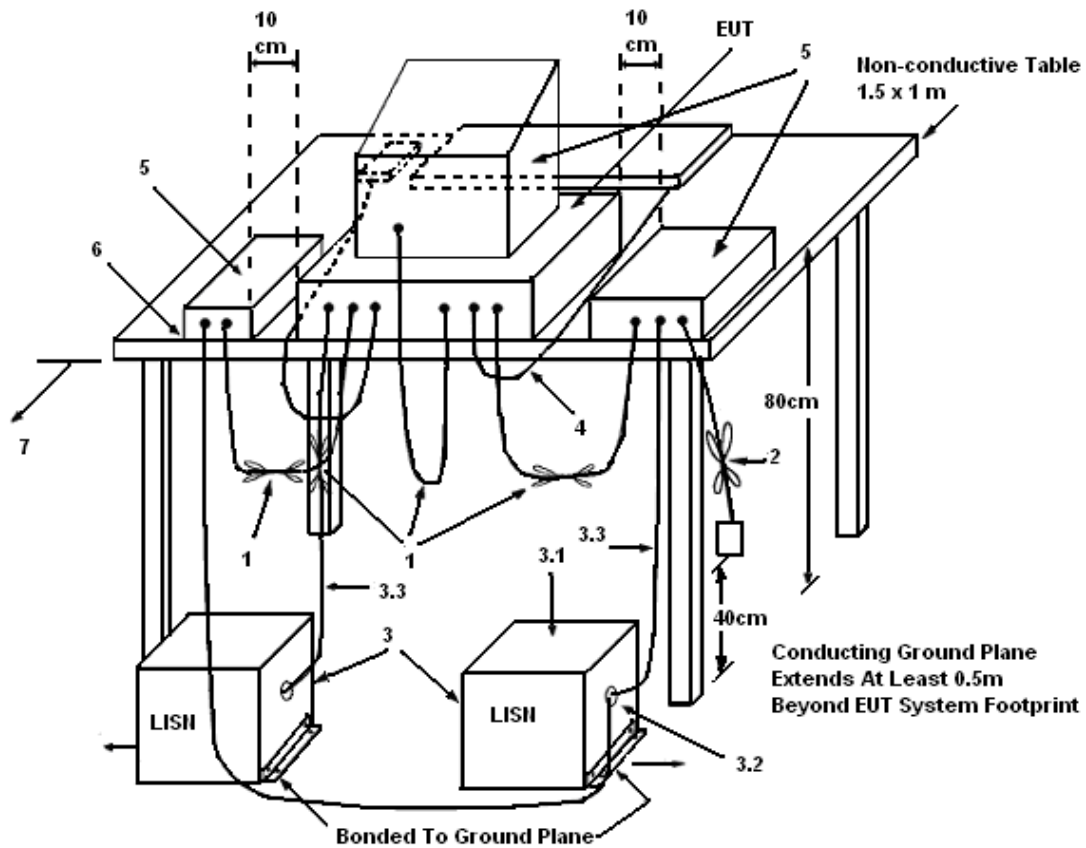

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5 Test Deviation

There is no deviation with the original standard.


3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

3.1.7 Results of AC Power Line Conducted Emissions Measurement


<b>Final Test Date</b>	Mar. 09, 2010	<b>Test Site No.</b>	CO01-HY
<b>Temperature</b>	25	<b>Humidity</b>	48.9%
<b>Test Engineer</b>	David	<b>Configuration</b>	Normal Mode

Line

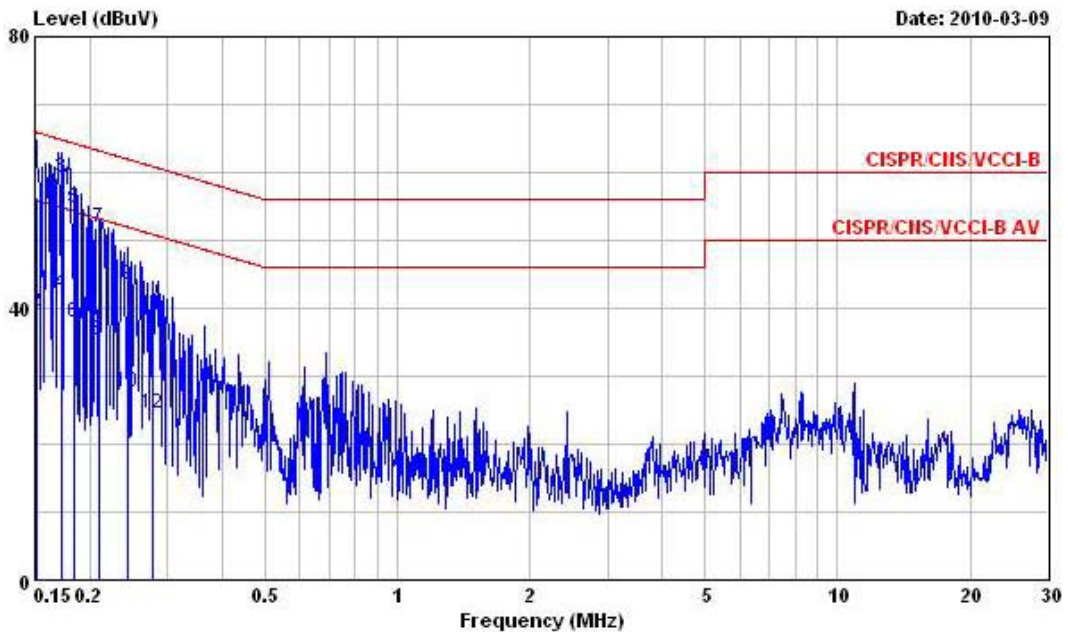

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1507970	56.28	-9.68	65.96	55.95	0.09	0.24	QP
2	0.1507970	39.59	-16.37	55.96	39.26	0.09	0.24	Average
3	0.1730690	59.27	-5.54	64.81	59.05	0.08	0.14	QP
4	0.1730690	42.04	-12.77	54.81	41.82	0.08	0.14	Average
5	0.1844300	54.63	-9.65	64.28	54.46	0.08	0.09	QP
6	0.1844300	37.80	-16.48	54.28	37.63	0.08	0.09	Average
7	0.2094380	51.72	-11.51	63.23	51.61	0.08	0.03	QP
8	0.2094380	35.31	-17.92	53.23	35.20	0.08	0.03	Average
9	0.2442230	43.45	-18.50	61.95	43.33	0.08	0.04	QP
10	0.2442230	27.75	-24.20	51.95	27.63	0.08	0.04	Average
11	0.2788120	38.94	-21.91	60.85	38.81	0.08	0.05	QP
12	0.2788120	24.35	-26.50	50.85	24.22	0.08	0.05	Average

Neutral

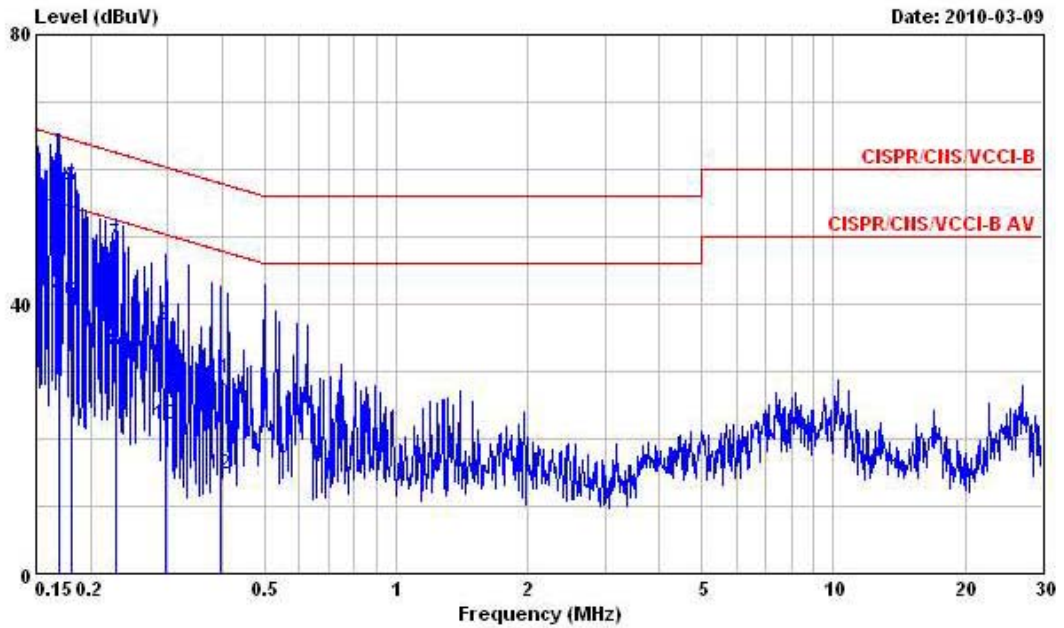

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1500000	57.10	-8.90	66.00	56.77	0.08	0.25	QP
2	0.1500000	40.27	-15.73	56.00	39.94	0.08	0.25	Average
3	0.1694400	58.74	-6.25	64.99	58.51	0.08	0.15	QP
4	0.1694400	41.13	-13.86	54.99	40.90	0.08	0.15	Average
5	0.1815220	57.26	-7.16	64.42	57.08	0.08	0.10	QP
6	0.1815220	40.46	-13.96	54.42	40.28	0.08	0.10	Average
7	0.2279670	48.91	-13.61	62.52	48.79	0.08	0.04	QP
8	0.2279670	32.98	-19.54	52.52	32.86	0.08	0.04	Average
9	0.2971150	36.91	-23.41	60.32	36.78	0.08	0.05	QP
10	0.2971150	22.02	-28.30	50.32	21.89	0.08	0.05	Average
11	0.3976320	28.97	-28.93	57.90	28.82	0.08	0.07	QP
12	0.3976320	14.81	-33.09	47.90	14.66	0.08	0.07	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

**3.2 Field Strength of Fundamental Emissions Measurement**

**3.2.1 Limit**

The field strength of fundamental emissions within these bands specified at a distance of 3 meters (measurement instrumentation employing an average detector) shall comply with the following table.

<b>Frequency Band (MHz)</b>	<b>Fundamental Emissions Limit (dBuV/m) at 3m</b>
2400-2483.5	94
5725-5875	94

**3.2.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

<b>Power Meter Parameter</b>	<b>Setting</b>
RB	1 MHz Peak / 1MHz Average
VB	1 MHz Peak / 10Hz Average
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**3.2.3 Test Procedures**

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For Fundamental emissions, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

**3.2.4 Test Setup Layout**

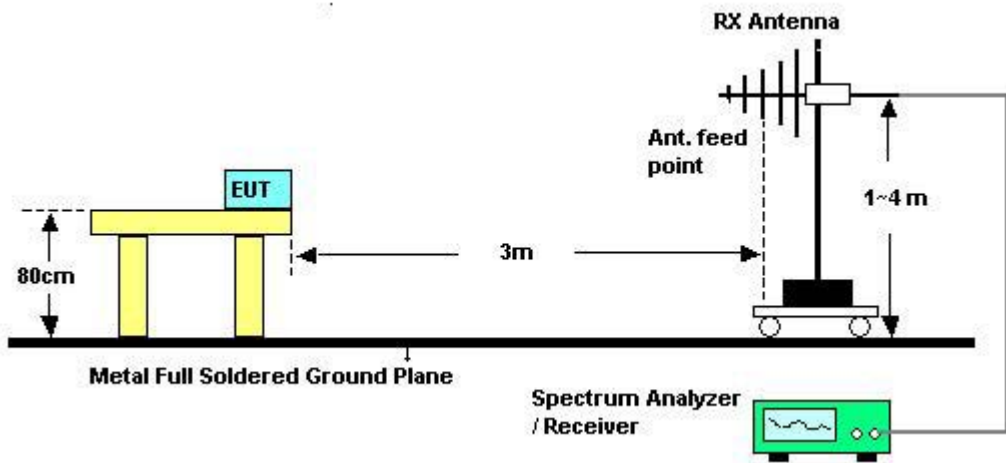

**3.2.5 Test Deviation**

There is no deviation with the original standard.

**3.2.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.2.7 Test Result of Field Strength of Fundamental Emissions**

<b>Final Test Date</b>	Mar. 18, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	24	<b>Humidity</b>	56%
<b>Test Engineer</b>	Billy	<b>Configuration</b>	Frequency 2405 MHz / 2439 MHz / 2476 MHz

**2405 MHz**

**Horizontal**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
3	2406.330	96.08	-17.92	114.00	61.20	31.86	3.02	0.00	Peak
3	2404.810	73.72	-20.28	94.00	38.84	31.86	3.02	0.00	Average

**2439 MHz**

**Horizontal**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	2439.010	97.60	-16.40	114.00	62.56	31.99	3.05	0.00	Peak
1	2439.010	75.24	-18.76	94.00	40.20	31.99	3.05	0.00	Average

**2476 MHz**

**Horizontal**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	2476.060	92.12	-21.88	114.00	56.91	32.13	3.08	0.00	Peak
1	2476.060	69.76	-24.24	94.00	34.55	32.13	3.08	0.00	Average

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**3.3 20dB Spectrum Bandwidth Measurement**

**3.3.1 Limit**

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (2400 ~ 2483.5MHz).

**3.3.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 20dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**3.3.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.

**3.3.4 Test Setup Layout**

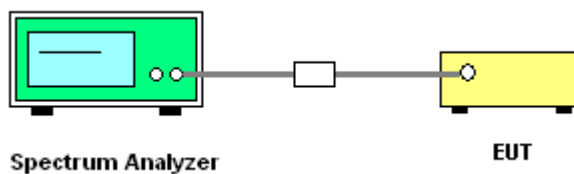

**3.3.5 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.




3.3.6 Test Result of 20dB Spectrum Bandwidth

Final Test Date	Mar. 18, 2010	Test Site No.	TH01-HY
Temperature	28	Humidity	58%
Test Engineer	Sam	Configuration	Frequency 2405 MHz / 2439 MHz / 2476 MHz


Frequency	20dB BW (MHz)	99% OBW (MHz)	Frequency range (MHz) fL > 2400MHz	Frequency range (MHz) fH < 2483.5MHz	Test Result
錯誤! 找不到參照來源。	4.000	4.840	2404.4000	-	Complies
錯誤! 找不到參照來源。	7.400	11.160	-	-	Complies
錯誤! 找不到參照來源。	7.760	10.440	-	2480.6800	Complies

20 dB/99% Bandwidth Plot on 錯誤! 找不到參照來源。

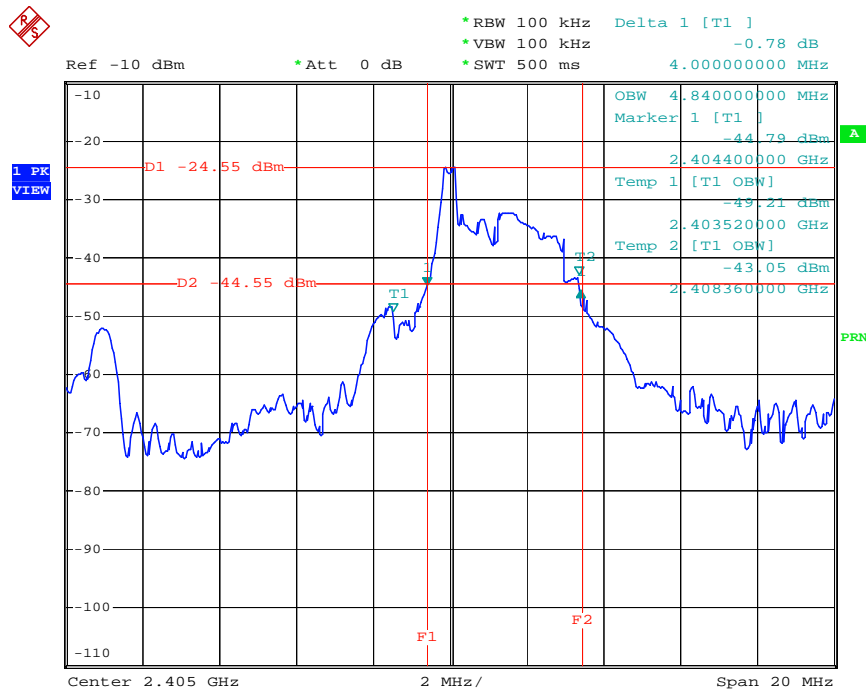

Date: 18.MAR.2010 20:13:27

20 dB/99% Bandwidth Plot on 錯誤! 找不到參照來源。

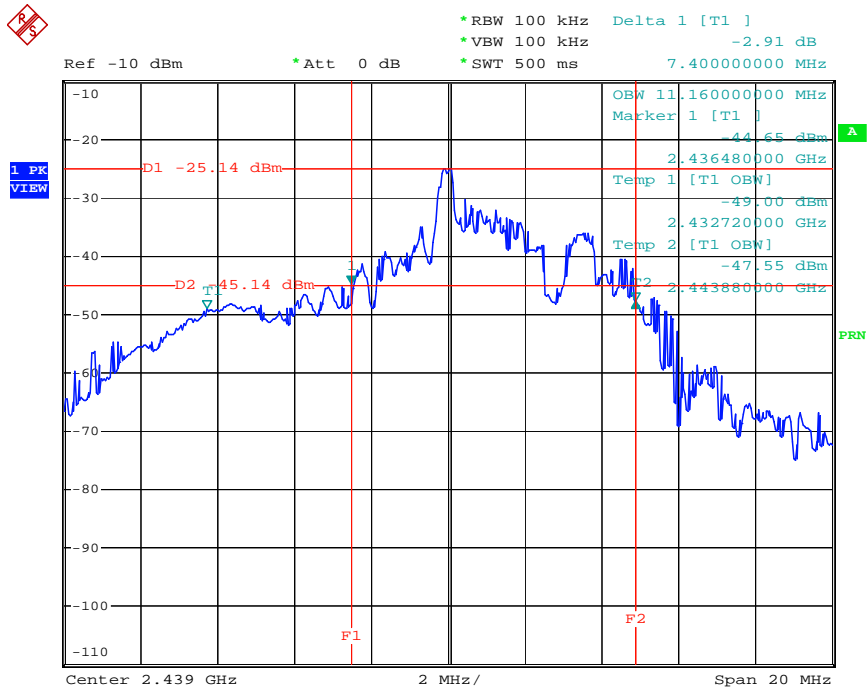

Date: 18.MAR.2010 20:09:23

20 dB/99% Bandwidth Plot on 錯誤! 找不到參照來源。



Date: 18.MAR.2010 20:06:46

**3.4 Radiated Emissions Measurement**

**3.4.1 Limit**

Harmonic emissions limits comply with below 54dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

<b>Frequencies (MHz)</b>	<b>Field Strength (microvolt/meter)</b>	<b>Measurement Distance (meters)</b>
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**3.4.2 Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer and receiver.

<b>Spectrum Parameter</b>	<b>Setting</b>
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average


<b>Receiver Parameter</b>	<b>Setting</b>
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

**3.4.3 Test Procedures**


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.4.4 Test Setup Layout

For radiated emissions below 30MHz

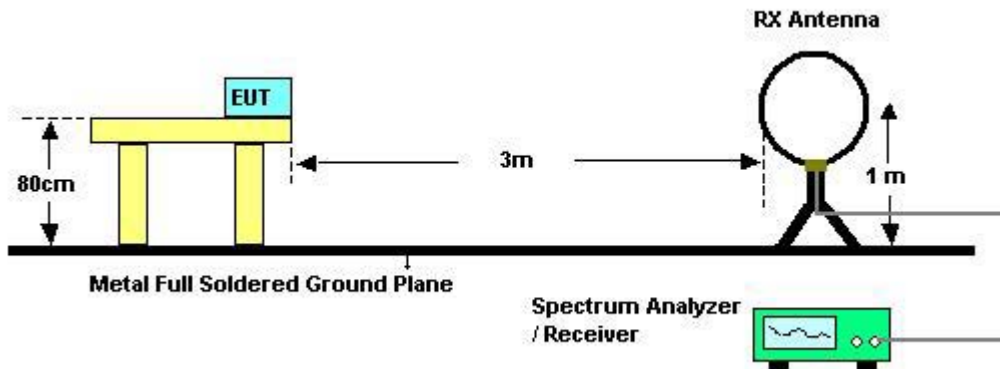

For radiated emissions above 30MHz

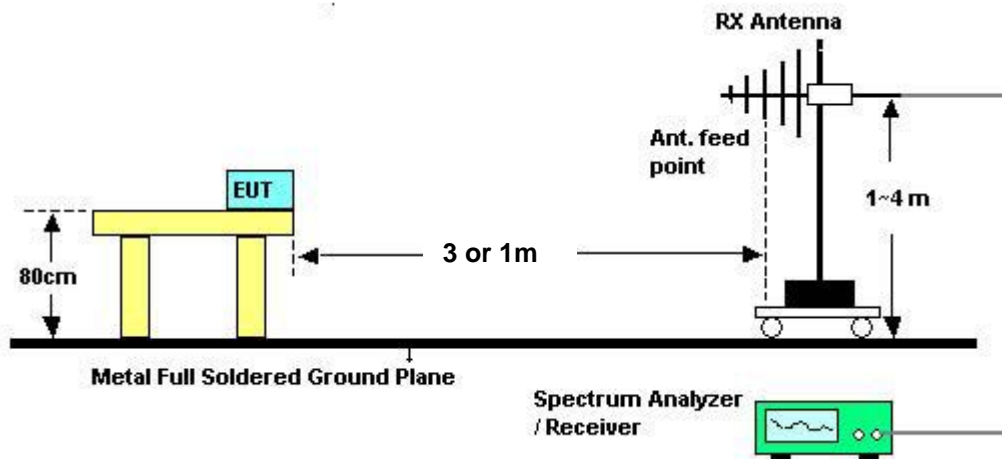

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

3.4.5 Test Deviation

There is no deviation with the original standard.

3.4.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

**3.4.7 Results of Radiated Emissions (9kHz~30MHz)**

<b>Final Test Date</b>	Mar. 18, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	24	<b>Humidity</b>	56%
<b>Test Engineer</b>	Billy		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.4.8 Results of Radiated Emissions (30MHz~1GHz)


Final Test Date	Mar. 18, 2010	Test Site No.	03CH02-HY
Temperature	24	Humidity	56%
Test Engineer	Billy	Configuration	Normal Mode

Horizontal

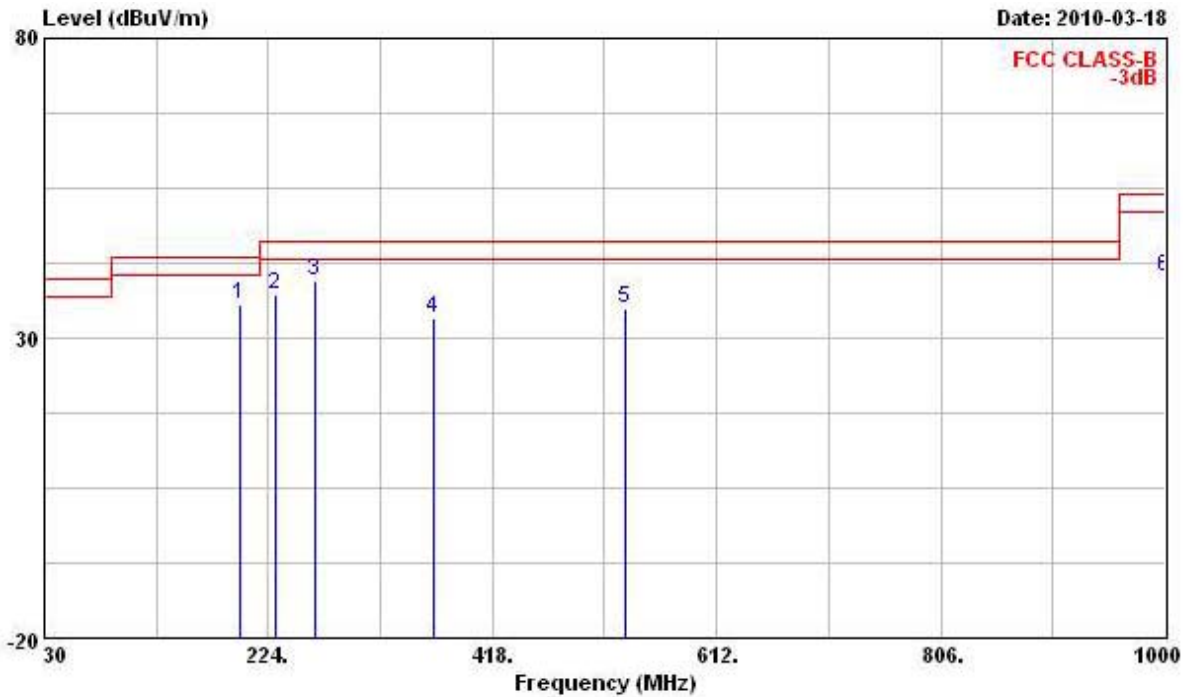

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	198.780	35.60	-7.90	43.50	47.77	11.28	3.62	27.07	Peak
2	229.820	37.34	-8.66	46.00	48.03	12.33	3.89	26.91	Peak
3	264.740	39.70	-6.30	46.00	49.09	13.21	4.21	26.81	Peak
4	366.590	33.20	-12.80	46.00	41.15	14.74	4.65	27.34	Peak
5	532.460	34.88	-11.12	46.00	38.38	18.21	6.46	28.17	Peak
6	1000.000	40.09	-33.91	74.00	35.80	22.50	8.83	27.04	Peak

Vertical

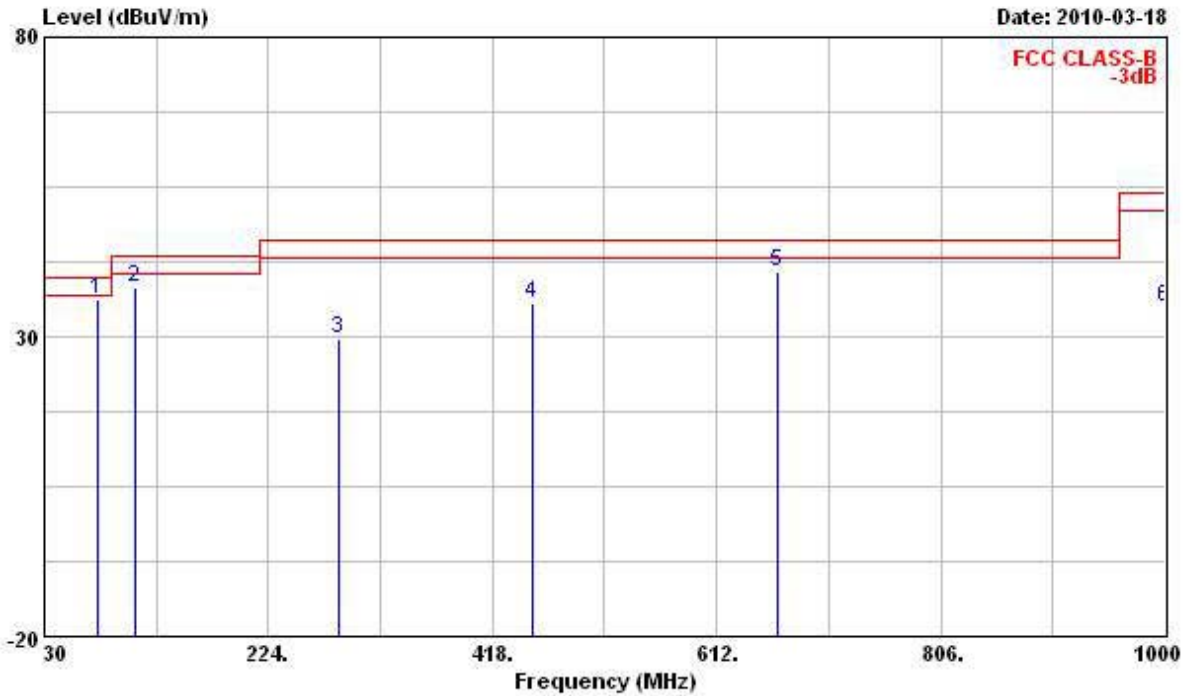

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	75.590	36.28	-3.72	40.00	54.94	7.11	1.96	27.73	Peak
2	109.540	38.20	-5.30	43.50	51.63	12.34	1.80	27.57	Peak
3	285.110	29.83	-16.17	46.00	38.73	13.49	4.41	26.80	Peak
4	451.950	35.74	-10.26	46.00	41.47	16.31	5.89	27.93	Peak
5	665.350	40.95	-5.05	46.00	42.58	19.31	7.13	28.07	Peak
6	1000.000	34.96	-39.04	74.00	30.67	22.50	8.83	27.04	Peak

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



3.4.9 Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)


Final Test Date	Mar. 12, 2010	Test Site No.	03CH02-HY
Temperature	24	Humidity	56%
Test Engineer	Billy	Configuration	Frequency 2405 MHz

Horizontal

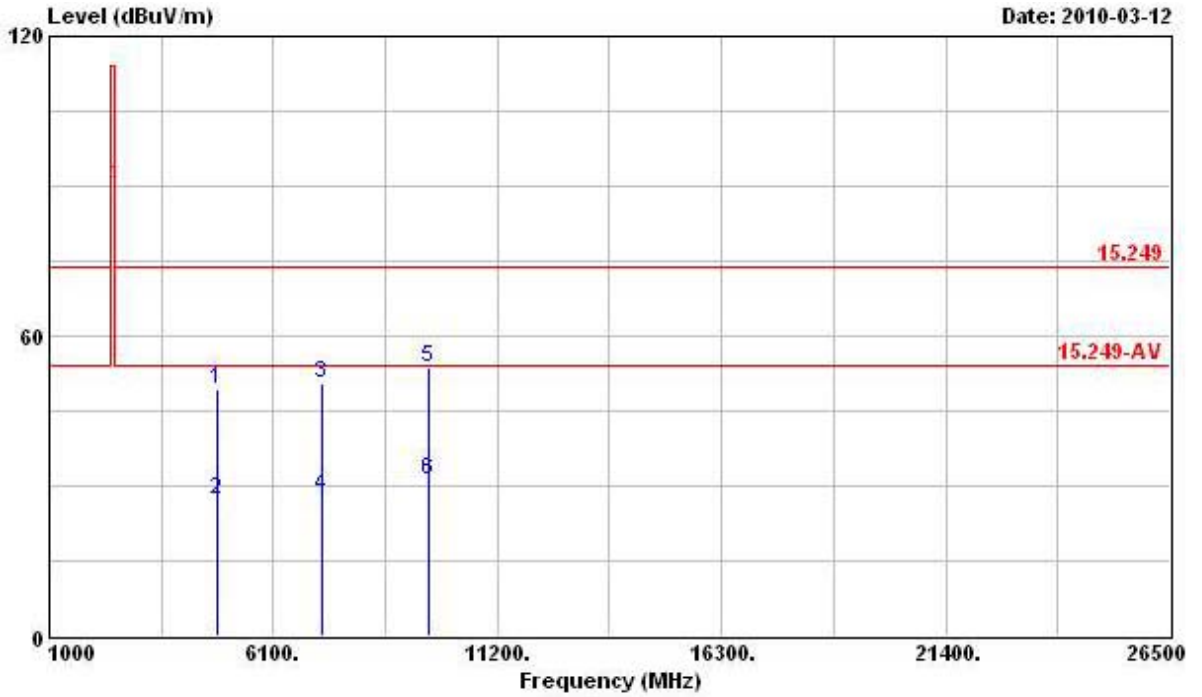

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	
1	4810.000	49.51	-24.49	74.00	43.75	35.73	4.58	34.55	Peak
2	4810.000	27.15	-26.85	54.00	21.39	35.73	4.58	34.55	Average
3	7215.000	50.45	-23.55	74.00	41.28	37.84	5.62	34.29	Peak
4	7215.000	28.09	-25.91	54.00	18.92	37.84	5.62	34.29	Average
5	9620.000	53.66	-20.34	74.00	42.62	39.34	6.34	34.64	Peak
6	9620.000	31.30	-22.70	54.00	20.26	39.34	6.34	34.64	Average


Vertical

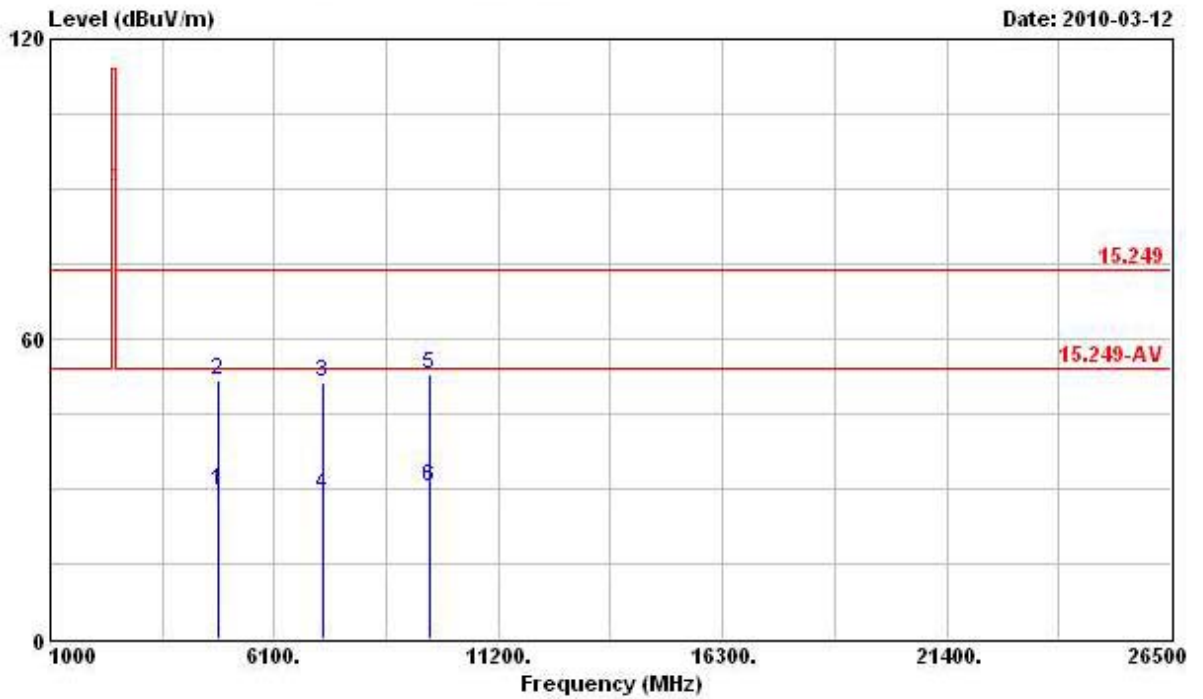

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4810.000	29.49	-24.51	54.00	24.35	35.11	4.58	34.55	Average
2	4810.000	51.85	-22.15	74.00	46.71	35.11	4.58	34.55	Peak
3	7215.000	51.22	-22.78	74.00	43.00	36.89	5.62	34.29	Peak
4	7215.000	28.86	-25.14	54.00	20.64	36.89	5.62	34.29	Average
5	9620.000	52.73	-21.27	74.00	42.49	38.54	6.34	34.64	Peak
6	9620.000	30.37	-23.63	54.00	20.13	38.54	6.34	34.64	Average


<b>Final Test Date</b>	Mar. 12, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	24	<b>Humidity</b>	56%
<b>Test Engineer</b>	Billy	<b>Configuration</b>	Frequency 2439 MHz

**Horizontal**

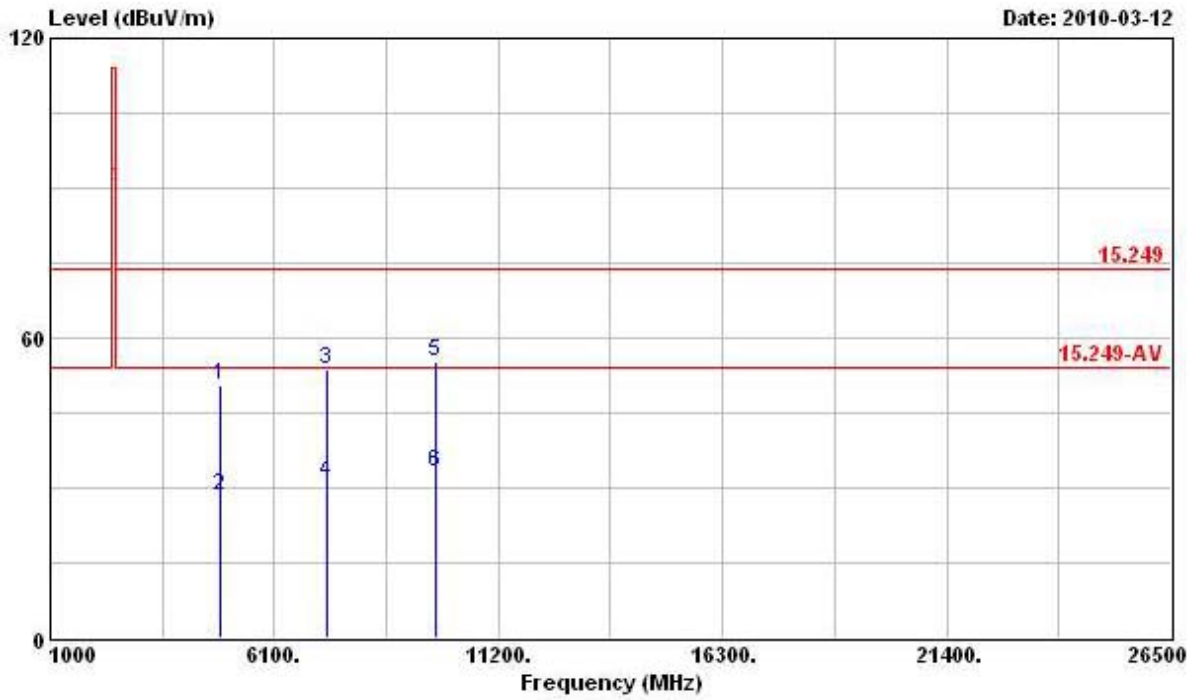

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4878.000	50.60	-23.40	74.00	44.61	35.83	4.61	34.45	Peak
2	4878.000	28.24	-25.76	54.00	22.25	35.83	4.61	34.45	Average
3	7317.000	53.60	-20.40	74.00	44.38	37.87	5.64	34.29	Peak
4	7317.000	31.24	-22.76	54.00	22.02	37.87	5.64	34.29	Average
5	9756.000	55.46	-18.54	74.00	44.17	39.51	6.36	34.58	Peak
6	9756.000	33.10	-20.90	54.00	21.81	39.51	6.36	34.58	Average


Vertical

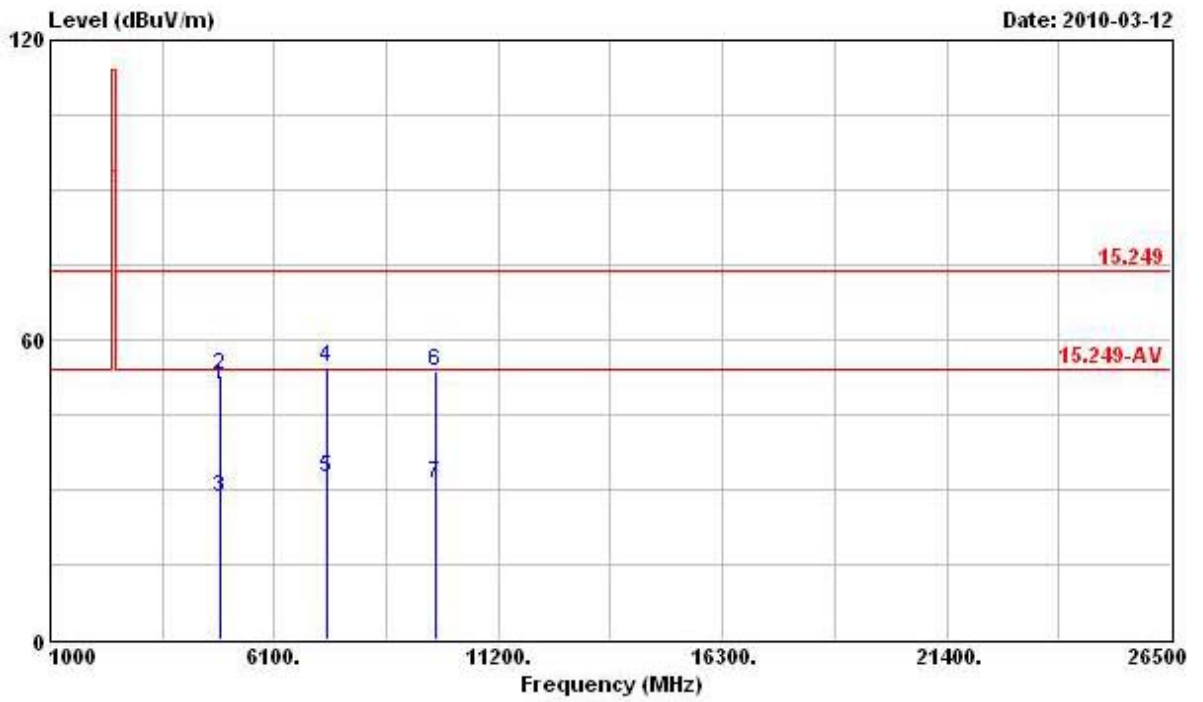

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4878.000	50.89	-23.11	74.00	45.55	35.18	4.61	34.45	Peak
2	4878.000	52.88	-21.12	74.00	47.54	35.18	4.61	34.45	Peak
3	4878.000	28.53	-25.47	54.00	23.19	35.18	4.61	34.45	Average
4	7317.000	54.67	-19.33	74.00	46.39	36.93	5.64	34.29	Peak
5	7317.000	32.31	-21.69	54.00	24.03	36.93	5.64	34.29	Average
6	9756.000	53.58	-20.42	74.00	43.09	38.71	6.36	34.58	Peak
7	9756.000	31.22	-22.78	54.00	20.73	38.71	6.36	34.58	Average


<b>Final Test Date</b>	Mar. 12, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	24	<b>Humidity</b>	56%
<b>Test Engineer</b>	Billy	<b>Configuration</b>	Frequency 2476 MHz

Horizontal

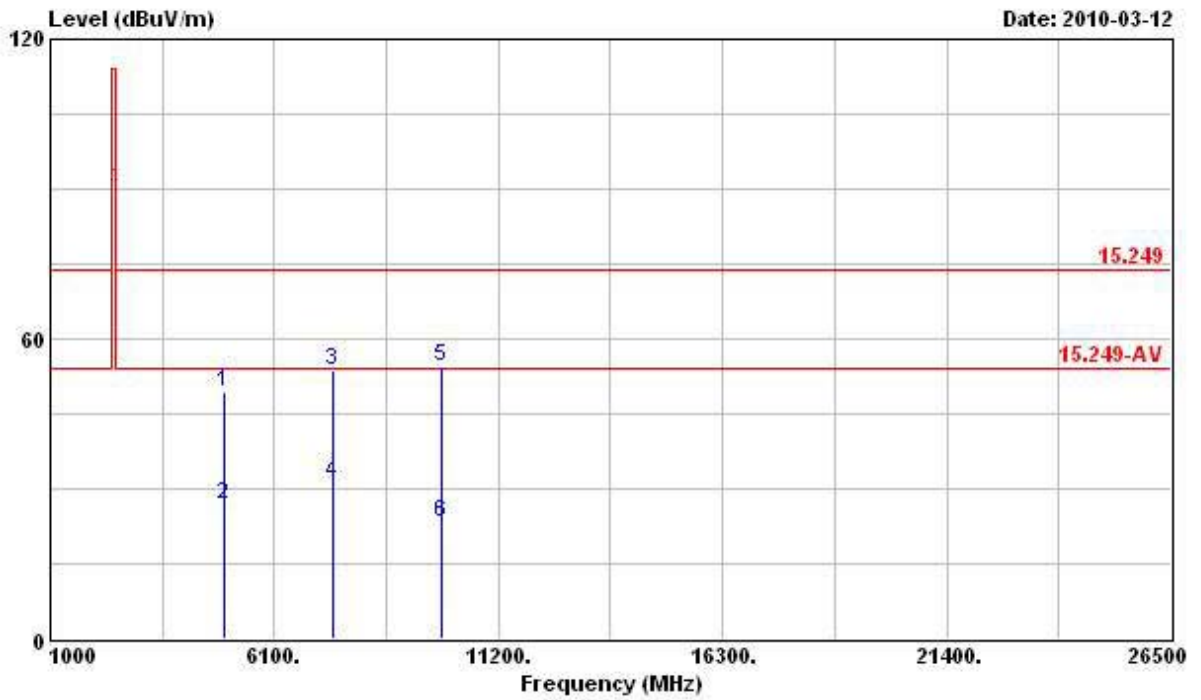

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4952.000	49.34	-24.66	74.00	43.08	35.93	4.68	34.35	Peak
2	4952.000	26.98	-27.02	54.00	20.72	35.93	4.68	34.35	Average
3	7428.000	53.66	-20.34	74.00	44.41	37.89	5.65	34.29	Peak
4	7428.000	31.30	-22.70	54.00	22.05	37.89	5.65	34.29	Average
5	9904.000	54.49	-19.51	74.00	42.93	39.70	6.38	34.52	Peak
6	9904.000	23.13	-30.87	54.00	11.57	39.70	6.38	34.52	Average

Vertical

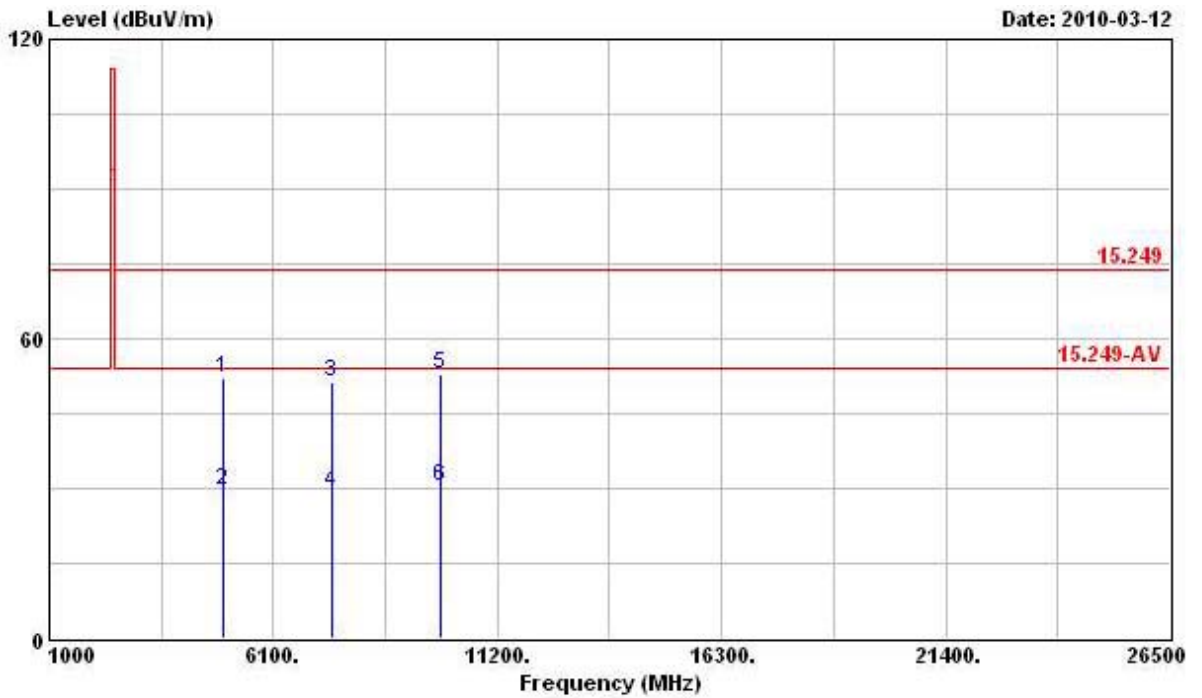

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4952.000	52.15	-21.85	74.00	46.57	35.25	4.68	34.35	Peak
2	4952.000	29.79	-24.21	54.00	24.21	35.25	4.68	34.35	Average
3	7428.000	51.42	-22.58	74.00	43.09	36.97	5.65	34.29	Peak
4	7428.000	29.06	-24.94	54.00	20.73	36.97	5.65	34.29	Average
5	9904.000	52.84	-21.16	74.00	42.08	38.90	6.38	34.52	Peak
6	9904.000	30.48	-23.52	54.00	19.72	38.90	6.38	34.52	Average

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**3.5 Band Edge Emissions Measurement**

**3.5.1 Limit**

Band edge emissions radiated outside of the specified frequency bands shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

<b>Frequencies (MHz)</b>	<b>Field Strength (microvolt/meter)</b>	<b>Measurement Distance (meters)</b>
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**3.5.2 Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

<b>Spectrum Parameter</b>	<b>Setting</b>
Attenuation	Auto
Span Frequency	100 MHz
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

**3.5.3 Test Procedures**

1. The test procedure is the same as section 3.2.3, only the frequency range investigated is limited to 2MHz around band edges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

**3.5.4 Test Setup Layout**

This test setup layout is the same as that shown in section 3.2.4.

**3.5.5 Test Deviation**

There is no deviation with the original standard.

**3.5.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.5.7 Test Result of Band Edge and Fundamental Emissions**

<b>Final Test Date</b>	Mar. 12, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	24	<b>Humidity</b>	56%
<b>Test Engineer</b>	Billy	<b>Configuration</b>	Frequency 2405 MHz / 2476 MHz

**2405 MHz**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	2390.000	58.65	-15.35	74.00	23.84	31.79	3.02	0.00	Peak
2	2395.690	65.96	-8.04	74.00	31.15	31.79	3.02	0.00	Peak
1 @	2390.000	45.15	-8.85	54.00	10.34	31.79	3.02	0.00	Average
2	2395.690	43.60	-10.40	54.00	8.79	31.79	3.02	0.00	Average

**2476 MHz**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
2	2483.470	66.48	-47.52	114.00	31.27	32.13	3.08	0.00	Peak
2	2487.650	48.12	-5.88	54.00	12.84	32.20	3.08	0.00	Average

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



### **3.6 Antenna Requirements**

#### **3.6.1 Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

#### **3.6.2 Antenna Connector Construction**

Please refer to section 2.1 in this test report; antenna connector complied with the requirements.

**4 LIST OF MEASURING EQUIPMENTS**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	F5U26.5	100015	20Hz ~ 26.5GHz	Oct. 29, 2009	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 12, 2010	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Aug. 06, 2009	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 02, 2009	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 02, 2009	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz~40GHz	Dec. 03, 2009	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	0949003	300MHz~40GHz	Dec. 03, 2009	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 12, 2009*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100305/040	9 kHz - 40GHz	Feb. 02, 2010	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30 MHz - 1 GHz 3m	May 11, 2009	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100 kHz – 1.3 GHz	Jul. 07, 2009	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02373	1GHz – 26.5 GHz	Jul. 16, 2009	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz~18GHz	Oct. 22, 2009	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz ~ 1GHz	Feb. 26, 2010	Radiation (03CH02-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX106	03CH02-HY	1GHz~40GHz	Feb. 26, 2010	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30 MHz - 2 GHz	Nov. 30, 2009	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0 - 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 m - 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 28, 2008*	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.

## 5 TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

6 TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-100107

**財團法人全國認證基金會**  
**Taiwan Accreditation Foundation**

## Certificate of Accreditation

This is to certify that

**Sporton International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

**is accredited in respect of laboratory**

<b>Accreditation Criteria</b>	: ISO/IEC 17025:2005
<b>Accreditation Number</b>	: 1190
<b>Originally Accredited</b>	: December 15, 2003
<b>Effective Period</b>	: January 10, 2010 to January 09, 2013
<b>Accredited Scope</b>	: Testing Field, see described in the Appendix
<b>Specific Accreditation Program</b>	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities



Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : January 07, 2010

P1, total 21 pages