

# **FCC RADIO TEST REPORT**

according to

47 CFR FCC Part 15 Subpart C § 15.249

**Equipment** : RF Wireless Dongle  
**Model No.** : RG-G5U; RG-xxU (x=0~9,A~Z)  
**Brand Name** : N/A  
**Filing Type** : New Application  
**Applicant** : **KEY MOUSE ELECTRONIC ENTERPRISE CO., LTD.**  
No. 3, Wugong 5th Rd., Sinjhuang City, Taipei County 242,  
Taiwan, R.O.C.  
**FCC ID** : **HQKKMERGXXUM**  
**Manufacturer** : **DONGGUAN EASTECH ELECTRICAL PRODUCTS CO., LTD.**  
Qinghuang Industrial District, Qingxi Town, Dongguan City,  
Guangdong, 523650 China  
**Received Date** : Dec. 25, 2008  
**Final Test Date** : Jan. 06, 2009

## **Statement**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



***SPORTON International Inc.***

*6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.*

**Table of Contents**

**1 SUMMARY OF THE TEST RESULT ..... 2**

**2 GENERAL INFORMATION..... 3**

2.1 Product Details ..... 3

2.2 Table for Carrier Frequencies ..... 3

2.3 Table for Test Modes ..... 4

2.4 Table for Testing Locations ..... 4

2.5 Table for Supporting Units..... 4

2.6 Test Configuration ..... 5

**3 TEST RESULT ..... 6**

3.1 AC Power Line Conducted Emissions Measurement..... 6

3.2 Field Strength of Fundamental Emissions Measurement..... 10

3.3 20dB Spectrum Bandwidth Measurement..... 13

3.4 Radiated Emissions Measurement..... 16

3.5 Band Edge Emissions Measurement ..... 28

3.6 Antenna Requirements..... 30

**4 LIST OF MEASURING EQUIPMENTS ..... 31**

**5 TEST LOCATION..... 33**

**6 TAF CERTIFICATE OF ACCREDITATION ..... 34**

**APPENDIX A. TEST PHOTOS ..... A1 ~ A4**

**APPENDIX B. PHOTOGRAPHS OF EUT ..... B1 ~ B3**

**History of This Test Report**

Original Issue Date: Jan. 09, 2009

Report No.: FR862706ZG

- No additional attachment.
- Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

# CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart C § 15.249

Equipment : RF Wireless Dongle  
Model No. : RG-G5U; RG-xxU (x=0~9,A~Z)  
Brand Name : N/A  
Applicant : KEY MOUSE ELECTRONIC ENTERPRISE CO., LTD.  
No. 3, Wugong 5th Rd., Sinjhuang City, Taipei County 242,  
Taiwan, R.O.C.

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Dec. 25, 2008 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

  
Sam Lee / Supervisor

**SPORTON International Inc.**

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

**1 SUMMARY OF THE TEST RESULT**

<b>Applied Standard: 47 CFR FCC Part 15 Subpart C</b>				
<b>Part</b>	<b>Rule Section</b>	<b>Description of Test</b>	<b>Result</b>	<b>Under Limit</b>
3.1	15.207	AC Power Line Conducted Emissions	Complies	2.47 dB
3.2	15.249(a)	Field Strength of Fundamental Emissions	Complies	5.57 dB
3.3	15.215(c)	20dB Spectrum Bandwidth	Complies	-
3.4	15.249(a)/(d)	Radiated Emissions	Complies	3.24 dB
3.5	15.249(d)	Band Edge Emissions	Complies	3.40 dB
3.6	15.203	Antenna Requirements	Complies	-

<b>Test Items</b>	<b>Uncertainty</b>	<b>Remark</b>
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Field Strength of Fundamental Emissions	±0.8dB	Confidence levels of 95%
20dB Spectrum Bandwidth	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

**2 GENERAL INFORMATION**

**2.1 Product Details**

Items	Description
Power Type	5Vdc from system
Modulation	GFSK
Frequency Range	2400 ~ 2483.5MHz
Channel Number	16
Channel Band Width (99%)	1.08 MHz
Max. Field Strength	88.43 dBuV/m at 3m (Average)
Antenna	Internal Antenna (Without any antenna connector)

**2.2 Table for Carrier Frequencies**

Frequency Band	Channel No.	Frequency
2400 ~ 2483.5MHz	0	2402 MHz
	1	2425 MHz
	2	2448 MHz
	3	2471 MHz
	4	2405 MHz
	5	2428 MHz
	6	2451 MHz
	7	2474 MHz
	8	2408 MHz
	9	2431 MHz
	10	2454 MHz
	11	2477 MHz
	12	2411 MHz
	13	2434 MHz
	14	2457 MHz
	15	2480 MHz

**2.3 Table for Test Modes**

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel	Antenna
AC Power Line Conducted Emissions	Normal Mode	Auto	-
Field Strength of Fundamental Emissions 20dB Spectrum Bandwidth	CTX	0/2/15	1
Radiated Emissions 9kHz~1GHz	CTX	2	1
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	CTX	0/2/15	1
Band Edge Emissions	CTX	0/15	1

Note: CTX=continuously transmitting

**2.4 Table for Testing Locations**

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4086B-1	-
CO04-HY	Conduction	Hwa Ya	93596	IC 4086B-1	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).


**2.5 Table for Supporting Units**

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D400	N/A


**2.6 Test Configuration**

**2.6.1 Radiation Emissions Test Configuration**

**For radiated emissions 9kHz~1GHz**

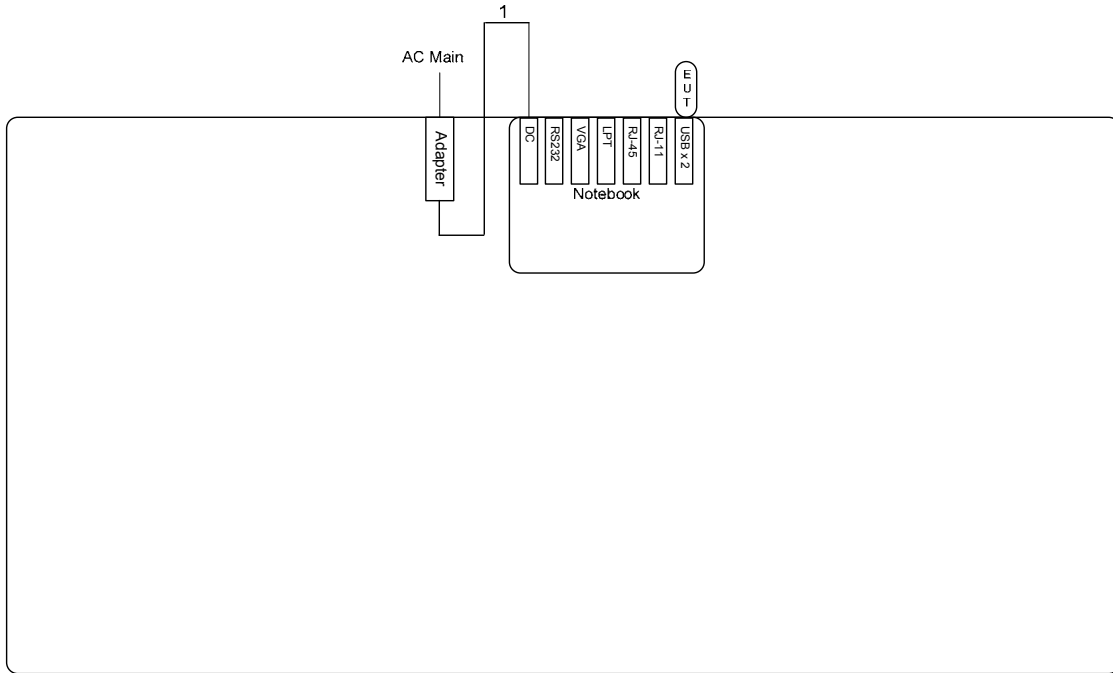

**For radiated emissions above 1GHz**

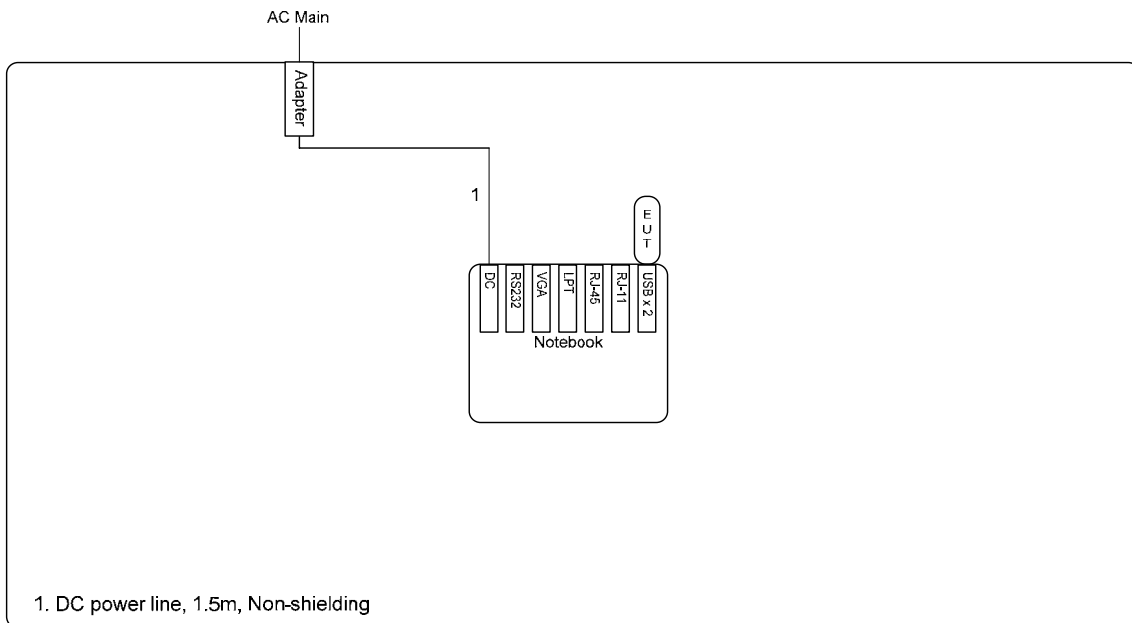



**3 TEST RESULT**

**3.1 AC Power Line Conducted Emissions Measurement**

**3.1.1 Limit**

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

**Class A**

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	79	66
0.5~30	73	60

**Class B**

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

**3.1.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

**3.1.3 Test Procedures**

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

**3.1.4 Test Setup Layout**

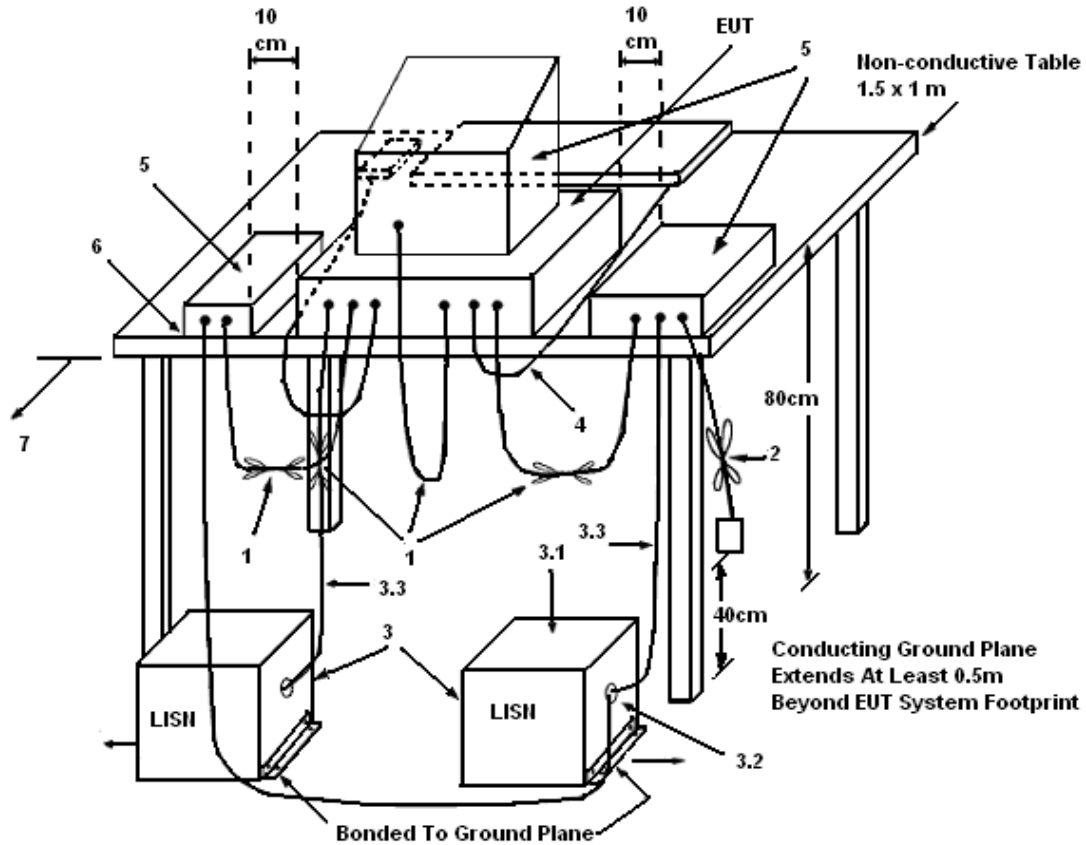

**LEGEND:**

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

**3.1.5 Test Deviation**


There is no deviation with the original standard.

**3.1.6 EUT Operation during Test**

The EUT was placed on the test table and programmed in normal function.


**3.1.7 Results of AC Power Line Conducted Emissions Measurement**

<b>Test date</b>	Jan. 06, 2009	<b>Test Site No.</b>	CO04-HY
<b>Temperature</b>	25	<b>Humidity</b>	55%
<b>Test Engineer</b>	Chris	<b>Phase</b>	Line
<b>Configuration</b>	Normal Mode		

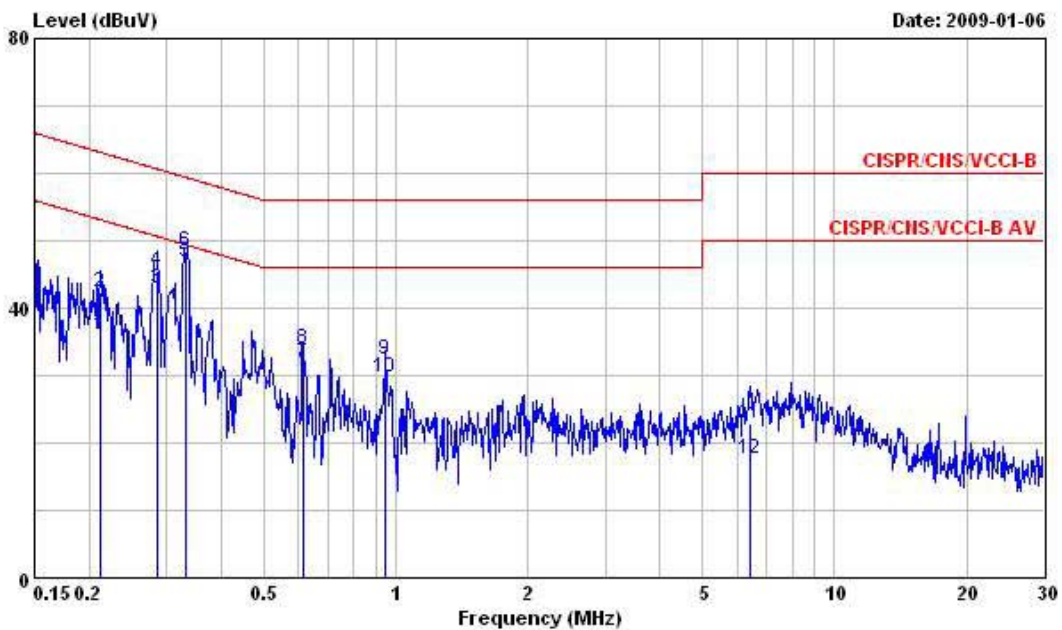

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.2127940	36.16	-16.94	53.10	36.01	0.09	0.06	Average
2	0.2127940	42.49	-20.61	63.10	42.34	0.09	0.06	QP
3	0.2862970	42.95	-7.68	50.63	42.79	0.10	0.06	Average
4	0.2862970	45.57	-15.06	60.63	45.41	0.10	0.06	QP
5	0.3329800	46.91	-2.47	49.38	46.75	0.10	0.06	Average
6	0.3329800	48.36	-11.02	59.38	48.20	0.10	0.06	QP
7	0.6139960	31.79	-14.21	46.00	31.61	0.10	0.08	Average
8	0.6139960	33.83	-22.17	56.00	33.65	0.10	0.08	QP
9	0.9480900	32.37	-23.63	56.00	32.16	0.11	0.10	QP
10	0.9480900	29.81	-16.19	46.00	29.60	0.11	0.10	Average
11	6.420	22.95	-37.05	60.00	22.43	0.23	0.29	QP
12	6.420	17.75	-32.25	50.00	17.23	0.23	0.29	Average

Test date	Jan. 06, 2009	Test Site No.	CO04-HY
Temperature	25	Humidity	55%
Test Engineer	Chris	Phase	Neutral
Configuration	Normal Mode		

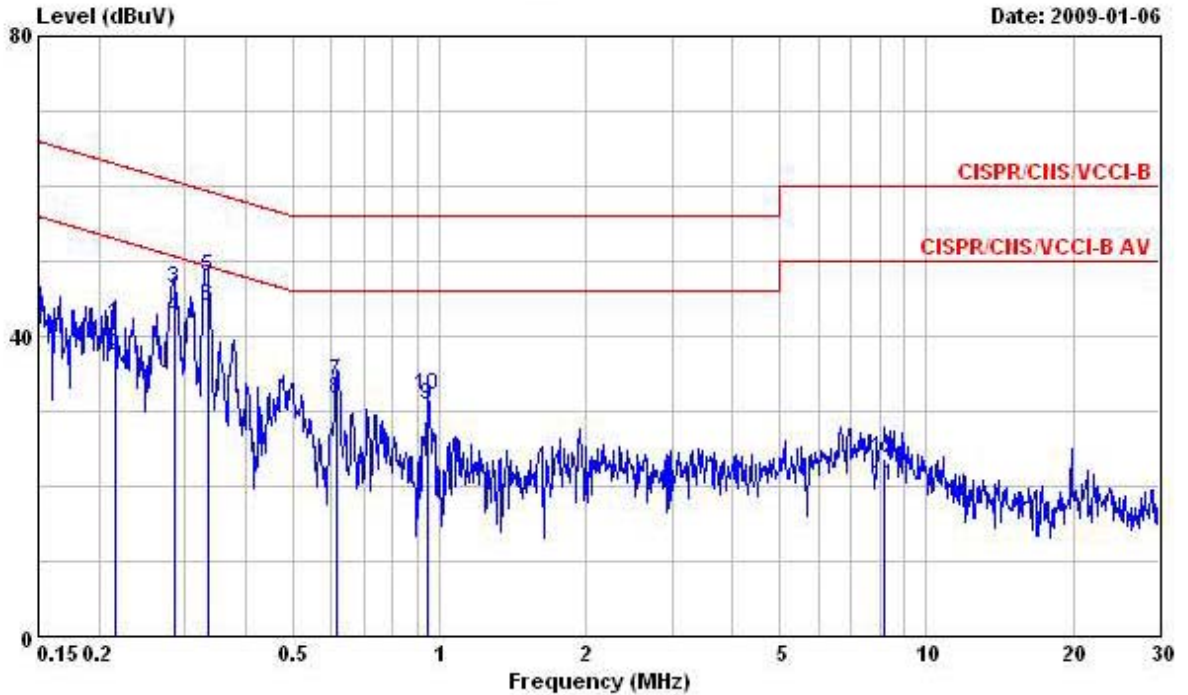

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.2150610	41.59	-21.42	63.01	41.45	0.08	0.06	QP
2	0.2150610	37.34	-15.67	53.01	37.20	0.08	0.06	Average
3	0.2847840	46.19	-14.49	60.68	46.04	0.09	0.06	QP
4	0.2847840	42.31	-8.37	50.68	42.16	0.09	0.06	Average
5	0.3338470	47.84	-11.51	59.35	47.69	0.09	0.06	QP
6	0.3338470	43.95	-5.40	49.35	43.80	0.09	0.06	Average
7	0.6139960	34.01	-21.99	56.00	33.83	0.10	0.08	QP
8	0.6139960	31.55	-14.45	46.00	31.37	0.10	0.08	Average
9	0.9480900	30.87	-15.13	46.00	30.66	0.11	0.10	Average
10	0.9480900	32.13	-23.87	56.00	31.92	0.11	0.10	QP
11	8.190	19.97	-30.03	50.00	19.42	0.24	0.31	Average
12	8.190	23.56	-36.44	60.00	23.01	0.24	0.31	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

**3.2 Field Strength of Fundamental Emissions Measurement**

**3.2.1 Limit**

The field strength of fundamental emissions within these bands specified at a distance of 3 meters (measurement instrumentation employing an average detector) shall comply with the following table.

<b>Frequency Band (MHz)</b>	<b>Fundamental Emissions Limit (dBuV/m) at 3m</b>
2400-2483.5	94
5725-5875	94

**3.2.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

<b>Power Meter Parameter</b>	<b>Setting</b>
RB	1 MHz Peak / 1MHz Average
VB	1 MHz Peak / 10Hz Average
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**3.2.3 Test Procedures**

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For Fundamental emissions, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

3.2.4 Test Setup Layout

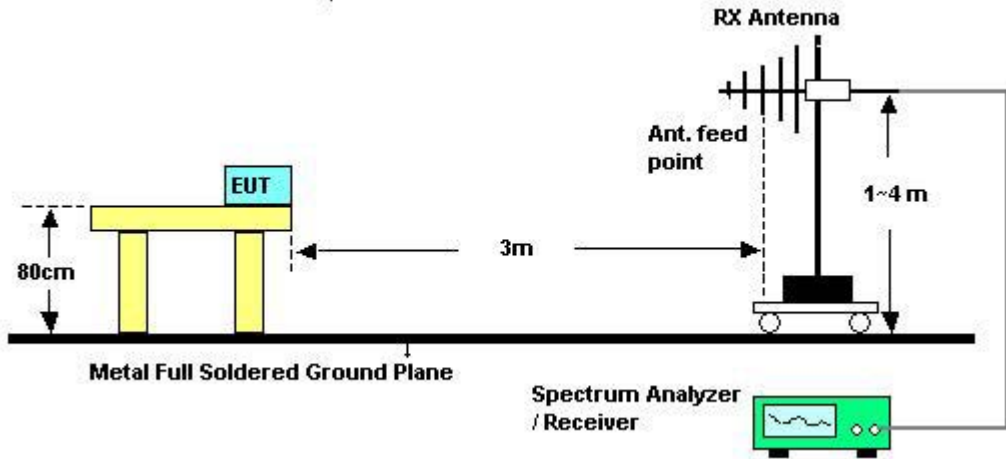

3.2.5 Test Deviation

There is no deviation with the original standard.

3.2.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

**3.2.7 Test Result of Field Strength of Fundamental Emissions**

<b>Test date</b>	Dec. 25, 2008	<b>Test Site No.</b>	03CH03-HY
<b>Temperature</b>	25.8	<b>Humidity</b>	38%
<b>Test Engineer</b>	Eddie	<b>Configuration</b>	Channel 0/2/15

**Channel 0**

**Vertical**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
<b>3</b>	<b>2401.770</b>	<b>87.44</b>	<b>-26.56</b>	<b>114.00</b>	<b>56.97</b>	<b>28.19</b>	<b>2.13</b>	<b>0.00</b>	<b>Peak</b>
<b>3 @</b>	<b>2401.770</b>	<b>87.16</b>	<b>-6.84</b>	<b>94.00</b>	<b>56.65</b>	<b>28.29</b>	<b>2.19</b>	<b>0.00</b>	<b>Average</b>

**Channel 2**

**Vertical**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
<b>1</b>	<b>2447.940</b>	<b>87.63</b>	<b>-26.37</b>	<b>114.00</b>	<b>57.02</b>	<b>28.40</b>	<b>2.22</b>	<b>0.00</b>	<b>Peak</b>
<b>1 @</b>	<b>2447.940</b>	<b>87.39</b>	<b>-6.61</b>	<b>94.00</b>	<b>56.78</b>	<b>28.40</b>	<b>2.22</b>	<b>0.00</b>	<b>Average</b>

**Channel 15**

**Vertical**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
<b>1</b>	<b>2480.050</b>	<b>88.69</b>	<b>-25.31</b>	<b>114.00</b>	<b>57.98</b>	<b>28.47</b>	<b>2.25</b>	<b>0.00</b>	<b>Peak</b>
<b>1 @</b>	<b>2480.050</b>	<b>88.43</b>	<b>-5.57</b>	<b>94.00</b>	<b>57.72</b>	<b>28.47</b>	<b>2.25</b>	<b>0.00</b>	<b>Average</b>

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**3.3 20dB Spectrum Bandwidth Measurement**

**3.3.1 Limit**

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (2400 ~ 2483.5MHz).

**3.3.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 20dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**3.3.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.

**3.3.4 Test Setup Layout**

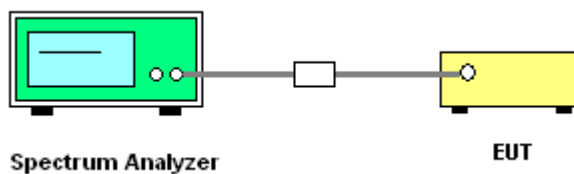

**3.3.5 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.




3.3.6 Test Result of 20dB Spectrum Bandwidth

Test date	Dec. 26, 2008	Test Site No.	TH01-HY
Temperature	28	Humidity	58%
Test Engineer	Tom	Configuration	Channel 0/15


Frequency	20dB BW (MHz)	99% OBW (MHz)	Frequency range (MHz) fL > 2400MHz	Frequency range (MHz) fH < 2483.5MHz	Test Result
2402 MHz	1.17	1.06	2401.4640	-	Complies
2448 MHz	1.20	1.08	-	-	Complies
2480 MHz	1.20	1.07	-	2480.6281	Complies

20 dB/99% Bandwidth Plot on 2402 MHz

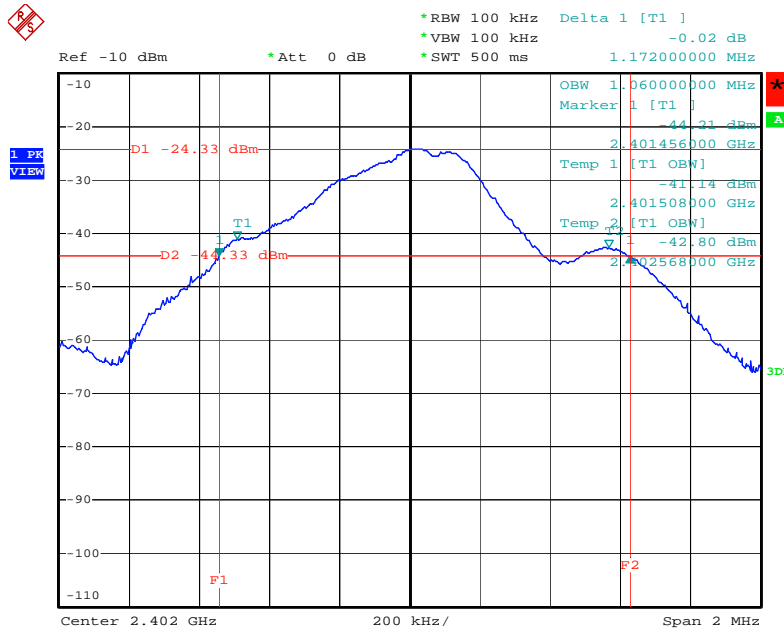


Date: 26.DEC.2008 08:06:21

20 dB/99% Bandwidth Plot on 2448 MHz

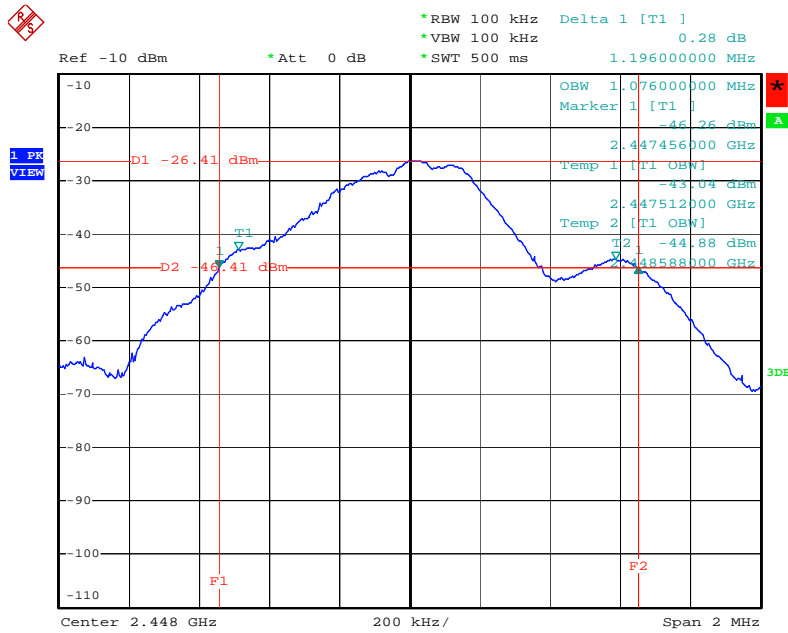

Date: 26.DEC.2008 08:03:24

20 dB/99% Bandwidth Plot on 2480 MHz

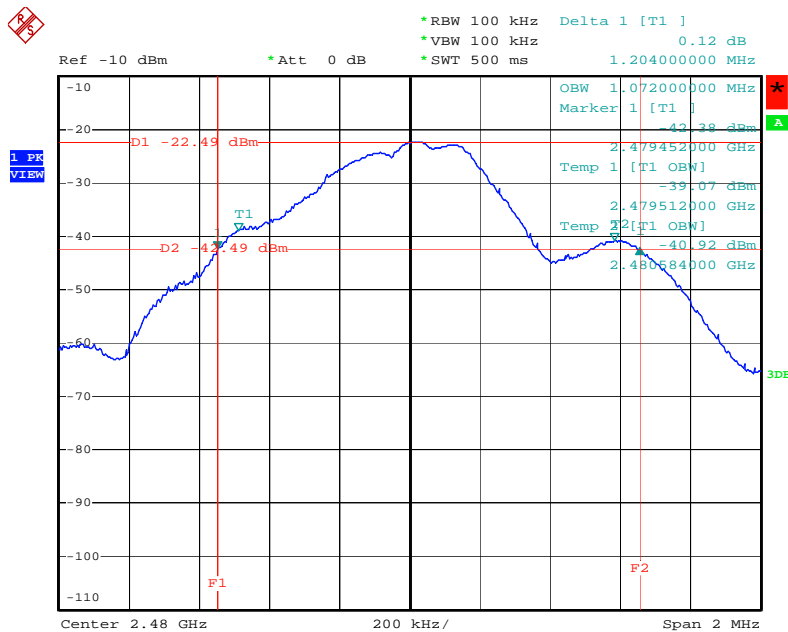

Date: 26.DEC.2008 08:12:51

**3.4 Radiated Emissions Measurement**

**3.4.1 Limit**

Harmonic emissions limits comply with below 54dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

<b>Frequencies (MHz)</b>	<b>Field Strength (microvolt/meter)</b>	<b>Measurement Distance (meters)</b>
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**3.4.2 Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer and receiver.

<b>Spectrum Parameter</b>	<b>Setting</b>
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average


<b>Receiver Parameter</b>	<b>Setting</b>
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

**3.4.3 Test Procedures**


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.4.4 Test Setup Layout

For radiated emissions below 30MHz

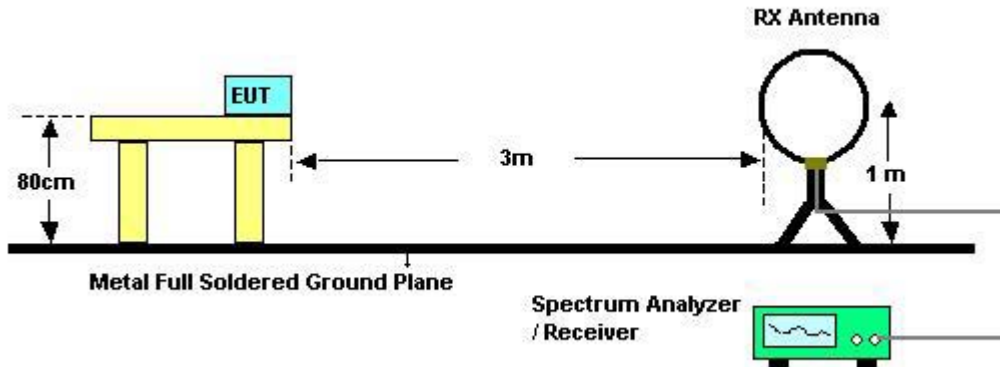

For radiated emissions above 30MHz

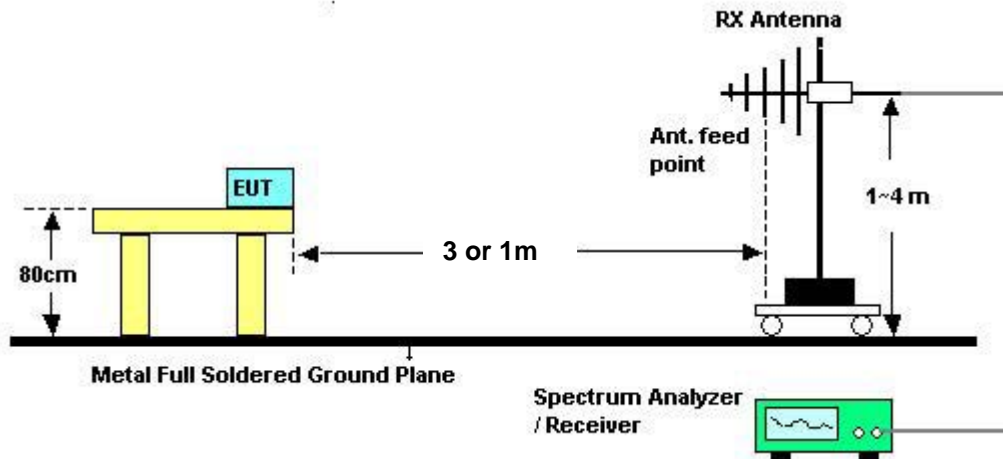

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

3.4.5 Test Deviation

There is no deviation with the original standard.

3.4.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

**3.4.7 Results of Radiated Emissions (9kHz~30MHz)**

<b>Test date</b>	Dec. 12, 2008	<b>Test Site No.</b>	03CH03-HY
<b>Temperature</b>	25.8	<b>Humidity</b>	38%
<b>Test Engineer</b>	Eddie		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.4.8 Results of Radiated Emissions (30MHz~1GHz)


Test date	Dec. 26, 2008	Test Site No.	03CH03-HY
Temperature	25.8	Humidity	38%
Test Engineer	Eddie	Configuration	Channel 2

Horizontal

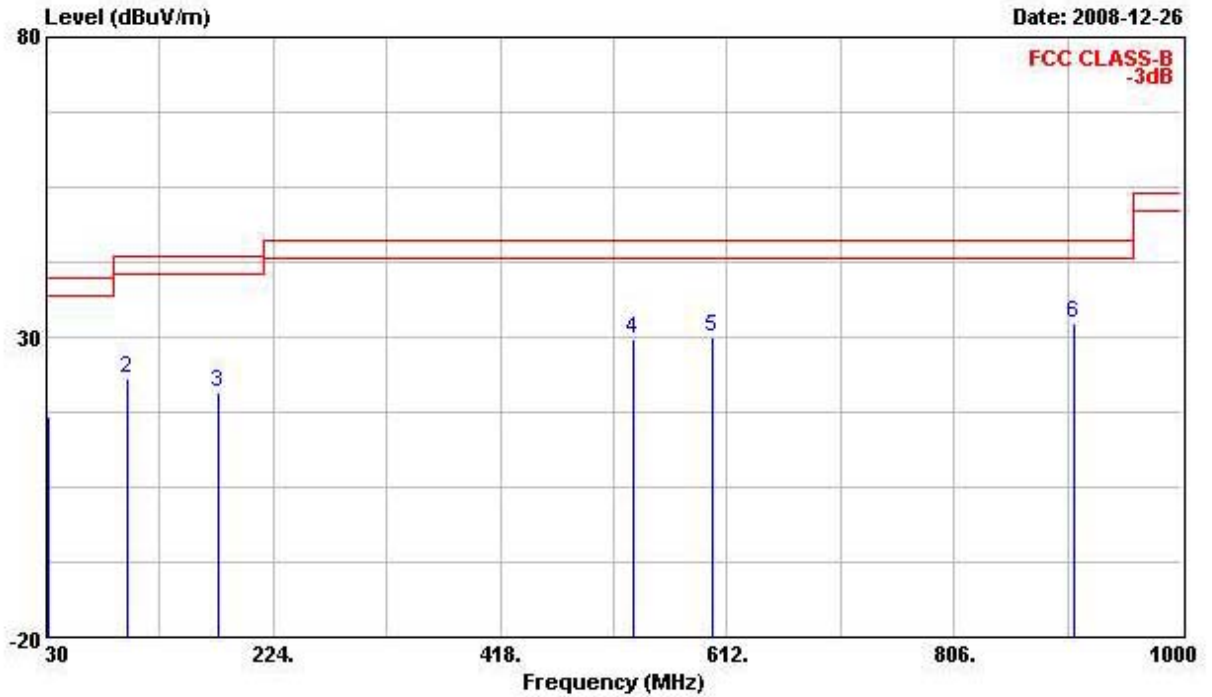

	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	31.940	16.68	-23.32	40.00	26.05	17.30	1.02	27.69 Peak
2	98.870	23.09	-20.41	43.50	38.16	11.03	1.72	27.82 Peak
3	176.470	20.68	-22.82	43.50	37.12	9.31	2.21	27.96 Peak
4	532.460	29.72	-16.28	46.00	35.66	18.88	4.00	28.81 Peak
5	599.390	30.16	-15.84	46.00	35.54	19.30	4.45	29.14 Peak
6	908.820	32.31	-13.69	46.00	35.38	21.08	5.22	29.37 Peak

Vertical

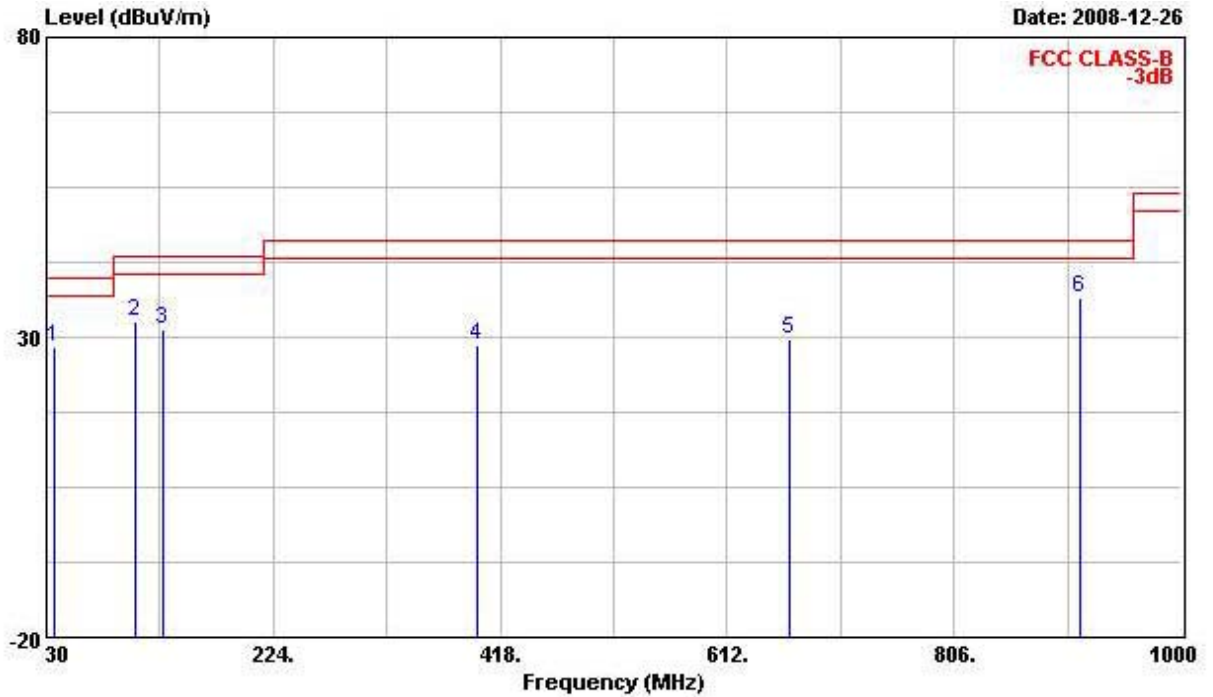

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	36.790	28.31	-11.69	40.00	40.62	14.35	1.06	27.72	Peak
2	105.660	32.67	-10.83	43.50	46.81	11.92	1.74	27.80	Peak
3	129.910	31.40	-12.10	43.50	44.88	12.38	1.99	27.85	Peak
4	397.630	28.58	-17.42	46.00	37.55	16.38	3.51	28.86	Peak
5	665.350	29.59	-16.41	46.00	34.95	19.73	4.45	29.55	Peak
6	913.670	36.51	-9.49	46.00	39.52	21.11	5.25	29.37	Peak

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



3.4.9 Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)


Test date	Dec. 26, 2008	Test Site No.	03CH03-HY
Temperature	25.8	Humidity	38%
Test Engineer	Eddie	Configuration	Channel 0

Horizontal

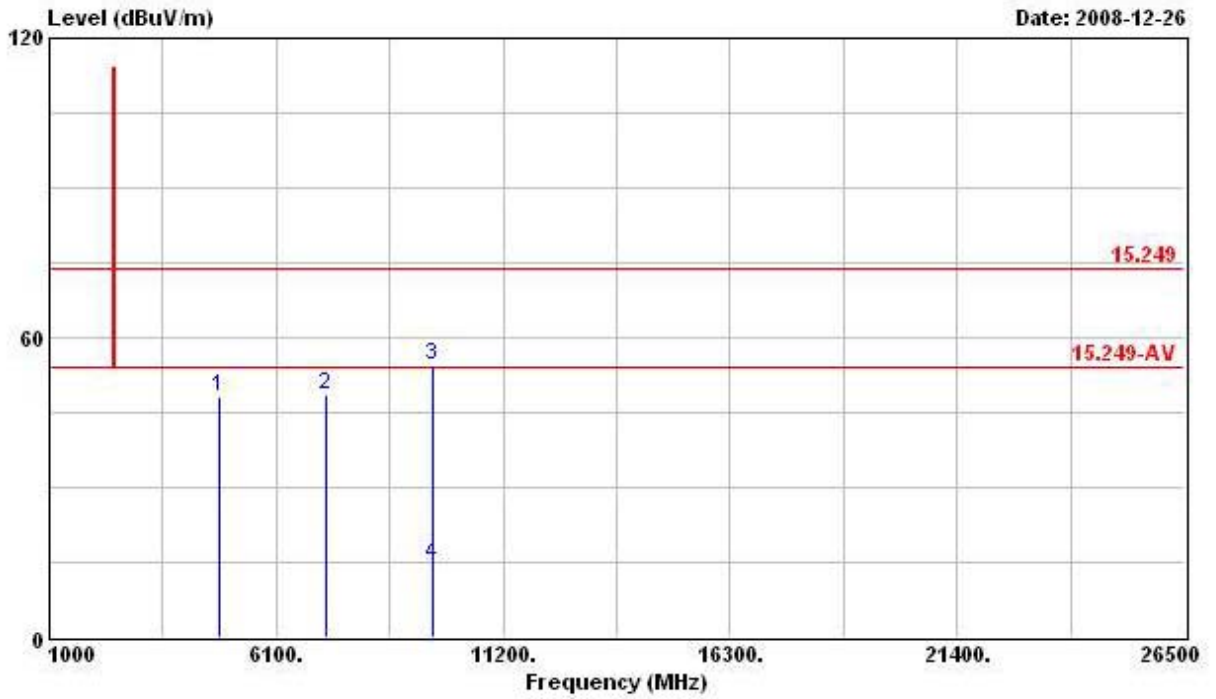

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4804.000	48.18	-5.82	54.00	43.60	33.02	4.03	32.48	PK
2	7202.000	48.54	-5.46	54.00	42.08	35.70	3.55	32.78	PK
3	9608.000	54.33	-19.67	74.00	43.82	38.31	5.16	32.96	PEAK
4	9608.000	14.63	-39.37	54.00	4.12	38.31	5.16	32.96	Average


Vertical

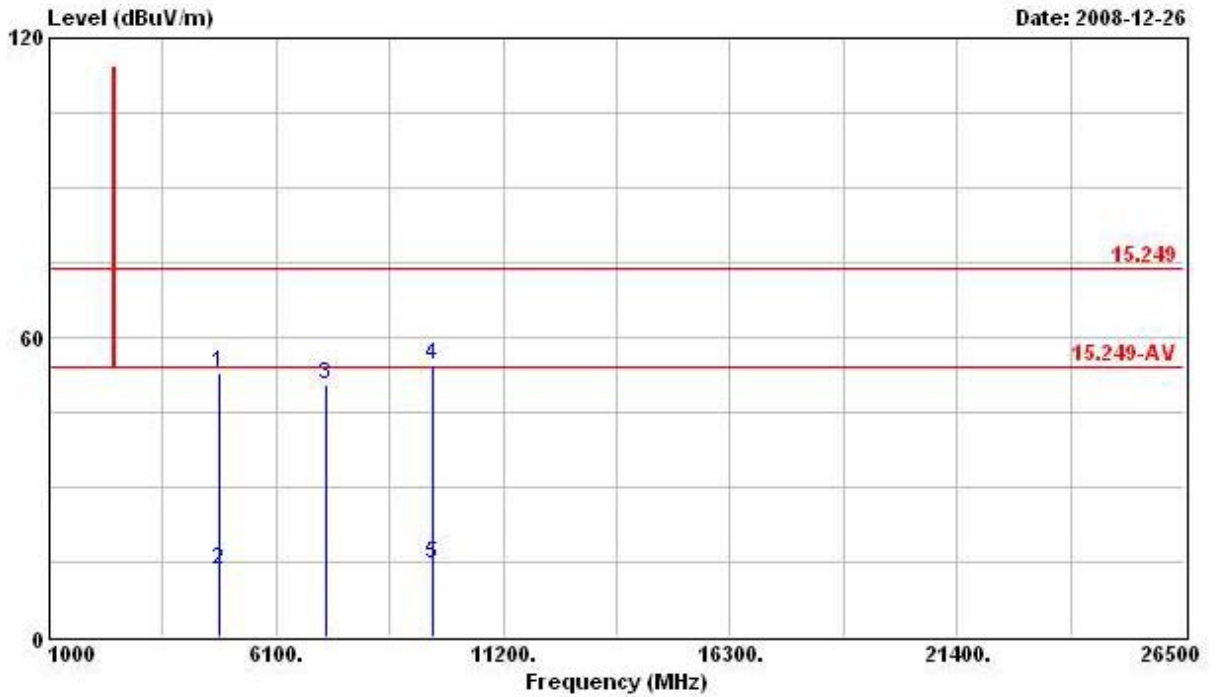

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4804.000	52.95	-21.05	74.00	48.37	33.02	4.03	32.48	PEAK
2	4804.000	13.25	-40.75	54.00	8.68	33.02	4.03	32.48	Average
3	7202.000	50.61	-3.39	54.00	44.15	35.70	3.55	32.78	PK
4	9608.000	54.47	-19.53	74.00	43.96	38.31	5.16	32.96	PEAK
5	9608.000	14.77	-39.23	54.00	4.26	38.31	5.16	32.96	Average


Test date	Dec. 26, 2008	Test Site No.	03CH03-HY
Temperature	25.8	Humidity	38%
Test Engineer	Eddie	Configuration	Channel 2

Horizontal

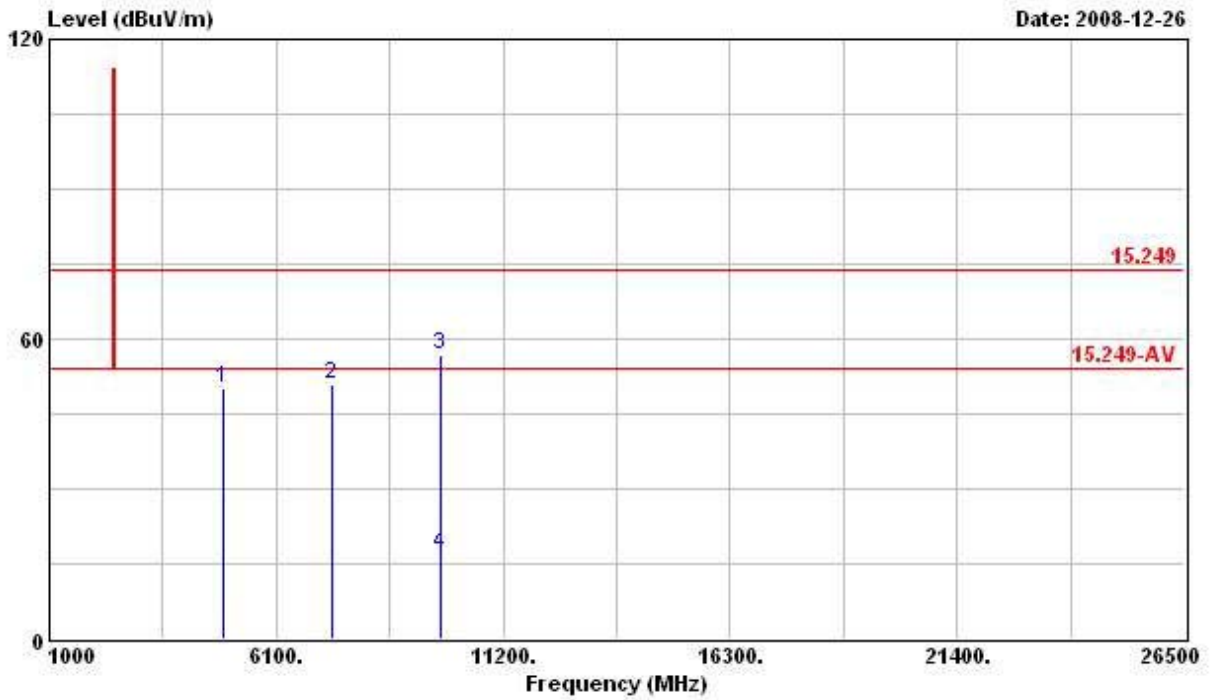

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4900.000	49.94	-4.06	54.00	45.20	33.19	4.02	32.47	PK
2	7344.000	50.76	-3.24	54.00	43.58	36.03	4.03	32.88	PK
3	9792.000	56.67	-17.33	74.00	45.53	38.69	5.36	32.91	PEAK
4	9792.000	16.97	-37.03	54.00	5.83	38.69	5.36	32.91	Average


Vertical

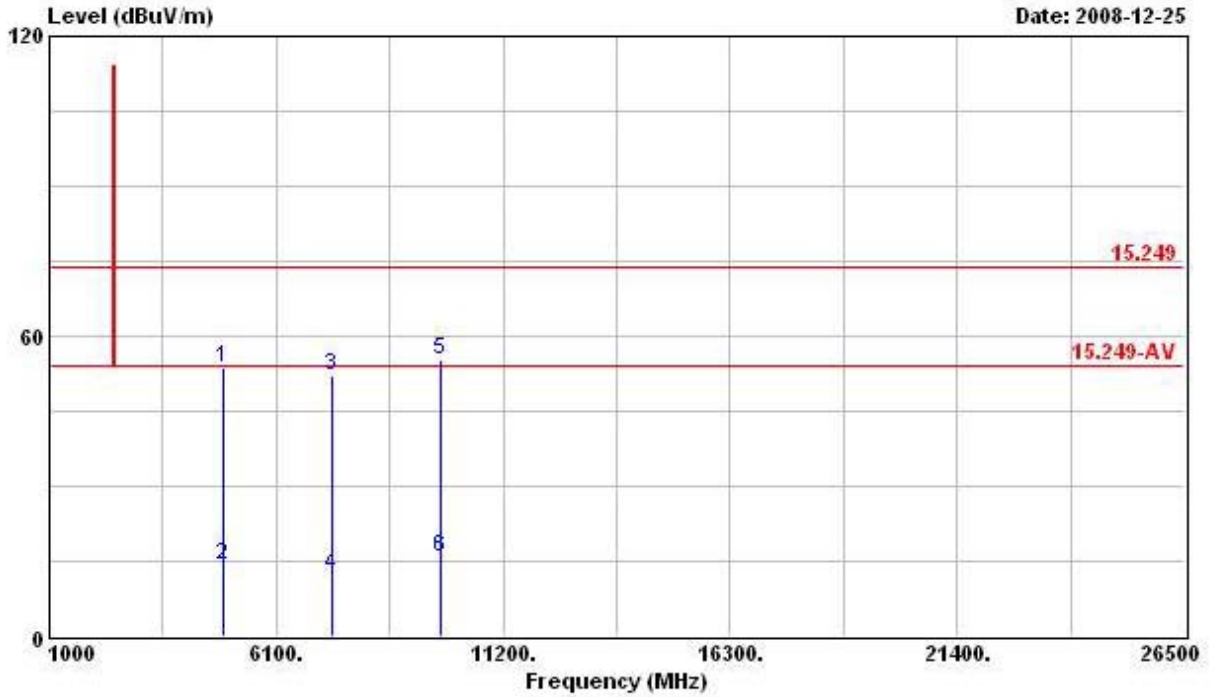

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4896.000	53.75	-20.25	74.00	49.00	33.19	4.02	32.47	PEAK
2	4896.000	14.05	-39.95	54.00	9.30	33.19	4.02	32.47	Average
3	7344.000	52.04	-21.96	74.00	44.86	36.03	4.03	32.88	PEAK
4	7344.000	12.34	-41.66	54.00	5.16	36.03	4.03	32.88	Average
5	9792.000	55.37	-18.63	74.00	44.23	38.69	5.36	32.91	PEAK
6	9792.000	15.67	-38.33	54.00	4.53	38.69	5.36	32.91	Average


Test date	Dec. 26, 2008	Test Site No.	03CH03-HY
Temperature	25.8	Humidity	38%
Test Engineer	Eddie	Configuration	Channel 15

Horizontal

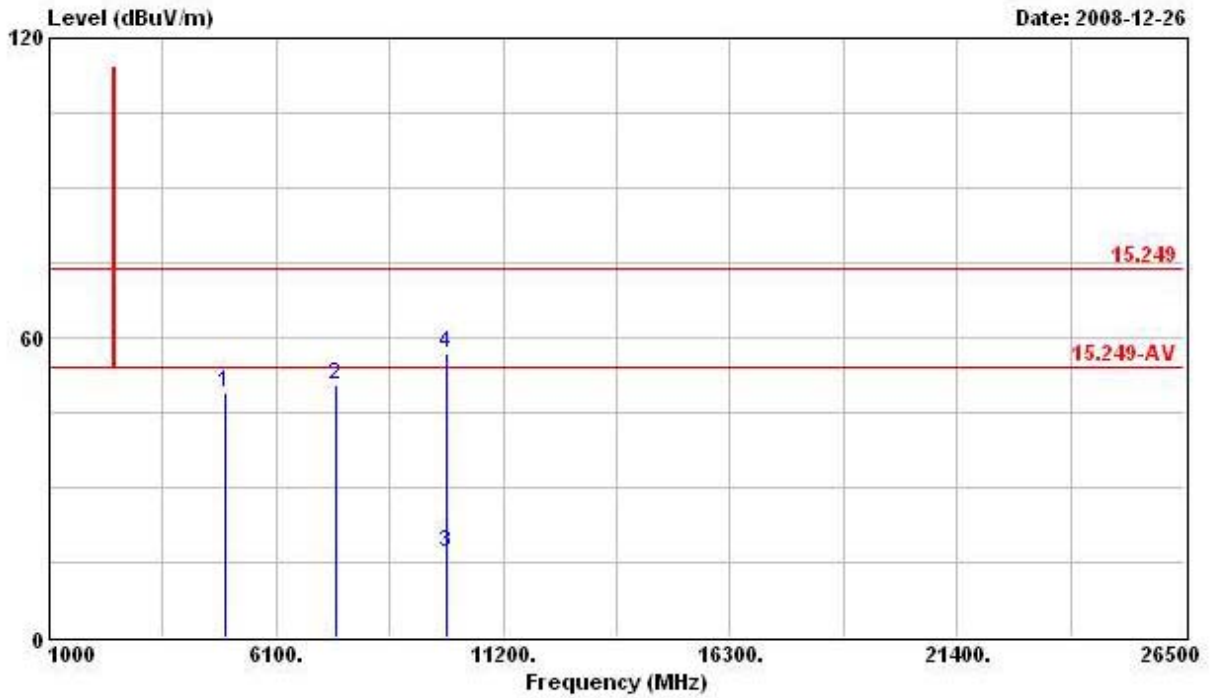

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	4964.000	49.02	-4.98	54.00	44.14	33.33	4.01	32.46	PK
2 @	7440.000	50.61	-3.39	54.00	43.00	36.28	4.28	32.95	PK
3	9920.000	17.04	-36.96	54.00	5.38	38.96	5.57	32.87	Average
4	9920.000	56.74	-17.26	74.00	45.09	38.96	5.57	32.87	PEAK

Vertical

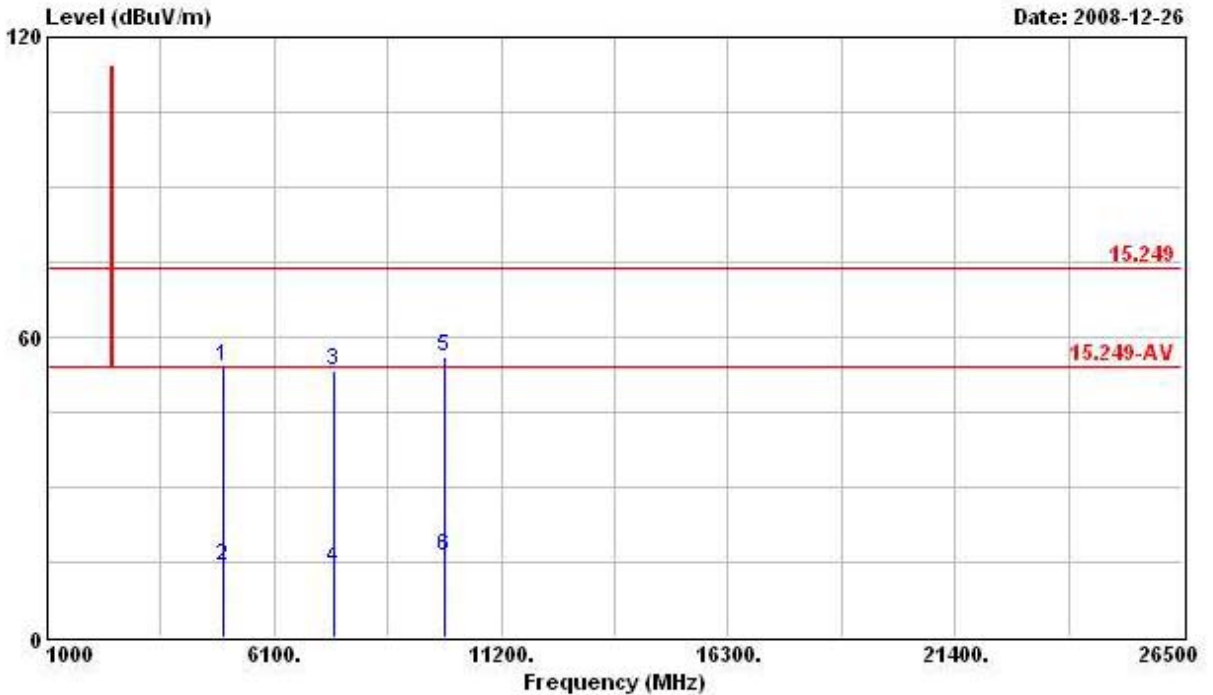

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4960.000	53.93	-20.07	74.00	49.05	33.33	4.01	32.46	PEAK
2	4960.000	14.23	-39.77	54.00	9.35	33.33	4.01	32.46	Average
3	7440.000	53.44	-20.56	74.00	45.83	36.28	4.28	32.95	PEAK
4	7440.000	13.74	-40.26	54.00	6.14	36.28	4.28	32.95	Average
5	9920.000	55.90	-18.10	74.00	44.24	38.96	5.57	32.87	PEAK
6	9920.000	16.20	-37.80	54.00	4.54	38.96	5.57	32.87	Average

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**3.5 Band Edge Emissions Measurement**

**3.5.1 Limit**

Band edge emissions radiated outside of the specified frequency bands shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

<b>Frequencies (MHz)</b>	<b>Field Strength (microvolt/meter)</b>	<b>Measurement Distance (meters)</b>
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**3.5.2 Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

<b>Spectrum Parameter</b>	<b>Setting</b>
Attenuation	Auto
Span Frequency	100 MHz
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

**3.5.3 Test Procedures**

1. The test procedure is the same as section 3.2.3, only the frequency range investigated is limited to 2MHz around band edges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

**3.5.4 Test Setup Layout**

This test setup layout is the same as that shown in section 3.2.4.

**3.5.5 Test Deviation**

There is no deviation with the original standard.

**3.5.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.5.7 Test Result of Band Edge Emissions**

<b>Test date</b>	Dec. 25, 2008	<b>Test Site No.</b>	03CH03-HY
<b>Temperature</b>	25.8	<b>Humidity</b>	38%
<b>Test Engineer</b>	Eddie	<b>Configuration</b>	Channel 0, 15

**Channel 0**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
<b>1</b>	<b>2324.820</b>	<b>57.10</b>	<b>-16.90</b>	<b>74.00</b>	<b>26.82</b>	<b>28.16</b>	<b>2.13</b>	<b>0.00</b>	<b>Peak</b>
<b>2 @</b>	<b>2400.000</b>	<b>70.03</b>	<b>-3.97</b>	<b>74.00</b>	<b>39.55</b>	<b>28.29</b>	<b>2.19</b>	<b>0.00</b>	<b>Peak</b>
<b>1 @</b>	<b>2340.780</b>	<b>43.59</b>	<b>-10.41</b>	<b>54.00</b>	<b>13.27</b>	<b>28.19</b>	<b>2.13</b>	<b>0.00</b>	<b>Average</b>
<b>2 @</b>	<b>2400.000</b>	<b>48.63</b>	<b>-5.37</b>	<b>54.00</b>	<b>18.15</b>	<b>28.29</b>	<b>2.19</b>	<b>0.00</b>	<b>Average</b>

**Channel 15**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
<b>2</b>	<b>2483.500</b>	<b>57.91</b>	<b>-16.09</b>	<b>74.00</b>	<b>27.20</b>	<b>28.47</b>	<b>2.25</b>	<b>0.00</b>	<b>Peak</b>
<b>2 @</b>	<b>2483.500</b>	<b>50.60</b>	<b>-3.40</b>	<b>54.00</b>	<b>19.89</b>	<b>28.47</b>	<b>2.25</b>	<b>0.00</b>	<b>Average</b>

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



### **3.6 Antenna Requirements**

#### **3.6.1 Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

#### **3.6.2 Antenna Connector Construction**

Please refer to section 2.1 in this test report; antenna connector complied with the requirements.

**4 LIST OF MEASURING EQUIPMENTS**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Mar. 03, 2008	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 31, 2008	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2008	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2008	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Mar. 03, 2008	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 14, 2008	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 14, 2008	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jul. 21, 2008	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9 kHz - 30 GHz	Jan. 10, 2008	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 12, 2008	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 04, 2008	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan.18, 2008	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec. 01, 2008	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec. 01, 2008	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Jan. 22, 2007*	Radiation (03CH03-HY)
Loop Antenna	TESEQ	HLA6120	24155	9KHz ~ 30MHz	Jan. 18, 2007*	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Jan. 10, 2008	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 11, 2008	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100458	DC ~ 30GHz	Jul. 11, 2008	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 11, 2008	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2008	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Jul. 18, 2008	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2008	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2008	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Dec. 14, 2008	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 10, 2008	Conducted (TH01-HY)
Oscilloscope	Tektonix	TDS380	B016197	400MHz/ 2GS/s	Jun. 27, 2008	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	May 30, 2008*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

## 5 TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

6 TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-081212

財團法人全國認證基金會  
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

**Sporton International Inc.**

**EMC & Wireless Communications Laboratory**

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

**is accredited in respect of laboratory**

- Accreditation Criteria** : ISO/IEC 17025:2005
- Accreditation Number** : 1190
- Originally Accredited** : December 15, 2003
- Effective Period** : January 10, 2007 to January 09, 2010
- Accredited Scope** : Testing Field, see described in the Appendix
- Specific Accreditation Program** : Accreditation Program for Designated Testing Laboratory for Commodities Inspection  
Accreditation Program for Telecommunication Equipment Testing Laboratory  
Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities

Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : December 12, 2008

P1, total 18 pages