

FCC Part 15 EMI TEST REPORT

Part I - WiFi

of

E.U.T. : NCSP35 Display Commander
FCC ID. : HQXNCSP35DC
Model No. : NCSP35DC

for

APPLICANT : Sysgration Ltd.
ADDRESS : 6F-2.,No.1,Sec.1,Tiding Blvd., Neihu Dist.,
Taipei City 114, Taiwan

Test Performed by

ELECTRONICS TESTING CENTER, TAIWAN

NO. 34. LIN 5. DINGFU VIL., LINKOU DIST.,
NEW TAIPEI CITY, TAIWAN, 24442, R.O.C.

Tel : (02)26023052 Fax : (02)26010910

<http://www.etc.org.tw> ; e-mail: emc@etc.org.tw

Report Number : 17-10-RBF-025-01

TEST REPORT CERTIFICATION

Applicant : Sysgration Ltd.
6F-2.,No.1,Sec.1,Tiding Blvd., Neihu Dist., Taipei City 114, Taiwan

Manufacturer : Sysgration Ltd.(Nan-Kang Factory)
No.28,North Industry Rd., Nan-Kang Industrial Zone, Nan-Tou City,
Nan-Tou County 540, Taiwan

Description of EUT

- a) Type of EUT : NCSP35 Display Commander
- b) Trade Name : iN • Command
- c) Model No. : NCSP35DC
- d) Power Supply : DC 12V

Regulation Applied : FCC Rules and Regulations Part 15 Subpart C

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.10-2013, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

- Note: 1. The result of the testing report relate only to the item tested.
2. The testing report shall not be reproduced expect in full, without the written approval of ETC

Summary of Tests

Test	Results
Radiated Emission	Pass
Conducted Emission	N.A.
Emission Bandwidth	Pass
Output Power	Pass
100 kHz Bandwidth of Band Edges	Pass
Power Density	Pass
Out-of-Band Conducted Emission	Pass
Duty Cycle	N.A.

Date Test Item Received : Sep. 21, 2017
Date Test Campaign Completed : Jan. 15, 2018
Date of Issue : Jan. 15, 2018

Test Engineer : Brian Huang
(Brian Huang, Engineer)

Approve & Authorized Signer : S. S. Liou
S. S. Liou, Section Manager
EMC Dept. II of ELECTRONICS
TESTING CENTER, TAIWAN



Table of Contents	Page
1 GENERAL INFORMATION.....	1
1.1 Product Description.....	1
1.2 Characteristics of Device	1
1.3 Test Methodology	1
1.4 Test Facility.....	1
2 PROVISIONS APPLICABLE.....	2
2.1 Definition	2
2.2 Requirement for Compliance	3
2.3 Restricted Bands of Operation	5
2.4 Labeling Requirement.....	5
2.5 User Information	6
3. SYSTEM TEST CONFIGURATION.....	7
3.1 Justification	7
3.2 Devices for Tested System.....	7
4 RADIATED EMISSION MEASUREMENT	8
4.1 Applicable Standard.....	8
4.2 Measurement Procedure.....	8
4.3 Measuring Instrument	10
4.4 Radiated Emission Data	11
4.5 Field Strength Calculation	33
4.6 Photos of Radiation Measuring Setup.....	34
5 CONDUCTED EMISSION MEASUREMENT.....	36
5.1 Description.....	36
6 ANTENNA REQUIREMENT	37
6.1 Standard Applicable	37
6.2 Antenna Construction and Directional Gain.....	37
7 EMISSION BANDWIDTH MEASUREMENT	38
7.1 Standard Applicable	38
7.2 Measurement Procedure.....	38
7.3 Measurement Equipment	38
7.4 Measurement Data	39
8 OUTPUT POWER MEASUREMENT.....	49
8.1 Standard Applicable	49
8.2 Measurement Procedure.....	49

8.3 Measurement Equipment	49
8.4 Measurement Data	50
9 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT	51
9.1 Standard Applicable	51
9.2 Measurement Procedure.....	51
9.3 Measurement Equipment	51
9.4 Measurement Data	52
10 POWER DENSITY MEASUREMENT	56
10.1 Standard Applicable	56
10.2 Measurement Procedure.....	56
10.3 Measurement Equipment	56
10.4 Measurement Data	57
11. OUT-OF-BAND CONDUCTED EMISSION MEASUREMENT	67
11.1 Standard Applicable	67
11.2 Measurement Procedure.....	67
11.3 Measurement Equipment	67
11.4 Measurement Data	68
12. DUTY CYCLE	78
12.1 Standard Applicable	78
12.2 Measurement Equipment	78
12.3 Measurement Data	78

1 GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : NCSP35 Display Commander
- b) Trade Name : iN • Command
- c) Model No. : NCSP35DC
- d) Power Supply : DC 12V

1.2 Characteristics of Device

The product is a NCSP35 Display Commander.

1.3 Test Methodology

Both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.10-2013. Other required measurements were illustrated in separate sections of this test report for details. For RF test the measurement procedure was referred to FCC KDB 558074 D01 DTS Meas Guidance v04.

Software	Version	Note
e3	Version 6.100618f	Radiated Emission Test
e3	Version 6.100421	Conducted Emission Test

1.4 Test Facility

Location of the Test site: No.34, Lin 5, Dingfu Vil., Linkou Dist., New Taipei City, Taiwan 24442, R.O.C.

Designation Number: TW2628.

2 PROVISIONS APPLICABLE

2.1 Definition

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device :

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business of industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency MHz	Quasi Peak dB μ V	Average dB μ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

* Decreases with the logarithm of the frequency

(2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB μ V/m	Radiated μ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

(3) Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

(4) Bandwidth Requirement

For direct sequence system, according to 15.247(a)(2), the minimum 6dB bandwidth shall be at least 500 kHz.

(5) Output Power Requirement

For direct sequence system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(6) 100 kHz Bandwidth of Frequency Band Edges Requirement

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a), whichever results in the lesser attenuation.

(7) Power Density Requirement

According to 15.247(d), for direct sequence systems, the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.15
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3360-4400	Above 38.6
13.36-13.41			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio / TV technician for help.

3. SYSTEM TEST CONFIGURATION

3.1 Justification

For both radiated and conducted emissions, the system was configured for testing in a typical fashion as a customer would normally use it. The peripherals other than EUT were connected in normally standing by situation. Measurement was performed under the condition that a computer program was exercised to simulate data communication of EUT, and the transmission rate was set to maximum allowed by EUT. Three highest emissions were verified with varying placement of the cables connected to EUT to maximize the emission from EUT.

For conducted and radiated spurious emissions, whichever RF channel is operated, the digital circuits function identically. As the reason, measurement of radiated emissions from digital circuits is only performed with channel 1 by transmitting mode.

3.2 Devices for Tested System

Device	Manufacture	Model / FCC ID.	Description
NCSP35 Display Commander *	Sysgration Ltd.(Nan-Kang Factory)	NCSP35DC / HQXNCSP35DC	----
NCSP35 Body Control Module	Sysgration Ltd.(Nan-Kang Factory)	NCSP35CM	----
Battery	YUASA	YTX9-BS	----

Remark “*” means equipment under test.

4 RADIATED EMISSION MEASUREMENT

4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with §15.109(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with §15.247 (c)

4.2 Measurement Procedure

A. Preliminary Measurement For Portable Devices

For portable devices, the following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

B. Final Measurement

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.

5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables (if any) associated with EUT to obtain the worst case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


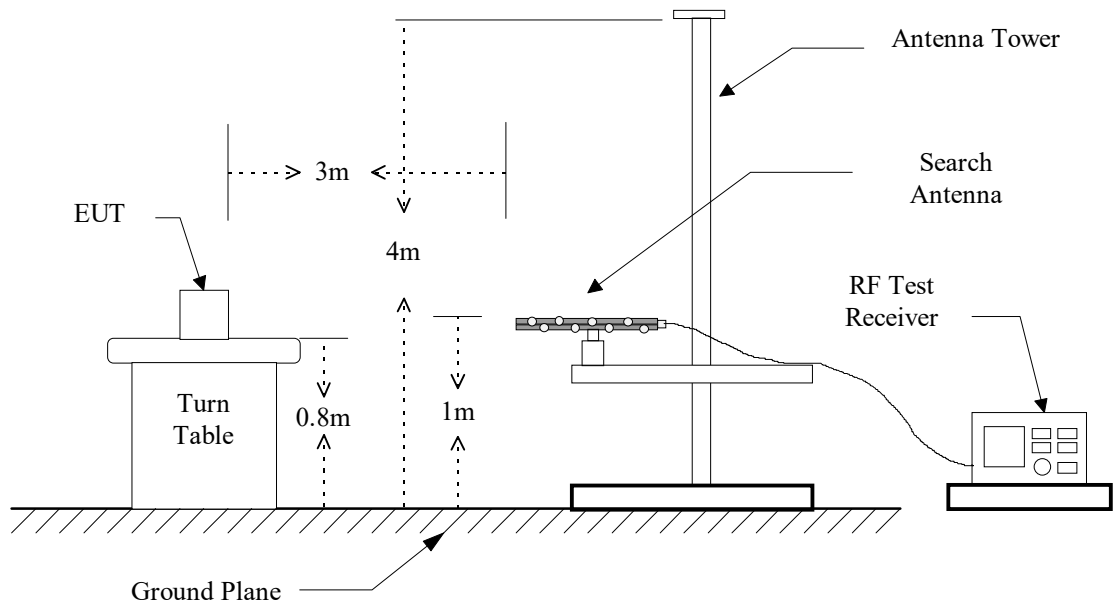


Figure 2 : Frequencies measured above 1 GHz configuration

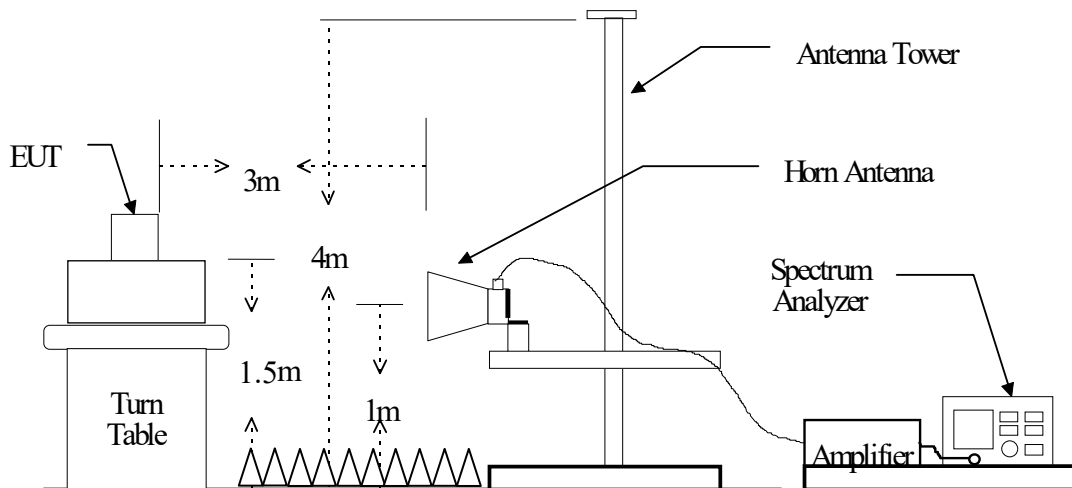

4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement:

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESU 40	2017/11/15	2018/11/14
Bi-Log Antenna	ETC	MCTD 2786	2017/07/12	2018/07/11
Horn Antenna	EMCO	3115	2017/04/13	2018/04/12
Horn Antenna	EMCO	3116	2017/11/15	2018/11/14
Amplifier	HP	8447D	2017/10/05	2018/10/04
Amplifier	HP	83051A	2017/08/25	2018/08/24
LOOP Antenna	EMCO	6512	2017/10/13	2018/10/12

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz or $\geq 1/T$ (Note 1)

Note 1:


VBW = 10 Hz, when the duty cycle is no less than 98%.

VBW $\geq 1/T$, when duty cycle is less than 98% where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

4.4 Radiated Emission Data

4.4.1 RF Portion

A. (802.11b)

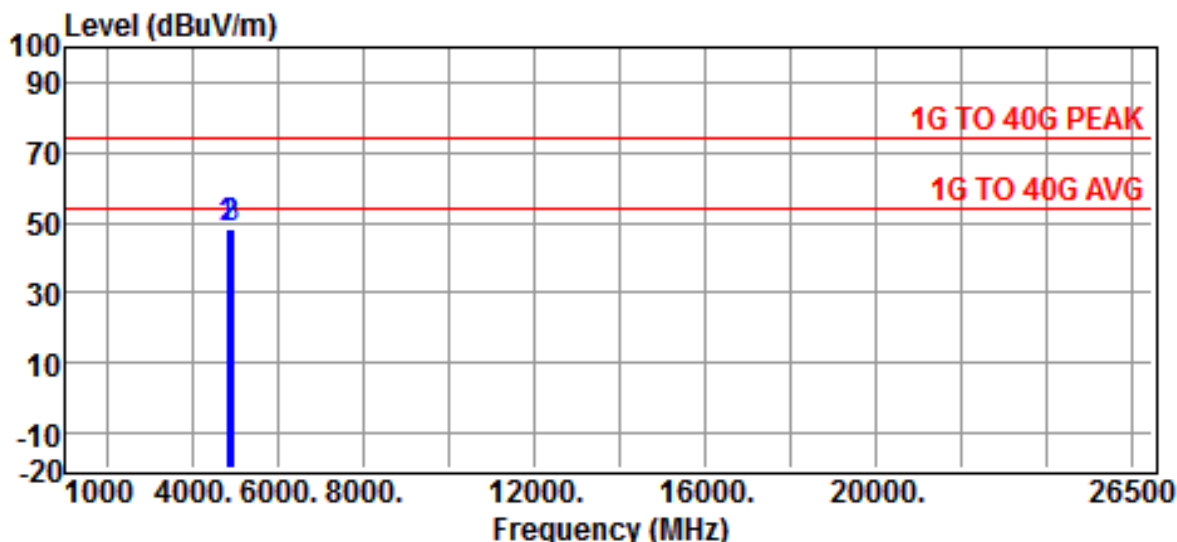


Site	:Chamber #2	Date	:2017-11-17
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:Battery 12V	Temp.	:24 °C
Engineer	:Brian Huang	Humi.	:53 %
Test Mode	:802.11B MODE		
Test Mode	:EUT stands vertically on table (worst case)		

Freq MHz	Reading dBµV	Correcion Factor dB	Result dBµV/m	Limits (AVG) dBµV/m	Over limit dB	Detector
4824.0000	46.71	1.24	47.95	54.00	-6.05	Peak
4874.0000	46.95	1.40	48.35	54.00	-5.65	Peak
4924.0000	46.91	1.58	48.49	54.00	-5.51	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

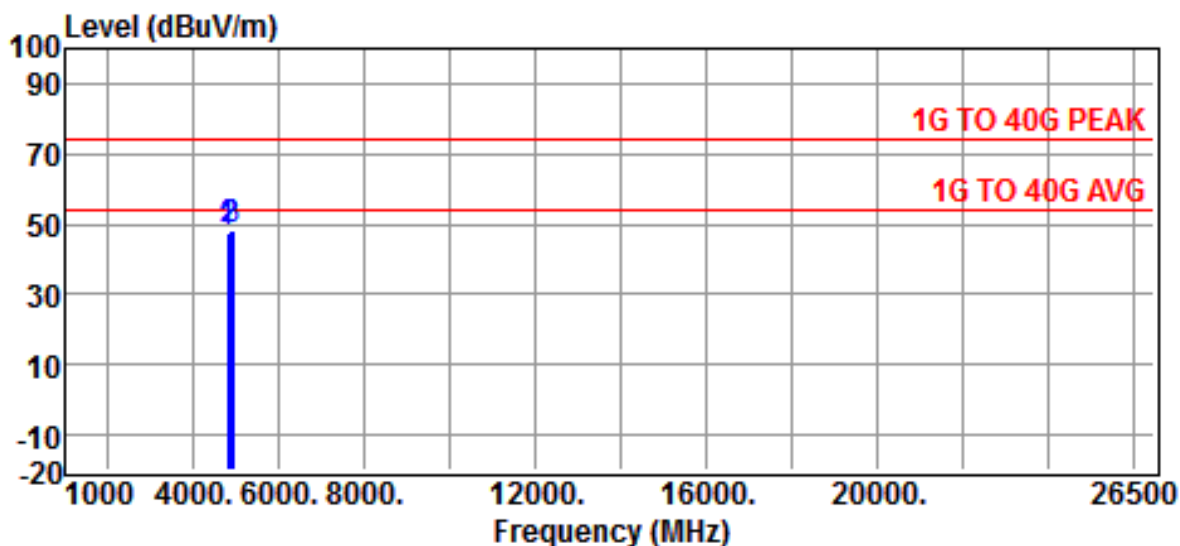


Site	:Chamber #2	Date	:2017-11-17
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:Battery 12V	Temp.	:24 °C
Engineer	:Brian Huang	Humi.	:53 %
Test Mode	:802.11B MODE		
Test Mode	:EUT stands vertically on table (worst case)		

Freq MHz	Reading dBµV	Correction Factor dB	Result dBµV/m	Limits (AVG) dBµV/m	Over limit dB	Detector
4824.0000	46.52	1.24	47.76	54.00	-6.24	Peak
4874.0000	46.74	1.40	48.14	54.00	-5.86	Peak
4924.0000	46.77	1.58	48.35	54.00	-5.65	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

B. (802.11g)

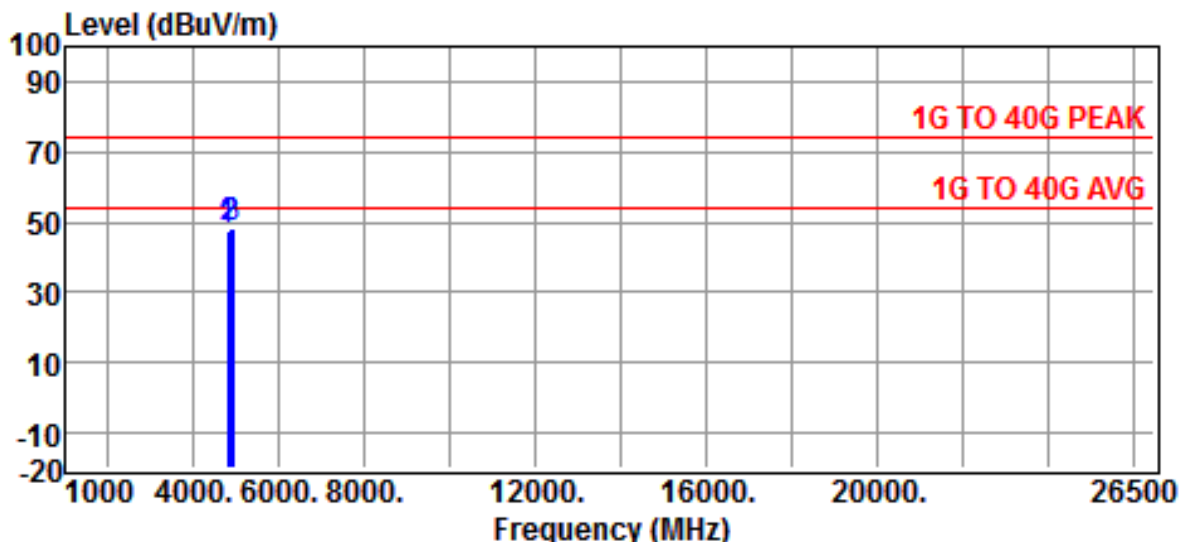


Site	:Chamber #2	Date	:2017-11-17
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:Battery 12V	Temp.	:24 °C
Engineer	:Brian Huang	Humi.	:53 %
Test Mode	:802.11G MODE		
Test Mode	:EUT stands vertically on table (worst case)		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
4824.0000	46.59	1.24	47.83	54.00	-6.17	Peak
4874.0000	46.52	1.40	47.92	54.00	-6.08	Peak
4924.0000	46.73	1.58	48.31	54.00	-5.69	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

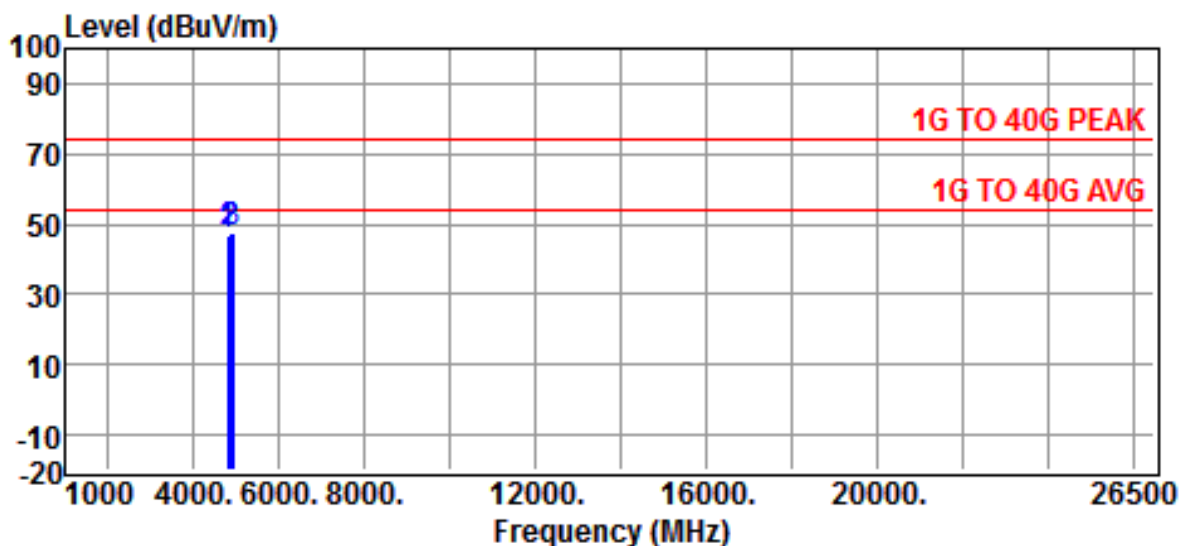


Site	:Chamber #2	Date	:2017-11-17
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:Battery 12V	Temp.	:24 °C
Engineer	:Brian Huang	Humi.	:53 %
Test Mode	:802.11G MODE		
Test Mode	:EUT stands vertically on table (worst case)		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
4824.0000	45.61	1.24	46.85	54.00	-7.15	Peak
4874.0000	46.02	1.40	47.42	54.00	-6.58	Peak
4924.0000	46.11	1.58	47.69	54.00	-6.31	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

C. (802.11n HT-20)

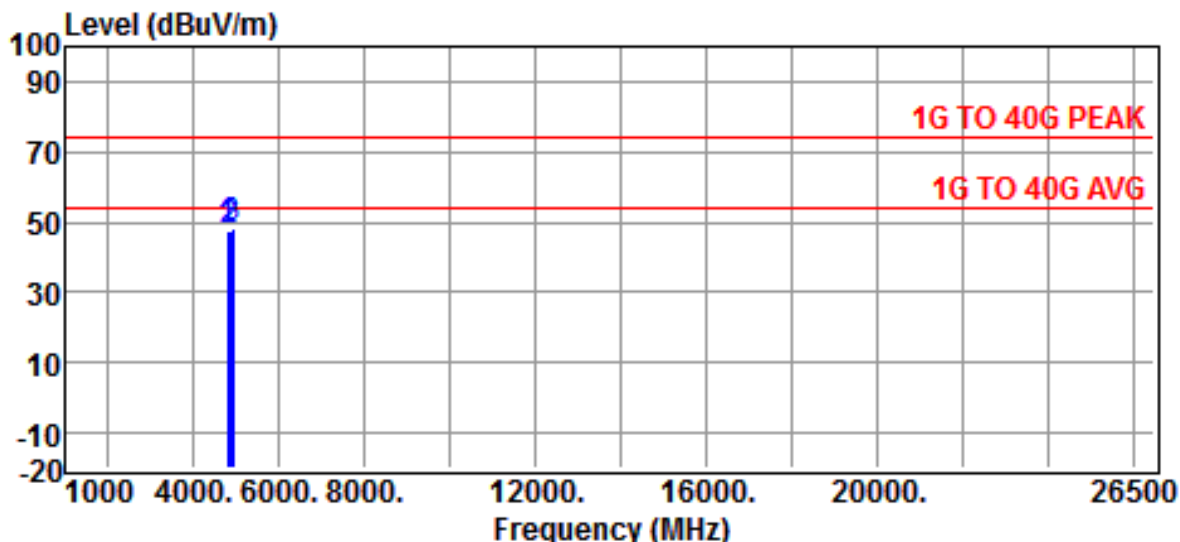


Site	:Chamber #2	Date	:2017-11-17
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:Battery 12V	Temp.	:24 °C
Engineer	:Brian Huang	Humi.	:53 %
Test Mode	:11N20		
Test Mode	:EUT stands vertically on table (worst case)		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
4824.0000	46.31	1.24	47.55	54.00	-6.45	Peak
4874.0000	46.02	1.40	47.42	54.00	-6.58	Peak
4924.0000	46.85	1.58	48.43	54.00	-5.57	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

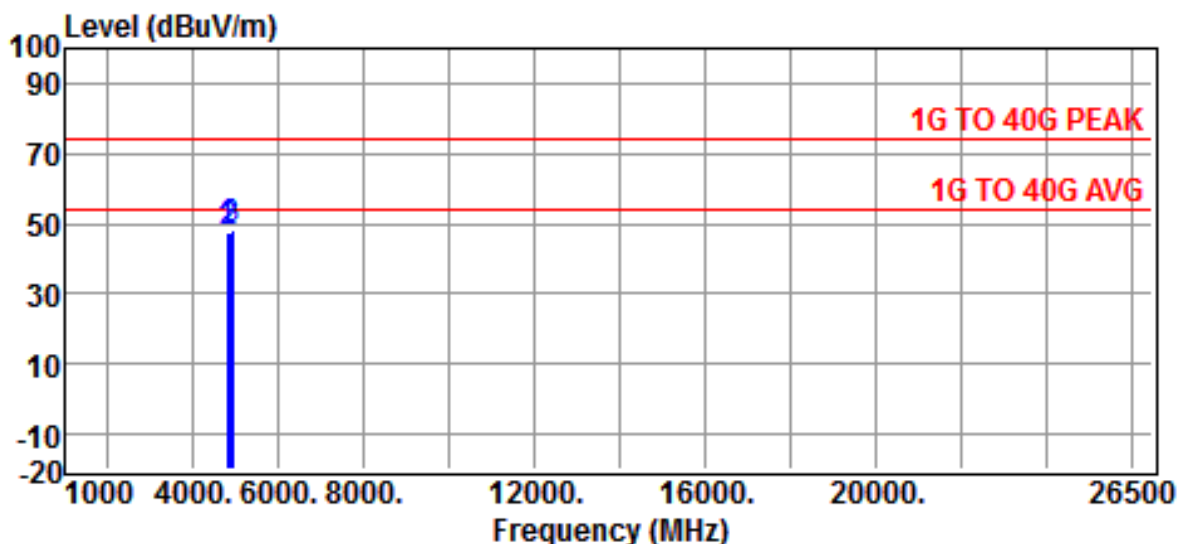

Site	:Chamber #2	Date	:2017-11-17
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:Battery 12V	Temp.	:24 °C
Engineer	:Brian Huang	Humi.	:53 %
Test Mode	:11N20		
Test Mode	:EUT stands vertically on table (worst case)		


Freq MHz	Reading dBµV	Correction Factor dB	Result dBµV/m	Limits (AVG) dBµV/m	Over limit dB	Detector
4824.0000	46.06	1.24	47.30	54.00	-6.70	Peak
4874.0000	45.85	1.40	47.25	54.00	-6.75	Peak
4924.0000	46.85	1.58	48.43	54.00	-5.57	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

4.4.2 Radiated Emission of Restricted bands

Mode: 802.11b

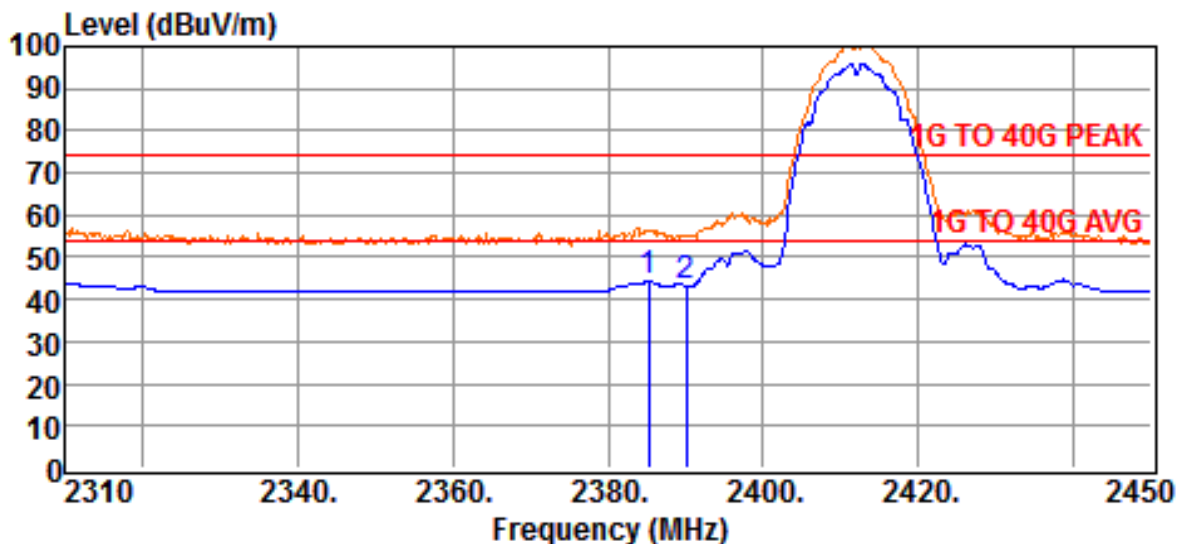


Site	:Chamber #2	Date	:2018-01-15
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:DC 12V	Temp.	:20° C
Engineer	:Brian Huang	Humi.	:56 %
Test Mode	:802.11b / Channel low		
Test Mode	:EUT stands vertically on table (worst case)		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
2385.3200	50.04	-5.51	44.53	54.00	-9.47	AVG
2390.0800	48.63	-5.48	43.15	54.00	-10.85	AVG

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

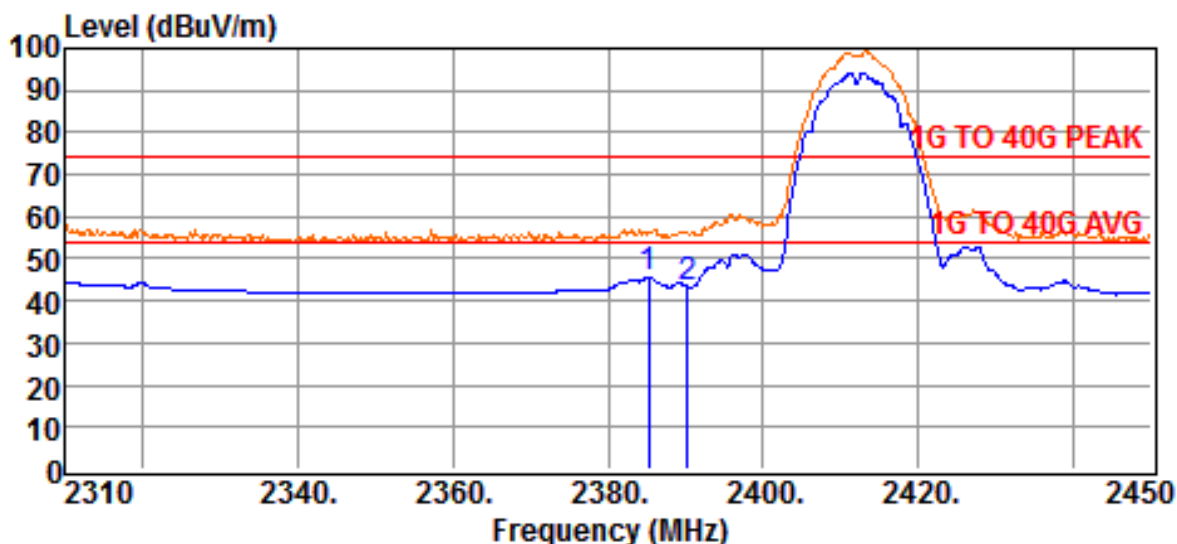


Site	:Chamber #2	Date	:2018-01-15
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:DC 12V	Temp.	:20°C
Engineer	:Brian Huang	Humi.	:56%
Test Mode	:802.11b / Channel low		
Test Mode	:EUT stands vertically on table (worst case)		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
2385.3200	51.31	-5.51	45.80	54.00	-8.20	AVG
2390.2200	48.80	-5.48	43.32	54.00	-10.68	AVG

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

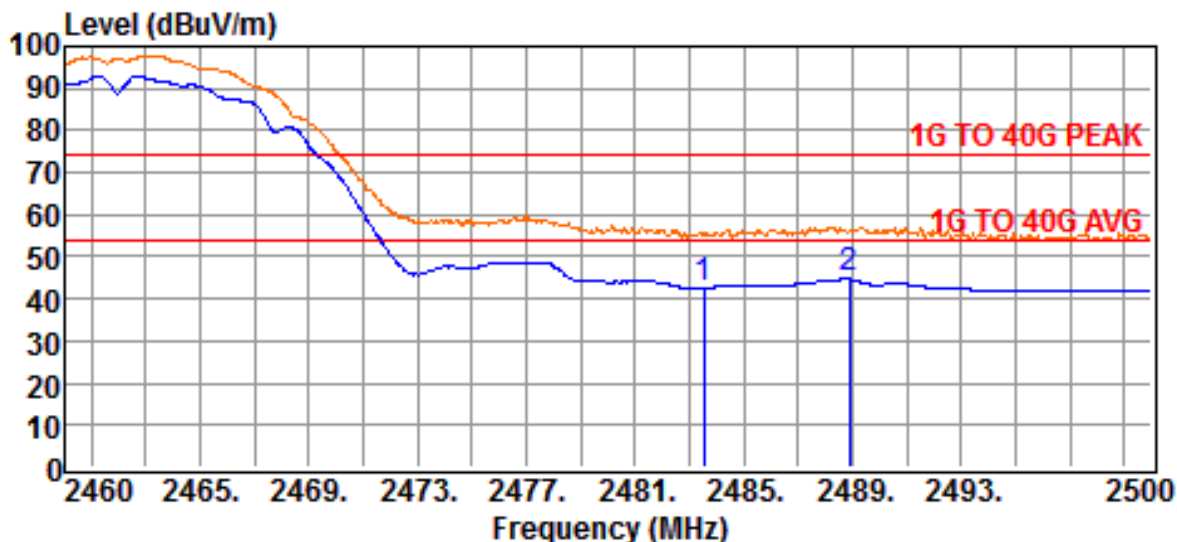


Site	:Chamber #2	Date	:2018-01-15
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:DC 12V	Temp.	:20°C
Engineer	:Brian Huang	Humi.	:56%
Test Mode	:802.11b / Channel high		
Test Mode	:EUT stands vertically on table (worst case)		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
2483.5200	47.70	-5.27	42.43	54.00	-11.57	AVG
2488.8800	49.97	-5.24	44.73	54.00	-9.27	AVG

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

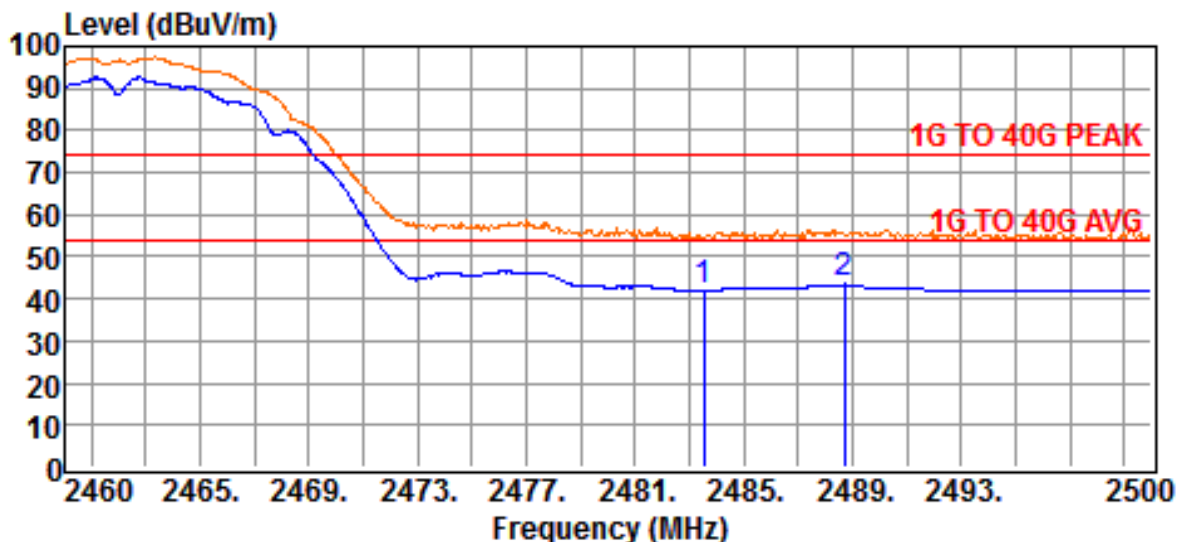


Site	:Chamber #2	Date	:2018-01-15
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:DC 12V	Temp.	:20°C
Engineer	:Brian Huang	Humi.	:56%
Test Mode	:802.11b / Channel high		
Test Mode	:EUT stands vertically on table (worst case)		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
2483.5200	47.15	-5.27	41.88	54.00	-12.12	AVG
2488.7200	48.68	-5.24	43.44	54.00	-10.56	AVG

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

Mode: 802.11g

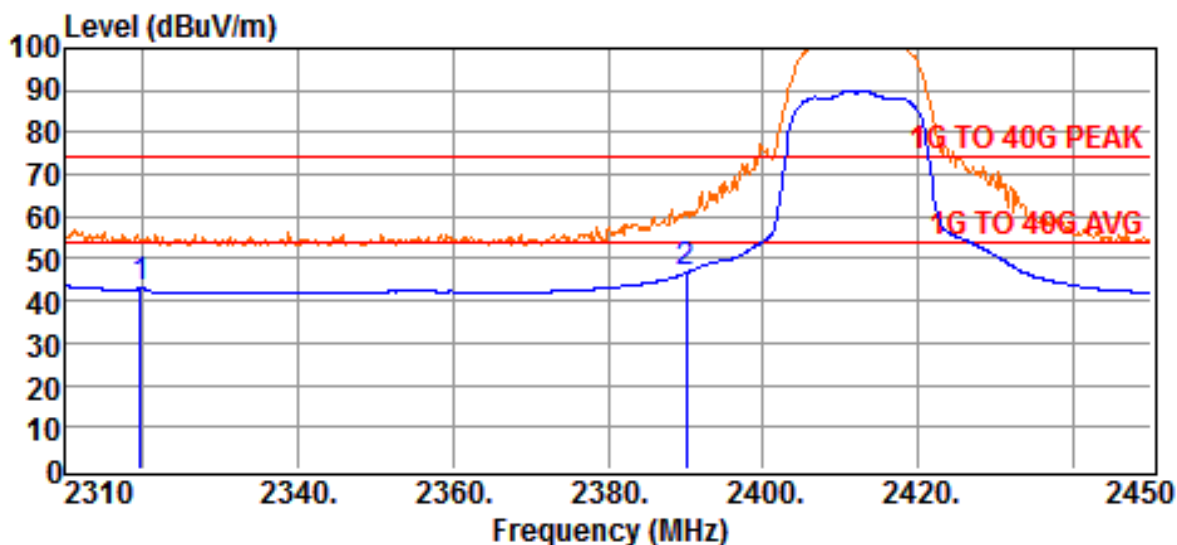


Site	:Chamber #2	Date	:2018-01-15
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:DC 12V	Temp.	:20°C
Engineer	:Brian Huang	Humi.	:56 %
Test Mode	:802.11g / Channel low		
Test Mode	:EUT stands vertically on table (worst case)		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
2319.8000	48.76	-5.65	43.11	54.00	-10.89	AVG
2390.0800	52.17	-5.48	46.69	54.00	-7.31	AVG

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

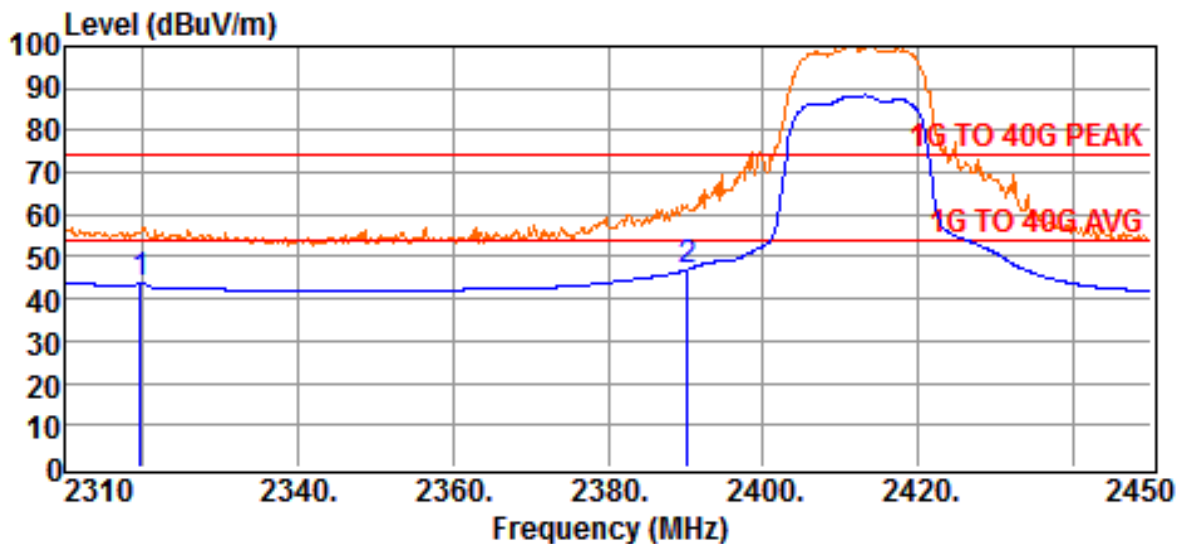


Site	:Chamber #2	Date	:2018-01-15
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:DC 12V	Temp.	:20°C
Engineer	:Brian Huang	Humi.	:56%
Test Mode	:802.11g / Channel low		
Test Mode	:EUT stands vertically on table (worst case)		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
2319.8000	49.54	-5.65	43.89	54.00	-10.11	AVG
2390.2200	52.47	-5.48	46.99	54.00	-7.01	AVG

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

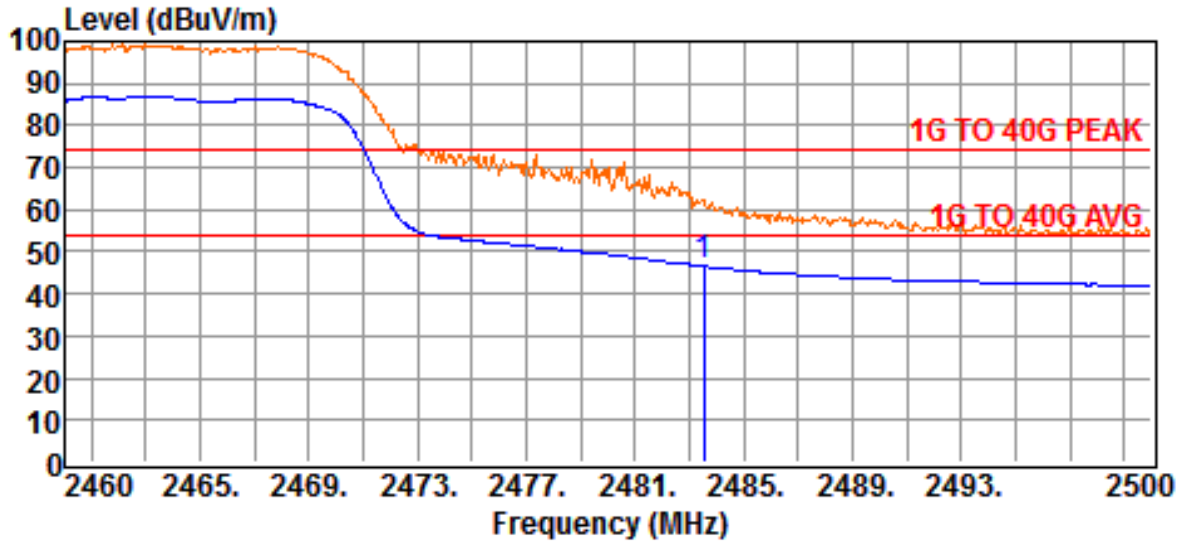


Site	:Chamber #2	Date	:2018-01-15
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:DC 12V	Temp.	:20°C
Engineer	:Brian Huang	Humi.	:56%
Test Mode	:802.11g / Channel high		
Test Mode	:EUT stands vertically on table (worst case)		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
2483.5200	51.78	-5.27	46.51	54.00	-7.49	AVG

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

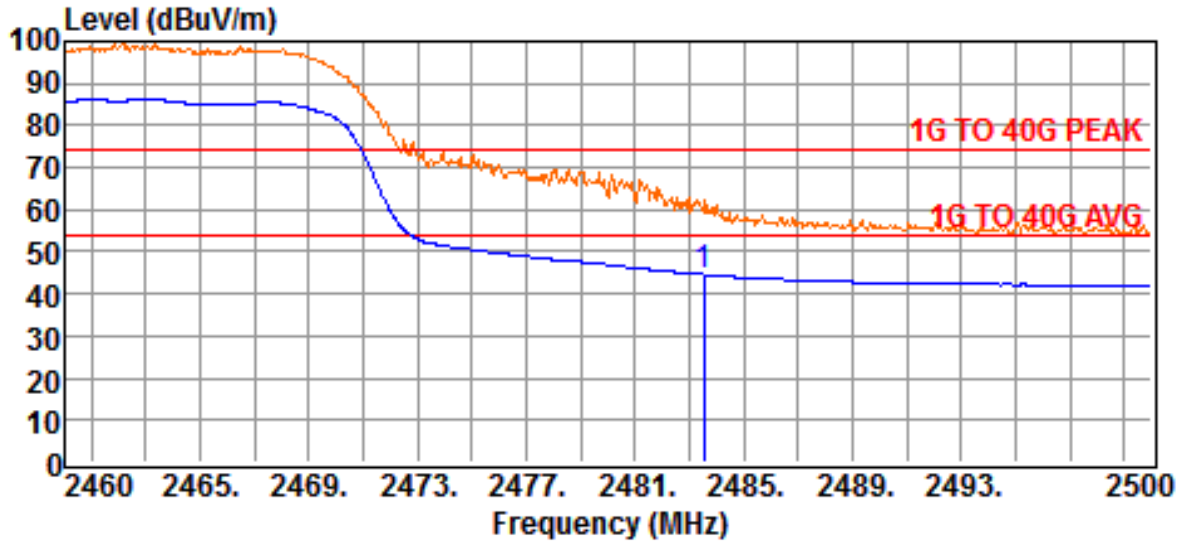


Site	:Chamber #2	Date	:2018-01-15
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:DC 12V	Temp.	:20°C
Engineer	:Brian Huang	Humi.	:56%
Test Mode	:802.11g / Channel high		
Test Mode	:EUT stands vertically on table (worst case)		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
2483.5200	49.86	-5.27	44.59	54.00	-9.41	AVG

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

Mode: 802.11n HT-20

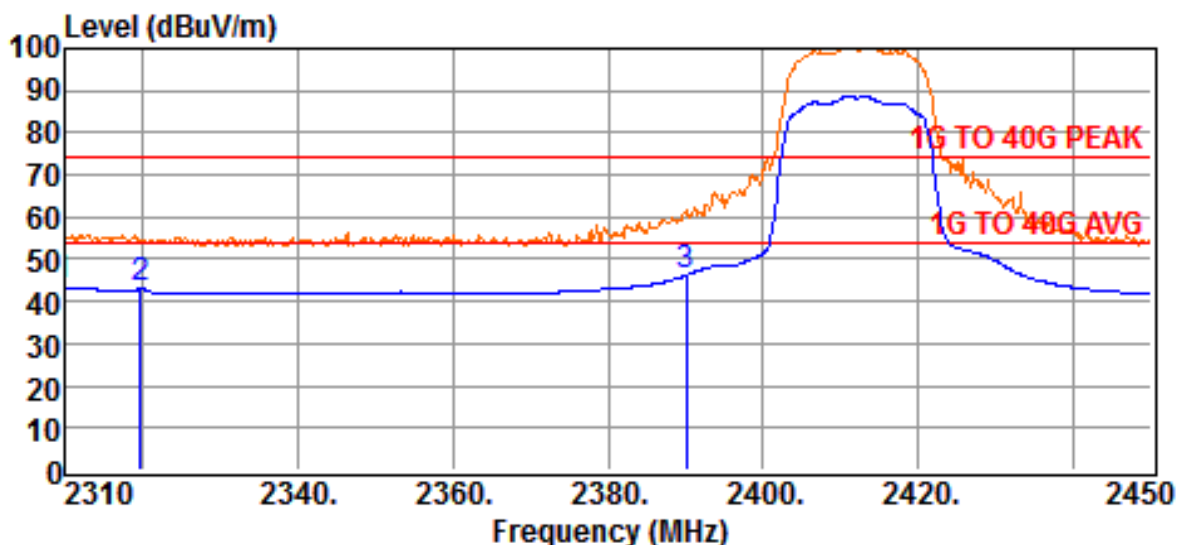


Site	:Chamber #2	Date	:2018-01-15
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:DC 12V	Temp.	:20° C
Engineer	:Brian Huang	Humi.	:56 %
Test Mode	:802.11n HT-20 / Channel low		
Test Mode	:EUT stands vertically on table (worst case)		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
2310.0000	49.12	-5.67	43.45	54.00	-10.55	AVG
2319.8000	48.70	-5.65	43.05	54.00	-10.95	AVG
2390.0800	51.79	-5.48	46.31	54.00	-7.69	AVG

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

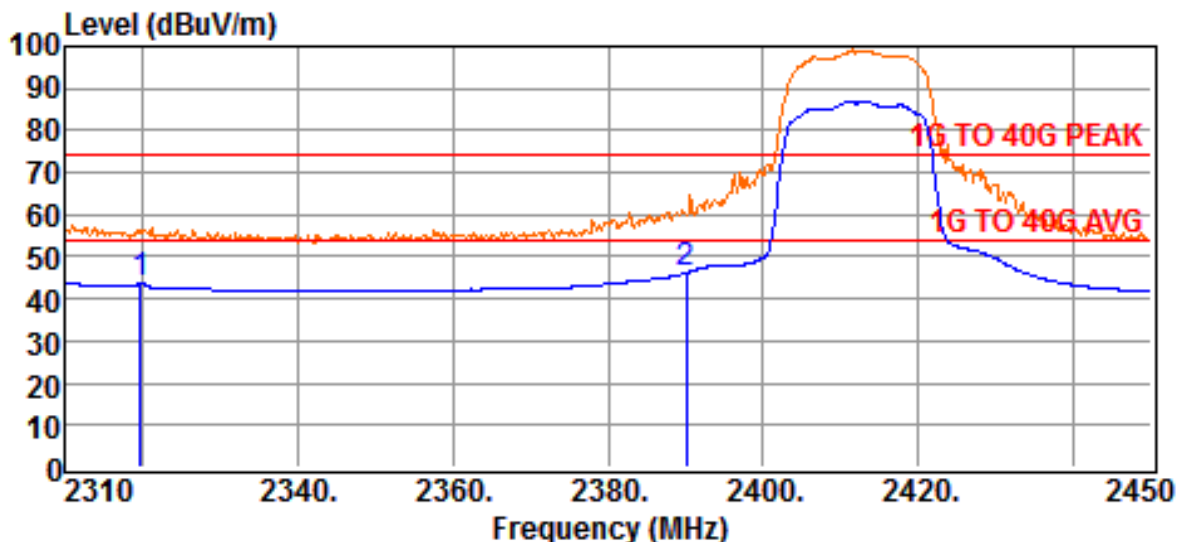


Site	:Chamber #2	Date	:2018-01-15
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:DC 12V	Temp.	:20°C
Engineer	:Brian Huang	Humi.	:56%
Test Mode	:802.11n HT-20 / Channel low		
Test Mode	:EUT stands vertically on table (worst case)		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
2319.8000	49.39	-5.65	43.74	54.00	-10.26	AVG
2390.0800	51.71	-5.48	46.23	54.00	-7.77	AVG

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

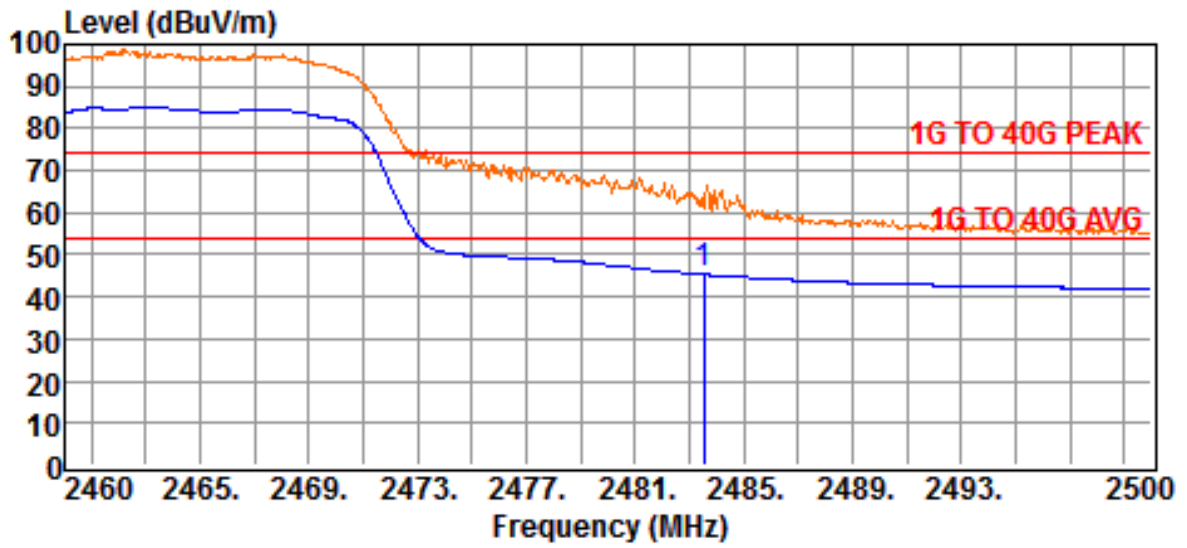


Site	:Chamber #2	Date	:2018-01-15
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:DC 12V	Temp.	:20°C
Engineer	:Brian Huang	Humi.	:56 %
Test Mode	:802.11n HT-20 / Channel high		
Test Mode	:EUT stands vertically on table (worst case)		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
2483.5200	50.60	-5.27	45.33	54.00	-8.67	AVG

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

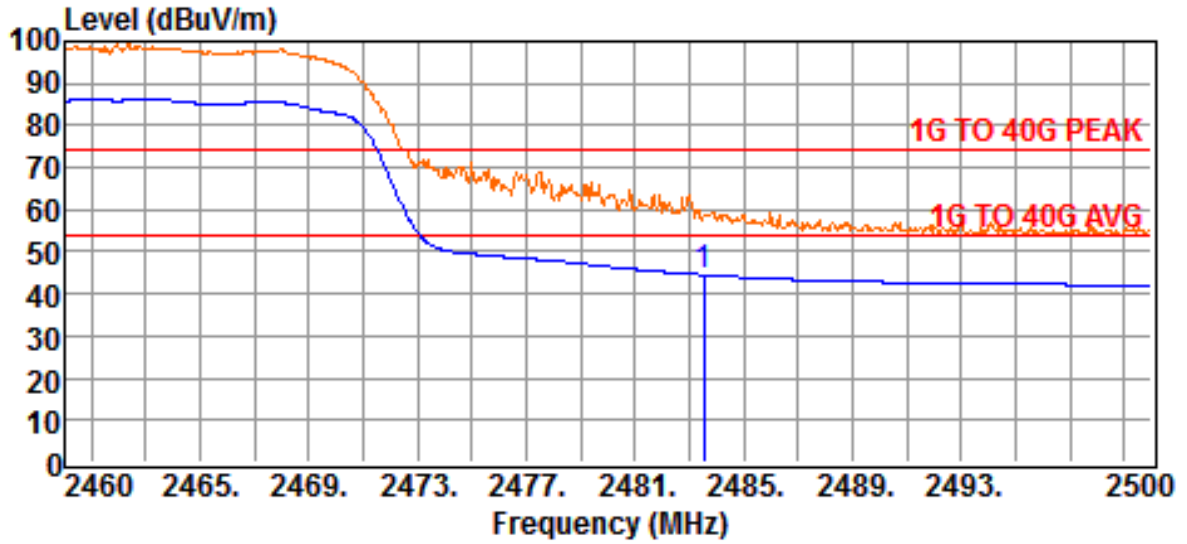

Site	:Chamber #2	Date	:2018-01-15
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:DC 12V	Temp.	:20°C
Engineer	:Brian Huang	Humi.	:56%
Test Mode	:802.11n HT-20 / Channel high		
Test Mode	:EUT stands vertically on table (worst case)		


Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
2483.5200	49.83	-5.27	44.56	54.00	-9.44	AVG

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

4.4.3 Other Emission

a) Emission frequencies below 1 GHz

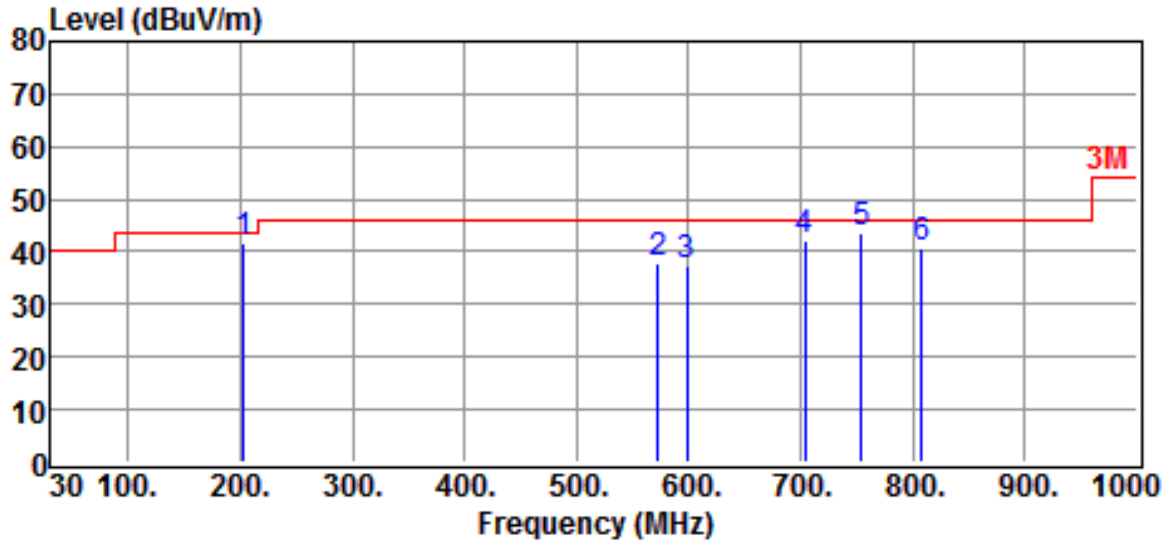


Site	:CHAMBER #2	Date	:2017-11-17
Limit	:3M	Ant. Pol.	:HORIZONTAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:DC 12V	Temp.	:24 °C
Engineer	:Brian Huang	Humi.	:53 %
Test Mode	:OPERATION MODE		
Test Mode	:EUT stands vertically on table (worst case)		

Freq MHz	Reading dBµV	Correction Factor dB	Result dBµV/m	Limits dBµV/m	Over limit dB	Detector
202.6600	49.43	-7.94	41.49	43.50	-2.01	QP
573.2000	36.45	1.19	37.64	46.00	-8.36	QP
598.4200	35.81	1.59	37.40	46.00	-8.60	QP
703.1800	38.37	3.59	41.96	46.00	-4.04	QP
753.6200	39.65	4.07	43.72	46.00	-2.28	QP
807.9400	35.33	5.34	40.67	46.00	-5.33	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit - Result

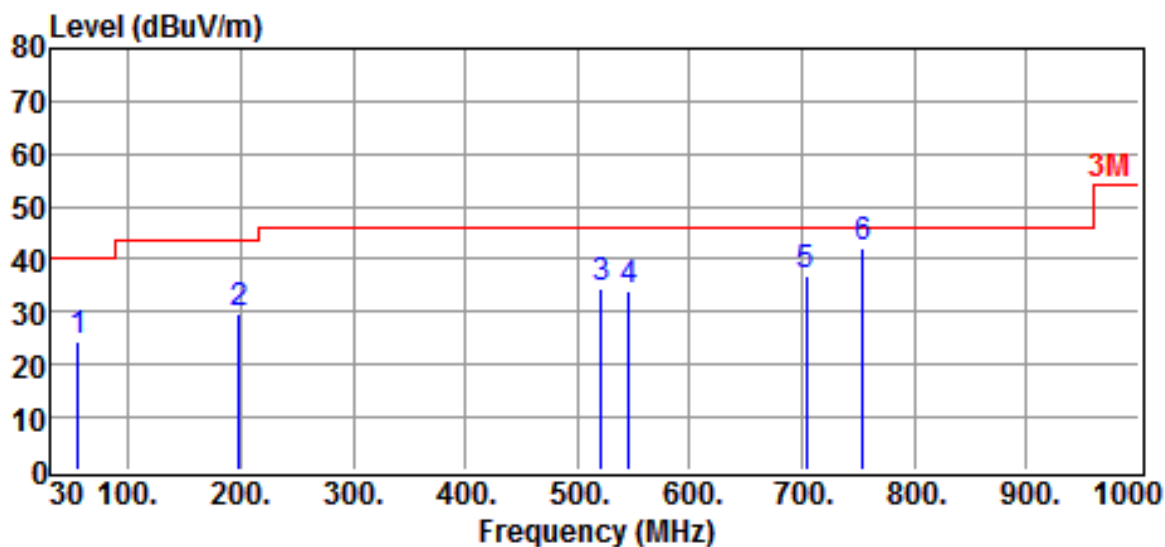


Site	:CHAMBER #2	Date	:2017-11-17
Limit	:3M	Ant. Pol.	:VERTICAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:DC 12V	Temp.	:24 °C
Engineer	:Brian Huang	Humi.	:53 %
Test Mode	:OPERATION MODE		
Test Mode	:EUT stands vertically on table (worst case)		

Freq MHz	Reading dBµV	Correction Factor dB	Result dBµV/m	Limits dBµV/m	Over limit dB	Detector
55.2200	37.56	-13.07	24.49	40.00	-15.51	QP
198.7800	38.07	-8.55	29.52	43.50	-13.98	QP
520.8200	33.84	0.47	34.31	46.00	-11.69	QP
546.0400	33.30	0.77	34.07	46.00	-11.93	QP
703.1800	33.29	3.59	36.88	46.00	-9.12	QP
753.6200	38.01	4.07	42.08	46.00	-3.92	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit - Result

b) Emission frequencies Above 1GHz

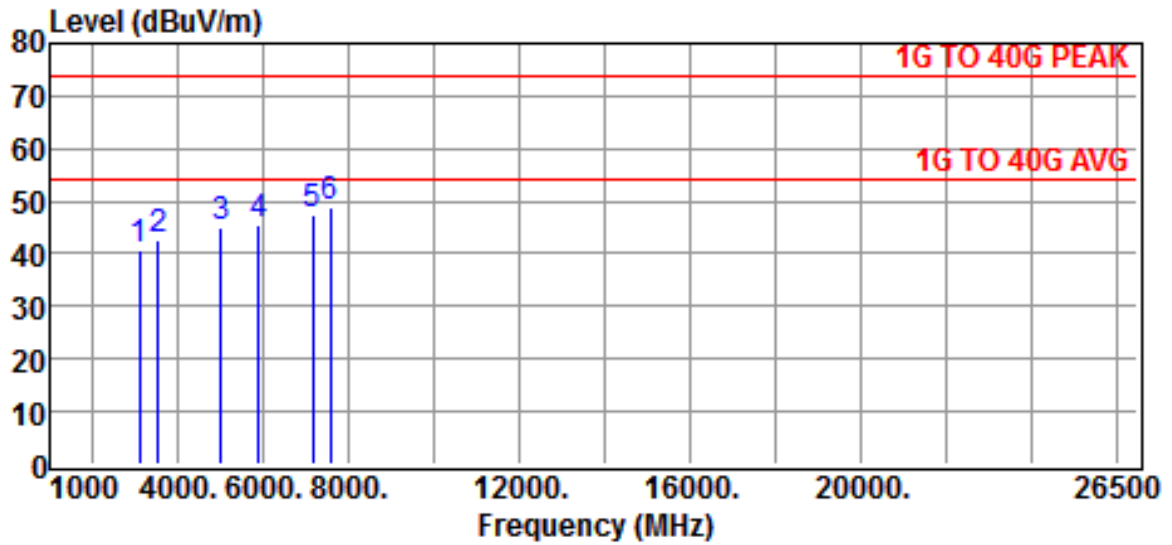


Site	:CHAMBER #2	Date	:2017-11-17
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:DC 12V	Temp.	:24 °C
Engineer	:Brian Huang	Humi.	:53 %
Test Mode	:OPERATION MODE		
Test Mode	:EUT stands vertically on table (worst case)		

Freq MHz	Reading dBµV	Correction Factor dB	Result dBµV/m	Limits (AVG) dBµV/m	Over limit dB	Detector
3091.0000	43.78	-3.21	40.57	54.00	-13.43	Peak
3550.0000	44.50	-1.65	42.85	54.00	-11.15	Peak
5029.0000	42.95	1.94	44.89	54.00	-9.11	Peak
5896.0000	42.27	3.38	45.65	54.00	-8.35	Peak
7171.0000	42.03	5.47	47.50	54.00	-6.50	Peak
7579.0000	42.19	6.49	48.68	54.00	-5.32	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

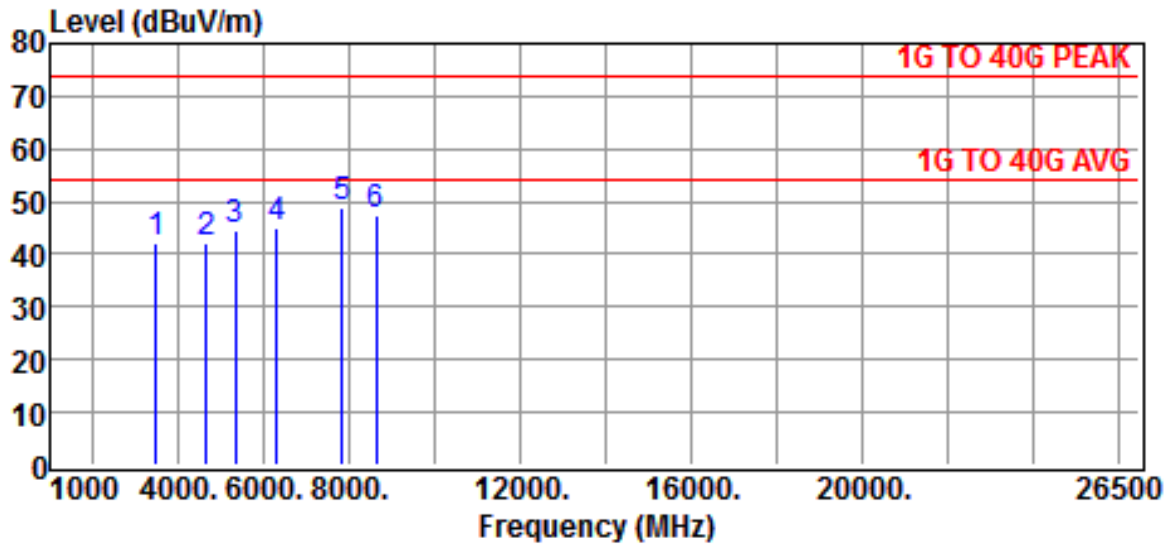

Site	:CHAMBER #2	Date	:2017-11-17
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:NCSP35 Display Commander	Model	:NCSP35DC
Power Rating	:DC 12V	Temp.	:24 °C
Engineer	:Brian Huang	Humi.	:53 %
Test Mode	:OPERATION MODE		
Test Mode	:EUT stands vertically on table (worst case)		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
3499.0000	43.84	-1.82	42.02	54.00	-11.98	Peak
4672.0000	41.37	0.81	42.18	54.00	-11.82	Peak
5335.0000	42.03	2.56	44.59	54.00	-9.41	Peak
6304.0000	41.13	3.72	44.85	54.00	-9.15	Peak
7834.0000	42.31	6.75	49.06	54.00	-4.94	Peak
8650.0000	39.84	7.63	47.47	54.00	-6.53	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

c) Emission frequencies below 30MHz (9kHz - 30MHz)

According to exploratory test no any obvious emissions were detected from 9 kHz to 30MHz. All emissions were greater than 20 dB below the limit. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

where


$$\text{Corrected Factor} = \text{Antenna FACTOR} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

4.6 Photos of Radiation Measuring Setup

(Below 1GHz)



(Above 1GHz)

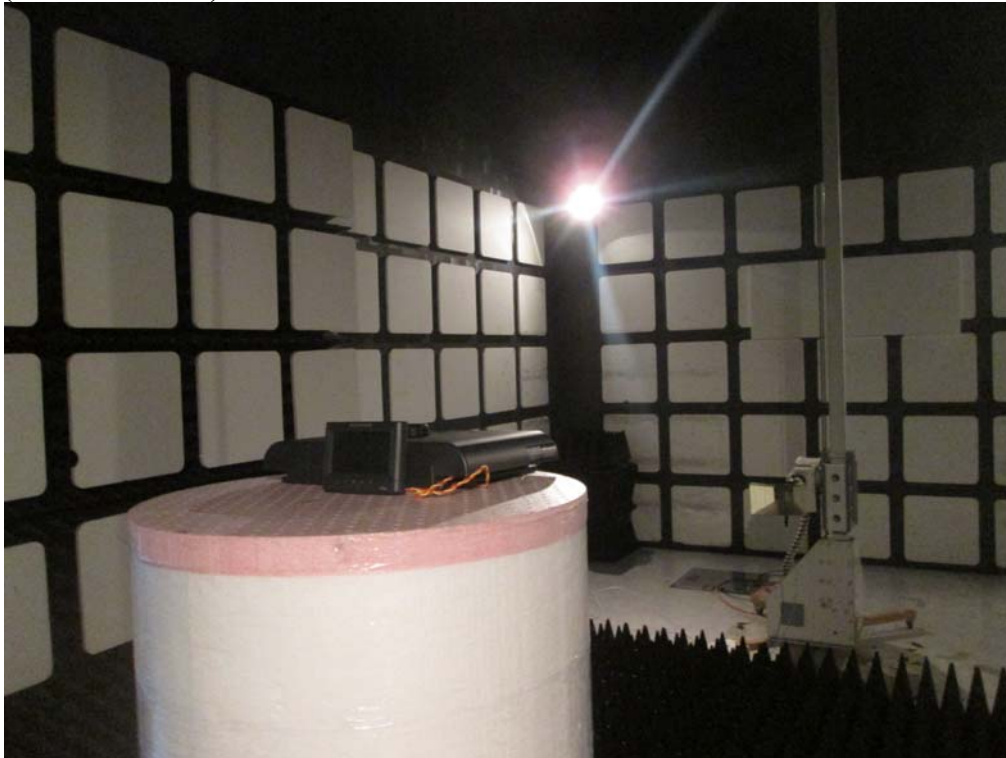

5 CONDUCTED EMISSION MEASUREMENT

5.1 Description

This EUT is excused from investigation of conducted emission, for it is powered by DC battery only. According to §15.207 (d), measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

6 ANTENNA REQUIREMENT

6.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to §15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.2 Antenna Construction and Directional Gain

The antenna is connected to the main PCB and installed inside the housing, no consideration of replacement.

Please refer to the construction Photo for details.

7 EMISSION BANDWIDTH MEASUREMENT


7.1 Standard Applicable

According to 15.247(a)(2), for direct sequence system, the minimum 6dB bandwidth shall be at least 500 kHz.

7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value. The settings of spectrum analyzer is as followings.
 - 1) Set RBW = 100 kHz.
 - 2) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - 3) Detector = Peak.
 - 4) Trace mode = max hold.
 - 5) Sweep = auto couple.
 - 6) Allow the trace to stabilize.
 - 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
3. Repeat above procedures until all frequencies measured were complete.

Figure 4: Emission bandwidth measurement configuration.



7.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2016/10/03	2017/10/02
Attenuator	MINI-CIRCUITS	BW-S10W2+	2016/09/30	2017/09/29

7.4 Measurement Data

Test Date : Sep. 21, 2017 Temperature : 25 °C Humidity : 55 %

A. 802.11b @1 Mbps

- a) Channel Low: 6 dB Emission Bandwidth is 7.92 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 7.68 MHz
- c) Channel High: 6 dB Emission Bandwidth is 7.98 MHz

B. 802.11g @6 Mbps

- a) Channel Low: 6 dB Emission Bandwidth is 16.08 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 15.85 MHz
- c) Channel High: 6 dB Emission Bandwidth is 15.85 MHz

C. 802.11n HT-20 @6.5 Mbps

- a) Channel Low: 6 dB Emission Bandwidth is 17.22 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 17.40 MHz
- c) Channel High: 6 dB Emission Bandwidth is 16.68 MHz

Note : The expanded uncertainty: frequency $\times 1.65 \times 10^{-6}$ ($1 \text{ GHz} < f \leq 18 \text{ GHz}$).

802.11b / Channel Low




*RBW 100 kHz Delta 1 [T1]
VBW 300 kHz 0.09 dB
SWT 5 ms 7.92000000 MHz

Ref 20 dBm

*Att 20 dB

1 PK
VIEW

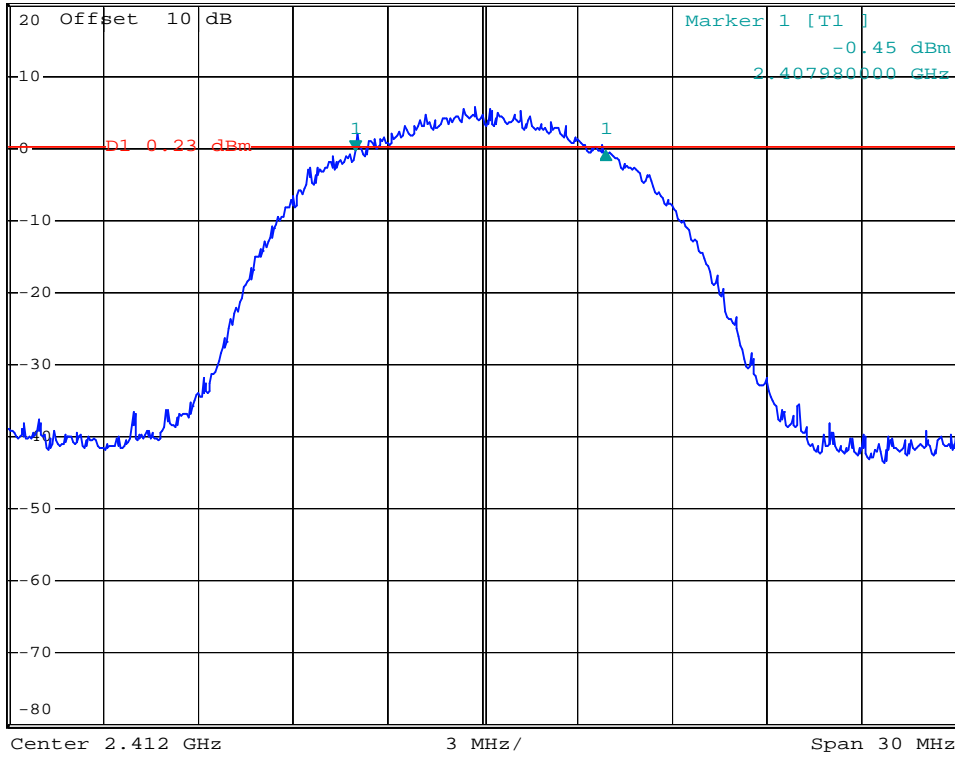


802.11b / Channel Mid



*RBW 100 kHz Delta 1 [T1]
VBW 300 kHz -0.63 dB
SWT 5 ms 7.680000000 MHz

Ref 20 dBm

*Att 20 dB

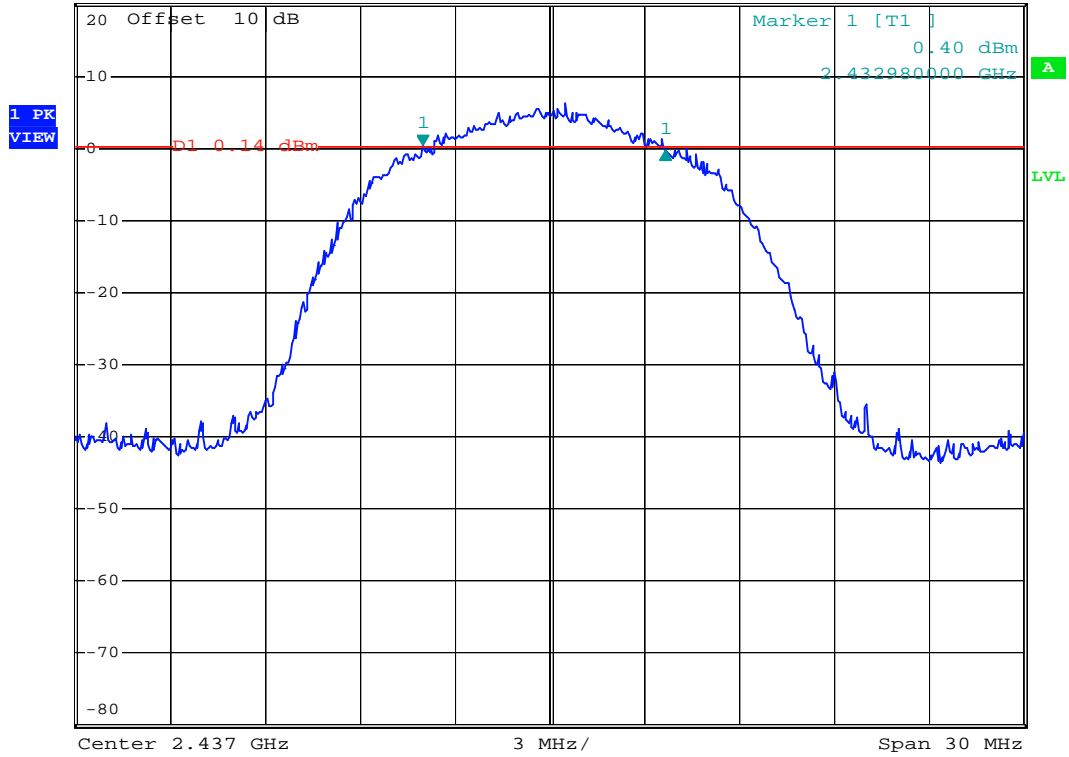


802.11b / Channel High



*RBW 100 kHz Delta 1 [T1]
VBW 300 kHz -0.07 dB
SWT 5 ms 7.980000000 MHz

Ref 20 dBm

*Att 20 dB

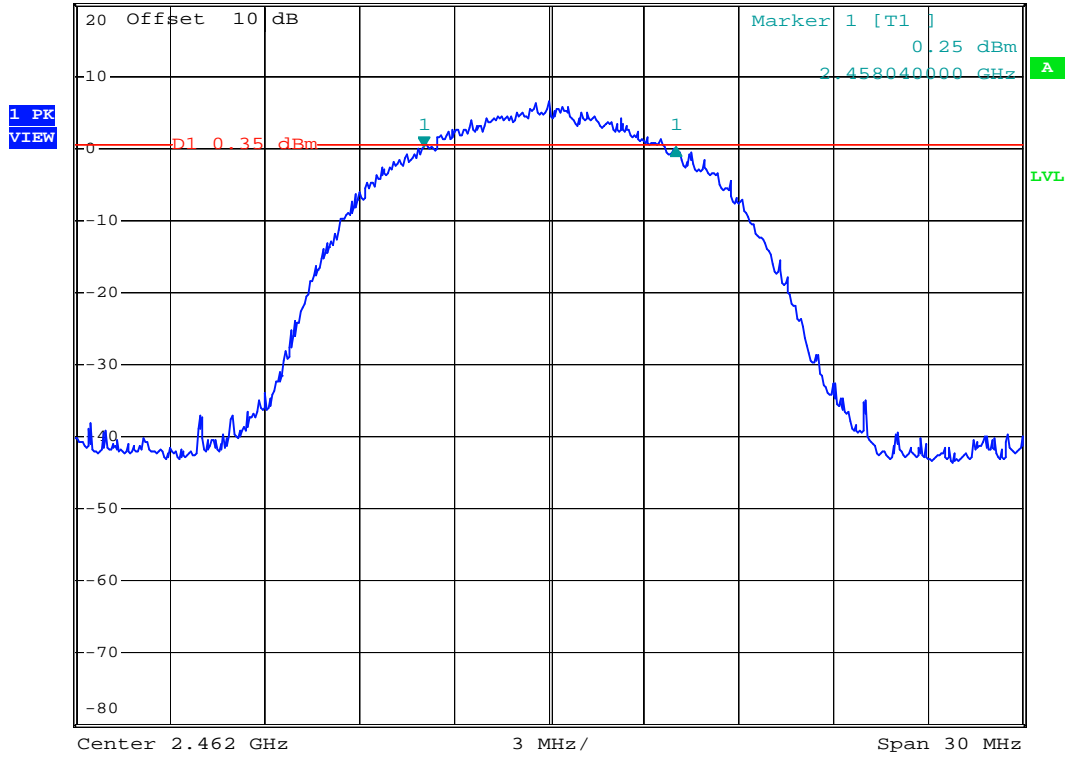


802.11g / Channel Low



*RBW 100 kHz Delta 1 [T1]
VBW 300 kHz 0.16 dB
SWT 5 ms 16.08000000 MHz

Ref 20 dBm

*Att 20 dB

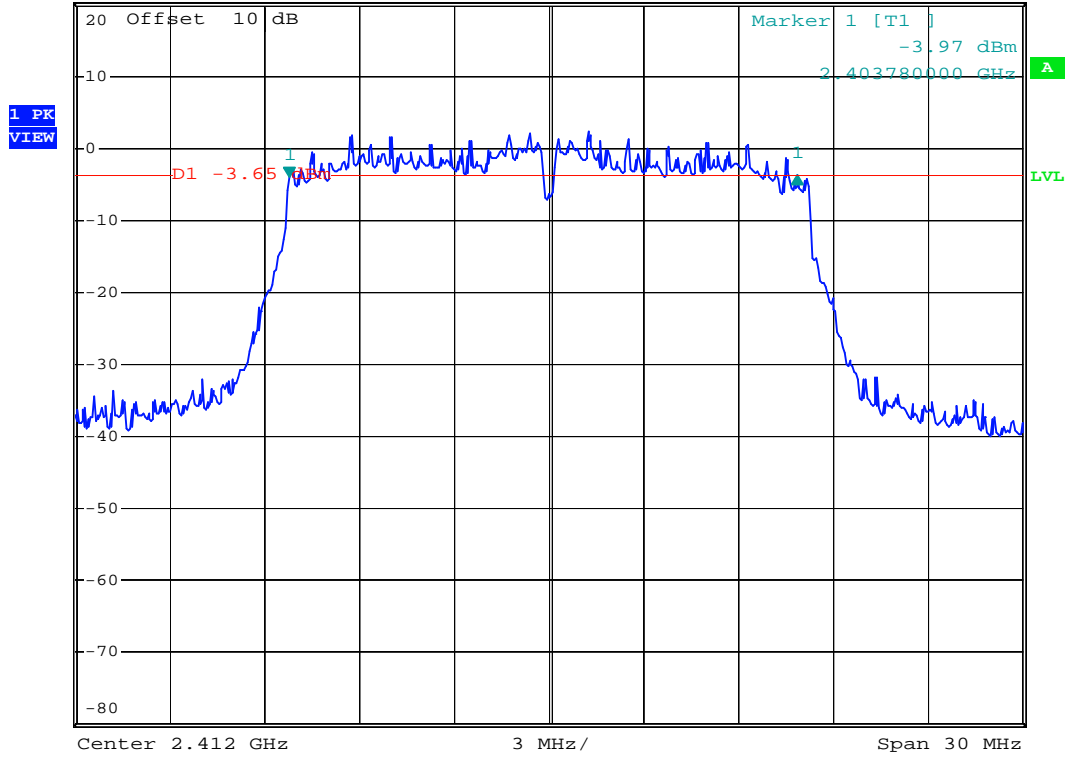


802.11g / Channel Mid



*RBW 100 kHz Delta 1 [T1]
VBW 300 kHz -0.60 dB
SWT 2.5 ms 15.850000000 MHz

Ref 20 dBm

*Att 20 dB

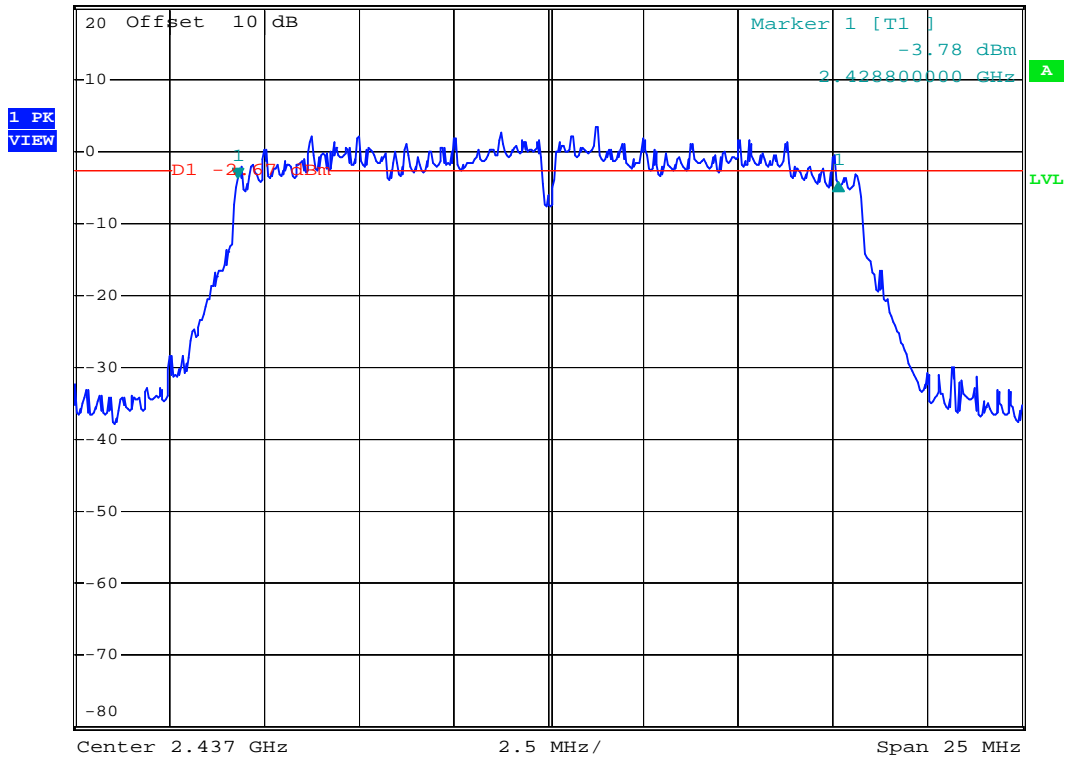


802.11g / Channel High




*RBW 100 kHz Delta 1 [T1]
VBW 300 kHz 3.30 dB
SWT 2.5 ms 15.850000000 MHz

Ref 20 dBm

*Att 20 dB

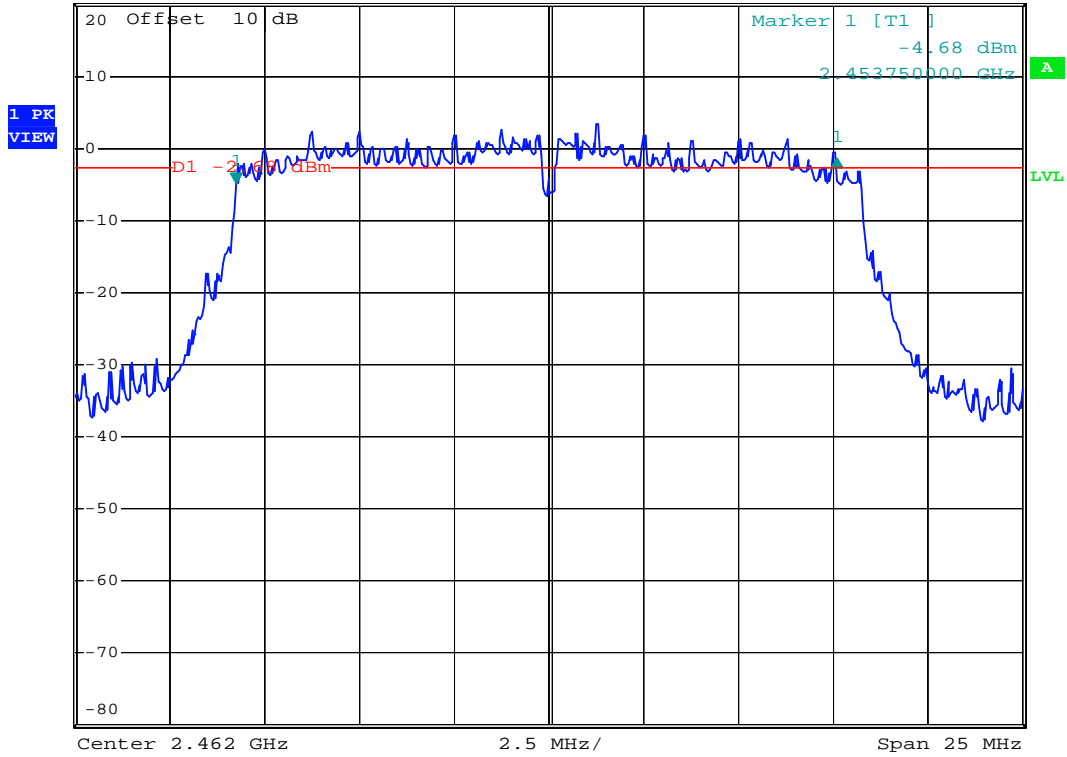

802.11n HT-20/ Channel Low

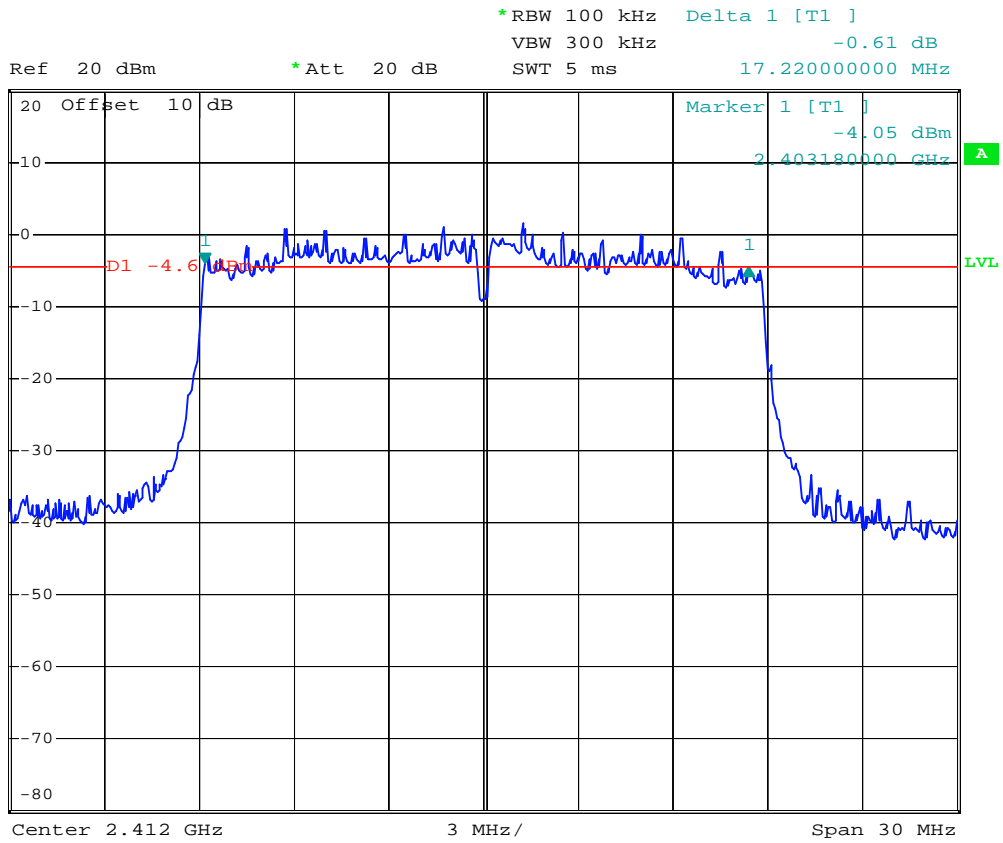

802.11n HT-20/ Channel Mid




*RBW 100 kHz Delta 1 [T1]
VBW 300 kHz -0.09 dB
SWT 5 ms 17.40000000 MHz

Ref 20 dBm

*Att 20 dB

1 PK
VIEW

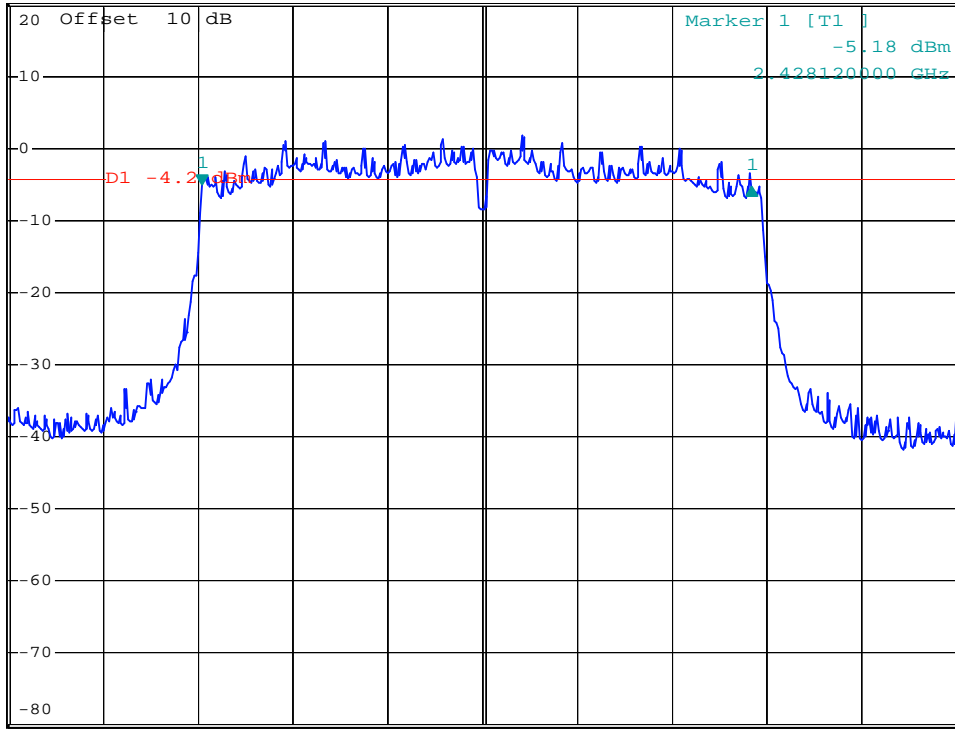

802.11n HT-20/ Channel High




*RBW 100 kHz Delta 1 [T1]
VBW 300 kHz 0.19 dB
SWT 5 ms 16.68000000 MHz

Ref 20 dBm

*Att 20 dB

1 PK
VIEW

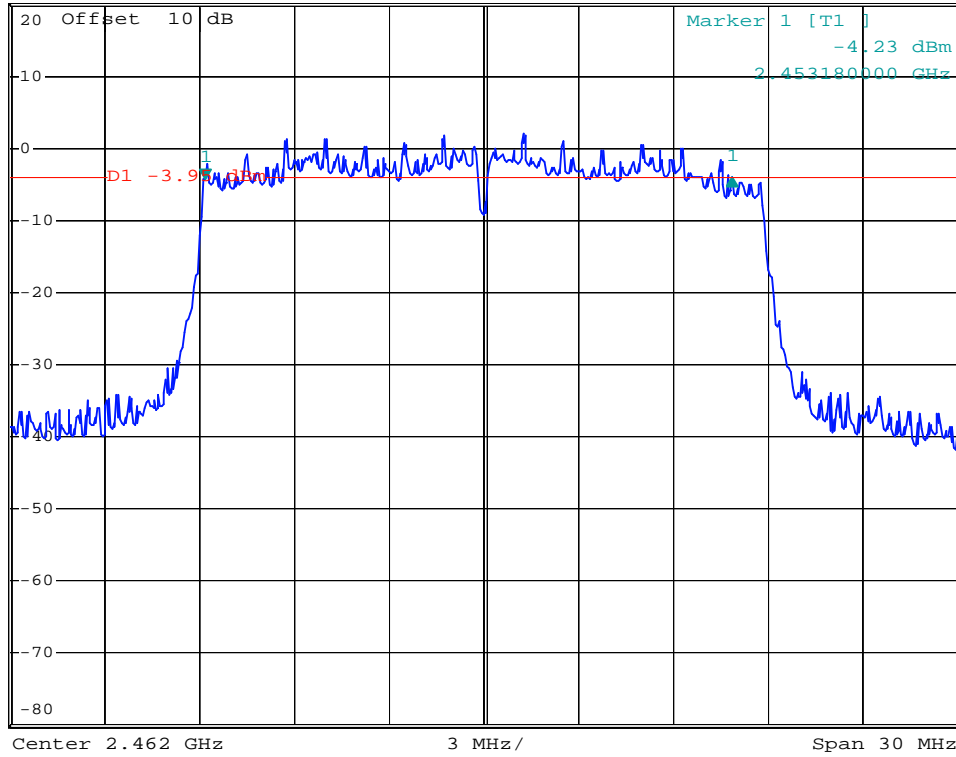

8 OUTPUT POWER MEASUREMENT

8.1 Standard Applicable

For direct sequence system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


8.2 Measurement Procedure

Measurement Procedure:

9.1.2 PKPM1 Peak power meter method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable.
3. Record the readings on the instrument and add a compensat factor of the attenuator.
4. Repeat above procedures until all frequencies measured were complete.

Figure 5: Output power and measurement configuration.



8.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
POWER METER +SENSOR	ANRITSU	ML2487A +MA2491A	2017/05/18	2018/05/17
Attenuator	MINI-CIRCUITS	BW-S10W2+	2016/09/30	2017/09/29

8.4 Measurement Data

Test Date : Sep. 21, 2017 Temperature : 25 °C Humidity : 55 %

A. 802.11b @1 Mbps

Output Peak Power		dBm	mW
Operation	Channel Low:2412MHz	14.82	30.339
	Channel Mid:2437MHz	14.69	29.444
	Channel High:2462MHz	14.52	28.314

B. 802.11g @6 Mbps

Output Peak Power		dBm	mW
Operation	Channel Low:2412MHz	14.29	26.853
	Channel Mid:2437MHz	14.05	25.410
	Channel High:2462MHz	14.03	25.293

C. 802.11n HT-20 @6.5 Mbps

Output Peak Power		dBm	mW
Operation	Channel Low:2412MHz	14.05	25.410
	Channel Mid:2437MHz	13.98	25.003
	Channel High:2462MHz	13.89	24.491

Note : The expanded uncertainty: 2dB.

9 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

9.1 Standard Applicable

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a), whichever results in the lesser attenuation.

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set both RBW of spectrum analyzer to 100kHz and VBW to 1 MHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2016/10/03	2017/10/02
Attenuator	MINI-CIRCUITS	BW-S10W2+	2016/09/30	2017/09/29

9.4 Measurement Data

Test Date : Sep. 21, 2017 Temperature : 25 °C Humidity : 55 %

A. 802.11b @1 Mbps

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

B. 802.11g @6 Mbps

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

C. 802.11n HT-20 @6.5 Mbps


- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

Note : The expanded uncertainty: 2dB.


802.11b



*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -43.61 dBm
SWT 10 ms 2.392600000 GHz

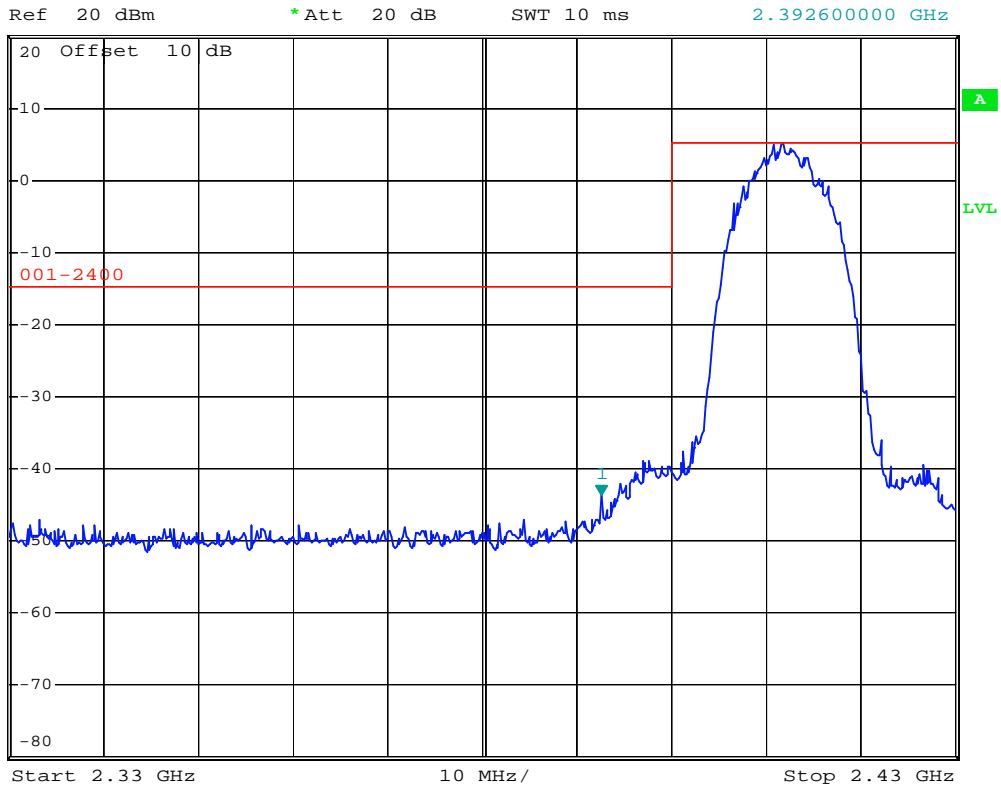


*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -48.40 dBm
SWT 10 ms 2.517800000 GHz

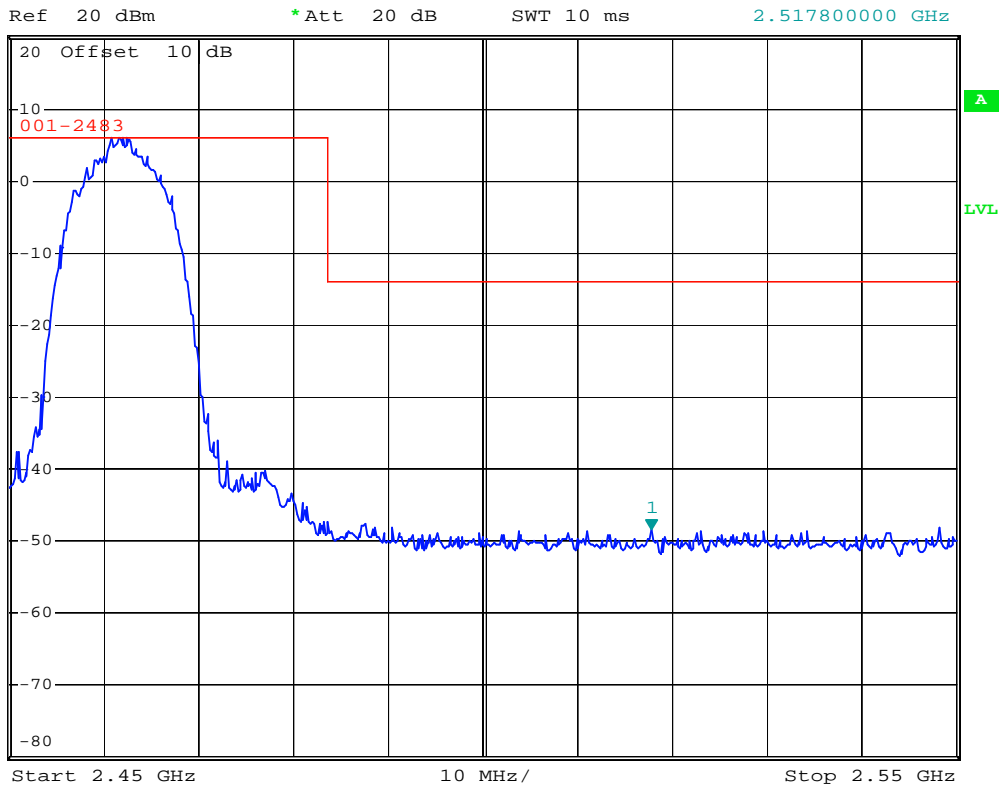


802.11n HT-20



Ref 20 dBm *Att 20 dB *RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -47.55 dBm
SWT 10 ms 2.347200000 GHz

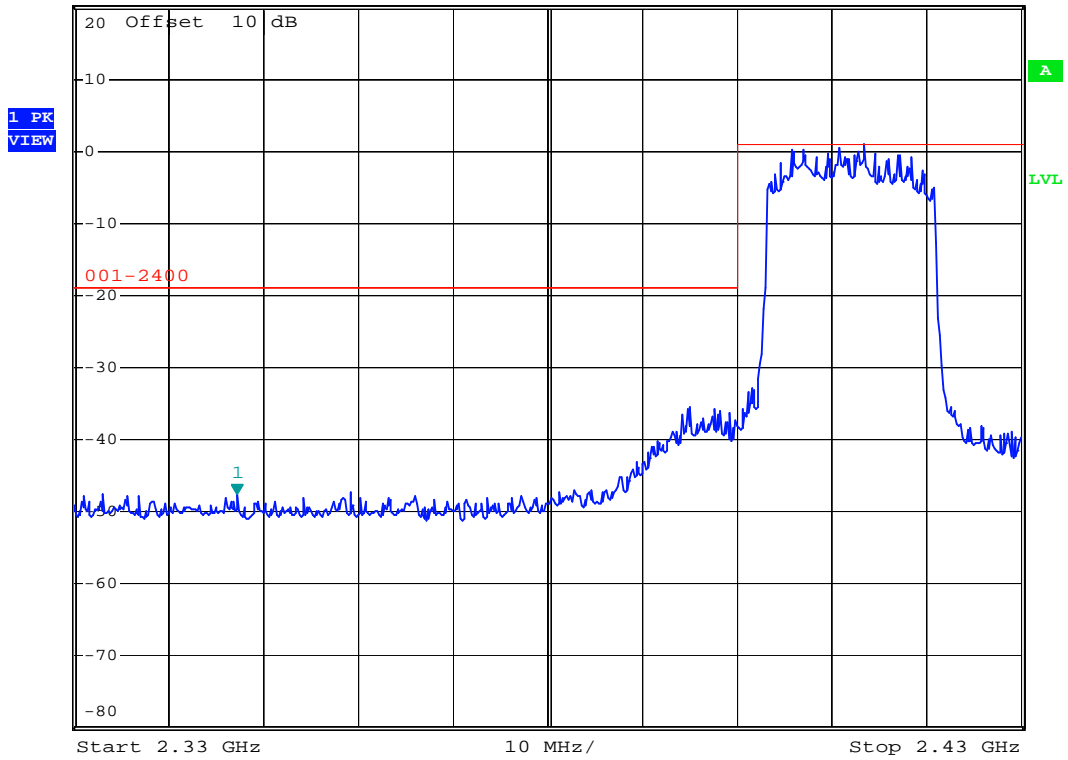

Ref 20 dBm *Att 20 dB *RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -48.48 dBm
SWT 10 ms 2.521800000 GHz

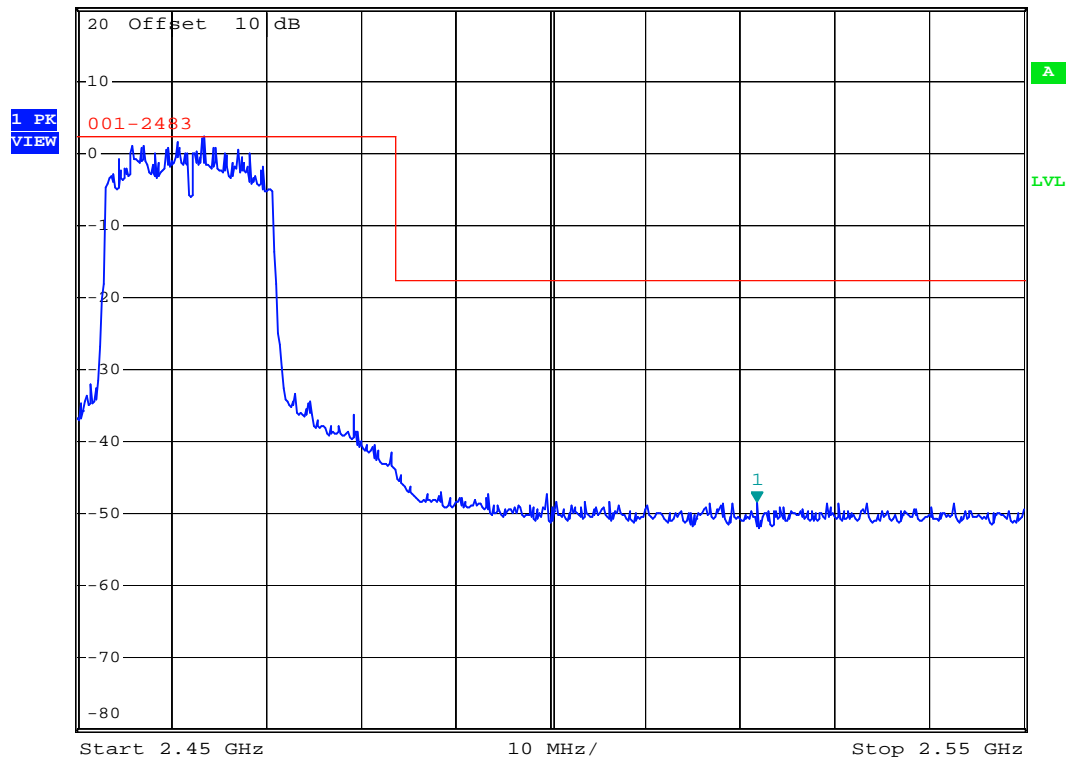

10 POWER DENSITY MEASUREMENT

10.1 Standard Applicable

According to 15.247(d), for direct sequence systems, the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

10.2 Measurement Procedure

Measurement Method: PKPSD

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set EUT to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set analyzer center frequency to DTS channel center frequency.
4. Set the span to 1.5 times the DTS bandwidth.
5. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
6. Set the VBW $\geq 3 \times \text{RBW}$.
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum amplitude level within the RBW.
12. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
13. Repeat above procedures until all measured frequencies were complete.

10.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2016/10/03	2017/10/02
Attenuator	MINI-CIRCUITS	BW-S10W2+	2016/09/30	2017/09/29

10.4 Measurement Data

Test Date : Sep. 21, 2017 Temperature : 25 °C Humidity : 55 %

A. 802.11b @1 Mbps

- a) Channel Low: Maximun PSD is -9.42 dBm
- b) Channel Mid: Maximun PSD is -7.60 dBm
- c) Channel High: Maximun PSD is -9.37 dBm

B. 802.11g @6 Mbps


- a) Channel Low: Maximun PSD is -12.50 dBm
- b) Channel Mid: Maximun PSD is -12.20 dBm
- c) Channel High: Maximun PSD is -13.96 dBm

C. 802.11n HT-20 @6.5 Mbps


- a) Channel Low: Maximun PSD is -13.48 dBm
- b) Channel Mid: Maximun PSD is -12.62 dBm
- c) Channel High: Maximun PSD is -13.35 dBm

Note : The expanded uncertainty: 2dB.


802.11b / Channel Low

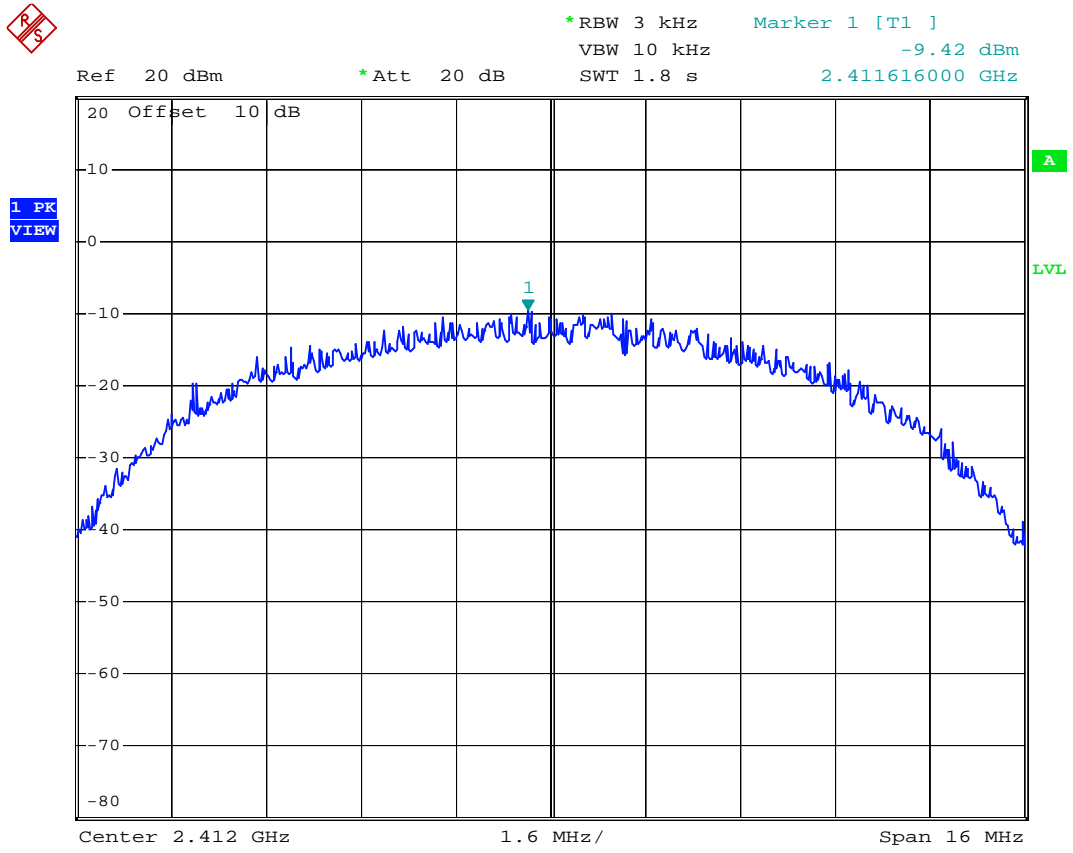

802.11b / Channel Mid

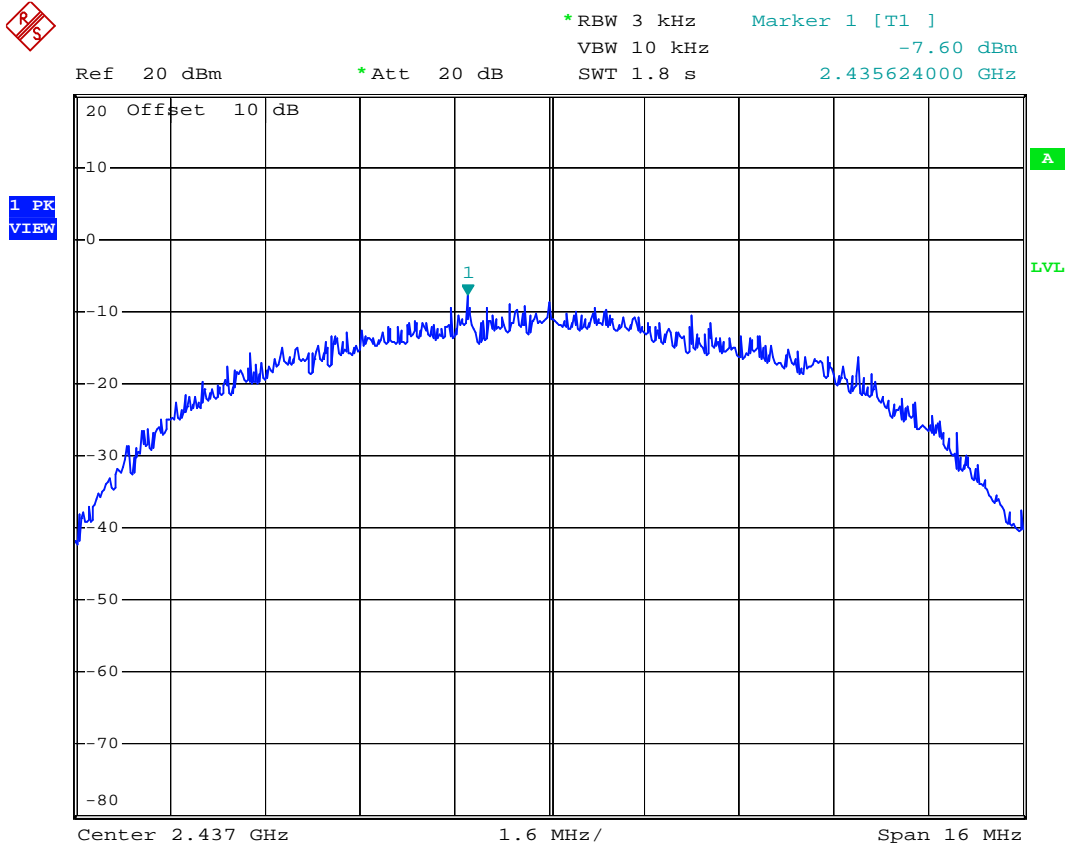


802.11g / Channel Low

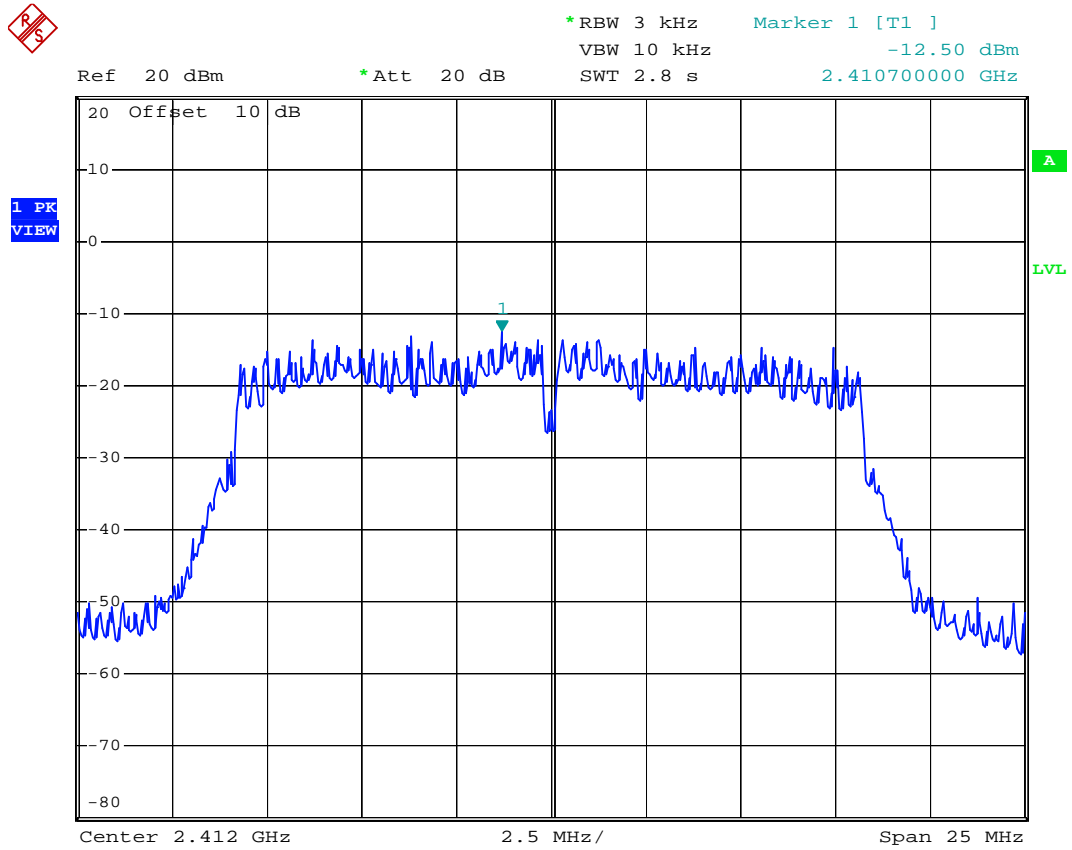

802.11g / Channel Mid




*RBW 3 kHz Marker 1 [T1]
VBW 10 kHz -12.20 dBm
SWT 2.8 s 2.432000000 GHz

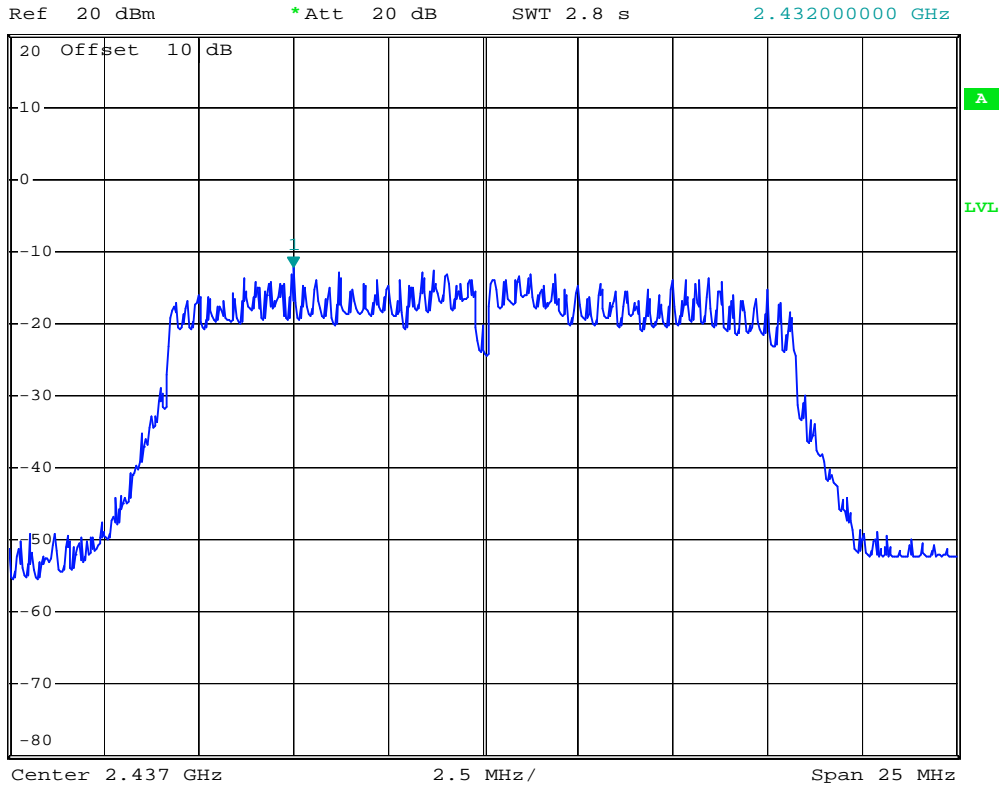


802.11g / Channel High



*RBW 3 kHz Marker 1 [T1]
VBW 10 kHz -13.96 dBm
SWT 2.8 s 2.460450000 GHz

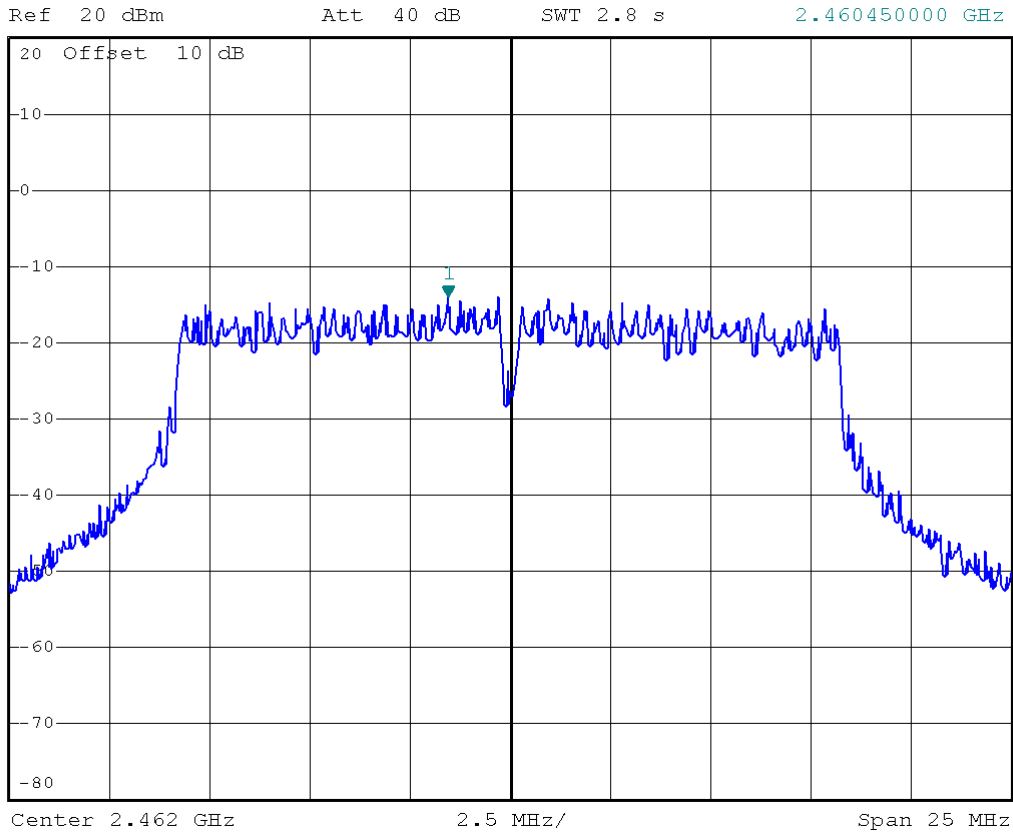

802.11n HT-20/Channel Low

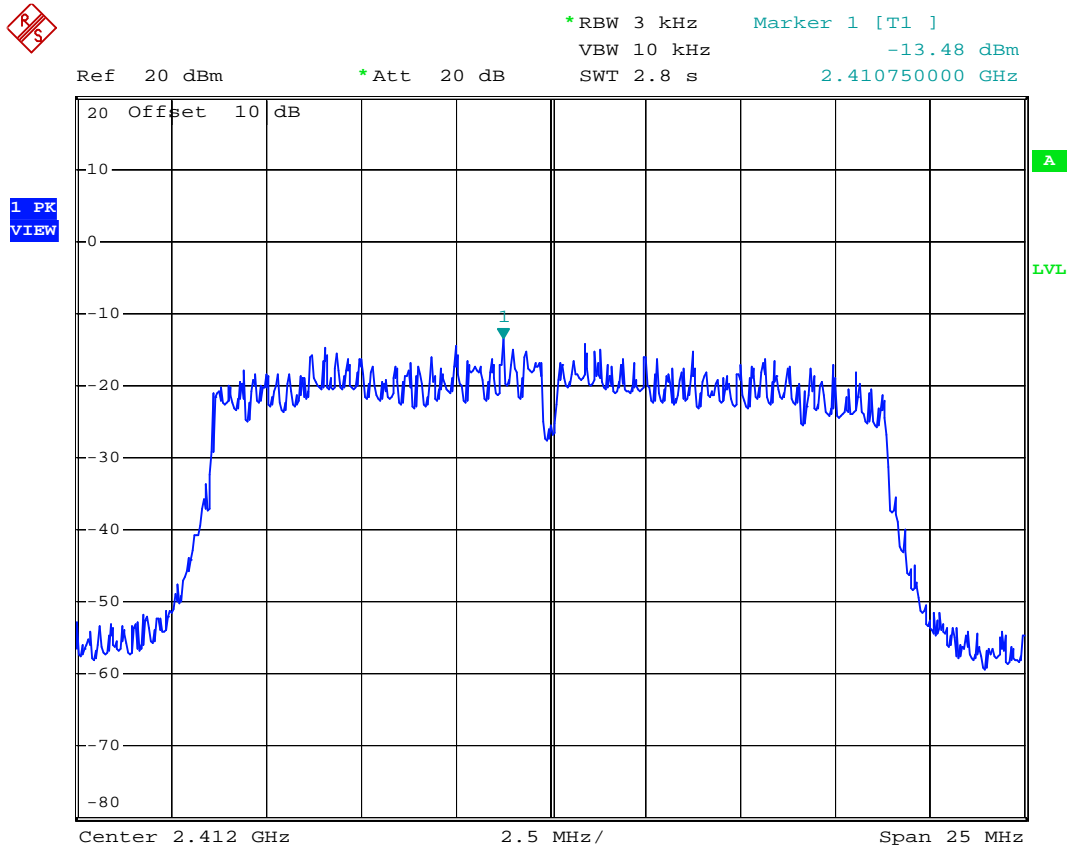

802.11n HT-20/ Channel Mid




*RBW 3 kHz Marker 1 [T1]
VBW 10 kHz -12.62 dBm
SWT 2.8 s 2.435750000 GHz

Ref 20 dBm

*Att 20 dB

1 PK
VIEW

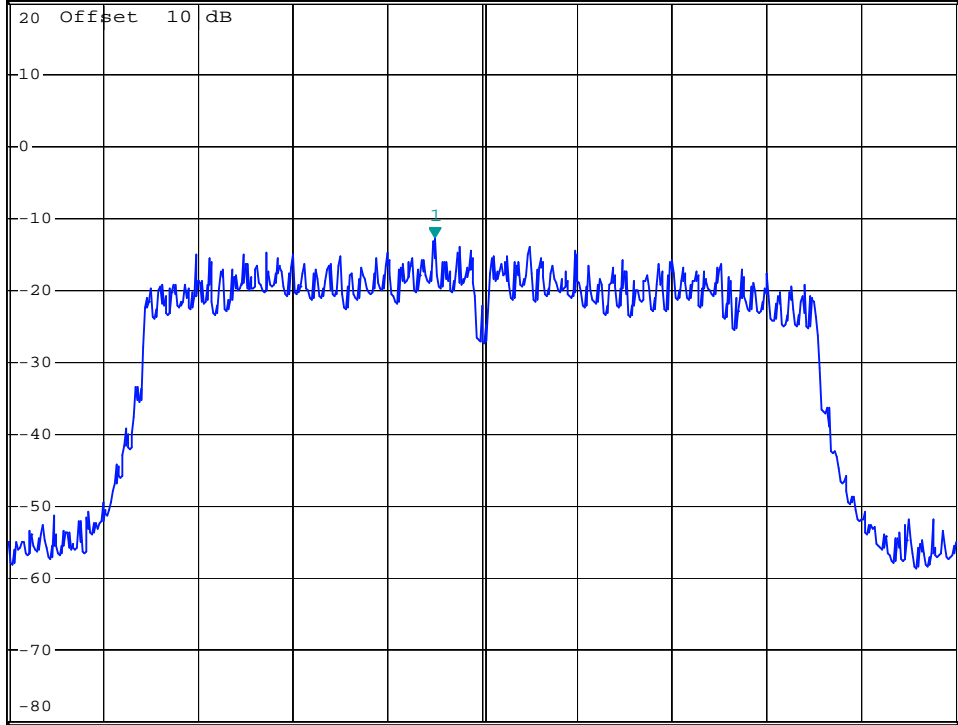


Center 2.437 GHz

2.5 MHz/

Span 25 MHz

802.11n HT-20/ Channel High

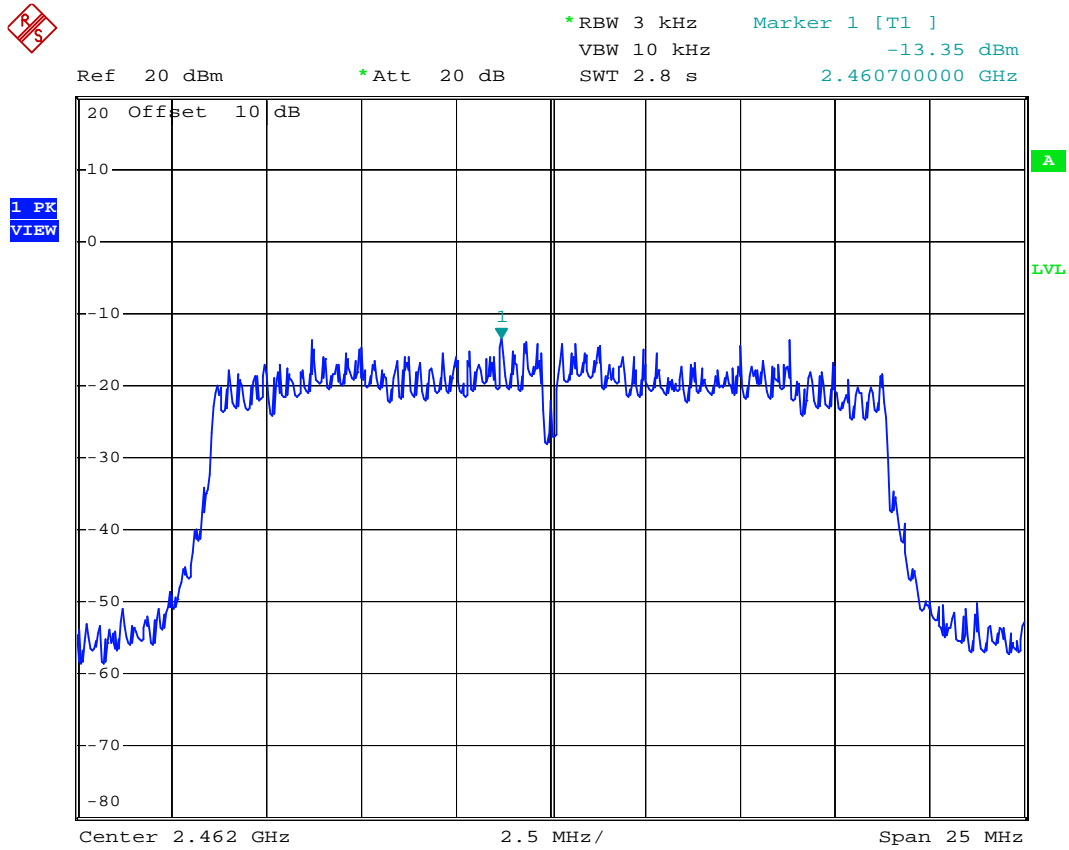

11. OUT-OF-BAND CONDUCTED EMISSION MEASUREMENT

11.1 Standard Applicable

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.

3. Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold.

4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

11.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2016/10/03	2017/10/02
Attenuator	MINI-CIRCUITS	BW-S10W2+	2016/09/30	2017/09/29

11.4 Measurement Data

Test Date : Sep. 21, 2017 Temperature : 25 °C Humidity : 55 %

A. 802.11b @1 Mbps

Mode: Channel Low, Mid, High

30 MHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

B. 802.11g @6 Mbps

Mode: Channel Low, Mid, High

30 MHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

C. 802.11n HT-20 @6.5 Mbps

Mode: Channel Low, Mid, High

30 MHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Note : The expanded uncertainty: 2dB.

802.11b / Channel Low




*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -47.84 dBm
SWT 100 ms 72.680000000 MHz

Ref 20 dBm

*Att 20 dB

1 PK
VIEW

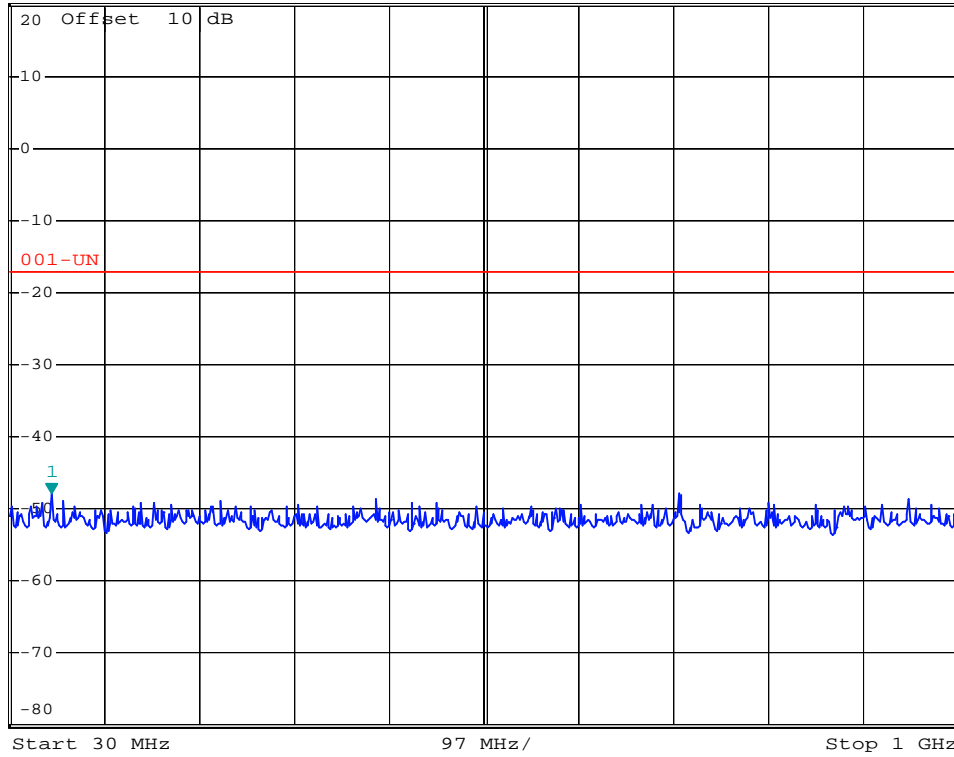


*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz 2.80 dBm
SWT 2.6 s 2.377000000 GHz

Ref 20 dBm

*Att 20 dB

1 PK
VIEW

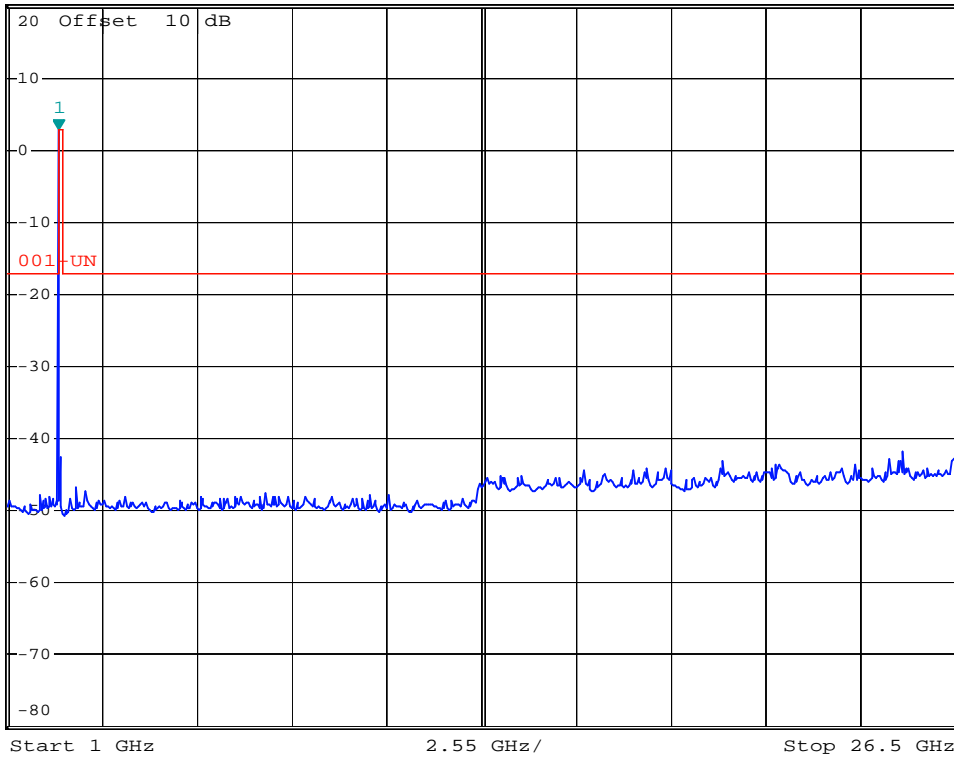

802.11b / Channel High




*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -48.00 dBm
SWT 100 ms 344.28000000 MHz

Ref 20 dBm

*Att 20 dB

1 PK
VIEW

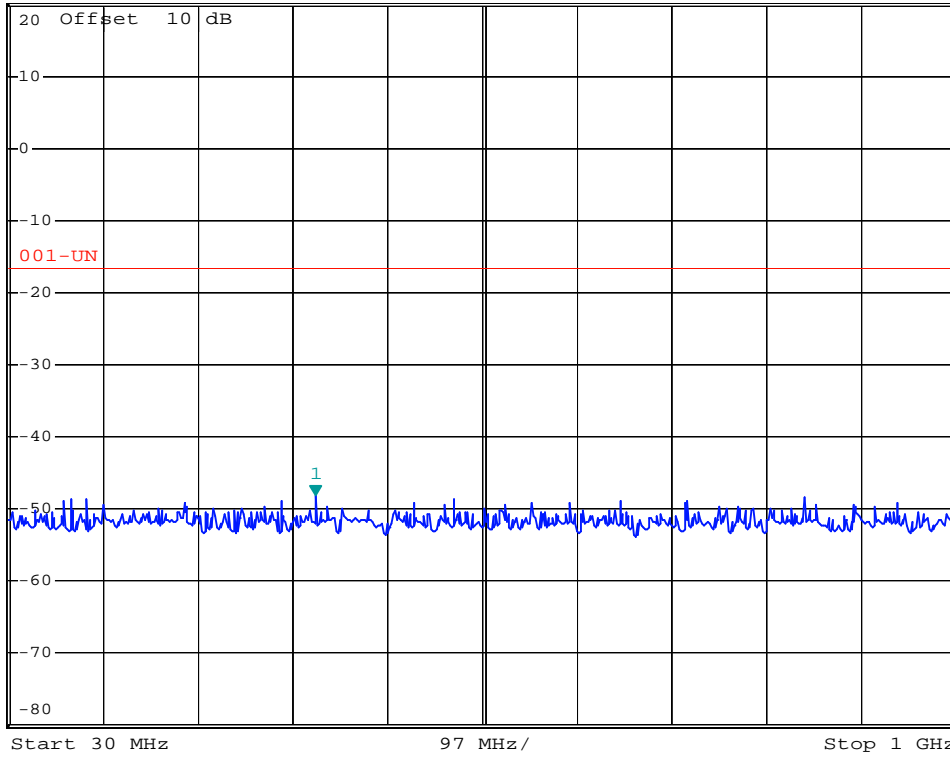


*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz 3.28 dBm
SWT 2.6 s 2.428000000 GHz

Ref 20 dBm

*Att 20 dB


1 PK
VIEW

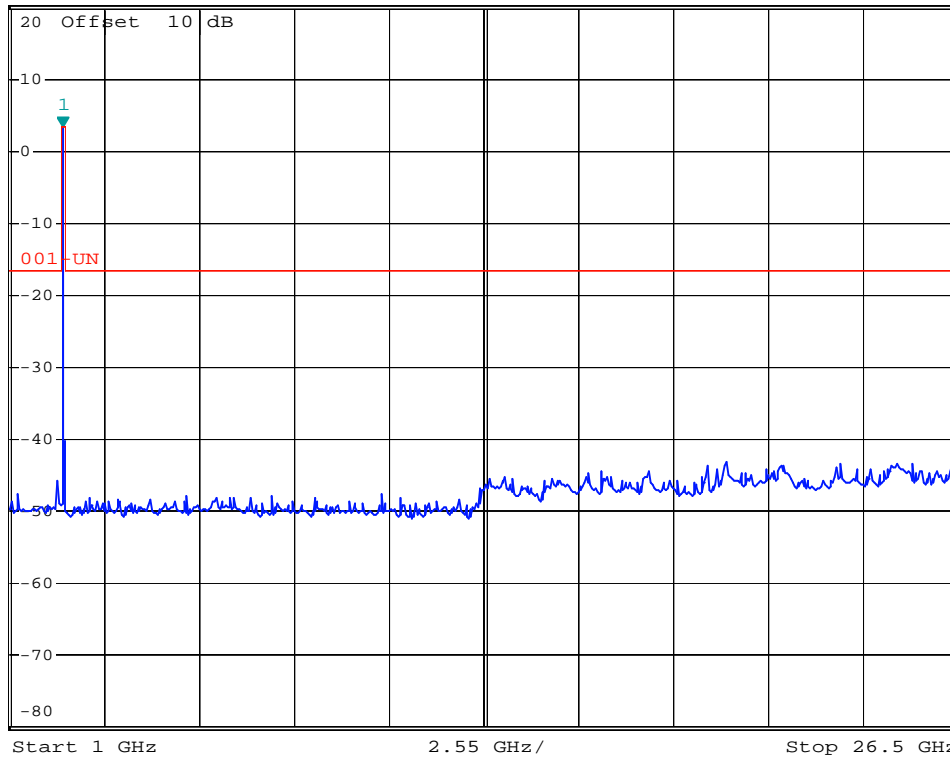


802.11g / Channel Low



*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -48.25 dBm
SWT 100 ms 720.64000000 MHz

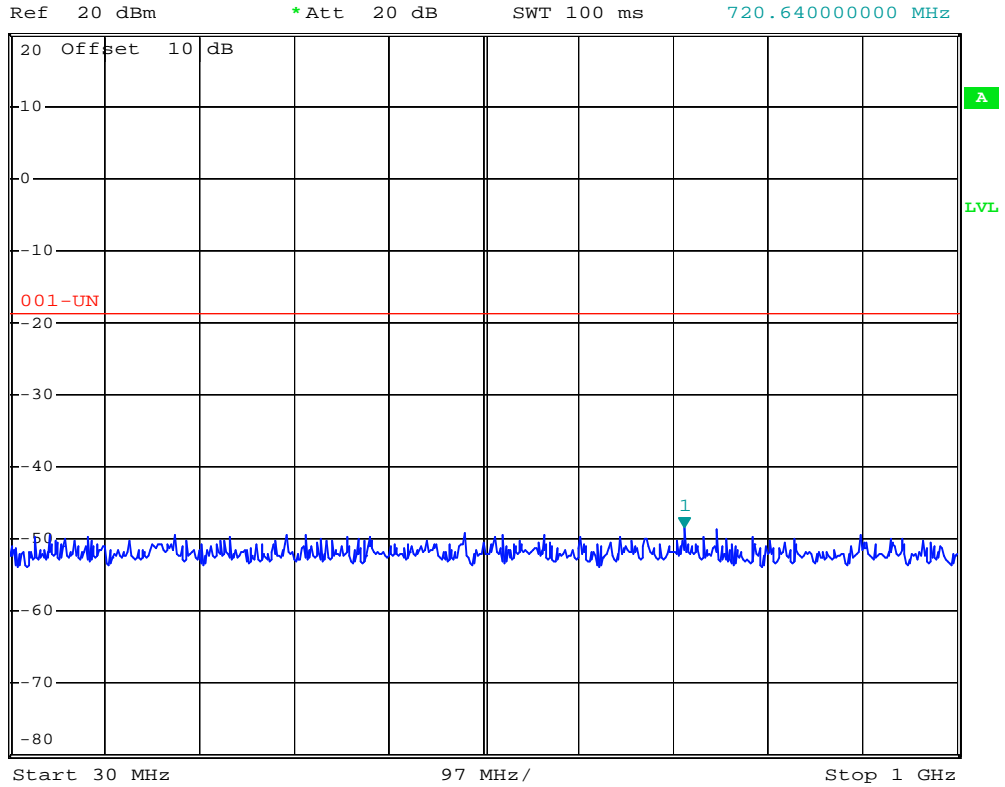

*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz 1.18 dBm
SWT 2.6 s 2.377000000 GHz

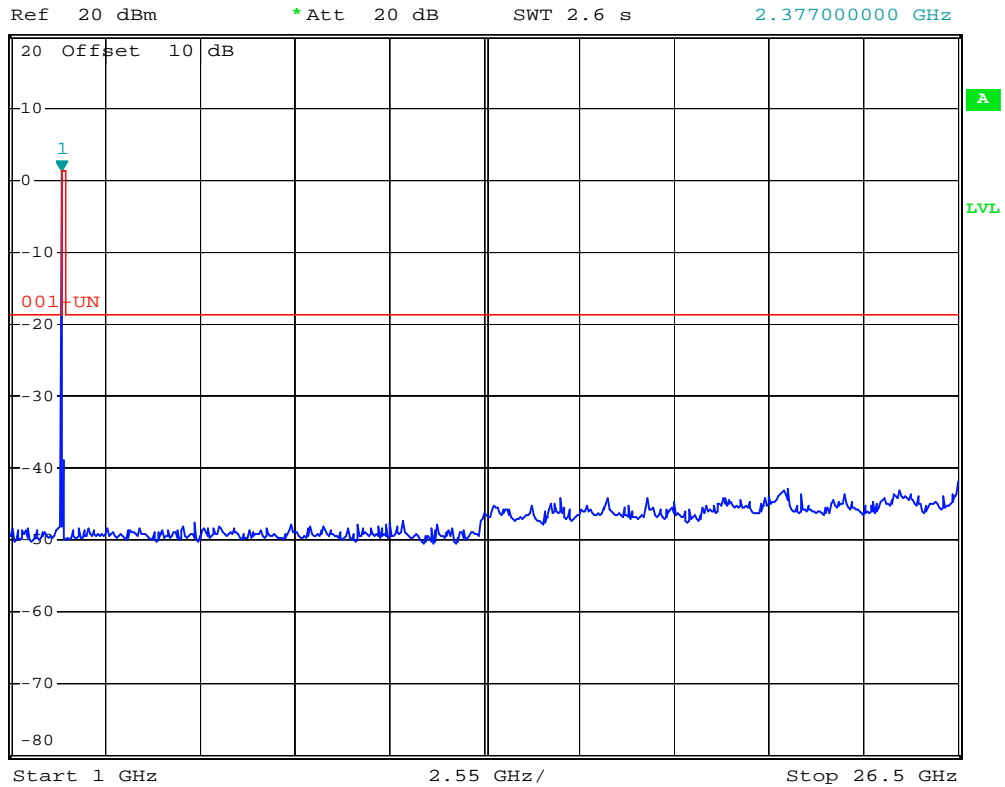


802.11n HT-20/ Channel Low




*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -48.70 dBm
SWT 100 ms 410.24000000 MHz

Ref 20 dBm *Att 20 dB

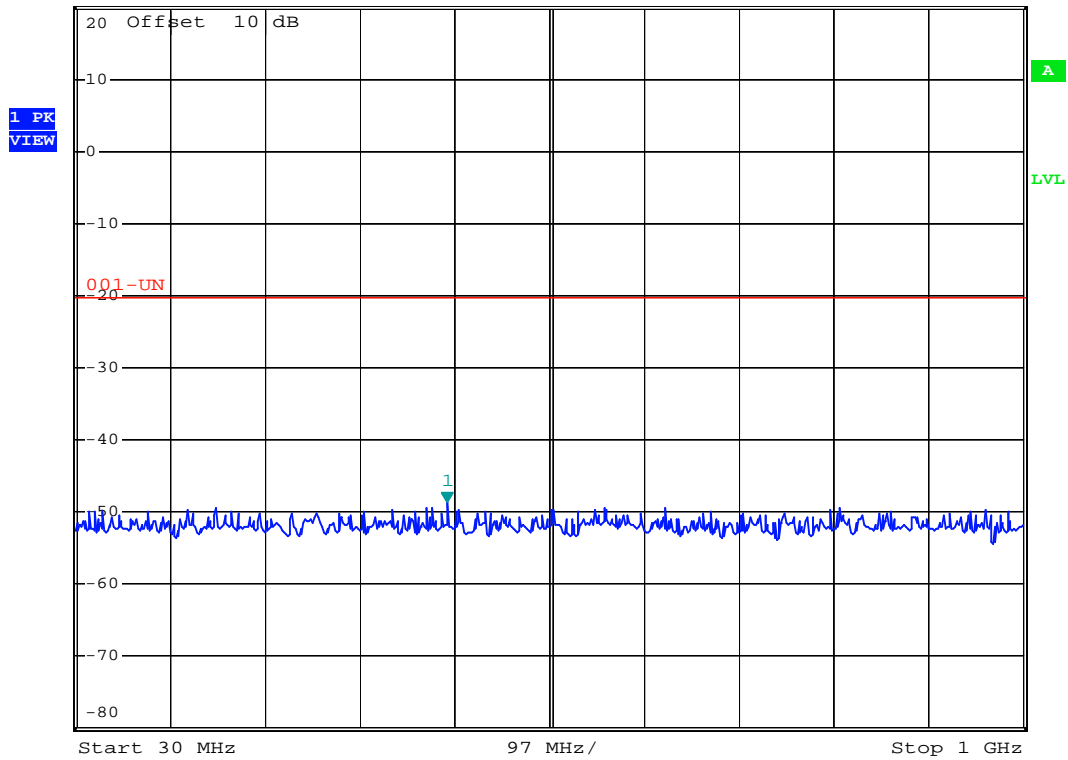

*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -0.19 dBm
SWT 2.6 s 2.377000000 GHz

Ref 20 dBm *Att 20 dB

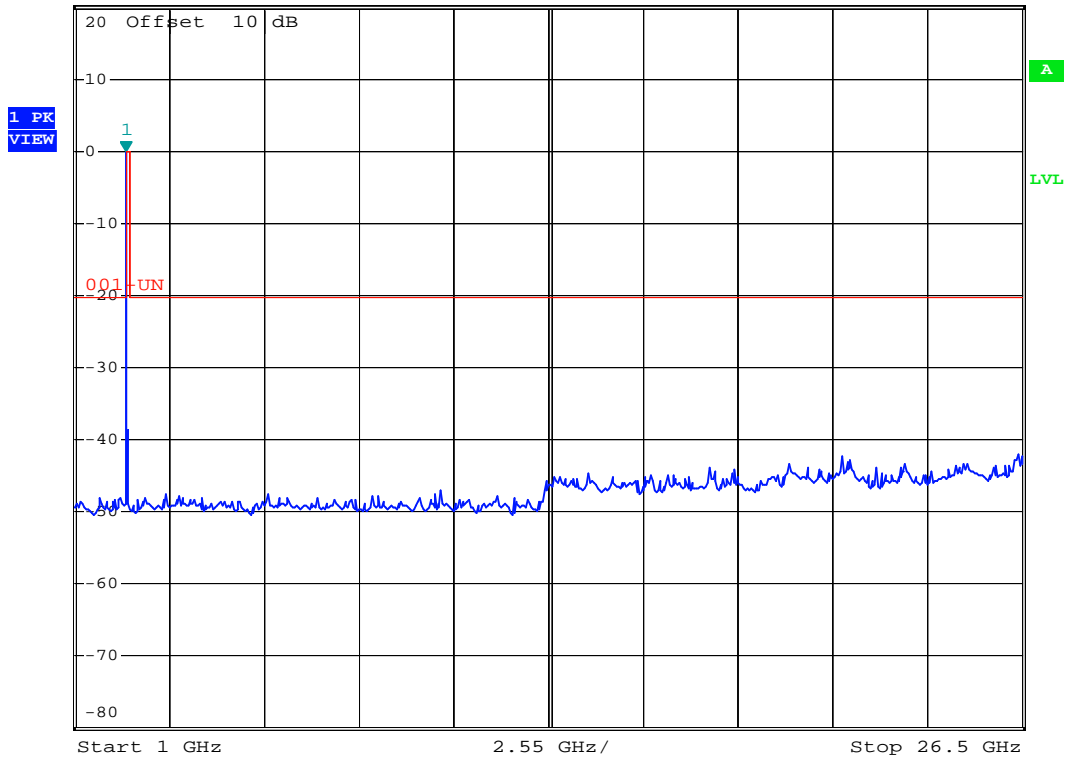


802.11n HT-20/ Channel Mid




*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -48.43 dBm
SWT 100 ms 908.82000000 MHz

Ref 20 dBm *Att 20 dB

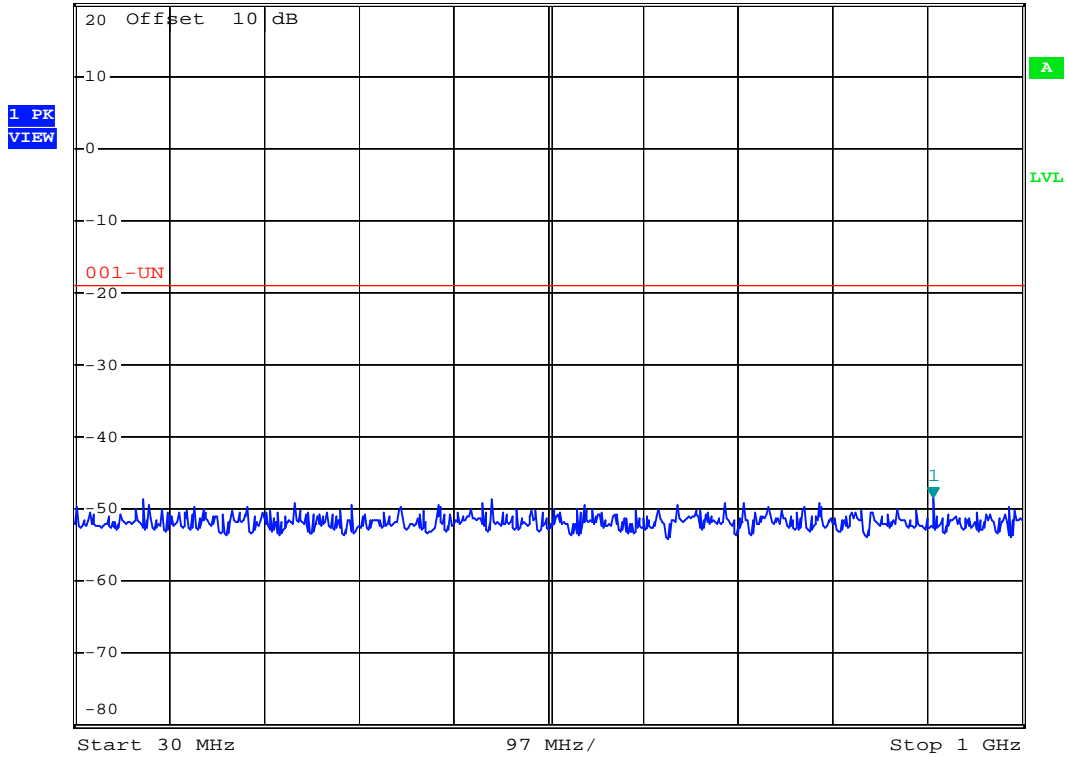

*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz 0.90 dBm
SWT 2.6 s 2.428000000 GHz


Ref 20 dBm *Att 20 dB

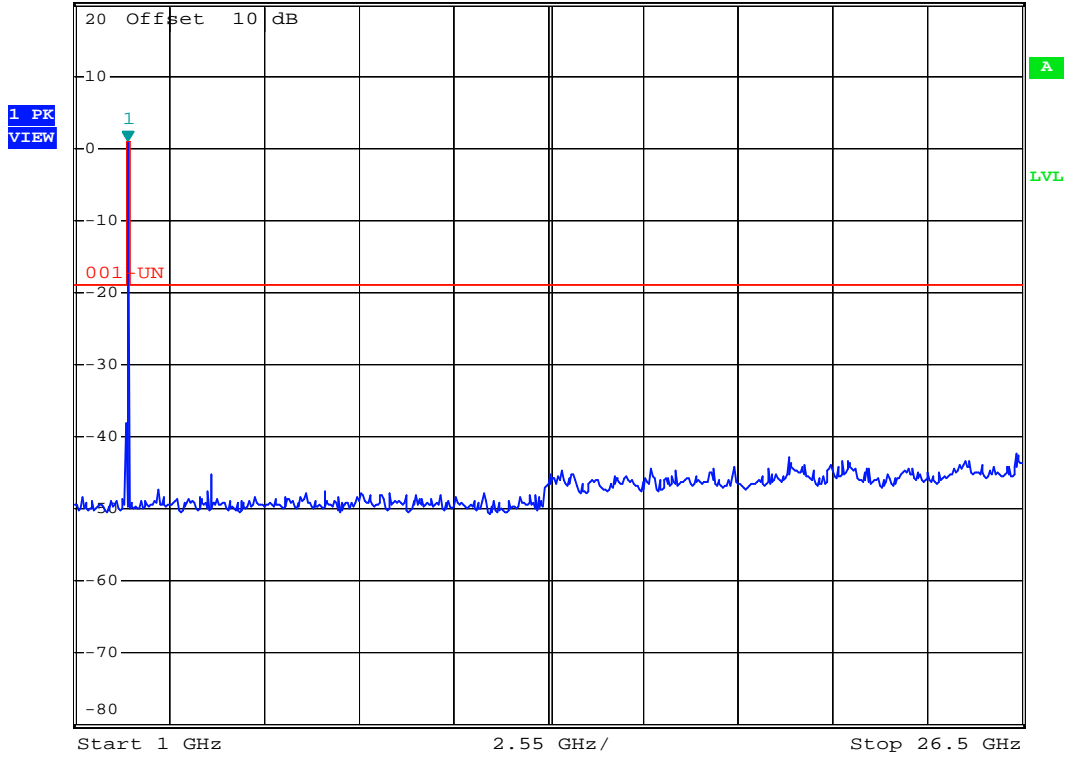


802.11n HT-20/ Channel High



*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -47.77 dBm
SWT 100 ms 926.28000000 MHz

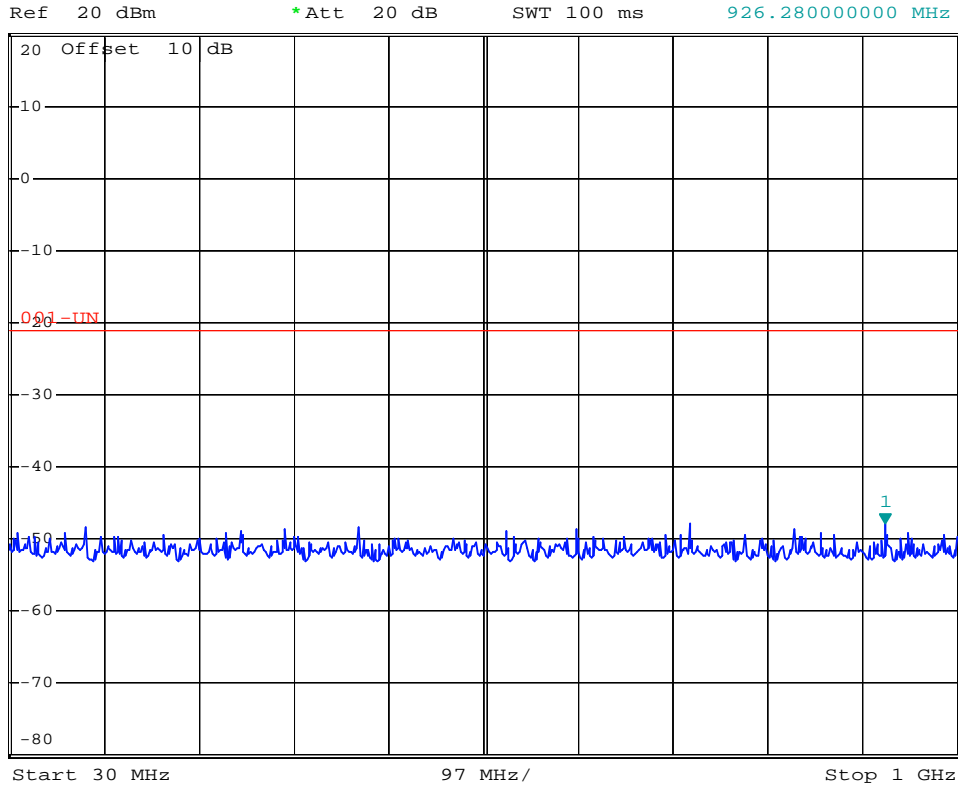

*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -0.97 dBm
SWT 2.6 s 2.428000000 GHz

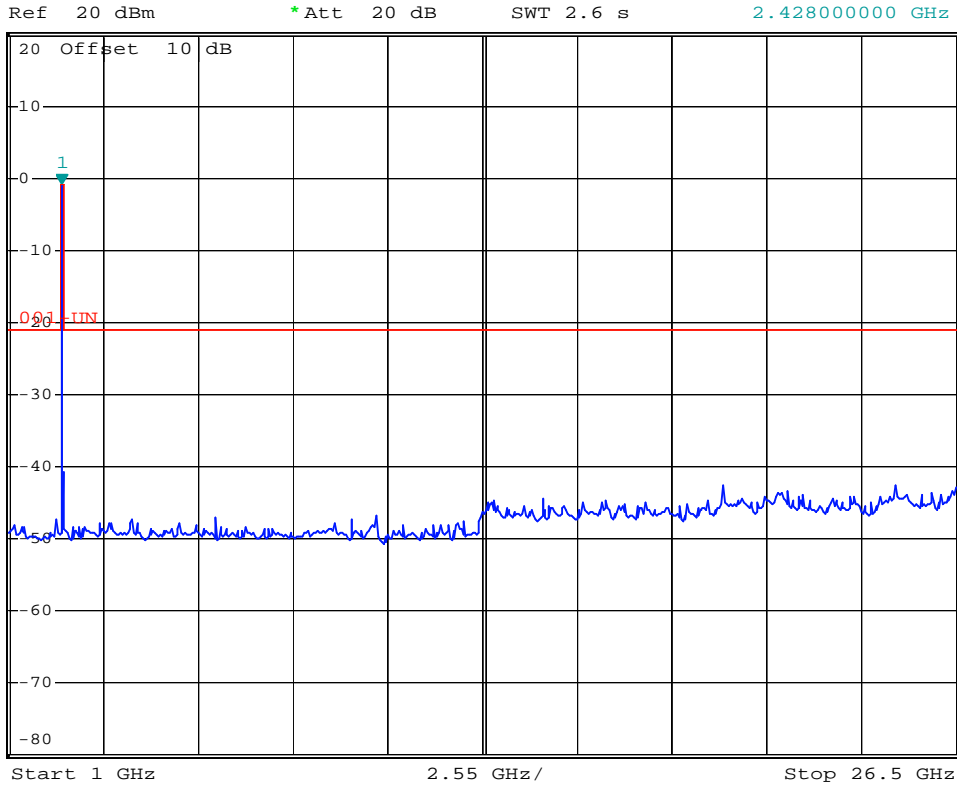

12. DUTY CYCLE

12.1 Standard Applicable

None. Reference only.

12.2 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2016/10/03	2017/10/02

12.3 Measurement Data

Test Date : Sep. 21, 2017 Temperature : 25 °C Humidity : 55 %

Duty Cycle Calculation



Mode	Period (ms)	Transmission duration (T) (ms)	Duty Cycle (%)	1/T (kHz)	VBW setting (kHz)
802.11b	9.80	9.70	98.9	0.103	0.01
802.11g	2.25	2.00	88.8	0.500	1
802.11n HT-20	2.10	1.85	88.1	0.540	1

Note:



1. VBW = 10 Hz, when the duty cycle is no less than 98%.
2. When the duty cycle is less than 98%, for the average measurement of the radiated emission test, the VBW setting is $>1/T$ where the T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Refer to the following page for data plots.

802.11b

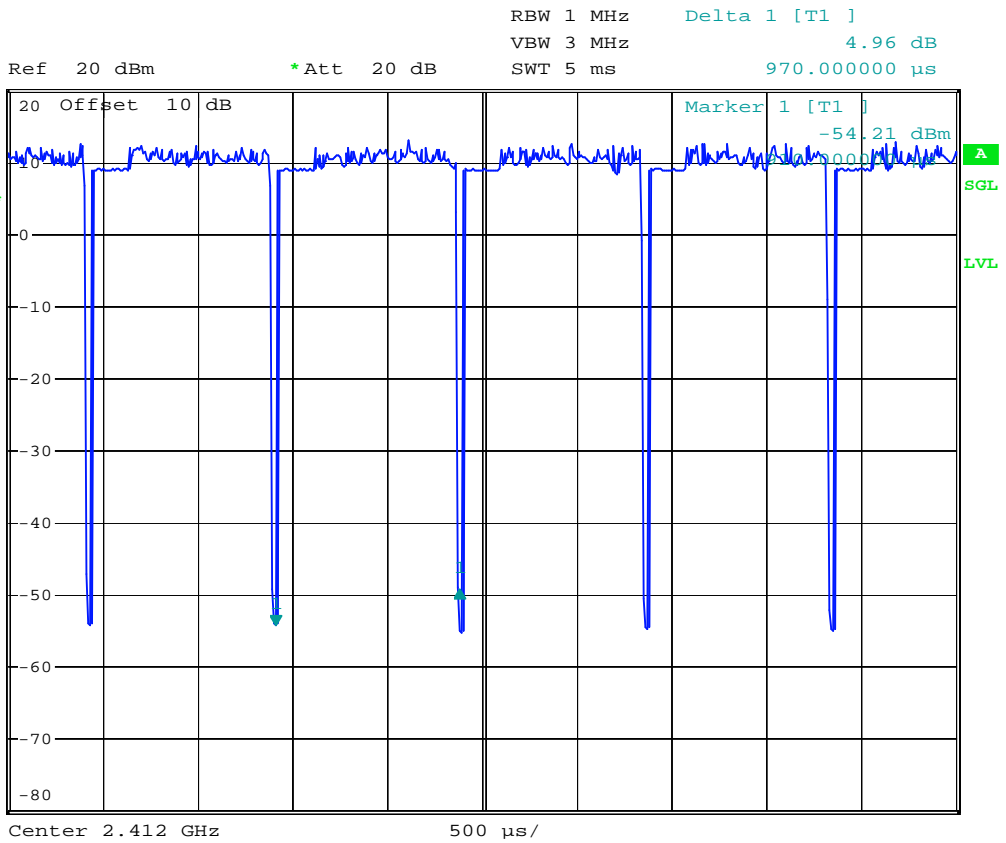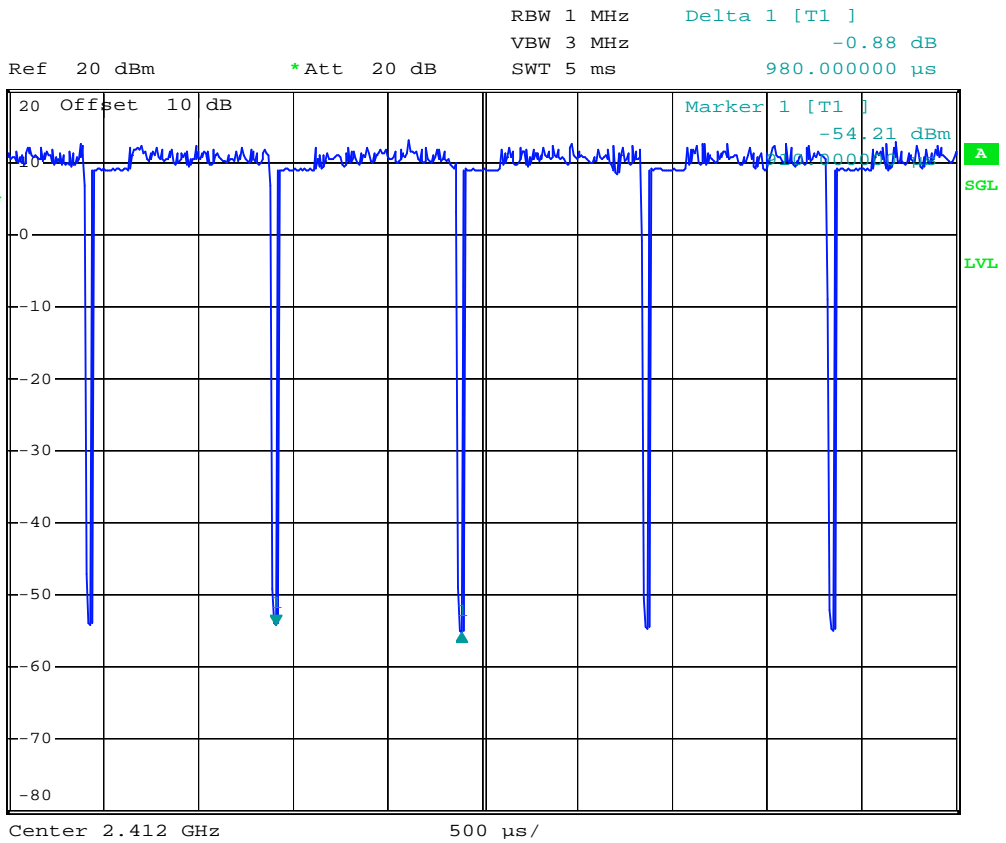


802.11g

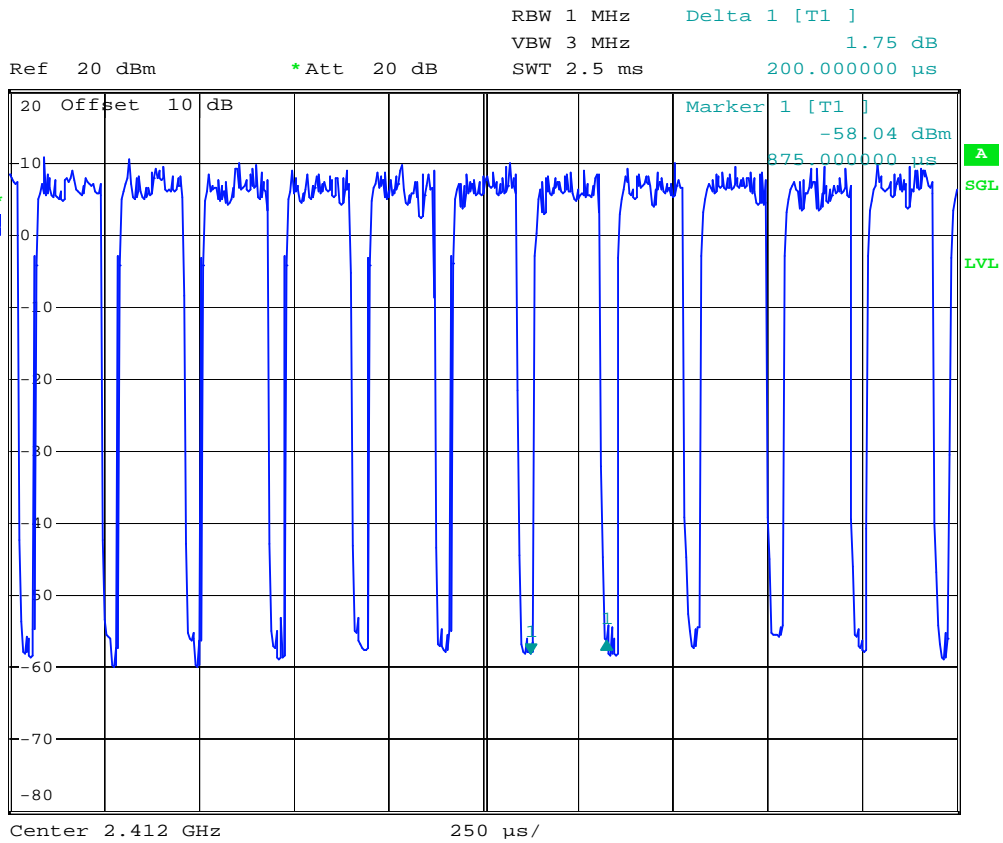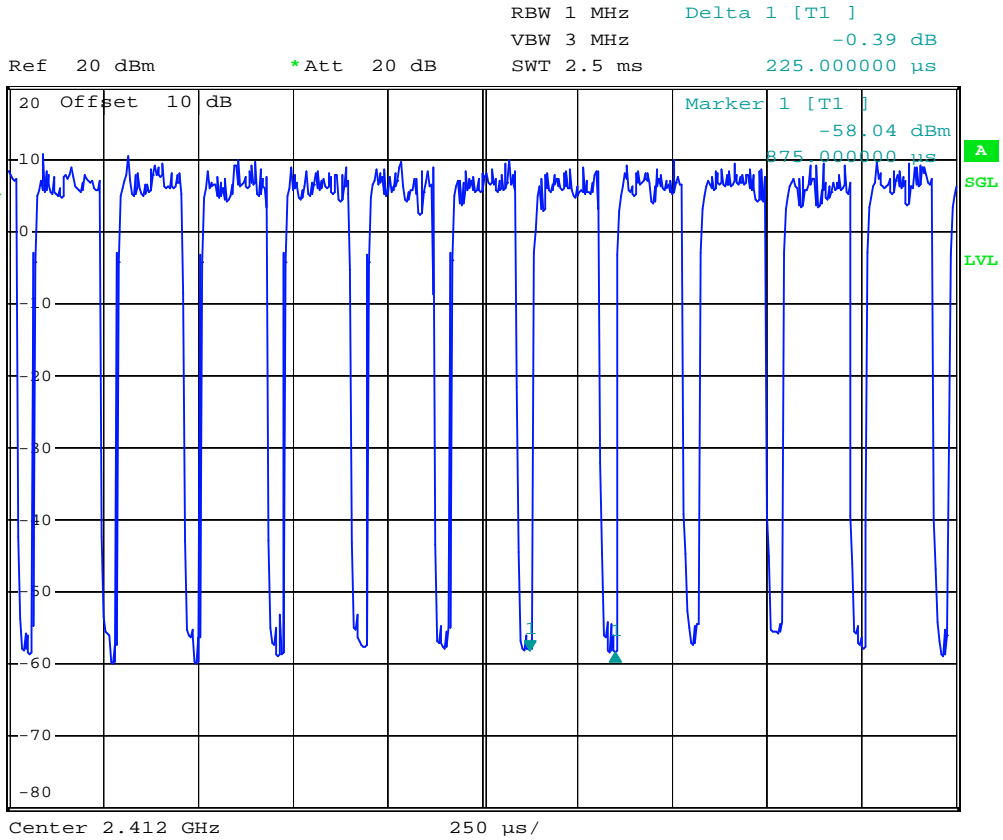

802.11n HT-20



Ref 20 dBm *Att 20 dB RBW 1 MHz Delta 1 [T1]
VBW 3 MHz -2.50 dB
SWT 2.5 ms 210.000000 μ s

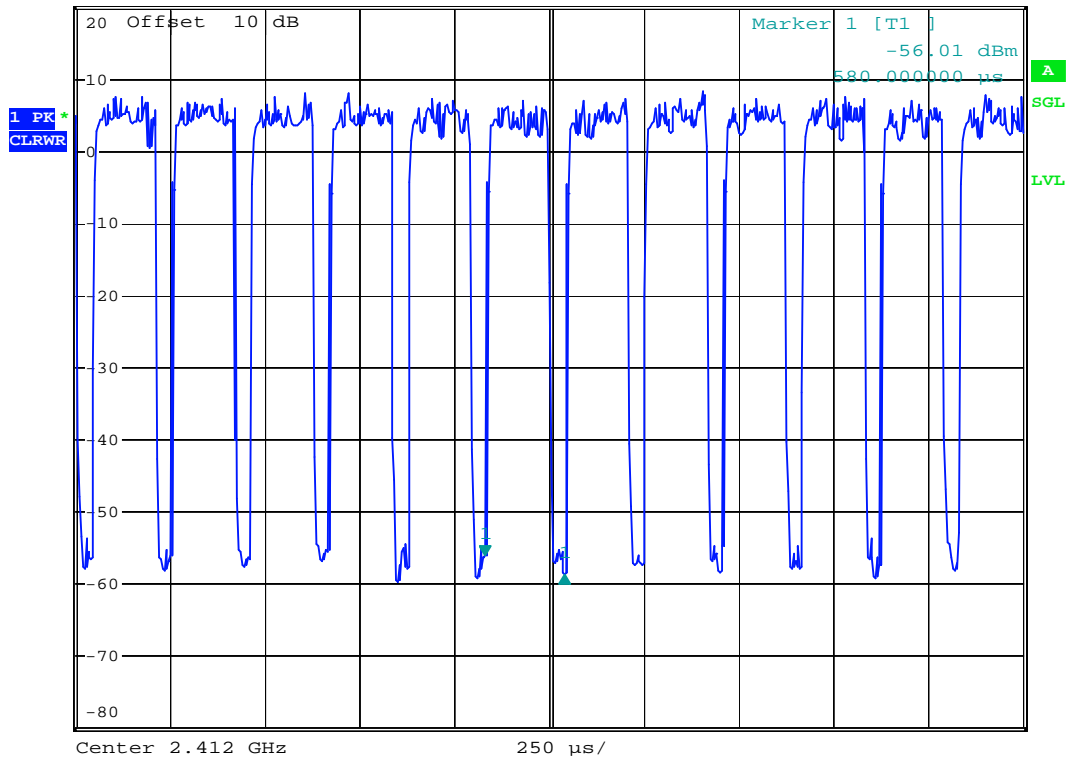

Ref 20 dBm *Att 20 dB RBW 1 MHz Delta 1 [T1]
VBW 3 MHz -1.05 dB
SWT 2.5 ms 185.000000 μ s

