



PEP Testing Laboratory

RFI / EMI TEST REPORT

APPLICANT : SYSGRATION CO., LTD.
E. U. T. : MOUSE
TRADE NAME : N/A
FCC ID : HQXPC98010-13
REGULATION : CFR 47 , Part 15 Subpart B , **Class B**
TEST SITE : PEP Testing Laboratory
TEST ENGINEER : *Jason Gong*
TEST DATE : *6 / 15 / 1998*
ISSUED DATE : JUN. / 26 / 1998
REPORT No. : 980324



PEP Testing Laboratory

VERIFICATION

WE HEREBY VERIFY THAT:

The E. U. T. listed below has completed RFI testing by PEP Testing Laboratory and the interference emissions can pass **FCC Class B** limitations.

The tested configurations and the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4-1992.

Any data in this RFI report is “ **reference** ” only.

APPLICANT : SYSGRATION CO., LTD.*

PRODUCT : MOUSE*

FCC ID : HQXPC98010-13*

MODEL : PC98010-13*

M. Y. Tsui

M. Y. TSUI

Manager

PEP Testing Laboratory

12-3FL., NO. 27-1, Lane 169, Kang-Ning St.,
Hsi-Chi, Taipei Hsien, Taiwan, R. O. C.

TEL : 886-2-6922097 FAX : 886-2-6956236



PEP Testing Laboratory

TABLE OF CONTENTS

1. GENERAL

1.1 General Information	1
1.2 Place of Measurement	1
1.3 Labeling Requirements	2
1.4 Information to User	3

2. CONDUCTED EMISSIONS TEST

2.1 Setup of the Test Facilities	4
2.2 Test Procedures	5

3. RADIATED EMISSIONS TEST

3.1 Setup of the Test Facilities	6
3.2 Test Procedures	7

4. DESCRIPTION FOR EUT TESTING CONFIGURATION..... 8

5. SUPPORTING DEVICES TO TEST 9

6. TEST CONFIGURATION C

- ** Conducted Emission Test Photo. and Data
- ** Radiated Emission Test Photo. and Data

7. APPENDIX

A. Photos of EUT Appearance	10
-----------------------------	-------	----



PEP Testing Laboratory

1. GENERAL

1.1 GENERAL INFORMATION:

APPLICANT : SYSGRATION CO., LTD.

8FL., NO. 542-7, CHUNG CHEN RD.,
HSIN TIEN, TAIPEI, TAIWAN R. O. C.

MANUFACTURER : SYSGRATION CO., LTD.

8FL., NO. 542-7, CHUNG CHEN RD.,
HSIN TIEN, TAIPEI, TAIWAN R. O. C.

MEASUREMENT PROCEDURE : ANSI C63 , 4 - 1992

TESTED FOR COMPLIANCE WITH : Title 47 of CFR
Part 15 , Subpart B , Class B


1.2 PLACE OF MEASUREMENT PEP Testing Laboratory



PEP Testing Laboratory

1.3 LABELING REQUIREMENT

A FCC ID label shall be permanently attached and conspicuously located on the equipment:

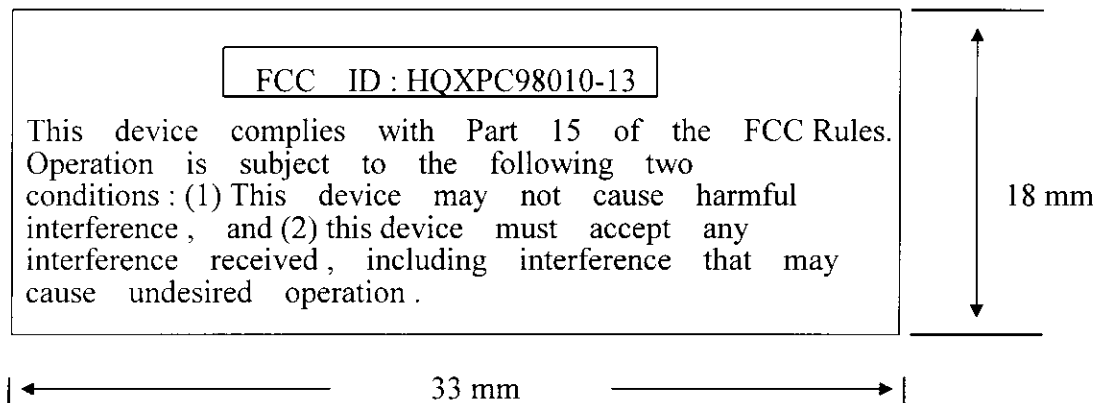



PEP Testing Laboratory

1.4 INFORMATION TO THE USER

The following FCC statement should be declared in a conspicuous location in the user's manual.

Federal Communications Commission (FCC) Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

Warning : A shielded-type power cord is required in order to meet FCC emission limits and also to prevent interference to the nearby radio and television reception. It is essential that only the supplied power cord be used.

Use only shielded cables to connect I/O devices to this equipment.


You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.



2. CONDUCTION EMISSIONS TEST

2.1 GENERAL SETUP OF THE TEST FACILITIES

(RS 232)

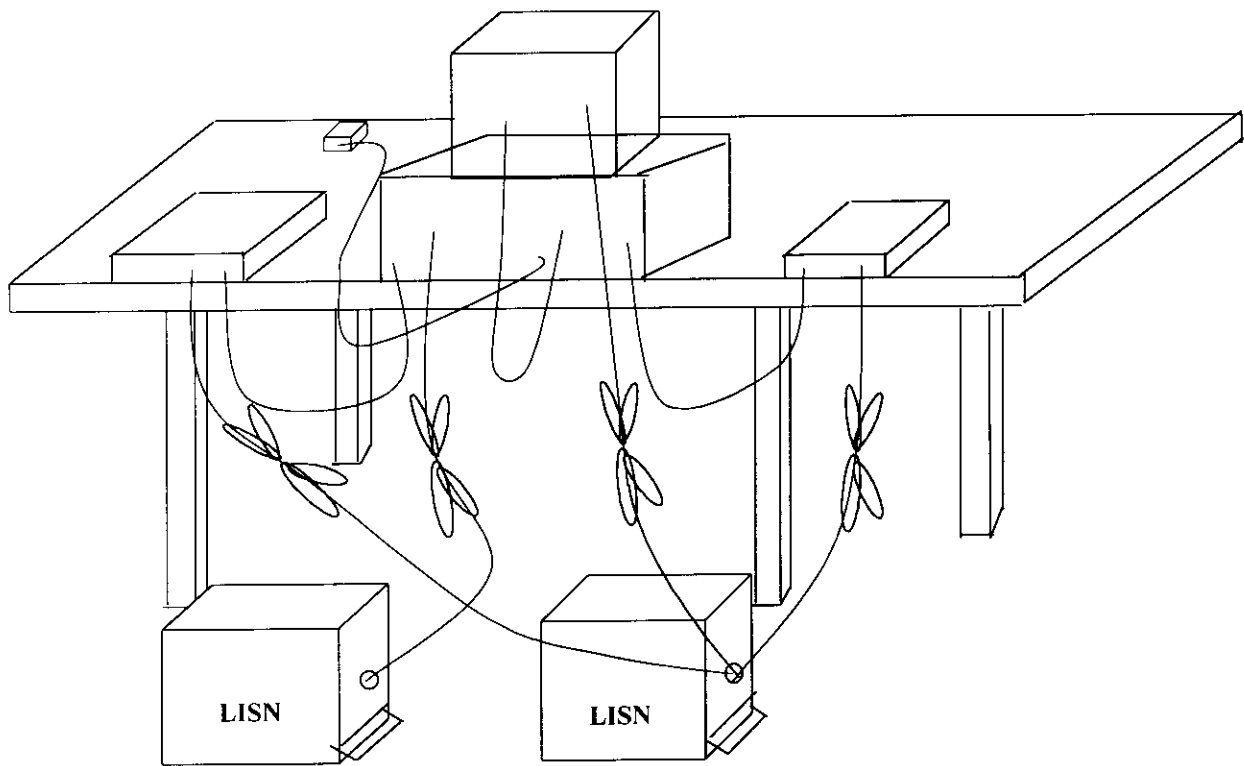



PEP Testing Laboratory

2.2 TEST PROCEDURES

The system was setup as described above, with the EMI diagnostic software.

Both the line of power cord, hot and neutral, were run with the EMI tests software.

To get the maximum power line conducted emission, we changed the configuration by varying the monitor power cord fed from floor outlet and from the outlet on the power supply of this computer.


The highest emissions were recorded in the RFI test report.



3. RADIATED EMISSIONS TEST

3.1 GENERAL SETUP OF THE FACILITIES

(RS 232)

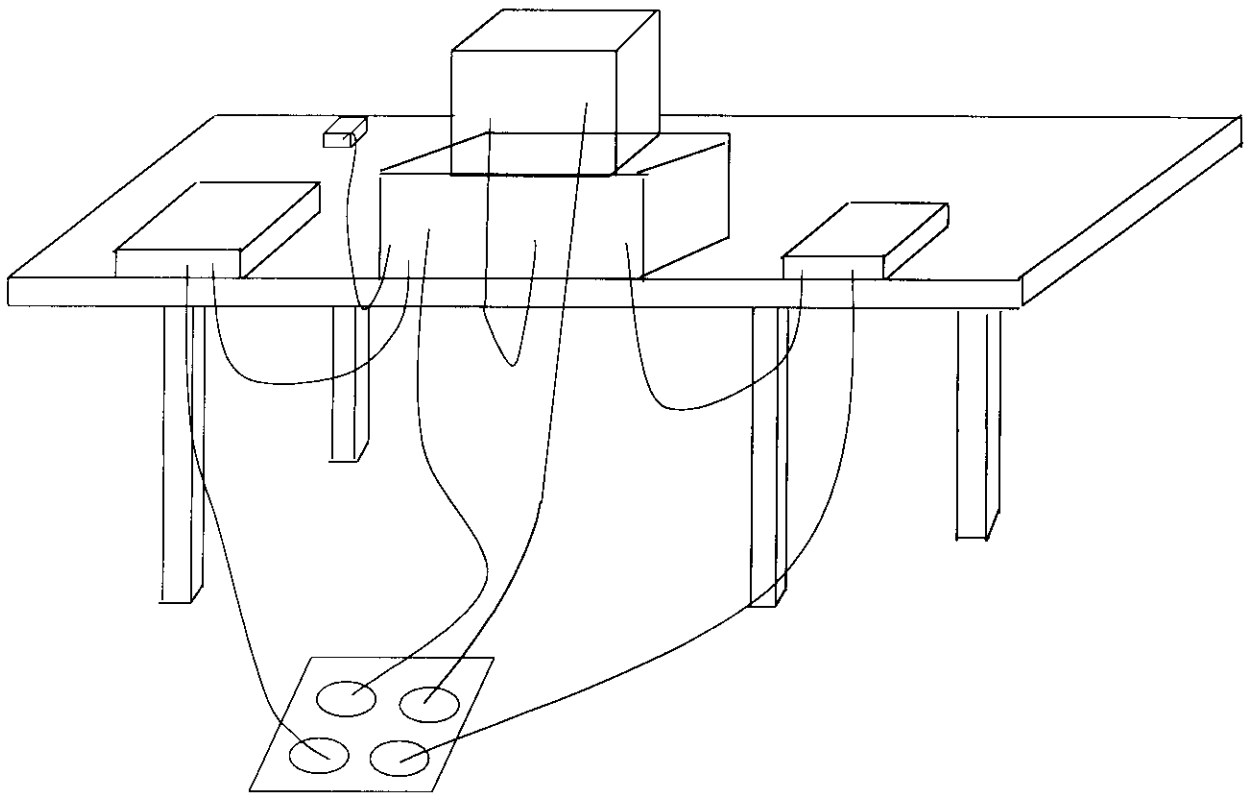



3.2 TEST PROCEDURES

Radiated emissions test was carried out by **PEP Testing Laboratory** at the open field test site authorized by FCC .

The EUT and supporting equipments were setup with the EMI diagnostic software .

- a. setting up the EUT under normally position , and scanning it from 30 MHz to 1000 MHz , then recording those narrow band noises which cannot be 6 dBuV below lower bound . Both horizontal and vertical antenna are measured from 1 meter height to 4.0 meter height , and turntable rotate 360 degrees .
- b. fixing the EUT rear face to antenna and antenna 1.0 meter height . We adjusted I/O cables to find the highest coupling noise and moved the height of antenna from 1 to 4 meters , then rotated the turntable simultaneously .
- c. checking following step b. all points which were recorded in step a.
- d. changing the peripherals position , and routine steps a. b. c.

The highest emissions were recorded in the RFI test report .



PEP Testing Laboratory

4. DESCRIPTION FOR EUT TESTING CONFIGURATION

** TEST PROCEDURE ----

- (A) The EUT was PC mouse with 9 pins D type connector or PS/2 connector , for more detail information about the EUT , please refer user's manual .
- (B) When EUT was tested , it's designated as COM.2 and enabled by FCC EMI test program , both types of connector were tested and the worst case datas were recorded in this RFI report .
- (C) After the EUT was setup , we did the conducted emission test in the shielded room and the worst case placement finding as the ANSI C63.4 requirement ; similarly , the radiated emission test was done at the open field site .
- (D) If the peak value of the noise can't under Non-consumer equipment limit 3 dBuV more , we'll change Biconical antenna or Log-periodic antenna for Dipole antenna and record its Quasi-Peak value , making sure it can under 6 dBuV at least .
- (E) In the RFI test report , we provided the worst conducted emission testing data in page C-1.*
For the radiated emission test , the worst data recorded in the page R-1.*

** I/O DATA CABLES INFORMATIONS ---

Please refer the page 9 .



5. SUPPORTING DEVICES TO TEST

SUPPORT UNIT 1. - - - - PERSONAL COMPUTER

Manufacturer : Jm Computer Inc.
Model Number : C486SDX-SDT
Power Supply Type : Switching
Power Cord : Shielded, Detachable, 1.2m
Data Cable : Shielded, Detachable, 1.2m
FCC ID : K25C486SDX-SDT

SUPPORT UNIT 2. - - - - MONITOR

Manufacturer : Acer Peripherals Inc.
Model Number : 7134T
Power Supply Type : Switching
Power Cord : Shielded, Detachable, 1.2m
Data Cable : Shielded, Undetachable, 1m
FCC ID : JVP7134T

SUPPORT UNIT 3. - - - - PRINTER

Manufacturer : Hewlett-Packard Singapore Pte Ltd.
Model Number : HP 2225C'
Power Supply Type : Linear
Power Cord : Non-Shielded, Detachable, 1.2m
Data Cable : Shielded, Detachable, 1m. 2464
FCC ID : DSI6XU2225



PEP Testing Laboratory

SUPPORT UNIT 4. ----- MODEM

Manufacturer : ACEEX
Model Number : 1414
Power Supply Type : Linear
Power Cord : Non-Shielded, Detachable, 1.2m
Data Cable : Shielded, Detachable, 1m
FCC ID : IFAXDM1414

SUPPORT UNIT 5. ----- KEYBOARD

Manufacturer : Acer Peripherals Inc.
Model Number : 6311-KW
Power Supply Type : N/A
Power Cord : N/A
Data Cable : Shielded, Undetachable, 1.2m
FCC ID : JVPKBS-WIN



6. TEST CONFIGURATION

Radiated emission detector function :

- (1) 30MHZ~1GHZ : Quasi-Peak Value
Resolution BW : 120KHZ Video BW : 300KHZ
- (2) above 1GHZ : Quasi-Peak value and Average Value
Resolution BW : 1MHZ Video BW : 1MHZ
* either Q. P. or average value will be recorded
in the report

Conducted emission detector function :

- (1) 450KHZ~30MHZ : Quasi-Peak Value
Resolution BW : 9KHZ Video BW : 30KHZ

The else descriptions : N/A

Conducted Emission Test Photo. : Page C-1

Test Data : Hot C-1-1
Neutral C-1.2

Radiated Emission Test Photo. : Page R-1

Test Data : Horizontal R-1-1
Vertical R-1-2



PEP Testing Laboratory

CONDUCTED EMISSIONS TEST DATA

Note : HOT LINE TEST

(RS 232)

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
0.657	42.60	- 5.40	48.00	60.45	0.39	1.76	20.00
1.396	31.04	-16.96	48.00	48.54	0.74	1.76	20.00
5.296	29.76	-18.24	48.00	47.08	0.83	1.85	20.00
6.419	35.61	-12.39	48.00	52.77	0.99	1.85	20.00
7.306	31.65	-16.35	48.00	48.67	1.13	1.85	20.00
9.433	32.04	-15.96	48.00	49.35	0.84	1.85	20.00
10.467	34.74	-13.26	48.00	51.98	0.94	1.81	20.00
12.093	35.30	-12.70	48.00	52.37	1.09	1.83	20.00
12.979	33.75	-14.25	48.00	50.74	1.16	1.85	20.00
14.545	31.57	-16.43	48.00	48.41	1.27	1.89	20.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line



PEP Testing Laboratory

CONDUCTED EMISSIONS TEST DATA

Note : NEUTRAL LINE TEST

(RS 232)

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
0.568	42.44	- 5.56	48.00	60.32	0.37	1.75	20.00
0.923	36.22	-11.78	48.00	54.03	0.45	1.75	20.00
3.316	31.75	-16.25	48.00	48.92	1.03	1.80	20.00
6.419	31.63	-16.37	48.00	48.79	0.99	1.85	20.00
7.306	32.46	-15.54	48.00	49.48	1.13	1.85	20.00
9.079	31.80	-16.20	48.00	49.12	0.81	1.87	20.00
9.433	33.74	-14.26	48.00	51.05	0.84	1.85	20.00
10.408	36.00	-12.00	48.00	53.25	0.94	1.81	20.00
12.388	35.39	-12.61	48.00	52.44	1.11	1.84	20.00
14.102	31.81	-16.19	48.00	48.69	1.24	1.88	20.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss – Preamp Factor
2. Over Limit = Level – Limit Line



PEP Testing Laboratory

RADIATED EMISSIONS TEST DATA

Antenna polarization : HORIZONTAL ; Test distance : 3 m ;

(RS 232)

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
72.018	22.44	-17.56	40.00	32.38	9.16	0.90	20.00
120.011	25.36	-18.14	43.50	32.40	11.80	1.16	20.00
133.330	17.58	-25.92	43.50	23.94	12.32	1.31	20.00
137.673	22.77	-20.73	43.50	28.90	12.50	1.37	20.00
201.100	23.66	-19.84	43.50	26.87	14.98	1.81	20.00
273.200	28.91	-17.09	46.00	26.58	19.89	2.44	20.00
277.700	30.99	-15.01	46.00	28.36	20.15	2.48	20.00
301.705	19.14	-26.86	46.00	21.69	14.74	2.70	20.00
335.500	17.58	-28.42	46.00	20.41	14.43	2.74	20.00
366.500	25.64	-20.36	46.00	27.03	15.83	2.77	20.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line



PEP Testing Laboratory

RADIATED EMISSIONS TEST DATA

Antenna polarization : VERTICAL ; Test distance : 3 m ;

(RS 232)

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
60.790	21.65	-18.35	40.00	31.65	9.19	0.81	20.00
66.090	22.08	-17.92	40.00	32.08	9.14	0.86	20.00
83.832	23.76	-16.24	40.00	33.22	9.64	0.90	20.00
120.013	27.86	-15.64	43.50	34.90	11.80	1.16	20.00
199.500	23.31	-20.19	43.50	26.69	14.83	1.79	20.00
216.023	25.28	-20.72	46.00	27.04	16.30	1.94	20.00
301.100	23.75	-22.25	46.00	26.30	14.75	2.70	20.00
369.800	24.73	-21.27	46.00	26.02	15.93	2.77	20.00
388.300	26.19	-19.81	46.00	26.92	16.48	2.79	20.00
467.920	28.41	-17.59	46.00	27.89	17.44	3.08	20.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss – Preamp Factor
2. Over Limit = Level – Limit Line



PEP Testing Laboratory

Measuring Instruments Listing :

Instrument	Manufacturer & Model	Serial Number	Band Width	Next Cal. Date	Cal. Interval
Receiver	ROHDE & SCHWARZ ESVS 30	8633421012	20 MHz to 1 GHz	Nov. 2 1998	1 year
Spectrum * Analyzer	Advantest 3261A	91720076	9 MHz to 2.6 GHz	Dec. 03 1998	1 year
Spectrum * Analyzer	HP 8591A	3225A03039	9 MHz to 1.8 GHz	Jan. 04 1999	1 year
Bi-Log Antenna	CHASE Electr. CBL 6111B	1968	20 MHz to 1 GHz	Aug. 23 1998	1 year
Horn Antenna	COM-Power AH-118	10056	1 GHz to 18 GHz	Jun. 16 1998	1 year
LISN	EMCO 3825/2	93112150	9 KHz to 100 MHz	Oct. 31 1998	1 year
LISN	Kokuyo KNW-242	8-837-7	9 KHz to 30 MHz	Jan. 03 1999	1 year

* The Model 3261A has build-in the detector function of the average and additional Q.P. adapter inside the spectrum analyzer.

* The Model 8591A has build-in the detector function of the Q.P. adapter.