


# TT01 Quick Start Guide V0.0.3

- Explore view :



- LCD

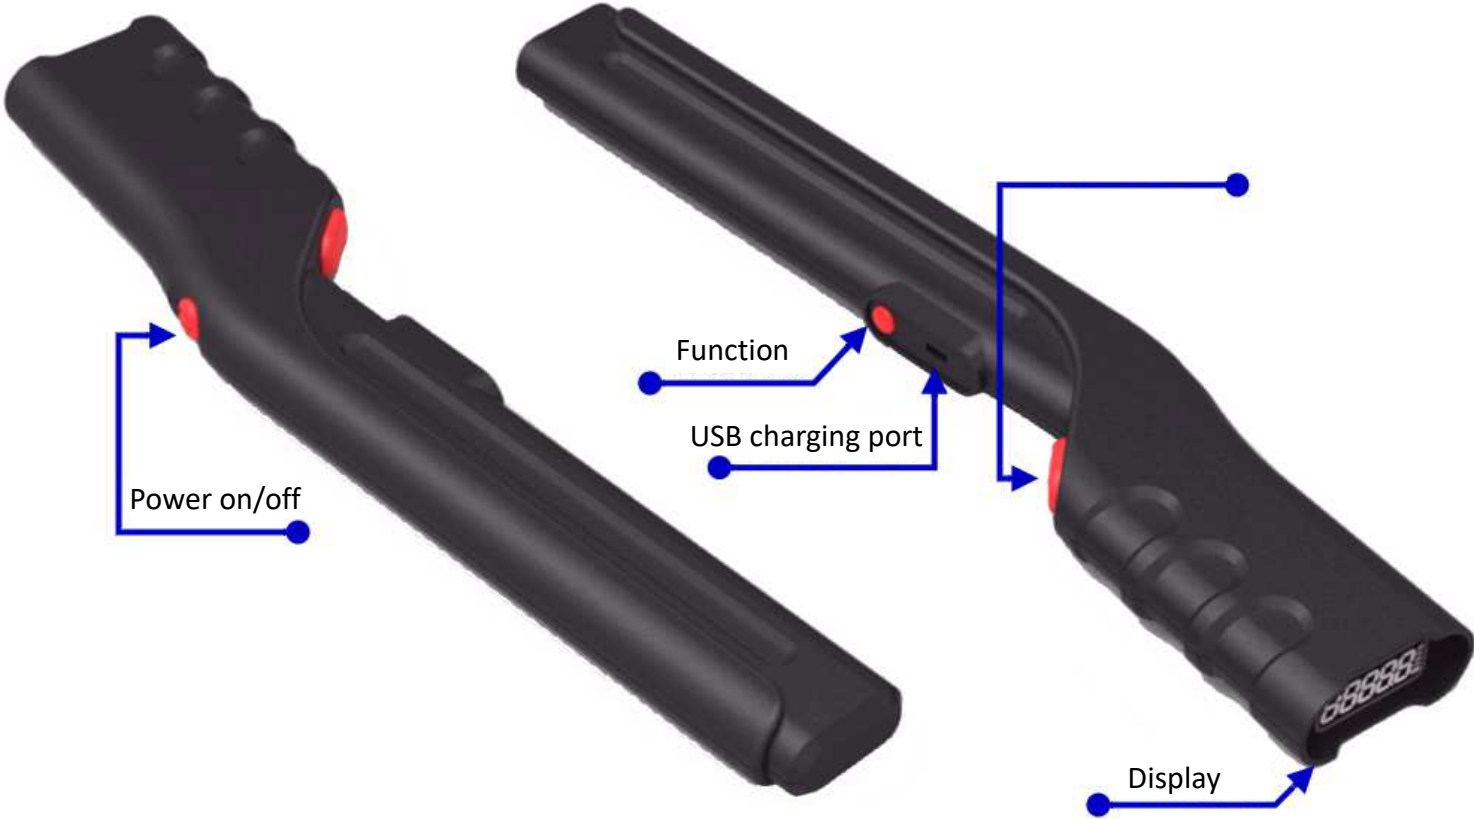

ID/Pressure/  
Temperature



Battery level





Pressure unit



Sensor ID

## Power on

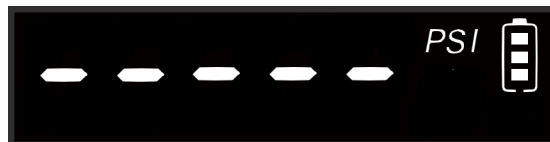








## Power off




- In the powered mode, the power button presses for three seconds, the LCD screen is active, and a beep is heard to indicate that tool is turned off.
- If TT01 is idle for 10 minutes, it will automatically shut down.
- If the battery level is too low, you will hear three short beeps and then the tool will automatically shut down after 10 seconds.

## Change the pressure unit


- Change sequence:  
PSI → KPA → BAR

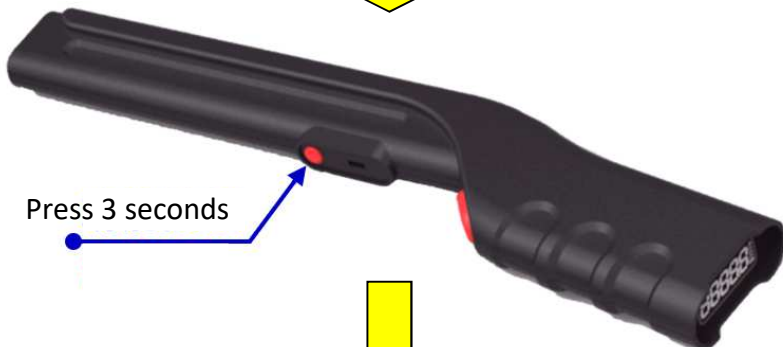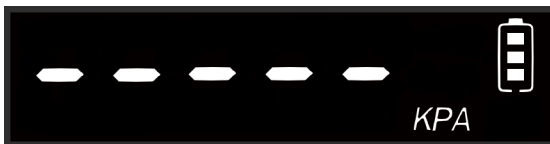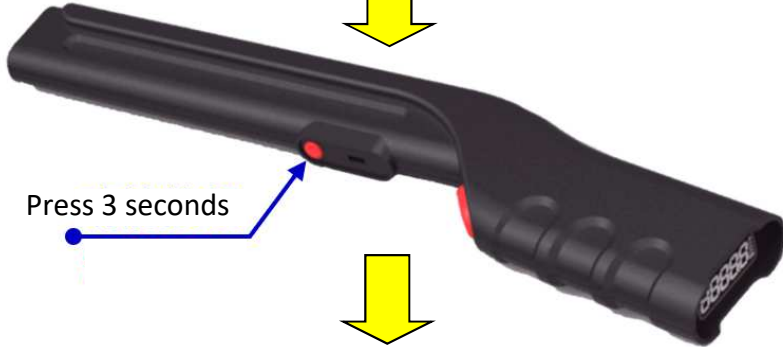

## Wake-up TPMS

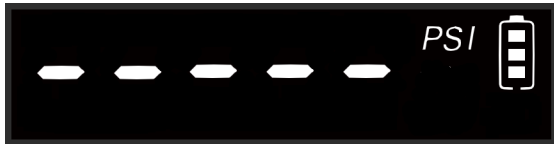

Standby or pressure screen

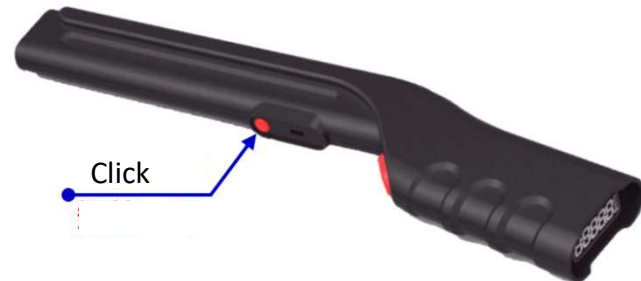


Click the function button again to cancel interactive display and change to manual switching.



Constant beeps

2 Beeps

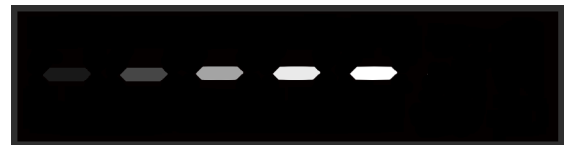

Enter wake-up process:

To cancel, click trigger button again.





Wake-up successful:

Interactive display the tire pressure and ID.

- Wake-up is unsuccessful and tool sends long beep if TT01 can't receive any data in 20 seconds.

## Battery charging

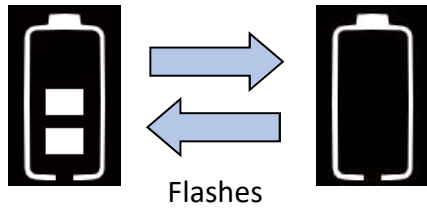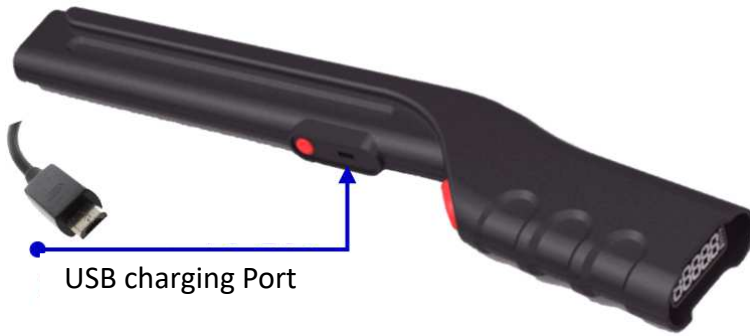

- Plug Micro USB into the USB charging port, the battery icon is flashing until the battery is full and the battery icon stops flashing.
- TT01 will start up if Micro USB plugs into charging port.
- In the battery charging mode, the TT01 will be canceled automatically shut down until the Micro USB is unplugged.

### ***Federal Communication Commission Interference Statement***

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- . Reorient or relocate the receiving antenna.
- . Increase the separation between the equipment and receiver.
- . Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- . Consult the dealer or an experienced radio/TV technician for help.

**FCC Caution:** To assure continued compliance, any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. (Example - use only shielded interface cables when connecting to computer or peripheral devices).

## ***FCC Radiation Exposure Statement***

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 0.5 centimeters between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The antennas used for this transmitter must be installed to provide a separation distance of at least 0.5 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.