



# element

**Resideo (A Honeywell Company)**

**Redlink 3.0 Indoor sensor hub**

**FCC 15.247:2023**

**RSS-247 Issue 2:2017**

**RSS-Gen Issue 5:2018+A1:2019+A2:2021**

**902 - 928 MHz FHSS transceiver**

**Report: ADEM0043.1 Rev. 0, Issue Date: January 18, 2024**



*This report must not be used to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government. This Report shall not be reproduced, except in full without written approval of the laboratory.*

# TABLE OF CONTENTS



Section	Page Number
Certificate of Test .....	3
Revision History .....	5
Accreditations.....	6
Facilities .....	7
Measurement Uncertainty .....	8
Test Setup Block Diagrams.....	9
Product Description.....	12
Power Settings and Antenna Information .....	13
Configurations .....	14
Modifications .....	15
Powerline Conducted Emissions (Transmitter) .....	16
Spurious Radiated Emissions .....	21
Duty Cycle.....	22
Carrier Frequency Separation .....	27
Number of Hopping Frequencies .....	30
Dwell Time .....	33
Output Power .....	37
Equivalent Isotropic Radiated Power (EIRP).....	40
Band Edge Compliance .....	43
Band Edge Compliance - Hopping Mode .....	46
Emissions Bandwidth (dB) .....	49
Occupied Bandwidth (99%).....	52
Spurious Conducted Emissions .....	55
End of Report.....	59

# CERTIFICATE OF TEST



**Last Date of Test: October 20, 2023**  
**Resideo (A Honeywell Company)**  
**EUT: Redlink 3.0 Indoor sensor hub**

## Radio Equipment Testing

### Standards

Specification	Method
FCC 15.247:2023	ANSI C63.10:2013
RSS-247 Issue 2:2017	
RSS-Gen Issue 5:2018+A1:2019+A2:2021	

### Guidance

FCC KDB 558074 v05r02:2019
----------------------------

### Results

Test Description	Result	FCC Section(s)	RSS Section(s)	ANSI C63.10 Section(s)	Comments
Powerline Conducted Emissions (Transmitter)	Pass	15.207	RSS-Gen 8.8	6.2	
Spurious Radiated Emissions	Pass	15.247(d)	RSS-247 5.5	6.5, 6.6	
Duty Cycle	Evaluated	15.247	RSS-Gen 3.2	7.5	The test software allows the EUT to operate at 100% Duty Cycle.
Carrier Frequency Separation	Pass	15.247(a)(1)	RSS-247 5.1(b)	7.8.2	
Number of Hopping Frequencies	Pass	15.247(a)(1)	RSS-247 5.1(d)	7.8.3	
Dwell Time	Pass	15.247(a)(1)	RSS-247 5.1(d)	7.8.4	
Output Power	Pass	15.247(b)	RSS-247 5.4(d)	7.8.5	
Equivalent Isotropic Radiated Power (EIRP)	Pass	15.247(b)	RSS-247 5.4(d)	7.8.5	
Band Edge Compliance	Pass	15.247(d)	RSS-247 5.5	7.8.6	
Band Edge Compliance - Hopping Mode	Pass	15.247(d)	RSS-247 5.5	7.8.6	
Emissions Bandwidth (dB)	Pass	15.247(a)	RSS-247 5.2(a)	7.8.7	
Occupied Bandwidth (99%)	Evaluated	15.247(a)	RSS-Gen 6.7	7.8.7	There is no compliance requirement to be met by this test
Spurious Conducted Emissions	Pass	15.247(d)	RSS-247 5.5	7.8.8	
Power Spectral Density	N/A	15.247(e)	RSS-247 5.2(b)	11.10.2	Not required for FHSS devices.
Powerline Conducted Emissions (Receiver)	N/A	15.101, 15.107	RSS-Gen 5.2	ANSI C63.4 - 12.2.4	Not included per FCC 15.101 as this will be covered under SDoC rules for the FCC. RSS-Gen section 7 stated receiver requirements only apply to standalone receivers operating in the 30-960 MHz band and this is not a standalone receiver.

*Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.*

# CERTIFICATE OF TEST



Radiated Emissions for Receiver	N/A	15.101, 15.109	RSS-Gen 5.2	ANSI C63.4 - 12.2.5	Not included per FCC 15.101 as this will be covered under SDoC rules for the FCC. RSS-Gen section 7 stated receiver requirements only apply to standalone receivers operating in the 30-960 MHz band and this is not a standalone receiver.
---------------------------------	-----	----------------	-------------	---------------------	---

## Deviations From Test Standards

None

### Approved By:

James Morris, Operations Manager

*Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.*

# REVISION HISTORY



Revision Number	Description	Date (yyyy-mm-dd)	Page Number
00	None		

# ACCREDITATIONS AND AUTHORIZATIONS



---

## United States

**FCC** - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

**A2LA** - Each laboratory is accredited by A2LA to ISO / IEC 17025, and as a product certifier to ISO / IEC 17065 which allows Element to certify transmitters to FCC and IC specifications.

---

## Canada

**ISED** - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB) and as a CAB for the acceptance of test data.

---

## European Union

**European Commission** – Recognized as an EU Notified Body validated for the EMCD and RED Directives.

---

## United Kingdom

**BEIS** – Recognized by the UK as an Approved Body under the UK Radio Equipment and UK EMC Regulations.

---

## Australia/New Zealand

**ACMA** - Recognized by ACMA as a CAB for the acceptance of test data.

---

## Korea

**MSIT / RRA** - Recognized by KCC's RRA as a CAB for the acceptance of test data.

---

## Japan

**VCCI** - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

---

## Taiwan

**BSMI** – Recognized by BSMI as a CAB for the acceptance of test data.

**NCC** - Recognized by NCC as a CAB for the acceptance of test data.

---

## Singapore

**IDA** – Recognized by IDA as a CAB for the acceptance of test data.

---

## Israel

**MOC** – Recognized by MOC as a CAB for the acceptance of test data.

---

## Hong Kong

**OFCA** – Recognized by OFCA as a CAB for the acceptance of test data.

---

## Vietnam

**MIC** – Recognized by MIC as a CAB for the acceptance of test data.

---

## SCOPE

For details on the Scopes of our Accreditations, please visit:

[California](#)

[Minnesota](#)

[Oregon](#)

[Texas](#)

[Washington](#)




# FACILITIES

Testing was performed at the following location(s)

Location	Labs <sup>(1)</sup>	Address	A2LA <sup>(2)</sup>	ISED <sup>(3)</sup>	BSMI <sup>(4)</sup>	VCCI <sup>(5)</sup>	CAB <sup>(6)</sup>	FDA <sup>(7)</sup>
<input type="checkbox"/> California	OC01-17	41 Tesla Irvine, CA 92618 (949) 861-8918	3310.04	2834B	SL2-IN-E-1154R	A-0029	US0158	TL-55
<input checked="" type="checkbox"/> Minnesota	MN01-11	9349 W Broadway Ave. Brooklyn Park, MN 55445 (612) 638-5136	3310.05	2834E	SL2-IN-E-1152R	A-0109	US0175	TL-57
<input type="checkbox"/> Oregon	EV01-12	6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	3310.02	2834D	SL2-IN-E-1017	A-0108	US0017	TL-56
<input type="checkbox"/> Texas	TX01-09	3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	3310.03	2834G	SL2-IN-E-1158R	A-0201	US0191	TL-54
<input type="checkbox"/> Washington	NC01-05	19201 120th Ave NE Bothell, WA 98011 (425) 984-6600	3310.06	2834F	SL2-IN-E-1153R	A-0110	US0157	TL-67
<input type="checkbox"/> Offsite	N/A	See Product Description	N/A	N/A	N/A	N/A	N/A	N/A

See data sheets for specific labs

- (1) The lab designations denote individual rooms within each location. (OC01, OC02, OC03, etc.)
- (2) A2LA Certificate No.
- (3) ISED Company No.
- (4) BSMI No.
- (5) VCCI Site Filing No.
- (6) CAB Identifier. Recognized Phase I CAB for ISED, ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA
- (7) FDA ASCA No.

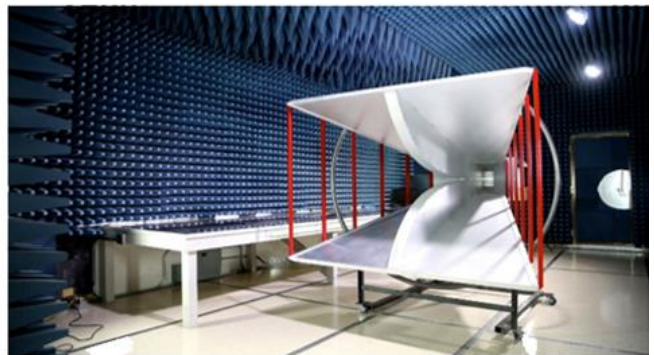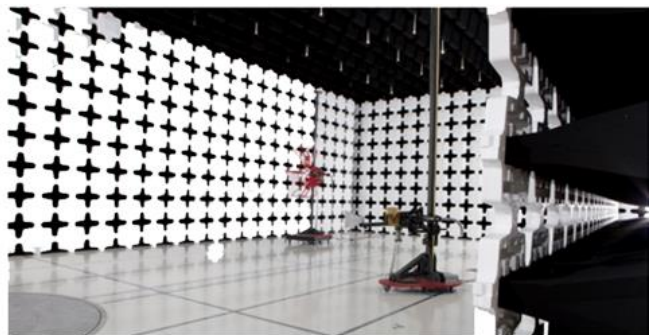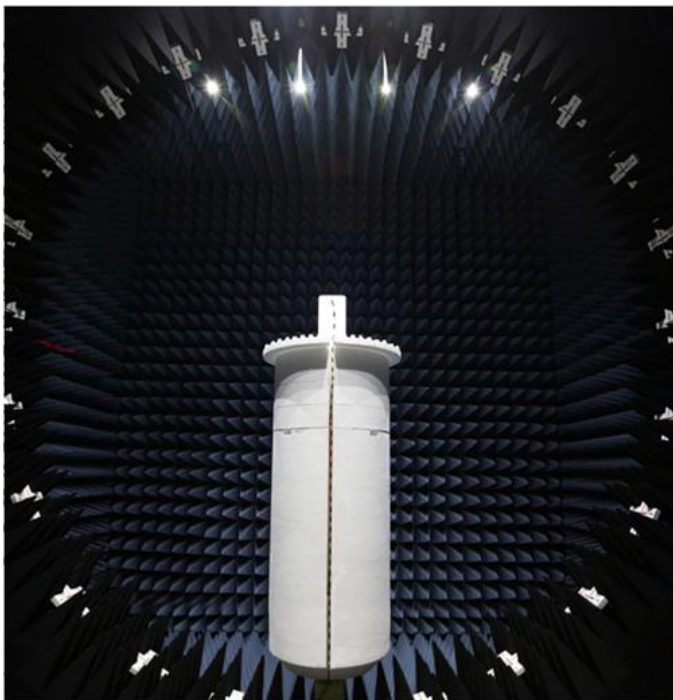

# MEASUREMENT UNCERTAINTY



## Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (k=2) can be found in the table below. A lab specific value may also be found in the applicable test description section. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable) and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

### Various Measurements

Test	All Labs (+/-)
Frequency Accuracy (%)	0.0007
Amplitude Accuracy (dB)	1.2
Conducted Power (dB)	1.2
Radiated Power via Substitution (dB)	0.7
Temperature (degrees C)	0.7
Humidity (% RH)	2.5
Voltage (AC) (%)	1
Voltage (DC) (%)	0.7

### Field Strength Measurements (dB)

Range	MN05 (+/-)	MN11 (+/-)
10kHz-30MHz	1.8	N/A
30MHz-1GHz 3m	4.6	N/A
1GHz-6GHz	5.1	N/A
6GHz-40GHz	5.2	N/A

### AC Powerline Conducted Emissions Measurements (dB)

Range	MN11 (+/-)	MN03 (+/-)
9kHz-150kHz LISN	N/A	3.6
150kHz-30MHz LISN	N/A	3.2
150kHz-30MHz CVP	N/A	3
150kHz-30MHz Telecom-ISN	N/A	4.4




# TEST SETUP BLOCK DIAGRAMS

## Measurement Bandwidths

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

Unless otherwise stated, measurements were made using the bandwidths and detectors specified. No video filter was used.


## Antenna Port Conducted Measurements

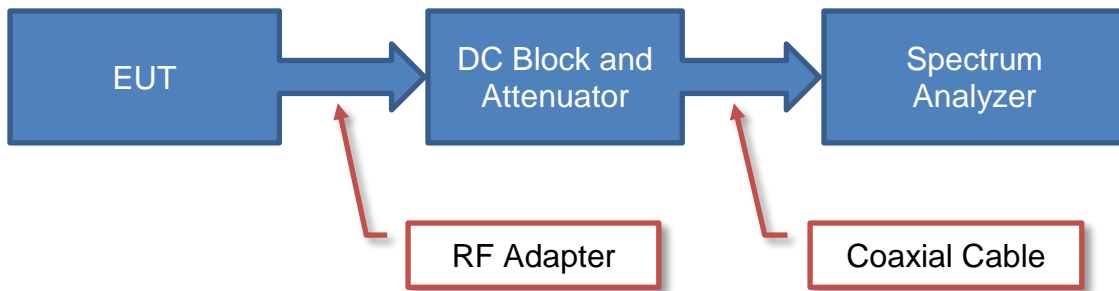

### Sample Calculation (logarithmic units)

$$\begin{array}{r}
 \text{Measured Value} \\
 71.2
 \end{array}
 =
 \begin{array}{r}
 \text{Measured Level} \\
 42.6
 \end{array}
 +
 \begin{array}{r}
 \text{Reference Level Offset} \\
 28.6
 \end{array}$$

## Near Field Test Fixture Measurements

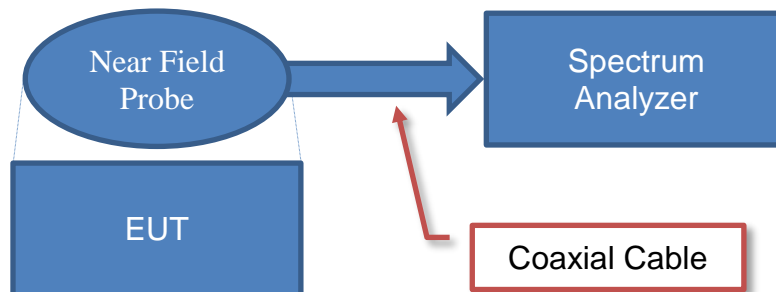


### Sample Calculation (logarithmic units)

$$\begin{array}{r}
 \text{Measured Value} \\
 71.2
 \end{array}
 =
 \begin{array}{r}
 \text{Measured Level} \\
 42.6
 \end{array}
 +
 \begin{array}{r}
 \text{Reference Level Offset} \\
 28.6
 \end{array}$$

# TEST SETUP BLOCK DIAGRAMS

## Emissions Measurements

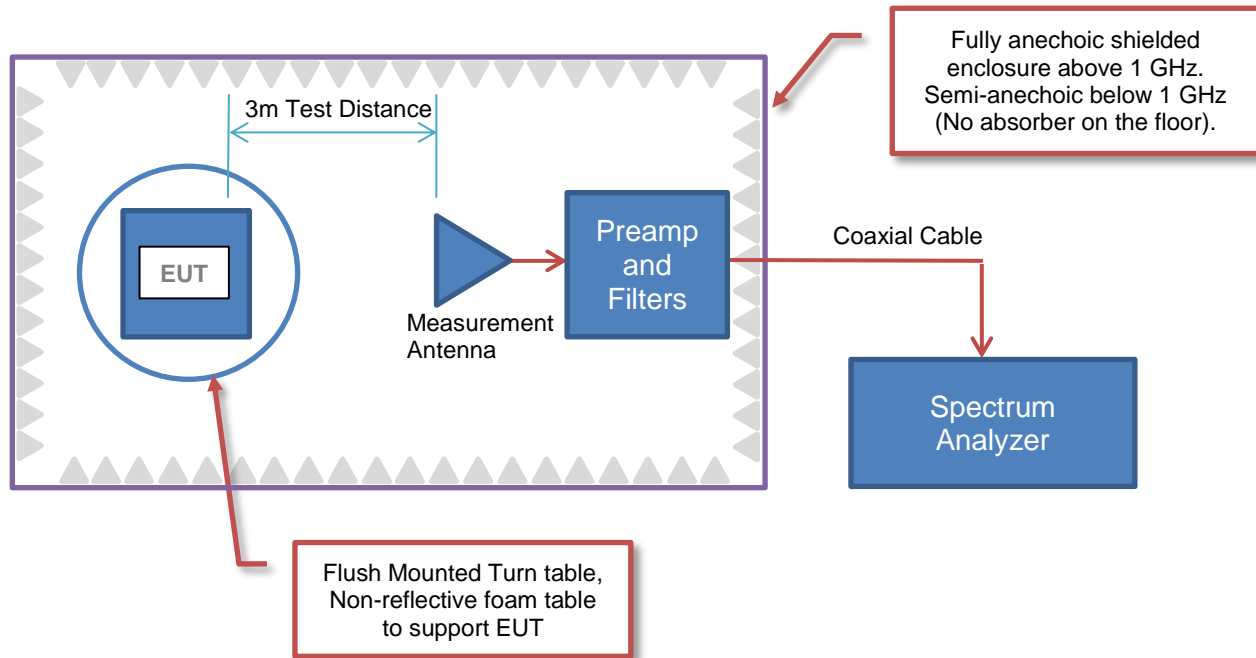

## Sample Calculation (logarithmic units)

### Radiated Emissions:

Measured Level (Amplitude)	Factor			Distance Adjustment Factor	External Attenuation	Field Strength
	Antenna Factor	Cable Factor	Amplifier Gain			
42.6	28.6	3.1	40.8	0.0	0.0	33.5

42.6 + 28.6 + 3.1 - 40.8 + 0.0 + 0.0 = 33.5

### Conducted Emissions:

Measured Level (Amplitude)	Factor		External Attenuation	Adjusted Level
	Transducer Factor	Cable Factor		
26.7	0.3	0.1	20.0	47.1

26.7 + 0.3 + 0.1 + 20.0 = 47.1

### Radiated Power (ERP/EIRP) – Substitution Method:


Measured Level into Substitution Antenna (Amplitude dBm)	Substitution Antenna Factor (dBi)	EIRP to ERP (if applicable)	Measured power (dBm ERP/EIRP)
10.0	6.0	2.15	13.9/16.0

10.0 + 6.0 - 2.15 = 13.9/16.0

# TEST SETUP BLOCK DIAGRAMS

## Bore Sighting (>1GHz)

The diameter of the illumination area is the dimension of the line tangent to the EUT formed by 3 dB beamwidth of the measurement antenna at the measurement distance. At a 3 meter test distance, the diameter of the illumination area was 3.8 meters at 1 GHz and greater than 2.1 meters up to 6 GHz. Above 1 GHz, when required by the measurement standard, the antenna is pointed for both azimuth and elevation to maintain the receive antenna within the cone of radiation from the EUT. The specified measurement detectors were used for comparison of the emissions to the peak and average specification limits.

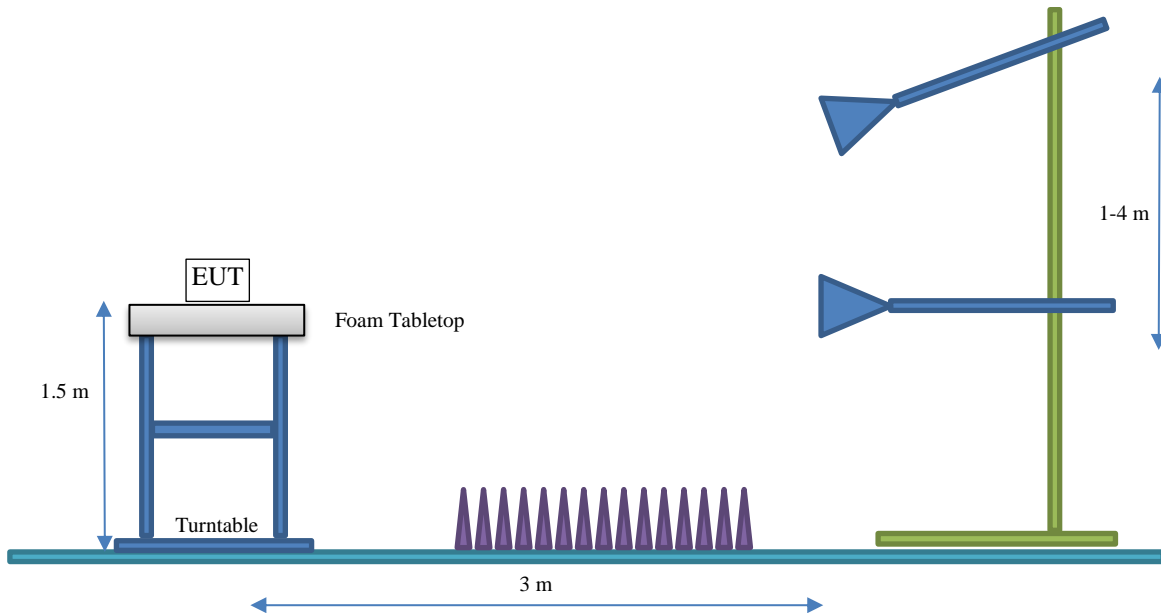

# PRODUCT DESCRIPTION



## Client and Equipment under Test (EUT) Information

<b>Company Name:</b>	Resideo (A Honeywell Company)
<b>Address:</b>	251 Little Falls Drive
<b>City, State, Zip:</b>	Wilmington, DE 19808
<b>Test Requested By:</b>	Christian Fouth
<b>EUT:</b>	Redlink 3.0 Indoor sensor hub and Redlink 3.0 Outdoor sensor hub
<b>First Date of Test:</b>	October 18, 2023
<b>Last Date of Test:</b>	October 20, 2023
<b>Receipt Date of Samples:</b>	October 18, 2023
<b>Equipment Design Stage:</b>	Production
<b>Equipment Condition:</b>	No Damage
<b>Purchase Authorization:</b>	Verified

## Information Provided by the Party Requesting the Test

### Functional Description of the EUT:

Sensor hub for remote monitoring and diagnostic solution that alerts if there are issues with a customer's HVAC equipment

### Testing Objective:

Seeking to demonstrate compliance in the 902 - 928 MHz band for operation under FCC 15.247:2023 and RSS-247 Issue 2:2017, RSS-Gen Issue 5:2018+A1:2019+A2:2021 specifications under technology category Frequency Hopping - Other.

### Testing Justification:

The radio circuitry is identical for both the Redlink 3.0 Indoor Sensor Hub (FCC ID: HS9-LPX3100T01 and IC:573R-LPX3100T01) and the Redlink 3.0 Outdoor Sensor Hub (FCC ID: HS9-LPX1200T01 and IC:573R-LPX1200T01). Direct connect testing was only completed on the Outdoor Sensor Hub, the test results are representative of both models.

# POWER SETTINGS AND ANTENNAS



The power settings, antenna gain value(s) and cable loss (if applicable) used for the testing contained in this report were provided by the customer and will affect the validity of the results. Element assumes no responsibility for the accuracy of this information. The power settings below reflect the maximum power that the EUT is allowed to transmit at during normal operation.

## ANTENNA GAIN (dBi)

Type	Provided by:	Frequency Range (MHz)	Gain (dBi)
PCB Trace	Ademco, Inc	902-928	0.01

The EUT was tested using the power settings provided by the manufacturer which were based upon:

- Test software settings      Test software/firmware installed on EUT: XTR  
 Rated power settings

## SETTINGS FOR ALL TESTS IN THIS REPORT

Modulation Types	Position (if multiple channels)	Power Setting (dBm)
Modulation: 2-FSK Data rate: 38.4k baud	Low Channel	12.5
	Mid Channel	12.5
	High Channel	12.5

# CONFIGURATIONS



## Configuration ADEM0042-2

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Redlink 3.0 Outdoor sensor hub	Ademco, Inc.	Redlink 3.0	49673010000169

Peripherals in Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Capacitor Clamp (2216)	None	2216 (50A/100mA)	None
Capacitor Clamp (2214)	None	2214 (20A/100mA)	None
Capacitor Clamp (2214)	None	2214 (20A/100mA)	None

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
2 Wires Cable	No	1.1m	No	Redlink 3.0 Outdoor sensor hub	Capacitor Clamp
2 Wires Cable	No	1.1m	No	Redlink 3.0 Outdoor sensor hub	Capacitor Clamp
2 Wires Cable	No	1.1m	No	Redlink 3.0 Outdoor sensor hub	Capacitor Clamp

## Configuration ADEM0043-2

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Redlink 3.0 Indoor sensor hub	Resideo (A Honeywell Company)	Redklink 3.0	49673020000147

Peripherals in Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
DC Regulator (24VDC in)	None	R32347441-001 Rev.C	None
AC Adapter (24VDC Out)	CUI, Inc.	SW16-9-N	None
Capacitor Clamp (2214)	None	2214 (20A/100mA)	None
Capacitor Clamp (2214)	None	2214 (20A/100mA)	None
Capacitor Clamp (2216)	None	2216 (50A/100mA)	None

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Power Cable	No	1.9m	Yes	AC Adapter	DC Regulator
DC Power Cable	No	0.9m	No	DC Regulator	Redlink 3.0
2 Wire Cable	No	1.1m	No	Redlink 3.0	Capacitor Clamp
2 Wires Cable	No	1.1m	No	Redlink 3.0 Outdoor sensor hub	Capacitor Clamp
2 Wires Cable	No	1.1m	No	Redlink 3.0 Outdoor sensor hub	Capacitor Clamp

# MODIFICATIONS



## Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	2023-10-18	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	2023-10-18	Equivalent Isotropic Radiated Power (EIRP)	Modified from delivered configuration.	Ferrite added 2 cm from headphone connector side, Larid 28A0350-0B2 , no turns. Modification authorized by Connor Brewin.	EUT remained at Element following the test.
3	2023-10-18	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	2023-10-18	Emissions Bandwidth (dB)	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
5	2023-10-18	Occupied Bandwidth (99%)	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
6	2023-10-18	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
7	2023-10-19	Band Edge Compliance - Hopping Mode	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
8	2023-10-19	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
9	2023-10-19	Carrier Frequency Separation	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
10	2023-10-19	Number of Hopping Frequencies	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
11	2023-10-19	Dwell Time	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
12	2023-10-20	Powerline Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

# POWERLINE CONDUCTED EMISSIONS (TRANSMITTER)

## TEST DESCRIPTION

Using the mode of operation and configuration noted within this report, conducted emissions tests were performed. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Per the standard, an insulating material was also added to ground plane between the EUT's power and remote I/O cables. Equipment is tested with power cords that are normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network), the 50ohm measuring port is terminated by a 50ohm EMI meter or a 50ohm resistive load. All 50ohm measuring ports of the LISN are terminated by 50ohm. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Receiver	Gauss Instruments	TDEMI 30M	ARS	2023-04-26	2024-04-26
Cable - Conducted Cable Assembly	Northwest EMC	MNC, HGN, TYK, VAE	MNCA	2023-03-09	2024-03-09
LISN	Solar Electronics	9252-50-R-24-BNC	LIY	2023-04-02	2024-04-02

## MEASUREMENT UNCERTAINTY

Description		
Expanded k=2	3.2 dB	-3.2 dB

## CONFIGURATIONS INVESTIGATED

ADEM0043-2

## MODES INVESTIGATED

Transmitting Mid Ch 914.6 MHz, 2-FSK modulated



# POWERLINE CONDUCTED EMISSIONS (TRANSMITTER)



EUT:	Redlink 3.0 Indoor sensor hub	Work Order:	ADEM0043
Serial Number:	49673020000147	Date:	2023-10-20
Customer:	Resideo (A Honeywell Company)	Temperature:	22.1°C
Attendees:	None	Relative Humidity:	48%
Customer Project:	None	Bar. Pressure (PMSL):	1006 mb
Tested By:	Marcelo Aguayo	Job Site:	MN03
Power:	110VAC/60Hz	Configuration:	ADEM0043-2

## TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2023	ANSI C63.10:2013
RSS-Gen Issue 5:2018+A1:2019+A2:2021	ANSI C63.10:2013

## TEST PARAMETERS

Run #:	5	Line:	High Line	Add. Ext. Attenuation (dB):	0
--------	---	-------	-----------	-----------------------------	---

## COMMENTS



None

## EUT OPERATING MODES

Transmitting Mid Ch 914.6 MHz, 2-FSK modulated

## DEVIATIONS FROM TEST STANDARD

None

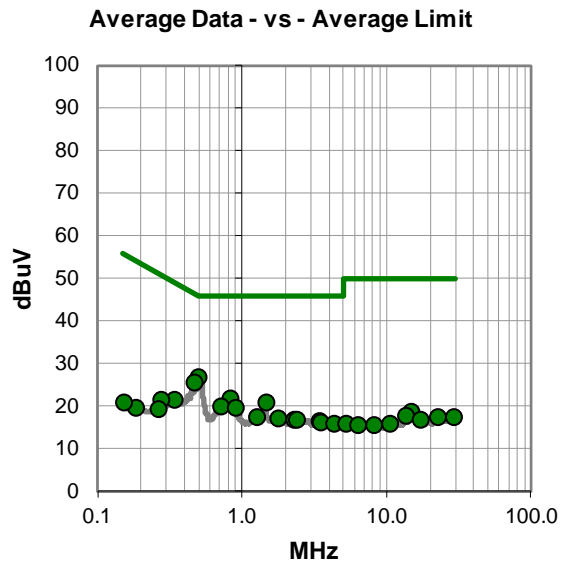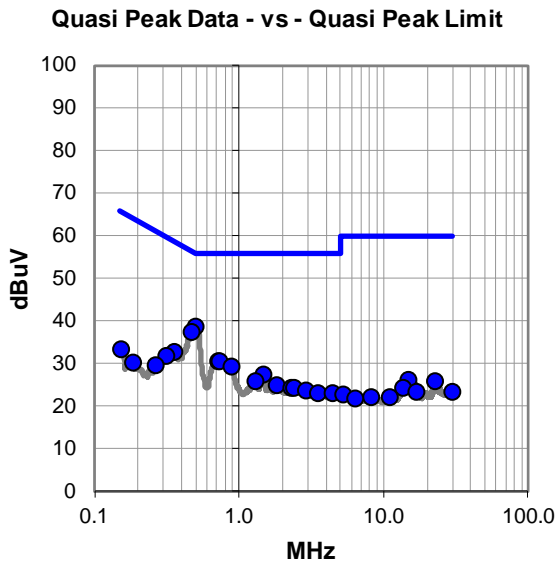

# POWERLINE CONDUCTED EMISSIONS (TRANSMITTER)



## RESULTS - Run #5

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
0.502	18.9	19.7	38.6	56.0	-17.4
0.472	17.8	19.7	37.5	56.5	-19.0
0.710	10.9	19.8	30.7	56.0	-25.3
0.737	10.9	19.8	30.7	56.0	-25.3
0.358	13.1	19.7	32.8	58.8	-26.0
0.884	9.4	19.8	29.2	56.0	-26.8
0.313	11.9	19.8	31.7	59.9	-28.2
1.471	7.6	19.9	27.5	56.0	-28.5
1.291	6.0	19.8	25.8	56.0	-30.2
1.809	4.9	19.9	24.8	56.0	-31.2
0.263	9.8	19.9	29.7	61.3	-31.6
2.309	4.2	20.1	24.3	56.0	-31.7
2.414	4.1	20.1	24.2	56.0	-31.8
2.898	3.5	20.1	23.6	56.0	-32.4
0.152	13.0	20.3	33.3	65.9	-32.6
3.508	3.0	20.2	23.2	56.0	-32.8
4.430	2.8	20.2	23.0	56.0	-33.0
15.002	5.2	21.0	26.2	60.0	-33.8
0.184	10.2	20.1	30.3	64.3	-34.0
22.662	3.9	22.1	26.0	60.0	-34.0
13.502	3.6	20.8	24.4	60.0	-35.6
16.963	2.1	21.3	23.4	60.0	-36.6
29.925	0.3	23.1	23.4	60.0	-36.6
5.242	2.6	20.1	22.7	60.0	-37.3
8.272	1.7	20.5	22.2	60.0	-37.8

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
0.498	7.0	19.7	26.7	46.0	-19.3
0.473	5.7	19.7	25.4	46.5	-21.1
0.831	2.0	19.8	21.8	46.0	-24.2
1.470	1.1	19.9	21.0	46.0	-25.0
0.710	0.2	19.8	20.0	46.0	-26.0
0.898	-0.2	19.8	19.6	46.0	-26.4
0.341	1.9	19.7	21.6	49.2	-27.6
1.267	-2.4	19.8	17.4	46.0	-28.6
1.796	-2.7	19.9	17.2	46.0	-28.8
0.278	1.7	19.9	21.6	50.9	-29.3
2.282	-3.4	20.1	16.7	46.0	-29.3
2.401	-3.4	20.1	16.7	46.0	-29.3
3.408	-3.7	20.2	16.5	46.0	-29.5
3.510	-4.0	20.2	16.2	46.0	-29.8
4.308	-4.2	20.2	16.0	46.0	-30.0
14.998	-2.2	21.0	18.8	50.0	-31.2
0.263	-0.6	19.9	19.3	51.3	-32.0
13.515	-3.2	20.8	17.6	50.0	-32.4
22.483	-4.8	22.1	17.3	50.0	-32.7
29.418	-5.8	23.1	17.3	50.0	-32.7
17.038	-4.5	21.3	16.8	50.0	-33.2
5.220	-4.2	20.1	15.9	50.0	-34.1
10.532	-4.8	20.6	15.8	50.0	-34.2
8.136	-4.8	20.5	15.7	50.0	-34.3
0.184	-0.4	20.1	19.7	54.3	-34.6

## CONCLUSION

Pass

Tested By

# POWERLINE CONDUCTED EMISSIONS (TRANSMITTER)



EUT:	Redlink 3.0 Indoor sensor hub	Work Order:	ADEM0043
Serial Number:	49673020000147	Date:	2023-10-20
Customer:	Resideo (A Honeywell Company)	Temperature:	22.1°C
Attendees:	None	Relative Humidity:	48%
Customer Project:	None	Bar. Pressure (PMSL):	1006 mb
Tested By:	Marcelo Aguayo	Job Site:	MN03
Power:	110VAC/60Hz	Configuration:	ADEM0043-2

## TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2023	ANSI C63.10:2013
RSS-Gen Issue 5:2018+A1:2019+A2:2021	ANSI C63.10:2013

## TEST PARAMETERS

Run #:	6	Line:	Neutral	Add. Ext. Attenuation (dB):	0
--------	---	-------	---------	-----------------------------	---

## COMMENTS



None

## EUT OPERATING MODES

Transmitting Mid Ch 914.6 MHz, 2-FSK modulated

## DEVIATIONS FROM TEST STANDARD

None

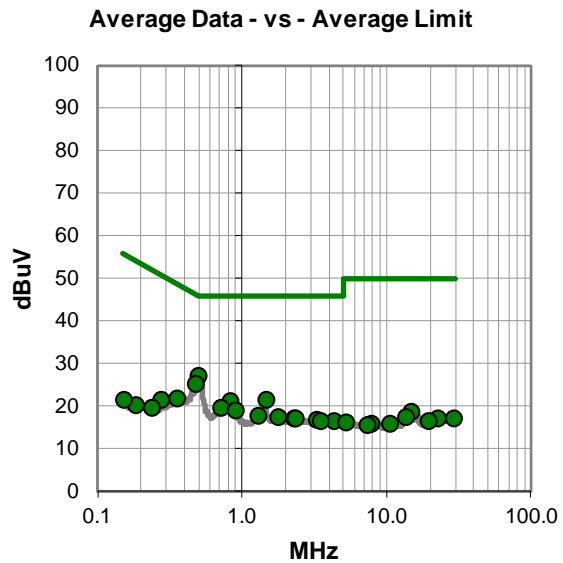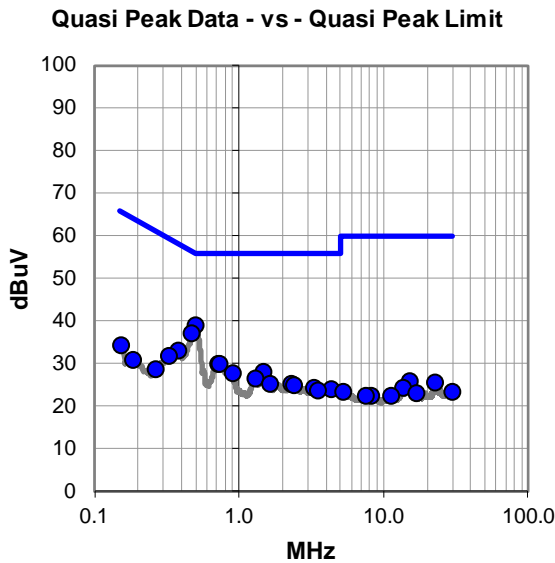

# POWERLINE CONDUCTED EMISSIONS (TRANSMITTER)



## RESULTS - Run #6

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
0.501	19.4	19.7	39.1	56.0	-16.9
0.472	17.4	19.7	37.1	56.5	-19.4
0.382	13.5	19.7	33.2	58.2	-25.0
0.710	10.0	19.8	29.8	56.0	-26.2
0.733	10.0	19.8	29.8	56.0	-26.2
0.329	12.1	19.7	31.8	59.5	-27.7
1.470	8.3	19.9	28.2	56.0	-27.8
0.896	7.8	19.8	27.6	56.0	-28.4
1.291	6.7	19.8	26.5	56.0	-29.5
1.645	5.2	19.9	25.1	56.0	-30.9
2.301	5.0	20.1	25.1	56.0	-30.9
2.378	4.9	20.1	25.0	56.0	-31.0
0.152	13.9	20.3	34.2	65.9	-31.7
3.305	4.0	20.2	24.2	56.0	-31.8
4.340	3.8	20.2	24.0	56.0	-32.0
3.510	3.6	20.2	23.8	56.0	-32.2
0.263	8.8	19.9	28.7	61.3	-32.6
0.184	10.9	20.1	31.0	64.3	-33.3
15.024	5.0	21.0	26.0	60.0	-34.0
22.823	3.5	22.1	25.6	60.0	-34.4
13.522	3.5	20.8	24.3	60.0	-35.7
5.242	3.3	20.1	23.4	60.0	-36.6
29.644	0.3	23.1	23.4	60.0	-36.6
16.981	1.7	21.3	23.0	60.0	-37.0
8.173	2.0	20.5	22.5	60.0	-37.5

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
0.499	7.4	19.7	27.1	46.0	-18.9
0.475	5.4	19.7	25.1	46.4	-21.3
1.470	1.6	19.9	21.5	46.0	-24.5
0.829	1.5	19.8	21.3	46.0	-24.7
0.710	-0.2	19.8	19.6	46.0	-26.4
0.356	2.1	19.7	21.8	48.8	-27.0
0.896	-0.8	19.8	19.0	46.0	-27.0
1.291	-2.2	19.8	17.6	46.0	-28.4
1.796	-2.6	19.9	17.3	46.0	-28.7
2.280	-3.0	20.1	17.1	46.0	-28.9
2.365	-3.1	20.1	17.0	46.0	-29.0
3.318	-3.5	20.2	16.7	46.0	-29.3
0.278	1.5	19.9	21.4	50.9	-29.5
4.308	-3.7	20.2	16.5	46.0	-29.5
3.511	-3.8	20.2	16.4	46.0	-29.6
14.973	-2.4	21.0	18.6	50.0	-31.4
13.518	-3.4	20.8	17.4	50.0	-32.6
0.235	-0.5	20.0	19.5	52.3	-32.8
22.471	-4.9	22.1	17.2	50.0	-32.8
29.415	-5.9	23.1	17.2	50.0	-32.8
19.363	-5.0	21.6	16.6	50.0	-33.4
5.210	-4.0	20.1	16.1	50.0	-33.9
0.184	0.2	20.1	20.3	54.3	-34.0
7.875	-4.6	20.4	15.8	50.0	-34.2
10.492	-4.8	20.6	15.8	50.0	-34.2

## CONCLUSION

Pass

Tested By

# SPURIOUS RADIATED EMISSIONS



## TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequencies (in no-hop, single channel mode) and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These “pre-scans” are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis if required, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

- QP = Quasi-Peak Detector
- PK = Peak Detector
- AV = RMS Detector

Measurements were made to satisfy the specific requirements of the test specification for out of band emissions as well as the restricted band requirements.

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.

Measurements within 2 MHz of the allowable band may have been taken using the integration method from ANSI C63.10 clause 11.13.3. This procedure uses the channel power feature of the spectrum analyzer to integrate the power of the emission within a 1 MHz bandwidth.

Where the radio test software does not provide for a duty cycle at continuous transmit conditions (> 98%) and the RMS (power average) measurements were made across the on and off times of the EUT transmissions, a duty cycle correction is added to the measurements using the formula of  $10 \cdot \log(1/dc)$ .

RMS measurements taken for a FHSS radio also may have a duty cycle correction subtracted using the formula  $10 \cdot \log(DC)$ , where DC is the worst-case dwell time of the radio while in a hopping mode in a 100 ms period.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Antenna - Biconilog	Ametek	CBL 6141B	AYS	2023-03-28	2025-03-28
Cable	ESM Cable Corp.	Bilog Cables	MNH	2023-10-08	2024-10-08
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	AVO	2023-10-08	2024-10-08
Filter - Low Pass	Micro-Tronics	LPM50004	LFK	2023-08-23	2024-08-23
Analyzer - Spectrum Analyzer	Agilent	E4446A	AAQ	2023-02-06	2024-02-06
Antenna - Double Ridge	ETS Lindgren	3115	AIP	2022-07-20	2024-07-20
Cable	ESM Cable Corp.	Double Ridge Guide Horn Cables	MNI	2023-01-14	2024-01-14
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVT	2023-01-14	2024-01-14
Attenuator	Fiarview Microwave	SA18H-20	VAF	2023-09-11	2024-09-11
Filter - High Pass	Micro-Tronics	HPM50108	LFM	2023-10-11	2024-10-11
Antenna - Standard Gain	ETS Lindgren	3160-07	AXP	NCR	NCR
Cable	ESM Cable Corp.	Standard Gain Horn Cables	MNJ	2023-01-14	2024-01-14
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AVV	2023-01-14	2024-01-14
Antenna - Standard Gain	ETS Lindgren	3160-08	AIQ	NCR	NCR
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AVW	2023-01-14	2024-01-14

# SPURIOUS RADIATED EMISSIONS



## MEASUREMENT UNCERTAINTY

Description		
Expanded k=2	5.2 dB	-5.2 dB

## FREQUENCY RANGE INVESTIGATED

30 MHz TO 18 GHz

## POWER INVESTIGATED

110VAC/60Hz

## CONFIGURATIONS INVESTIGATED

ADEM0043-2

## MODES INVESTIGATED

Transmitting Low, Mid, and High Channels (903, 914.5, and 926.4 MHz), 2-FSK modulated.

# SPURIOUS RADIATED EMISSIONS



EUT:	Redlink 3.0 Indoor sensor hub	Work Order:	ADEM0043
Serial Number:	49673020000147	Date:	2023-10-19
Customer:	Resideo (A Honeywell Company)	Temperature:	21.9°C
Attendees:	None	Relative Humidity:	49.5%
Customer Project:	None	Bar. Pressure (PMSL):	1006 mb
Tested By:	Marcelo Aguayo	Job Site:	MN05
Power:	110VAC/60Hz	Configuration:	ADEM0043-2

## TEST SPECIFICATIONS

Specification:	Method:
FCC 15.247:2023	ANSI C63.10:2013

## TEST PARAMETERS

Run #:	10	Test Distance (m):	3	Ant. Height(s) (m):	1 to 4(m)
--------	----	--------------------	---	---------------------	-----------

## COMMENTS


Test mode is 100% duty cycle.

## EUT OPERATING MODES

Transmitting Low, Mid, and High Channels (903, 914.5, and 926.4 MHz), 2-FSK modulated.

## DEVIATIONS FROM TEST STANDARD

None

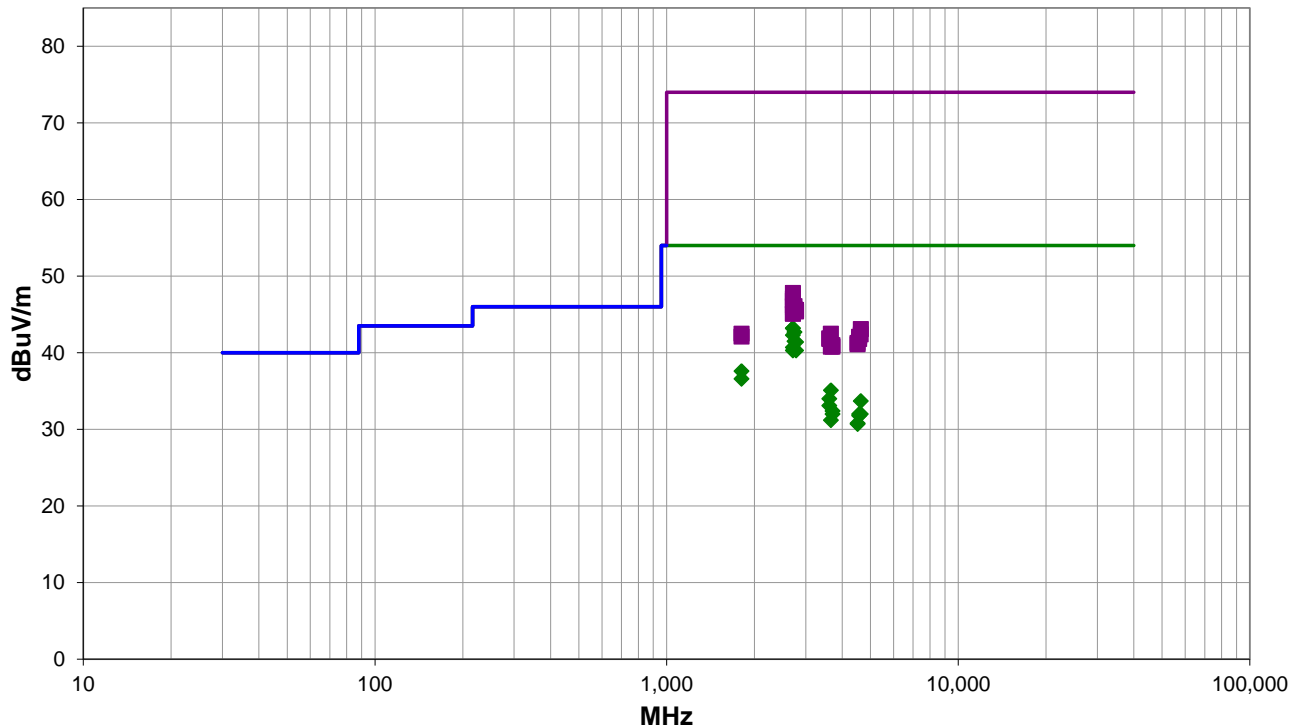

Run #: 10

■ PK    ◆ AV    ● QP

# SPURIOUS RADIATED EMISSIONS

## RESULTS - Run #10

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2709.042	48.7	-3.7	3.9	278.0	3.0	0.0	Vert	AV	0.0	45.0	54.0	-9.0	EUT On Side, Low Ch
2709.067	46.9	-3.7	1.1	54.0	3.0	0.0	Horz	AV	0.0	43.2	54.0	-10.8	EUT Horz, Low Ch
2708.967	46.9	-3.7	1.0	142.0	3.0	0.0	Horz	AV	0.0	43.2	54.0	-10.8	EUT Vert, Low Ch
2743.775	46.4	-3.7	1.2	41.9	3.0	0.0	Vert	AV	0.0	42.7	54.0	-11.3	EUT On Side, Mid Ch
2709.025	46.0	-3.7	1.0	149.9	3.0	0.0	Vert	AV	0.0	42.3	54.0	-11.7	EUT Vert, Low Ch
2743.800	45.2	-3.7	3.2	70.9	3.0	0.0	Horz	AV	0.0	41.5	54.0	-12.5	EUT Horz, Mid Ch
2779.225	44.9	-3.5	3.8	5.9	3.0	0.0	Vert	AV	0.0	41.4	54.0	-12.6	EUT On Side, High Ch
2709.008	44.4	-3.7	2.8	12.0	3.0	0.0	Horz	AV	0.0	40.7	54.0	-13.3	EUT On Side, Low Ch
2708.942	44.0	-3.7	1.0	66.0	3.0	0.0	Vert	AV	0.0	40.3	54.0	-13.7	EUT Horz, Low Ch
2779.217	43.8	-3.5	2.6	78.9	3.0	0.0	Horz	AV	0.0	40.3	54.0	-13.7	EUT Horz, High Ch
1806.000	41.8	-4.2	1.6	155.0	3.0	0.0	Horz	AV	0.0	37.6	54.0	-16.4	EUT Horz, Low Ch
1806.000	40.8	-4.2	1.5	294.9	3.0	0.0	Vert	AV	0.0	36.6	54.0	-17.4	EUT On Side, Low Ch
3658.392	36.4	-1.3	3.5	102.9	3.0	0.0	Horz	AV	0.0	35.1	54.0	-18.9	EUT Horz, Mid Ch
3611.967	35.1	-1.1	1.4	145.0	3.0	0.0	Horz	AV	0.0	34.0	54.0	-20.0	EUT Horz, Low Ch
4631.950	31.4	2.3	2.7	174.9	3.0	0.0	Horz	AV	0.0	33.7	54.0	-20.3	EUT Horz, High Ch
3611.858	34.2	-1.1	3.8	171.9	3.0	0.0	Vert	AV	0.0	33.1	54.0	-20.9	EUT On Side, Low Ch
3705.617	33.4	-1.0	1.5	127.9	3.0	0.0	Horz	AV	0.0	32.4	54.0	-21.6	EUT Horz, High Ch
4573.133	30.2	1.8	3.7	65.0	3.0	0.0	Horz	AV	0.0	32.0	54.0	-22.0	EUT Horz, Mid Ch
3705.500	33.0	-1.0	4.0	360.0	3.0	0.0	Vert	AV	0.0	32.0	54.0	-22.0	EUT On Side, High Ch
4631.475	29.7	2.3	1.6	229.9	3.0	0.0	Vert	AV	0.0	32.0	54.0	-22.0	EUT On Side, High Ch
4572.167	30.0	1.8	1.5	70.9	3.0	0.0	Vert	AV	0.0	31.8	54.0	-22.2	EUT On Side, Mid Ch
3658.383	32.5	-1.3	1.5	102.0	3.0	0.0	Vert	AV	0.0	31.2	54.0	-22.8	EUT On Side, Mid Ch
4517.092	29.3	1.5	1.5	173.0	3.0	0.0	Horz	AV	0.0	30.8	54.0	-23.2	EUT Horz, Low Ch
4517.275	29.2	1.5	3.6	34.0	3.0	0.0	Vert	AV	0.0	30.7	54.0	-23.3	EUT On Side, Low Ch
2709.275	51.5	-3.7	3.9	278.0	3.0	0.0	Vert	PK	0.0	47.8	74.0	-26.2	EUT On Side, Low Ch
2709.208	50.8	-3.7	1.0	142.0	3.0	0.0	Horz	PK	0.0	47.1	74.0	-26.9	EUT Vert, Low Ch
2709.217	50.5	-3.7	1.1	54.0	3.0	0.0	Horz	PK	0.0	46.8	74.0	-27.2	EUT Horz, Low Ch
2709.033	49.8	-3.7	1.0	149.9	3.0	0.0	Vert	PK	0.0	46.1	74.0	-27.9	EUT Vert, Low Ch
2743.658	49.8	-3.7	1.2	41.9	3.0	0.0	Vert	PK	0.0	46.1	74.0	-27.9	EUT On Side, Mid Ch
2743.958	49.4	-3.7	3.2	70.9	3.0	0.0	Horz	PK	0.0	45.7	74.0	-28.3	EUT Horz, Mid Ch
2779.017	49.1	-3.5	3.8	5.9	3.0	0.0	Vert	PK	0.0	45.6	74.0	-28.4	EUT On Side, High Ch
2779.267	48.9	-3.5	2.6	78.9	3.0	0.0	Horz	PK	0.0	45.4	74.0	-28.6	EUT Horz, High Ch
2709.050	48.8	-3.7	1.0	66.0	3.0	0.0	Vert	PK	0.0	45.1	74.0	-28.9	EUT Horz, Low Ch
2709.217	48.8	-3.7	2.8	12.0	3.0	0.0	Horz	PK	0.0	45.1	74.0	-28.9	EUT On Side, Low Ch
4632.058	40.8	2.3	2.7	174.9	3.0	0.0	Horz	PK	0.0	43.1	74.0	-30.9	EUT Horz, High Ch
1805.992	46.7	-4.2	1.6	155.0	3.0	0.0	Horz	PK	0.0	42.5	74.0	-31.5	EUT Horz, Low Ch
3658.642	43.8	-1.3	3.5	102.9	3.0	0.0	Horz	PK	0.0	42.5	74.0	-31.5	EUT Horz, Mid Ch
4631.525	40.1	2.3	1.6	229.9	3.0	0.0	Vert	PK	0.0	42.4	74.0	-31.6	EUT On Side, High Ch
1805.800	46.3	-4.2	1.5	294.9	3.0	0.0	Vert	PK	0.0	42.1	74.0	-31.9	EUT On Side, Low Ch
4572.525	40.3	1.8	3.7	65.0	3.0	0.0	Horz	PK	0.0	42.1	74.0	-31.9	EUT Horz, Mid Ch



# SPURIOUS RADIATED EMISSIONS

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
3611.992	43.0	-1.1	3.8	171.9	3.0	0.0	Vert	PK	0.0	41.9	74.0	-32.1	EUT On Side, Low Ch
3612.175	42.9	-1.1	1.4	145.0	3.0	0.0	Horz	PK	0.0	41.8	74.0	-32.2	EUT Horz, Low Ch
4572.142	40.0	1.8	1.5	70.9	3.0	0.0	Vert	PK	0.0	41.8	74.0	-32.2	EUT On Side, Mid Ch
4513.083	39.8	1.5	1.5	173.0	3.0	0.0	Horz	PK	0.0	41.3	74.0	-32.7	EUT Horz, Low Ch
4515.125	39.6	1.5	3.6	34.0	3.0	0.0	Vert	PK	0.0	41.1	74.0	-32.9	EUT On Side, Low Ch
3705.475	42.0	-1.0	1.5	127.9	3.0	0.0	Horz	PK	0.0	41.0	74.0	-33.0	EUT Horz, High Ch
3658.325	42.1	-1.3	1.5	102.0	3.0	0.0	Vert	PK	0.0	40.8	74.0	-33.2	EUT On Side, Mid Ch
3705.375	41.8	-1.0	4.0	360.0	3.0	0.0	Vert	PK	0.0	40.8	74.0	-33.2	EUT On Side, High Ch

## CONCLUSION

Pass



Tested By

# DUTY CYCLE

## TEST DESCRIPTION

The Duty Cycle (x) of the single channel operation of the radio as controlled by the provided test software was measured for each of the EUT operating modes.

There is no compliance requirement to be met by this test, so therefore no Pass / Fail criteria.

The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The test software provided for operation in a fixed, single channel mode allows the EUT to operate continuously at 100% Duty Cycle.

# CARRIER FREQUENCY SEPARATION



## TEST DESCRIPTION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The channel carrier frequencies in the 902-928 MHz band must be separated by 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. The EUT was operated in pseudorandom hopping mode. The spectrum was scanned across two adjacent peaks. The separation between the peaks of these channels was measured.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5183A	TIK	2022-01-24	2025-01-24
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2023-05-01	2024-05-01
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2023-09-05	2024-09-05
Block - DC	Fairview Microwave	SD3379	ANH	2023-09-05	2024-09-05
Attenuator	Fairview Microwave	SA4014-20	AQI	2023-09-05	2024-09-05

# CARRIER FREQUENCY SEPARATION



EUT:	Redlink 3.0 Outdoor sensor hub	Work Order:	ADEM0042
Serial Number:	49673010000169	Date:	2023-10-19
Customer:	Resideo (A Honeywell Company)	Temperature:	22.2°C
Attendees:	None	Relative Humidity:	46.7%
Customer Project:	None	Bar. Pressure (PMSL):	1007 mbar
Tested By:	Christopher Heintzelman	Job Site:	MN11
Power:	Battery - 3x 1.2V	Configuration:	ADEM0042-2
Signature:	<i>Christopher Heintzelman</i>		

## TEST SPECIFICATIONS

Specification:	Method:
FCC 15.247:2023	ANSI C63.10:2013
RSS-247 Issue 2:2023	ANSI C63.10:2013

## COMMENTS

Reference level offset includes measurement cable, attenuator, and DC block.  
 The limit from 15.247 (a)(1) is 25 kHz or the 20dB Occupied Bandwidth, whichever is greater. The largest occupied bandwidth recorded was 76.8 kHz.


## DEVIATIONS FROM TEST STANDARD

None

## TEST RESULTS

	Limit		Results
	Value	(≥)	
Hopping Mode (All Channels)	399 kHz	76.8 kHz	Pass

# CARRIER FREQUENCY SEPARATION

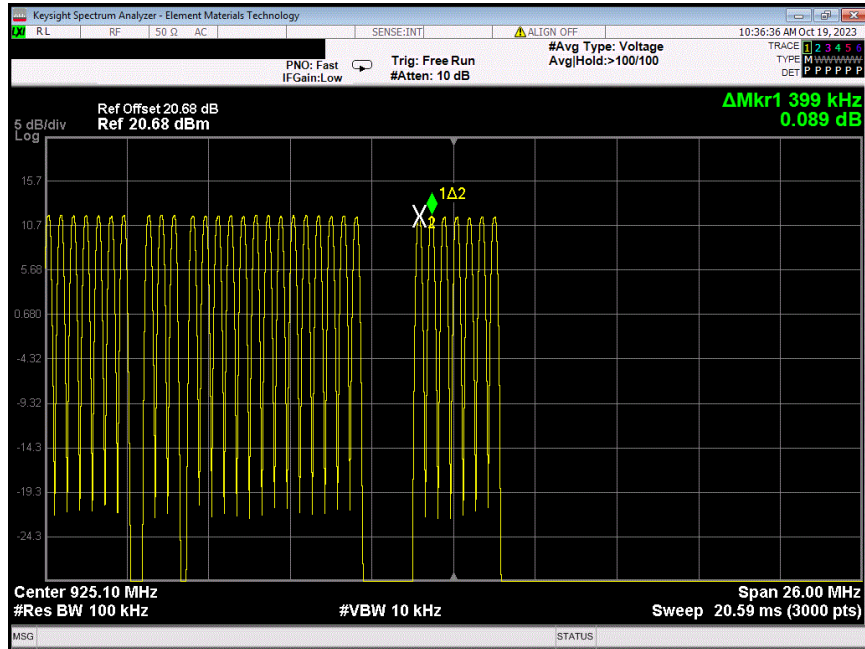

Hopping Mode (All Channels)

# NUMBER OF HOPPING FREQUENCIES



## TEST DESCRIPTION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The number of hopping frequencies was measured across the authorized band. The hopping function of the EUT was enabled.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5183A	TIK	2022-01-24	2025-01-24
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2023-05-01	2024-05-01
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2023-09-05	2024-09-05
Block - DC	Fairview Microwave	SD3379	ANH	2023-09-05	2024-09-05
Attenuator	Fairview Microwave	SA4014-20	AQI	2023-09-05	2024-09-05

# NUMBER OF HOPPING FREQUENCIES



EUT:	Redlink 3.0 Outdoor sensor hub	Work Order:	ADEM0042
Serial Number:	49673010000169	Date:	2023-10-19
Customer:	Resideo (A Honeywell Company)	Temperature:	22.2°C
Attendees:	None	Relative Humidity:	46.5%
Customer Project:	None	Bar. Pressure (PMSL):	1007 mbar
Tested By:	Christopher Heintzelman	Job Site:	MN11
Power:	Battery - 3x 1.2V	Configuration:	ADEM0042-2
Signature:	<i>Christopher Heintzelman</i>		

## TEST SPECIFICATIONS

Specification:	Method:
FCC 15.247:2023	ANSI C63.10:2013
RSS-247 Issue 2:2023	ANSI C63.10:2013

## COMMENTS

Reference level offset includes measurement cable, attenuator, and DC block.


## DEVIATIONS FROM TEST STANDARD

None

## TEST RESULTS

	Number of Channels	Limit (≥)	Results
Hopping Mode (All Channels)	50	50	Pass

# NUMBER OF HOPPING FREQUENCIES

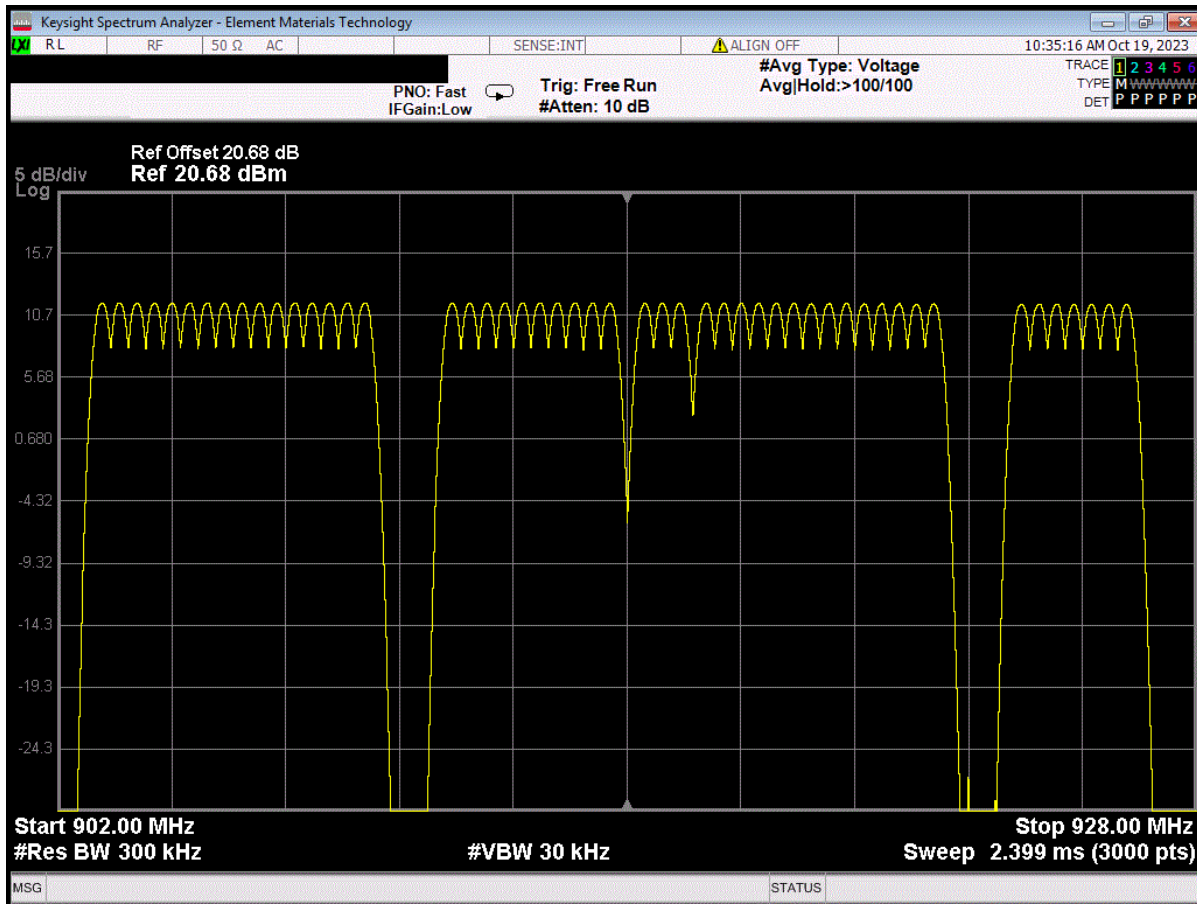

Hopping Mode (All Channels)



# DWELL TIME

## TEST DESCRIPTION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The average dwell time per hopping channel was measured at one hopping channel in the middle of the authorized band. The hopping function of the EUT was enabled.

The dwell time limit is based on the Number of Hopping Channels \* 400 mS. For the tested FHSS radio, this would be 50 Channels \* 400mS = 20 seconds

On Time During 20 Sec = Pulse Width \* Average Number of Pulses \* Scale Factor

- Average Number of Pulses is based on 4 samples.
- Scale Factor = 20 Sec / Screen Capture Sweep Time = 20 Sec / 20 sec Sec = 1

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5183A	TIK	2022-01-24	2025-01-24
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2023-05-01	2024-05-01
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2023-09-05	2024-09-05
Block - DC	Fairview Microwave	SD3379	ANH	2023-09-05	2024-09-05
Attenuator	Fairview Microwave	SA4014-20	AQI	2023-09-05	2024-09-05

# DWELL TIME



EUT:	Redlink 3.0 Outdoor sensor hub	Work Order:	ADEM0042
Serial Number:	49673010000169	Date:	2023-10-19
Customer:	Resideo (A Honeywell Company)	Temperature:	22.3°C
Attendees:	None	Relative Humidity:	46.7%
Customer Project:	None	Bar. Pressure (PMSL):	1006 mbar
Tested By:	Christopher Heintzelman	Job Site:	MN11
Power:	Battery - 3x 1.2V	Configuration:	ADEM0042-2
Signature:	<i>Christopher Heintzelman</i>		

## TEST SPECIFICATIONS

Specification:	Method:
FCC 15.247:2023	ANSI C63.10:2013
RSS-247 Issue 2:2023	ANSI C63.10:2013

## COMMENTS

Reference level offset includes measurement cable, attenuator, and DC block.  
Emissions below the 6dBm trigger level are adjacent channels and therefore not counted for the dwell time measurement.


## DEVIATIONS FROM TEST STANDARD

None


## TEST RESULTS

	Pulse Width (ms)	Number of Pulses	Average No. of Pulses	Scale Factor	On Time (ms) During 20 s	Limit (ms)	Results
Hopping Mode (All Channels), 2-FSK							
Mid Channel, 914.6 MHz	179.82	N/A	N/A	N/A	N/A	N/A	N/A
	N/A	1	N/A	N/A	N/A	N/A	N/A
	N/A	1	N/A	N/A	N/A	N/A	N/A
	N/A	1	N/A	N/A	N/A	N/A	N/A
	N/A	1	N/A	N/A	N/A	N/A	N/A
	179.82	N/A	1	1	179.82	400	Pass


# DWELL TIME

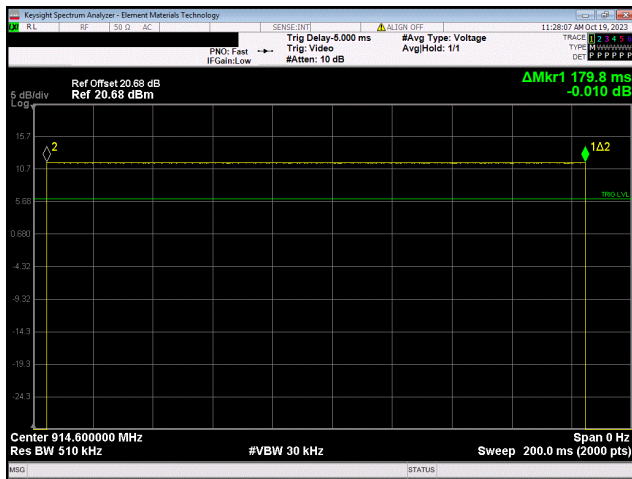


Hopping Mode (All Channels), 2-FSK  
Mid Channel, 914.6 MHz

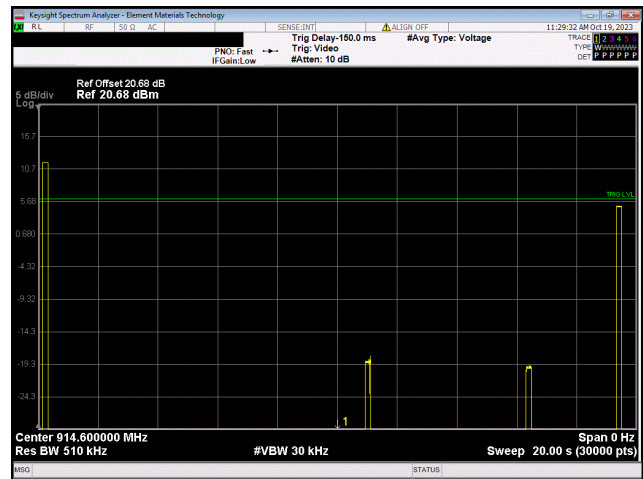

Hopping Mode (All Channels), 2-FSK  
Mid Channel, 914.6 MHz

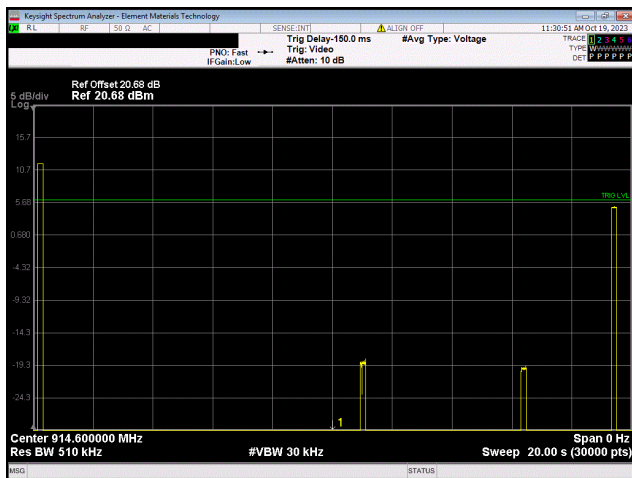


Hopping Mode (All Channels), 2-FSK  
Mid Channel, 914.6 MHz

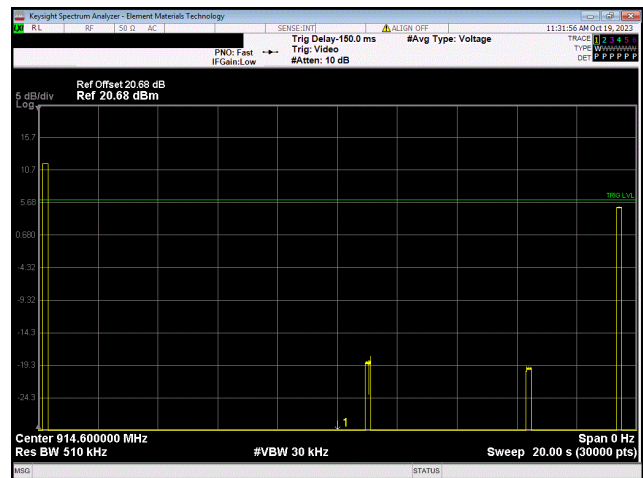

Hopping Mode (All Channels), 2-FSK  
Mid Channel, 914.6 MHz

# DWELL TIME

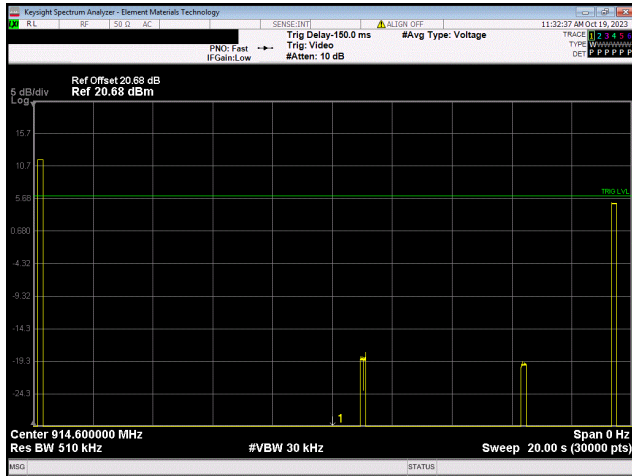

Hopping Mode (All Channels), 2-FSK  
Mid Channel, 914.6 MHz

# OUTPUT POWER

## TEST DESCRIPTION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The peak output power was measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting in a no hop mode at the data rate(s) listed in the datasheet.

The method found in ANSI C63.10:2013 Section 7.8.5 was used for a FHSS radio.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5183A	TIK	2022-01-24	2025-01-24
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2023-05-01	2024-05-01
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2023-09-05	2024-09-05
Block - DC	Fairview Microwave	SD3379	ANH	2023-09-05	2024-09-05
Attenuator	Fairview Microwave	SA4014-20	AQI	2023-09-05	2024-09-05

# OUTPUT POWER



EUT:	Redlink 3.0 Outdoor sensor hub	Work Order:	ADEM0042
Serial Number:	49673010000169	Date:	2023-10-18
Customer:	Resideo (A Honeywell Company)	Temperature:	22.3°C
Attendees:	None	Relative Humidity:	41.4%
Customer Project:	None	Bar. Pressure (PMSL):	1003 mbar
Tested By:	Christopher Heintzelman	Job Site:	MN11
Power:	Battery - 3x 1.2V	Configuration:	ADEM0042-2
Signature:	<i>Christopher Heintzelman</i>		

## TEST SPECIFICATIONS

Specification:	Method:
RSS-247 Issue 2:2023	ANSI C63.10:2013
FCC 15.247:2023	ANSI C63.10:2013

## COMMENTS

Reference level offset includes measurement cable, attenuator, and DC block.


## DEVIATIONS FROM TEST STANDARD

None


## TEST RESULTS

	Out Pwr (dBm)	Limit (dBm)	Result
<b>2-FSK</b>			
Low Channel, 903 MHz	11.603	21	Pass
Mid Channel, 914.6 MHz	11.533	21	Pass
High Channel, 926.4 MHz	11.423	21	Pass


# OUTPUT POWER

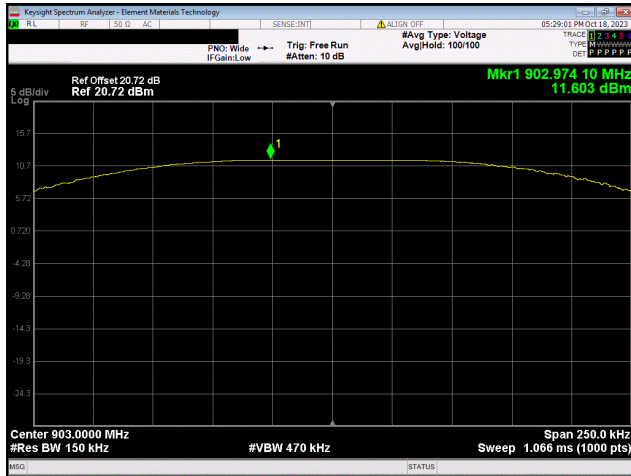

2-FSK  
Low Channel, 903 MHz

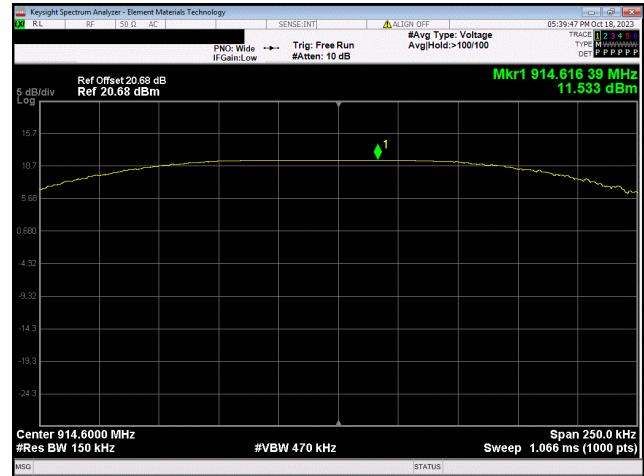

2-FSK  
Mid Channel, 914.6 MHz

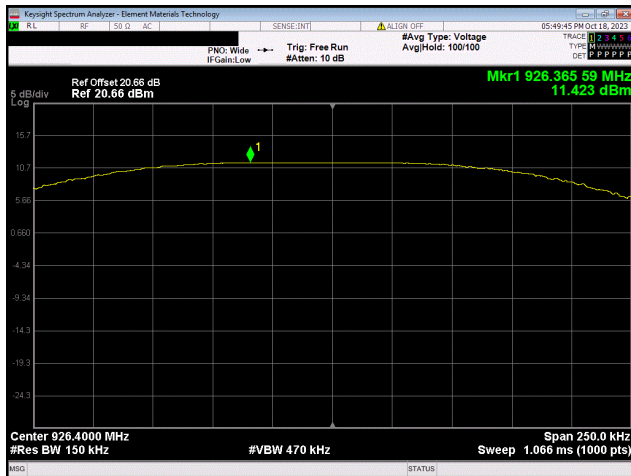

2-FSK  
High Channel, 926.4 MHz

# EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



## TEST DESCRIPTION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The peak output power was measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting in a no hop mode at the data rate(s) listed in the datasheet.

The method found in ANSI C63.10:2013 Section 7.8.5 was used for a FHSS radio.

Equivalent Isotropic Radiated Power (EIRP) = Max Measured Power + Antenna gain (dBi)

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5183A	TIK	2022-01-24	2025-01-24
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2023-05-01	2024-05-01
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2023-09-05	2024-09-05
Block - DC	Fairview Microwave	SD3379	ANH	2023-09-05	2024-09-05
Attenuator	Fairview Microwave	SA4014-20	AQI	2023-09-05	2024-09-05



# EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



EUT:	Redlink 3.0 Outdoor sensor hub	Work Order:	ADEM0042
Serial Number:	49673010000169	Date:	2023-10-18
Customer:	Resideo (A Honeywell Company)	Temperature:	22.2°C
Attendees:	None	Relative Humidity:	41.6%
Customer Project:	None	Bar. Pressure (PMSL):	1003 mbar
Tested By:	Christopher Heintzelman	Job Site:	MN11
Power:	Battery - 3x 1.2V	Configuration:	ADEM0042-2
Signature:	<i>Christopher Heintzelman</i>		

## TEST SPECIFICATIONS

Specification:	Method:
RSS-247 Issue 2:2023	ANSI C63.10:2013
FCC 15.247:2023	ANSI C63.10:2013

## COMMENTS

Reference level offset includes measurement cable, attenuator, and DC block.


## DEVIATIONS FROM TEST STANDARD

None


## TEST RESULTS

	Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result
<b>2-FSK</b>					
Low Channel, 903 MHz	11.603	0.01	11.613	37	Pass
Mid Channel, 914.6 MHz	11.533	0.01	11.543	37	Pass
High Channel, 926.4 MHz	11.423	0.01	11.433	37	Pass


# EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)

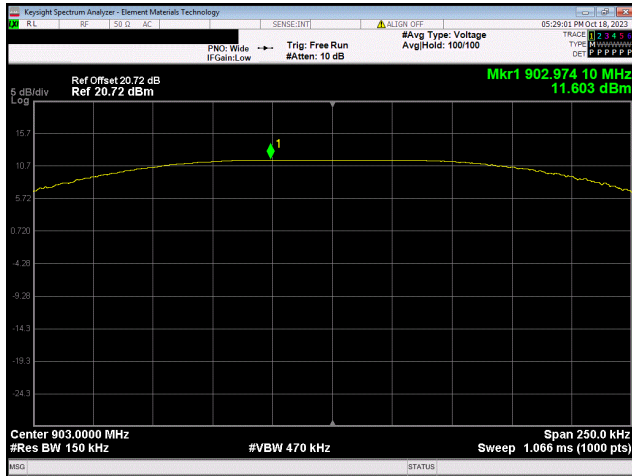

2-FSK  
Low Channel, 903 MHz

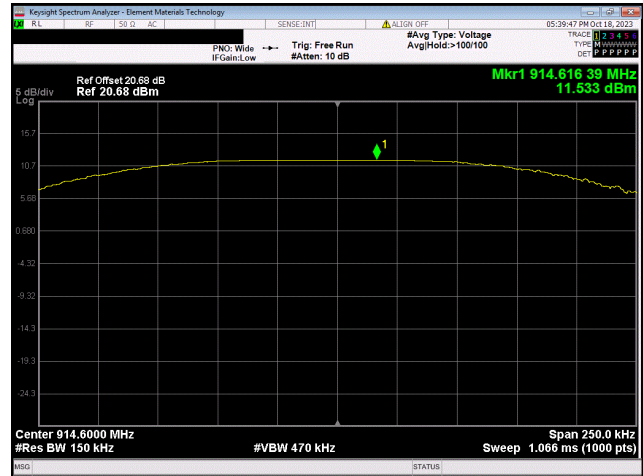

2-FSK  
Mid Channel, 914.6 MHz

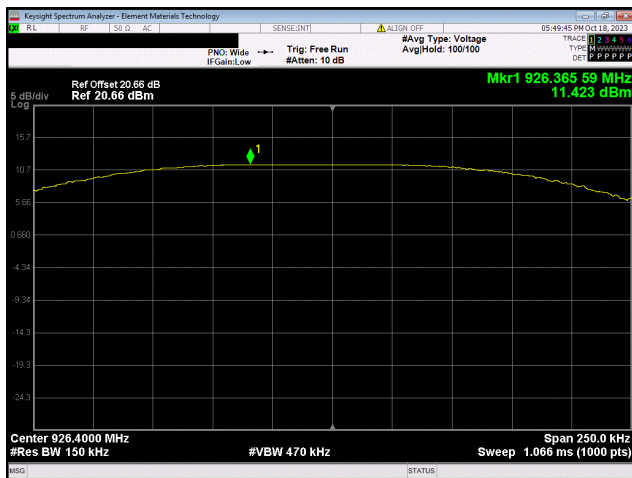

2-FSK  
High Channel, 926.4 MHz

# BAND EDGE COMPLIANCE



## TEST DESCRIPTION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The spurious RF conducted emissions at the edges of the authorized band were measured with the EUT set to low and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet in a no hop mode. The channels closest to the band edges were selected.

The spectrum was scanned below the lower band edge and above the higher band edge. The analyzer screen captures for this test show an example of the emission mask for the test mode also used during the radiated spurious emissions at the restricted band edges test.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5183A	TIK	2022-01-24	2025-01-24
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2023-05-01	2024-05-01
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2023-09-05	2024-09-05
Block - DC	Fairview Microwave	SD3379	ANH	2023-09-05	2024-09-05
Attenuator	Fairview Microwave	SA4014-20	AQI	2023-09-05	2024-09-05

# BAND EDGE COMPLIANCE



EUT:	Redlink 3.0 Outdoor sensor hub	Work Order:	ADEM0042
Serial Number:	49673010000169	Date:	2023-10-18
Customer:	Resideo (A Honeywell Company)	Temperature:	22.3°C
Attendees:	None	Relative Humidity:	41.5%
Customer Project:	None	Bar. Pressure (PMSL):	1003 mbar
Tested By:	Christopher Heintzelman	Job Site:	MN11
Power:	Battery - 3x 1.2V	Configuration:	ADEM0042-2
Signature:	<i>Christopher Heintzelman</i>		

## TEST SPECIFICATIONS

Specification:	Method:
RSS-247 Issue 2:2023	ANSI C63.10:2013
FCC 15.247:2023	ANSI C63.10:2013

## COMMENTS

Reference level offset includes measurement cable, attenuator, and DC block.


## DEVIATIONS FROM TEST STANDARD

None


## TEST RESULTS

	Value (dBc)	Limit ≤ (dBc)	Result
<b>2-FSK</b>			
Low Channel, 903 MHz	-57.03	-20	Pass
High Channel, 926.4 MHz	-63.75	-20	Pass

# BAND EDGE COMPLIANCE

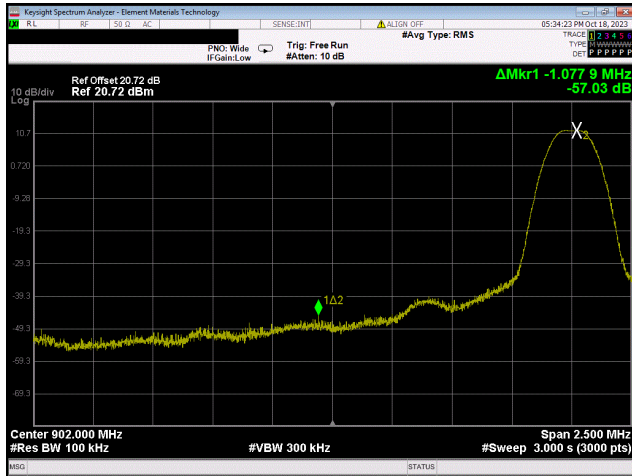

2-FSK  
Low Channel, 903 MHz

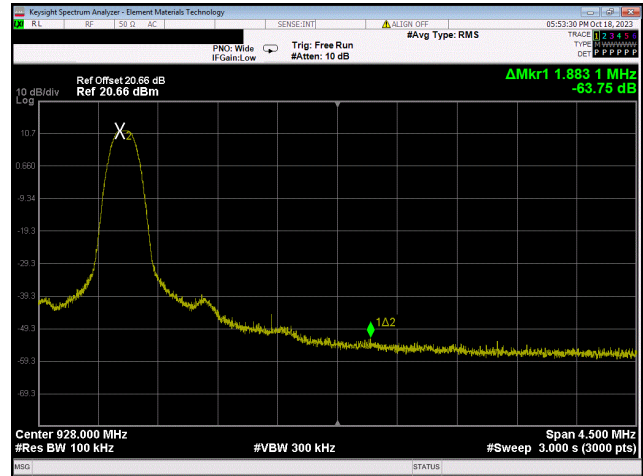

2-FSK  
High Channel, 926.4 MHz

# BAND EDGE COMPLIANCE - HOPPING MODE



## TEST DESCRIPTION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The spurious RF conducted emissions at the edges of the authorized band were measured with the EUT set to its normal pseudo-random hopping sequence. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge. The analyzer screen captures for this test show an example of the emission mask for the test mode also used during the radiated spurious emissions at the restricted band edges test.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5183A	TIK	2022-01-24	2025-01-24
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2023-05-01	2024-05-01
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2023-09-05	2024-09-05
Block - DC	Fairview Microwave	SD3379	ANH	2023-09-05	2024-09-05
Attenuator	Fairview Microwave	SA4014-20	AQI	2023-09-05	2024-09-05

# BAND EDGE COMPLIANCE - HOPPING MODE



EUT:	Redlink 3.0 Outdoor sensor hub	Work Order:	ADEM0042
Serial Number:	49673010000169	Date:	2023-10-19
Customer:	Resideo (A Honeywell Company)	Temperature:	22.3°C
Attendees:	None	Relative Humidity:	46.7%
Customer Project:	None	Bar. Pressure (PMSL):	1007 mbar
Tested By:	Christopher Heintzelman	Job Site:	MN11
Power:	Battery - 3x 1.2V	Configuration:	ADEM0042-2
Signature:	<i>Christopher Heintzelman</i>		

## TEST SPECIFICATIONS

Specification:	Method:
FCC 15.247:2023	ANSI C63.10:2013
RSS-247 Issue 2:2023	ANSI C63.10:2013

## COMMENTS

Reference level offset includes measurement cable, attenuator, and DC block.


## DEVIATIONS FROM TEST STANDARD

None


## TEST RESULTS

	Value (dBc)	Limit ≤ (dBc)	Result
Hopping Mode (All Channels), 2-FSK			
Low Channel, 903 MHz	-61.03	-20	Pass
High Channel, 926.4 MHz	-62.59	-20	Pass

# BAND EDGE COMPLIANCE - HOPPING MODE

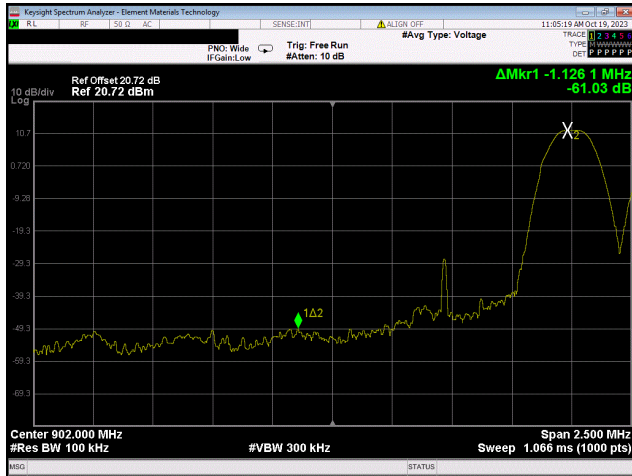

Hopping Mode (All Channels), 2-FSK  
Low Channel, 903 MHz

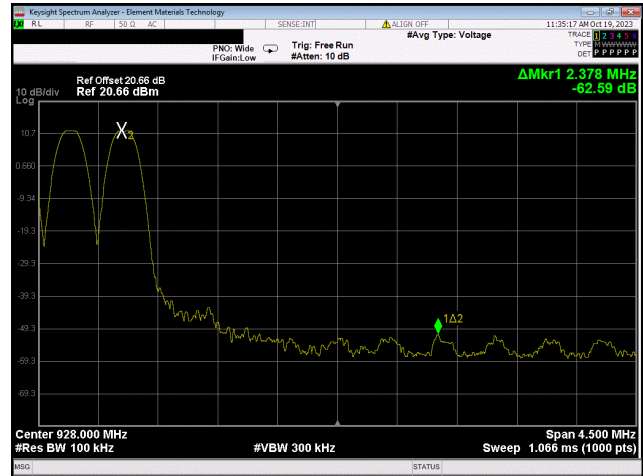

Hopping Mode (All Channels), 2-FSK  
High Channel, 926.4 MHz



# EMISSIONS BANDWIDTH

## TEST DESCRIPTION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The 20 dB emissions bandwidth was measured with the EUT set to low, medium and high transmit frequencies in the band. The EUT was transmitting at the data rate(s) listed in the datasheet in a no-hop mode. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5183A	TIK	2022-01-24	2025-01-24
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2023-05-01	2024-05-01
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2023-09-05	2024-09-05
Block - DC	Fairview Microwave	SD3379	ANH	2023-09-05	2024-09-05
Attenuator	Fairview Microwave	SA4014-20	AQI	2023-09-05	2024-09-05

# EMISSIONS BANDWIDTH



EUT:	Redlink 3.0 Outdoor sensor hub	Work Order:	ADEM0042
Serial Number:	49673010000169	Date:	2023-10-18
Customer:	Resideo (A Honeywell Company)	Temperature:	22.1°C
Attendees:	None	Relative Humidity:	41.7%
Customer Project:	None	Bar. Pressure (PMSL):	1003 mbar
Tested By:	Christopher Heintzelman	Job Site:	MN11
Power:	Battery - 3x 1.2V	Configuration:	ADEM0042-2
Signature:	<i>Christopher Heintzelman</i>		

## TEST SPECIFICATIONS

Specification:	Method:
RSS-247 Issue 2:2023	ANSI C63.10:2013
FCC 15.247:2023	ANSI C63.10:2013

## COMMENTS

Reference level offset includes measurement cable, attenuator, and DC block.


## DEVIATIONS FROM TEST STANDARD

None


## TEST RESULTS

	Value	Limit	Result
		(<)	
<b>2-FSK</b>			
Low Channel, 903 MHz	69.8 kHz	500 kHz	Pass
Mid Channel, 914.6 MHz	76.826 kHz	500 kHz	Pass
High Channel, 926.4 MHz	74.745 kHz	500 kHz	Pass


# EMISSIONS BANDWIDTH

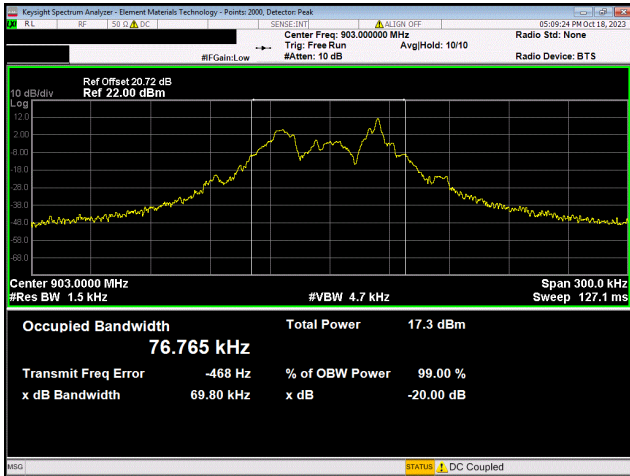

2-FSK  
Low Channel, 903 MHz

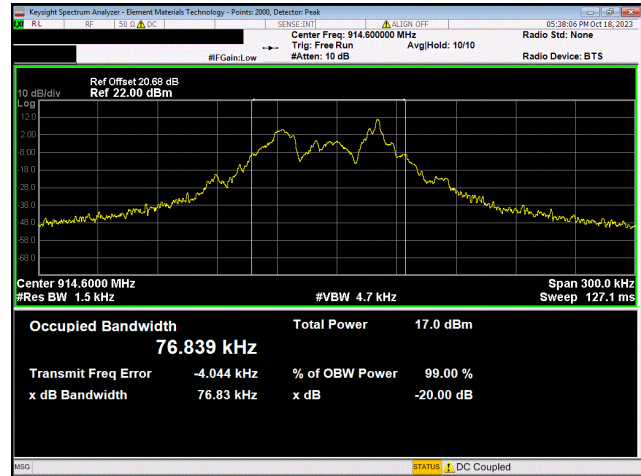

2-FSK  
Mid Channel, 914.6 MHz

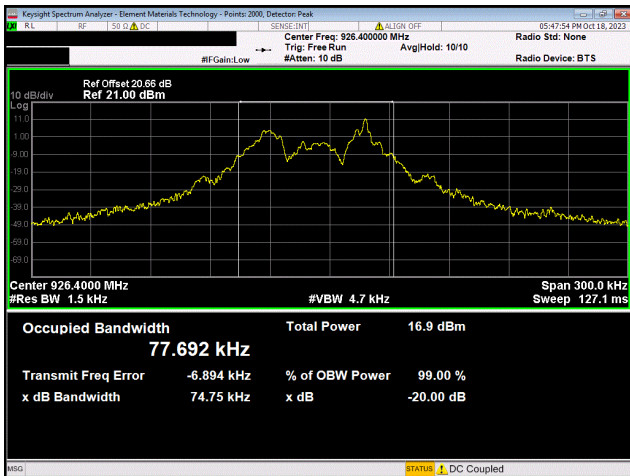

2-FSK  
High Channel, 926.4 MHz

# OCCUPIED BANDWIDTH

## TEST DESCRIPTION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The 99% occupied bandwidth was measured with the EUT configured for continuous modulated operation.

Per ANSI C63.10:2013, 6.9.3, the spectrum analyzer was configured as follows:

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) of the spectrum analyzer was set to the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) bandwidth was set to at least 3 times the resolution bandwidth. The analyzer sweep time was set to auto to prevent video filtering or averaging. A sample detector was used unless the device was not able to be operated in a continuous transmit mode, in which case a peak detector was used.

The spectrum analyzer occupied bandwidth measurement function was used to sum the power of the transmission in linear terms to obtain the 99% bandwidth.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5183A	TIK	2022-01-24	2025-01-24
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2023-05-01	2024-05-01
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2023-09-05	2024-09-05
Block - DC	Fairview Microwave	SD3379	ANH	2023-09-05	2024-09-05
Attenuator	Fairview Microwave	SA4014-20	AQI	2023-09-05	2024-09-05

# OCCUPIED BANDWIDTH



EUT:	Redlink 3.0 Outdoor sensor hub	Work Order:	ADEM0042
Serial Number:	49673010000169	Date:	2023-10-18
Customer:	Resideo (A Honeywell Company)	Temperature:	22.1°C
Attendees:	None	Relative Humidity:	41.9%
Customer Project:	None	Bar. Pressure (PMSL):	1003 mbar
Tested By:	Christopher Heintzelman	Job Site:	MN11
Power:	Battery - 3x 1.2V	Configuration:	ADEM0042-2
Signature:	<i>Christopher Heintzelman</i>		

## TEST SPECIFICATIONS

Specification:	Method:
RSS-247 Issue 2:2023	ANSI C63.10:2013
FCC 15.247:2023	ANSI C63.10:2013

## COMMENTS

Reference level offset includes measurement cable, attenuator, and DC block.


## DEVIATIONS FROM TEST STANDARD

None


## TEST RESULTS

	Value	Limit	Result
<b>2-FSK</b>			
Low Channel, 903 MHz	76.749 kHz	N/A	N/A
Mid Channel, 914.6 MHz	77.049 kHz	N/A	N/A
High Channel, 926.4 MHz	78.157 kHz	N/A	N/A


# OCCUPIED BANDWIDTH

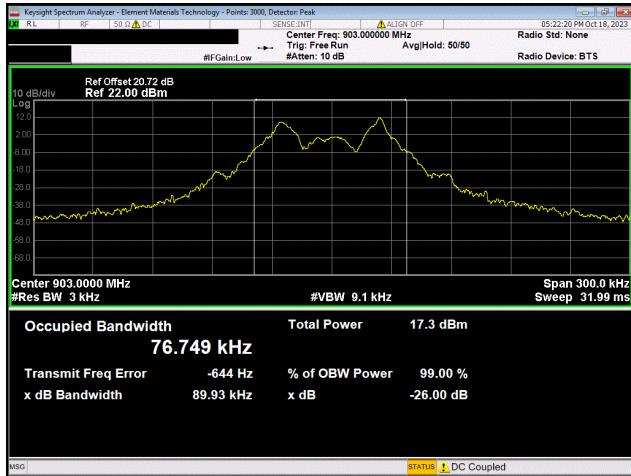

2-FSK  
Low Channel, 903 MHz

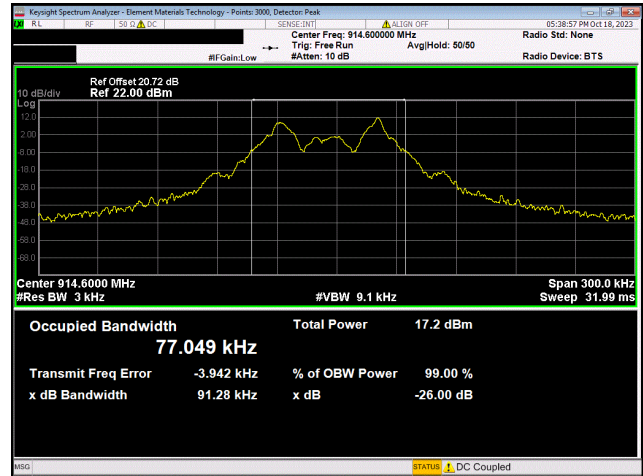

2-FSK  
Mid Channel, 914.6 MHz

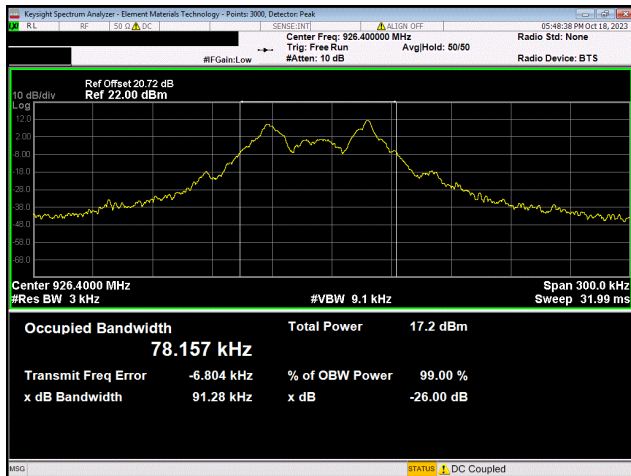

2-FSK  
High Channel, 926.4 MHz

# SPURIOUS CONDUCTED EMISSIONS



## TEST DESCRIPTION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet in a no-hop mode. For each transmit frequency, the fundamental was measured with a 100 kHz resolution bandwidth and the highest value was recorded. The rest of the spectrum was then measured with a 100 kHz resolution bandwidth and the highest value was found. The difference between the value found on the fundamental and the rest of the spectrum was compared against the limit to determine compliance.

The reference level offset for the fundamental screen capture was based on a measured value of the loss between the spectrum analyzer and the EUT which was verified at the time of test. The remaining screen capture(s) use an internal transducer factor on the analyzer to correct the displayed trace based on the cable loss over frequency. The reference level offset for the additional screen capture(s) is then based on the expected attenuator value and any other losses.

Fundamental Offset = Ref Lvl Offset showing measured composite factor of all losses

Remaining Screen capture(s) Offset = "Internal" cable loss factor not shown on screen capture + Ref Lvl Offset showing expected attenuator value and any other losses

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5183A	TIK	2022-01-24	2025-01-24
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2023-05-01	2024-05-01
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2023-09-05	2024-09-05
Block - DC	Fairview Microwave	SD3379	ANH	2023-09-05	2024-09-05
Attenuator	Fairview Microwave	SA4014-20	AQI	2023-09-05	2024-09-05

# SPURIOUS CONDUCTED EMISSIONS



EUT:	Redlink 3.0 Outdoor sensor hub	Work Order:	ADEM0042
Serial Number:	49673010000169	Date:	2023-10-18
Customer:	Resideo (A Honeywell Company)	Temperature:	22.4°C
Attendees:	None	Relative Humidity:	41.6%
Customer Project:	None	Bar. Pressure (PMSL):	1003 mbar
Tested By:	Christopher Heintzelman	Job Site:	MN11
Power:	Battery - 3x 1.2V	Configuration:	ADEM0042-2
Signature:	<i>Christopher Heintzelman</i>		

## TEST SPECIFICATIONS

Specification:	Method:
RSS-247 Issue 2:2023	ANSI C63.10:2013
FCC 15.247:2023	ANSI C63.10:2013

## COMMENTS

Reference level offset includes measurement cable, attenuator, and DC block.

## DEVIATIONS FROM TEST STANDARD


None

## TEST RESULTS


	Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result
2-FSK					
Low Channel, 903 MHz	Fundamental	902.97	N/A	N/A	N/A
	30 MHz - 10 GHz	1805.88	-56.95	-20	Pass
Mid Channel, 914.6 MHz	Fundamental	914.61	N/A	N/A	N/A
	30 MHz - 10 GHz	457.23	-57.4	-20	Pass
High Channel, 926.4 MHz	Fundamental	926.36	N/A	N/A	N/A
	30 MHz - 10 GHz	463.32	-56.97	-20	Pass




# SPURIOUS CONDUCTED EMISSIONS

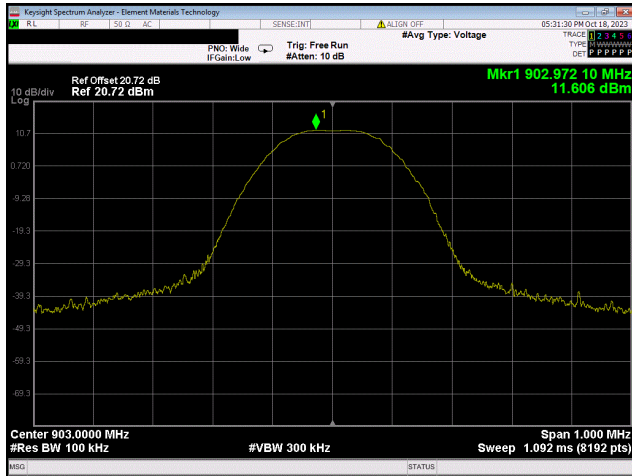


**2-FSK**  
**Low Channel, 903 MHz**

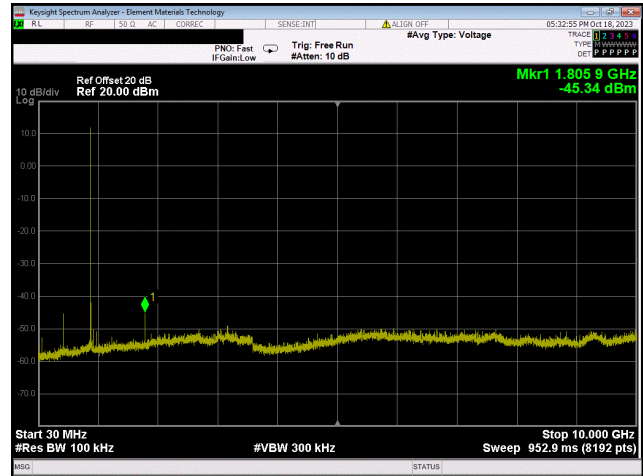

**2-FSK**  
**Low Channel, 903 MHz**

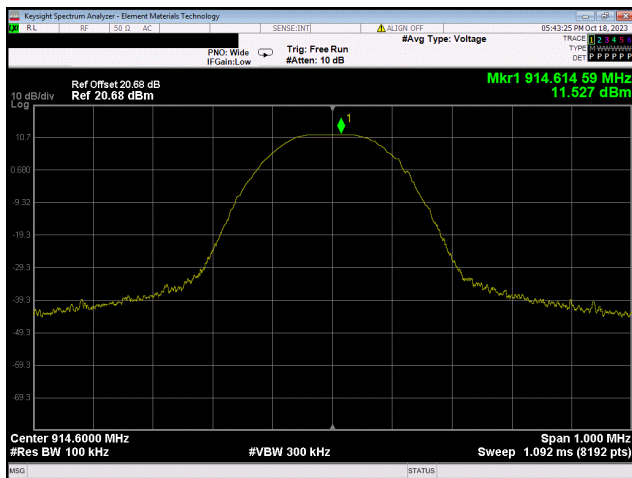


**2-FSK**  
**Mid Channel, 914.6 MHz**

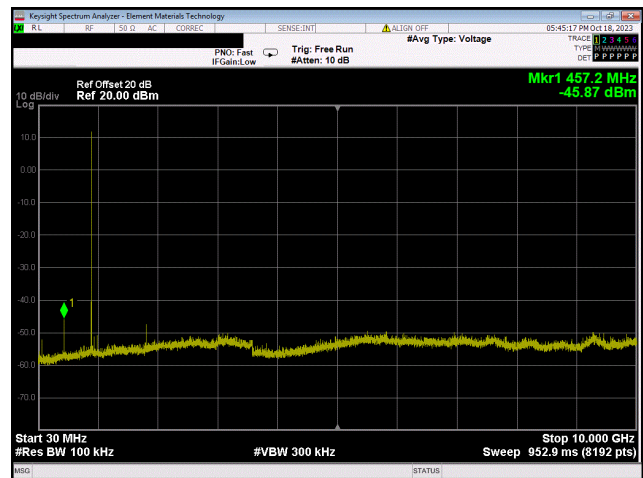


**2-FSK**  
**Mid Channel, 914.6 MHz**

# SPURIOUS CONDUCTED EMISSIONS

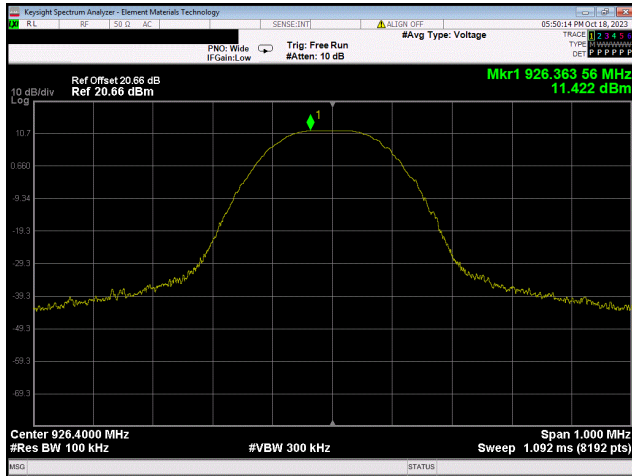

2-FSK  
High Channel, 926.4 MHz

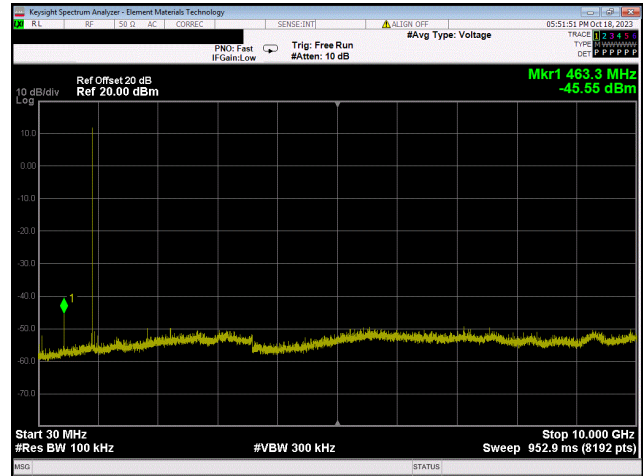

2-FSK  
High Channel, 926.4 MHz

End of Test Report