

# Honeywell Home

## FCC / ISED Test Report

For

### Lancer Receiver

Report #: 57947-2

FCC ID: HS9-MIFH2

IC ID: 573R-MIFH2

Report Completion Date: 2019-03-01

*Prepared by and for:*

**Ademco Inc.**

**2 Corporate Center Dr.**

**Suite 100 PO Box 9040**

**Melville, NY 11747**



Testing

NVLAP Lab Code: 600110

### **Document Introduction**

Ademco Inc. tested the above equipment in accordance with the requirements set forth in the listed standards. All indications of Pass/Fail in the report are opinions expressed by Ademco Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

This document is a record of the FCC/ISED Test Report for Ademco Inc. products. It demonstrates the data required to be analyzed to certify a product according to the requirements of the FCC & ISED.

The results in the report reflect only the model of the items under test unless noted otherwise. This document may not be altered or revised in any way unless done so by Ademco Inc. and all revisions are duly noted in the revisions section. Any alterations of this document not carried out by Ademco Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Ademco Inc. is the legal entity name for Honeywell Home / Resideo. All three names can be used synonymously within this test report.

<b>Test Report Revision History</b>				
<b>Revision</b>	<b>Prepared By</b>	<b>Reviewed By</b>	<b>Revision Detail</b>	<b>Release Date</b>
---	<b>M. Antola</b>	<b>A. Roussin</b>	<b>Original Release</b>	<b>2019-03-01</b>
<b>A</b>	<b>M. Antola</b>	<b>A. Roussin</b>	<b>Updated limit definition of 20dB bandwidth test (pg. 12); Updated Test Item Description section; Added additional RX mode data</b>	<b>2019-03-12</b>
<b>B</b>	<b>M. Antola</b>	<b>A. Roussin</b>	<b>Added additional RX mode data</b>	<b>2019-03-19</b>

**Report Authorization**

**Report Prepared By:**



Michael Antola  
Hardware Engineer III  
RF & EMC / Wireless Certifications  
Ademco Inc.

**Reviewed & Approved By:**



Andrew Roussin  
Hardware Engineer II  
RF & EMC / Wireless Certifications  
Ademco Inc.

## **Contents**

Applicable Test Standards/Limits.....	5
Deviations from Test Methods .....	5
Facilities and Accreditation .....	5
Test Item Description .....	5
Worse-Case Configuration & Mode.....	6
Calibration & Measurement Uncertainty.....	7
Opinions / Interpretations .....	7
Test Summary.....	8
Test & Measurement Equipment.....	9
On Time and Duty Cycle.....	11
20dB Emission Bandwidth.....	12
99% Occupied Bandwidth.....	15
Maximum Conducted Output Power.....	18
Number of Hopping Frequencies .....	19
Channel Separation .....	21
Dwell Time.....	23
Out-of-Band Emissions .....	25
Radiated Emissions (Unintentional).....	30
Radiated Emissions (Intentional) .....	37
Conducted Emissions (Mains).....	44
END OF REPORT.....	53

<b>Applicable Test Standards/Limits</b>		
<b>Test Standards/Limits</b>	<b>Result</b>	<b>Dates Tested</b>
ANSI C63.4: 2014	Compliant	1/24/19 – 3/19/19
ANSI C63.10: 2013	Compliant	1/24/19 – 3/19/19
ICES-003 Issue 6: 2016	Compliant	1/24/19 – 3/19/19
RSS-247, Issue 2, Section 5	Compliant	1/24/19 – 3/19/19
RSS-GEN, Issue 4	Compliant	1/24/19 – 3/19/19
CFR 47 Pt 15 Subpart B, Section 15.107/109	Compliant	1/24/19 – 3/19/19
CFR 47 Pt 15 Subpart C, Section 15.207/209	Compliant	1/24/19 – 3/19/19
CFR 47 Pt 15 Subpart C, Section 15.247	Compliant	1/24/19 – 3/19/19

<b>Deviations from Test Methods</b>	
<b>#</b>	<b>Deviation Description</b>
0	None

<b>Facilities and Accreditation</b>
The test site and measurement facility used to collect data are located at 2 Corporate Center Dr., Melville, NY 11747, USA. Ademco Inc. is accredited by NVLAP, Laboratory Code 600110-0. The full scope of accreditation can be viewed at the NVLAP website.

<b>Test Item Description</b>
<p>The MIFH2 is a receiver that works in conjunction with a programmable thermostat, which contains a two-way RF device. The device receives power via a dedicated indoor unit, which is connected to AC mains. The circuit card contains a partitioned radio block and the board also contains one microcontroller, LED indicator and a button interface.</p> <p>The EUT contains a 902.99973-926.39401MHz frequency hopping spread spectrum (i.e. RedLINK) radio. Low/High frequencies tested are 903MHz and 926.4MHz, respectively, due to rounding. The radio utilizes a single PCB trace antenna and has a gain of 3.8 dBi.</p>

**Worse-Case Configuration & Mode**

Radiated emissions was performed with the EUT set to transmit at the low/middle/high channels with the highest output power as worst-case scenario. The EUT was tested in all three orthogonal planes in order to determine the worst-case emissions. It was determined that the Z axis orientation was the worst-case orientation. Therefore, all final radiated test was performed with the EUT in the Z axis orientation. See setup photos for details.

**Test Sample Identification**

<b>Sample ID Number</b>	<b>Sample Serial Number</b>	<b>Date Received</b>
MEL-662	Non-serialized production unit	2019-02-05
MEL-670	Non-serialized production unit	2019-02-05

## Calibration & Measurement Uncertainty

- Measuring Instrument Calibration – The measuring equipment utilized to perform the tests documented in this report have been calibrated in accordance with the manufacturer’s recommendations and is traceable to recognized national standards.
- Sample Calculation – Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

[i.e.] 37 dBuV/m = 30 dBuV + 18.5 dB/m + 0.5 dB – 12 dB

- Uncertainty - Figures are valid to a confidence level of 95%.

Test	Standard Uncertainty
Radiated Emissions (30-200MHz Horizontal)	+/- 5.05 dB
Radiated Emissions (30-200MHz Vertical)	+/- 5.28 dB
Radiated Emissions (200-1000MHz Horizontal)	+/- 10.21 dB
Radiated Emissions (200-1000MHz Vertical)	+/- 10.36 dB
Radiated Emissions (Above 1GHz)	+/- 9.70 dB
Conducted Emissions (150KHz-30MHz)	+/- 4.36 dB

## Opinions / Interpretations

None

### Test Summary

All tests described below are required, unless otherwise noted. Notes should be described in detail in the "Additional notes" section.

#	Test Description	Status
1	20 dB Emission Bandwidth	PASS
2	99% Occupied Bandwidth	PASS
3	Maximum Conducted Output Power	PASS
4	Number of Hopping Frequencies	PASS
5	Channel Separation	PASS
6	Dwell Time	PASS
7	Out-of-Band Emissions	PASS
8	Radiated Emissions (Intentional)	PASS
9	Conducted Emissions (Mains)	PASS



## Test & Measurement Equipment

The following test and measurement equipment was utilized for the tests documented in this report:

### Equipment List

Instrument Type	ID #	Serial #	Manufacturer	Model	Cal Date	Cal Due Date
RF Lab (RF Conducted & Power Tests)						
Spectrum Analyzer	11531	MY41000078	Agilent	E4440A	06/06/17	06/06/19
Power Sensor	11568	105317	Rohde & Schwarz	NRP-Z81	10/02/18	10/02/19
Attenuator	-	1624	Pasternack	PE7087-6	*	*
RF Chamber						
Spectrum Analyzer	11496	100303	Rohde & Schwarz	FSU26	04/11/18	04/11/19
Loop Antenna (9kHz-30MHz)	11535	121080	Com-Power	AL-130R	10/29/18	10/29/19
Bilog Antenna (30MHz-6GHz)	11534	A012816	Sunol	JB6	03/27/18	03/27/19
Horn Antenna (1-18GHz)	2319	2317	EMCO	3115	01/08/19	01/08/20
Preamp (10-4200MHz)	11537	1603006	Mini Circuits	TVA-11-422	*	*
Preamp (500MHz-18GHz)	11557	18040034	Com-Power	PAM-118A	*	*
Band Reject Filter	11553	G041	Micro-tronics	BRM50702-01	*	*
RF Cable	-	-	Mini-Circuits	RDE#2	*	*
RF Cable	-	-	Insulated Wire	SMA#8	*	*
OATS						
Spectrum Analyzer	11545	103125	Rohde & Schwarz	FSW26	02/21/18	02/21/19
Bilog Antenna (30MHz-6GHz)	11534	A012816	Sunol	JB6	03/27/18	03/27/19
Horn Antenna (1-18GHz)	2973	3127	EMCO	RGA-60	01/31/19	01/31/21
Preamp (100kHz-1.3GHz)	11540	2443AUF555	HP	8447D	*	*
Preamp (1-18GHz)	11539	160362	Amplical	AMP1G18-35	*	*
High Pass Filter	11552	G018	Micro-tronics	HPM50111-01	*	*
RF Cable	-	-	Pasternack	RDE#1	*	*
RF Cable	-	-	MegaPhase	EMC2-S1S1-360	*	*
Shield Room						

EMI Receiver	11566	102484	Rohde & Schwarz	ESR3	09/19/18	09/19/19
LISN	11527	241259	Com-Power	LIN-120A	01/09/19	01/09/20
Misc.						
Measurement Software	11543	Version 9.5	UL	UL EMC	N/A	N/A
Environmental Meter	11533	A070144	Extech Instruments	SD700	08/21/17	08/21/20

\*-Passive devices & Preamps are characterized in-house, not calibrated.

## On Time and Duty Cycle

### Test Description

Refer to KDB 558074 Zero-Span Analyzer Method.

### Test Criteria

Reference	Limit
KDB 558074, Section 6	None, for reporting only


### Test Information

Tester	Test Location	Date	Temperature (°C)	Humidity (%RH)	Pressure (mbar)	Results (P/F)
MA	RF Lab	02/11/19	22.6	37.2	1014	P

### Test Results

EUT Mode	ON Time (ms)	Period (ms)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/ON Time Minimum VBW (kHz)
RedLINK	22.01	22.01	1.0	100%	0.00	0.01

### Duty Cycle Plot

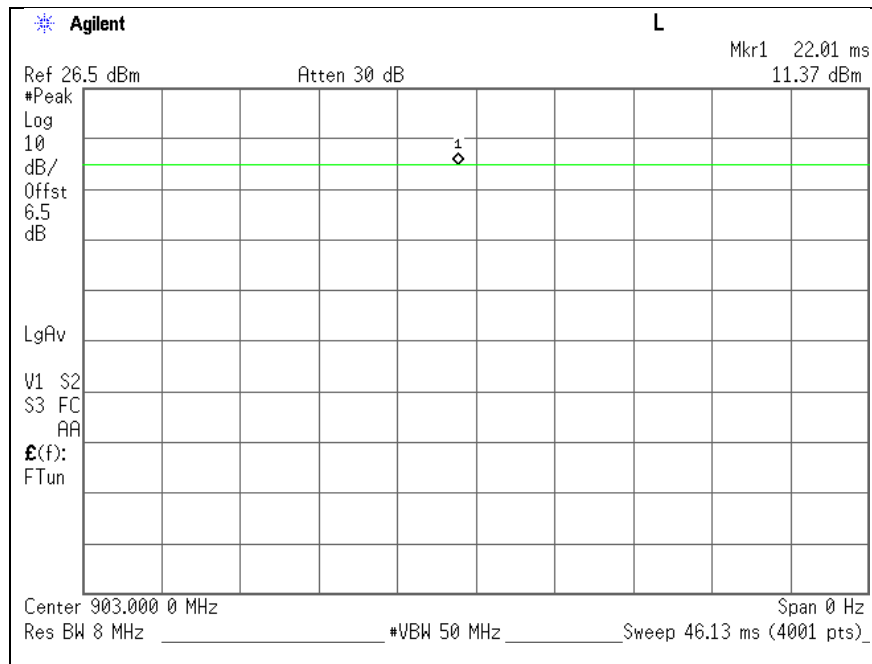

## 20dB Emission Bandwidth

### Test Description

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

### Test Limit

Reference	Limit
CFR 47 Subpart C 15.247 (a)(1)(i)	< 500kHz


### Test Information

Tester	Test Location	Date	Temperature (°C)	Humidity (%RH)	Pressure (mbar)	Results (P/F)
JB	RF Lab	01/29/198	23	41	998	P


### Test Results

Channel	Frequency (MHz)	20dB Bandwidth (in kHz)
Low	903	84.650
Mid	914.6	84.728
High	926.4	85.466


**20dB Bandwidth**

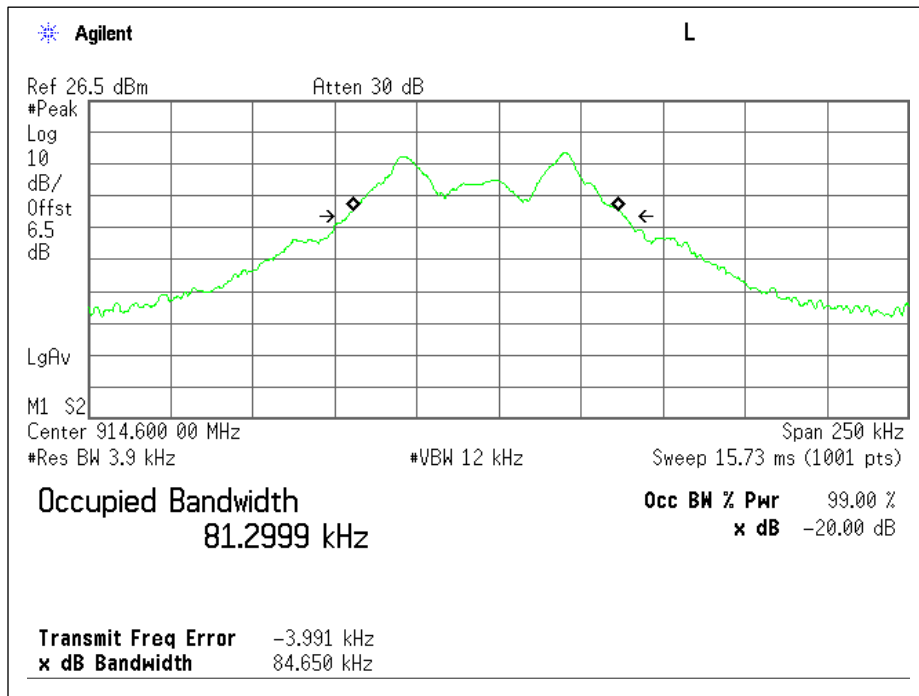

Low Channel - Plot

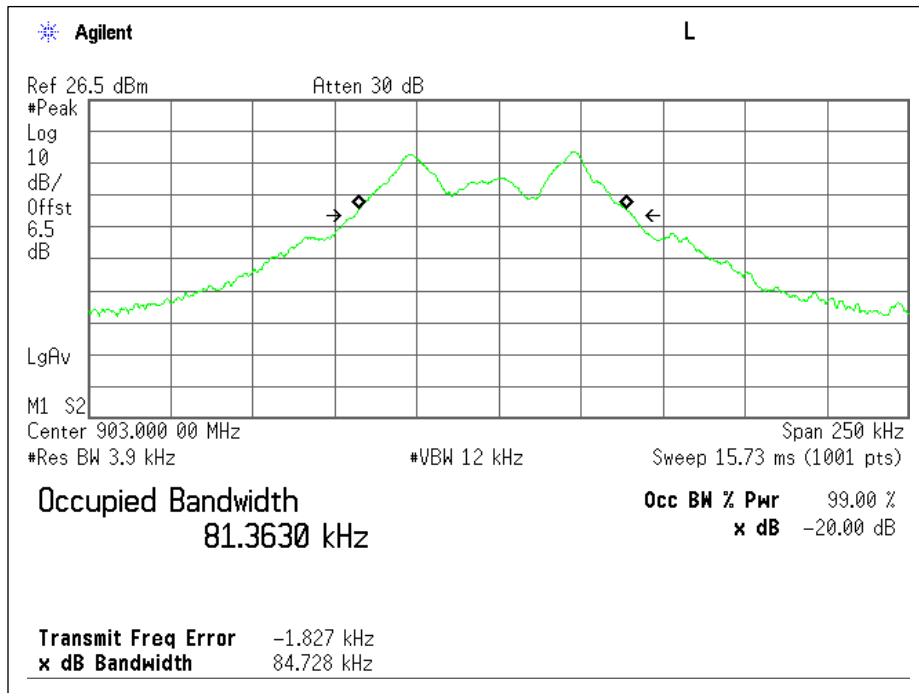

Mid Channel - Plot

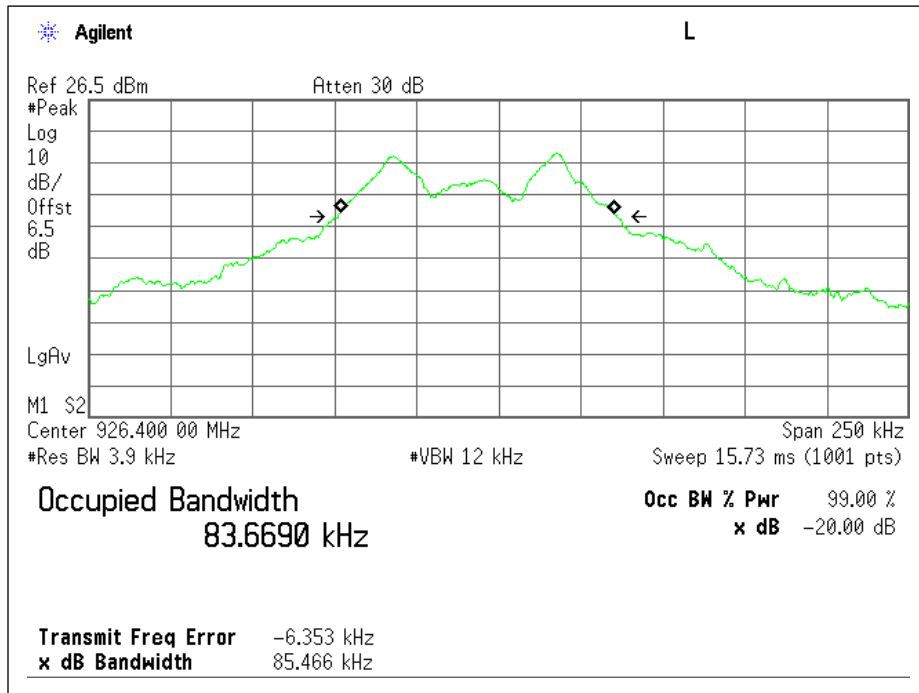

High Channel - Plot

## 99% Occupied Bandwidth

### Test Description

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth.

When the occupied bandwidth limit is not stated in the applicable RSS or reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

### Test Criteria

Reference	Limit
RSS-GEN, Section 6.6	N/A


### Test Information

Tester	Test Location	Date	Temperature (°C)	Humidity (%RH)	Pressure (mbar)	Results (P/F)
JB	RF Lab	01/29/19	23.4	15.3	1010	P


### Test Results

Channel	Frequency (MHz)	99% Bandwidth (in kHz)
Low	903	77.2678
Mid	914.6	77.4903
High	926.4	79.0973

**99% Occupied Bandwidth**

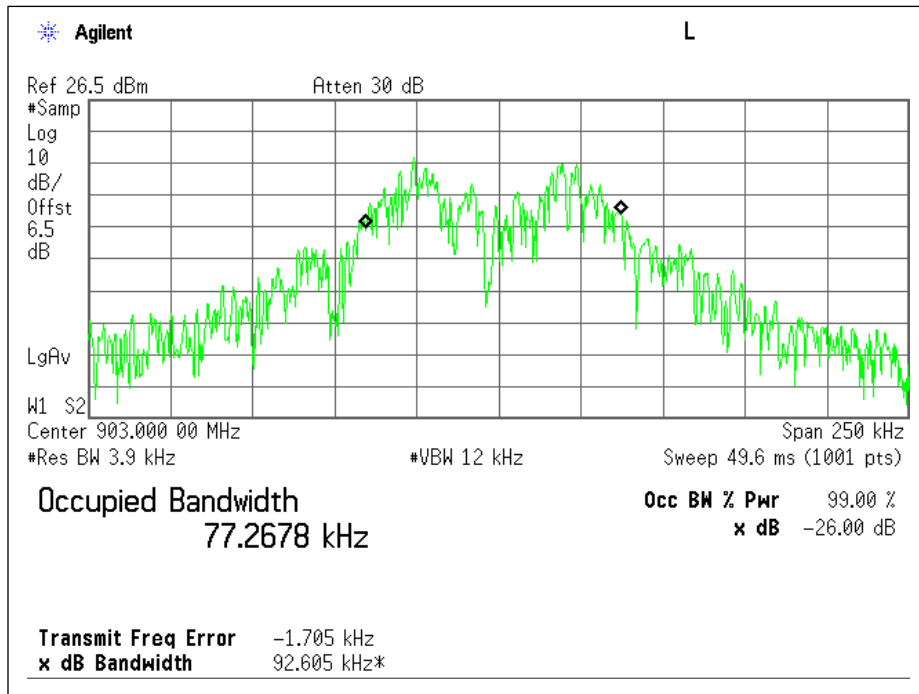


Low Channel - Plot

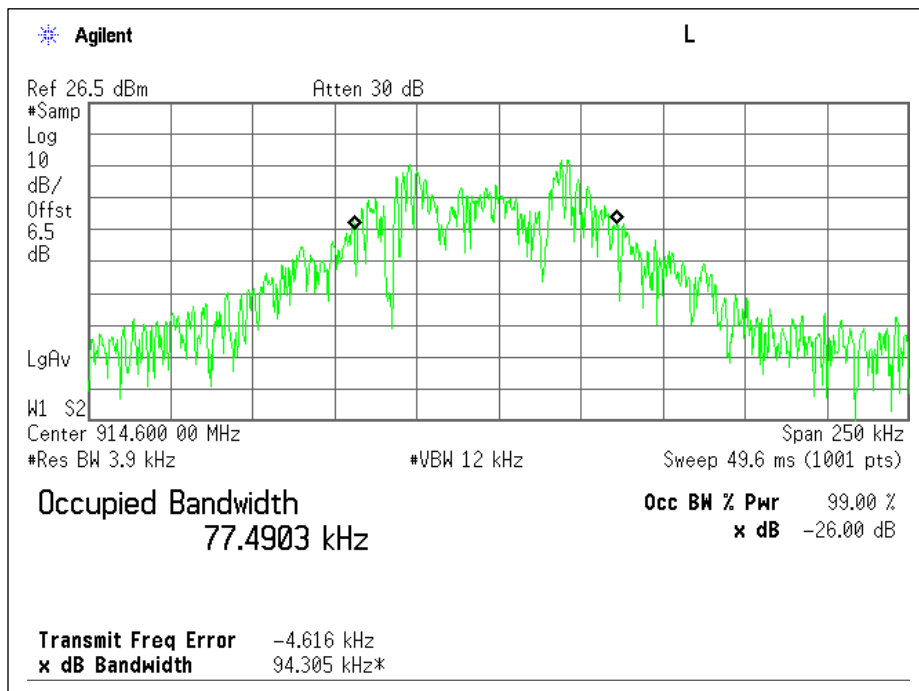

Mid Channel - Plot



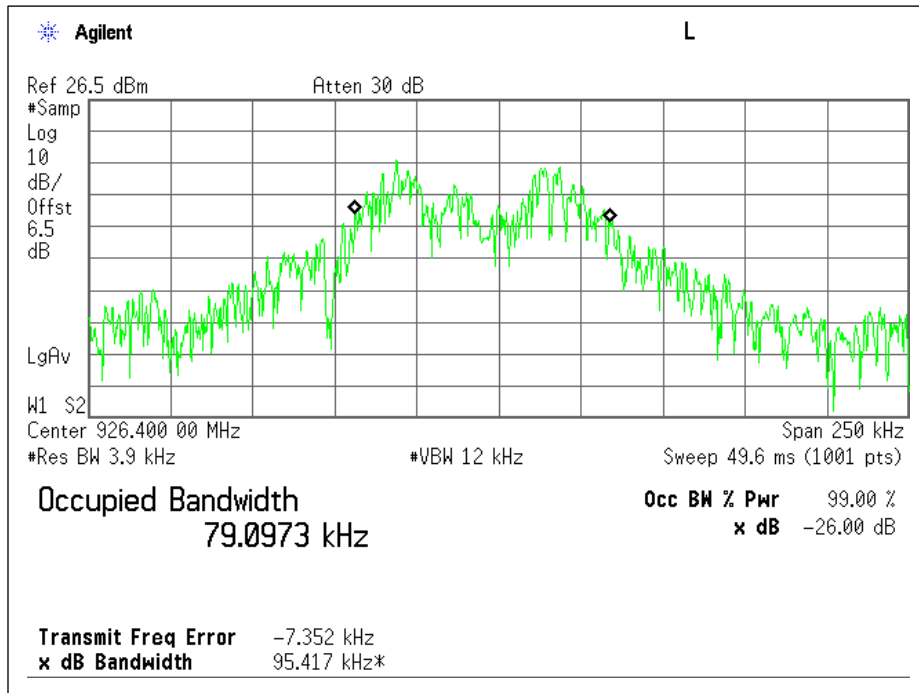

High Channel - Plot

## Maximum Conducted Output Power

### Test Description

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels.

Maximum peak conducted output power was the method employed to determine fundamental emission output power. As allowed per Section 7.8.5 of C63.10, a peak power sensor was utilized for the measurements contained in this section.

### Test Criteria

Reference	Limit
CFR 47 Subpart C 15.247 (b)(2) RSS-247 Section 5.4 (a)	1W (30dBm)

### Test Information

Tester	Test Location	Date	Temperature (°C)	Humidity (%RH)	Pressure (mbar)	Results (P/F)
JB	RF Lab	01/29/19	22.5	14.5	1012	P

### Test Results

Channel	Frequency (MHz)	Tx Channel Power (dBm)
Low	903	12.59
Mid	914.6	12.47
High	926.4	12.32

## Number of Hopping Frequencies

### Test Description

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test Criteria

Reference	Limit
CFR 47 Subpart C 15.247 (a)(1) RSS-247 Section 5.1 (c)	≥ 50 Hopping Frequencies


### Test Information

Tester	Test Location	Date	Temperature (°C)	Humidity (%RH)	Pressure (mbar)	Results (P/F)
JB	RF Lab	01/29/19	23.4	15.3	1010	P


### Test Results

Number of Channels
50

Number of Hopping Frequencies

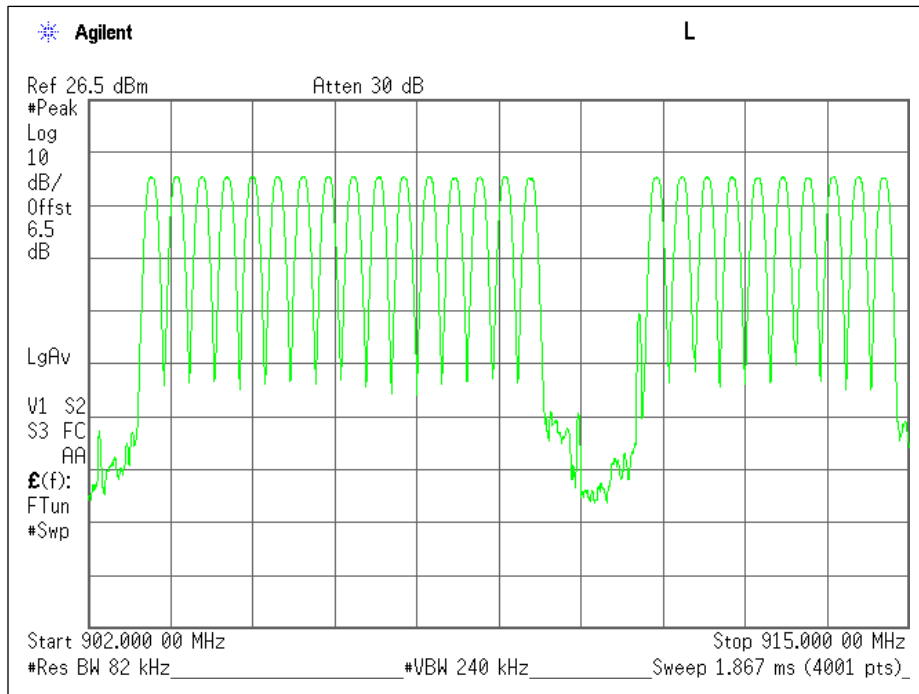

Number of Channels - Plot 1

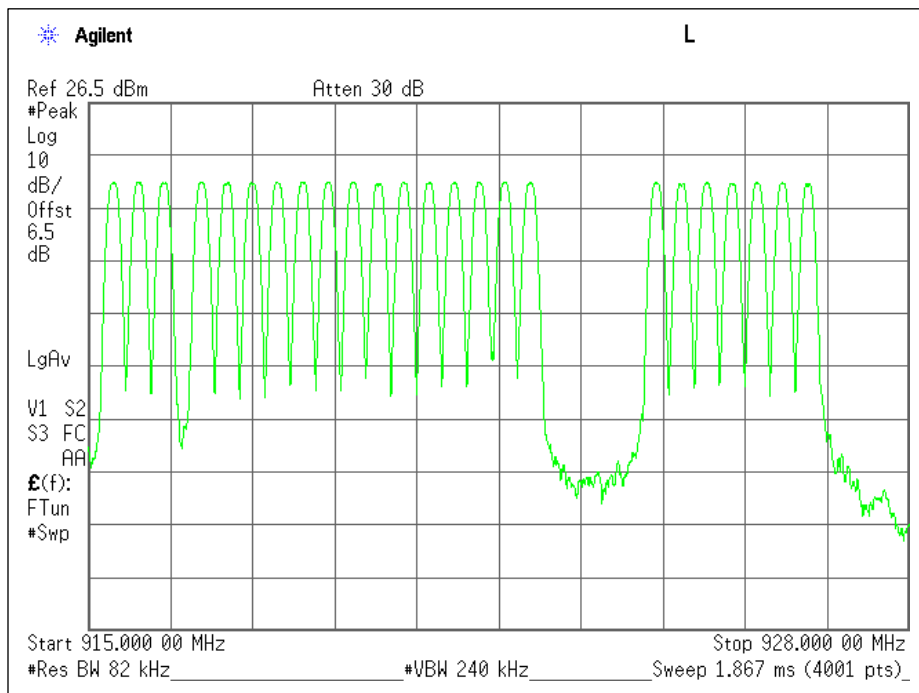

Number of Channels - Plot 2

## **Channel Separation**

### **Test Description**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### **Test Criteria**

<b>Reference</b>	<b>Limit</b>
CFR 47 Subpart C 15.247 (a)(1) RSS-247 Section 5.1 (b)	25kHz or the 20dB Bandwidth, whichever is greater


### **Test Information**

<b>Tester</b>	<b>Test Location</b>	<b>Date</b>	<b>Temperature (°C)</b>	<b>Humidity (%RH)</b>	<b>Pressure (mbar)</b>	<b>Results (P/F)</b>
JB	RF Lab	01/30/19	21	9	1016	P

### **Test Results**

<b>Channel Separation</b>
349kHz
798kHz
1.996MHz

**Channel Separation**

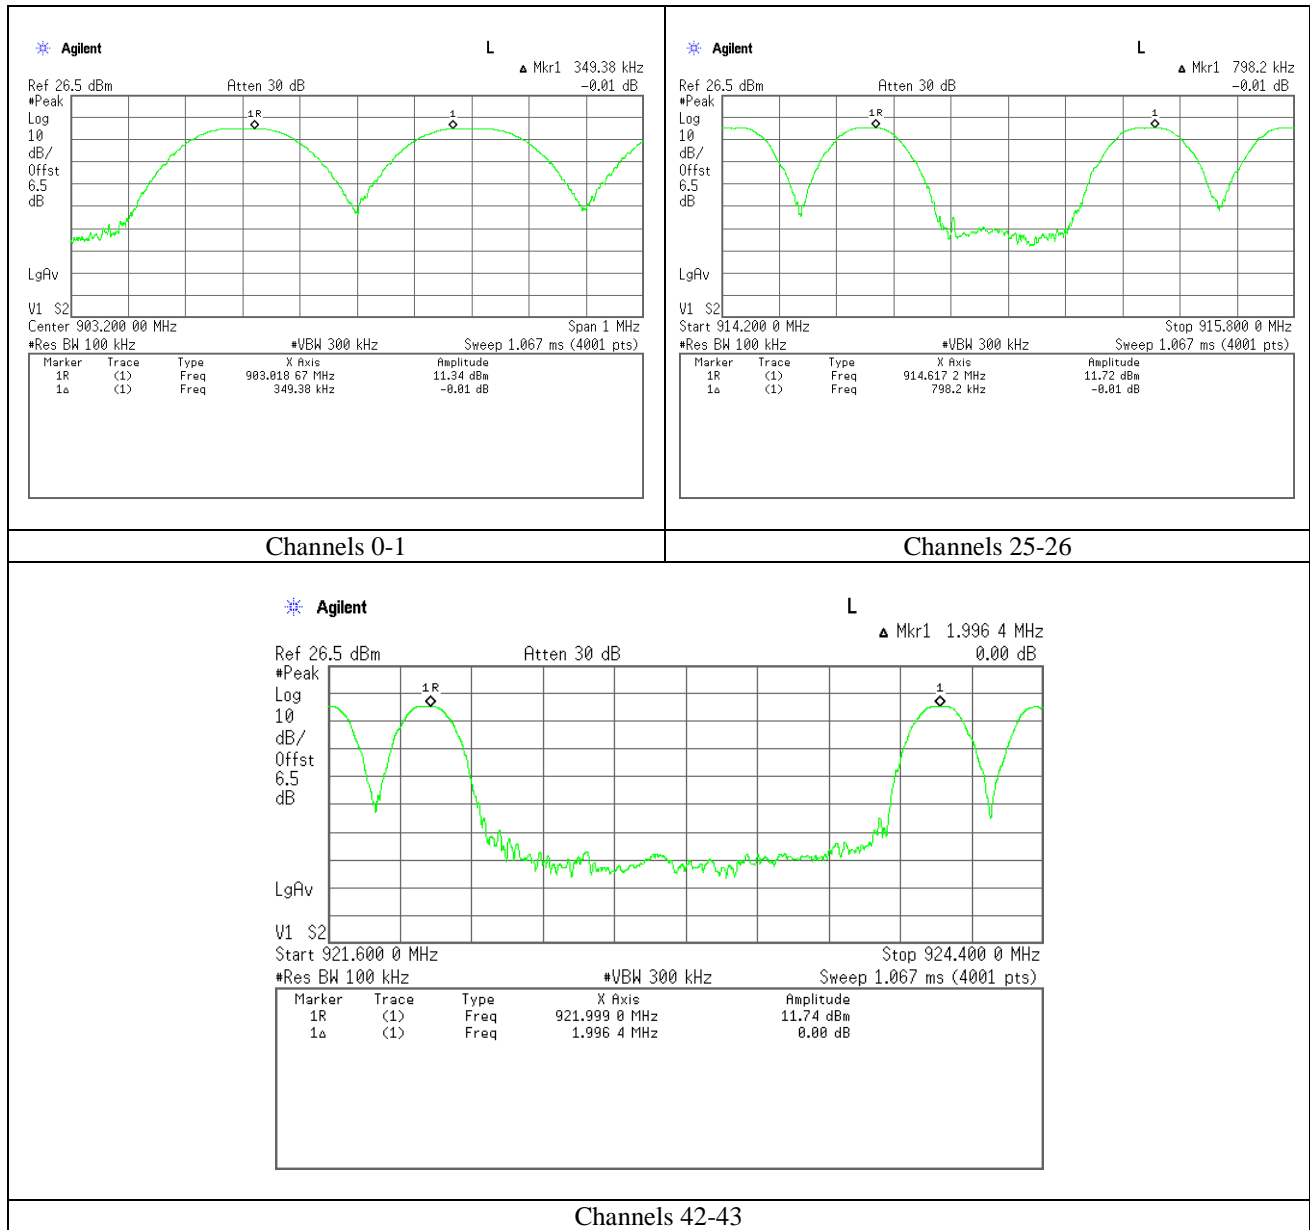

## Dwell Time

### Test Description

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test Criteria

Reference	Limit
CFR 47 Subpart C 15.247 (a)(1) RSS-247 Section 5.1 (c/d)	< 0.4s in a 20 Second Period


### Test Information

Tester	Test Location	Date	Temperature (°C)	Humidity (%RH)	Pressure (mbar)	Results (P/F)
JB	RF Lab	01/29/19	23	7	1013	P


### Test Results

Number of transmission in 20 seconds	Length of transmission time (msec)	Results (msec)	Limit (msec)	Margin (msec)
1 (time) * 2 = 2 times	179.8	2 * 179.8 = 359.6	400	-40.4

Dwell Time

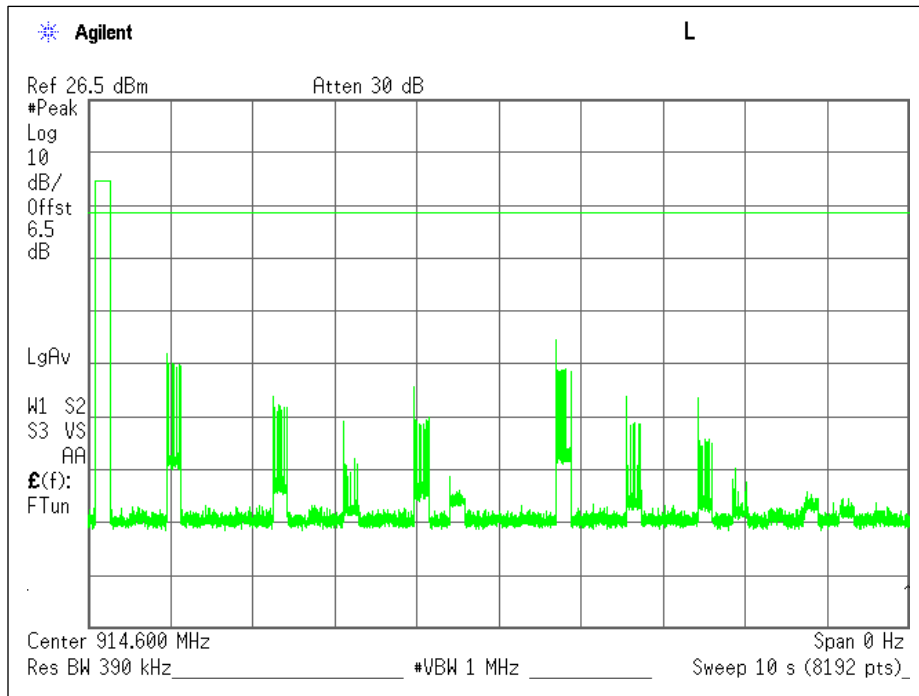

Number of Transmissions in a 10 second window

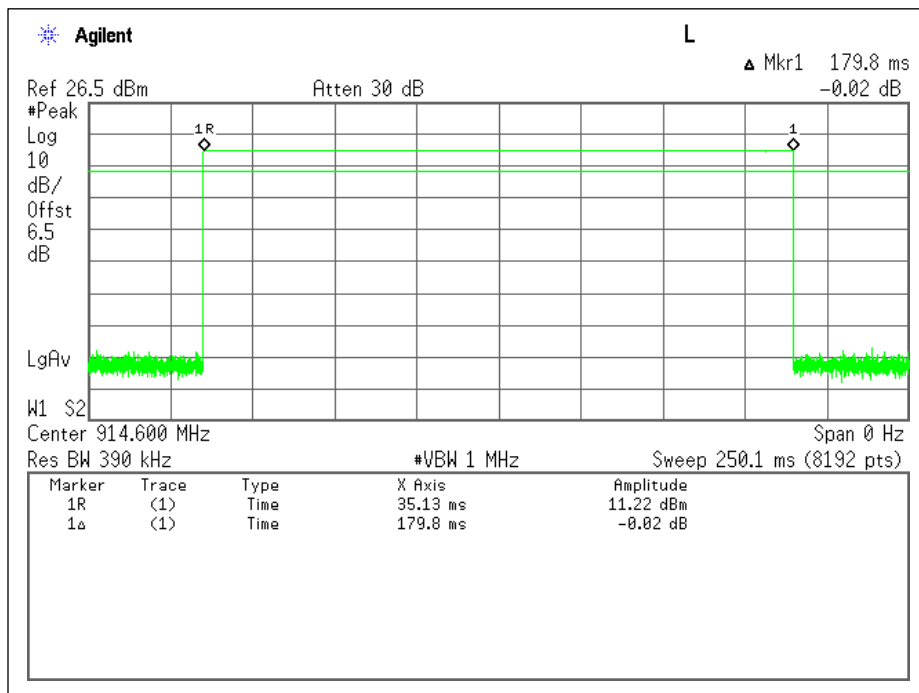

Dwell Time per Channel



## Out-of-Band Emissions

### Test Description

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

### Test Criteria

Reference	Limit
CFR 47 Subpart C 15.247 (d) RSS-247, Section 5.5	20dB Below the Fundamental

### Test Information


Tester	Test Location	Date	Temperature (°C)	Humidity (%RH)	Pressure (mbar)	Results (P/F)
JB	RF Lab	01/29/19	23	7	1013	P

### Test Results


Mode	Antenna	Authorized Band Edge				
		Channel	Frequency (MHz)	Delta from Peak to Bandedge (dB)	Limit (dB)	Margin (dB)
Hopping Enabled	1	Low	903	58.35	20	-38.35
		High	926.4	63.77	20	-43.77
Hopping Disabled	1	Low	903	45.05	20	-25.05
		High	926.4	50.62	20	-30.62

Conducted Spurious		
Channel	Frequency (MHz)	Highest Spurious Emission Delta from the -20dB down Limit (dB)
Low	903	-20.39
Mid	914.6	-21.37
High	926.4	-22.71

**Band Edge – Hopping Enabled**

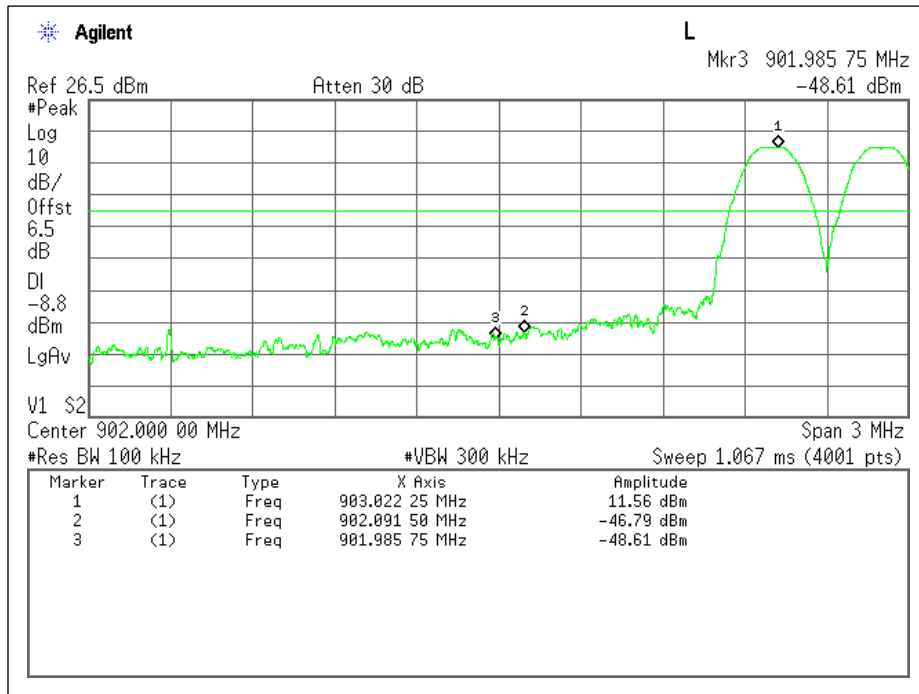


Low Channel - Plot

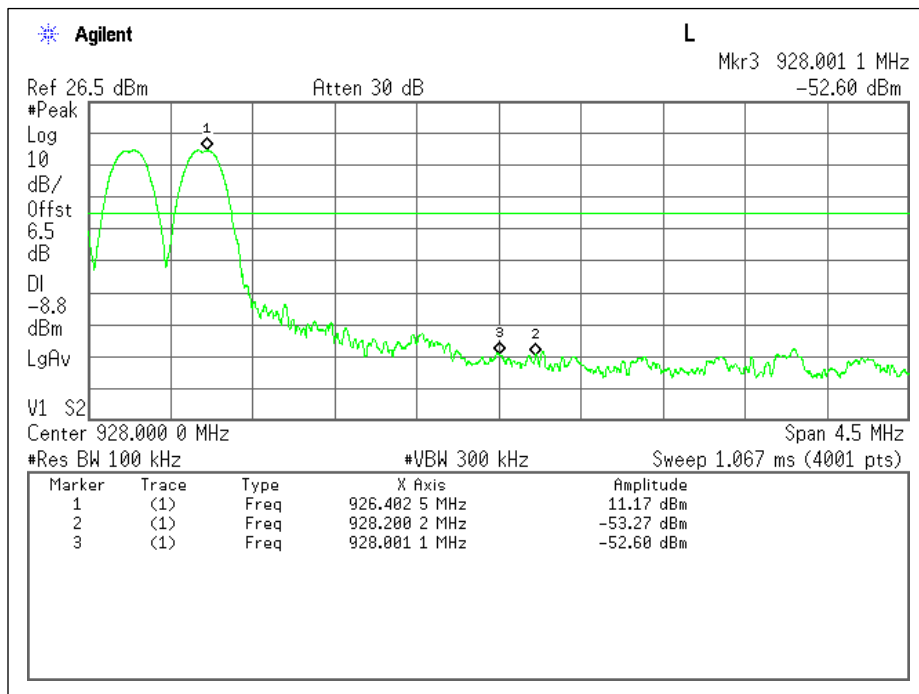


High Channel - Plot

**Band Edge – Hopping Disabled**

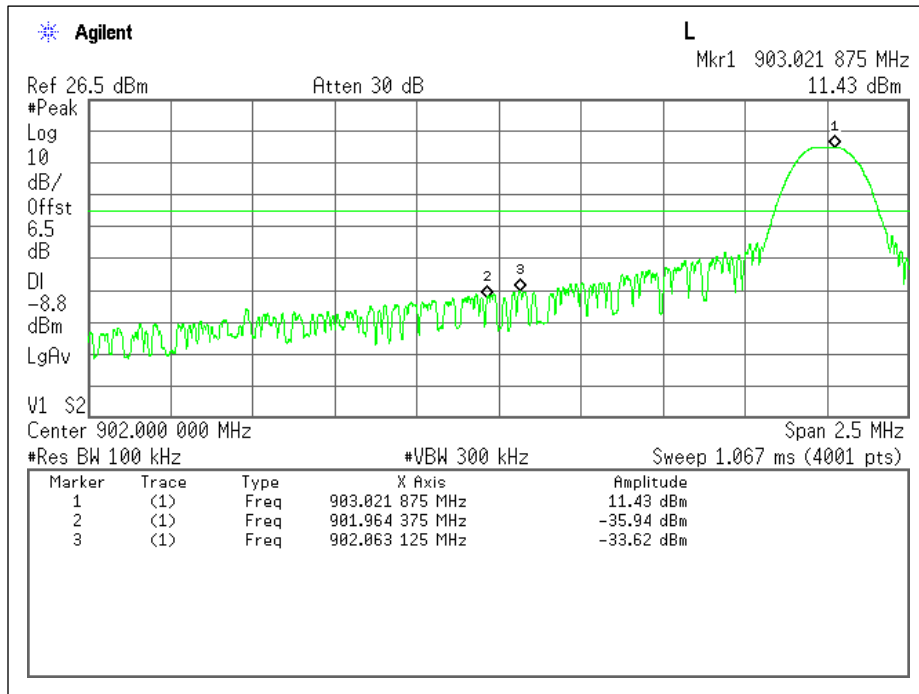


Low Channel - Plot

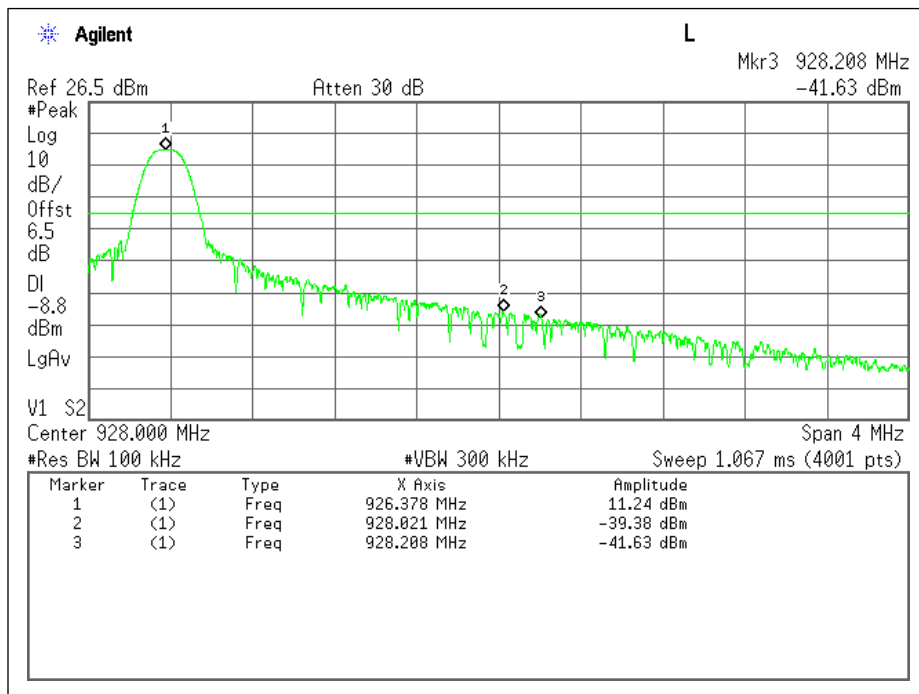


High Channel – Plot


**Conducted Spurious**

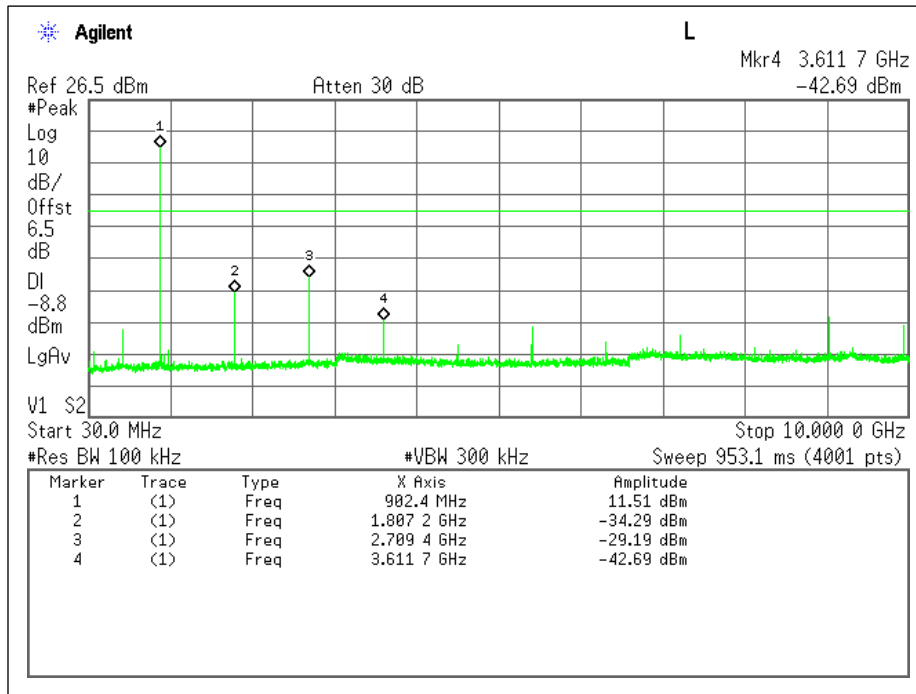

Low Channel - Plot

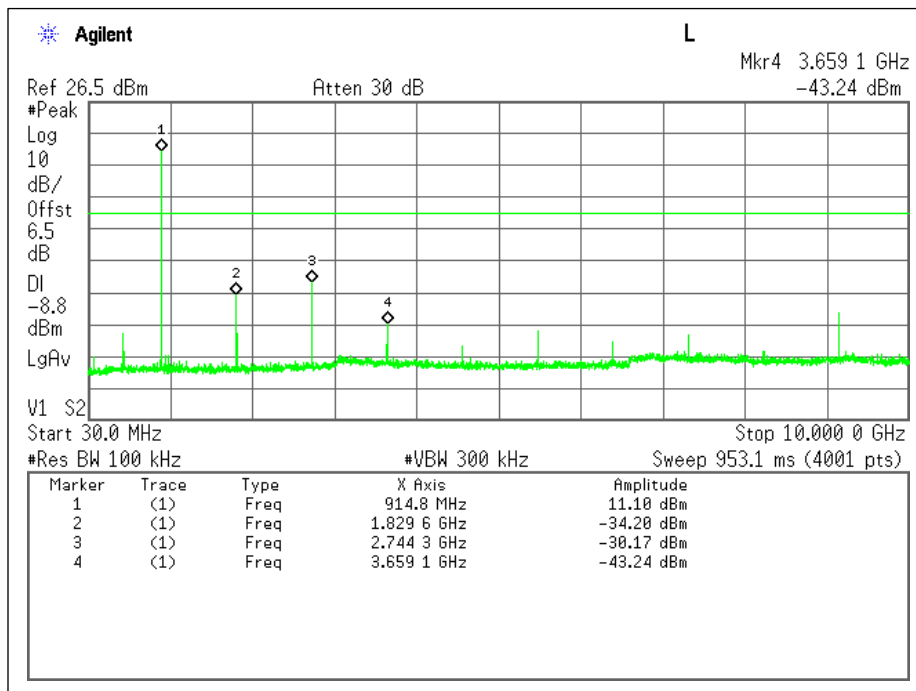

Mid Channel - Plot

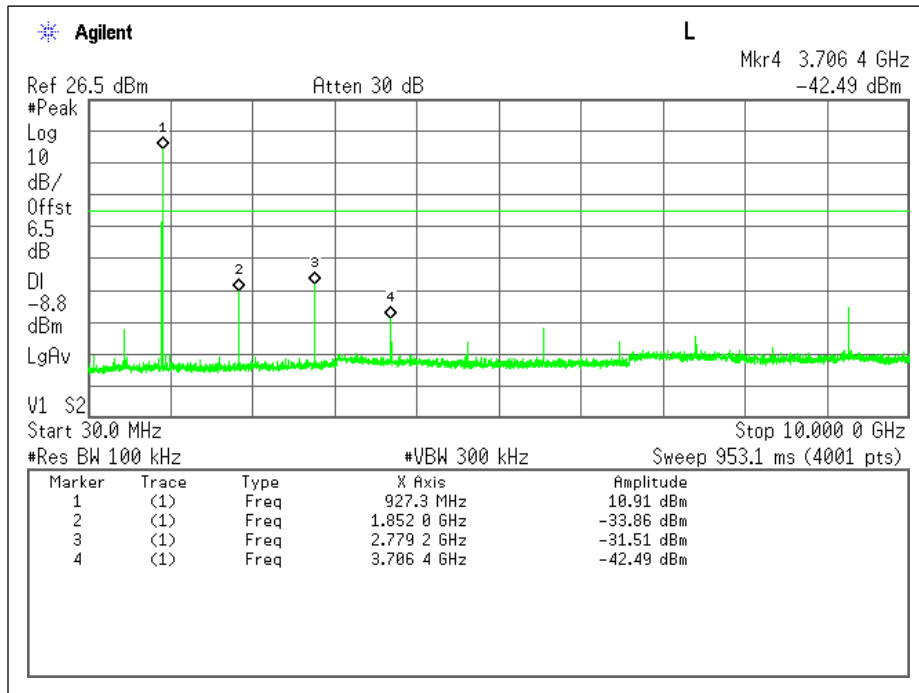

High Channel - Plot

## Radiated Emissions (Unintentional)

### Test Description

The Radiated Emissions (Unintentional) measurement is a test of the whole EUT during normal operation. It is a Radiated Emissions measurement performed from 30 MHz to 5x the highest operating frequency of the device. Prescans are done in a 3 meter anechoic chamber, while final measurements are made on the OATS. The EUT is positioned on a turntable in the manner for which the device will be normally used, with all peripherals connected in idle, with all cables typically used with the EUT dressed appropriately.

### Test Criteria

Reference	Limit		
	Frequency Range	Field Strength Limit (uV/m) at 3M	Field Strength Limit (dBuV/m) at 3M
CFR 47 Subpart B, 15.109 ICES-003	30-88	100	40
	88-216	150	43.5
	216-960	200	46
	Above 960	500	54


### Test Information

Tester	Test Location	Date	Temperature (°C)	Humidity (%RH)	Pressure (mbar)	Results (P/F)
CL/JB	RF Chamber / OATS	02/07/19-03/19/19	-3.9	18	1010	P

**NOTE:** Prescans performed in an anechoic chamber, final measurements performed on an OATS.

**Test Results**


**Below 1GHz – Low Channel**

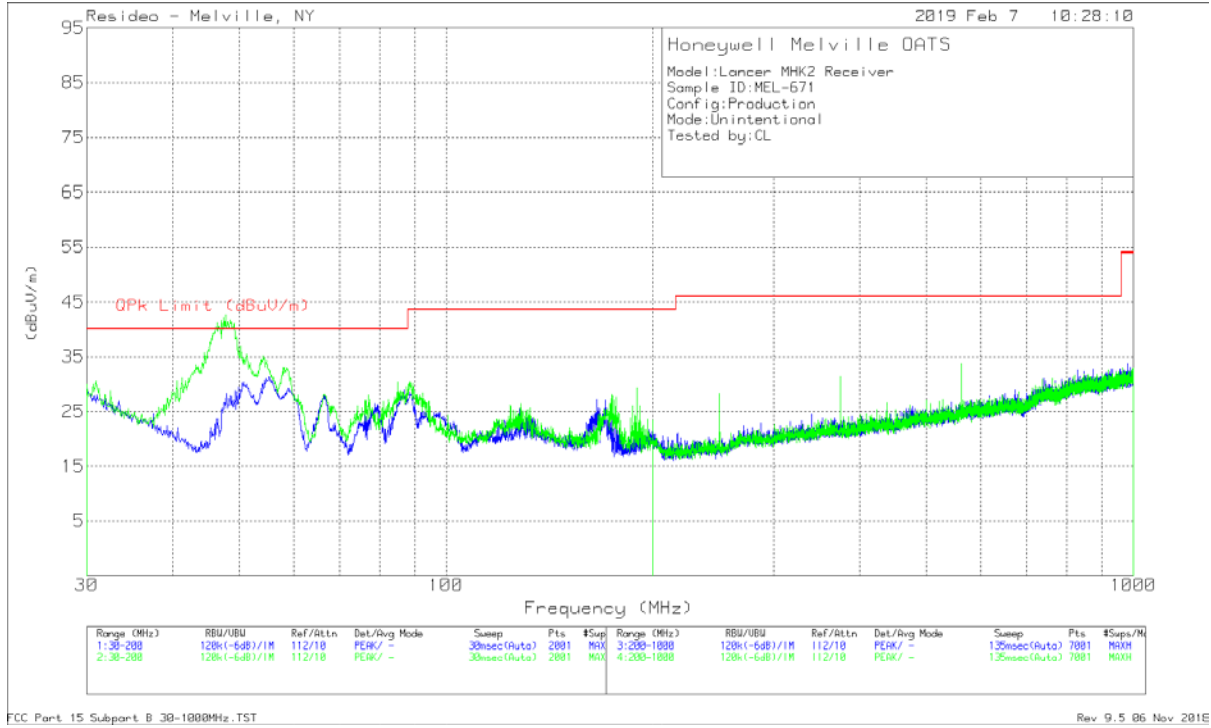

Frequency (MHz)	Meter Reading (dBuV)	Det	AF_JB6 [dB/m]	Gain/Loss (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
54.8817	16.27	Qp	12.1	1.1	29.47	40	-10.53	258	395	H
87.504	-2.82	Qp	11.9	1.5	10.58	40	-29.42	334	377	H
46.8019	17.8	Qp	14	1	32.8	40	-7.2	161	213	V
57.5809	16.24	Qp	11.9	1.2	29.34	40	-10.66	35	349	V
84.9706	12.75	Qp	11.8	1.4	25.95	40	-14.05	260	103	V
954.6971	4.46	Qp	27.7	9.2	41.36	46.02	-4.66	171	335	H

Qp - Quasi-Peak detector

**Below 1GHz – Mid Channel**

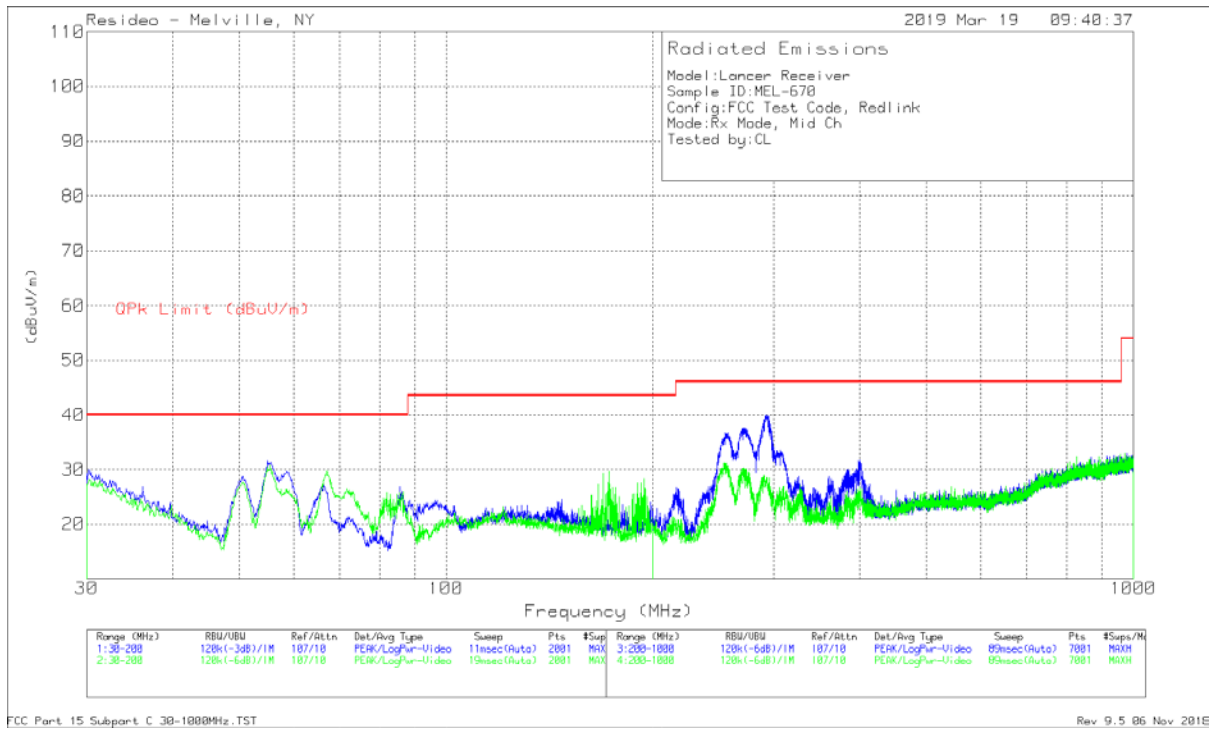


Frequency (MHz)	Meter Reading (dBuV)	Det	AF_JB6 [dB/m]	Gain/Loss (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
54.99	14.58	Qp	12	1.1	27.68	40	-12.32	147	311	H
55.5	15.49	Qp	12	1.3	28.79	40	-11.21	6	337	H
67.06	11.42	Qp	11.8	.9	24.12	40	-15.88	257	183	V
291.7717	19.33	Qp	17.7	1	38.03	46.02	-7.99	64	296	V
399.7719	4.43	Qp	19.8	8.3	32.53	46.02	-13.49	148	367	H
* 254.2859	4.47	Qp	15.6	5.8	25.87	46.02	-20.15	117	256	V

Qp - Quasi-Peak detector



**Below 1GHz – High Channel**

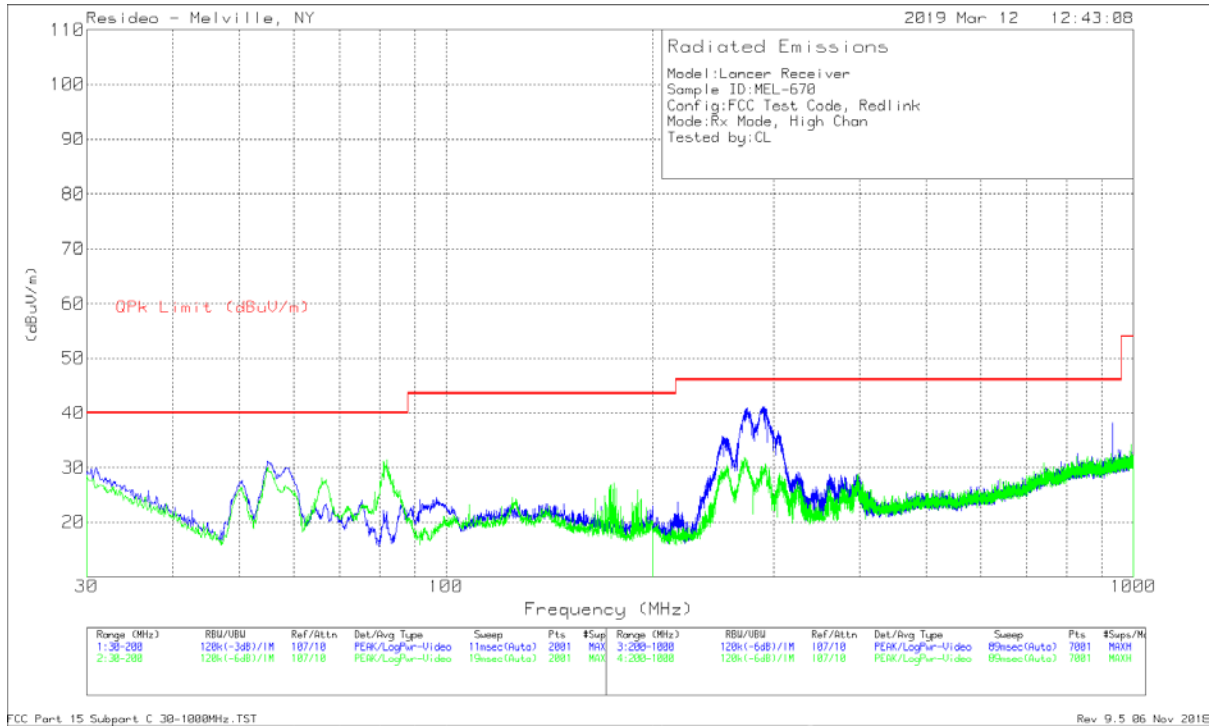


FCC Part 15 Subpart C 30-1000MHz.TST

Rev 9.5 06 Nov 201E

Frequency (MHz)	Meter Reading (dBuV)	Det	AF_JB6 [dB/m]	Gain/Loss (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
31.2416	6.73	Qp	24	.9	31.63	40	-8.37	168	243	H
54.8863	15.36	Qp	12.1	1.1	28.56	40	-11.44	58	371	H
82.3238	13.99	Qp	11.7	1.4	27.09	40	-12.91	24	178	V
54.4987	20.48	Qp	12.1	1.1	33.68	40	-6.32	322	203	V
290.2738	8.46	Qp	17.8	3	29.26	46.02	-16.76	207	213	H
271.4915	8.5	Qp	17.5	3.1	29.1	46.02	-16.92	300	192	V


Qp - Quasi-Peak detector

Above 1GHz – Low Channel

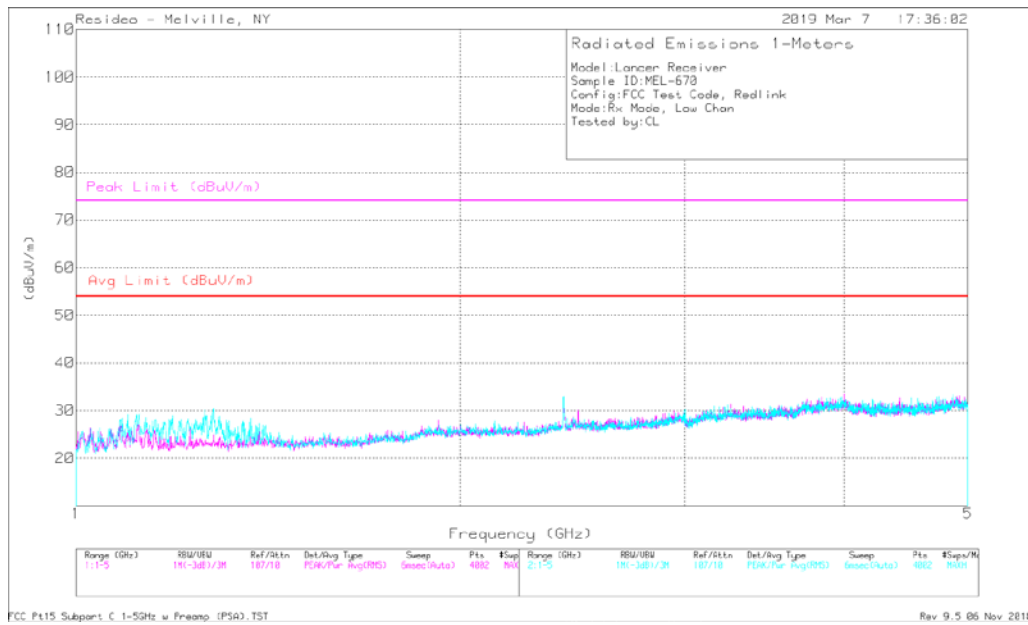

**NOTE: No emissions detected within 20dB of the average limit**

**Above 1GHz – Mid Channel**

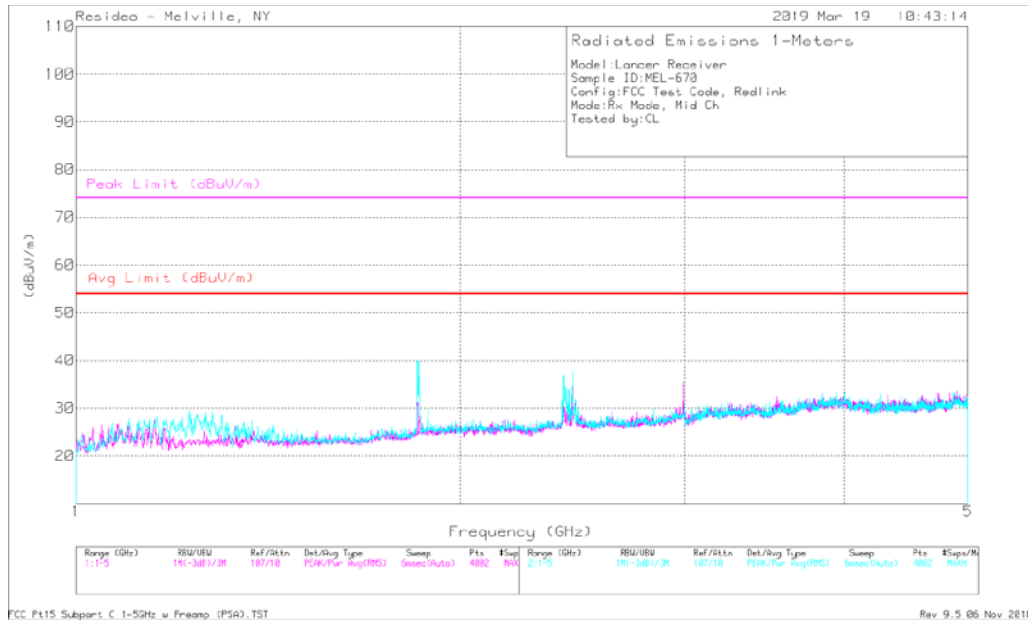


Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.85	25.43	Av	27.4	-37.9	14.93	54	-39.07	74	-59.07	343	399	H
2.45	59.92	Av	28.7	-38.1	50.52	54	-3.48	74	-23.48	115	356	H
2.412	38.75	Av	28.6	-38.1	29.25	54	-24.75	74	-44.75	338	335	H
1.851	43.6	Av	27.4	-37.9	33.1	54	-20.9	74	-40.9	64	305	V
2.45	58.53	Av	28.7	-38.1	49.13	54	-4.87	74	-24.87	301	308	V
2.444	52.12	Av	28.7	-38.1	42.72	54	-11.28	74	-31.28	26	393	V

Av - Average detection

**NOTE: Emissions detected during prescan are ambient and not a product of the EUT**

**Above 1GHz – High Channel**

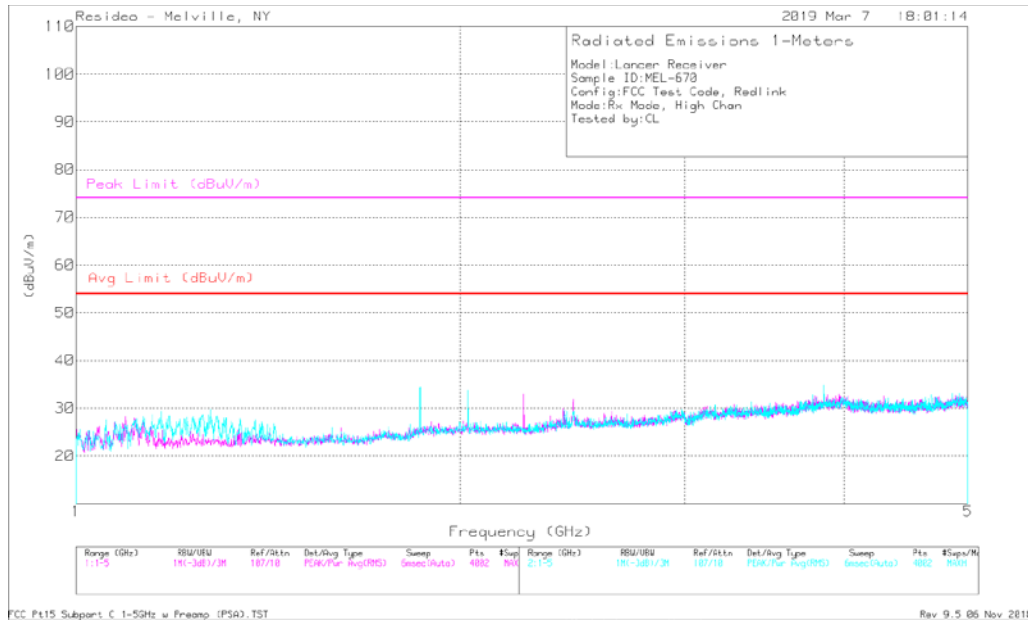

**NOTE: No emissions detected within 20dB of the average limit**

## Radiated Emissions (Intentional)

### Test Description

Intentional Radiator Radiated Emissions are a test of the emissions, and harmonics on the EUT. The EUT is positioned to get the maximum emissions after a series of prescan measurements. The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1 GHz measurements and 1.5 m above the ground plane for above 1 GHz measurements. The antenna to EUT distance is 3 meters. For measurements below 1 GHz the resolution bandwidth is set to 120 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 1 MHz for peak measurements and as applicable for average measurements. The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

### Test Criteria

Reference	Limit		
	Frequency Range (MHz)	Field Strength Limit (uV/m)	Measurement distance (meters)
CFR 47 Subpart C, 15.205 CFR 47 Subpart C, 15.209 RSS-GEN	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100**	3
	88-216	150**	3
	216-960	200**	3
	Above 960	500	3

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

### Test Information


Tester	Test Location	Date	Temperature (°C)	Humidity (%RH)	Pressure (mbar)	Results (P/F)
CL/JB	RF Chamber / OATS	02/07/19-02/20/19	-3.9	18	1010	P

**NOTE:** Below 30MHz, pretesting showed that no emissions as a product of the EUT were detected within 20dB of the regulatory limit. Prescans performed in an anechoic chamber, final measurements performed on an OATS.

**Test Results**

**Spurious Emissions**

**Below 1GHz**

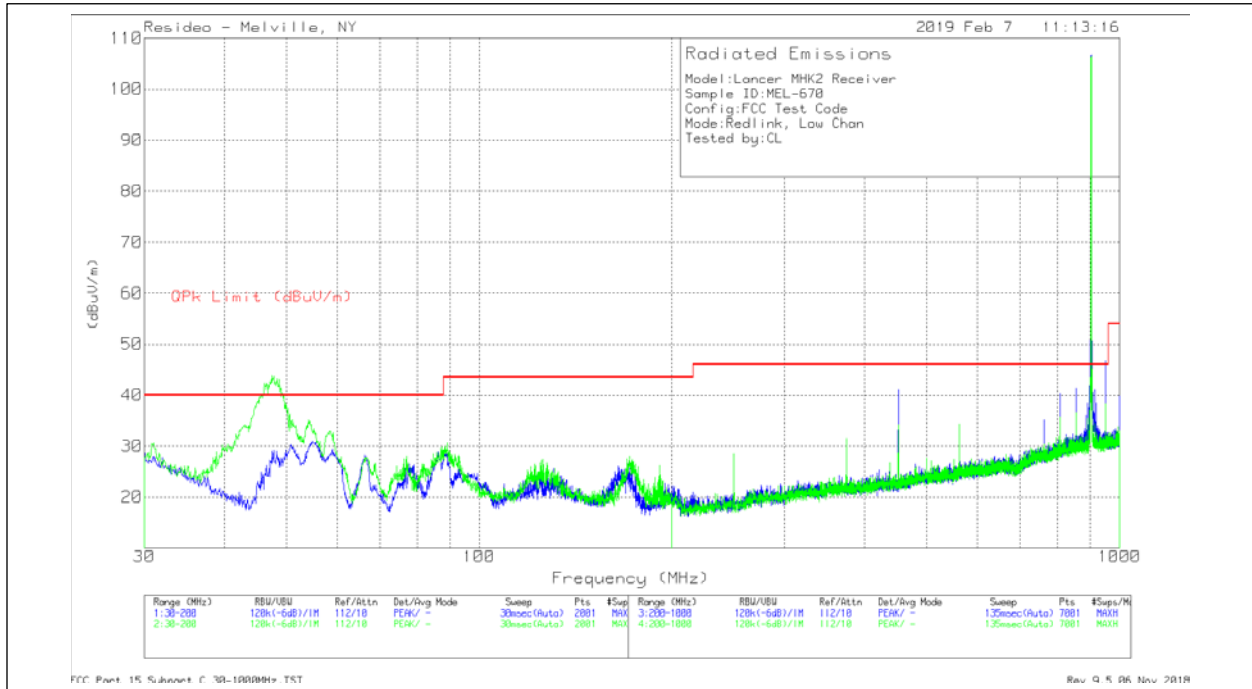


Low Channel - Plot

Frequency (MHz)	Meter Reading (dBuV)	Det	AF_JB6 [dB/m]	Gain/Loss (dB)	Corrected Reading (dBuV/m)	QPK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
54.532	17.21	Qp	12.1	1.1	30.41	40	-9.59	62	386	H
47.8108	18.75	Qp	13.5	1.1	33.35	40	-6.65	144	264	V
452.4755	4.57	Qp	21.2	4.7	30.47	46.02	-15.55	0	294	H
951.263	4.43	Qp	27.7	9.2	41.33	46.02	-4.69	215	258	H
451.6322	11.67	Qp	21.1	4.7	37.47	46.02	-8.55	129	397	V
950.8542	4.4	Qp	27.7	9.2	41.3	46.02	-4.72	36	339	V

Qp - Quasi-Peak detector

Low Channel - Data

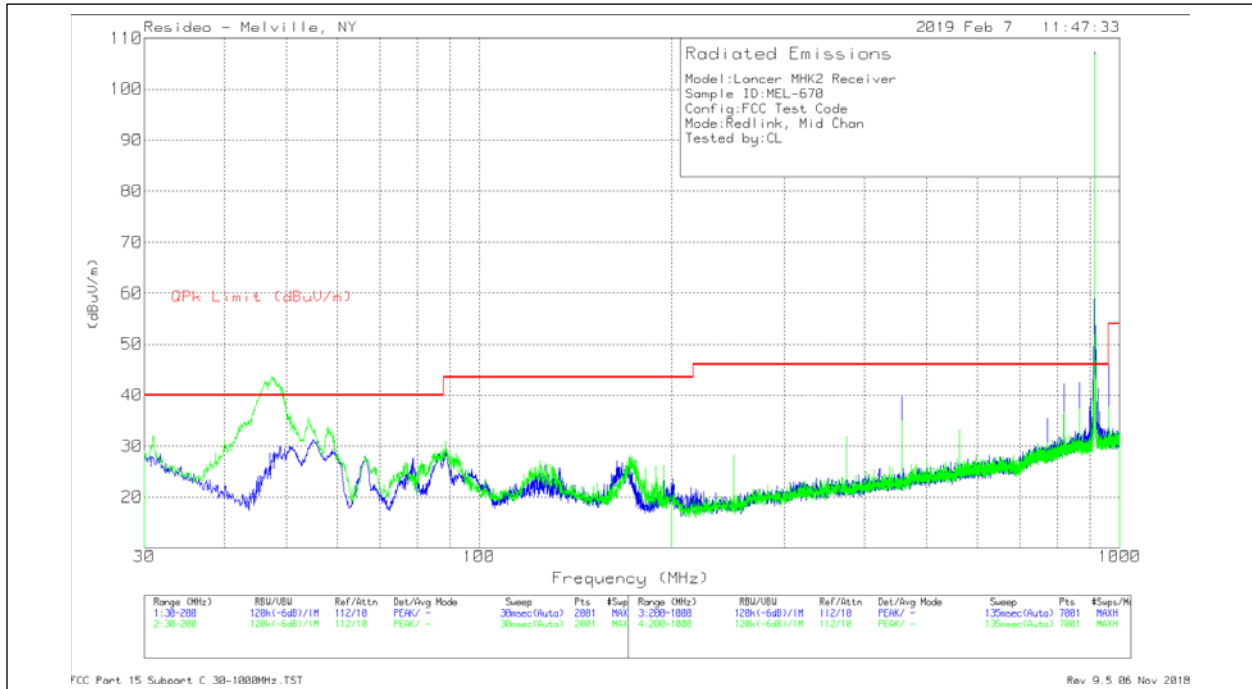


Mid Channel - Plot

Frequency (MHz)	Meter Reading (dBuV)	Det	AF_JB6 [dB/m]	Gain/Loss (dB)	Corrected Reading (dBuV/m)	QPK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
54.8733	16.92	Qp	12.1	1.1	30.12	40	-9.88	99	393	H
48.0106	18.64	Qp	13.4	1.1	33.14	40	-6.86	230	227	V
457.1054	4.52	Qp	21.3	4.9	30.72	46.02	-15.3	102	160	H
* 962.7163	4.45	Qp	27.7	9.2	41.35	53.97	-12.62	275	216	H
457.5678	4.54	Qp	21.3	4.9	30.74	46.02	-15.28	12	345	V
866.5487	.99	Qp	26.4	8.7	36.09	46.02	-9.93	284	320	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Qp - Quasi-Peak detector

Mid Channel - Data

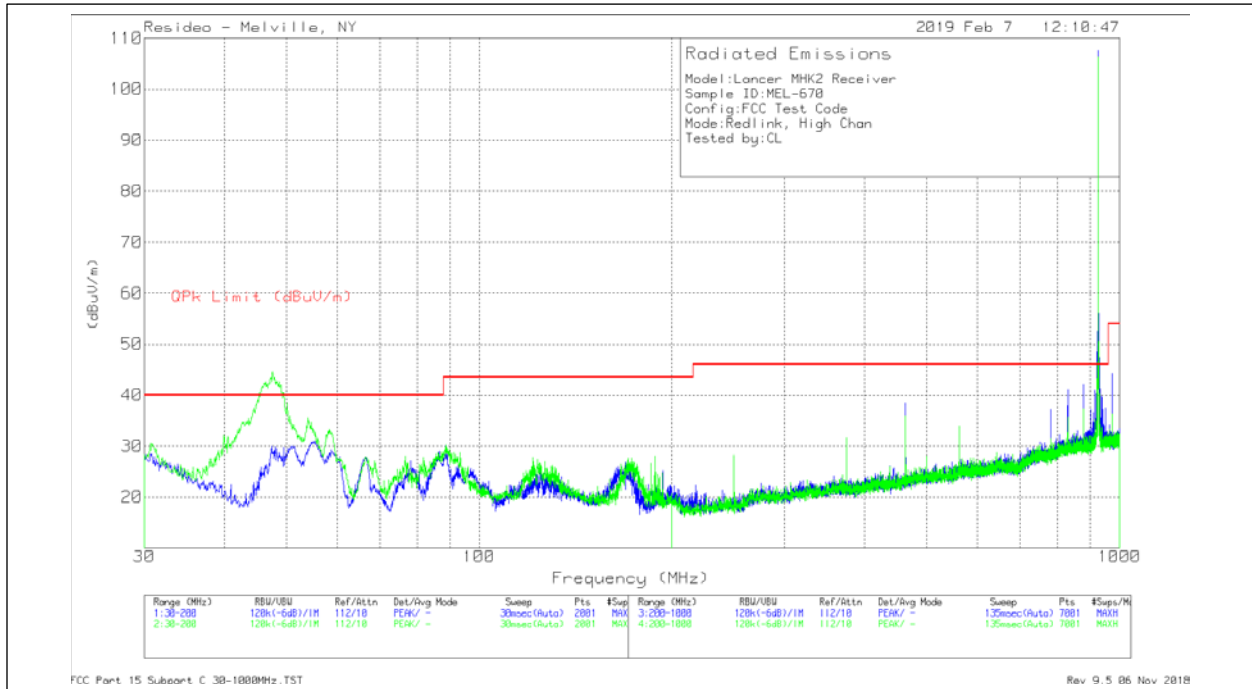

High Channel - Plot


Frequency (MHz)	Meter Reading (dBuV)	Det	AF_JB6 [dB/m]	Gain/Loss (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
55.1262	15.91	Qp	12	1.1	29.01	40	-10.99	152	343	H
48.0339	18.56	Qp	13.3	1.1	32.96	40	-7.04	277	180	V
462.9826	4.59	Qp	21.4	5	30.99	46.02	-15.03	237	280	H
877.0125	-4.77	Qp	26.4	9.1	30.73	46.02	-15.29	60	306	H
463.1881	-7.47	Qp	21.4	5	18.93	46.02	-27.09	117	372	V
878.4231	4.55	Qp	26.4	9	39.95	46.02	-6.07	254	339	V

Qp - Quasi-Peak detector

High Channel - Data



**Above 1GHz**

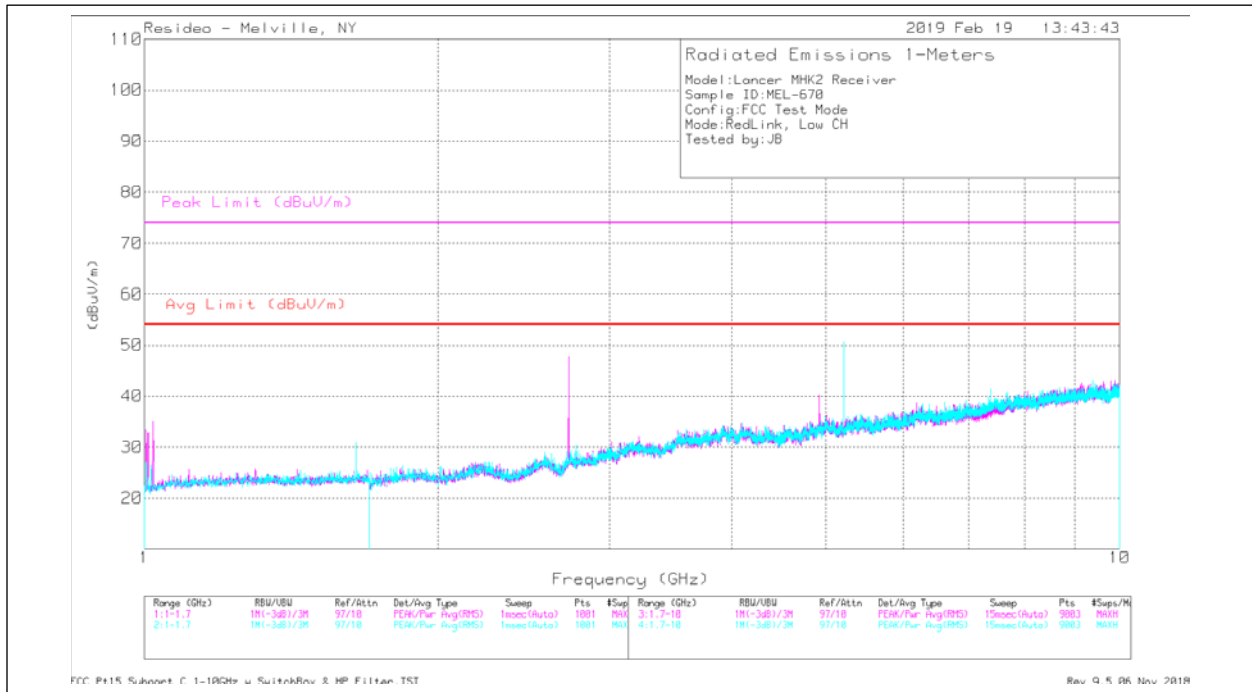

Low Channel - Plot


Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.724	45.56	PKFH	29	-38.1	36.46	-	-	74	-37.54	84	394	H
* 2.724	31.49	VA1T	29	-38.1	22.39	54	-31.61	-	-	84	394	H
* 4.924	50.3	PKFH	33.2	-33.6	49.9	-	-	74	-24.1	324	370	H
* 4.924	30.64	VA1T	33.2	-33.6	30.24	54	-23.76	-	-	324	370	H
* 1.021	35.63	PKFH	24.4	-36.9	23.13	-	-	74	-50.87	252	101	H
* 1.021	24.23	VA1T	24.4	-36.9	11.73	54	-42.27	-	-	252	101	H
1.649	42.65	PKFH	25.6	-37.9	30.35	-	-	74	-43.65	342	320	V
1.649	30.29	VA1T	25.6	-37.9	17.99	54	-36.01	-	-	342	320	V
5.214	49.44	PKFH	34	-33.8	49.64	-	-	74	-24.36	330	387	V
5.214	34.9	VA1T	34	-33.8	35.1	54	-18.9	-	-	330	387	V
* 9.389	42.39	PKFH	37.9	-28.8	51.49	-	-	74	-22.51	201	190	V
* 9.389	29.5	VA1T	37.9	-28.8	38.6	54	-15.4	-	-	201	190	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PKFH - FHSS: RB=100k/1MHz VB=3 x RB, Peak

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

Low Channel - Data

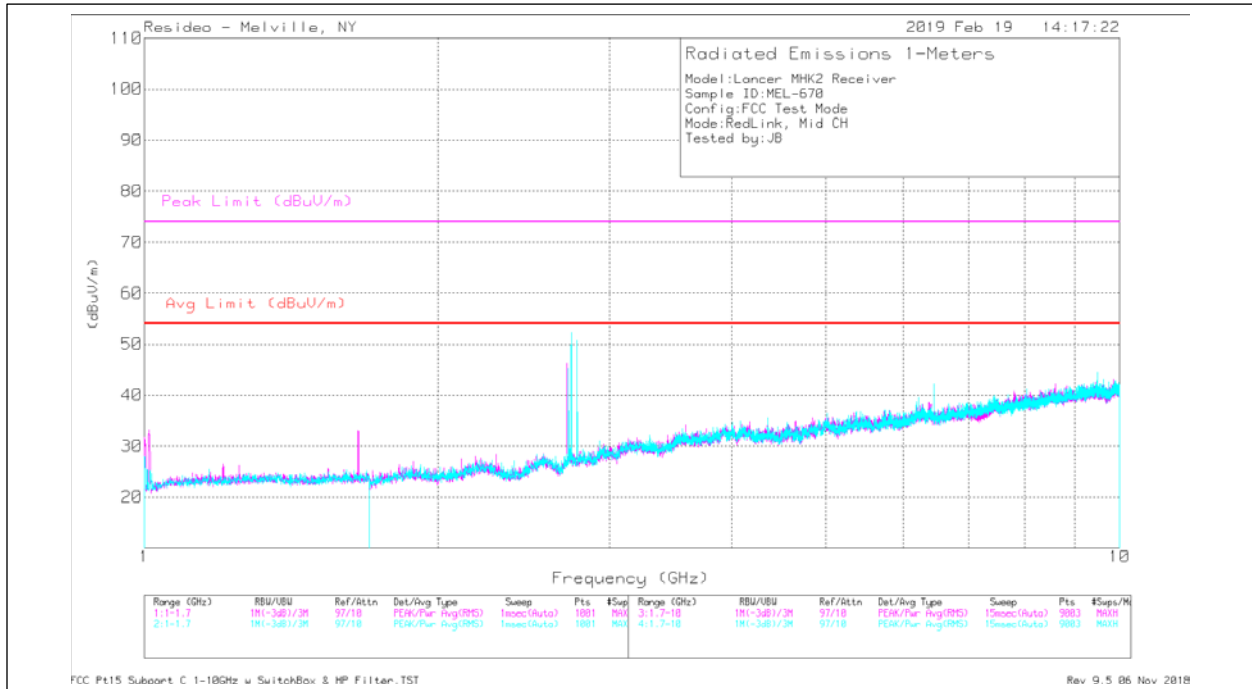

Mid Channel - Plot


Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.011	36.4	PKFH	24.3	-36.9	23.8	-	-	74	-50.2	24	348	H
* 1.011	24.23	VA1T	24.3	-36.8	11.73	54	-42.27	-	-	24	348	H
1.657	42.36	PKFH	25.7	-37.3	30.76	-	-	74	-43.24	256	371	H
1.657	30.28	VA1T	25.7	-37.3	18.68	54	-35.32	-	-	256	371	H
* 2.741	44.32	PKFH	29	-37.8	35.52	-	-	74	-38.48	303	229	H
* 2.741	31.7	VA1T	29	-37.8	22.9	54	-31.1	-	-	303	229	H
6.454	42.29	PKFH	34.7	-30.1	46.89	-	-	74	-27.11	132	293	V
6.454	28.97	VA1T	34.7	-30.1	33.57	54	-20.43	-	-	132	293	V
9.543	41.98	PKFH	38	-28.9	51.08	-	-	74	-22.92	263	341	V
9.543	29.52	VA1T	38	-28.9	38.62	54	-15.38	-	-	263	341	V
* 2.741	44.71	PKFH	29	-37.8	35.91	-	-	74	-38.09	258	249	V
* 2.741	31.73	VA1T	29	-37.8	22.93	54	-31.07	-	-	258	249	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PKFH - FHSS: RB=100k/1MHz VB=3 x RB, Peak

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

Mid Channel - Data

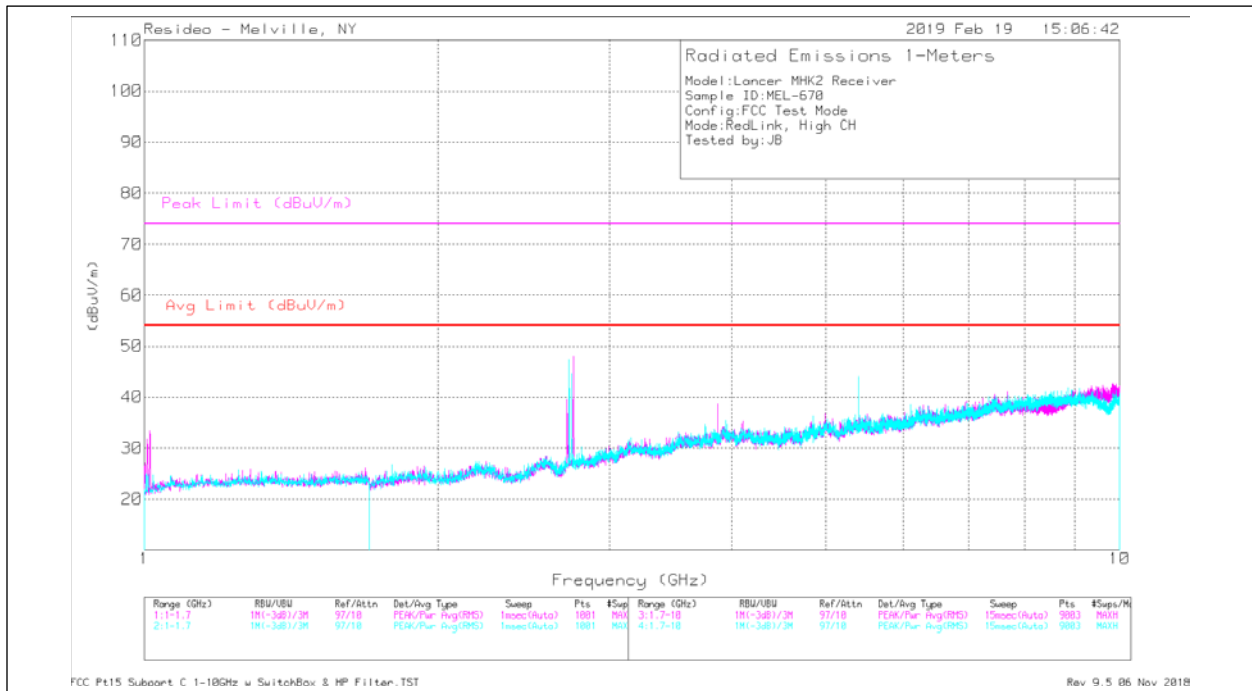

High Channel - Plot

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.011	36.4	PKFH	24.3	-36.9	23.8	-	-	74	-50.2	24	348	H
* 1.011	24.23	VA1T	24.3	-36.8	11.73	54	-42.27	-	-	24	348	H
* 2.756	45.23	PKFH	29	-37.8	36.43	-	-	74	-37.57	5	120	H
* 2.756	31.65	VA1T	29	-37.8	22.85	54	-31.15	-	-	5	120	H
* 3.874	44.32	PKFH	32.8	-34.4	42.72	-	-	74	-31.28	319	394	H
* 3.874	30.92	VA1T	32.8	-34.4	29.32	54	-24.68	-	-	319	394	H
* 2.726	45.01	PKFH	29	-37.9	36.11	-	-	74	-37.89	219	103	V
* 2.726	31.49	VA1T	29	-37.9	22.59	54	-31.41	-	-	219	103	V
* 5.403	43.17	PKFH	34.3	-33.4	44.07	-	-	74	-29.93	0	113	V
* 5.403	30.29	VA1T	34.3	-33.4	31.19	54	-22.81	-	-	0	113	V
8.955	41.78	PKFH	37.8	-28.8	50.78	-	-	74	-23.22	258	324	V
8.955	29.3	VA1T	37.8	-28.8	38.3	54	-15.7	-	-	258	324	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PKFH - FHSS: RB=100k/1MHz VB=3 x RB, Peak

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

High Channel - Data

## Conducted Emissions (Mains)

### Test Description

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10 / C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorder for both NEUTRAL and HOT lines.

### Test Criteria



Reference	Limit (dBuV)		
	Frequency Range (MHz)	Quasi-Peak	Average
CFR 47 Subpart C, 15.207 RSS-GEN	0.15-0.5	66 to 56	56 to 46
CFR 47 Subpart B, 15.107 ICES-003	0.5-5	56	46
	5-30	60	50

### Test Information

Tester	Test Location	Date	Temperature (°C)	Humidity (%RH)	Pressure (mbar)	Results (P/F)
CL	Shield Room	03/01/19, 03/12/19	23	7	1013	P

**Test Results**

**Unintentional Mode – Low Channel**

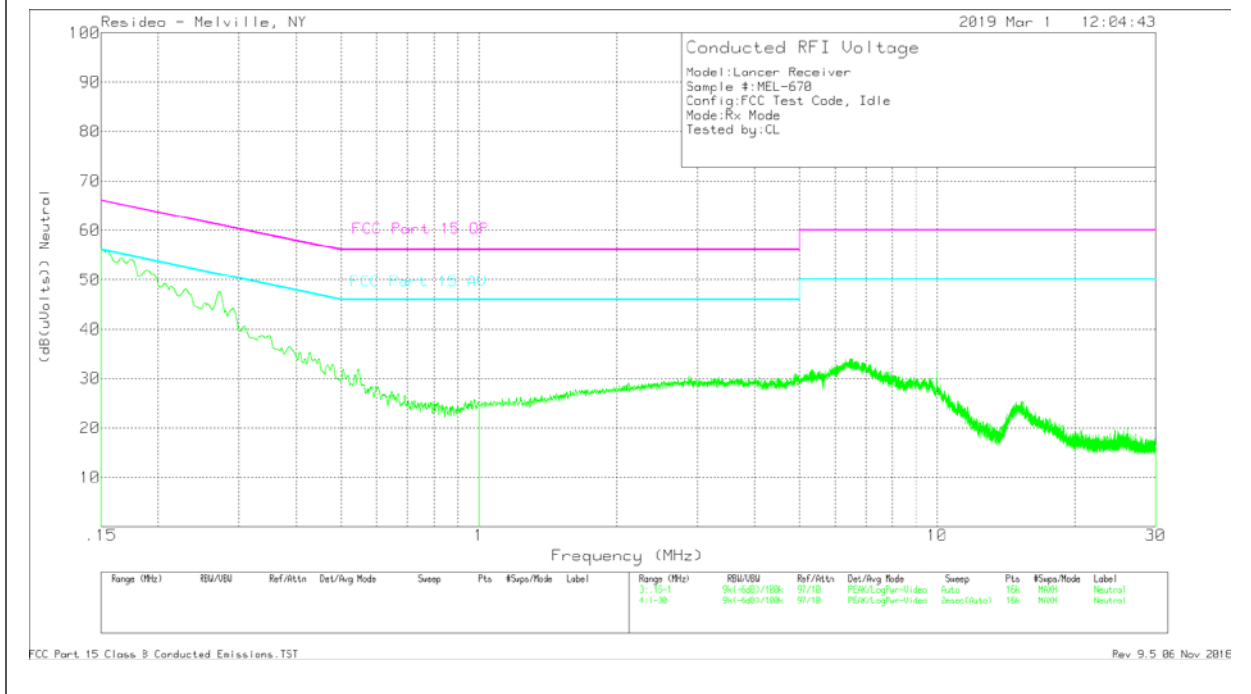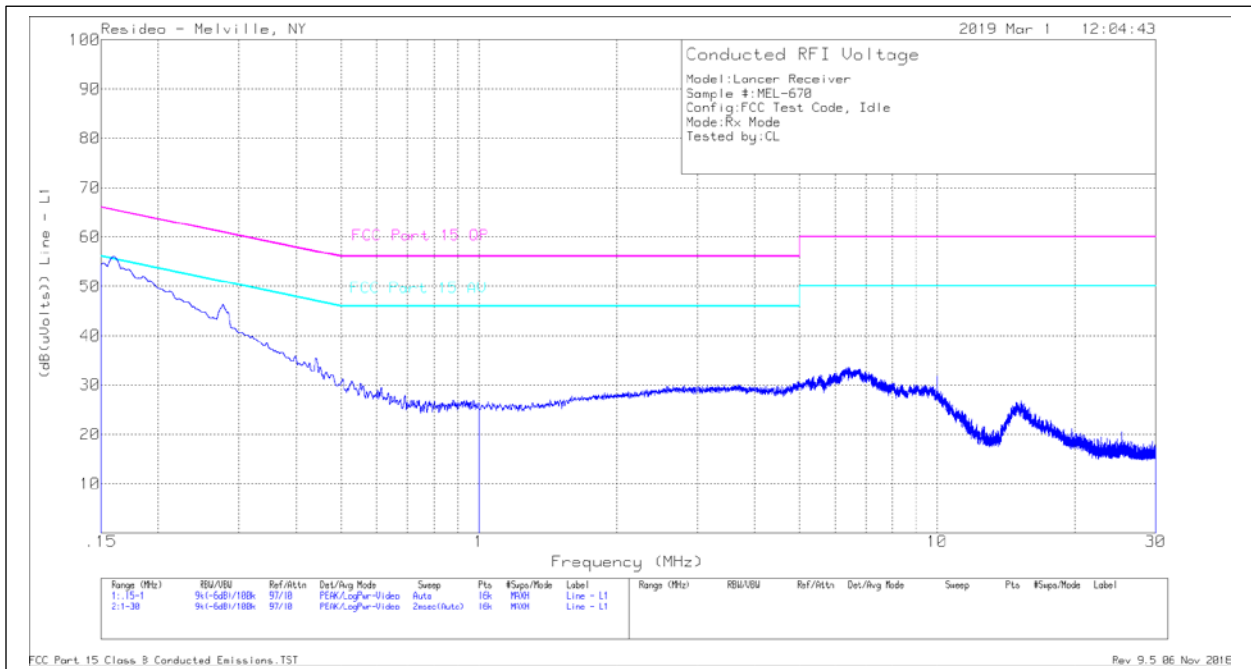

LINE 1

Frequency (MHz)	Meter Reading (dBuV)	Det	L1,Lim On [dB]	CDE Cable [dB]	Corrected Reading (dB(uVolts))	FCC Part 15 QP	Margin (dB)	FCC Part 15 AV	Margin (dB)
.16071	13.25	Ca	10.4	0	23.65	65.43	-41.78	55.43	-31.78
.27935	35.35	Pk	10.1	0	45.45	60.84	-15.39	50.84	-5.39
.44184	25.42	Pk	10	0	35.42	57.03	-21.61	47.03	-11.61
6.57009	23.08	Pk	9.9	0	32.98	60	-27.02	50	-17.02
9.99839	21.87	Pk	9.8	.1	31.77	60	-28.23	50	-18.23
15.04934	16.08	Pk	9.8	.1	25.98	60	-34.02	50	-24.02



LINE 2

Frequency (MHz)	Meter Reading (dBuV)	Det	L2,Lim On [dB]	CDE Cable [dB]	Corrected Reading (dB(uVolts))	FCC Part 15 QP	Margin (dB)	FCC Part 15 AV	Margin (dB)
.15419	14.08	Ca	10.5	.1	24.68	65.77	-41.09	55.77	-31.09
.27182	37.54	Pk	10.1	0	47.64	61.06	-13.42	51.06	-3.42
.43085	24.14	Pk	9.9	0	34.04	57.24	-23.2	47.24	-13.2
6.43962	24.13	Pk	9.8	0	33.93	60	-26.07	50	-16.07
9.99839	21.45	Pk	9.8	.1	31.35	60	-28.65	50	-18.65
15.24413	15.64	Pk	9.7	.1	25.44	60	-34.56	50	-24.56

Pk - Peak detector

Ca - CISPR average detection

**Unintentional Mode – Mid Channel**

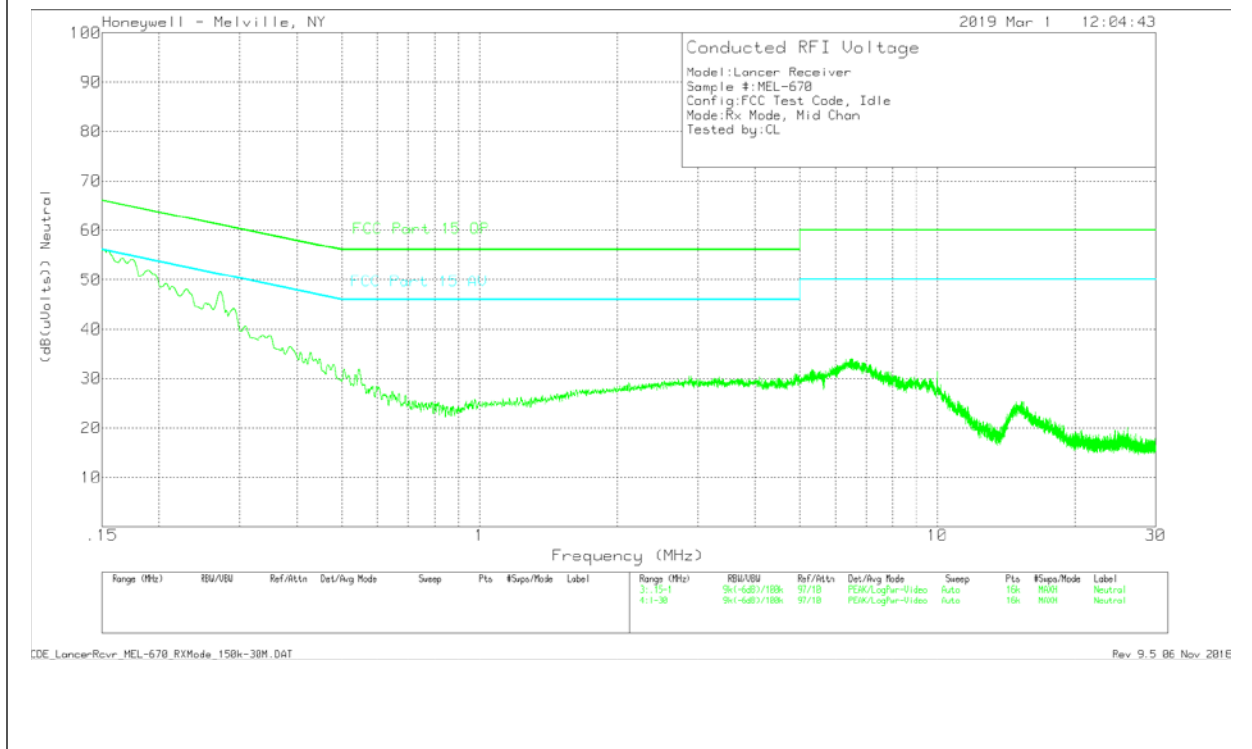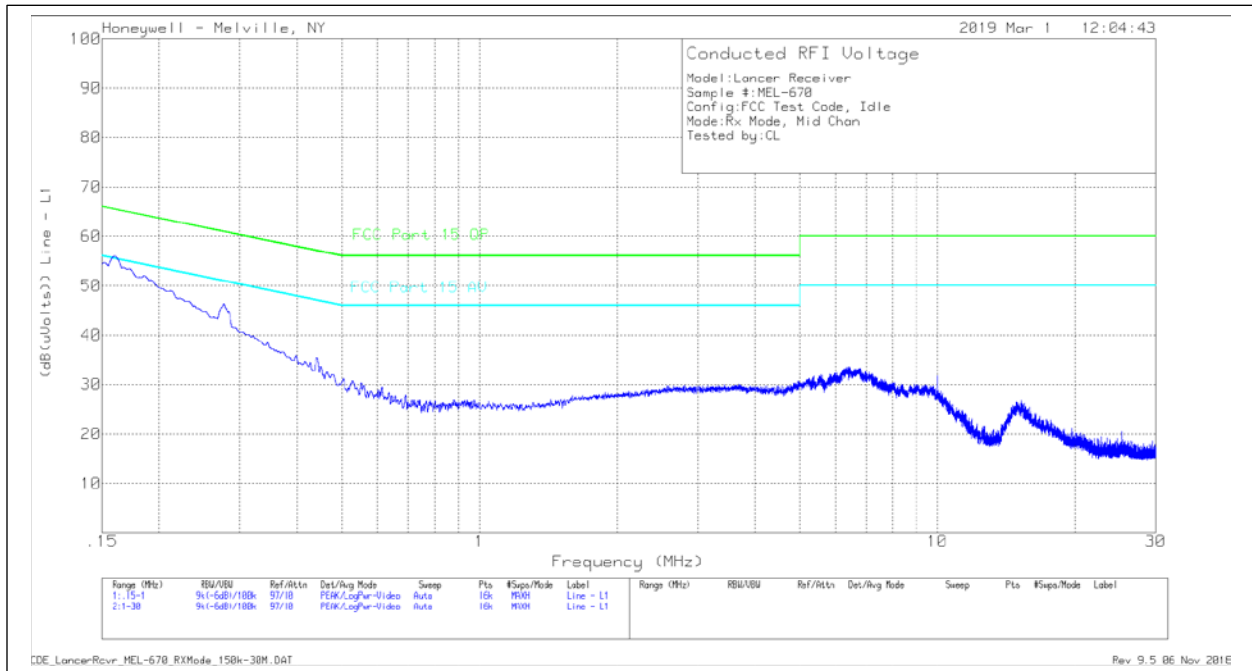

LINE 1

Frequency (MHz)	Meter Reading (dBuV)	Det	L1,Lim On [dB]	CDE Cable [dB]	Corrected Reading (dB(uVolts))	FCC Part 15 QP	Margin (dB)	FCC Part 15 AV	Margin (dB)
.15419	14.08	Ca	10.5	.1	24.68	65.77	-41.09	55.77	-31.09
.18726	41.51	Pk	10.3	0	51.81	64.16	-12.35	54.16	-2.35
.23212	36.61	Pk	10.2	0	46.81	62.37	-15.56	52.37	-5.56
.27768	35.95	Pk	10.1	0	46.05	60.88	-14.83	50.88	-4.83
.43901	24.72	Pk	10	0	34.72	57.08	-22.36	47.08	-12.36
.61423	19.29	Pk	9.9	0	29.19	56	-26.81	46	-16.81



LINE 2

Frequency (MHz)	Meter Reading (dBuV)	Det	L2,Lim On [dB]	CDE Cable [dB]	Corrected Reading (dB(uVolts))	FCC Part 15 QP	Margin (dB)	FCC Part 15 AV	Margin (dB)
.15747	44.33	Pk	10.5	0	54.83	65.6	-10.77	55.6	-.77
.17472	43.83	Pk	10.3	0	54.13	64.73	-10.6	54.73	-.6
.19508	40.9	Pk	10.3	0	51.2	63.82	-12.62	53.82	-2.62
.22963	37.89	Pk	10.2	0	48.09	62.46	-14.37	52.46	-4.37
.27047	37.38	Pk	10.1	0	47.48	61.1	-13.62	51.1	-3.62
.54374	21.54	Pk	9.9	0	31.44	56	-24.56	46	-14.56

Pk - Peak detector



**Unintentional Mode – High Channel**

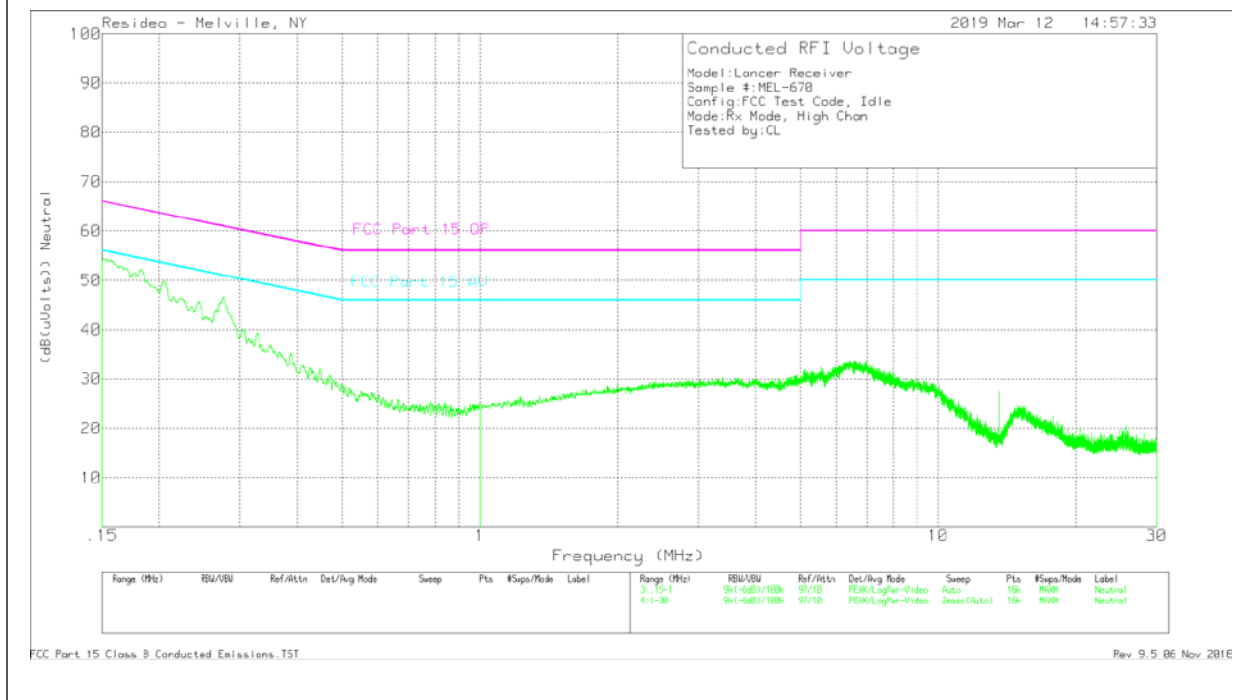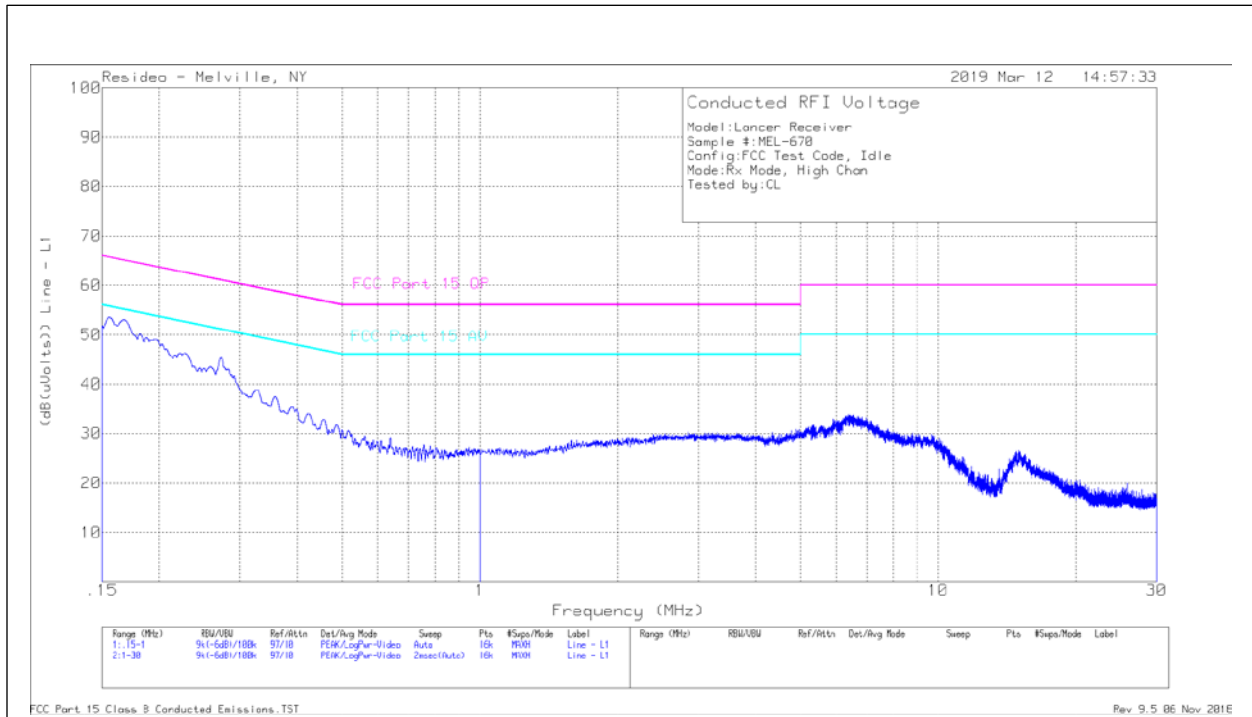

LINE 1


Frequency (MHz)	Meter Reading (dBuV)	Det	L1,Lim On [dB]	CDE Cable [dB]	Corrected Reading (dB(uVolts))	FCC Part 15 QP	Margin (dB)	FCC Part 15 AV	Margin (dB)
.15795	42.46	Pk	10.5	0	52.96	65.57	-12.61	55.57	-2.61
.27132	35.19	Pk	10.1	0	45.29	61.08	-15.79	51.08	-5.79
.63826	19.27	Pk	9.9	0	29.17	56	-26.83	46	-16.83
6.5121	23.85	Pk	9.9	0	33.75	60	-26.25	50	-16.25
13.55716	12.91	Pk	9.8	.1	22.81	60	-37.19	50	-27.19
14.94696	14.75	Pk	9.8	.1	24.65	60	-35.35	50	-25.35

LINE 2

Frequency (MHz)	Meter Reading (dBuV)	Det	L2,Lim On [dB]	CDE Cable [dB]	Corrected Reading (dB(uVolts))	FCC Part 15 QP	Margin (dB)	FCC Part 15 AV	Margin (dB)
.15429	43.46	Pk	10.5	.1	54.06	65.77	-11.71	55.77	-1.71
.27606	36.45	Pk	10.1	0	46.55	60.93	-14.38	50.93	-4.38
.3867	25.01	Pk	10	0	35.01	58.13	-23.12	48.13	-13.12
6.6172	23.72	Pk	9.8	0	33.52	60	-26.48	50	-16.48
13.55716	17.74	Pk	9.7	.1	27.54	60	-32.46	50	-22.46
15.1191	14.6	Pk	9.7	.1	24.4	60	-35.6	50	-25.6


Pk - Peak detector

**Intentional Mode**

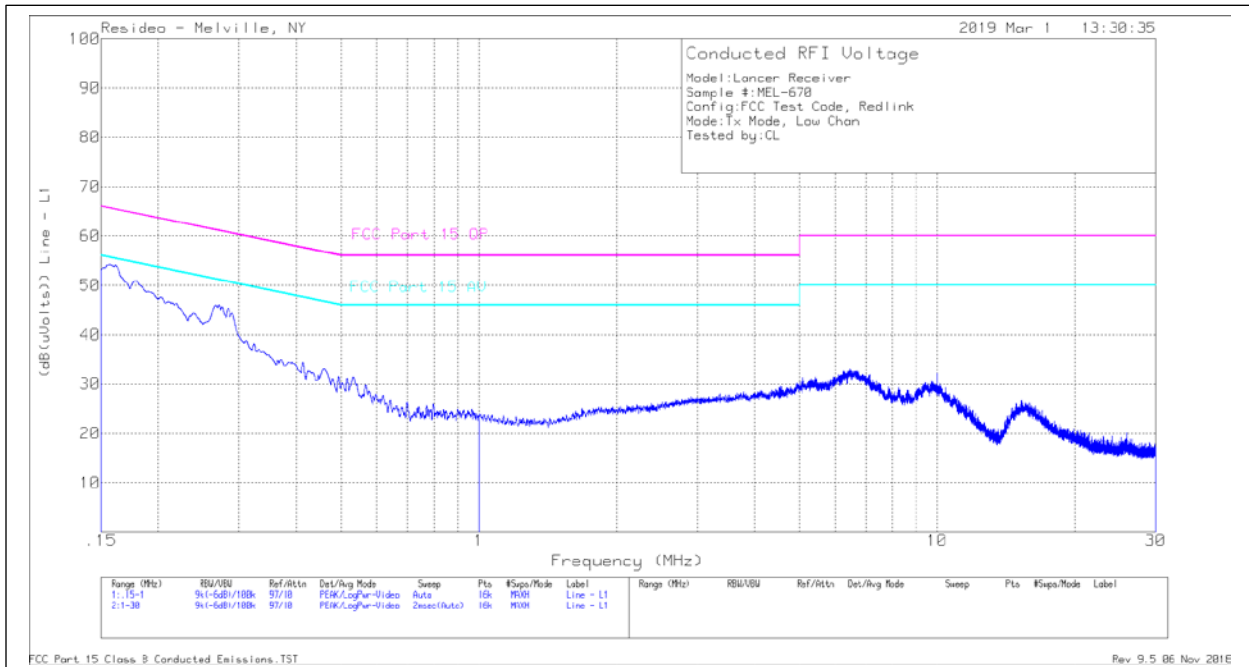

FCC Part 15 Class B Conducted Emissions.TST

Rev. 9.5 06 Nov 2018

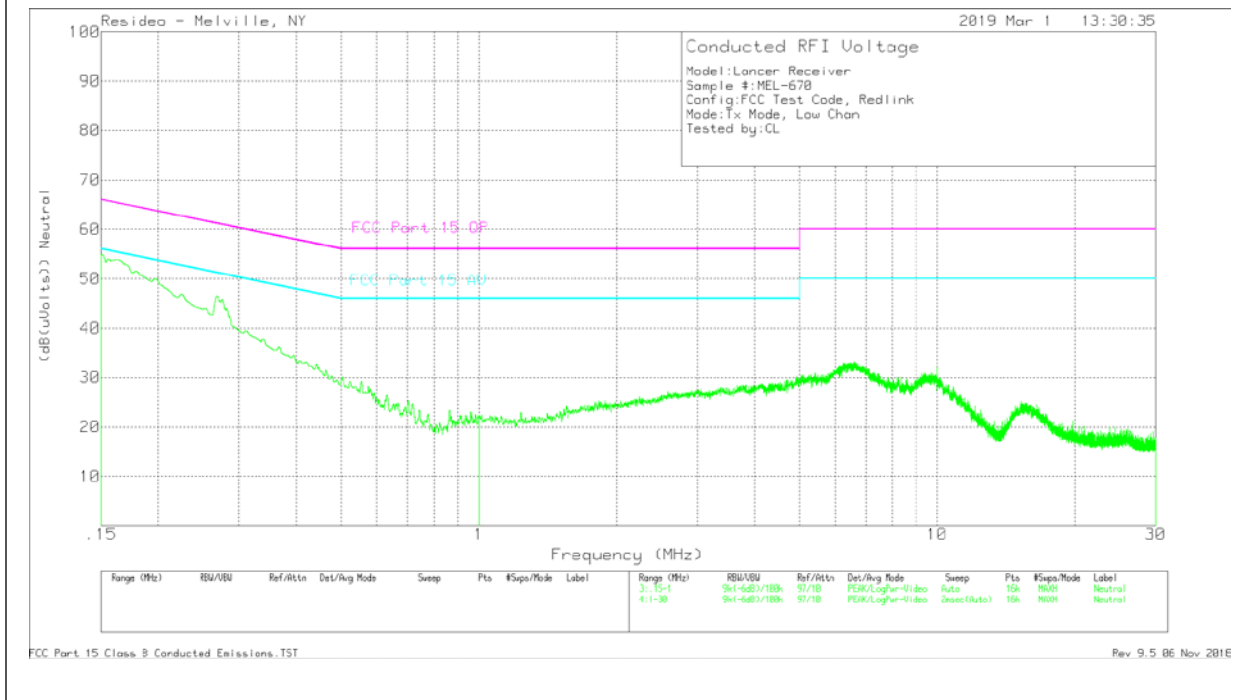

FCC Part 15 Class B Conducted Emissions.TST

Rev. 9.5 06 Nov 2018

LINE 1

Frequency (MHz)	Meter Reading (dBuV)	Det	L1,Lim On [dB]	CDE Cable [dB]	Corrected Reading (dB(uVolts))	FCC Part 15 QP	Margin (dB)	FCC Part 15 AV	Margin (dB)
.15652	43.68	Pk	10.5	0	54.18	65.65	-11.47	55.65	-1.47
.27537	35.57	Pk	10.1	0	45.67	60.95	-15.28	50.95	-5.28
.53732	20.54	Pk	9.9	0	30.44	56	-25.56	46	-15.56
6.46137	23.25	Pk	9.9	0	33.15	60	-26.85	50	-16.85
9.99839	22.21	Pk	9.8	.1	32.11	60	-27.89	50	-17.89
15.25863	16.59	Pk	9.8	.1	26.49	60	-33.51	50	-23.51

LINE 2

Frequency (MHz)	Meter Reading (dBuV)	Det	L2,Lim On [dB]	CDE Cable [dB]	Corrected Reading (dB(uVolts))	FCC Part 15 QP	Margin (dB)	FCC Part 15 AV	Margin (dB)
.15127	44.15	Pk	10.5	.1	54.75	65.93	-11.18	55.93	-1.18
.26875	36.42	Pk	10.1	0	46.52	61.16	-14.64	51.16	-4.64
.55317	19.19	Pk	9.9	0	29.09	56	-26.91	46	-16.91
6.57915	23.38	Pk	9.8	0	33.18	60	-26.82	50	-16.82
9.99658	22.11	Pk	9.8	.1	32.01	60	-27.99	50	-17.99
15.45432	14.84	Pk	9.7	.1	24.64	60	-35.36	50	-25.36

Pk - Peak detector

**END OF REPORT**