

# MEASUREMENT / TECHNICAL REPORT

**Fujitsu Siemens Computers**

**Model: Keyboard KBPC RS (K292)**

**FCC ID: HSS01TASTK292**

**Jan. 20, 2000**

This report concerns: Original grant ☐ Class II change  
Equipment type: Keyboard

Request issue of grant: Immediately upon completion of review  
☐ Defer grant per 47 CFR 0.457(d)(1)(ii) until \_\_\_\_\_  
date \_\_\_\_\_. Company Name agrees to notify the  
Commission by \_\_\_\_\_ date \_\_\_\_\_ of the intended  
date of announcement of the product so that the  
grant can be issued on that date.

Measurement procedure  
used: ANSI C63.4-1992  
☐ FCC/OET MP-4(1987)  
☐ other \_\_\_\_\_

Limits on compliance with: CISPR 22 resp. FCC class B

Application for Certification  
prepared by:  
Guenther Roesch  
Siemens PC Systeme GmbH & Co. KG  
Buergermeister-Ulrich-Str. 100  
86199 Augsburg  
Germany  
Tel.: +49 821 804-2821  
Fax: +49 821 804 2675

Applicant for this device:  
  
Siemens PC Systeme GmbH & Co. KG  
Buergermeister-Ulrich-Str. 100  
86199 Augsburg  
Germany  
Tel.: +49 821 804-0



Engineer: \_\_\_\_\_  
Martin Heuser  
Fujitsu Siemens Computers  
Keyboard KBPC RS (K292)

FCC Identifier:  
**HSS01TASTK292**

Date: **Jan. 20, 2000**

Page:  
**1/31**

# Table of Contents

<b>1 GENERAL INFORMATION</b>	<b>4</b>
1.1 Product Description	4 - 5
1.2 Related Submittal(s)/Grant(s)	6
1.3 Tested System Details	6 - 7
1.4 Test Methodology	8
1.5 Test Facility	8
1.6 Referenced Rules Sections	8
<b>2 PRODUCT LABELING</b>	<b>9</b>
Figure 2.1 FCC ID Label: see attached file	9
Figure 2.2 Location of Label on EUT: see attached file	9
<b>3 SYSTEM TEST CONFIGURATION</b>	<b>10</b>
3.1 Justification	10
3.2 Video Mode Justification	10
3.3 EUT Exercise Software	11
3.4 Special Accessories	11
3.5 Equipment Modifications	12
3.6 Configuration of Tested System	12
Figure 3.1 Configuration of Tested System	13
<b>4 BLOCK DIAGRAM OF EQUIPMENT UNDER TEST</b>	<b>14</b>
4.1 Block Diagram Description	14
4.2 Clockfrequencies of the EUT	15
4.3 Theory of Operation	15
Figure 4.1 Block Diagram	16
<b>5 CONDUCTED EMISSION DATA</b>	<b>17</b>
5.1 Test Procedure	17
5.2 Measured Data: see attached file	17 – 19
5.3 Referenced Rules	20
5.4 Test Instrumentation Used, Conducted Measurement	20

6 RADIATED EMISSION DATA	21
6.1 Test Procedure	21
6.2 Measured Data: see attached file	22 – 23
6.3 Reference Rules Sections	24
6.4 Test Instrumentation Used, Radiated Measurement	24
6.5 Field Strength Calculation	25
6.6 Table of Correction Factors	26 - 27
7 CONDUCTED AND RADIATED MEASUREMENT PHOTOS: see attached files	28
8 EXTERNAL PHOTOS OF EUT: see attached files	29
9 INTERNAL PHOTOS OF EUT: see attached files	30
10 USER MANUAL: see attached file	31

# 1 GENERAL INFORMATION

## 1.1 Product Description

The Siemens Keyboard KBPC RS with the product number S26381-K292 is a MF-II-compatible keyboard with Touchpad for personal computers. The connection between the keyboard and the personal computer is realized by a cable which has on one end two western plug connections and on the other end two PS/2-connectons.

*Description of the keyboard K292:* S26381-K292-V\*\*\*

Functions and features:

Industry standard	MF-II-compatible
System compatibility	AT and PS/2 system
Keyboard to the system unit	Western plug to PS/2 (length 200 cm)
Design	Low-profile compact design
Technology	Key matrix on foil, single chip processor mounted on PC board, LCD Display
Touchpad	Synaptics TM41PUG134

Electrical:

Power consumption	< 50 mA at 5 V
-------------------	----------------

Temperature:

Operating temperature	5° C to 40° C (as per IEC721)
-----------------------	-------------------------------

Dimensions:

Dimensions (H x W x D)	24 x 325 x 222 mm
Keyboard slope	5,2°

Standards met:

Product safety

EN 60950

VDE 0805

Ergonomics

“Safety-tested” mark (ZH1/618)

ISO 9241-4 / EN 29241-4

ISO 9995, DIN 2137

Electromagnetic  
Compatibility

CE symbol to EC Guideline 89/336/EEG  
(EN 55022/B, EN 50082-1)

The keyboard is assembled by Siemens PC Systeme GmbH & Co. KG, Bürgermeister-Ulrich-Str. 100, 86199 Augsburg.



**Fujitsu Siemens Computers**  
**Keyboard KBPC RS (K292)**

FCC Identifier:  
**HSS01TASTK292**

Date: **Jan. 20, 2000**

Page:  
**5/31**

## 1.2 Related Submittal Grant

N/A

## 1.3 Tested System Details

The FCC IDs for all equipment, plus description of all cables used in the tested system are:

Pos	Model Number (Serial Number)	FCC ID	Description	Cable Description (length in [cm])
1	Fujitsu Siemens Computers KBPC RS S26381-K292-****	HSS01TASTK292	Keyboard <b>EUT</b>	shielded keyboard cable [2x 200] (2x PS/2 connectors)
2	Fujitsu Siemens Computers Scenic Pro M7 YBJF000509	HSSSCENICM701	Personal Computer (PII 350 MHz)	unshielded power cord [292]
3	Fujitsu Siemens Computers MCM 17P1 YEDA175949	A3LCSE783	Monitor	unshielded power cord [175] shielded video cable [168]
4	Cherry MY3000USB4A 000468K37	DOC	USB- Keyboard	shielded keyboard cable [143]

Pos	Model Number (Serial Number)	FCC ID	Description	Cable Description (length in [cm])
5	Microsoft Intelli Mouse 1.1A 0015096-00000	DOC: m/n:IM1	USB-Mouse	shielded mouse cable [183]
6	Hewlett Packard HP 2225C+ (2910S40941)	DSI6XU2225	Printer, parallel I/F	unshielded AC ca- ble [180], shielded centronics cable [190]
7	Hewlett Packard HP 2225D+ (2952S61298)	DSI6XU2225	Printer, serial I/F	unshielded power cord [185], shiel- ded serial cable [190]
8	Hewlett Packard HP 2225D+ (2952S61229)	DSI6XU2225	Printer, serial I/F	unshielded power cord [185], shiel- ded serial cable [190]
<b><u>Pos 1 contains:</u></b>				
a	Fujitsu Siemens Computers S26381-D293	N/A	System and Interface board	
b	Fujitsu Siemens Computers WLF-5602E	N/A	Keyboard matrix	
c		N/A	LCD control panel	
d	Synaptics, INC. TM41PUG-134-2	N/A	Touch pad modul	

Remark:

## 1.4 Test Methodology

Both, conducted and radiated tests were performed according to the procedures in ANSI C63.4-1992. Radiated testing was performed at an antenna to EUT distance of 10 meters. All radiated emission measurements were done in an anechoic chamber. Limits for radiated and conducted emission are in compliance with CISPR 22 resp. FCC class B.

## 1.5 Test Facility

The anechoic chamber and conducted measurement facility used to collect the emission data is located at Siemens PC Systeme GmbH & Co. KG, Bürgermeister Ulrich Str. 100, 86199 Augsburg, Germany. This site has been fully described in a report dated January 24, 1997 sub-mitted to your office, and accepted in a letter dated March 03, 1997 (31040/SIT).

## 1.6 Referenced Rules Sections

N/A



## 2 PRODUCT LABELING

2.1 FCC ID Label: see attached file

2.2 Location of Label on EUT: see attached file

## 3 SYSTEM TEST CONFIGURATION

### 3.1 Justification

The system was configured for testing in a maximum fashion (as a customer can use it). Each type of external ports was connected with a peripheral unit (e.g. serial port connected to a serial printer, external keyboard port connected to a keyboard and so on). The EUT was configured with a double cable of 2 m length.

### 3.2 Video mode Justification

The system was tested in video graphic mode 1024 x 768, 100 Hz, because this is the most commonly used resolution and reflects the worst case.

## 3.3 EUT Exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to typical use.

The used sequence is:

- scrolling "H" with applicable video mode (see 3.2)
- internal Floppy drive writes to the HD and reads back
- internal CD-ROM writes to the HD
- "H`s" are sent to the printer ports
- data is sent to USB port
- continuous character pressed on keyboard

## 3.4 Special Accessories

As shown in Figure 3.1, all interface cables used for compliance testing are shielded like normally supplied by the manufacturer. All cable connectors feature integral metal hoods for shielding.

## 3.5 Equipment Modifications

To achieve compliance to Class B levels, the following modifications were made during compliance testing:

**no modifications**


Applicant Signature \_\_\_\_\_ Date \_\_\_\_\_

Typed/Printed Name \_\_\_\_\_ Position \_\_\_\_\_

## 3.6 Configuration of Tested System

All necessary tests were carried out like figure 3.1. The system was used according to paragraph 1.1. During test for conducted emission the EUT was connected to a LISN. All peripherals were supplied by a second LISN. The equipment was configured according to ANSI C63.4-1992 Fig 11.

# Figure 3.1 Configuration of Tested System

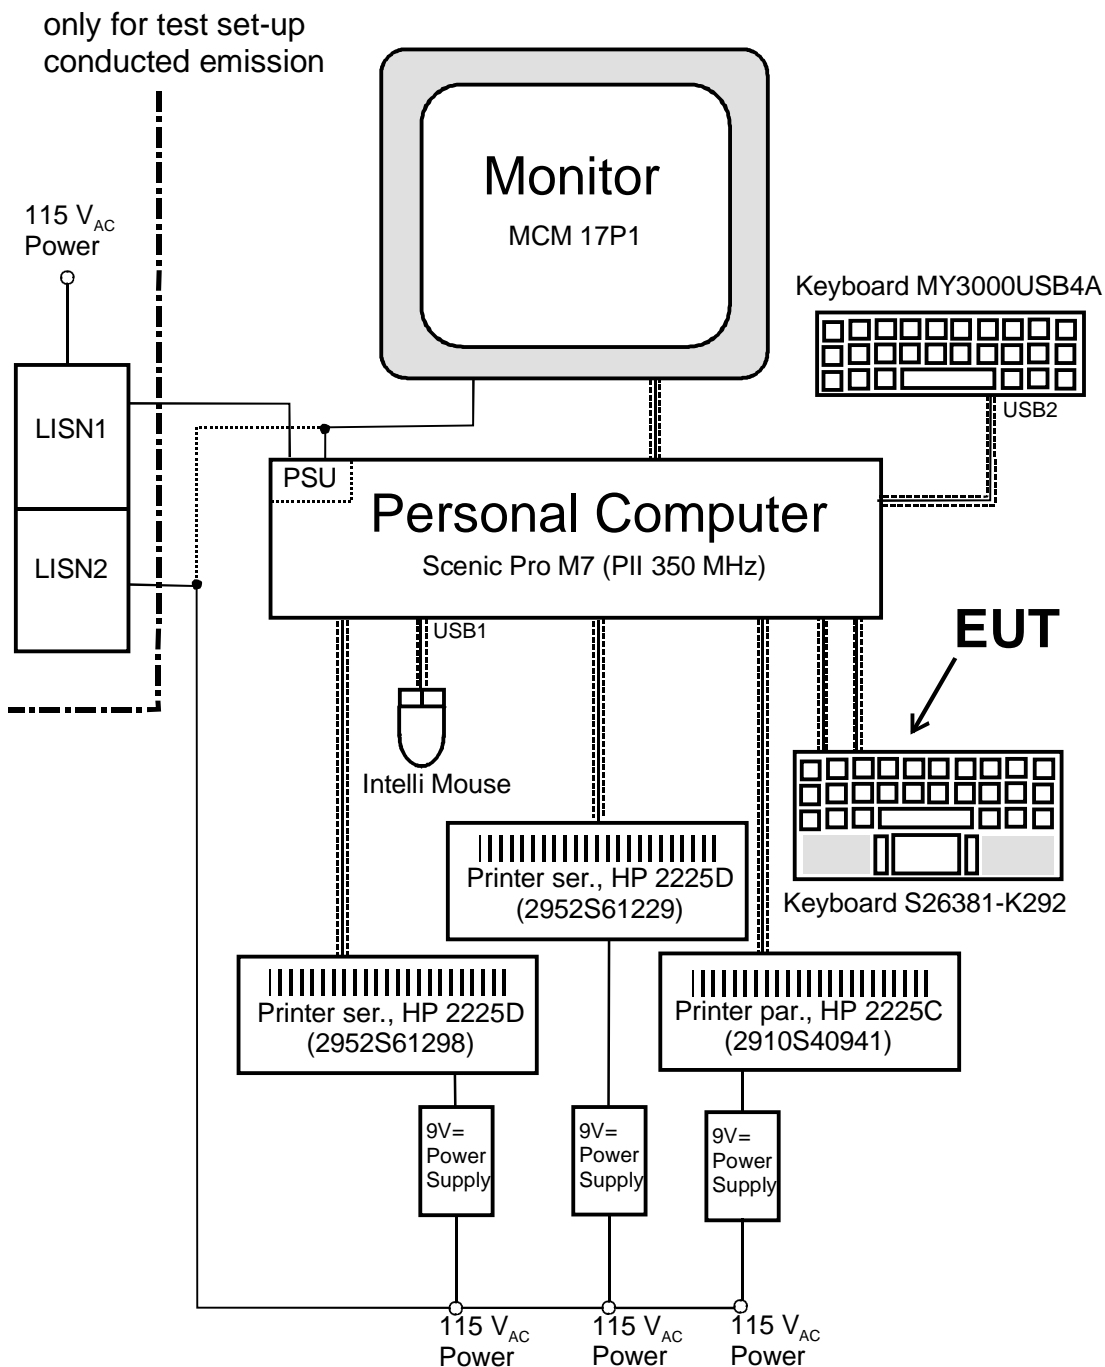

## 4 BLOCK DIAGRAM OF EUT

see fig 4.1 page 16

### 4.1 Block Diagram Description (see fig. 4.1)

The major parts of the system are (fig 4.1).

- Keyboard controller
- Key matrix
- Touchpad
- UART & IR part

## 4.2 Clockfrequency of EUT

Ceramic resonator frequency: 3,58 MHz

## 4.3 Theory of Operation


The control of all keyboard functions is realized by a micro controller MOTO-ROLA MC68HC05F32PU. The external frequency is 3,58 MHz.

The controller scans a matrix of 16 x 8 (128 keys). The matrix is scanned all time by the controller with a high level pulse. The input is an A/D-converter part of the controller which analyses, if a key is pressed or released.

The communication to the system is realised by two lines, a clock- and a data line. It is a synchronous data transmission.

The touchpad replaces the standard mouse in all functions, the UART & IR block is the communication part for wireless communication via infra red light.

## 4.1 Block Diagram of the EUT

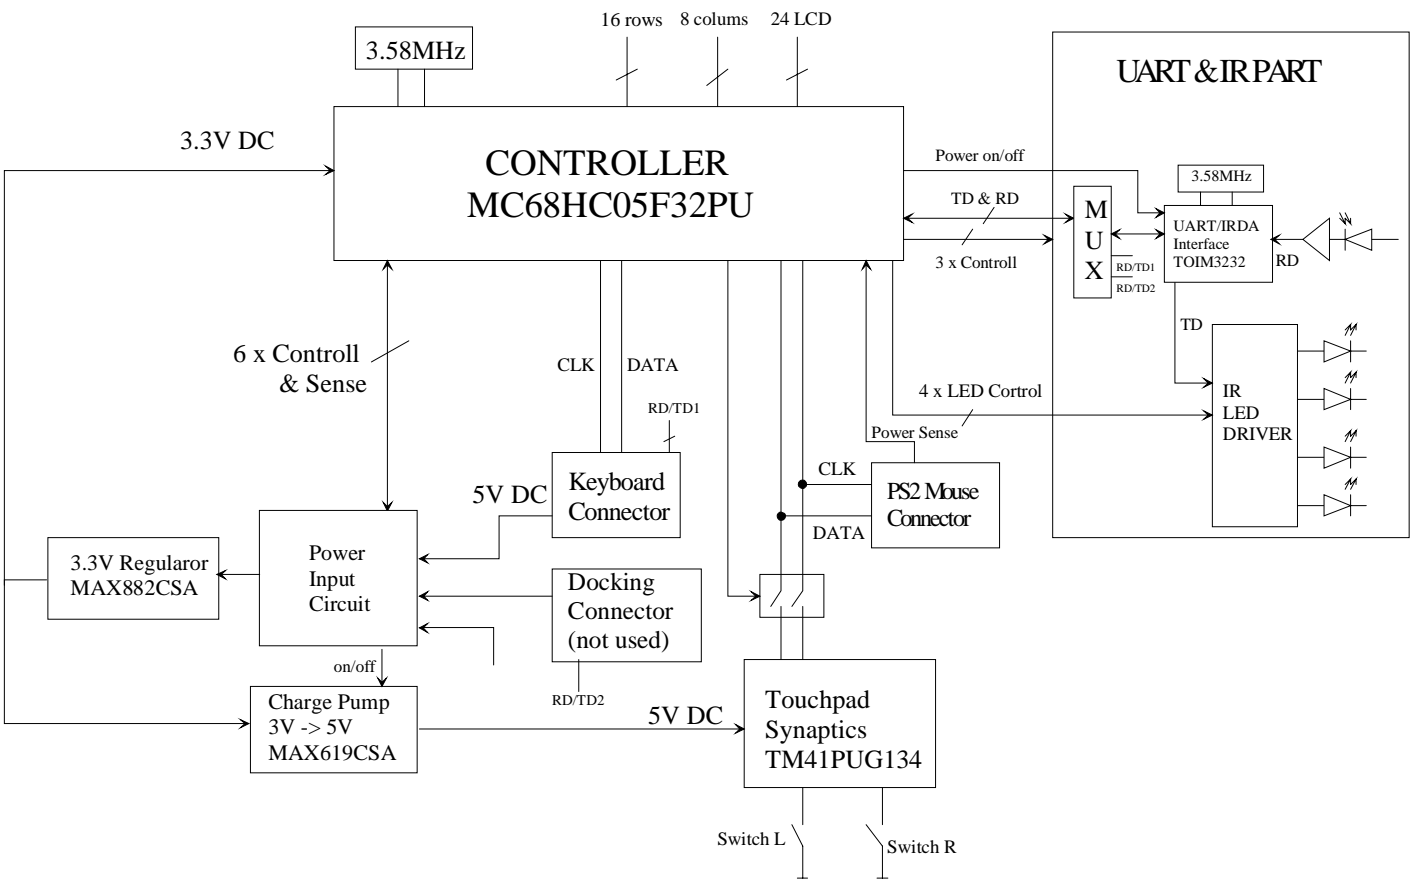



## 5 CONDUCTED EMISSION DATA

### 5.1 Test Procedure

The initial step in collecting conducted emission data is a Rohde & Schwarz Test Receiver (ESH3). During first scan all data in peak mode is measured, then all significant peaks are explored either in quasi-peak mode or in average mode. In case of low noise (no peak value reaches the quasi peak limit), only average checks are done.

### 5.2 Measured Data

The conducted emission was measured the following way:

1. Peak noise on L
2. Peak noise on N

During the emission measurement the printers and the monitor are supplied with power via a second LISN.

The worst case results of the measurement is given next:

**Configuration a: monitor power via system unit**

**b: monitor power from peripheral device LISN**

Judgement: Passed by

	Frequency [MHz]	Measured [dB(μV)]	Kind of value	Limit [dB(μV)]	Configura- tion
phase	0,378	41,5	QP	58,3	a
neutral	0,756	39,0	QP	56,0	a
neutral	0,882	40,2	QP	56,0	a
neutral	1,386	39,5	QP	56,0	a
neutral	1,512	43,2	QP	56,0	a

Judgement: Passed by

	Frequency [MHz]	Measured [dB(μV)]	Kind of value	Limit [dB(μV)]	Configura- tion
neutral	0,378	40,8	AV	48,3	a
neutral	0,882	39,2	AV	46,0	a
neutral	0,756	37,4	AV	46,0	a
neutral	1,368	38,0	AV	46,0	a
neutral	1,512	36,8	AV	46,0	a
neutral	0,378	41,8	QP	58,3	b
neutral	0,756	38,9	QP	56,0	b
phase	0,882	40,2	QP	56,0	b
neutral	1,386	38,9	QP	56,0	b
neutral	1,512	38,4	QP	56,0	b
neutral	0,378	41,0	AV	48,3	b
neutral	0,756	37,1	AV	46,0	b
phase	0,882	39,2	AV	46,0	b
neutral	1,386	39,3	AV	46,0	b
phase	1,512	38,3	AV	46,0	b

AV: average

QP: quasi peak

Test Personnel:

Tester Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name: R. Schaufler



**Fujitsu Siemens Computers**  
**Keyboard KBPC RS (K292)**

FCC Identifier:  
**HSS01TASTK292**

Date: Jan. 20, 2000

Page:  
**18/31**

## Measurement Protocols: see attached files

### **Configuration a:**

EUT with Personal Computer Scenic Pro M7

PII 350 MHz

monitor power from PC

video resolution 1024 x 768/100 Hz

### **Configuration b:**

EUT with Personal Computer Scenic Pro M7

PII 350 MHz

monitor power from peripheral device LISN

video resolution 1024 x 768/100 Hz

## 5.3 Referenced Rules Sections

N/A

## 5.4 Test Instrumentation Used, Conducted Measurement

Type	Manufacturer/ Model No.	Serial No.	Last Cal.	Cal. Interval
Receiver	ESHS10 Rohde&Schwarz	842884/011	May 99	12 months
Receiver	ESH3 Rohde&Schwarz	879599/019	May 99	12 months
LISN	ESH2-Z5 Rohde&Schwarz	871884/004	May 99	12 months
LISN	ESH3-Z5 Rohde&Schwarz	883650/027	May 99	12 months
Pulse limiter	ESH3-Z2 Rohde&Schwarz	---	May 99	12 months

## 6 RADIATED EMISSION DATA

### 6.1 Test Procedure

The radiated emission was measured between 30 MHz to 1000 MHz. The bandwidth of the EMI-receiver was set to 120 kHz and the detector was set to peak. During prescan all data in peak mode are accumulated automatically. At final measurement the detector was set to CISPR quasi peak and values above the acceptance line were verified auto-matically.

The test was performed in a semi anechoic chamber, in a distance of 10 meters between antenna and EUT. During tests the EUT was turned 360° the receiving antenna was moved from 1 to 4 meters and the antenna polarisation was changed from horizontal to vertical for finding the maximum levels of emission.

For the whole range one antenna was used:

30 MHz to 1000 MHz:                      Bilog antenna

After automatic tests during manual verification the cables and the equipment were placed and moved within the range of position in order to find the maximum of emission.

For further data see enclosed test results.

## 6.2 Measured Data

The EUT was measured with the Personal Computer Scenic Pro M7 (PII 350 MHz) in video mode 1024 x 768, 100 Hz. The test results below reflect the worst case with:

### Frequency range 30 MHz - 1000 MHz:

Judgement: Passed by

Frequency [MHz]	Level* [dB(μV/m)]	10 Meter Limit [dB(μV/m)]	Exceeding [dB]	Ant Pol	Height in [m]	Angle in deg
96.00000	24.60	30.000	-5.4	ver	1.00	59.000
144.00000	24.40	30.000	-5.6	ver	1.00	180.000
198.45000	22.50	30.000	-7.5	ver	1.00	119.000
333.48000	28.90	37.000	-8.1	hor	2.80	0.000
859.92000	31.10	37.000	-5.9	ver	1.60	59.000

all levels are quasi-peak levels

\*The correction factor is considered automatically by the test receiver.  
A table of correction factors is listed in paragraph 7.4.

Test Personnel:

Tester Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name: R. Schaufler

# Measurement Protocols: see attached files

EUT with Personal Computer Scenic Pro M7  
PII 350 MHz  
video resolution 1024 x 768/100 Hz

## 6.3 Referenced Rules Sections

N/A

## 6.4 Test Instrumentation Used, Radiated Measurement

Type	Manufacturer/ Model No.	Serial No.	Last Cal.	Cal. Interval
Receiver	ESMI Rohde&Schwarz	840607/006	May 99	15 months
Antenna	CBL 6111 Chase	1345	May 99	12 months
Antenna	CBL 6112 Chase	2041	Aug. 99	15 months



## 6.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor automatically to the measured value. The display of the Receiver shows the corrected value. The complete table of correction factors is given on next page. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

AF = Antenna Factor (incl. Preamplifier factor)

CF = Cable Attenuation Factor

Assume a receiver reading of 28,5 dB $\mu$ V is obtained. The Antenna Factor of 10,5 and a Cable Factor of 1,3 is added, giving a field strength of 40,3 dB $\mu$ V/m.

$$FS = 28,5 + 10,5 + 1,3 = 40,3 \text{ dB}\mu\text{V/m}$$

The 40,3 dB $\mu$ V/m value can be mathematically converted to its corresponding level in  $\mu$ V/m.

Level in  $\mu$ V/m =  
Common Antilogarithm [(40,3 dB $\mu$ V/m)/20] =

**103,5  $\mu$ V/m**

## 6.6 Table of Correction Factors

Frequency range: 30 MHz to 1000 MHz

Frequency [MHz]	Correction Bilog Antenna [dB]	Correction Cable [dB]	Correction Antenna + Cable [dB]
30,0	17,80	0,65	18,45
35,0	15,10	0,67	15,77
40,0	12,40	0,68	13,08
45,0	9,80	0,73	10,53
50,0	7,70	0,74	8,44
55,0	6,20	0,82	7,02
60,0	5,10	0,84	5,94
70,0	5,00	0,90	5,90
80,0	6,60	0,95	7,55
90,0	8,50	0,99	9,49
100,0	10,30	1,10	11,40
120,0	11,40	1,14	12,54
140,0	10,40	1,27	11,67
160,0	9,40	1,35	10,75
180,0	8,50	1,45	9,95
200,0	9,10	1,51	10,61
250,0	11,80	1,71	13,51
300,0	13,00	1,84	14,84
350,0	14,10	2,00	16,10
400,0	16,00	2,18	18,18
450,0	16,30	2,35	18,65
500,0	17,10	2,43	19,53

Frequency [MHz]	Correction Bilog Antenna [dB]	Correction Cable [dB]	Correction Antenna + Cable [dB]
550,0	18,80	2,62	21,41
600,0	18,60	2,73	21,33
650,0	19,00	2,88	21,88
700,0	19,10	2,91	22,01
750,0	19,80	3,01	22,81
800,0	19,80	3,21	23,01
850,0	20,40	3,32	23,72
900,0	20,50	3,40	23,90
950,0	20,80	3,49	24,29
1000,0	21,10	3,69	24,79

## 7 Conducted And Radiated Emission Measurement Photos: see attached files

7.1 Test set-up, conducted emission, front side view

7.2 Test set-up, conducted emission, rear side view

7.3 Test set-up, radiated emission, front side view

7.4 Test set-up, radiated emission, rear side view

## 8 External Photos of EUT: see attached files

8.1 Front side view of EUT

8.2 Rear side view of EUT

## 9 Internal Photos of EUT: see attached files

- 9.1 Inside view of EUT, electrical layout
- 9.2 Touch panel module, top side view
- 9.3 Touch panel module, rear side view
- 9.4 LCD control panel, top side view
- 9.5 LCD control panel, rear side view
- 9.6 Keyboard matrix, top side view
- 9.7 Keyboard matrix, rear side view
- 9.8 System and Interface board, top side view
- 9.9 System and Interface board, rear side view

## 10 User Manual: see attached files

A sheet with a FCC statement will be added to each keyboard pagggggg.