

MEASUREMENT / TECHNICAL REPORT

Fujitsu Siemens Computers

Model: Personal Computer Scenic Mobile 750 AGP

FCC ID: HSSMOB75001

Oct. 14, 1999

This report concerns: Original grant Class II change
Equipment type: Personal Computer (Notebook)

Request issue of grant: Immediately upon completion of review
 Defer grant per 47 CFR 0.457(d)(1)(ii) until _____ date _____. Company Name agrees to notify the Commission by _____ date _____ of the intended date of announcement of the product so that the grant can be issued on that date.

Measurement procedure used: ANSI C63.4-1992
 FCC/OET MP-4(1987)
 other _____

Limits on compliance with: CISPR 22 resp. FCC class B

Application for Certification prepared by:
Guenther Roesch
Siemens PC Systeme GmbH & Co. KG
Buergermeister-Ulrich-Str. 100
86199 Augsburg
Germany
Tel.: +49 821 804-2821
Fax: +49 821 804 2675

Applicant for this device:

Siemens PC Systeme GmbH & Co. KG
Buergermeister-Ulrich-Str. 100
86199 Augsburg
Germany
Tel.: +49 821 804-0



Engineer: _____
Robert Schaufler
Fujitsu Siemens Computers
Personal Computer Scenic Mobile 750 AGP

FCC Identifier:
HSSMOB75001

Date: Oct. 14, 1999

Page:
1/38

Table of Contents

1	GENERAL INFORMATION	4
	1.1 Product Description	4 - 5
	1.2 Related Submittal(s)/Grant(s)	6
	1.3 Tested System Details	6 - 9
	1.4 Test Methodology	10
	1.5 Test Facility	10
	1.6 Referenced Rules Sections	10
2	PRODUCT LABELING	11
	Figure 2.1 FCC ID Label: see original grant, date: March 01, 1999	11
	Figure 2.2 Location of Label on EUT: see original grant, date: March 01, 1999	11
3	SYSTEM TEST CONFIGURATION	12
	3.1 Justification	12 - 13
	3.2 Video Mode Justification	13
	3.3 EUT Exercise Software	14
	3.4 Special Accessories	14
	3.5 Equipment Modifications	15
	3.6 Configuration of Tested System	15
	Figure 3.1 Configuration of Tested System	16
4	BLOCK DIAGRAM OF EQUIPMENT UNDER TEST	17
	4.1 Block Diagram Description	17
	4.2 Clockfrequencies of the EUT	18
	4.3 Theory of Operation	18
	Figure 4.1 Block Diagram	19
5	CONDUCTED EMISSION DATA	20
	5.1 Test Procedure	20
	5.2 Measured Data: see attached file	20 - 22
	5.3 Referenced Rules	23
	5.4 Test Instrumentation Used, Conducted Measurement	23

6 RADIATED EMISSION DATA	24
6.1 Test Procedure	24
6.2 Measured Data: see attached file	25 - 28
6.3 Reference Rules Sections	29
6.4 Test Instrumentation Used, Radiated Measurement	29
6.5 Field Strength Calculation	30
6.6 Table of Correction Factors	31 - 34
7 CONDUCTED AND RADIATED MEASUREMENT PHOTOS: see attached files	35
8 EXTERNAL PHOTOS OF EUT: see original grant, date March 01, 1999	36
9 INTERNAL PHOTOS OF EUT: see attached files	37
10 USER MANUAL: see original grant, date March 01, 1999	38

1 GENERAL INFORMATION

1.1 Product Description

The Fujitsu Siemens Computers Scenic Mobile 750 AGP is a notebook with an enhanced video graphic. The system board integrates the Pentium Processor, memory, and I/O-technologies. The system now can be assembled with Processors Intel Pentium III up to 500 MHz.

Description of the power supply:

AC- / DC- adapter: Astec, model AA20590
S26113-E429-V30

Features Overview:

Cache: 16 Kbyte integrated in processor
up to 512 Kbyte synchronous Second Level
Cache

Main memory: 64 - 256 Mbyte EDO RAM or SD RAM
2 slots for 64, 128 Mbyte modules
JEDEC 144 pin SO DIMM (may not be mixed)

System ROM (flash
EPROM): 512 Kbyte for system and video BIOS

Disk drives: Floppy disk drive for 3 ½ inch floppy disks
Hard disk drive 2.5 inch, 12.7 mm height
CD ROM drive twenty speed or more
DVD drive
ZIP-drive (IOME6A)

Display: Backlit liquid-crystal transmissive display (LCD)

Display diagonal:	13.3 inch XGA
LCD TFT/ADS	12.1 inch XGA overhead display 14.1 inch) XGA
Resolution/colors:LCD TFT 14.1	1024 x 768 x 256 colors (18 bit)
Screen controller:	ATI-3D Rage LT Pro 4 Mbyte
Video memory (EDO- RAM):	4 Mbyte
supported resolutions on external display	640 x 480 / 16.7 million colors and 85 Hz 800 x 600 / 16.7 million colors and 85 Hz 1024 x 768 / 65.536 colors and 75 Hz
<i>Audio:</i>	
Compatibility:	Soundchip ESS1940 Soundblaster Pro, Ad lib, MS sound system
A/D and D/A conversion:	16 bit, stereo
<i>Input devices:</i>	
Keyboard:	86 keys
Touchpad (Length, Width)	64 x 48 mm
<i>Slots:</i>	
PC card (CardBus/PCMCIA):	PCMCIA 2 x type II or 1 x type III PC card TI 1251, Zoomed-Video-Port
<i>Ports:</i>	
PS/2 mouse port/keyboard port:	6-pin mini DIN female connector
Port for MobiDock/QuickPort:	240-pin female connector
Parallel port:	25-pin female connector, bi-directional EPP/ECP capable
Port for external monitor:	15-pin female connector
Serial port:	9-pin male connector, 16550 compatible
Microphone:	jack connector
Audio input:	jack connector
Audio output:	jack connector
Infrared interface (Fast IrDA):	
USB (Universal Serial Bus):	
TV out	Hosiden

The personal computer is assembled by Siemens PC Systeme GmbH & Co. KG,
Bürgermeister-Ulrich-Str. 100, 86199 Augsburg.

1.2 Related Submittal Grant

N/A

1.3 Tested System Details

The FCC IDs for all equipment, plus description of all cables used in the tested system are:

Pos	Model Number (Serial Number)	FCC ID	Description	Cable Description (length in [cm])
1	Fujitsu Siemens Computers Scenic Mobile 750 AGP	HSSMOB75001	Notebook (450/500 MHz) EUT	unshielded power cord [292]
2a	Fujitsu Siemens Computers MCM 1705 NTD	A3LCGH760	Monitor	unshielded power cord [175] shielded video cable [168]
2b	Fujitsu Siemens Computers MCM 1707 NTD	A3LCGS762	Monitor	unshielded power cord [175] shielded video cable [168]
3	Microsoft Intelli mouse 1.1 A 0015096-00000	DOC: m/n:IM1	USB-Mouse	shielded mouse cable [197]

Pos	Model Number (Serial Number)	FCC ID	Description	Cable Description (length in [cm])
4	Fujitsu Siemens Computers S26381-K293-V120	HSS01TASTK293	Keyboard	shielded keyboard cable [143]
5	Hewlett Packard HP 2225C+ (3011S70627)	DSI6XU2225	Printer, parallel I/F	unshielded AC ca- ble [180], shielded centronics cable [190]
6	Hewlett Packard HP 2225D+ (2952S61229)	DSI6XU2225	Printer, serial I/F	unshielded power cord [185], shiel- ded serial cable [190]
7	Labtec AM-32	N/A	Microphone	shielded cable [142]
8	Boeder Headphones LT100	N/A	Loud- speakers	shielded cable [166 + 124]
9	3 COM Fast Ether Link 3C575-TX	DF63C575	LAN PC card	shielded cable [> 150]
10	Bay Stack 101	N/A	HUB 10BaseT	
11			Line IN	shielded cable, terminated [192]
	Pos 1 contains:			
a	NEC MOB750 S26391-F212-V400	N/A	LCD-Display TFT 14.1"	N/A

Pos	Model Number (Serial Number)	FCC ID	Description	Cable Description (length in [cm])
b	Fujitsu Siemens Computers AA20590 S26113-E429-V30	N/A	AC- / DC- Adapter	unshielded AC cable [152] shielded DC cable [149]
c	FDD + CD MOV75A S26361-F213-V210	N/A	Dual drive	N/A
d	Sanyo I1020E002	N/A	Inverter board	N/A
e	Fujitsu MHD22032AT	N/A	Hard disk drive	N/A
f	Fujitsu Siemens Computers 3RE4B13503990B	N/A	System board	N/A
g ₁	Intel MMC2 PLM45002001QS	N/A	Processor module (450 MHz)	N/A
g ₂	Intel MMC2 PLM50002001QS	N/A	Processor module (500 MHz)	N/A
h	SEC Memory module	N/A	RAM	N/A
i	Synaptics TM41PUC220-2	N/A	Touch pad	N/A
k	Fujitsu Siemens Computers 3RE4B13003021A	N/A	Upper connection board	N/A

Pos	Model Number (Serial Number)	FCC ID	Description	Cable Description (length in [cm])
l	3RE4J19003920	N/A	PCMCIA bay	N/A
m	3RE4B13503682B	N/A	Audio board	N/A
n	S26391-F192-V110	N/A	Accu pack	N/A

Remark: position 2a / 2b / g₁ / g₂ and microphone optional

1.4 Test Methodology

Both, conducted and radiated tests were performed according to the procedures in ANSI C63.4-1992. Radiated testing below 1 GHz was performed at an antenna to EUT distance of 10 meters above 1 GHz at an antenna to EUT distance of 3 meters. All radiated emission measurements were done in an anechoic chamber. Limits for radiated and conducted emission are in compliance with CISPR 22 resp FCC class B.

1.5 Test Facility

The anechoic chamber and conducted measurement facility used to collect the emission data is located at Siemens PC Systeme GmbH & Co. KG, Bürgermeister Ulrich Str. 100, 86199 Augsburg, Germany. This site has been fully described in a report dated January 24, 1997 submitted to your office, and accepted in a letter dated March 03, 1997 (31040/SIT).

1.6 Referenced Rules Sections

N/A

2 PRODUCT LABELING

2.1 FCC ID Label

see original grant, date: March 01, 1999

2.2 Location of Label on EUT

see original grant, date: March 01, 1999

3 SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a maximum fashion (as a customer can use it). Each type of external ports was connected with a peripheral unit (e.g. serial port connected to a serial printer, external keyboard port connected to a keyboard and so on). The notebook can be equipped either with an internal AC- / DC-adapter or with an accumulator. In relation to original grant the worst case combination with the external AC- / DC-adapter was included.

The system clock is 100 MHz, the clock frequency was tested with the corresponding worst case processor:

100 MHz clock: Intel Pentium III 450/500 MHz

Referring to radiated emission the following (worst case) results are applicable:

Internal AC- / DC-adapter, 14.1" TFT Display

Frequency range 30 MHz - 1 GHz:

100 MHz clock/Intel Pentium III 450 MHz,

video resolution 1024 x 768/60 Hz

100 MHz clock/Intel Pentium III 500 MHz,

video resolution 1024 x 768/60 Hz

Frequency range 1 GHz - 5 GHz:

100 MHz clock/Intel Pentium III 500 MHz,
video resolution 1024 x 768/60 Hz

Referring to conducted emission the following (worst case) results are applicable:

Internal AC- / DC–adapter, 14.1” TFT Display

100 MHz clock/Intel Pentium III 450 MHz,
video resolution 1024 x 768/60 Hz
monitor power external

3.2 Video mode Justification

The system was tested in video graphic modes 1024 x 768, 60 Hz. The configuration is an internal AC- / DC-adapter, 14.1 TFT-Display.

3.3 EUT Exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to typical use.

The used sequence is:

- scrolling "H" with applicable video mode (see 3.2)
- internal CD-ROM writes to the HD
- "H's" are sent to the printer ports
- data is sent to USB ports
- signal to video and audio periphery
- LAN communication via PCMCIA

3.4 Special Accessories

As shown in Figure 3.1, all interface cables used for compliance testing are shielded like normally supplied by the manufacturer. All cable connectors feature integral metal hoods for shielding.

3.5 Equipment Modifications

To achieve compliance to Class B levels, the following modifications were made during compliance testing:

no modifications

Applicant Signature _____ Date _____

Typed/Printed Name _____ Position _____

3.6 Configuration of Tested System

All necessary tests were carried out like figure 3.1. The system was used according to paragraph 1.1. During test for conducted emission the EUT was connected to a LISN. All peripherals were supplied by a second LISN. The equipment was configured according to ANSI C63.4-1992 Fig 11.

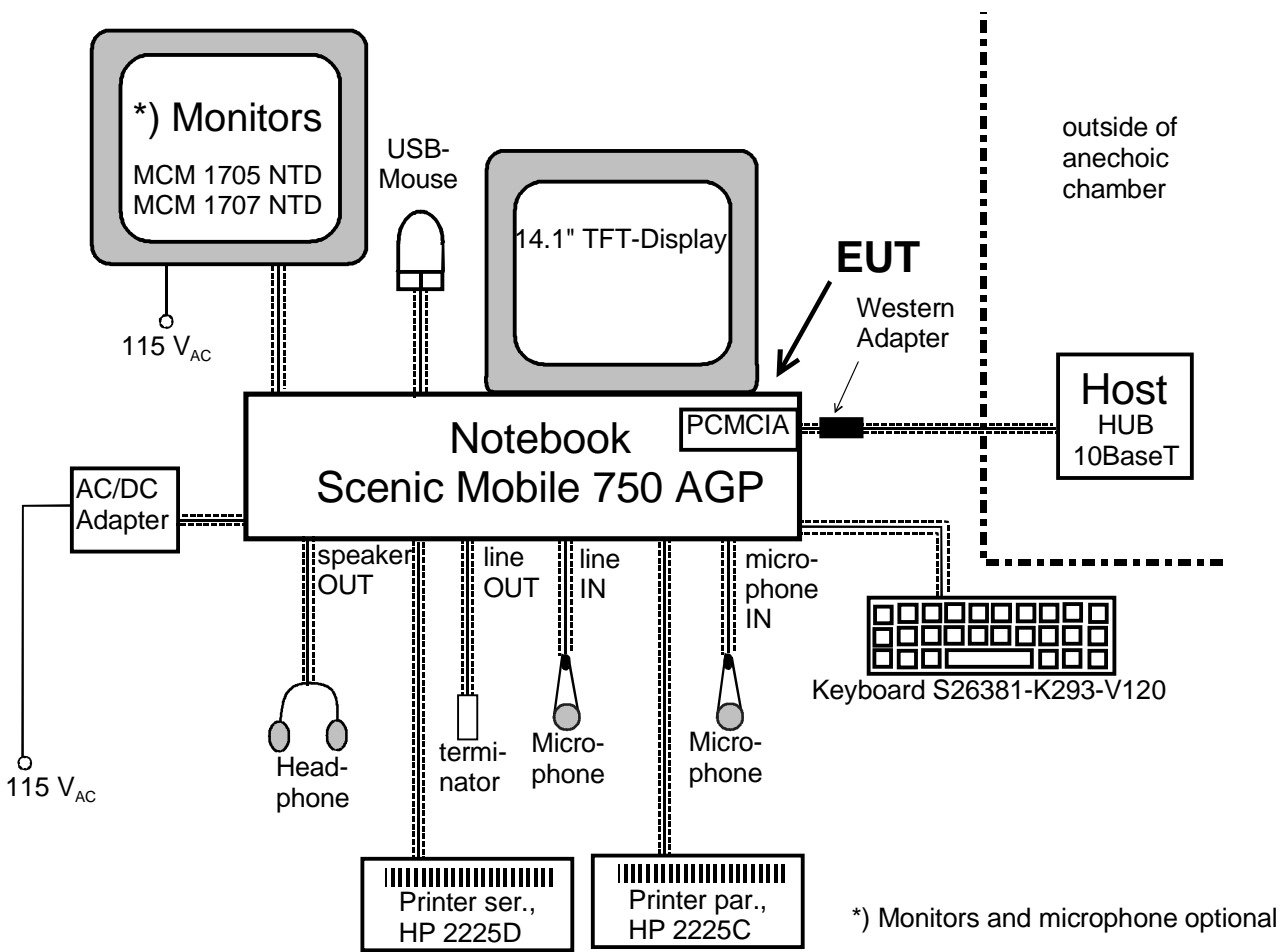


Figure 3.1 Configuration of Tested System

4 BLOCK DIAGRAM OF EUT

see fig 4.1 page 19

4.1 Block Diagram Description (see fig. 4.1)

The major parts of the system are (fig 4.1).

- System board
- Processor module
- LCD-Display
- Peripheral connector area (keyboard, mouse, serial, parallel, video, USB, microphone, headphone, line out and PCMCIA)

The detailed diagram of the system board is shown in fig 4.1

4.2 Clockfrequencies of EUT

Clock synthesizer	14,318 MHz
Memory	100,0 MHz
PCI-bus	33,3 MHz
PIIX4	33,3 MHz / 48 MHz
ISA Bus	14,3 MHz
I/O controller	14,3 MHz
USB	48,0 MHz
VGA controller	14,3 MHz
Real time clock	32,768 MHz
Docking clock	33,3 MHz

4.3 Theory of Operation


The notebook works exactly like a traditional PC.

The processors runs internally with 233, 266, 300, 333, 366, 400, 450 or 500 MHz, the system clock is either 66 MHz or 100 MHz and is multiplied by the processor internally by 3,5, 4,0, 4,5, 5,0, 5,5 or 6,0.

The highest possible frequencies and the corresponding processors are:

System clock	Processor	factor
66,6 MHz	233 MHz	3,5
66,6 MHz	266 MHz	4,0
66,6 MHz	300 MHz	4,5
66,6 MHz	333 MHz	5,0
66,6 MHz	366 MHz	5,5
66,6 MHz	400 MHz	6,0
100 MHz	450 MHz	4,5
100 MHz	500 MHz	5,0

4.1 Block Diagram of the EUT

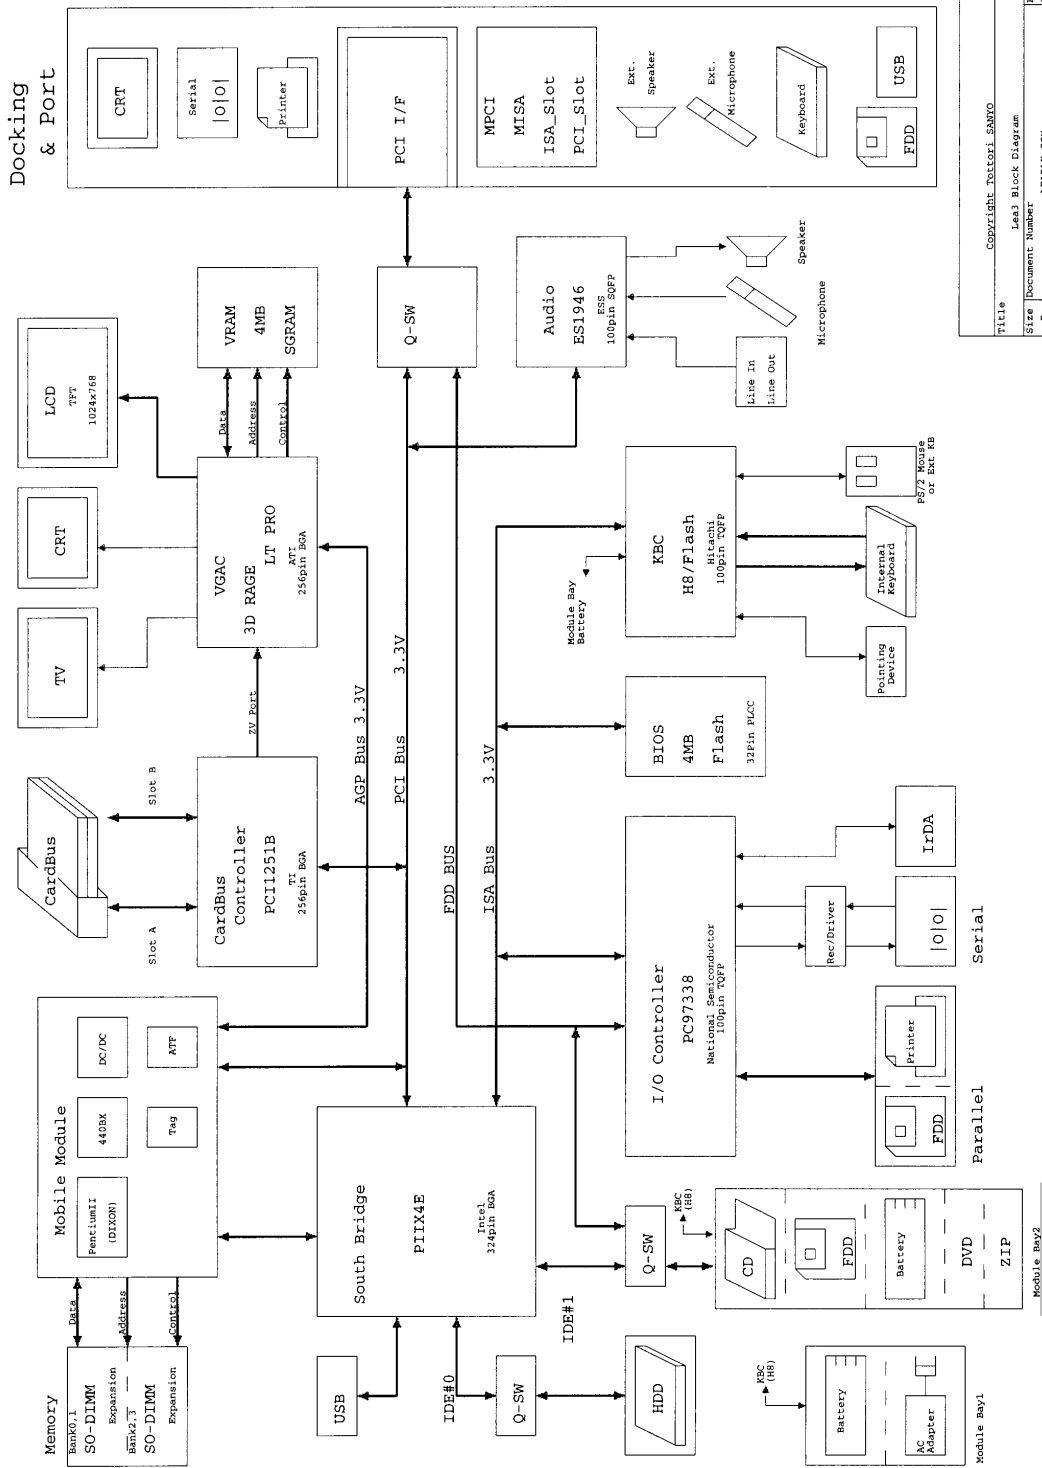

Title	Copyright Taitori Sanyo
Size	Lead3 Block Diagram
Document Number	B
Revision	HEADLX.SCH

5 CONDUCTED EMISSION DATA

5.1 Test Procedure

The initial step in collecting conducted emission data is a Rohde & Schwarz Test Receiver (ESHS10). During first scan all data in peak mode is measured, then all significant peaks are explored either in quasi-peak mode or in average mode. In case of low noise (no peak value reaches the quasi peak limit), only average checks are done.

5.2 Measured Data

The conducted emission was measured the following way:

1. Peak noise on L
2. Peak noise on N

During the emission measurement the printers and the monitor are supplied with power via a second LISN.

The worst case results of the measurement is given next:

Configuration with internal AC- / DC-adapter, 14.1" TFT-Display, Processor PIII 450 MHz

Judgement: Passed by

	Frequency [MHz]	Measured [dB(µV)]	Kind of value	Limit [dB(µV)]
phase	0,180	50,2	QP	65,0
phase	0,270	42,5	QP	61,0
neutral	0,306	42,9	QP	60,0

Judgement: Passed by

	Frequency [MHz]	Measured [dB(μV)]	Kind of value	Limit [dB(μV)]
phase	3,684	35,3	QP	56,0
phase	21,288	39,2	QP	60,0
phase	0,204	35,9	AV	53,0
phase	20,580	33,3	AV	50,0
phase	20,670	34,4	AV	50,0
phase	21,390	33,6	AV	50,0
phase	22,104	34,0	AV	50,0

AV: average

QP: quasi peak

Test Personnel:

Tester Signature: _____ Date: _____

Printed Name: H. Zenkner

Measurement Protocols: see attached file

Scenic Mobile 750 AGP, AC- / DC-adapter, 14.1" TFT-Display
video resolution 1024 x 768/60 Hz
100 MHz clock/Intel Pentium III 450 MHz

5.3 Referenced Rules Sections

N/A

5.4 Test Instrumentation Used, Conducted Measurement

Type	Manufacturer/ Model No.	Serial No.	Last Cal.	Cal. Interval
Receiver	ESHS10 Rohde&Schwarz	842884/011	May 99	12 months
Receiver	ESH3 Rohde&Schwarz	879599/019	May 99	12 months
LISN	ESH2-Z5 Rohde&Schwarz	871884/004	May 99	12 months
LISN	ESH3-Z5 Rohde&Schwarz	883650/027	May 99	12 months
Pulse limiter	ESH3-Z2 Rohde&Schwarz	---	May 99	12 months

6 RADIATED EMISSION DATA

6.1 Test Procedure

The radiated emission was measured in two parts:

1. in the frequency range from 30 MHz to 1000 MHz. The bandwidth of the EMI-receiver was set to 120 kHz and the detector was set to peak. During prescan all data in peak mode are accumulated automatically. At final measurement the detector was set to CISPR quasi peak and values above the acceptance line were verified automatically.
2. in the frequency range from 1000 MHz to 5000 MHz. The bandwidth of the EMI-receiver was set to 1 MHz and the detector was set to peak. During prescan all data in peak mode are accumulated automatically. At final measurement the detector was set to average and values above the acceptance line were verified automatically.

Both tests were performed in a semi anechoic chamber, measurements below 1000 MHz in a distance of 10 meters between antenna and EUT, above 1 GHz with a distance of 3 meters between antenna and EUT. During tests the EUT was turned 360° and the actual used receiving antenna was moved from 1 to 4 meters and the antenna polarisation was changed from horizontal to vertical for finding the maximum levels of emission.

For each range one antenna for the whole span was used

1. 30 MHz to 1000 MHz: log.-per antenna
2. 1000 MHz to 5000 MHz: rigid tensor antenna

After automatic tests during manual verification the cables and the equipment were placed and moved within the range of position in order to find the maximum of emission.

6.2 Measured Data

The EUT was measured with the Processor Intel Pentium III 450 / 500 MHz in video mode 1024 x 768, 60 Hz with internal AC- / DC-adapter and 14.1" TFT-Display (worst case). The test results below reflect the worst case with:

Internal AC- / DC-adapter, 14.1" TFT-Display, PIII 450 MHz:

100 MHz clock/Intel Pentium III 450 MHz, video resolution 1024 x 768 / 60 Hz

Part 1: frequency range 30 MHz - 1000 MHz:

Judgement: Passed by

Frequency [MHz]	Level* [dB(µV/m)]	10 Meter Limit [dB(µV/m)]	Exceeding [dB]	Ant Pol	Height in [m]	Angle in deg
99.72000	25.50	30.000	-4.5	ver	1.00	210.000
125.01000	26.10	30.000	-3.9	ver	1.60	0.000
165.42000	25.00	30.000	-5.0	ver	1.00	0.000
195.45000	26.40	30.000	-3.6	ver	1.00	180.000
198.48000	25.00	30.000	-5.0	ver	1.00	270.000
981.18000	32.70	37.000	-4.3	hor	2.20	300.000

all levels are quasi-peak levels

*The correction factor is considered automatically by the test receiver. A table of correction factors is listed in paragraph 7.4.

Internal AC- / DC-adapter, 14.1" TFT-Display, PIII 500 MHz:

100 MHz clock/Intel Pentium III 500 MHz, video resolution 1024 x 768 / 60 Hz

Part 1: frequency range 30 MHz - 1000 MHz:

Judgement: Passed by

Frequency [MHz]	Level* [dB(µV/m)]	10 Meter Limit [dB(µV/m)]	Exceeding [dB]	Ant Pol	Height in [m]	Angle in deg
125.01000	26.60	30.000	-3.4	ver	1.00	180.000
231.60000	30.50	37.000	-6.5	hor	3.40	270.000
285.66000	33.30	37.000	-3.7	hor	2.80	0.000
297.78000	29.50	37.000	-7.5	hor	2.80	0.000
396.99000	33.10	37.000	-3.9	hor	2.80	0.000
912.06000	34.70	37.000	-2.3	ver	1.60	210.000

all levels are quasi-peak levels

Part 2: frequency range 1 GHz - 5 GHz:

Judgement: Passed by

Frequency [MHz]	Level* [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]	Exceed Mark	Height [cm]	Azimuth [deg]	Ant Pol
1059.10000	33.90	53.9	20.0		220.00	239.00	hor
1367.80000	38.20	53.9	15.7		100.00	150.00	hor
1390.60000	31.70	53.9	22.2		100.00	150.00	hor
1456.90000	35.00	53.9	18.9		100.00	180.00	hor
1721.80000	32.20	53.9	21.7		100.00	330.00	hor
4972.90000	33.20	53.9	20.7		400.00	300.00	hoer

all levels are average levels

*The correction factor is considered automatically by the test receiver.
A table of correction factors is listed in paragraph 7.4.

Test Personnel:

Tester Signature: _____ Date: _____

Printed Name: M. Heuser



Fujitsu Siemens Computers
Personal Computer Scenic Mobile 750 AGP

FCC Identifier:
HSSMOB75001

Date: **Oct. 14, 1999**

Page:
27/38

Measurement Protocols: see attached files

Frequency range 30 MHz - 1 GHz:

Scenic Mobile 750 AGP, AC- / DC-adapter, 14.1" TFT-Display
video resolution 1024 x 768/60 Hz
100 MHz clock/Intel Pentium III 450 MHz

Frequency range 30 MHz - 1 GHz:

Scenic Mobile 750 AGP, AC- / DC-adapter, 14.1" TFT-Display
video resolution 1024 x 768/60 Hz
100 MHz clock/Intel Pentium III 500 MHz

Frequency range 1 GHz - 5 GHz:

Scenic Mobile 750 AGP, AC- / DC-adapter, 14.1" TFT-Display
video resolution 1024 x 768/60 Hz
100 MHz clock/Intel Pentium III 500 MHz

6.3 Referenced Rules Sections

N/A

6.4 Test Instrumentation Used, Radiated Measurement

Type	Manufacturer/ Model No.	Serial No.	Last Cal.	Cal. Interval
Receiver	ESMI Rohde&Schwarz	840607/006	May 99	15 months
Antenna	CBL 6111 Chase	1345	May 99	12 months
Active Ridged antenna	Tensor 4105 Rohde&Schwarz	2063	May 98	15 months

6.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor automatically to the measured value. The display of the Receiver shows the corrected value. The complete table of correction factors is given on next page. The basic equation with a sample calculation is as follows:

$$\mathbf{FS = RA + AF + CF}$$

where FS = Field Strength

AF = Antenna Factor (incl. Preamplifier factor)

CF = Cable Attenuation Factor

Assume a receiver reading of 28,5 dB μ V is obtained. The Antenna Factor of 10,5 and a Cable Factor of 1,3 is added, giving a field strength of 40,3 dB μ V/m.

$$FS = 28,5 + 10,5 + 1,3 = 40,3 \text{ dB}\mu\text{V/m}$$

The 40,3 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

Level in μ V/m =
Common Antilogarithm [(40,3 dB μ V/m)/20] =

103,5 μ V/m

6.6 Table of Correction Factors

Frequency range: 30 MHz to 1000 MHz

Frequency [MHz]	Correction Bilog Antenna [dB]	Correction Cable [dB]	Correction Antenna + Cable [dB]
30,0	18,20	0,20	18,40
35,0	15,50	0,23	15,73
40,0	12,90	0,25	13,15
45,0	10,40	0,27	10,67
50,0	7,80	0,31	8,11
55,0	5,90	0,34	6,24
60,0	4,90	0,36	5,26
70,0	5,40	0,35	5,75
80,0	6,90	0,40	7,30
90,0	8,40	0,44	8,84
100,0	9,70	0,47	10,17
120,0	11,30	0,52	11,82
140,0	11,30	0,60	11,90
160,0	9,80	0,64	10,44
180,0	8,30	0,65	8,95
200,0	8,50	0,69	9,19
250,0	11,90	0,80	12,70
300,0	13,10	0,90	14,00
350,0	14,40	0,96	15,36
400,0	15,90	1,00	16,90
450,0	17,00	1,11	18,11
500,0	17,70	1,24	18,94

Frequency [MHz]	Correction Bilog Antenna [dB]	Correction Cable [dB]	Correction Antenna + Cable [dB]
550,0	20,00	1,29	21,29
600,0	19,90	1,29	21,19
650,0	20,10	1,42	21,52
700,0	21,70	1,44	23,14
750,0	21,60	1,50	23,10
800,0	22,60	1,56	24,16
850,0	23,40	1,58	24,98
900,0	23,40	1,62	25,02
950,0	24,80	1,64	26,44
1000,0	25,30	1,79	27,09

Frequency range: 1 GHz to 5 GHz

Frequency [GHz]	Correction Tensor Antenna with Pre-amplifier [dB]	Correction Cable [dB]	Correction Antenna + Cable [dB]
1,0	5,70	1,62	7,32
1,1	4,80	1,68	6,48
1,2	5,10	1,75	6,85
1,3	5,00	1,80	6,80
1,4	5,10	1,96	7,06
1,5	5,90	2,00	7,90
1,6	5,60	2,15	7,75
1,7	6,70	2,30	9,00
1,8	6,60	2,32	8,92
1,9	5,90	2,35	8,25
2,0	7,20	2,44	9,64
2,1	7,30	2,62	9,92
2,2	7,40	2,75	10,15
2,3	8,40	2,70	11,10
2,4	8,00	2,69	10,69
2,5	9,30	2,65	11,95
2,6	8,70	2,75	11,45
2,7	8,70	2,92	11,62
2,8	9,00	2,98	11,98
2,9	8,60	3,10	11,70
3,0	9,50	3,12	12,62
3,1	9,20	2,37	11,57
3,2	8,60	2,40	11,00

Frequency [GHz]	Correction Tensor Antenna with Pre-amplifier [dB]	Correction Cable [dB]	Correction Antenna + Cable [dB]
3,3	8,70	2,42	11,12
3,4	9,70	2,43	12,13
3,5	9,70	2,46	12,16
3,6	10,40	2,43	12,83
3,7	10,80	2,45	13,25
3,8	11,50	2,47	13,97
3,9	11,90	2,49	14,39
4,0	10,90	2,46	13,36
4,1	10,10	2,48	12,58
4,2	8,80	2,49	11,29
4,3	8,70	2,51	11,21
4,4	8,50	2,53	11,03
4,5	8,70	2,54	11,24
4,6	9,50	2,57	12,07
4,7	10,10	2,57	12,67
4,8	11,10	2,59	13,69
4,9	11,50	2,60	14,10
5,0	11,60	2,62	14,22

7 Conducted And Radiated Emission Measurement Photos: see attached files

7.1 Test setup, conducted emission, front side view

7.2 Test setup, conducted emission, rear side view

7.3 Test setup, radiated emission, front side view

7.4 Test setup, radiated emission, rear side view

8 External Photos of EUT

see original grant, date: March 01, 1999



Fujitsu Siemens Computers
Personal Computer Scenic Mobile 750 AGP

FCC Identifier:
HSSMOB75001

Date: **Oct. 14, 1999**

Page:
36/38

9 Internal Photos of EUT: see attached files

9.1 System board, front side view

9.2 Detail of PCB revision (PCMCIA-reader disassembled)

9.3 System board, rear side view

9.4 Processor module (500 MHz), front side view

9.5 Processor module (500 MHz), rear side view

10 User Manual

see original grant, date: March 01, 1999