

# MEASUREMENT / TECHNICAL REPORT

## SIEMENS PC SYSTEME GmbH & Co. KG

### Model: Personal Computer Scenic DT6

### FCC ID: HSSSCENIC6511

### Aug. 18, 1999

This report concerns:  Original grant Class II change  
Equipment type: Personal Computer

Request issue of grant: Immediately upon completion of review  
 Defer grant per 47 CFR 0.457(d)(1)(ii) until \_\_\_\_\_ date \_\_\_\_\_. Company Name agrees to notify the Commission by \_\_\_\_\_ date \_\_\_\_\_ of the intended date of announcement of the product so that the grant can be issued on that date.

Measurement procedure used:  
 ANSI C63.4-1992  
 FCC/OET MP-4(1987)  
 other \_\_\_\_\_

Limits on compliance with: CISPR 22 resp. FCC class B

Application for Certification prepared by:  
Guenther Roesch  
Siemens PC Systeme GmbH & Co. KG  
Buergermeister-Ulrich-Str. 100  
86199 Augsburg  
Germany  
Tel.: +49 821 804-2821  
Fax: +49 821 804 2675

Applicant for this device:  
  
Siemens PC Systeme GmbH & Co. KG  
Buergermeister-Ulrich-Str. 100  
86199 Augsburg  
Germany  
Tel.: +49 821 804-0

**S**

Engineer: \_\_\_\_\_

Martin Heuser  
Siemens PC Systeme GmbH & Co. KG  
Personal Computer Scenic DT6

FCC Identifier:  
HSSSCENIC6511

Date: Aug. 18, 1999

Page:  
1/38

# Table of Contents

1	GENERAL INFORMATION	4
	1.1 Product Description	4 - 6
	1.2 Related Submittal(s)/Grant(s)	7
	1.3 Tested System Details	7 - 9
	1.4 Test Methodology	10
	1.5 Test Facility	10
	1.6 Referenced Rules Sections	10
2	PRODUCT LABELING	11
	Figure 2.1 FCC ID Label: see original grant, date: Feb. 23, 1999	11
	Figure 2.2 Location of Label on EUT: see original grant, date: Feb. 23, 1999	11
3	SYSTEM TEST CONFIGURATION	12
	3.1 Justification	12 - 13
	3.2 Video Mode Justification	14
	3.3 EUT Exercise Software	15
	3.4 Special Accessories	15
	3.5 Equipment Modifications	16
	3.6 Configuration of Tested System	16
	Figure 3.1 Configuration of Tested System	17
4	BLOCK DIAGRAM OF EQUIPMENT UNDER TEST	18
	4.1 Block Diagram Description	18
	4.2 Clockfrequencies of the EUT	19
	4.3 Theory of Operation	19
	Figure 4.1 Block Diagram	20
5	CONDUCTED EMISSION DATA	21
	5.1 Test Procedure	21
	5.2 Measured Data: see attached file	21 - 23
	5.3 Referenced Rules	24
	5.4 Test Instrumentation Used, Conducted Measurement	24

6 RADIATED EMISSION DATA	25
6.1 Test Procedure	25
6.2 Measured Data: see attached file	26 - 28
6.3 Reference Rules Sections	29
6.4 Test Instrumentation Used, Radiated Measurement	29
6.5 Field Strength Calculation	30
6.6 Table of Correction Factors	31 - 34
7 CONDUCTED AND RADIATED MEASUREMENT PHOTOS: see attached files	35
8 EXTERNAL PHOTOS OF EUT: see original grant, date Feb. 23, 1999	36
9 INTERNAL PHOTOS OF EUT: see attached files	37
10 USER MANUAL: see original grant, date Feb. 23, 1999	38

# 1 GENERAL INFORMATION

## 1.1 Product Description

The Siemens Computer Scenic DT6 is a compact desktop personal computer. The system board integrates the Pentium Processor, memory, and I/O-technologies. The system now can be assembled with Processor Intel Pentium III 600 MHz.

With the first model (original grant, date: Feb. 23, 1999) two standard PSU's (Astec, model AA20650 and Minebea, model SPW 1553) were equipped, now the PSU Minebea, model SPW 1553-1 has been added.

### *Description of the power supplies:*

- Power supplies:

ASTEC, model	AA20650 S26113-E425-V30
Minebea, model	SPW1553 S26113-E425-V20
Minebea, model	SPW1553-1 S26113-E425-V20

### *Features Overview:*

#### Chip Set

- Vendor: Intel
- Type: Natoma 82440BX  
PAC 82443BX & PIIX4E82371EB

#### Intelligent drive electronics (IDE) interface

- Feature: Enhanced bus master ATA33 IDE interface incl. EIDE

**S**

**Siemens PC Systeme GmbH & Co. KG**  
**Personal Computer Scenic DT6**

FCC Identifier:  
**HSSSCNIC6511**

Date: **Aug. 18,**  
**1999**

Page:  
**4/38**

Universal serial bus (USB) interface

- Support: 12 Mbits/s  
Windows 98™ and Windows NT™
- Connector: Two external USB connectors

Super I/O

- Vendor: SMSC
- Type: FDC37M807

Keyboard and mouse interface

- Feature: Keyboard and mouse interface
- Support: Connector exchange  
Power fused with polyswitch
- External connector: Two external PS/2 Mini-DIN connectors

Parallel port interface

- Feature: One parallel port
- Support: EPP / ECP capable  
Interrupts / DMA channels route able for PnP
- Connector: One external standard parallel port

Serial port interface

- Feature: Two serial ports with FIFO, 16550 compatible  
One external serial (COM1) port  
One internal chip card reader port of external serial (COM2)  
Port via wire
- Support: Interrupts route able for PnP
- Connector: One external standard and one internal connector

Main memory

- Support: The system needs at least one module and can manage at most there SDRAM modules.
- Size: From 16 Mbytes up to 768 Mbytes SDRAM

<p style="text-align: center;"><b>S</b></p>	<p style="text-align: center;"><b>Siemens PC Systeme GmbH &amp; Co. KG</b> <b>Personal Computer Scenic DT6</b></p> <p style="text-align: center;">FCC Identifier: <b>HSSSCENIC6511</b></p>	<p>Date: <b>Aug. 18,</b> <b>1999</b></p> <p>Page: <b>5/38</b></p>
---	--	---

- Technology: 100 MHz unbuffered DIMM modules.  
168 Pin, 3,3 V, 64 Bit, 72 Bit (with ECC), 100 MHz SDRAM
- Granularity: For one socket 16, 32, 64, 128 or 256 Mbyte.

LAN – Ethernet controller

- Vendor: Intel
- Type: 82559
- Feature: 10/100 Mbit/s

The personal computer is assembled by Siemens PC Systeme GmbH & Co. KG,  
Bürgermeister-Ulrich-Str. 100, 86199 Augsburg.

<b>S</b>	<b>Siemens PC Systeme GmbH &amp; Co. KG</b> <b>Personal Computer Scenic DT6</b>  FCC Identifier: <b>HSSSCENIC6511</b>	Date. <b>Aug. 18,</b> <b>1999</b>  Page: <b>6/38</b>
----------	---	--

## 1.2 Related Submittal Grant

N/A

## 1.3 Tested System Details

The FCC IDs for all equipment, plus description of all cables used in the tested system are:

Pos	Model Number (Serial Number)	FCC ID	Description	Cable Description (length in [cm])
1	Siemens Scenic 661 (DT6)	HSSSCENIC6511	PC <b>EUT</b>	unshielded power cord [292]
2	Siemens MCM 1705 NTD	A3LCGH760	Monitor	unshielded power cord [175] shielded video cable [168]
3	Siemens S26381-K210	HSS01TASTK210	Keyboard	shielded keyboard cable [143]
4	Microsoft MS 2.1A	C3KKMP3	Mouse	shielded mouse cable [183]
5	Microsoft Intelli mouse 1.1A	DOC: PN X03-29688	USB mouse	shielded mouse cable [197]
6	Hewlett Packard HP 2225C+ (3019S70991)	DSI6XU2225	Printer, parallel I/F	unshielded AC cable [180], shielded centronics cable [190]

<b>S</b>	<b>Siemens PC Systeme GmbH &amp; Co. KG</b> <b>Personal Computer Scenic DT6</b>  FCC Identifier: <b>HSSSCENIC6511</b>	Date: <b>Aug. 18,</b> <b>1999</b>  Page: <b>7/38</b>
----------	---	--

Pos	Model Number (Serial Number)	FCC ID	Description	Cable Description (length in [cm])
7	Hewlett Packard HP 2225D+ (3012S70819)	DSI6XU2225	Printer, serial I/F	unshielded power cord [185], shielded serial cable [190]
8	Hewlett Packard HP 2225D+ (2952S61299)	DSI6XU2225	Printer, serial I/F	unshielded power cord [185], shielded serial cable [190]
9	Siemens	N/A	USB cable	shielded cable, terminated [192]
	<b><u>Pos 1 contains:</u></b>			
a <sub>1</sub>	ASTECC (UK), AA20650 SNI: S26113-E425-V30	N/A	Power supply	
a <sub>2</sub>	Minebea SPW1553 SNI: S26113-E425-V20	N/A	Power supply	
a <sub>3</sub>	Minebea SPW1553-1 SNI: S26113-E425-V20	N/A	Power supply	



Pos	Model Number (Serial Number)	FCC ID	Description	Cable Description (length in [cm])
b	Siemens S26361-D1107-A11 GS 1	N/A	System board	
c	Hyundai PC100-322-620	N/A	SDRAM	
d	Intel Pentium III 80525/PY600512	N/A	Processor module	
e	Matrox G200 AGP	DOC: G2+/MILA/8B/20	Graphic controller board	
f	Siemens S26361-S1783-V2	N/A	Slot with additional serial port	
g	Quantum Fireball EX 6.4A S26361-H426-V100	N/A	Hard disk drive	
h	Toshiba XM-6302B S26361-H402-V500	CJ6AT98-032	CD-ROM drive	
i	SONY MPF920-C	N/A	Floppy disk drive	

Remark: position 1a<sub>1</sub> / 1a<sub>2</sub> / 1a<sub>3</sub> optional

<b>S</b>	<b>Siemens PC Systeme GmbH &amp; Co. KG</b> <b>Personal Computer Scenic DT6</b>  FCC Identifier: <b>HSSSCNIC6511</b>	Date: <b>Aug. 18,</b> <b>1999</b>  Page: <b>9/38</b>
----------	--	--

## 1.4 Test Methodology

Both, conducted and radiated tests were performed according to the procedures in ANSI C63.4-1992. Radiated testing below 1 GHz was performed at an antenna to EUT distance of 10 meters above 1 GHz at an antenna to EUT distance of 3 meters. All radiated emission measurements were done in an anechoic chamber. Limits for radiated and conducted emission are in compliance with CISPR 22 resp FCC class B.

## 1.5 Test Facility

The anechoic chamber and conducted measurement facility used to collect the emission data is located at Siemens PC Systeme GmbH & Co. KG, Bürgermeister Ulrich Str. 100, 86199 Augsburg, Germany. This site has been fully described in a report dated January 24, 1997 sub-mitted to your office, and accepted in a letter dated March 03, 1997 (31040/SIT).

## 1.6 Referenced Rules Sections

N/A

<b>S</b>	<b>Siemens PC Systeme GmbH &amp; Co. KG</b> <b>Personal Computer Scenic DT6</b>  FCC Identifier: <b>HSSSCNIC6511</b>	Date: <b>Aug. 18,</b> <b>1999</b>  Page: <b>10/38</b>
----------	--	---

## 2 PRODUCT LABELING

### 2.1 FCC ID Label

see original grant, date: Feb. 23, 1999

### 2.2 Location of Label on EUT

see original grant, date: Feb. 23, 1999

<b>S</b>	<b>Siemens PC Systeme GmbH &amp; Co. KG</b> <b>Personal Computer Scenic DT6</b>  FCC Identifier: <b>HSSSCNIC6511</b>	Date: <b>Aug. 18,</b> <b>1999</b>  Page: <b>11/38</b>
----------	--	---

# 3 SYSTEM TEST CONFIGURATION

## 3.1 Justification

The system was configured for testing in a maximum fashion (as a customer can use it). Each type of external ports was connected with a peripheral unit (e.g. serial port connected to a serial printer, external keyboard port connected to a keyboard and so on). During radiated emission the monitor was powered via system unit, during conducted emission also the external monitor supply was tested.

The system clock is 100 MHz, the clock frequency was tested with the corresponding worst case processor:

100 MHz clock: Intel Pentium III 600 MHz

The system is provided with three kinds of power supplies:

- ASTEC, AA20650 SNI: S26113-E425-V30
- Minebea, SPW1553 SNI: S26113-E425-V20
- Minebea, SPW1553-1 SNI: S26113-E425-V20

According both worst case results concerning the test report of the original grant (dated: Feb. 23, 1999) the following configuration has been tested:

<b>S</b>	<b>Siemens PC Systeme GmbH &amp; Co. KG</b> <b>Personal Computer Scenic DT6</b>  FCC Identifier: <b>HSSSCENIC6511</b>	Date: <b>Aug. 18,</b> <b>1999</b>  Page: <b>12/38</b>
----------	---	---

**Referring to radiated emission the following (worst case) results are applicable:**

**Minebea PSU, model SPW1553-1:**

Frequency range 30 MHz - 1 GHz:

100 MHz clock/Pentium III 600 MHz, video resolution 1024 x 768/100 Hz

Frequency range 1 GHz - 5 GHz:

100 MHz clock/Pentium III 600 MHz, video resolution 1024 x 768/100 Hz

**Referring to conducted emission the following (worst case) results are applicable:**

**Minebea PSU, model SPW1553-1:**

100 MHz clock/Pentium III 600 MHz, video resolution 1024 x 768/100 Hz  
monitor power via system unit

<b>S</b>	<b>Siemens PC Systeme GmbH &amp; Co. KG</b> Personal Computer Scenic DT6  FCC Identifier: <b>HSSSCNIC6511</b>	Date. <b>Aug. 18,</b> <b>1999</b>  Page: <b>13/38</b>
----------	---	---

## 3.2 Video mode Justification

The system was tested in video graphic modes 1024 x 768. The worst case combination according the test results of the original grant (date: Feb. 23, 1999) have been tested the configuration is:

The following data are applicable:

### radiated emission:

#### **Minebea PSU, model SPW1553-1:**

Frequency range 30 MHz - 1 GHz:

100 MHz clock/Pentium III 600 MHz, video resolution 1024 x 768/100 Hz

Frequency range 1 GHz - 5 GHz:

100 MHz clock/Pentium III 600 MHz, video resolution 1024 x 768/100 Hz

### conducted emission:

#### **Minebea PSU, model SPW1553-1:**

100 MHz clock/Pentium III 600 MHz, video resolution 1024 x 768/100 Hz  
monitor power via system unit

<b>S</b>	<b>Siemens PC Systeme GmbH &amp; Co. KG</b> Personal Computer Scenic DT6  FCC Identifier: <b>HSSSCENIC6511</b>	Date. <b>Aug. 18,</b> <b>1999</b>  Page: <b>14/38</b>
----------	--	---

## 3.3 EUT Exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to typical use.

The used sequence is:

- scrolling "H" with applicable video mode (see 3.2)
- internal Floppy drive writes to the HD and reads back
- internal CD-ROM writes to the HD
- "H`s" are sent to the printer ports
- data is sent to USB ports
- LAN data communication

## 3.4 Special Accessories

As shown in Figure 3.1, all interface cables used for compliance testing are shielded like normally supplied by the manufacturer. All cable connectors feature integral metal hoods for shielding.

<b>S</b>	<b>Siemens PC Systeme GmbH &amp; Co. KG</b> <b>Personal Computer Scenic DT6</b>  FCC Identifier: <b>HSSSCENIC6511</b>	Date: <b>Aug. 18,</b> <b>1999</b>  Page: <b>15/38</b>
----------	---	---

## 3.5 Equipment Modifications

To achieve compliance to Class B levels, the following modifications were made during compliance testing:

**no modifications**

Applicant Signature \_\_\_\_\_ Date \_\_\_\_\_

Typed/Printed Name \_\_\_\_\_ Position \_\_\_\_\_


## 3.6 Configuration of Tested System

All necessary tests were carried out like figure 3.1. The system was used according to paragraph 1.1. During test for conducted emission the EUT was connected to a LISN. All peripherals were supplied by a second LISN. The equipment was configured according to ANSI C63.4-1992 Fig 11.

<b>S</b>	<b>Siemens PC Systeme GmbH &amp; Co. KG</b> Personal Computer Scenic DT6  FCC Identifier: <b>HSSSCNIC6511</b>	Date: <b>Aug. 18,</b> <b>1999</b>  Page: <b>16/38</b>
----------	---	---



# Figure 3.1 Configuration of Tested System

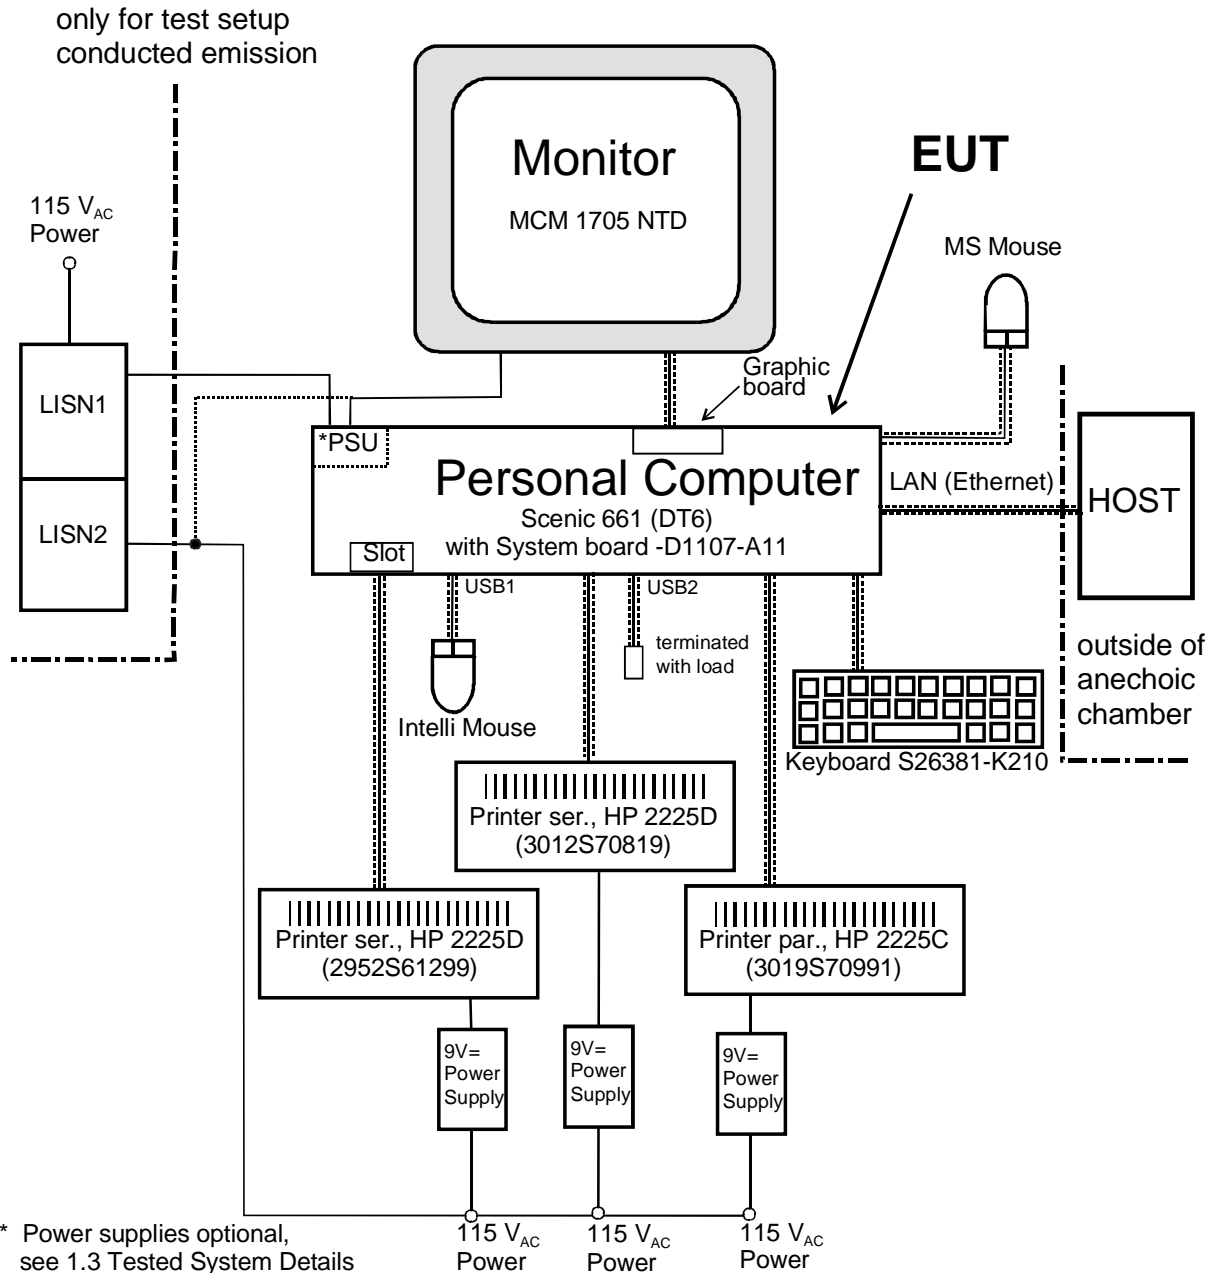

\* Power supplies optional,  
see 1.3 Tested System Details

# 4 BLOCK DIAGRAM OF EUT

see fig 4.1 page 20

## 4.1 Block Diagram Description (see fig. 4.1)

The major parts of the system are (fig 4.1).

- System board
- Power supply
- Floppy disk drive
- Hard disk drive
- CD-ROM drive
- Peripheral connector area (Keyboard, Mouse, Ser. 1, Parallel Port, LAN and USB)

The detailed diagram of the system board is shown in fig 4.1

The personal computer works exactly like a traditional P.C..

<b>S</b>	<b>Siemens PC Systeme GmbH &amp; Co. KG</b> <b>Personal Computer Scenic DT6</b>  FCC Identifier: <b>HSSSCNIC6511</b>	Date: <b>Aug. 18,</b> <b>1999</b>  Page: <b>18/38</b>
----------	--	---

## 4.2 Clockfrequencies of EUT

Clock synthesizer	14,318 MHz
Front side bus	66,6 / 100 MHz
Memory	66,6 / 100 MHz
PCI-bus	33,3 MHz
PIIX4 to IDE and USB	33,3 MHz
ISA Bus	8,2 MHz
I/O controller	14,3 MHz
USB	48 MHz
AGP bus	66,6 MHz

## 4.3 Theory of Operation


The compact desktop PC works exactly as a traditional PC.

The processors run internally between 233 and 600 MHz, the system clock is 66,6 MHz or 100 MHz and is multiplied by the processors internally by 3,5, 4,0, 4,5, 5,0, 5,5 or 6,0 (only with 66,6 MHz clock).

The highest possible frequencies and the corresponding processors are:

System clock	Processor	factor
66,6 MHz	233 MHz	3,5
66,6 MHz	266 MHz	4,0
66,6 MHz	300 MHz	4,5
66,6 MHz	333 MHz	5,0
66,6 MHz	366 MHz	5,5
100 MHz	350 MHz	3,5
100 MHz	400 MHz	4,0
100 MHz	450 MHz	4,5
100 MHz	500 MHz	5,0
100 MHz	600 MHz	6,0

# Figure 4.1 Block Diagram of the EUT

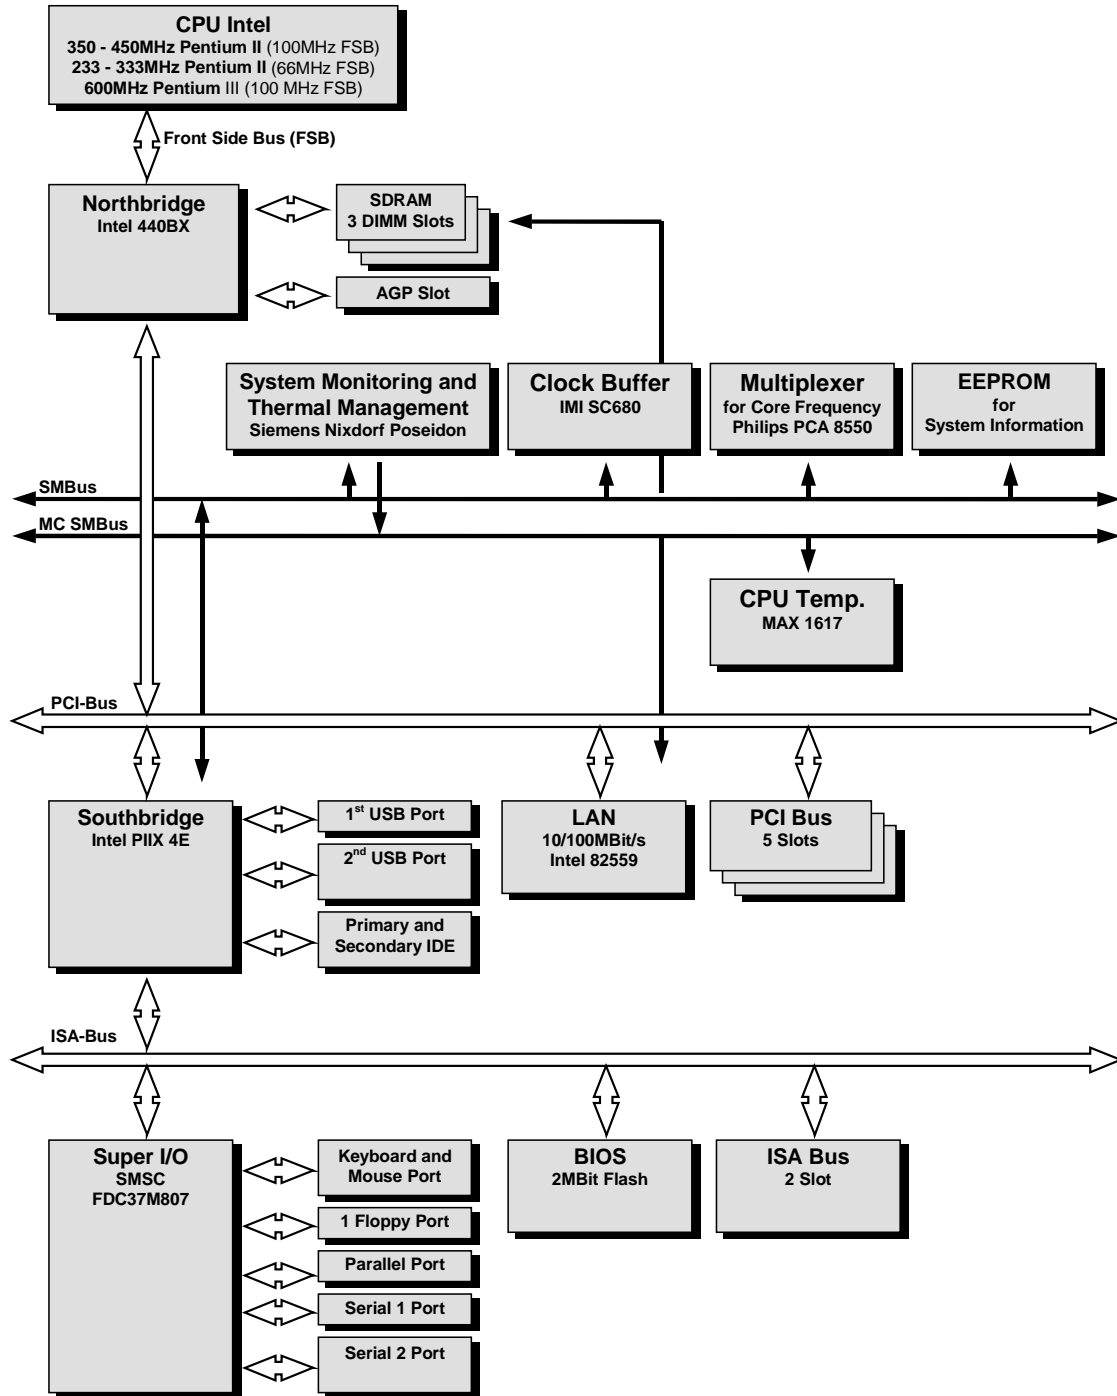

# 5 CONDUCTED EMISSION DATA

## 5.1 Test Procedure

The initial step in collecting conducted emission data is a Rohde & Schwarz Test Receiver (ESHS10). During first scan all data in peak mode is measured, then all significant peaks are explored either in quasi-peak mode or in average mode. In case of low noise (no peak value reaches the quasi peak limit), only average checks are done.

## 5.2 Measured Data

The conducted emission was measured the following way:

1. Peak noise on L
2. Peak noise on N

During the emission measurement the printers are supplied with power via a second LISN, the monitor was powered both, via the system unit or separately.

The worst case results of the measurement is given next:

### **Minebea PSU, model SPW1553-1**

video resolution 1024 x 768/100 Hz, monitor power via system unit

Judgement: Passed by

	Frequency [MHz]	Measured [dB(μV)]	Kind of value	Limit [dB(μV)]
phase	0,222	48,9	QP	62,7
neutral	0,516	40,8	QP	56,0
phase	0,822	42,0	QP	56,0

**S**

**Siemens PC Systeme GmbH & Co. KG**  
**Personal Computer Scenic DT6**

FCC Identifier:  
**HSSCENIC6511**

Date: **Aug. 18,**  
**1999**

Page:  
**21/38**

Judgement: Passed by

	Frequency [MHz]	Measured [dB(μV)]	Kind of value	Limit [dB(μV)]
neutral	0,222	45,1	AV	52,7
phase	0,516	38,4	AV	46,0
phase	0,618	37,9	AV	46,0
phase	0,720	38,8	AV	46,0
neutral	0,822	40,1	AV	46,0
neutral	0,924	38,5	AV	46,0

AV: average

QP: quasi peak

Test Personnel:

Tester Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name: M. Heuser

<b>S</b>	<b>Siemens PC Systeme GmbH &amp; Co. KG</b> Personal Computer Scenic DT6  FCC Identifier: <b>HSSSCNIC6511</b>	Date: <b>Aug. 18,</b> <b>1999</b>  Page: <b>22/38</b>
----------	---	---

Measurement Protocols: see attached file

**Minebea PSU, model SPW1553-1:**  
100 MHz clock/Intel Pentium III 600 MHz  
video resolution 1024 x 768/100 Hz

<b>S</b>	<b>Siemens PC Systeme GmbH &amp; Co. KG</b> Personal Computer Scenic DT6  FCC Identifier: <b>HSSCENIC6511</b>	Date. <b>Aug. 18,</b> <b>1999</b>  Page: <b>23/38</b>
----------	---	---

## 5.3 Referenced Rules Sections

N/A

## 5.4 Test Instrumentation Used, Conducted Measurement

Type	Manufacturer/ Model No.	Serial No.	Last Cal.	Cal. Interval
Receiver	ESHS10 Rohde&Schwarz	842884/011	May 99	12 months
LISN	ESH2-Z5 Rohde&Schwarz	871884/004	May 99	12 months
LISN	ESH3-Z5 Rohde&Schwarz	883650/027	May 99	12 months
Pulse limiter	ESH3-Z2 Rohde&Schwarz	---	May 99	12 months

**S**

Siemens PC Systeme GmbH & Co. KG  
Personal Computer Scenic DT6

FCC Identifier:  
HSSCENIC6511

Date: Aug. 18,  
1999

Page:  
24/38



# 6 RADIATED EMISSION DATA

## 6.1 Test Procedure

The radiated emission was measured in two parts:

1. in the frequency range from 30 MHz to 1000 MHz. The bandwidth of the EMI-receiver was set to 120 kHz and the detector was set to peak. During prescan all data in peak mode are accumulated automatically. At final measurement the detector was set to CISPR quasi peak and values above the acceptance line were verified automatically.
2. in the frequency range from 1000 MHz to 5000 MHz. The bandwidth of the EMI-receiver was set to 1 MHz and the detector was set to peak. During prescan all data in peak mode are accumulated automatically. At final measurement the detector was set to average and values above the acceptance line were verified automatically.

Both tests were performed in a semi anechoic chamber, measurements below 1000 MHz in a distance of 10 meters between antenna and EUT, above 1 GHz with a distance of 3 meters between antenna and EUT. During tests the EUT was turned 360° and the actual used receiving antenna was moved from 1 to 4 meters and the antenna polarisation was changed from horizontal to vertical for finding the maximum levels of emission.

For each range one antenna for the whole span was used

1. 30 MHz to 1000 MHz: log.-per antenna
2. 1000 MHz to 5000 MHz: rigid tensor antenna

After automatic tests during manual verification the cables and the equipment were placed and moved within the range of position in order to find the maximum of emission.

<b>S</b>	<b>Siemens PC Systeme GmbH &amp; Co. KG</b> <b>Personal Computer Scenic DT6</b>  FCC Identifier: <b>HSSCENIC6511</b>	Date: <b>Aug. 18,</b> <b>1999</b>  Page: <b>25/38</b>
----------	--	---

## 6.2 Measured Data

The EUT was measured with the Processor Pentium III 600 MHz in video mode 1024 x 768. The test results below reflect the worst case with:

**Minebea PSU, model SPW1553-1:**  
 100 MHz clock/Intel Pentium III 600 MHz,  
 video resolution 1024 x 768/100 Hz

### Part 1: frequency range 30 MHz - 1000 MHz:

Judgement: Passed by

Frequency [MHz]	Level* [dB(μV/m)]	10 Meter Limit [dB(μV/m)]	Exceeding [dB]	Ant Pol	Height in [m]	Angle in deg
30.12000	17.50	30.000	-12.8	hor	2.8000	270.000
89.13000	24.00	30.000	-6.0	ver	1.0000	330.000
96.69000	20.80	30.000	-9.2	ver	1.6000	210.000
225.09000	19.20	30.000	-10.8	hor	3.4000	300.000
575.70000	31.10	37.000	-5.9	ver	2.8000	90.000
994.65000	32.80	37.000	-4.2	ver	1.6000	150.000

all levels are quasi-peak levels

### Part 2: frequency range 1 GHz - 5 GHz:

Judgement: Passed by

Frequency [MHz]	Level* [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Exceed Mark	Height [cm]	Azimuth [deg]	Ant Pol
1100.20000	27.70	53.9	26.2		180.0	0.00	hor
1200.10000	30.40	53.9	23.5		140.0	210.00	hor

**S**

**Siemens PC Systeme GmbH & Co. KG**  
**Personal Computer Scenic DT6**

FCC Identifier:  
**HSSSCNIC6511**

Date: **Aug. 18,**  
**1999**

Page:  
**26/38**

Frequency [MHz]	Level* [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Exceed Mark	Height [cm]	Azimuth [deg]	Ant Pol
1291.30000	27.10	53.9	26.8		100.0	0.00	ver
1400.20000	30.10	53.9	23.9		140.0	29.00	ver
1790.20000	30.30	53.9	23.6		100.0	0.00	ver
2250.10000	38.80	53.9	15.1		100.0	29.00	ver

all levels are average levels

\*The correction factor is considered automatically by the test receiver.  
A table of correction factors is listed in paragraph 7.4.

Test Personnel:

Tester Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name: A. Siebenhütter

Test Personnel:

Tester Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name: M. Bosse

<b>S</b>	<b>Siemens PC Systeme GmbH &amp; Co. KG</b> <b>Personal Computer Scenic DT6</b>  FCC Identifier: <b>HSSSCNIC6511</b>	Date. <b>Aug. 18,</b> <b>1999</b>  Page: <b>27/38</b>
----------	--	---

# Measurement Protocols: see attached files

## **Minebea PSU, model SPW1553-1:**

Frequency range 30 MHz - 1 GHz:

100 MHz clock/Intel Pentium III 600 MHz

video resolution 1024 x 768/100 Hz

Frequency range 1 GHz - 5 GHz:

100 MHz clock/Intel Pentium III 600 MHz

video resolution 1024 x 768/100 Hz

<b>S</b>	<b>Siemens PC Systeme GmbH &amp; Co. KG</b> Personal Computer Scenic DT6  FCC Identifier: <b>HSSSCNIC6511</b>	Date: <b>Aug. 18,</b> <b>1999</b>  Page: <b>28/38</b>
----------	---	---

## 6.3 Referenced Rules Sections

N/A

## 6.4 Test Instrumentation Used, Radiated Measurement

Type	Manufacturer/ Model No.	Serial No.	Last Cal.	Cal. Interval
Receiver	ESMI Rohde&Schwarz	840607/006	May 99	15 months
Antenna	CBL 6111 Chase	1345	May 99	12 months
Antenna	CBL 6112 Chase	2041	May 98	15 months
Active Ridged antenna	Tensor 4105 Rohde&Schwarz	2063	May 98	15 months

**S**

Siemens PC Systeme GmbH & Co. KG  
Personal Computer Scenic DT6

FCC Identifier:  
HSSSCNIC6511

Date: Aug. 18,  
1999

Page:  
29/38

## 6.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor automatically to the measured value. The display of the Receiver shows the corrected value. The complete table of correction factors is given on next page. The basic equation with a sample calculation is as follows:

$$\mathbf{FS = RA + AF + CF}$$

where FS = Field Strength

AF = Antenna Factor (incl. Preamplifier factor)

CF = Cable Attenuation Factor

Assume a receiver reading of 28,5 dB $\mu$ V is obtained. The Antenna Factor of 10,5 and a Cable Factor of 1,3 is added, giving a field strength of 40,3 dB $\mu$ V/m.

$$FS = 28,5 + 10,5 + 1,3 = 40,3 \text{ dB}\mu\text{V/m}$$

The 40,3 dB $\mu$ V/m value can be mathematically converted to its corresponding level in  $\mu$ V/m.

Level in  $\mu$ V/m =  
Common Antilogarithm [(40,3 dB $\mu$ V/m)/20] =

**103,5  $\mu$ V/m**

**S**

Siemens PC Systeme GmbH & Co. KG  
Personal Computer Scenic DT6

FCC Identifier:  
**HSSSCNIC6511**

Date. Aug. 18,  
1999

Page:  
**30/38**

## 6.6 Table of Correction Factors

Frequency range: 30 MHz to 1000 MHz

Frequency [MHz]	Correction Bilog Antenna [dB]	Correction Cable [dB]	Correction Antenna + Cable [dB]
30,0	17,90	0,65	18,55
35,0	15,20	0,67	15,87
40,0	12,80	0,68	13,48
45,0	10,00	0,73	10,73
50,0	8,20	0,74	8,94
55,0	6,90	0,82	7,72
60,0	6,50	0,84	7,34
70,0	6,40	0,90	7,30
80,0	7,20	0,95	8,15
90,0	9,30	0,99	10,29
100,0	11,10	1,10	12,20
120,0	12,10	1,14	13,24
140,0	11,30	1,27	12,57
160,0	10,60	1,35	11,95
180,0	9,60	1,45	11,05
200,0	9,50	1,51	11,01
250,0	12,40	1,71	14,11
300,0	13,80	1,84	15,64
350,0	15,00	2,00	17,00
400,0	16,40	2,18	18,58
450,0	16,90	2,35	19,25
500,0	17,40	2,43	19,83

**S**

Siemens PC Systeme GmbH & Co. KG  
Personal Computer Scenic DT6

FCC Identifier:  
HSSSCNIC6511

Date: Aug. 18,  
1999

Page:  
31/38

Frequency [MHz]	Correction Bilog Antenna [dB]	Correction Cable [dB]	Correction Antenna + Cable [dB]
550,0	19,00	2,62	21,62
600,0	18,70	2,73	21,43
650,0	19,70	2,88	22,58
700,0	19,00	2,91	21,91
750,0	20,00	3,01	23,01
800,0	19,90	3,21	23,11
850,0	22,90	3,32	26,22
900,0	20,70	3,40	24,10
950,0	21,00	3,49	24,49
1000,0	25,00	3,69	28,69



Frequency range: 1 GHz to 5 GHz

Frequency [GHz]	Correction Tensor Antenna with Pre-amplifier [dB]	Correction Cable [dB]	Correction Antenna + Cable [dB]
1,0	5,70	1,62	7,32
1,1	4,80	1,68	6,48
1,2	5,10	1,75	6,85
1,3	5,00	1,80	6,80
1,4	5,10	1,96	7,06
1,5	5,90	2,00	7,90
1,6	5,60	2,15	7,75
1,7	6,70	2,30	9,00
1,8	6,60	2,32	8,92
1,9	5,90	2,35	8,25
2,0	7,20	2,44	9,64
2,1	7,30	2,62	9,92
2,2	7,40	2,75	10,15
2,3	8,40	2,70	11,10
2,4	8,00	2,69	10,69
2,5	9,30	2,65	11,95
2,6	8,70	2,75	11,45
2,7	8,70	2,92	11,62
2,8	9,00	2,98	11,98
2,9	8,60	3,10	11,70
3,0	9,50	3,12	12,62
3,1	9,20	2,37	11,57
3,2	8,60	2,40	11,00

Frequency [GHz]	Correction Tensor Antenna with Pre-amplifier [dB]	Correction Cable [dB]	Correction Antenna + Cable [dB]
3,3	8,70	2,42	11,12
3,4	9,70	2,43	12,13
3,5	9,70	2,46	12,16
3,6	10,40	2,43	12,83
3,7	10,80	2,45	13,25
3,8	11,50	2,47	13,97
3,9	11,90	2,49	14,39
4,0	10,90	2,46	13,36
4,1	10,10	2,48	12,58
4,2	8,80	2,49	11,29
4,3	8,70	2,51	11,21
4,4	8,50	2,53	11,03
4,5	8,70	2,54	11,24
4,6	9,50	2,57	12,07
4,7	10,10	2,57	12,67
4,8	11,10	2,59	13,69
4,9	11,50	2,60	14,10
5,0	11,60	2,62	14,22

## 7 Conducted And Radiated Emission Measurement Photos: see attached files

7.1 Test setup, conducted emission, front side view

7.2 Test setup, conducted emission, rear side view

7.3 Test setup, radiated emission, front side view

7.4 Test setup, radiated emission, rear side view

<b>S</b>	<b>Siemens PC Systeme GmbH &amp; Co. KG</b> <b>Personal Computer Scenic DT6</b>  FCC Identifier: <b>HSSSCENIC6511</b>	Date. <b>Aug. 18,</b> <b>1999</b>  Page: <b>35/38</b>
----------	---	---

## 8 External Photos of EUT

see original grant, date: Feb. 23, 1999

<b>S</b>	<b>Siemens PC Systeme GmbH &amp; Co. KG</b> <b>Personal Computer Scenic DT6</b>  FCC Identifier: <b>HSSSCNIC6511</b>	Date: <b>Aug. 18,</b> <b>1999</b>  Page: <b>36/38</b>
----------	--	---

## 9 Internal Photos of EUT: see attached files

- 9.1 Power supply Minebea (SPW1553-1), closed case, top side view
- 9.2 Power supply Minebea (SPW1553-1), opened case, inside view
- 9.3 Power supply Minebea (SPW1553-1), rear side view

<b>S</b>	<b>Siemens PC Systeme GmbH &amp; Co. KG</b> <b>Personal Computer Scenic DT6</b>  FCC Identifier: <b>HSSSCNIC6511</b>	Date. <b>Aug. 18,</b> <b>1999</b>  Page: <b>37/38</b>
----------	--	---

# 10 User Manual

see original grant, date: Feb. 23, 1999

<b>S</b>	<b>Siemens PC Systeme GmbH &amp; Co. KG</b> Personal Computer Scenic DT6  FCC Identifier: <b>HSSCENIC6511</b>	Date: <b>Aug. 18,</b> <b>1999</b>  Page: <b>38/38</b>
----------	---	---