

**Conducted noise according to:  
EN 55022 class B**

EUT: DT6-D1127 / PIII 866 MHz (Scenic xB-1127)  
Manufacturer: Fujitsu Siemens Computers  
Operating Condition: Scroll "H" 1024\*768/100 Hz; HD/CD/Peripheral-Test  
Test Site: Fujitsu Siemens Augsburg (shielded room #2)  
Operator: C. Brummer  
Configuration: PSU: Astec E425  
Comment: Mains: 115 V<sub>AC</sub>; Monitor power via EUT  
Start of Test: 10.04.00 / 14:45:31

**SCAN TABLE: "Volt\_015-30fin"**

Unit: dB $\mu$ V

Detector:	Mode:
Curve 1: MaxPeak	MaxHold
Curve 2: Average	MaxHold


Subrange 1:

Start Frequency:	150.0 kHz	Step Size:	6.0 kHz
Stop Frequency:	30.0 MHz		
Measure Time:	10.0 ms		
IF Bandwidth:	10 kHz		

Receiver:	ESH3	Transducer:	ESH3-Z5
Signal Path:	None	System Transducer:	None
Meas. Mode:	Lin	Add. Transd. 1:	ESH3-Z2
Tracking Gen.:	Off	Add. Transd. 2:	None
Input:	--	Add. Transd. 3:	None

Preamplifier:	--	Demodulation:	A3
RF Att.:	0 dB	Volume:	--
Ref. Level:	--	Squelch:	--
Min. RF Att.:	--	Option:	None
IF Att.:	LowDistortion		
Autorange:	On		

Curve 1:	On	Repetition:	Single
Curve 2:	On	Stop Mark:	Off
		Stop Message:	Off
		Stop Message:	Off

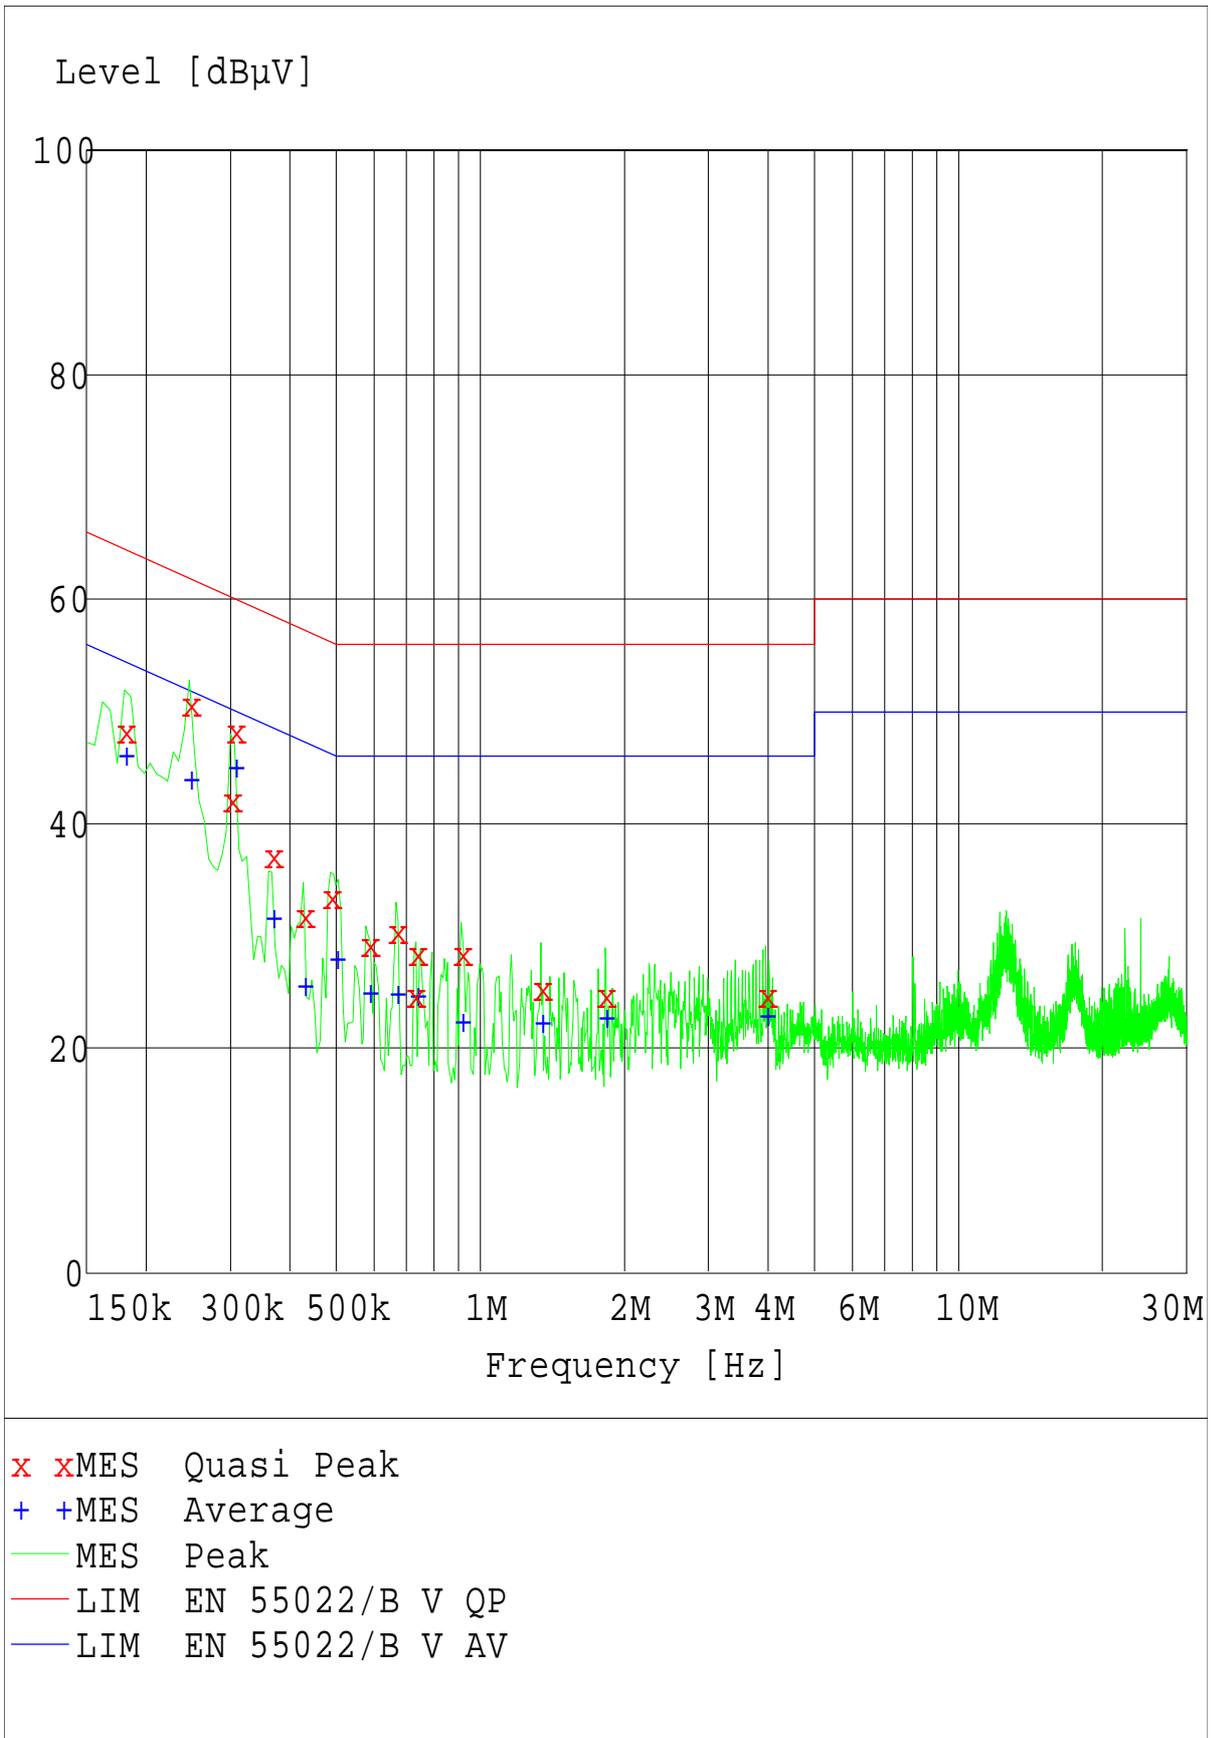

**MEASUREMENT RESULT: "Quasi Peak"**

10.04.00 15:10

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.180000	48.40	10.0	64.4	16.0	L1	GND
0.246000	50.70	10.0	61.8	11.1	L1	GND
0.300000	42.20	10.0	60.2	18.0	N	GND
0.306000	48.40	10.0	60.0	11.6	L1	GND
0.366000	37.20	10.0	58.5	21.3	N	GND
0.426000	31.90	10.0	57.3	25.4	L1	GND
0.486000	33.60	10.0	56.2	22.6	L1	GND
0.582000	29.30	10.0	56.0	26.7	N	GND
0.666000	30.50	10.0	56.0	25.5	N	GND
0.726000	24.80	10.0	56.0	31.2	N	GND
0.732000	28.50	10.0	56.0	27.5	L1	GND
0.912000	28.60	10.0	56.0	27.4	N	GND
1.338000	25.40	10.0	56.0	30.6	L1	GND
1.824000	24.80	10.0	56.0	31.2	L1	GND
3.954000	24.70	10.0	56.0	31.3	N	GND

**MEASUREMENT RESULT: "Average"**

10.04.00 15:10

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.180000	46.20	10.0	54.4	8.2	L1	GND
0.246000	44.00	10.0	51.8	7.8	L1	GND
0.306000	45.20	10.0	50.0	4.8	L1	GND
0.366000	31.70	10.0	48.5	16.8	L1	GND
0.426000	25.70	10.0	47.3	21.6	N	GND
0.498000	28.10	10.0	46.0	17.9	L1	GND
0.582000	25.10	10.0	46.0	20.9	N	GND
0.666000	25.00	10.0	46.0	21.0	N	GND
0.732000	24.70	10.0	46.0	21.3	N	GND
0.912000	22.50	10.0	46.0	23.5	N	GND
1.338000	22.40	10.0	46.0	23.6	N	GND
1.824000	22.90	10.0	46.0	23.1	N	GND
3.954000	23.00	10.0	46.0	23.0	N	GND

**Conducted noise according to:  
EN 55022 class B**

EUT: DT6-D1127 / PIII 866 MHz (Scenic xB-1127)  
Manufacturer: Fujitsu Siemens Computers  
Operating Condition: Scroll "H" 1024\*768/100 Hz; HD/CD/Peripheral-Test  
Test Site: Fujitsu Siemens Augsburg (shielded room #2)  
Operator: C. Brummer  
Configuration: PSU: Astec E425  
Comment: Mains: 115 V<sub>AC</sub>; Monitorpower from peripheral device LISN  
Start of Test: 10.04.00 / 14:12:58

**SCAN TABLE: "Volt\_015-30fin"**

Unit: dB $\mu$ V

Detector:	Mode:
Curve 1: MaxPeak	MaxHold
Curve 2: Average	MaxHold


Subrange 1:

Start Frequency:	150.0 kHz	Step Size:	6.0 kHz
Stop Frequency:	30.0 MHz		
Measure Time:	10.0 ms		
IF Bandwidth:	10 kHz		

Receiver:	ESH3	Transducer:	ESH3-Z5
Signal Path:	None	System Transducer:	None
Meas. Mode:	Lin	Add. Transd. 1:	ESH3-Z2
Tracking Gen.:	Off	Add. Transd. 2:	None
Input:	--	Add. Transd. 3:	None

Preamplifier:	--	Demodulation:	A3
RF Att.:	0 dB	Volume:	--
Ref. Level:	--	Squelch:	--
Min. RF Att.:	--	Option:	None
IF Att.:	LowDistortion		
Autorange:	On		

Curve 1:	On	Repetition:	Single
Curve 2:	On	Stop Mark:	Off
		Stop Message:	Off
		Stop Message:	Off

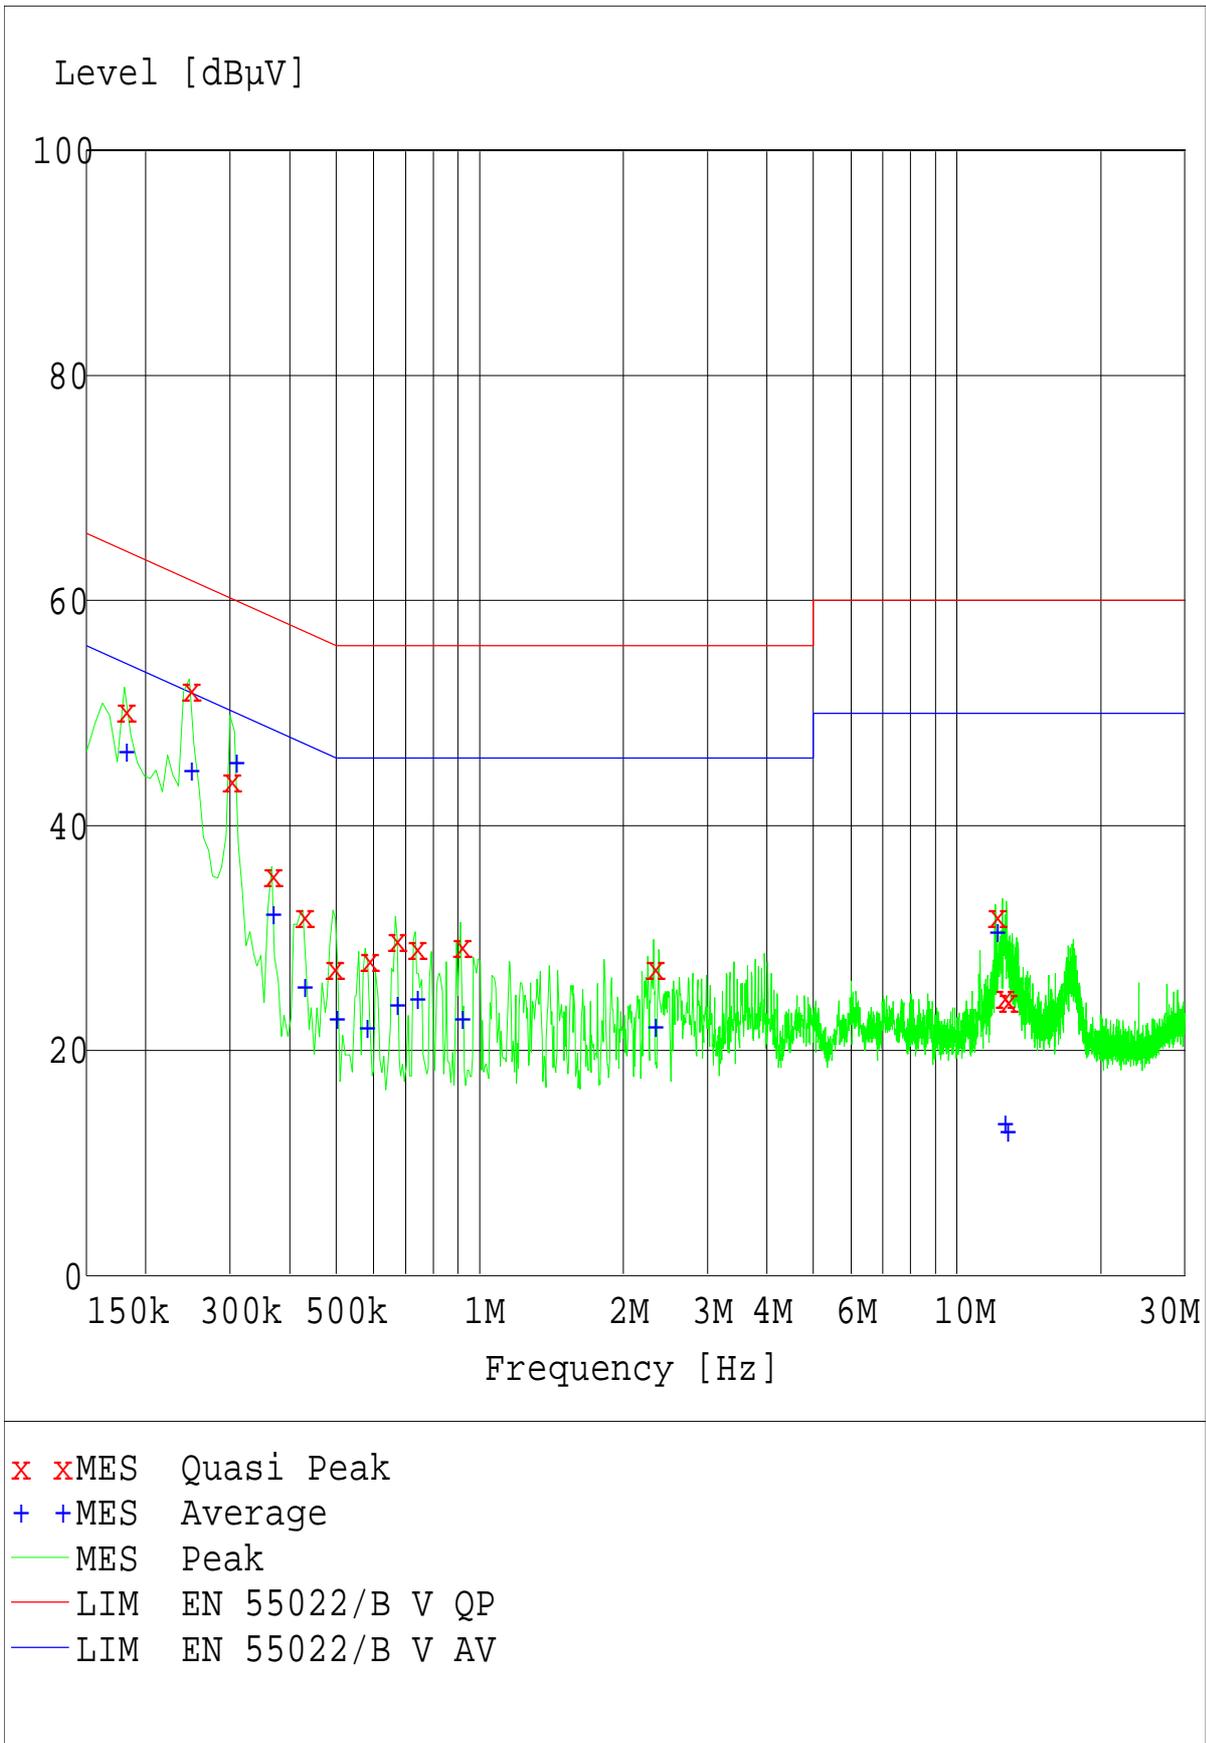

**MEASUREMENT RESULT: "Quasi Peak"**

10.04.00 14:37

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.180000	50.40	10.0	64.4	14.0	L1	GND
0.246000	52.10	10.0	61.8	9.7	L1	GND
0.300000	44.10	10.0	60.2	16.1	L1	GND
0.366000	35.70	10.0	58.5	22.8	N	GND
0.426000	32.10	10.0	57.3	25.2	N	GND
0.492000	27.40	10.0	56.1	28.7	N	GND
0.582000	28.20	10.0	56.0	27.8	N	GND
0.666000	29.90	10.0	56.0	26.1	N	GND
0.732000	29.20	10.0	56.0	26.8	N	GND
0.912000	29.40	10.0	56.0	26.6	N	GND
2.310000	27.40	10.0	56.0	28.6	N	GND
12.024000	32.00	10.0	60.0	28.0	N	GND
12.510000	24.90	10.0	60.0	35.1	L1	GND
12.672000	24.60	10.0	60.0	35.4	L1	GND

**MEASUREMENT RESULT: "Average"**

10.04.00 14:37

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.180000	46.70	10.0	54.4	7.7	L1	GND
0.246000	45.00	10.0	51.8	6.8	L1	GND
0.306000	45.70	10.0	50.0	4.3	L1	GND
0.366000	32.20	10.0	48.5	16.3	L1	GND
0.426000	25.80	10.0	47.3	21.5	L1	GND
0.498000	23.00	10.0	46.0	23.0	N	GND
0.576000	22.10	10.0	46.0	23.9	N	GND
0.666000	24.10	10.0	46.0	21.9	N	GND
0.732000	24.70	10.0	46.0	21.3	N	GND
0.912000	23.00	10.0	46.0	23.0	N	GND
2.310000	22.20	10.0	46.0	23.8	N	GND
12.024000	30.60	10.0	50.0	19.4	N	GND
12.504000	13.70	10.0	50.0	36.3	N	GND
12.636000	12.90	10.0	50.0	37.1	N	GND

**Conducted noise according to:  
EN 55022 class B**

EUT: DT6-D1127 / PIII 866 MHz (Scenic xB-1127)  
Manufacturer: Fujitsu Siemens Computers  
Operating Condition: Scroll "H" 1024x768/100 Hz; HD/CD/Peripheral-Test  
Test Site: Fujitsu Siemens Augsburg (shielded room #2)  
Operator: A. Luck  
Configuration: PSU: Minebea E425  
Comment: Mains: 115 V<sub>AC</sub>; Monitor power from peripheral device LISN  
Start of Test: 19.04.00 / 08:49:48

**SCAN TABLE: "Volt\_015-30fin"**

Unit: dB $\mu$ V

Detector:	Mode:
Curve 1: MaxPeak	MaxHold
Curve 2: Average	MaxHold


Subrange 1:

Start Frequency:	150.0 kHz	Step Size:	6.0 kHz
Stop Frequency:	30.0 MHz		
Measure Time:	10.0 ms		
IF Bandwidth:	10 kHz		

Receiver:	ESH3	Transducer:	ESH3-Z5
Signal Path:	None	System Transducer:	None
Meas. Mode:	Lin	Add. Transd. 1:	ESH3-Z2
Tracking Gen.:	Off	Add. Transd. 2:	None
Input:	--	Add. Transd. 3:	None

Preamplifier:	--	Demodulation:	A3
RF Att.:	0 dB	Volume:	--
Ref. Level:	--	Squelch:	--
Min. RF Att.:	--	Option:	None
IF Att.:	LowDistortion		
Autorange:	On		

Curve 1:	On	Repetition:	Single
Curve 2:	On	Stop Mark:	Off
		Stop Message:	Off
		Stop Message:	Off

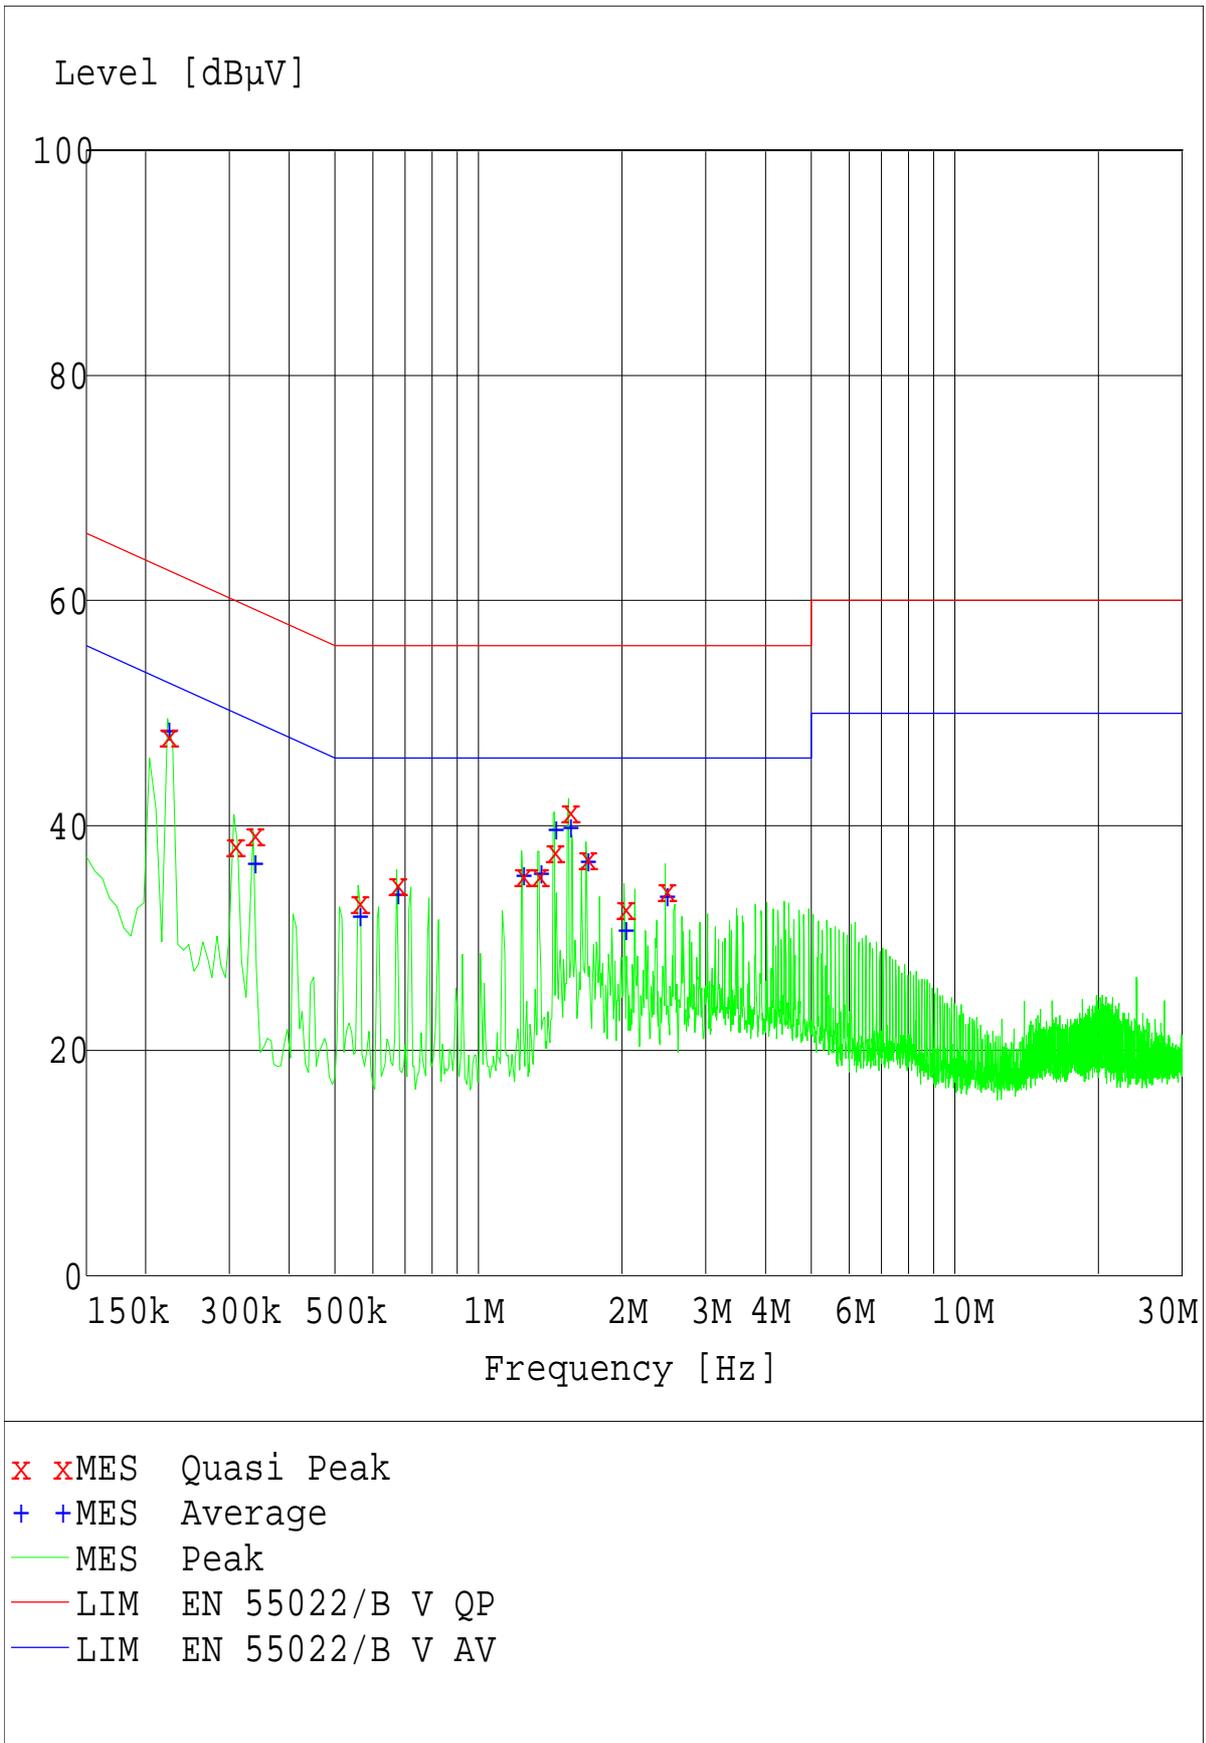



**MEASUREMENT RESULT: "Quasi Peak"**

19.04.00 09:15

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.222000	48.10	10.0	62.7	14.6	N	GND
0.306000	38.30	10.0	60.0	21.7	L1	GND
0.336000	39.30	10.0	59.3	20.0	N	GND
0.558000	33.30	10.0	56.0	22.7	N	GND
0.672000	34.90	10.0	56.0	21.1	N	GND
1.230000	35.70	10.0	56.0	20.2	N	GND
1.332000	35.70	10.0	56.0	20.2	N	GND
1.434000	37.80	10.0	56.0	18.2	L1	GND
1.542000	41.30	10.0	56.0	14.7	L1	GND
1.680000	37.20	10.0	56.0	18.7	N	GND
2.016000	32.80	10.0	56.0	23.2	N	GND
2.466000	34.40	10.0	56.0	21.6	L1	GND

**MEASUREMENT RESULT: "Average"**

19.04.00 09:15

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.222000	48.50	10.0	52.7	4.2	N	GND
0.336000	36.70	10.0	49.3	12.6	L1	GND
0.558000	32.00	10.0	46.0	14.0	N	GND
0.672000	34.00	10.0	46.0	12.0	N	GND
1.230000	35.70	10.0	46.0	10.2	N	GND
1.338000	35.90	10.0	46.0	10.1	L1	GND
1.440000	39.70	10.0	46.0	6.2	L1	GND
1.542000	40.00	10.0	46.0	6.0	L1	GND
1.680000	37.00	10.0	46.0	9.0	N	GND
2.016000	30.80	10.0	46.0	15.2	L1	GND
2.466000	33.90	10.0	46.0	12.1	L1	GND

**Conducted noise according to:  
EN 55022 class B**

EUT: DT6-D1127 / PIII 866 MHz (Scenic xB-1127)  
Manufacturer: Fujitsu Siemens Computers  
Operating Condition: Scroll "H" 1024x768/100 Hz; HD/CD/Peripheral-Test  
Test Site: Fujitsu Siemens Augsburg (shielded room #2)  
Operator: A. Luck  
Configuration: PSU: Minebea E425  
Comment: Mains: 115 V<sub>AC</sub>; Monitor power via EUT  
Start of Test: 19.04.00 / 09:17:37

**SCAN TABLE: "Volt\_015-30fin"**

Unit: dB $\mu$ V

Detector: Mode:

Curve 1: MaxPeak MaxHold  
Curve 2: Average MaxHold


Subrange 1:

Start Frequency: 150.0 kHz Step Size: 6.0 kHz  
Stop Frequency: 30.0 MHz  
Measure Time: 10.0 ms  
IF Bandwidth: 10 kHz

Receiver: ESH3 Transducer: ESH3-Z5  
Signal Path: None System Transducer: None  
Meas. Mode: Lin Add. Transd. 1: ESH3-Z2  
Tracking Gen.: Off Add. Transd. 2: None  
Input: -- Add. Transd. 3: None

Preamplifier: -- Demodulation: A3  
RF Att.: 0 dB Volume: --  
Ref. Level: -- Squelch: --  
Min. RF Att.: -- Option: None  
IF Att.: LowDistortion  
Autorange: On

Curve 1: On Repetition: Single  
Curve 2: On Stop Mark: Off  
Stop Message: Off  
Stop Message:

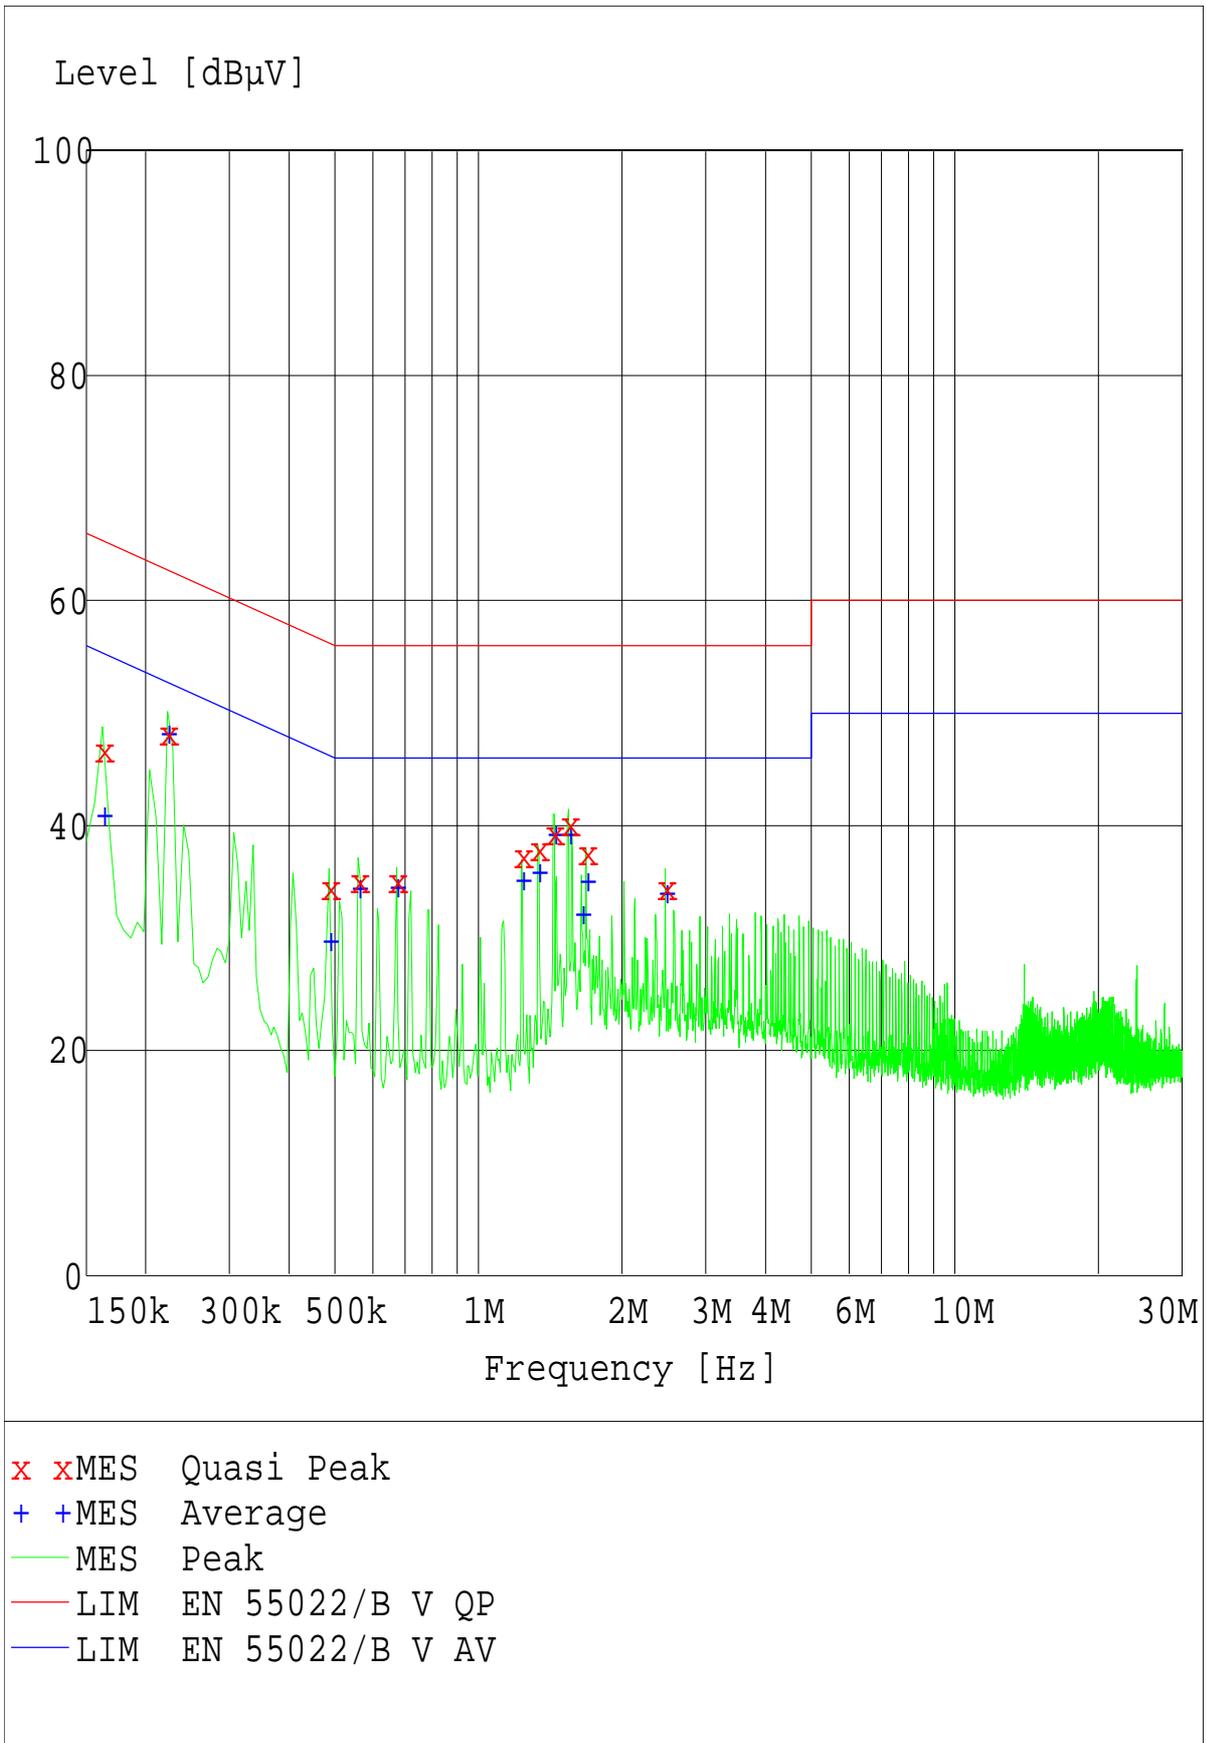

**MEASUREMENT RESULT: "Quasi Peak"**

19.04.00 09:41

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.162000	46.80	10.0	65.3	18.5	N	GND
0.222000	48.30	10.0	62.7	14.4	L1	GND
0.486000	34.50	10.0	56.2	21.7	N	GND
0.558000	35.20	10.0	56.0	20.7	N	GND
0.672000	35.20	10.0	56.0	20.7	N	GND
1.230000	37.40	10.0	56.0	18.6	L1	GND
1.332000	38.00	10.0	56.0	18.0	L1	GND
1.434000	39.40	10.0	56.0	16.6	L1	GND
1.542000	40.20	10.0	56.0	15.7	N	GND
1.680000	37.60	10.0	56.0	18.4	N	GND
2.466000	34.50	10.0	56.0	21.5	N	GND

**MEASUREMENT RESULT: "Average"**

19.04.00 09:41

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.162000	41.00	10.0	55.3	14.3	L1	GND
0.222000	48.30	10.0	52.7	4.4	L1	GND
0.486000	29.80	10.0	46.2	16.4	L1	GND
0.558000	34.50	10.0	46.0	11.5	N	GND
0.672000	34.60	10.0	46.0	11.3	N	GND
1.230000	35.30	10.0	46.0	10.7	L1	GND
1.332000	36.00	10.0	46.0	10.0	N	GND
1.440000	39.30	10.0	46.0	6.7	L1	GND
1.542000	39.30	10.0	46.0	6.7	L1	GND
1.644000	32.20	10.0	46.0	13.7	L1	GND
1.680000	35.20	10.0	46.0	10.7	N	GND
2.466000	34.10	10.0	46.0	11.8	N	GND

**Radiated emission according to:  
to EN55022 class B**

EUT: DT6-D1127 / PIII 866 MHz (Scenic xB-1127)  
Manufacturer: Fujitsu Siemens Computers  
Operating Condition: scroll "H" 1024x768/100 Hz; HD/CD/Peripheral-Test  
Test Site: Fujitsu Siemens Augsburg (10 m Semi Anechoic Chamber)  
Operator: A. Luck  
Configuration: Full configuration  
Comment: PSU: Astec E425  
Start of Test: 11.04.00 / 10:54:34

**SCAN TABLE: "10m/30-1000"**

Short Description: 10m Field Strength  
Unit: dBµV/m

Detector: Mode:

Curve 1: MaxPeak ClearWrite

Subrange 1:


Start Frequency: 30.0 MHz Step Size: 30.0 kHz  
Stop Frequency: 1.0 GHz  
Measure Time: 10.0 ms  
IF Bandwidth: 120 kHz

Receiver: ESXI Transducer: CBL6112 cal. 8/99  
Signal Path: 2DC-CP1X1 System Transducer: RFin2-CP1/X1  
Meas. Mode: Lin Add. Transd. 1: cable30-1000  
Tracking Gen.: Off Add. Transd. 2: None  
Input: 2DC Add. Transd. 3: None

Preamplifier: 10 dB Demodulation: AM  
RF Att.: Coupled Volume: 70 %  
Ref. Level: -60.0 dBm Squelch: --  
Min. RF Att.: 0 dB Option: None  
IF Att.: --  
Autorange: On

Curve 1: On Repetition: Single  
Stop Mark: Off  
Stop Message: Off  
Stop Message:

Level [dB $\mu$ V/m]

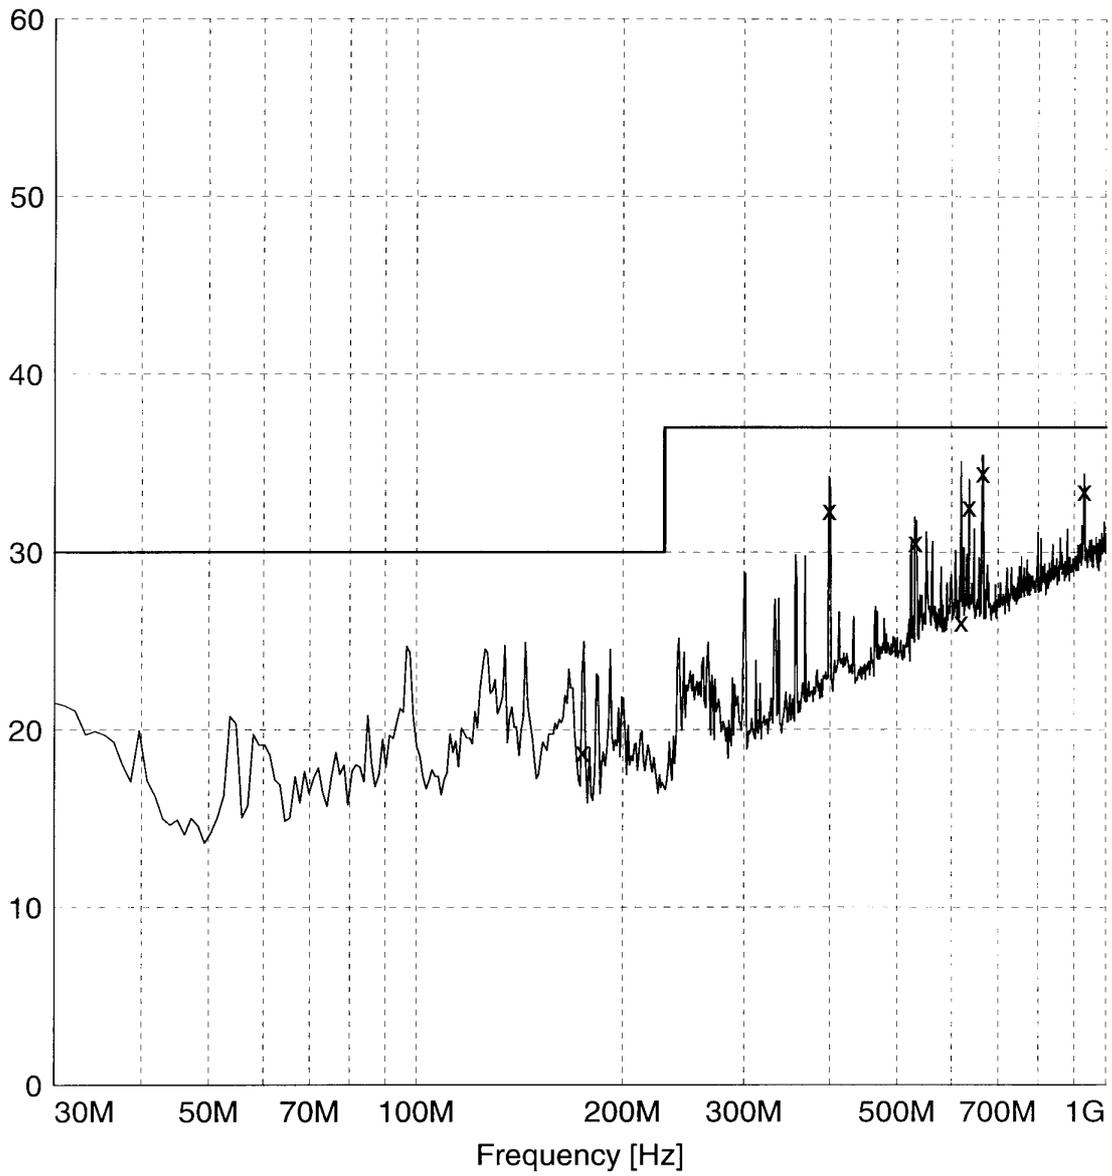

x x MES Quasi Peak  
— MES Preview Peak  
— LIM EN55022/B

**MEASUREMENT RESULT: "Quasi Peak"**

11.04.00 11:40

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
174.540000	18.80	10.2	30.0	11.2	100.0	59.00	VERTICAL
398.790000	32.40	17.9	37.0	4.6	220.0	330.00	HORIZONTAL
531.390000	30.60	19.9	37.0	6.4	100.0	90.00	VERTICAL
618.930000	26.10	21.4	37.0	10.9	280.0	0.00	VERTICAL
634.830000	32.60	21.6	37.0	4.4	280.0	210.00	VERTICAL
664.320000	33.80	21.7	37.0	3.2	280.0	0.00	VERTICAL
930.120000	33.50	23.8	37.0	3.5	100.0	0.00	HORIZONTAL

**Radiated emission according to:  
to FCC class B**

EUT: DT6-D1127 / PIII 866 MHz (Scenic xB-1127)  
Manufacturer: Fujitsu Siemens Computers  
Operating Condition: scroll "H" 1024x768/100 Hz; HD/CD/Peripheral-Test  
Test Site: Fujitsu Siemens Augsburg (10 m Semi Anechoic Chamber)  
Operator: M. Rothtaucher  
Configuration: Full configuration  
Comment: PSU: Astec E425  
Start of Test: 11.04.00 / 16:41:58

**SCAN TABLE: "FCC1-5GHz"**

Short Description: 3m Messung FCC 1 bis 5 GHz  
Unit: dBµV/m

Detector: Mode:

Curve 1: MaxPeak MaxHold  
Curve 2: Average MaxHold

Subrange 1:


Start Frequency: 1.0 GHz Step Size: 300.0 kHz  
Stop Frequency: 5.0 GHz  
Measure Time: 10.0 ms  
IF Bandwidth: 1 MHz

Receiver: ESXI Transducer: Tensor call2-99  
Signal Path: 2DC-CP7X1 System Transducer: RFin2-CP7/X1  
Meas. Mode: Lin Add. Transd. 1: Rosenberger 8m  
Tracking Gen.: Off Add. Transd. 2: None  
Input: 2DC Add. Transd. 3: None

Preamplifier: 10 dB Demodulation: AM  
RF Att.: Coupled Volume: 70 %  
Ref. Level: -40.0 dBm Squelch: --  
Min. RF Att.: 0 dB Option: None  
IF Att.: --  
Autorange: On

Curve 1: On Repetition: Single  
Curve 2: On Stop Mark: Off  
Stop Message: Off  
Stop Message:



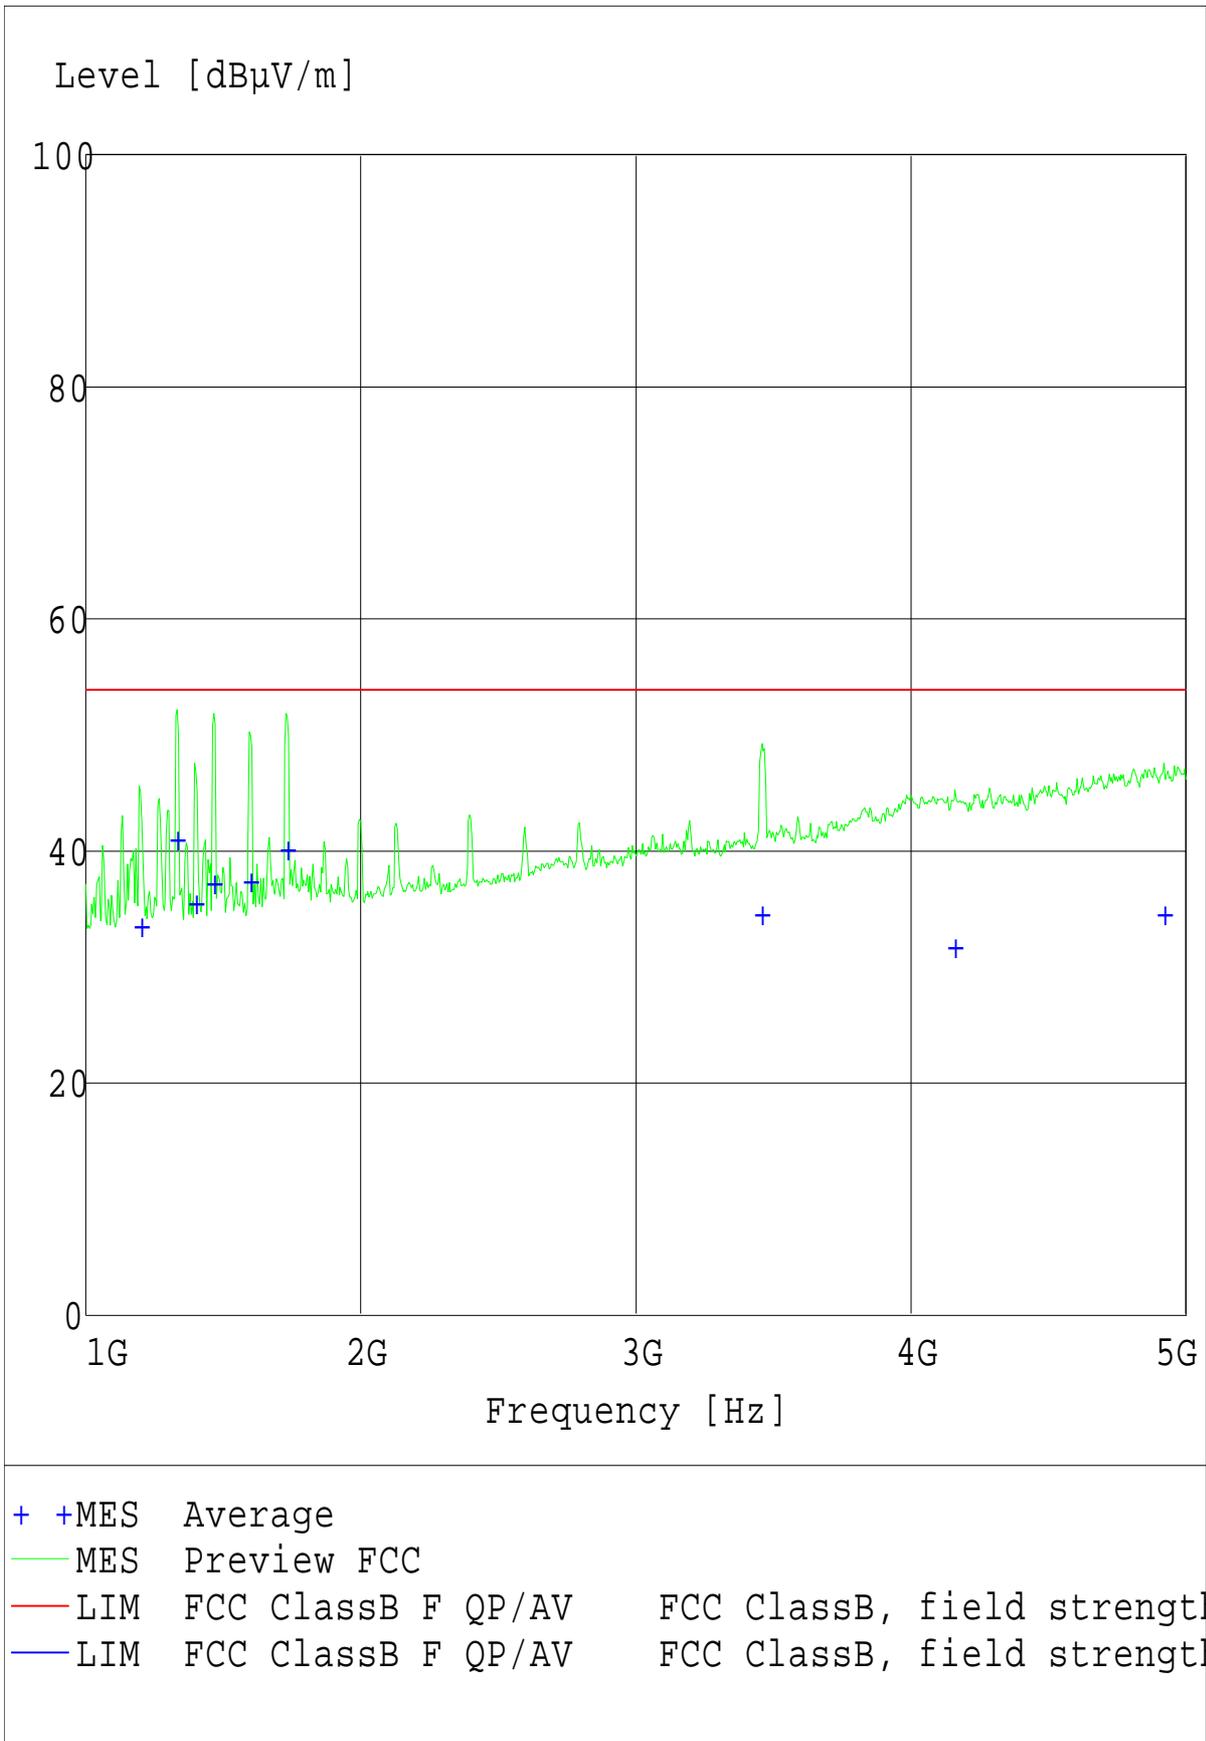

**MEASUREMENT RESULT: "Average"**

11.04.00 17:17

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
1195.900000	33.60	9.3	53.9	20.3	120.0	330.00	VERTICAL
1328.500000	41.10	9.5	53.9	12.8	120.0	330.00	VERTICAL
1395.100000	35.60	9.7	53.9	18.3	160.0	0.00	VERTICAL
1461.400000	37.30	9.6	53.9	16.6	100.0	0.00	VERTICAL
1594.300000	37.50	10.1	53.9	16.4	160.0	0.00	VERTICAL
1727.200000	40.20	11.6	53.9	13.7	120.0	330.00	VERTICAL
3454.300000	34.60	16.0	53.9	19.3	120.0	330.00	VERTICAL
4156.900000	31.80	18.8	53.9	22.1	100.0	270.00	HORIZONTAL
4914.700000	34.60	20.9	53.9	19.3	120.0	300.00	HORIZONTAL

**Radiated emission according to:  
to EN55022 class B**

EUT: DT6-D1127 / PIII 866 MHz (Scenic xB-1127)  
Manufacturer: Fujitsu Siemens Computers  
Operating Condition: scroll "H" 1024x768/100 Hz; HD/CD/Peripheral-Test  
Test Site: Fujitsu Siemens Augsburg (10 m Semi Anechoic Chamber)  
Operator: M. Heuser  
Configuration: Full configuration  
Comment: PSU: Minebea E425  
Start of Test: 18.04.00 / 16:41:06

**SCAN TABLE: "10m/30-1000"**

Short Description: 10m Field Strength  
Unit: dBµV/m

Detector: Mode:

Curve 1: MaxPeak ClearWrite

Subrange 1:


Start Frequency: 30.0 MHz Step Size: 30.0 kHz  
Stop Frequency: 1.0 GHz  
Measure Time: 10.0 ms  
IF Bandwidth: 120 kHz

Receiver: ESXI Transducer: CBL6112 cal. 8/99  
Signal Path: 2DC-CP1X1 System Transducer: RFin2-CP1/X1  
Meas. Mode: Lin Add. Transd. 1: cable30-1000  
Tracking Gen.: Off Add. Transd. 2: None  
Input: 2DC Add. Transd. 3: None

Preamplifier: 10 dB Demodulation: AM  
RF Att.: Coupled Volume: 70 %  
Ref. Level: -60.0 dBm Squelch: --  
Min. RF Att.: 0 dB Option: None  
IF Att.: --  
Autorange: On

Curve 1: On Repetition: Single  
Stop Mark: Off  
Stop Message: Off  
Stop Message:

Level [dB $\mu$ V/m]

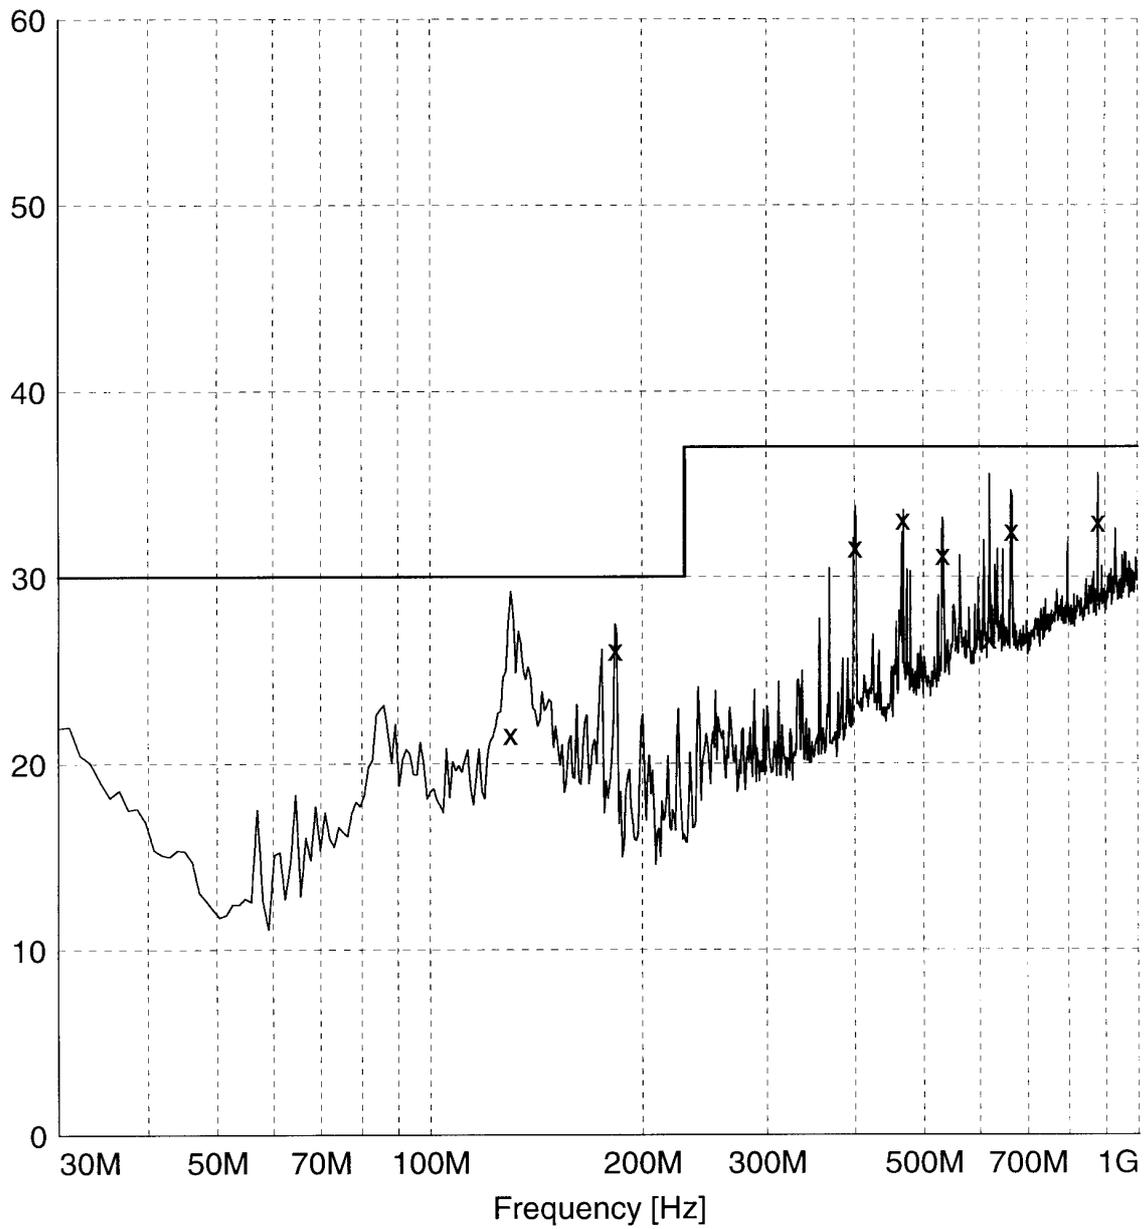

x x MES Quasi Peak  
— MES Preview Peak  
— LIM EN55022/B

**MEASUREMENT RESULT: "Quasi Peak"**

18.04.00 17:36

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
129.960000	21.60	12.3	30.0	8.4	100.0	119.00	VERTICAL
183.060000	26.10	9.9	30.0	3.9	400.0	330.00	HORIZONTAL
400.560000	31.60	18.0	37.0	5.4	200.0	29.00	HORIZONTAL
467.760000	33.10	19.2	37.0	3.9	300.0	330.00	VERTICAL
531.840000	31.20	20.0	37.0	5.8	300.0	330.00	VERTICAL
618.240000	26.70	21.4	37.0	10.3	200.0	29.00	VERTICAL
664.620000	32.50	21.7	37.0	4.5	100.0	119.00	HORIZONTAL
879.570000	33.00	23.4	37.0	4.0	200.0	180.00	VERTICAL

**Radiated emission according to:  
to FCC class B**

EUT: DT6-D1127 / PIII 866 MHz (Scenic xB-1127)  
Manufacturer: Fujitsu Siemens Computers  
Operating Condition: Scroll "H" 1024x768/100 Hz; HD/CD/Peripheral-Test  
Test Site: Fujitsu Siemens Augsburg (10 m Semi Anechoic Chamber)  
Operator: A. Peschka  
Configuration: Full configuration  
Comment: PSU: Minebea E425  
Start of Test: 27.04.00 / 13:16:51

**SCAN TABLE: "FCC1-5GHz"**

Short Description: 3m Messung FCC 1 bis 5 GHz  
Unit: dBµV/m

Detector: Mode:

Curve 1: MaxPeak MaxHold  
Curve 2: Average MaxHold


Subrange 1:

Start Frequency: 1.0 GHz Step Size: 300.0 kHz  
Stop Frequency: 5.0 GHz  
Measure Time: 10.0 ms  
IF Bandwidth: 1 MHz

Receiver: ESXI Transducer: Tensor call2-99  
Signal Path: 2DC-CP7X1 System Transducer: RFin2-CP7/X1  
Meas. Mode: Lin Add. Transd. 1: Rosenberger 8m  
Tracking Gen.: Off Add. Transd. 2: None  
Input: 2DC Add. Transd. 3: None

Preamplifier: 10 dB Demodulation: AM  
RF Att.: Coupled Volume: 70 %  
Ref. Level: -40.0 dBm Squelch: --  
Min. RF Att.: 0 dB Option: None  
IF Att.: --  
Autorange: On

Curve 1: On Repetition: Single  
Curve 2: On Stop Mark: Off  
Stop Message: Off  
Stop Message:

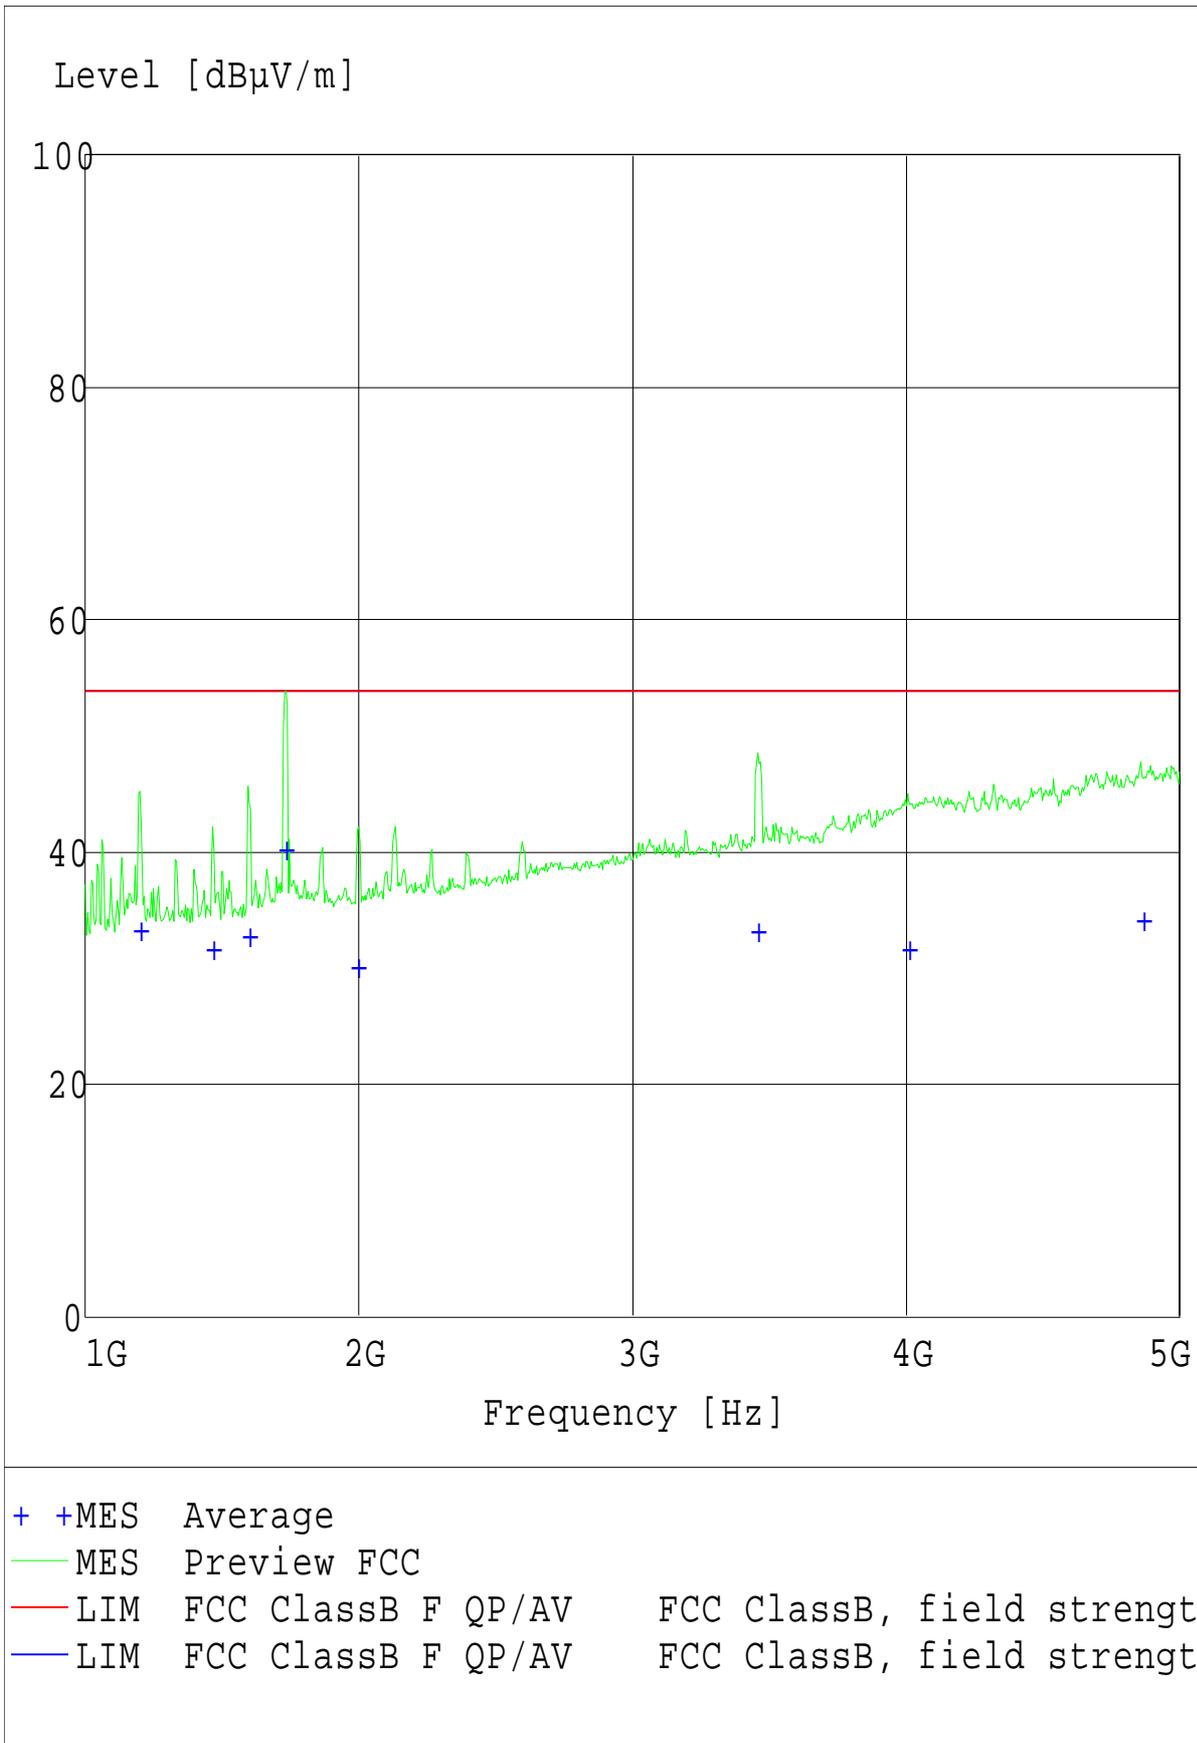

**MEASUREMENT RESULT: "Average"**

27.04.00 13:53

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
1195.900000	33.40	9.3	53.9	20.5	120.0	330.00	VERTICAL
1462.600000	31.80	9.6	53.9	22.1	100.0	0.00	VERTICAL
1594.300000	32.90	10.1	53.9	21.0	100.0	0.00	VERTICAL
1727.200000	40.30	11.6	53.9	13.6	160.0	0.00	VERTICAL
1993.000000	30.20	11.1	53.9	23.7	100.0	0.00	VERTICAL
3454.300000	33.30	16.0	53.9	20.6	180.0	29.00	VERTICAL
4006.300000	31.70	19.4	53.9	22.2	220.0	59.00	VERTICAL
4861.900000	34.20	20.9	53.9	19.7	180.0	180.00	HORIZONTAL