

**Conducted noise according to:
EN 55022 class B**

EUT: MT8-D1127 / PIII 933 MHz, (Scenic xL-1127)
Manufacturer: Fujitsu Siemens Computers
Operating Condition: scroll "H"; 1024x768/100Hz; HD/CD/Peripheral-Test
Test Site: Fujitsu Siemens Augsburg (shielded room #2)
Operator: M. Rothtaucher
Configuration: full configuration; PSU: Astec E427
Comment: Mains: 115 V_{AC}; Monitor power via EUT
Start of Test: 08.05.00 / 10:22:06

SCAN TABLE: "Volt_015-30fin"

Unit: dB μ V

	Detector:	Mode:
Curve 1:	MaxPeak	MaxHold
Curve 2:	Average	MaxHold


Subrange 1:

Start Frequency:	150.0 kHz	Step Size:	6.0 kHz
Stop Frequency:	30.0 MHz		
Measure Time:	10.0 ms		
IF Bandwidth:	10 kHz		

Receiver:	ESH3	Transducer:	ESH3-Z5
Signal Path:	None	System Transducer:	None
Meas. Mode:	Lin	Add. Transd. 1:	ESH3-Z2
Tracking Gen.:	Off	Add. Transd. 2:	None
Input:	--	Add. Transd. 3:	None

Preamplifier:	--	Demodulation:	A3
RF Att.:	0 dB	Volume:	--
Ref. Level:	--	Squelch:	--
Min. RF Att.:	--	Option:	None
IF Att.:	LowDistortion		
Autorange:	On		

Curve 1:	On	Repetition:	Single
Curve 2:	On	Stop Mark:	Off
		Stop Message:	Off
		Stop Message:	

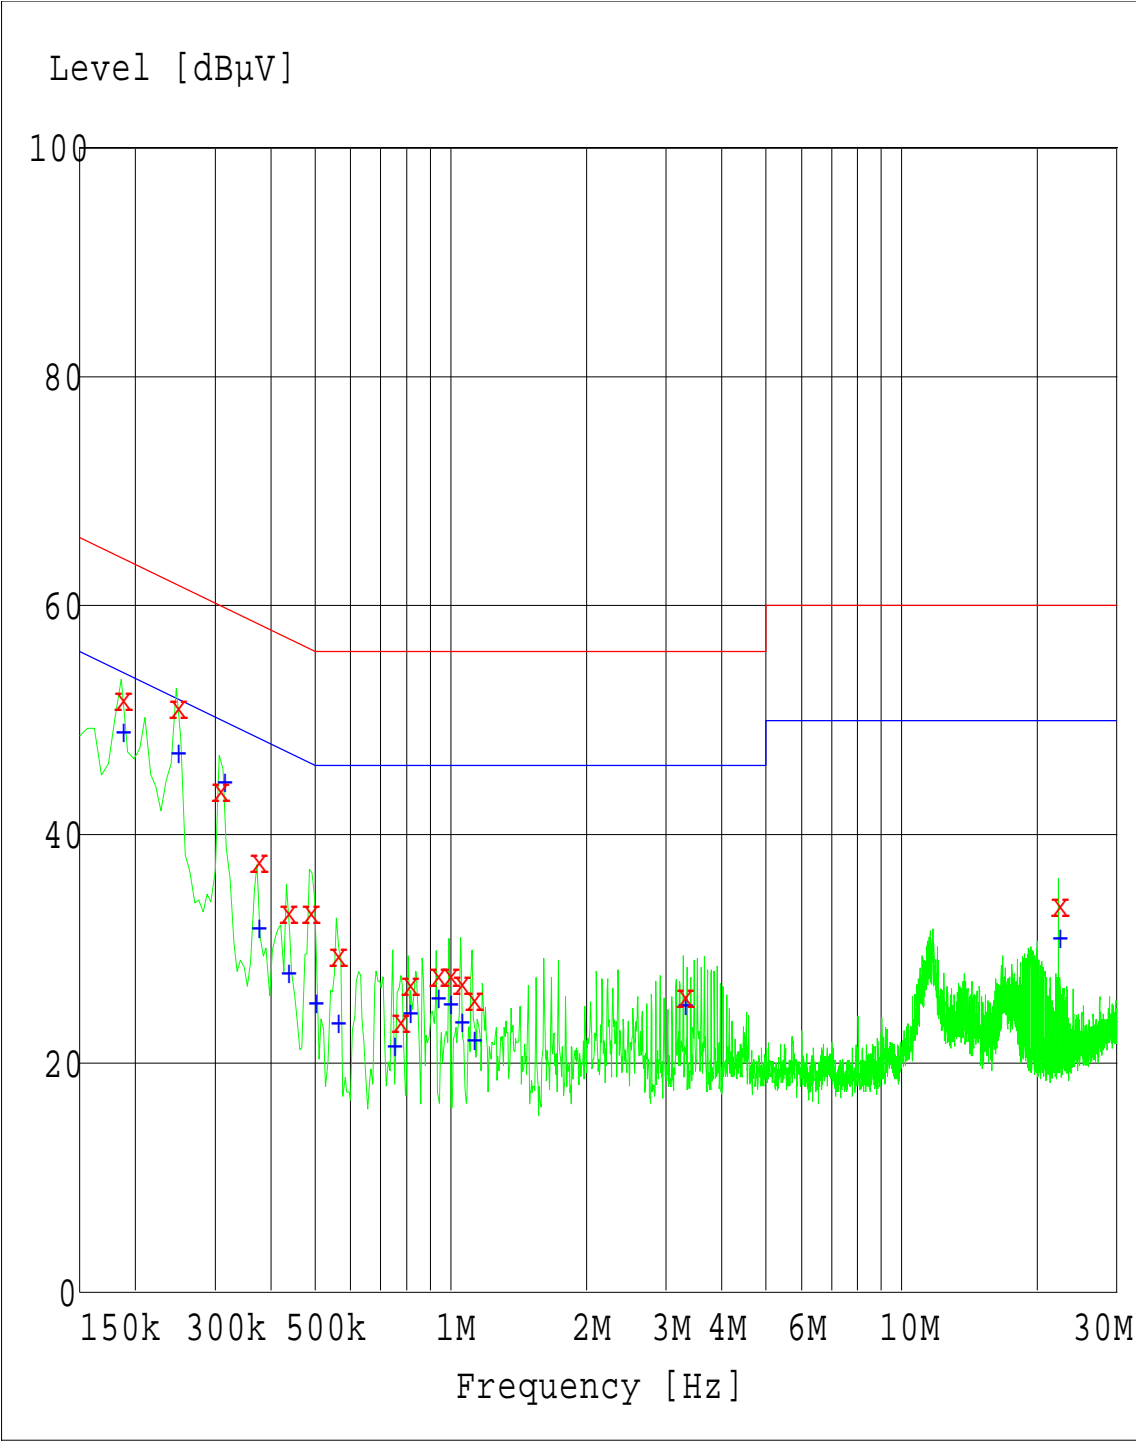

- x xMES Quasi Peak
- + +MES Average
- MES Peak
- LIM EN 55022/B V QP
- LIM EN 55022/B V AV

MEASUREMENT RESULT: "Quasi Peak"

08.05.00 10:46

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.186000	52.00	10.0	64.2	12.2	N	GND
0.246000	51.20	10.0	61.8	10.6	N	GND
0.306000	44.00	10.0	60.0	16.0	L1	GND
0.372000	37.80	10.0	58.4	20.6	L1	GND
0.432000	33.40	10.0	57.2	23.8	N	GND
0.486000	33.40	10.0	56.2	22.8	N	GND
0.558000	29.60	10.0	56.0	26.4	L1	GND
0.768000	23.80	10.0	56.0	32.2	L1	GND
0.804000	27.10	10.0	56.0	28.9	L1	GND
0.930000	27.80	10.0	56.0	28.2	N	GND
0.990000	27.80	10.0	56.0	28.2	N	GND
1.050000	27.20	10.0	56.0	28.8	L1	GND
1.116000	25.70	10.0	56.0	30.3	L1	GND
3.282000	26.00	10.0	56.0	30.0	L1	GND
22.260000	34.00	10.0	60.0	26.0	L1	GND

MEASUREMENT RESULT: "Average"

08.05.00 10:46

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.186000	49.10	10.0	54.2	5.1	N	GND
0.246000	47.30	10.0	51.8	4.5	N	GND
0.312000	44.80	10.0	49.9	5.1	N	GND
0.372000	31.90	10.0	48.4	16.5	N	GND
0.432000	28.00	10.0	47.2	19.2	L1	GND
0.498000	25.40	10.0	46.0	20.6	L1	GND
0.558000	23.60	10.0	46.0	22.4	L1	GND
0.744000	21.60	10.0	46.0	24.4	L1	GND
0.804000	24.50	10.0	46.0	21.5	L1	GND
0.930000	25.80	10.0	46.0	20.2	L1	GND
0.990000	25.30	10.0	46.0	20.7	L1	GND
1.050000	23.70	10.0	46.0	22.3	L1	GND
1.116000	22.10	10.0	46.0	23.9	L1	GND
3.282000	25.20	10.0	46.0	20.8	L1	GND
22.260000	31.10	10.0	50.0	18.9	L1	GND

**Conducted noise according to:
EN 55022 class B**

EUT: MT8-D1127 / PIII 933 MHz (Scenic xL-1127)
Manufacturer: Fujitsu Siemens Computers
Operating Condition: scroll "H"; 1024x768/100 Hz; HD/CD/Peripheral-Test
Test Site: Fujitsu Siemens Augsburg (shielded room #2)
Operator: M. Rothtauscher
Configuration: full configuration; PSU: Astec E427
Comment: Mains: 115 V_{AC}; Monitor power from peripheral device LISN
Start of Test: 08.05.00 / 09:46:08

SCAN TABLE: "Volt_015-30fin"

Unit: dB_μV

	Detector:	Mode:
Curve 1:	MaxPeak	MaxHold
Curve 2:	Average	MaxHold


Subrange 1:

Start Frequency:	150.0 kHz	Step Size:	6.0 kHz
Stop Frequency:	30.0 MHz		
Measure Time:	10.0 ms		
IF Bandwidth:	10 kHz		

Receiver:	ESH3	Transducer:	ESH3-Z5
Signal Path:	None	System Transducer:	None
Meas. Mode:	Lin	Add. Transd. 1:	ESH3-Z2
Tracking Gen.:	Off	Add. Transd. 2:	None
Input:	--	Add. Transd. 3:	None

Preamplifier:	--	Demodulation:	A3
RF Att.:	0 dB	Volume:	--
Ref. Level:	--	Squelch:	--
Min. RF Att.:	--	Option:	None
IF Att.:	LowDistortion		
Autorange:	On		

Curve 1:	On	Repetition:	Single
Curve 2:	On	Stop Mark:	Off
		Stop Message:	Off
		Stop Message:	

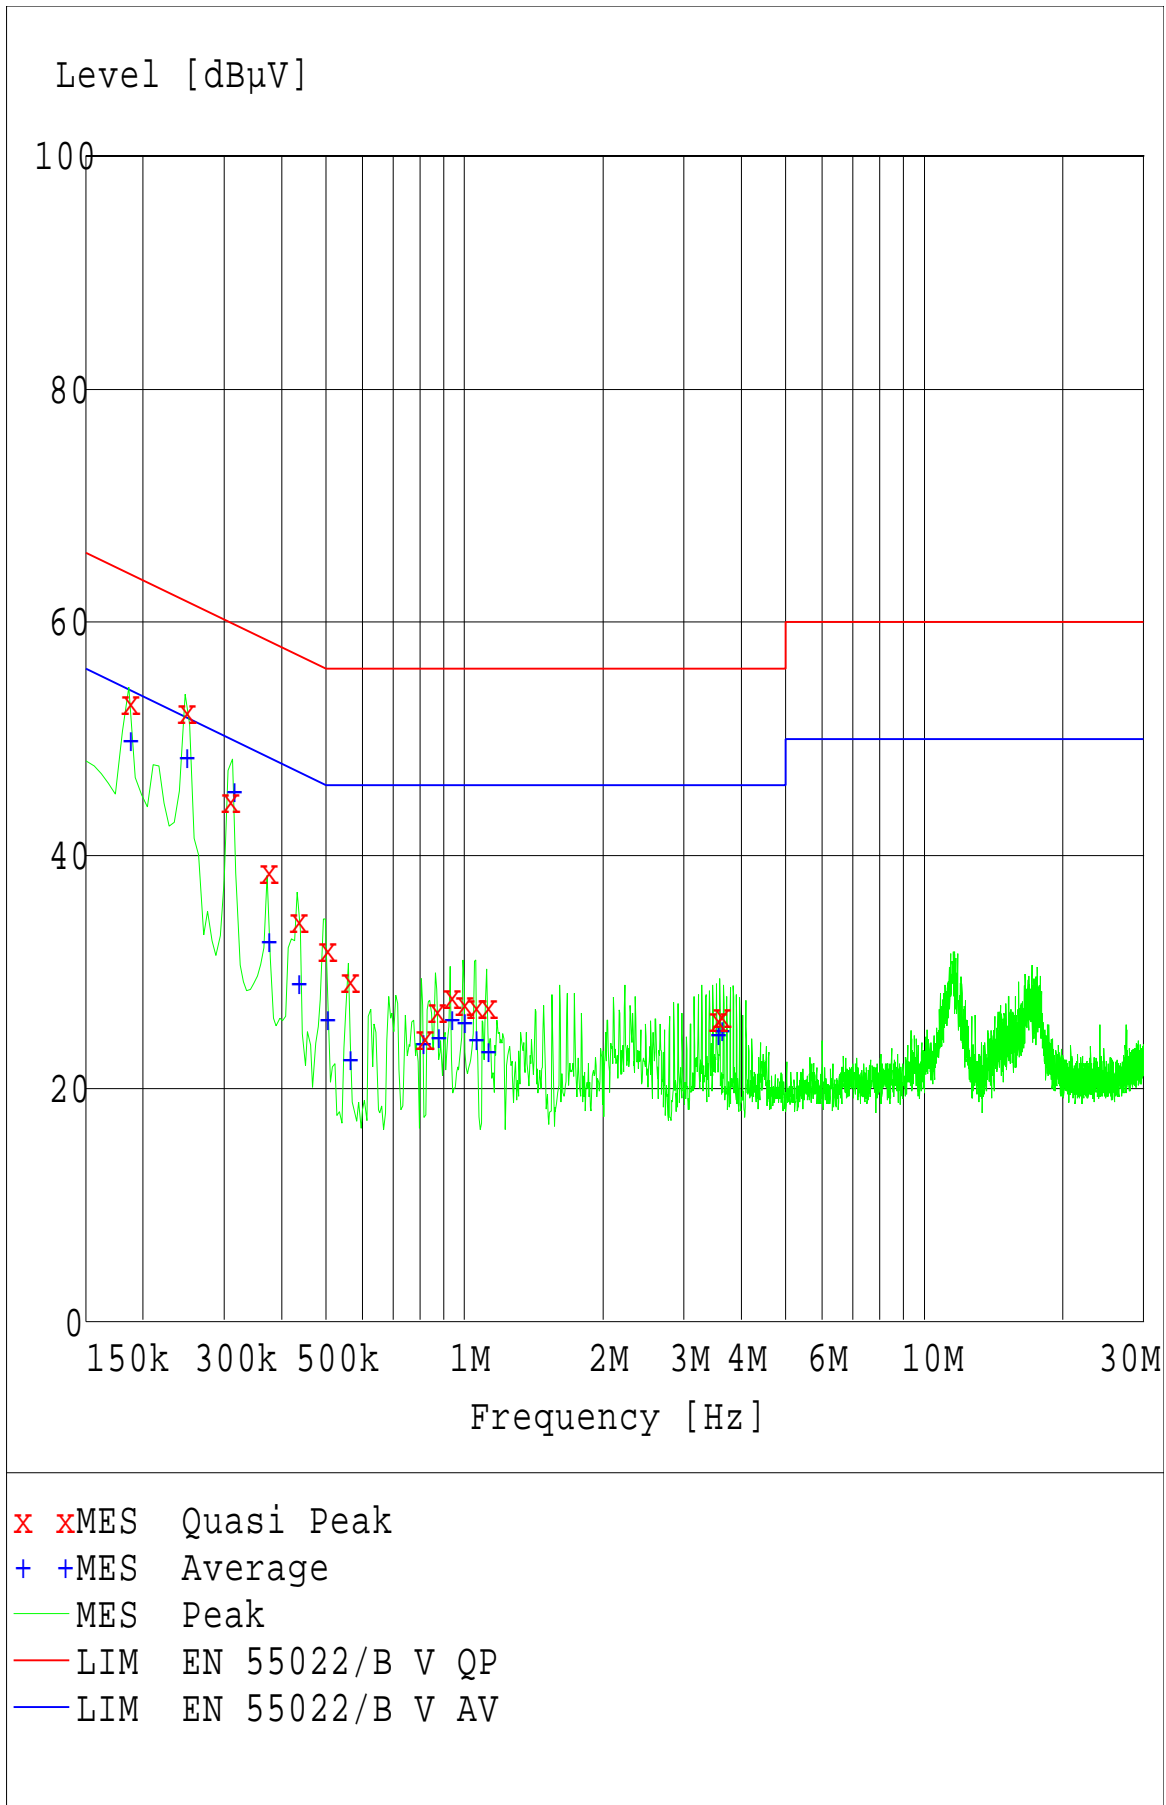

MEASUREMENT RESULT: "Quasi Peak"

08.05.00 10:11

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.186000	53.20	10.0	64.2	11.0	N	GND
0.246000	52.50	10.0	61.8	9.3	N	GND
0.306000	44.80	10.0	60.0	15.2	L1	GND
0.372000	38.70	10.0	58.4	19.7	L1	GND
0.432000	34.50	10.0	57.2	22.7	L1	GND
0.498000	32.00	10.0	56.0	24.0	L1	GND
0.558000	29.30	10.0	56.0	26.7	L1	GND
0.810000	24.50	10.0	56.0	31.5	L1	GND
0.864000	26.80	10.0	56.0	29.2	L1	GND
0.930000	28.00	10.0	56.0	28.0	L1	GND
0.990000	27.40	10.0	56.0	28.6	L1	GND
1.050000	27.20	10.0	56.0	28.8	L1	GND
1.116000	27.20	10.0	56.0	28.8	L1	GND
3.528000	26.00	10.0	56.0	30.0	L1	GND
3.594000	26.40	10.0	56.0	29.6	L1	GND

MEASUREMENT RESULT: "Average"

08.05.00 10:11

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.186000	50.00	10.0	54.2	4.2	N	GND
0.246000	48.50	10.0	51.8	3.3	N	GND
0.312000	45.60	10.0	49.9	4.3	N	GND
0.372000	32.80	10.0	48.4	15.6	N	GND
0.432000	29.10	10.0	47.2	18.1	L1	GND
0.498000	26.00	10.0	46.0	20.0	L1	GND
0.558000	22.60	10.0	46.0	23.4	L1	GND
0.804000	24.00	10.0	46.0	22.0	L1	GND
0.870000	24.50	10.0	46.0	21.5	L1	GND
0.930000	26.00	10.0	46.0	20.0	L1	GND
0.990000	25.70	10.0	46.0	20.3	L1	GND
1.050000	24.30	10.0	46.0	21.7	L1	GND
1.116000	23.30	10.0	46.0	22.7	L1	GND
3.528000	24.70	10.0	46.0	21.3	L1	GND
3.594000	25.10	10.0	46.0	20.9	L1	GND

**Conducted noise according to:
EN 55022 class B**

EUT: MT8-D1127 / PIII 933 MHz (Scenic xL-1127)
Manufacturer: Fujitsu Siemens Computers
Operating Condition: scroll "H"; 1024x768/100 Hz; HD/CD/Peripheral-Test
Test Site: Fujitsu Siemens Augsburg (shielded room #2)
Operator: M. Rothtaucher
Configuration: full configuration; PSU: Minebea E427
Comment: Mains: 115 V_{AC}; Monitor power via EUT
Start of Test: 05.05.00 / 13:41:43

SCAN TABLE: "Volt_015-30fin"

Unit: dB μ V

	Detector:	Mode:
Curve 1:	MaxPeak	MaxHold
Curve 2:	Average	MaxHold


Subrange 1:

Start Frequency:	150.0 kHz	Step Size:	6.0 kHz
Stop Frequency:	30.0 MHz		
Measure Time:	10.0 ms		
IF Bandwidth:	10 kHz		

Receiver:	ESH3	Transducer:	ESH3-Z5
Signal Path:	None	System Transducer:	None
Meas. Mode:	Lin	Add. Transd. 1:	ESH3-Z2
Tracking Gen.:	Off	Add. Transd. 2:	None
Input:	--	Add. Transd. 3:	None

Preamplifier:	--	Demodulation:	A3
RF Att.:	0 dB	Volume:	--
Ref. Level:	--	Squelch:	--
Min. RF Att.:	--	Option:	None
IF Att.:	LowDistortion		
Autorange:	On		

Curve 1:	On	Repetition:	Single
Curve 2:	On	Stop Mark:	Off
		Stop Message:	Off
		Stop Message:	

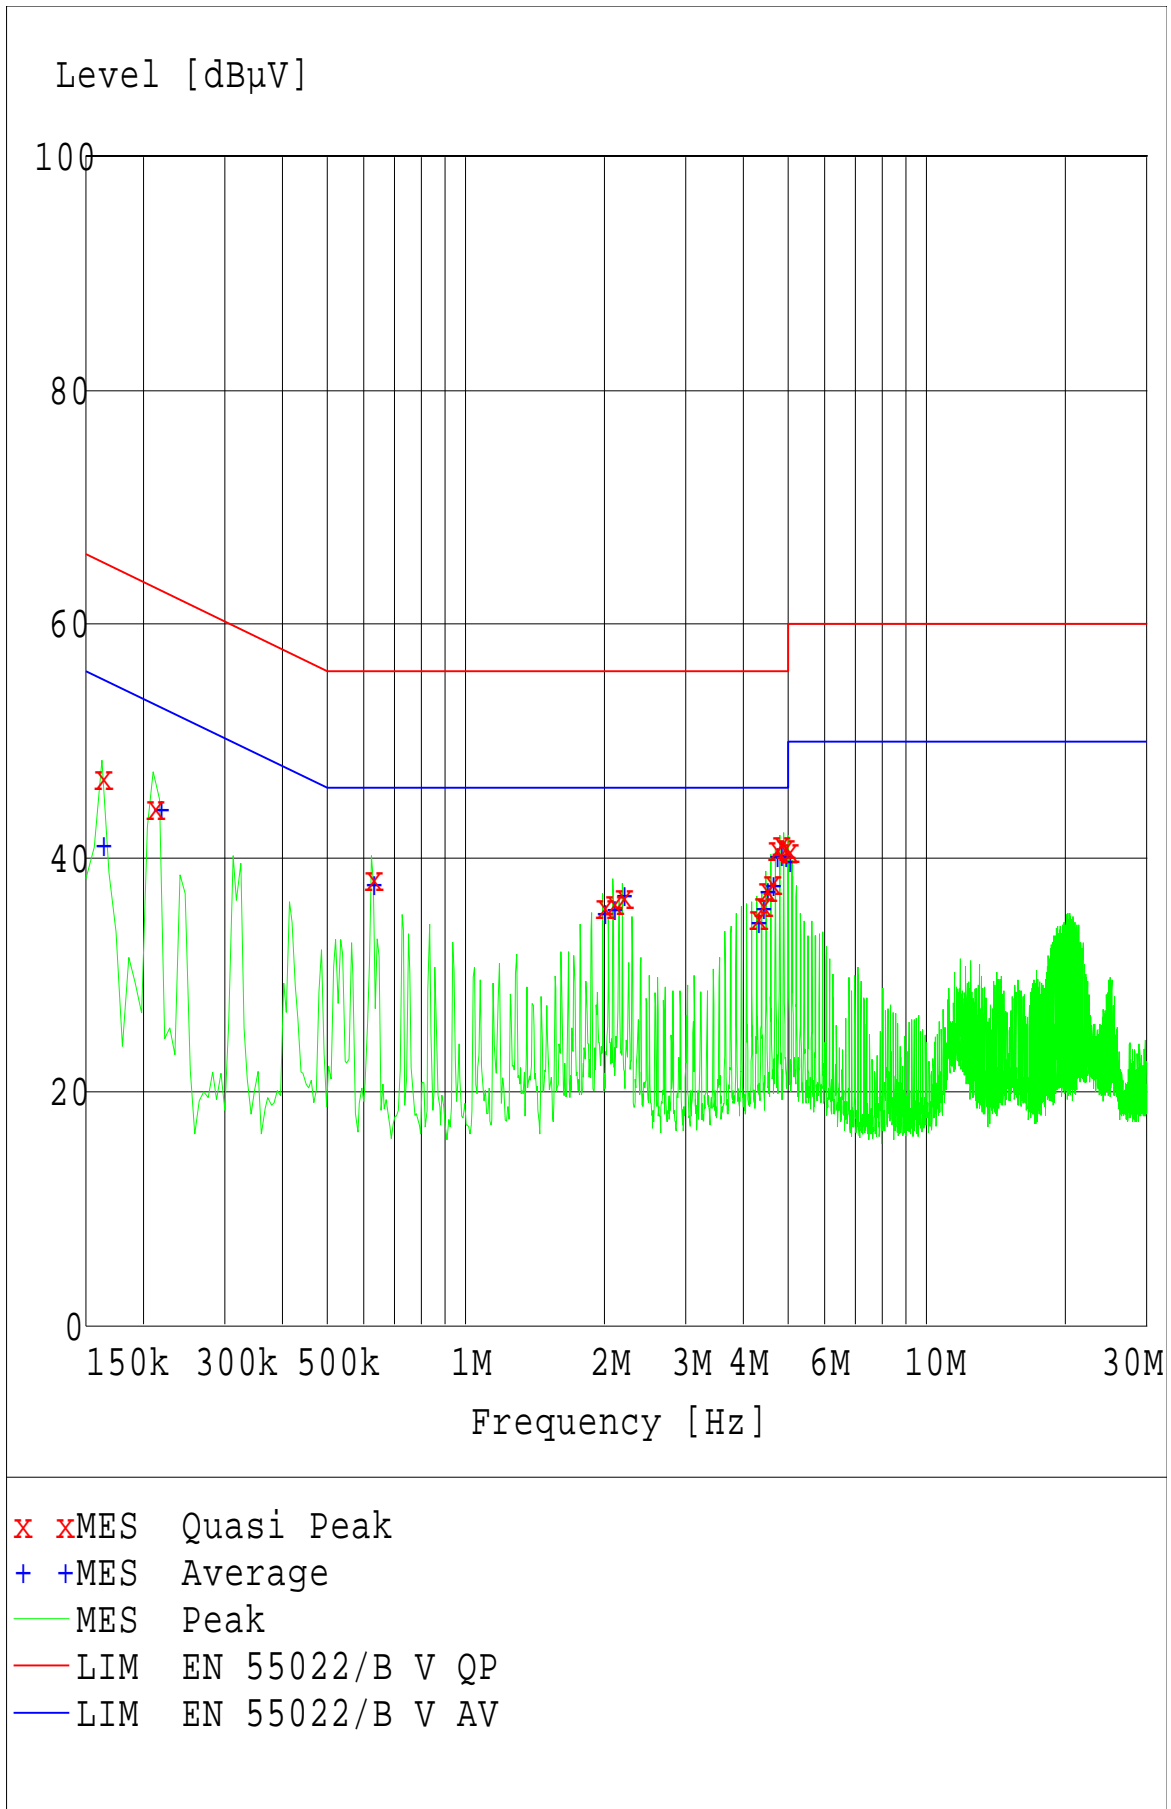

MEASUREMENT RESULT: "Quasi Peak"

05.05.00 14:06

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.162000	46.90	10.0	65.3	18.4	N	GND
0.210000	44.40	10.0	63.2	18.8	N	GND
0.624000	38.30	10.0	56.0	17.7	L1	GND
1.980000	36.00	10.0	56.0	20.0	L1	GND
2.082000	36.30	10.0	56.0	19.7	L1	GND
2.190000	36.80	10.0	56.0	19.2	L1	GND
4.272000	35.00	10.0	56.0	21.0	L1	GND
4.380000	36.10	10.0	56.0	19.9	L1	GND
4.482000	37.40	10.0	56.0	18.6	L1	GND
4.584000	38.00	10.0	56.0	18.0	L1	GND
4.692000	40.90	10.0	56.0	15.1	L1	GND
4.794000	41.30	10.0	56.0	14.7	L1	GND
4.902000	41.10	10.0	56.0	14.9	L1	GND
5.004000	40.70	10.0	60.0	19.2	L1	GND

MEASUREMENT RESULT: "Average"

05.05.00 14:06

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.162000	41.20	10.0	55.3	14.1	L1	GND
0.216000	44.30	10.0	52.9	8.6	N	GND
0.624000	37.80	10.0	46.0	8.2	L1	GND
1.980000	35.40	10.0	46.0	10.6	L1	GND
2.082000	35.70	10.0	46.0	10.2	L1	GND
2.190000	36.90	10.0	46.0	9.1	N	GND
4.272000	34.60	10.0	46.0	11.3	L1	GND
4.380000	35.80	10.0	46.0	10.2	L1	GND
4.482000	37.30	10.0	46.0	8.7	L1	GND
4.590000	37.70	10.0	46.0	8.2	L1	GND
4.692000	40.20	10.0	46.0	5.7	L1	GND
4.794000	40.30	10.0	46.0	5.7	L1	GND
4.902000	40.20	10.0	46.0	5.7	L1	GND
5.004000	39.80	10.0	50.0	10.2	L1	GND

**Conducted noise according to:
EN 55022 class B**

EUT: MT8-D1127 / PIII 933 MHz (Scenic xL-1127)
Manufacturer: Fujitsu Siemens Computers
Operating Condition: scroll "H"; 1024x768/100 Hz; HD/CD/Peripheral-Test
Test Site: Fujitsu Siemens Augsburg (shielded room #2)
Operator: M. Rothtauscher
Configuration: full configuration; PSU: Minebea E427
Comment: Mains: 115 V_{AC}; Monitor power from peripheral device LISN
Start of Test: 05.05.00 / 12:19:24

SCAN TABLE: "Volt_015-30fin"

Unit: dB μ V

	Detector:	Mode:
Curve 1:	MaxPeak	MaxHold
Curve 2:	Average	MaxHold


Subrange 1:

Start Frequency:	150.0 kHz	Step Size:	6.0 kHz
Stop Frequency:	30.0 MHz		
Measure Time:	10.0 ms		
IF Bandwidth:	10 kHz		

Receiver:	ESH3	Transducer:	ESH3-Z5
Signal Path:	None	System Transducer:	None
Meas. Mode:	Lin	Add. Transd. 1:	ESH3-Z2
Tracking Gen.:	Off	Add. Transd. 2:	None
Input:	--	Add. Transd. 3:	None

Preamplifier:	--	Demodulation:	A3
RF Att.:	0 dB	Volume:	--
Ref. Level:	--	Squelch:	--
Min. RF Att.:	--	Option:	None
IF Att.:	LowDistortion		
Autorange:	On		

Curve 1:	On	Repetition:	Single
Curve 2:	On	Stop Mark:	Off
		Stop Message:	Off
		Stop Message:	

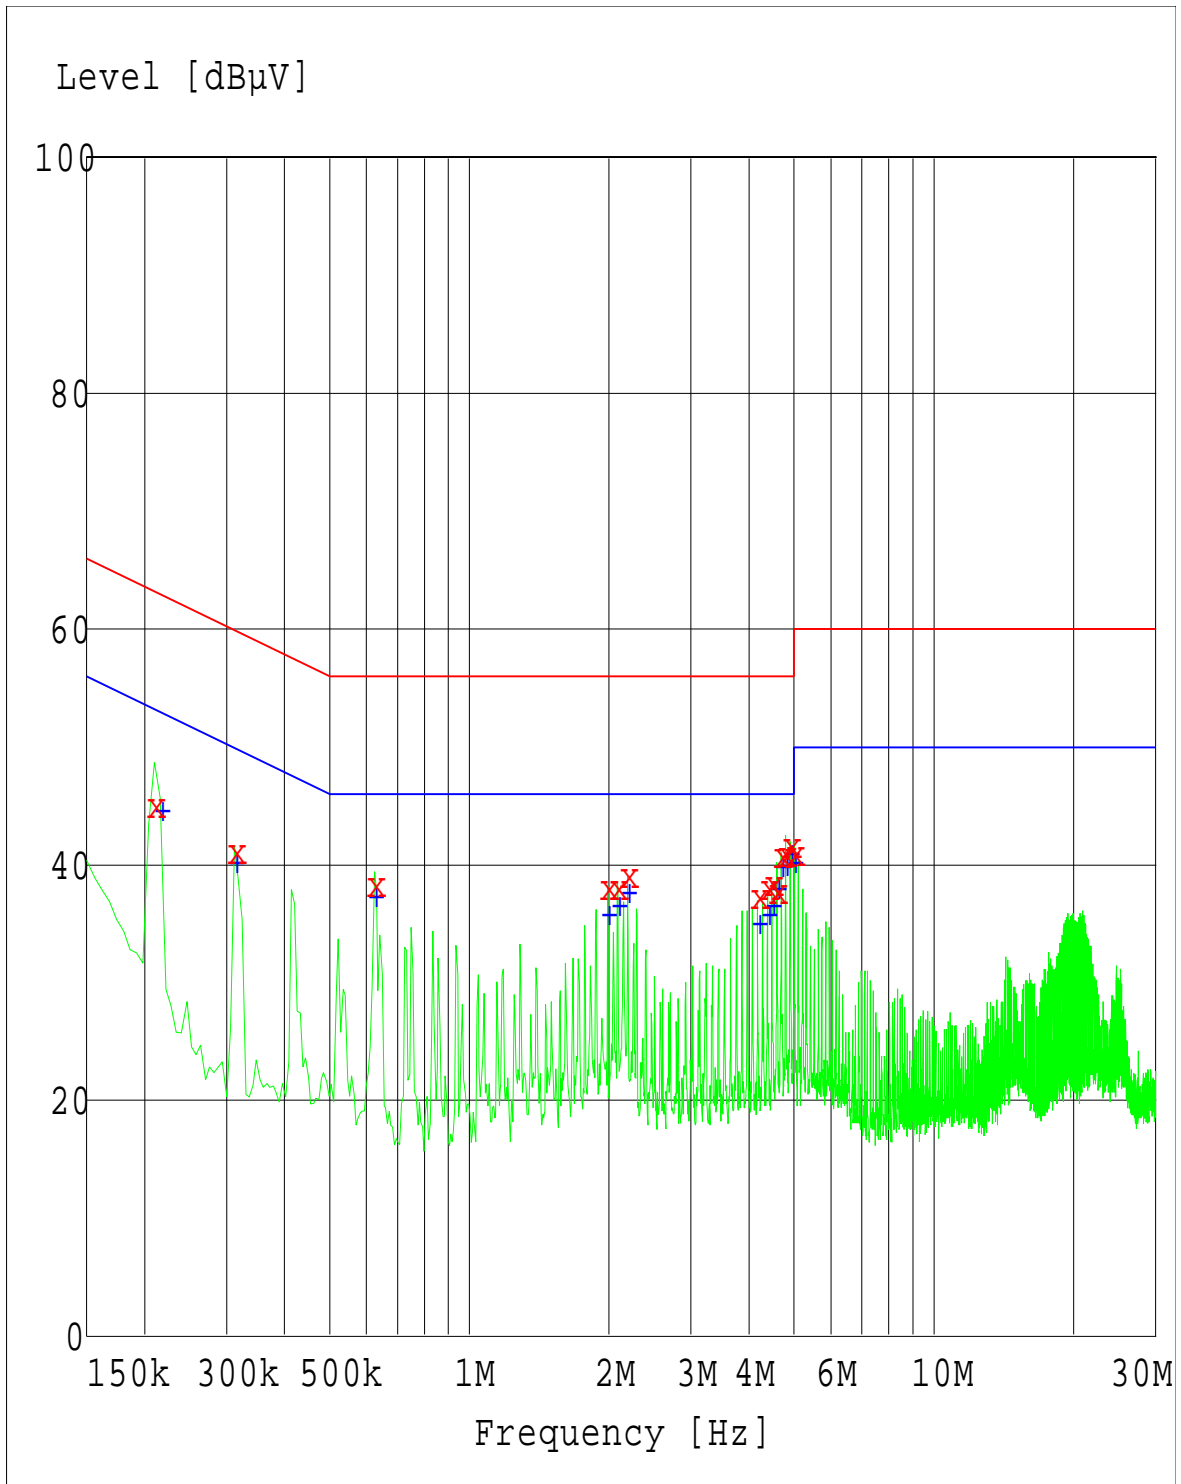

x xMES Quasi Peak
 + +MES Average
 — MES Peak
 — LIM EN 55022/B V QP
 — LIM EN 55022/B V AV

MEASUREMENT RESULT: "Quasi Peak"

05.05.00 12:43

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.210000	45.10	10.0	63.2	18.1	N	GND
0.312000	41.20	10.0	59.9	18.7	N	GND
0.624000	38.50	10.0	56.0	17.5	N	GND
1.980000	38.20	10.0	56.0	17.7	L1	GND
2.082000	38.20	10.0	56.0	17.7	L1	GND
2.190000	39.20	10.0	56.0	16.7	N	GND
4.170000	37.40	10.0	56.0	18.6	L1	GND
4.380000	38.20	10.0	56.0	17.7	L1	GND
4.482000	38.60	10.0	56.0	17.4	L1	GND
4.584000	37.90	10.0	56.0	18.1	L1	GND
4.692000	40.90	10.0	56.0	15.1	L1	GND
4.794000	41.00	10.0	56.0	15.0	L1	GND
4.902000	41.80	10.0	56.0	14.2	L1	GND
5.004000	41.10	10.0	60.0	18.9	L1	GND

MEASUREMENT RESULT: "Average"

05.05.00 12:43

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.216000	44.80	10.0	52.9	8.1	N	GND
0.312000	40.30	10.0	49.9	9.6	N	GND
0.624000	37.50	10.0	46.0	8.5	L1	GND
1.980000	35.90	10.0	46.0	10.1	L1	GND
2.088000	36.60	10.0	46.0	9.3	L1	GND
2.190000	37.80	10.0	46.0	8.2	N	GND
4.170000	35.20	10.0	46.0	10.7	L1	GND
4.380000	36.00	10.0	46.0	10.0	L1	GND
4.482000	36.60	10.0	46.0	9.3	L1	GND
4.590000	38.10	10.0	46.0	7.8	L1	GND
4.692000	40.00	10.0	46.0	6.0	L1	GND
4.794000	40.10	10.0	46.0	5.8	L1	GND
4.902000	41.10	10.0	46.0	4.8	L1	GND
5.004000	40.30	10.0	50.0	9.7	L1	GND

**Radiated emission according to:
to EN55022 class B**

EUT: MT8-D1127 / PIII 933 MHz (Scenic xL-1127)
Manufacturer: Fujitsu Siemens Computers
Operating Condition: Scroll "H" 1024x768/100 Hz; HD/CD/Peripheral-Test
Test Site: Fujitsu Siemens Augsburg (10 m Semi Anechoic Chamber)
Operator: A. Luck
Configuration: Full configuration
Comment: PSU: Astec E427
Start of Test: 02.05.00 / 13:17:49

SCAN TABLE: "10m/30-1000"

Short Description: 10m Field Strength
Unit: dBµV/m

Detector: Mode:

Curve 1: MaxPeak ClearWrite


Subrange 1:

Start Frequency: 30.0 MHz Step Size: 30.0 kHz
Stop Frequency: 1.0 GHz
Measure Time: 10.0 ms
IF Bandwidth: 120 kHz

Receiver: ESXI Transducer: CBL6112 cal. 8/99
Signal Path: 2DC-CP1X1 System Transducer: RFin2-CP1/X1
Meas. Mode: Lin Add. Transd. 1: cable30-1000
Tracking Gen.: Off Add. Transd. 2: None
Input: 2DC Add. Transd. 3: None

Preamplifier: 10 dB Demodulation: AM
RF Att.: Coupled Volume: 70 %
Ref. Level: -60.0 dBm Squelch: --
Min. RF Att.: 0 dB Option: None
IF Att.: --
Autorange: On

Curve 1: On Repetition: Single
Stop Mark: Off
Stop Message: Off
Stop Message:

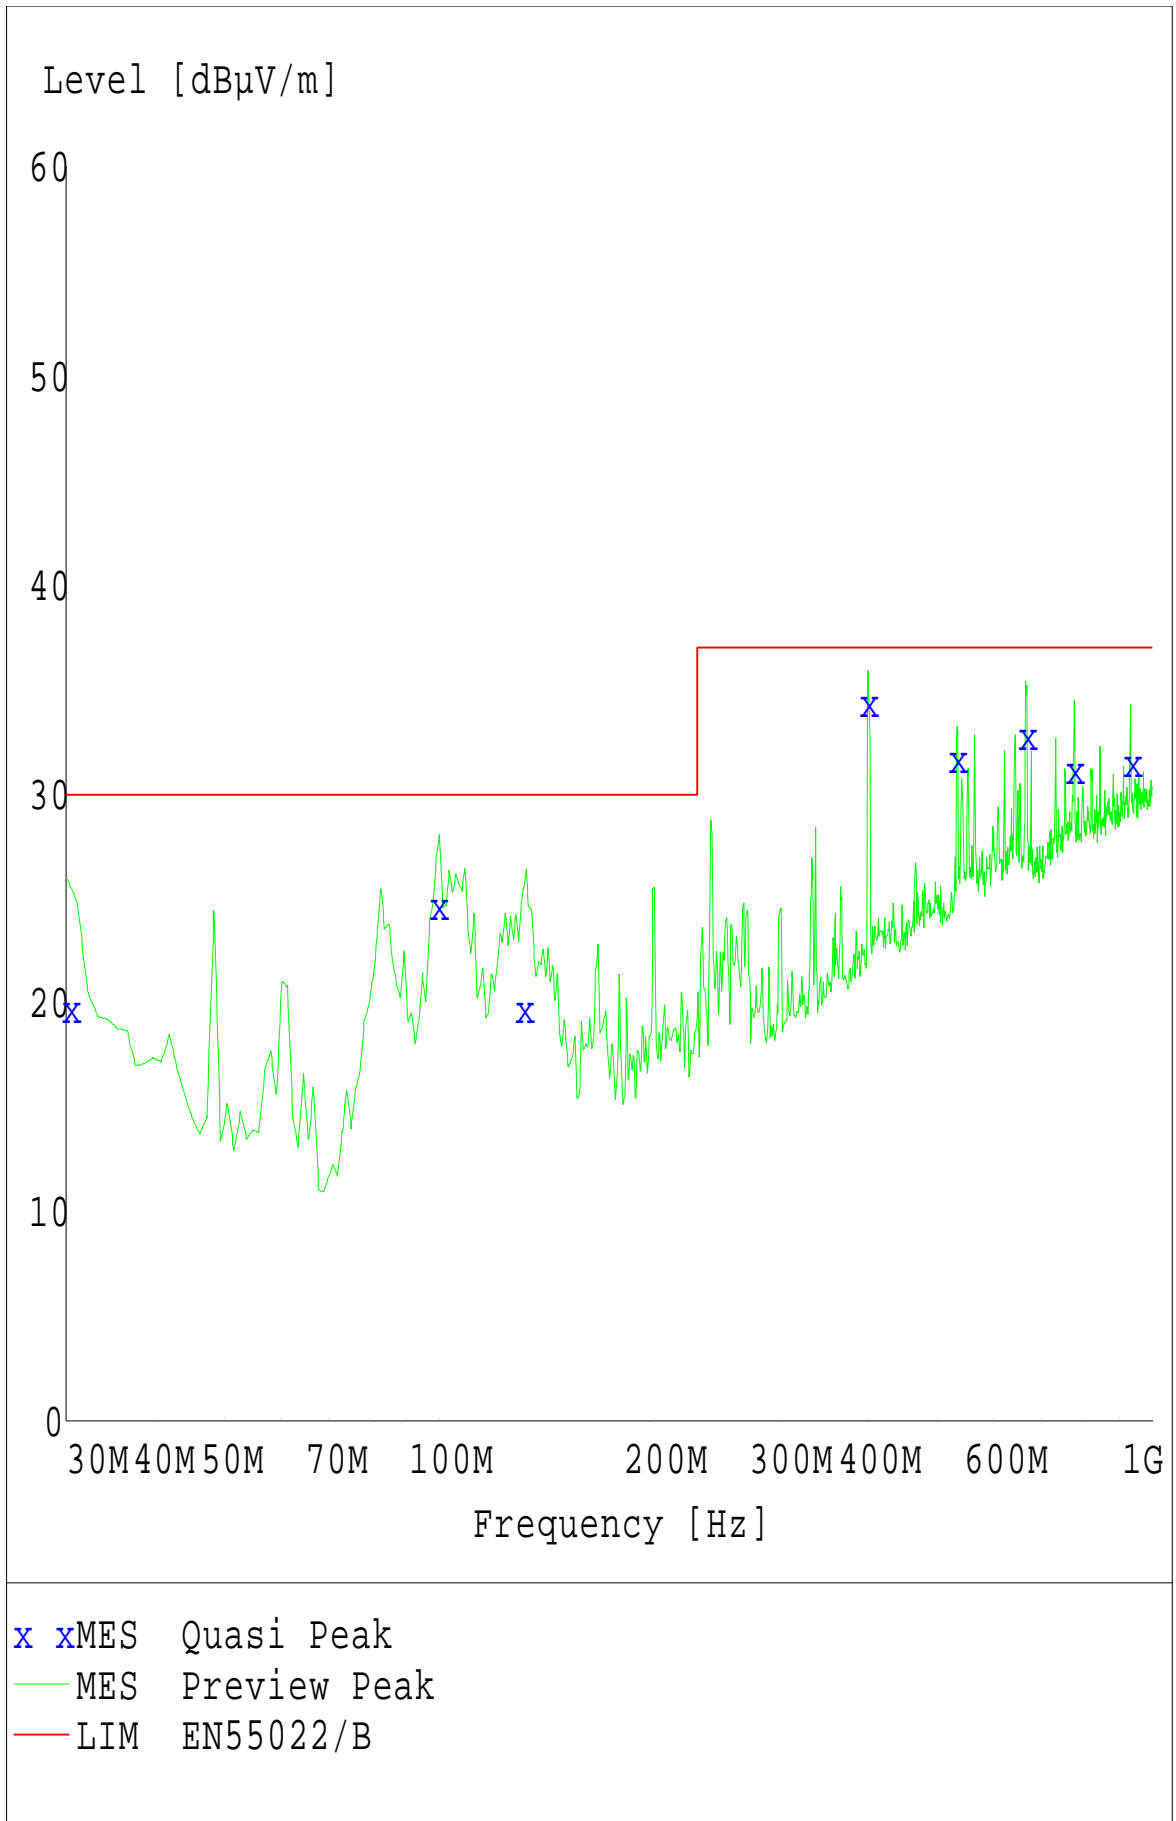

MEASUREMENT RESULT: "Quasi Peak"

02.05.00 14:23

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
30.390000	19.70	18.1	30.0	10.3	220.0	90.00	VERTICAL
99.270000	24.70	11.2	30.0	5.3	160.0	270.00	VERTICAL
131.190000	19.70	12.1	30.0	10.3	100.0	270.00	VERTICAL
398.640000	34.40	17.8	37.0	2.6	280.0	150.00	HORIZONTAL
531.480000	31.70	20.0	37.0	5.3	160.0	150.00	HORIZONTAL
665.070000	32.80	21.7	37.0	4.2	100.0	270.00	HORIZONTAL
776.160000	31.20	22.8	37.0	5.8	160.0	59.00	VERTICAL
932.730000	31.50	23.8	37.0	5.5	160.0	150.00	VERTICAL

**Radiated emission according to:
to FCC class B**

EUT: MT8-D1127 / PIII 933 MHz (Scenic xL-1127)
 Manufacturer: Fujitsu Siemens Computers
 Operating Condition: Scroll "H" 1024x768/100 Hz HD/CD/Peripheral-Test
 Test Site: Fujitsu Siemens Augsburg (10 m Semi Anechoic Chamber)
 Operator: A. Luck
 Configuration: Full configuration
 Comment: PSU: Astec E427
 Start of Test: 25.04.00 / 07:36:37

SCAN TABLE: "FCC1-5GHz"

Short Description: 3m Messung FCC 1 bis 5 GHz
 Unit: dBµV/m

Detector: Mode:

Curve 1: MaxPeak MaxHold
 Curve 2: Average MaxHold


Subrange 1:

Start Frequency: 1.0 GHz Step Size: 300.0 kHz
 Stop Frequency: 5.0 GHz
 Measure Time: 10.0 ms
 IF Bandwidth: 1 MHz

Receiver: ESXI Transducer: Tensor call2-99
 Signal Path: 2DC-CP7X1 System Transducer: RFin2-CP7/X1
 Meas. Mode: Lin Add. Transd. 1: Rosenberger 8m
 Tracking Gen.: Off Add. Transd. 2: None
 Input: 2DC Add. Transd. 3: None

Preamplifier: 10 dB Demodulation: AM
 RF Att.: Coupled Volume: 70 %
 Ref. Level: -40.0 dBm Squelch: --
 Min. RF Att.: 0 dB Option: None
 IF Att.: --
 Autorange: On

Curve 1: On Repetition: Single
 Curve 2: On Stop Mark: Off
 Stop Message: Off
 Stop Message:

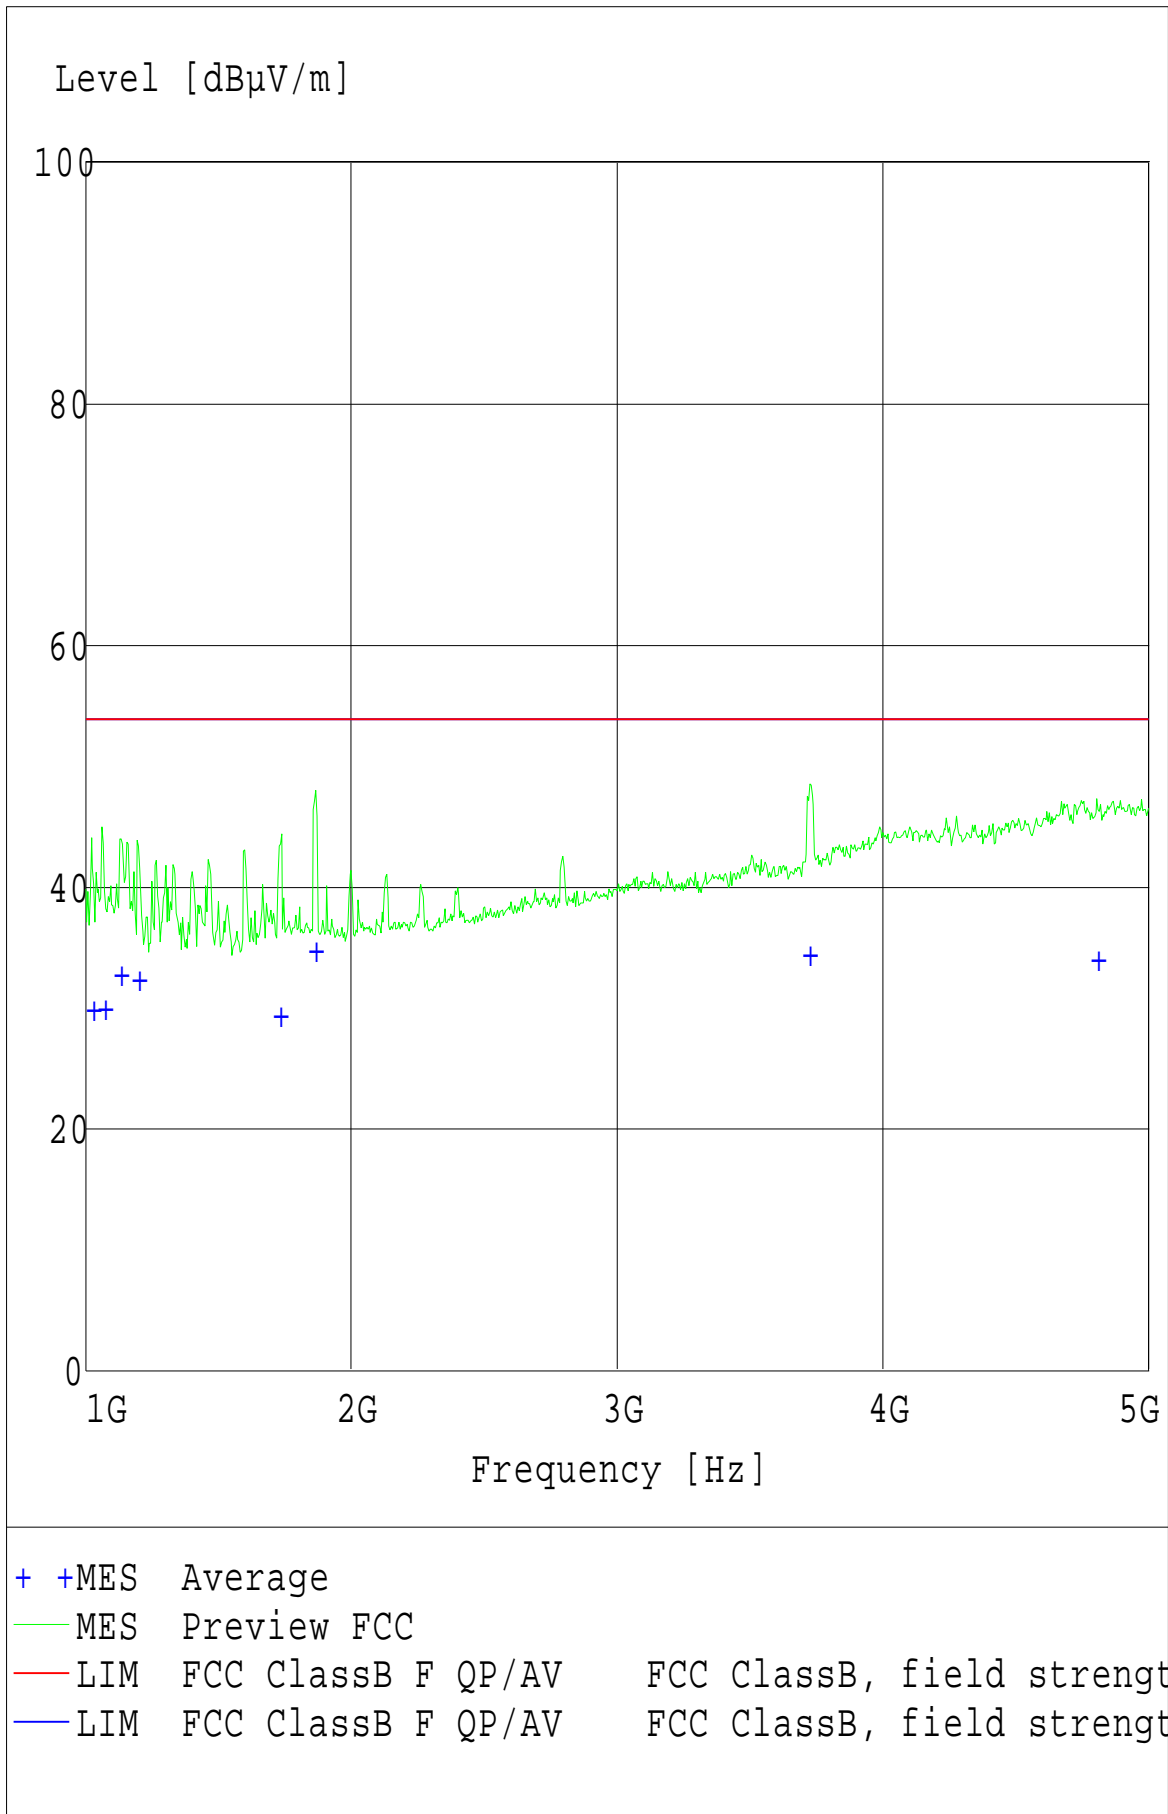

MEASUREMENT RESULT: "Average"

28.04.00 13:02

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
1024.600000	29.90	8.3	53.9	24.0	120.0	239.00	HORIZONTAL
1068.700000	30.00	8.8	53.9	23.9	240.0	180.00	HORIZONTAL
1129.600000	32.90	9.3	53.9	21.0	100.0	59.00	VERTICAL
1195.900000	32.40	9.3	53.9	21.5	120.0	300.00	HORIZONTAL
1728.100000	29.40	11.6	53.9	24.5	100.0	29.00	HORIZONTAL
1859.800000	34.80	11.4	53.9	19.1	120.0	0.00	HORIZONTAL
3720.100000	34.50	17.0	53.9	19.4	160.0	59.00	VERTICAL
4804.000000	34.00	20.8	53.9	19.9	120.0	0.00	HORIZONTAL

**Radiated emission according to:
to EN55022 class B**

EUT: MT8-D1127 / PIII 933 MHz (Scenic xL-1127)
Manufacturer: Fujitsu Siemens Computers
Operating Condition: Scroll "H" 1024x768/100 Hz; HD/CD/Peripheral-Test
Test Site: Fujitsu Siemens Augsburg (10 m Semi Anechoic Chamber)
Operator: M. Heuser
Configuration: Full configuration
Comment: PSU: Minebea E427
Start of Test: 02.05.00 / 15:47:44

SCAN TABLE: "10m/30-1000"

Short Description: 10m Field Strength
Unit: dBµV/m

Detector: Mode:

Curve 1: MaxPeak ClearWrite


Subrange 1:

Start Frequency: 30.0 MHz Step Size: 30.0 kHz
Stop Frequency: 1.0 GHz
Measure Time: 10.0 ms
IF Bandwidth: 120 kHz

Receiver: ESXI Transducer: CBL6112 cal. 8/99
Signal Path: 2DC-CP1X1 System Transducer: RFin2-CP1/X1
Meas. Mode: Lin Add. Transd. 1: cable30-1000
Tracking Gen.: Off Add. Transd. 2: None
Input: 2DC Add. Transd. 3: None

Preamplifier: 10 dB Demodulation: AM
RF Att.: Coupled Volume: 70 %
Ref. Level: -60.0 dBm Squelch: --
Min. RF Att.: 0 dB Option: None
IF Att.: --
Autorange: On

Curve 1: On Repetition: Single
Stop Mark: Off
Stop Message: Off
Stop Message:

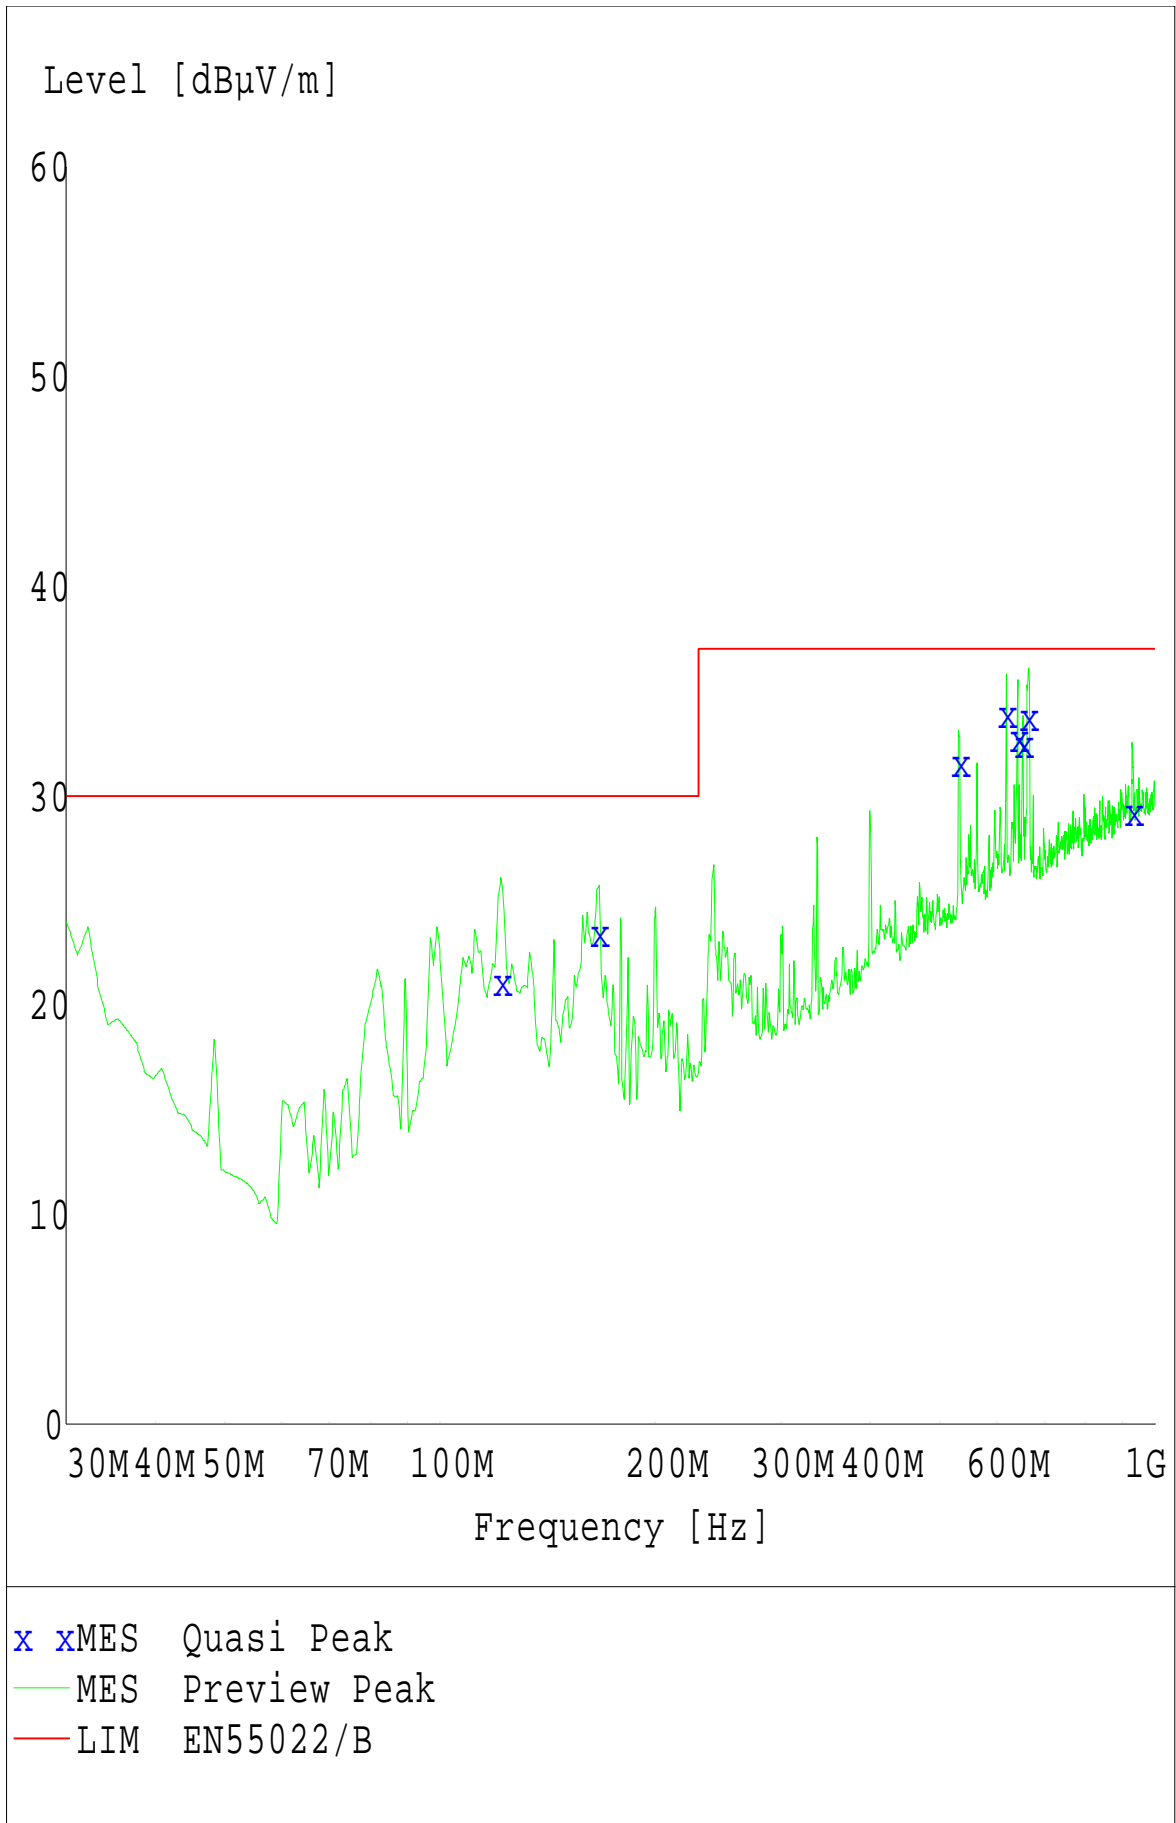

MEASUREMENT RESULT: "Quasi Peak"

02.05.00 16:32

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
121.500000	21.10	12.4	30.0	8.9	100.0	270.00	VERTICAL
166.470000	23.50	10.7	30.0	6.5	100.0	119.00	VERTICAL
531.870000	31.60	20.0	37.0	5.4	160.0	90.00	HORIZONTAL
618.720000	33.90	21.4	37.0	3.1	160.0	300.00	HORIZONTAL
641.400000	32.80	21.7	37.0	4.2	160.0	300.00	HORIZONTAL
652.350000	32.50	21.7	37.0	4.5	100.0	300.00	HORIZONTAL
663.840000	33.80	21.7	37.0	3.2	160.0	300.00	HORIZONTAL
930.060000	29.20	23.8	37.0	7.8	400.0	180.00	VERTICAL

**Radiated emission according to:
to FCC class B**

EUT: MT8-D1127/PIII 933 MHz (Scenic xL-1127)
Manufacturer: Fujitsu Siemens Computers
Operating Condition: Scroll "H" 1024x768/100 Hz; HD/CD/Peripheral-Test
Test Site: Fujitsu Siemens Augsburg (10 m Semi Anechoic Chamber)
Operator: A. Luck
Configuration: Full configuration
Comment: PSU: Minebea E427
Start of Test: 28.04.00 / 13:14:43

SCAN TABLE: "FCC1-5GHz"

Short Description: 3m Messung FCC 1 bis 5 GHz
Unit: dBµV/m

	Detector:	Mode:
Curve 1:	MaxPeak	MaxHold
Curve 2:	Average	MaxHold


Subrange 1:

Start Frequency:	1.0 GHz	Step Size:	300.0 kHz
Stop Frequency:	5.0 GHz		
Measure Time:	10.0 ms		
IF Bandwidth:	1 MHz		

Receiver:	ESXI	Transducer:	Tensor call2-99
Signal Path:	2DC-CP7X1	System Transducer:	RFin2-CP7/X1
Meas. Mode:	Lin	Add. Transd. 1:	Rosenberger 8m
Tracking Gen.:	Off	Add. Transd. 2:	None
Input:	2DC	Add. Transd. 3:	None

Preamplifier:	10 dB	Demodulation:	AM
RF Att.:	Coupled	Volume:	70 %
Ref. Level:	-40.0 dBm	Squelch:	--
Min. RF Att.:	0 dB	Option:	None
IF Att.:	--		
Autorange:	On		

Curve 1:	On	Repetition:	Single
Curve 2:	On	Stop Mark:	Off
		Stop Message:	Off
		Stop Message:	Off

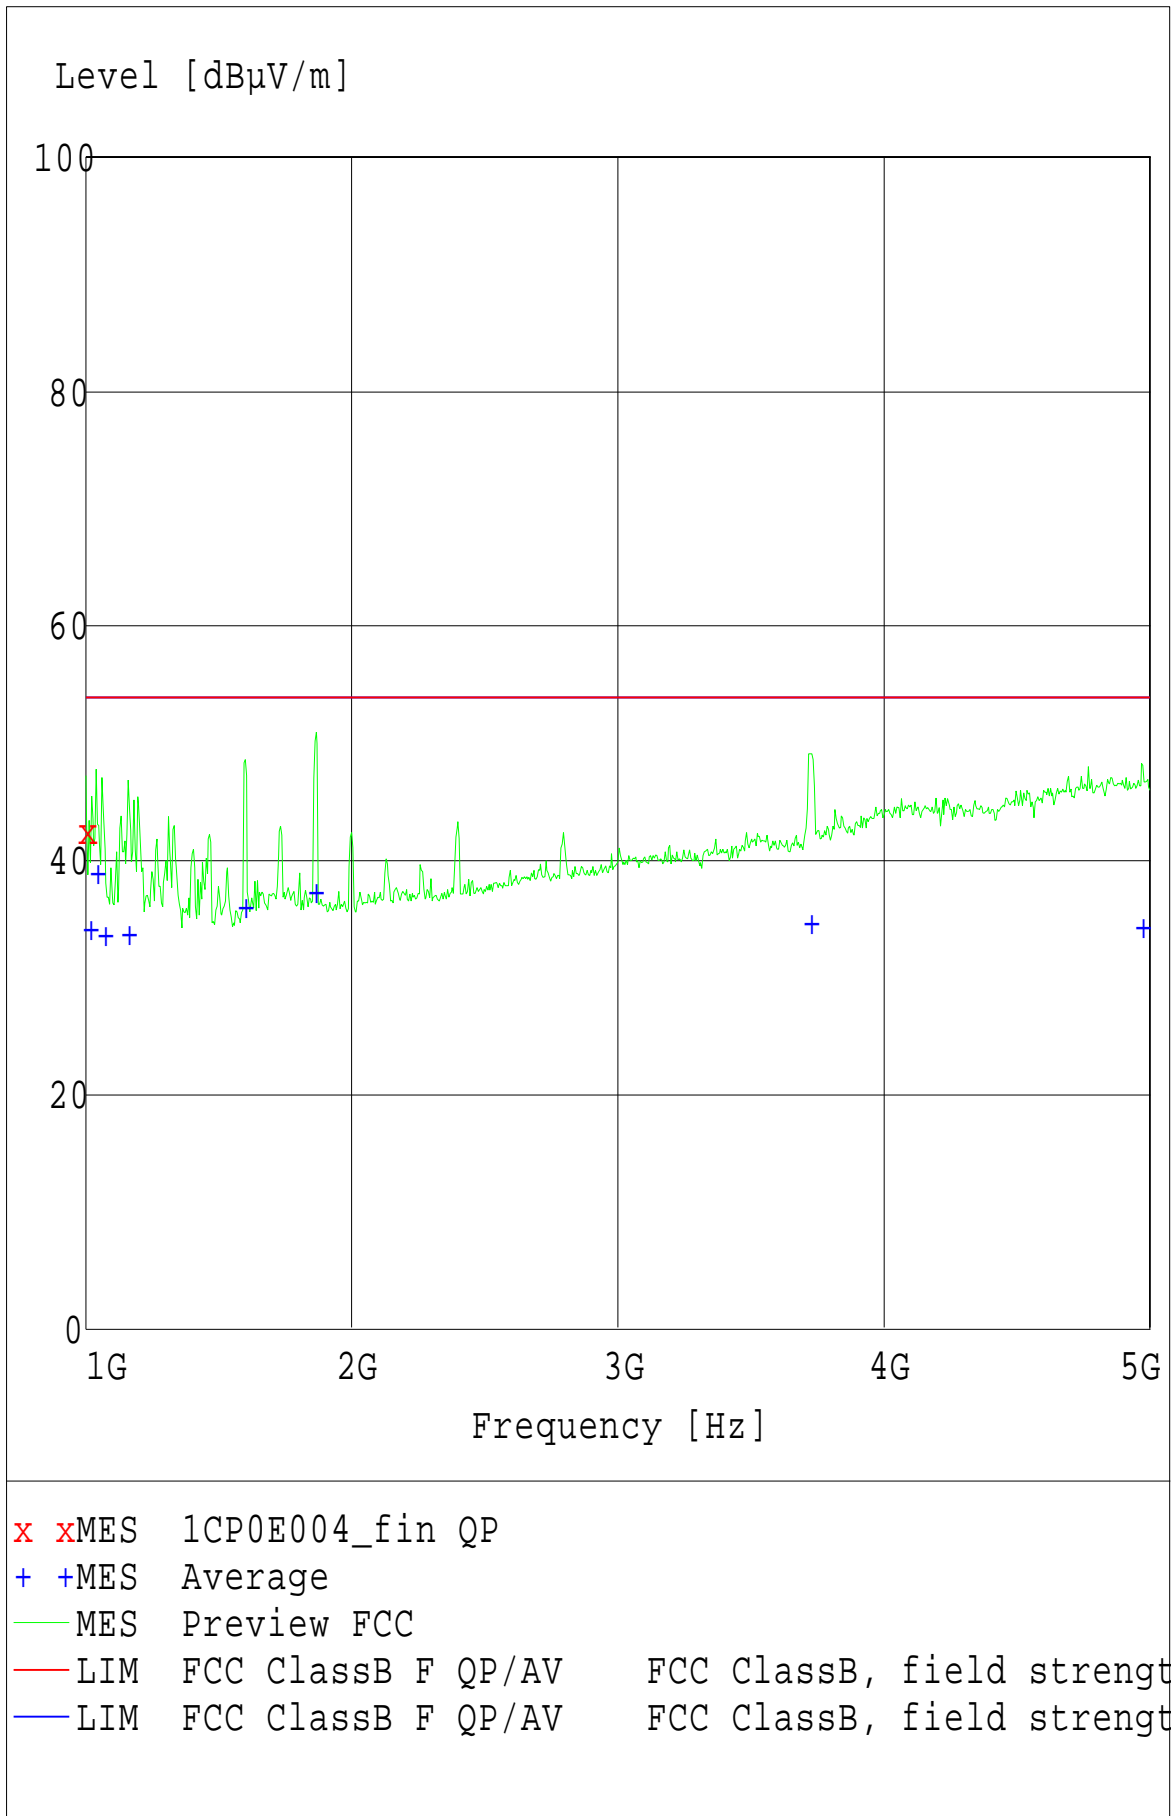

MEASUREMENT RESULT: "1CP0E004_fin QP"

28.04.00 13:52

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
1000.600000	42.60	7.8	53.9	11.3	120.0	0.00	HORIZONTAL

MEASUREMENT RESULT: "Average"

28.04.00 13:52

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
1012.300000	34.20	8.0	53.9	19.7	120.0	0.00	HORIZONTAL
1039.300000	39.00	8.6	53.9	14.9	120.0	0.00	HORIZONTAL
1068.700000	33.70	8.8	53.9	20.2	160.0	29.00	HORIZONTAL
1157.800000	33.80	9.7	53.9	20.1	240.0	180.00	HORIZONTAL
1594.300000	36.10	10.1	53.9	17.8	100.0	29.00	HORIZONTAL
1859.800000	37.40	11.4	53.9	16.5	160.0	29.00	HORIZONTAL
3719.800000	34.70	17.0	53.9	19.2	280.0	59.00	VERTICAL
4966.600000	34.40	20.8	53.9	19.5	120.0	59.00	HORIZONTAL