


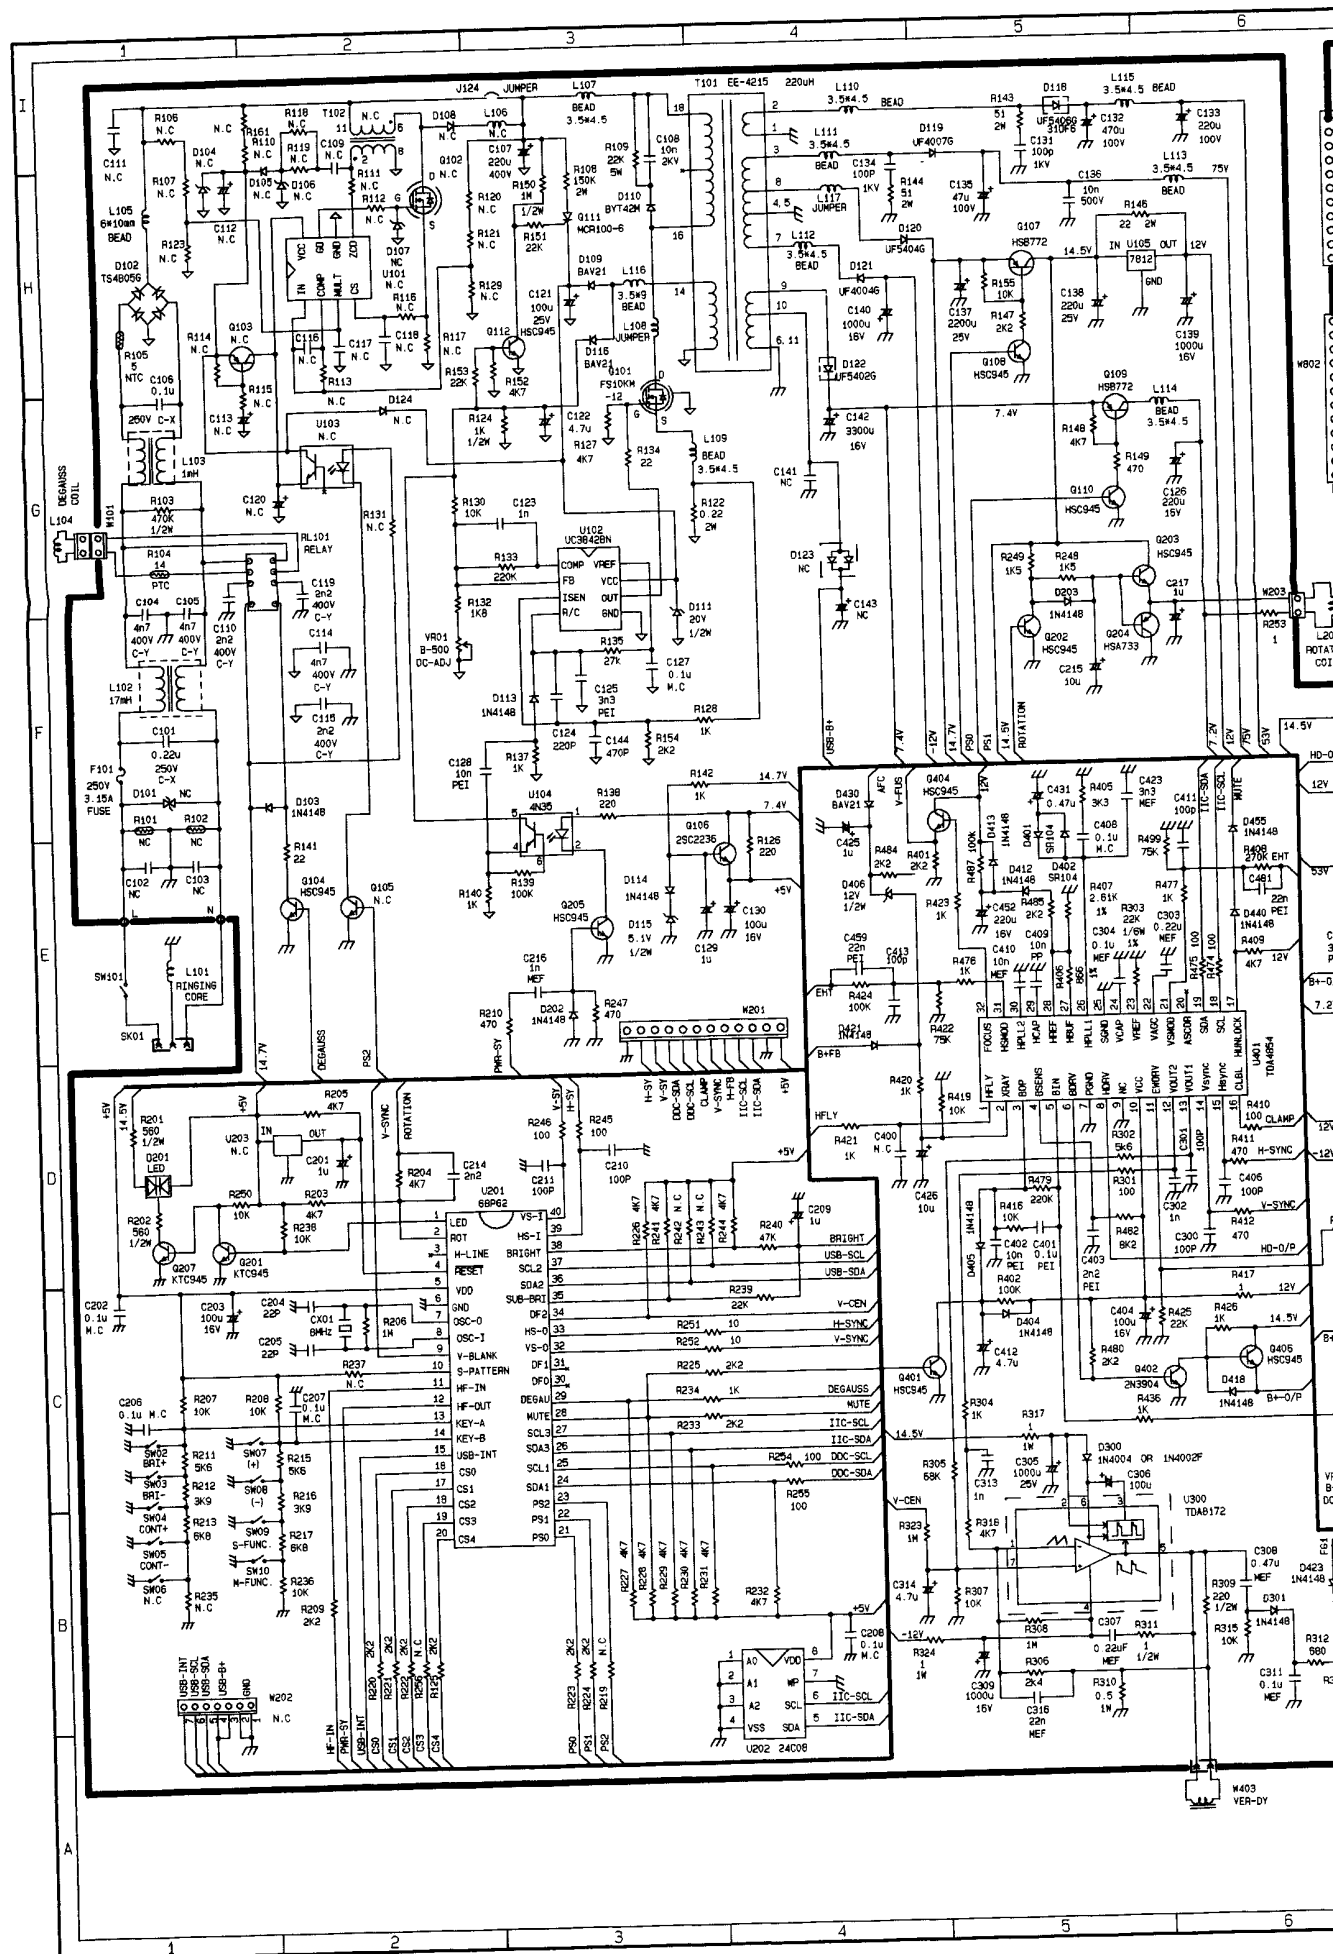


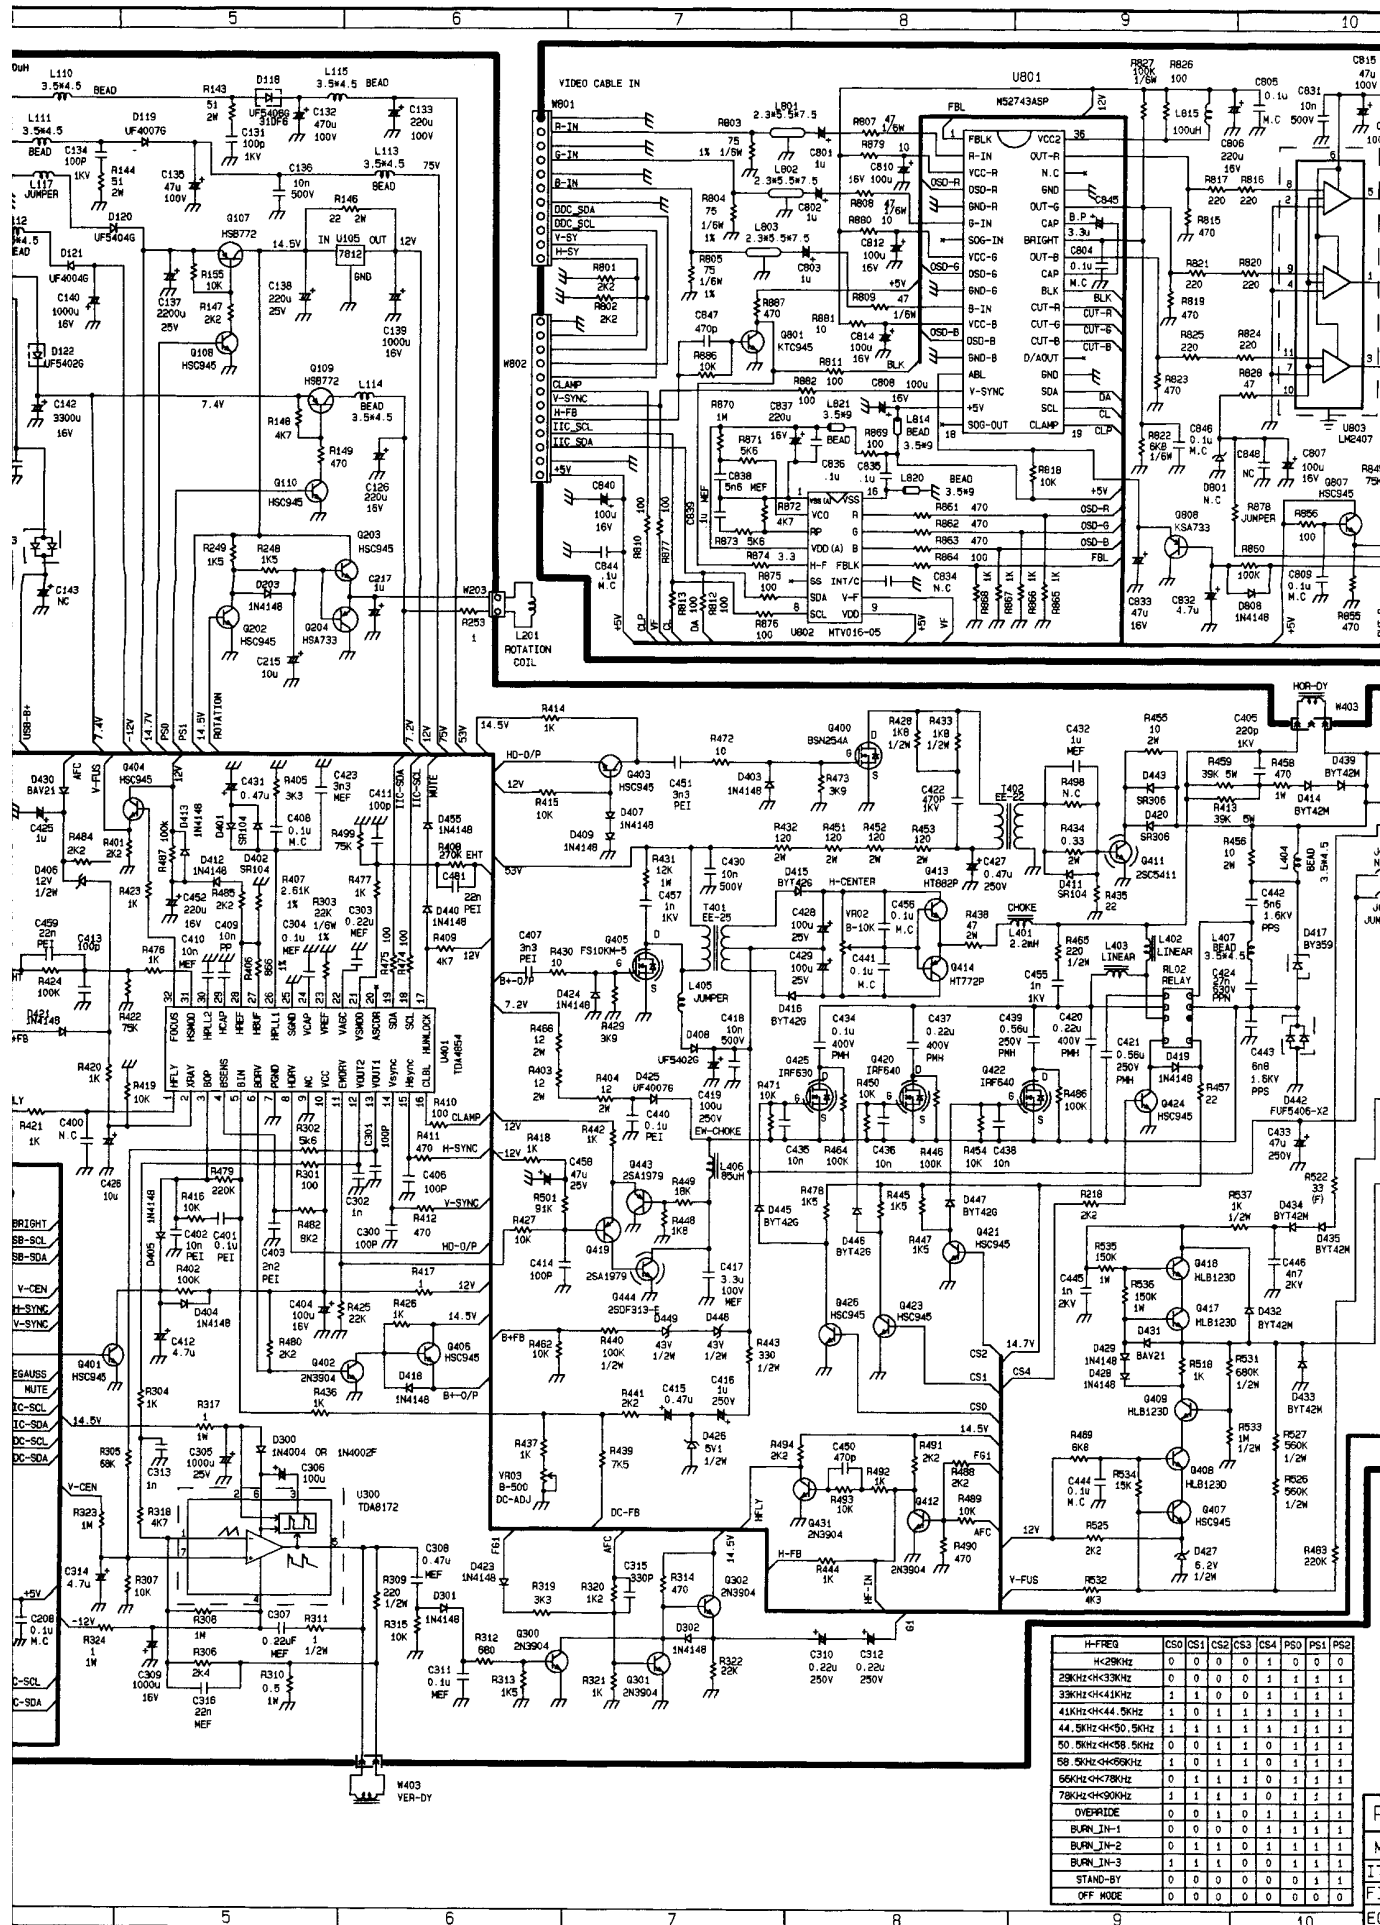

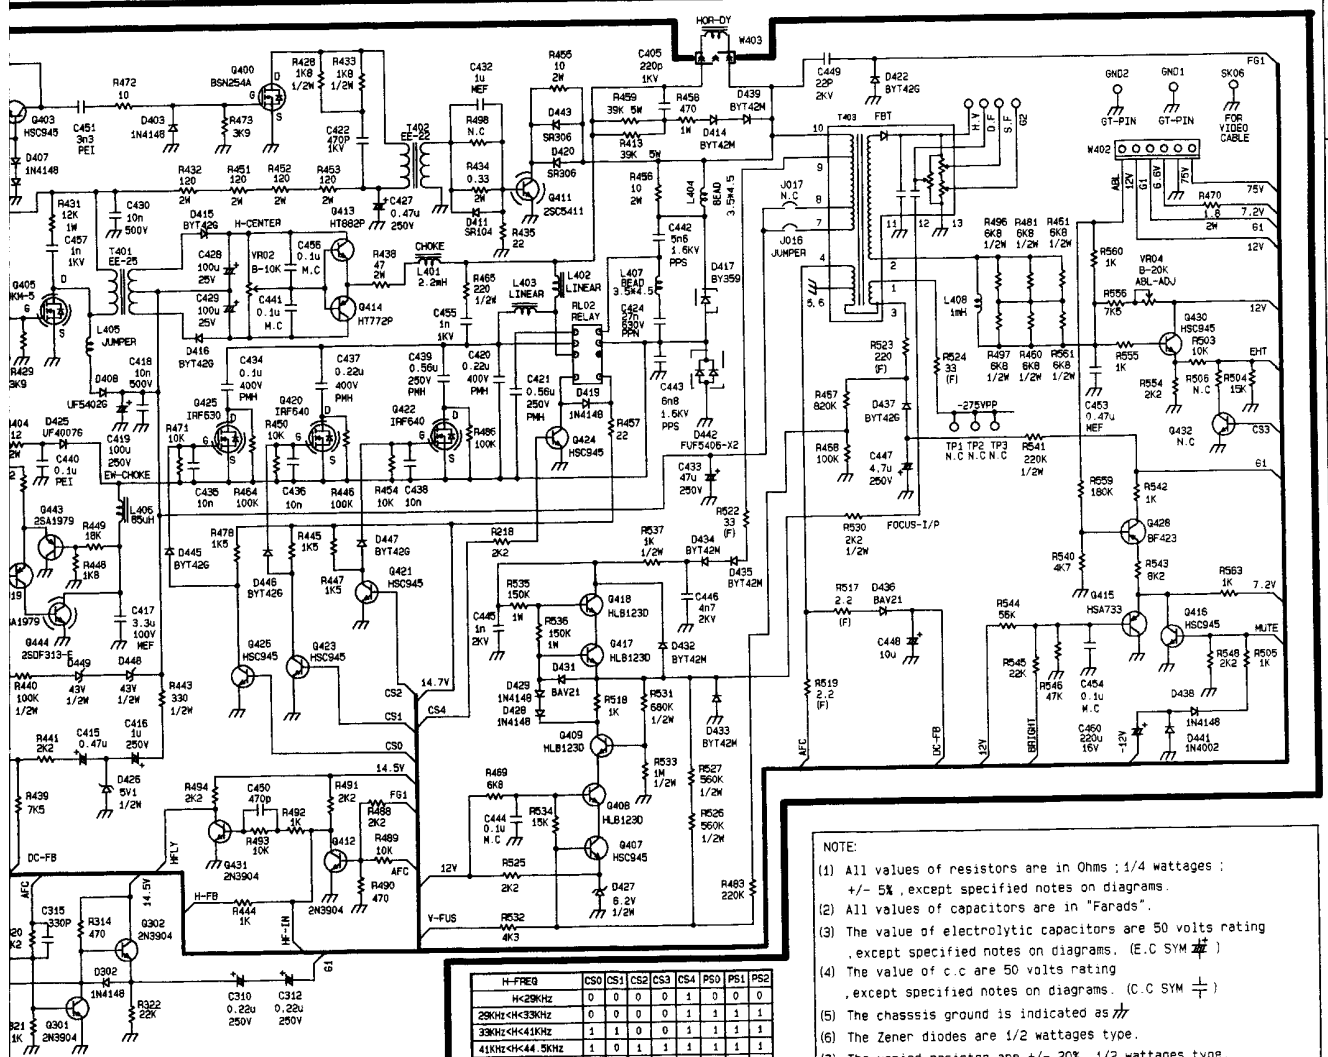

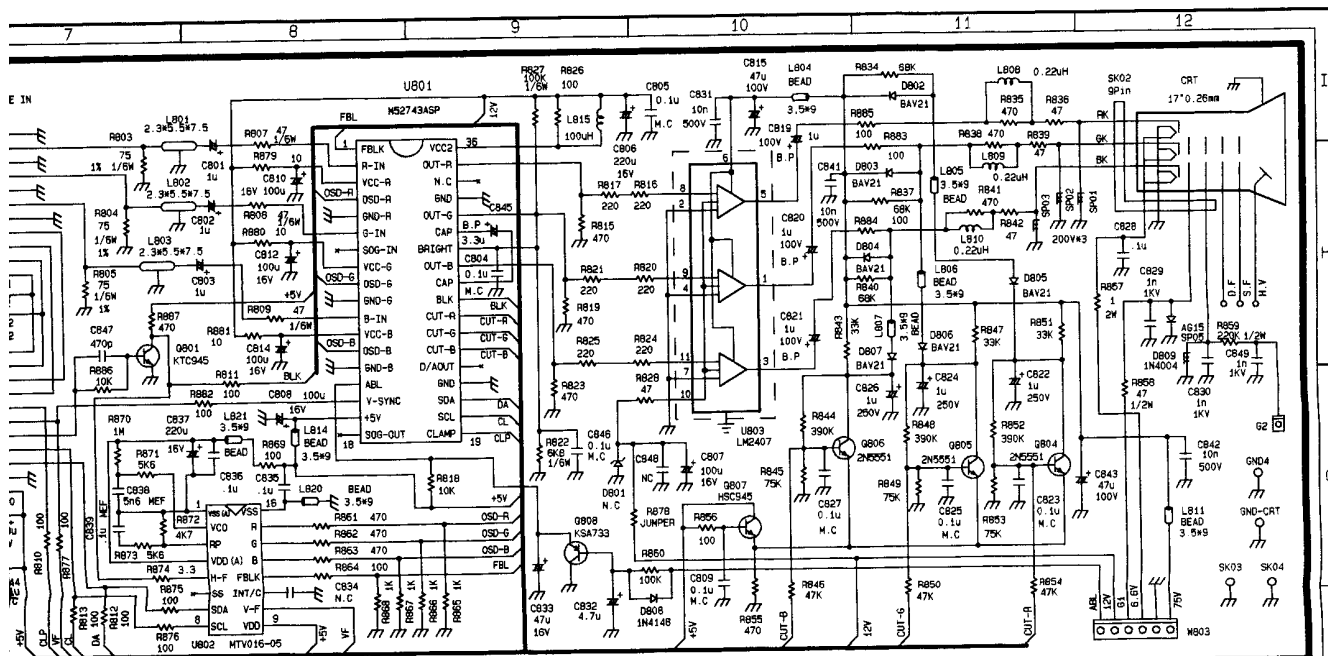

- NOTE:
- (1) All values of resistors are in Ohms; 1/4 wattages; +/- 5%, except specified notes on diagrams.
 - (2) All values of capacitors are in "Farads".
 - (3) The value of electrolytic capacitors are 50 volts rating, except specified notes on diagrams. (E.C. SYM E.C.)
 - (4) The value of c.c. are 50 volts rating, except specified notes on diagrams. (C.C. SYM C.C.)
 - (5) The chassis ground is indicated as GND .
 - (6) The Zener diodes are 1/2 wattages type.
 - (7) The varied resistor are +/- 20%, 1/2 wattages type.

H-REF	CS0	CS1	CS2	CS3	CS4	PS0	PS1	PS2
H-29KHz	0	0	0	0	1	0	0	0
28KHz<K<39KHz	0	0	0	0	1	1	1	1
39KHz<K<43KHz	1	1	0	0	1	1	1	1
41KHz<K<44.5KHz	1	0	1	1	1	1	1	1
44.5KHz<K<50.5KHz	1	0	1	1	1	1	1	1
50.5KHz<K<58.5KHz	0	0	1	1	1	1	1	1
58.5KHz<K<69KHz	1	0	1	1	1	1	1	1
69KHz<K<78KHz	0	1	1	1	1	1	1	1
78KHz<K<90KHz	1	1	1	1	0	1	1	1
OVERRIDE	0	0	1	0	1	1	1	1
BURN_IN-1	0	0	0	0	1	1	1	1
BURN_IN-2	0	1	1	0	1	1	1	1
BURN_IN-3	1	1	1	0	1	1	1	1
STAND-BY	0	0	0	0	0	1	1	1
OFF MODE	0	0	0	0	0	0	0	0

ROYAL INFORMATION ELECTRONICS CO., LTD

MODEL: DH-1764U SHEET NO. DESIGN DRAWING

ITEM: MAIN/CRT DATE: JULY-31-1998 PREPARE C.H. TSENG

FILE NAME: X-786 SCH REV: 0.5 CHECKED

ECN NO: APPROVED