






89071308

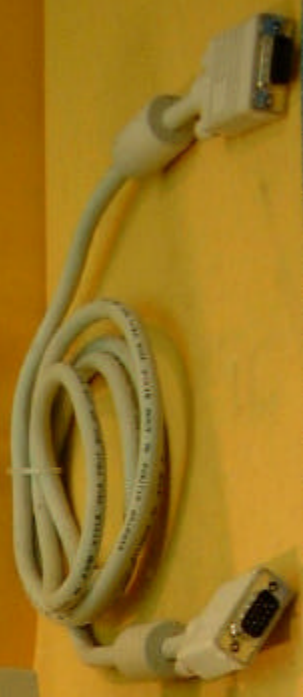


89071308

89071308


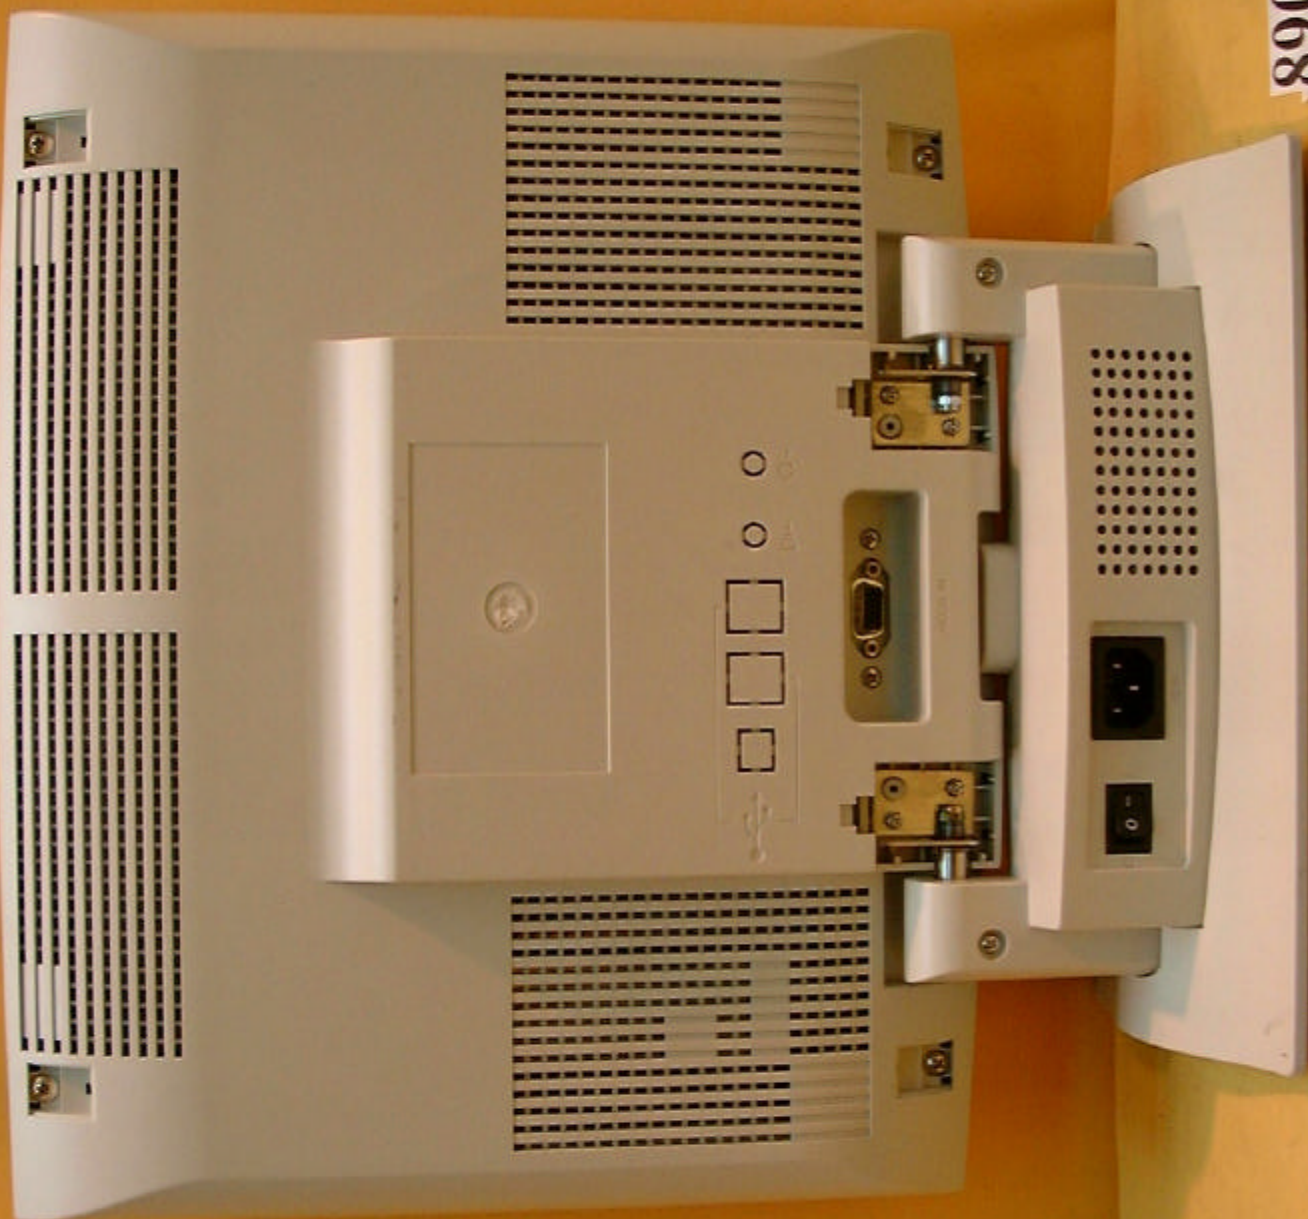


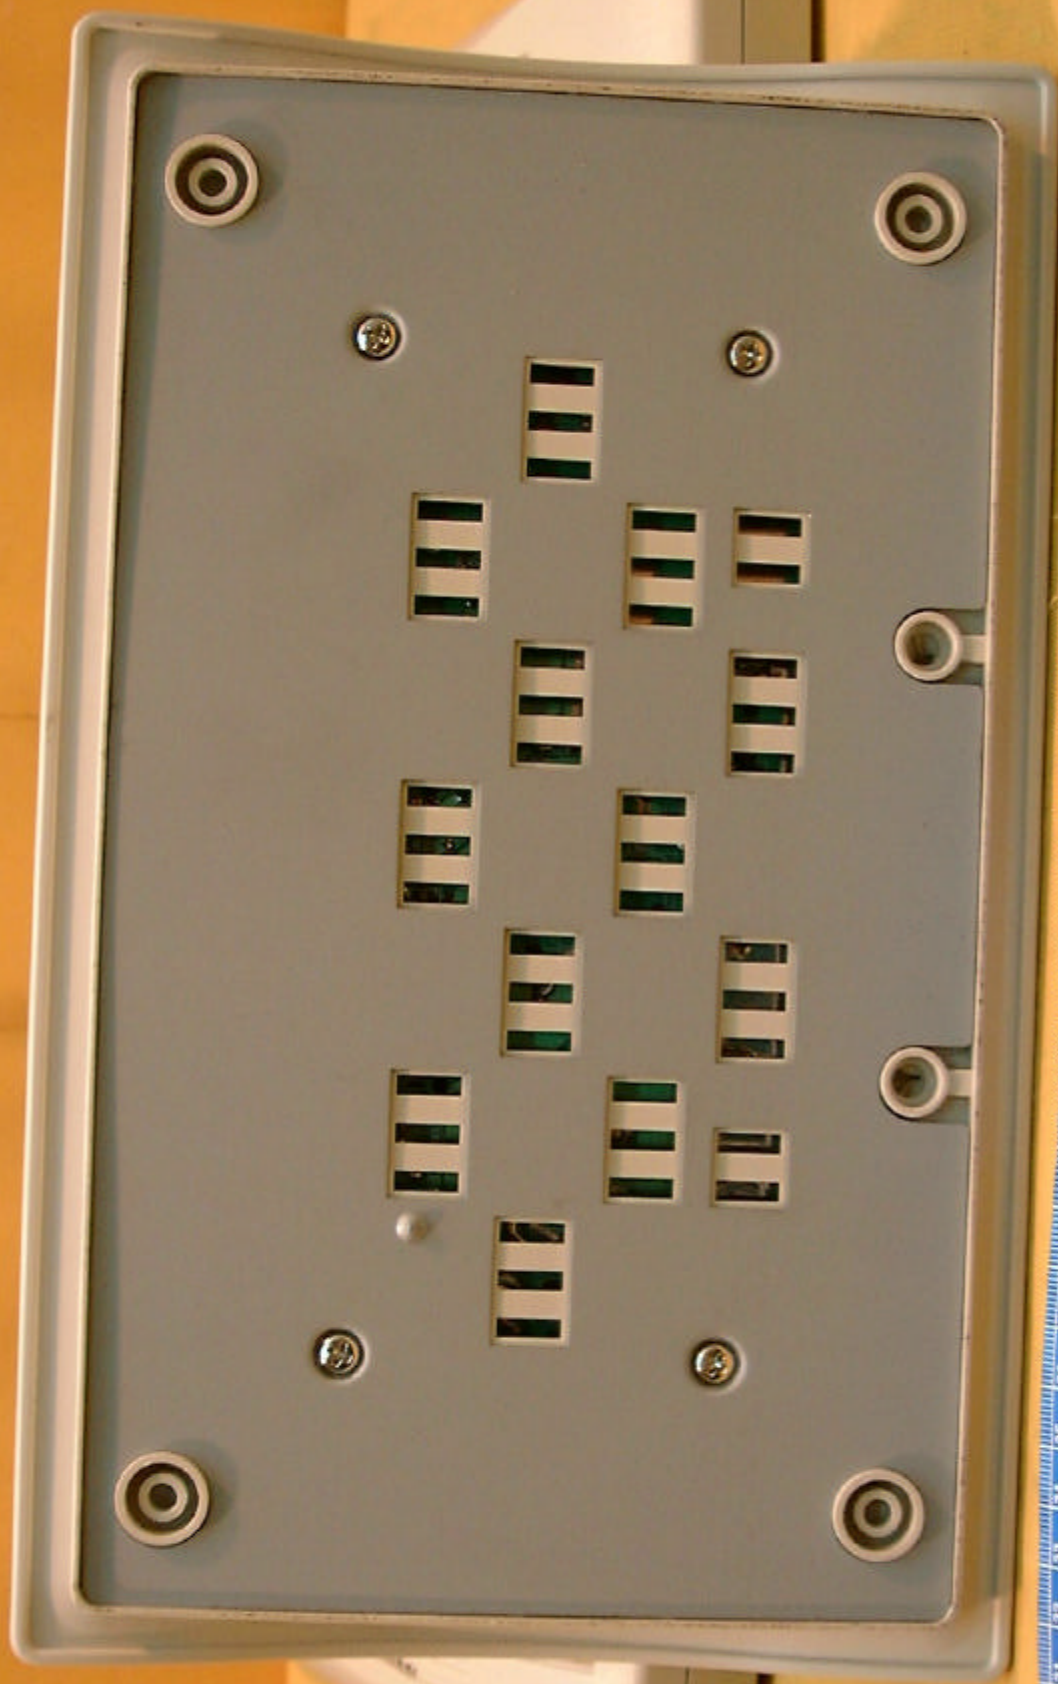

89071308

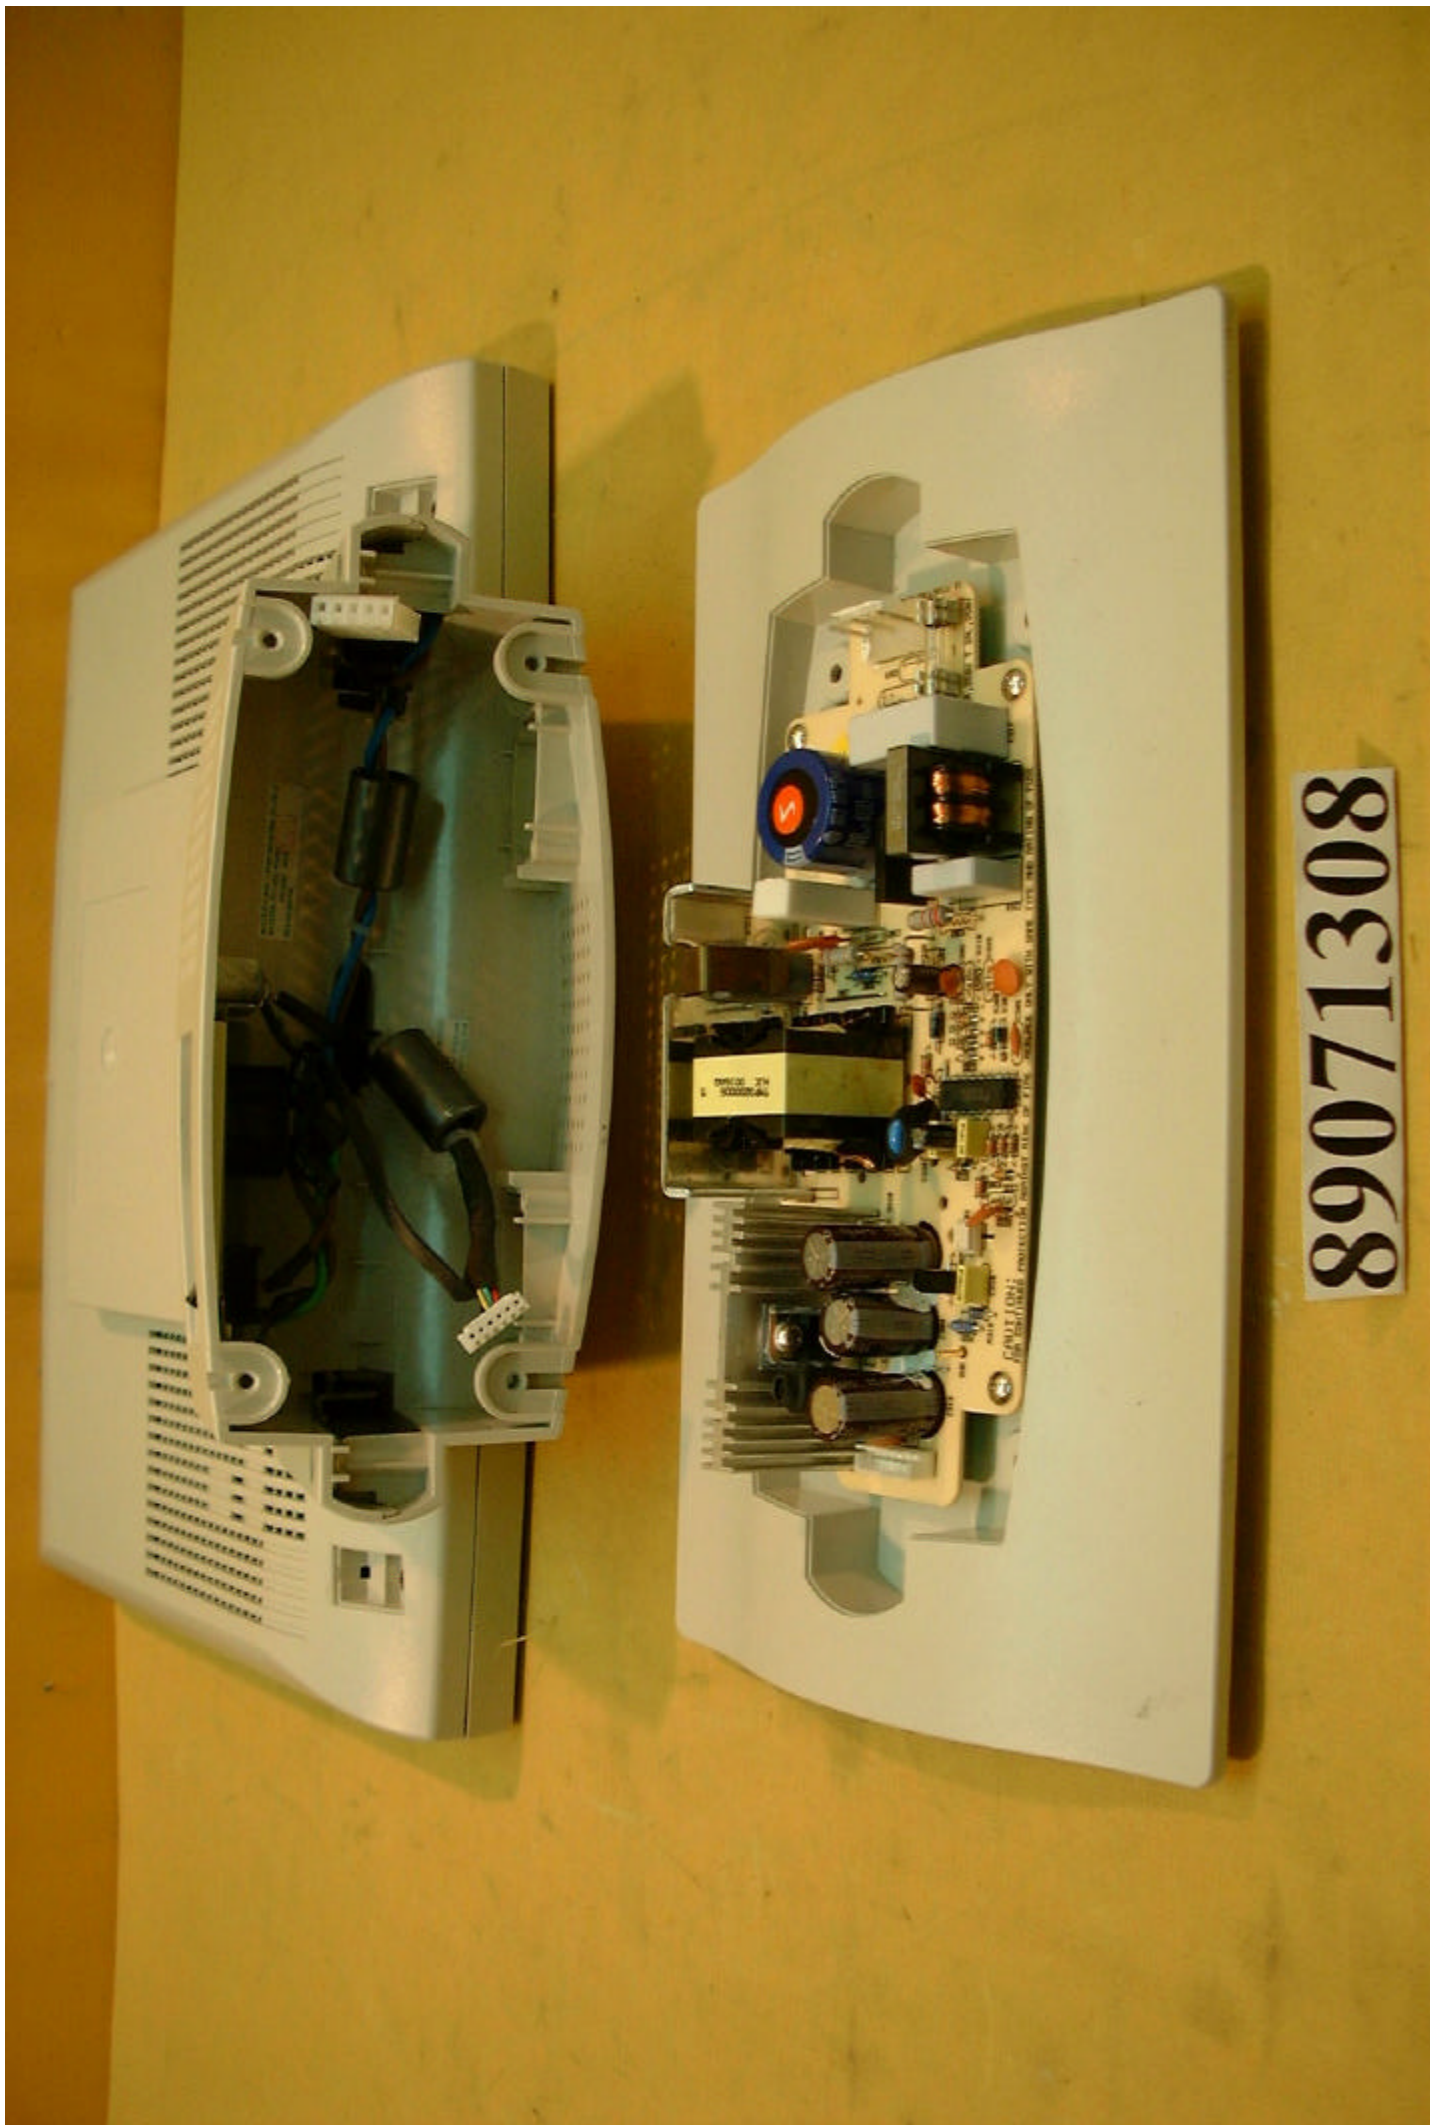

89071308

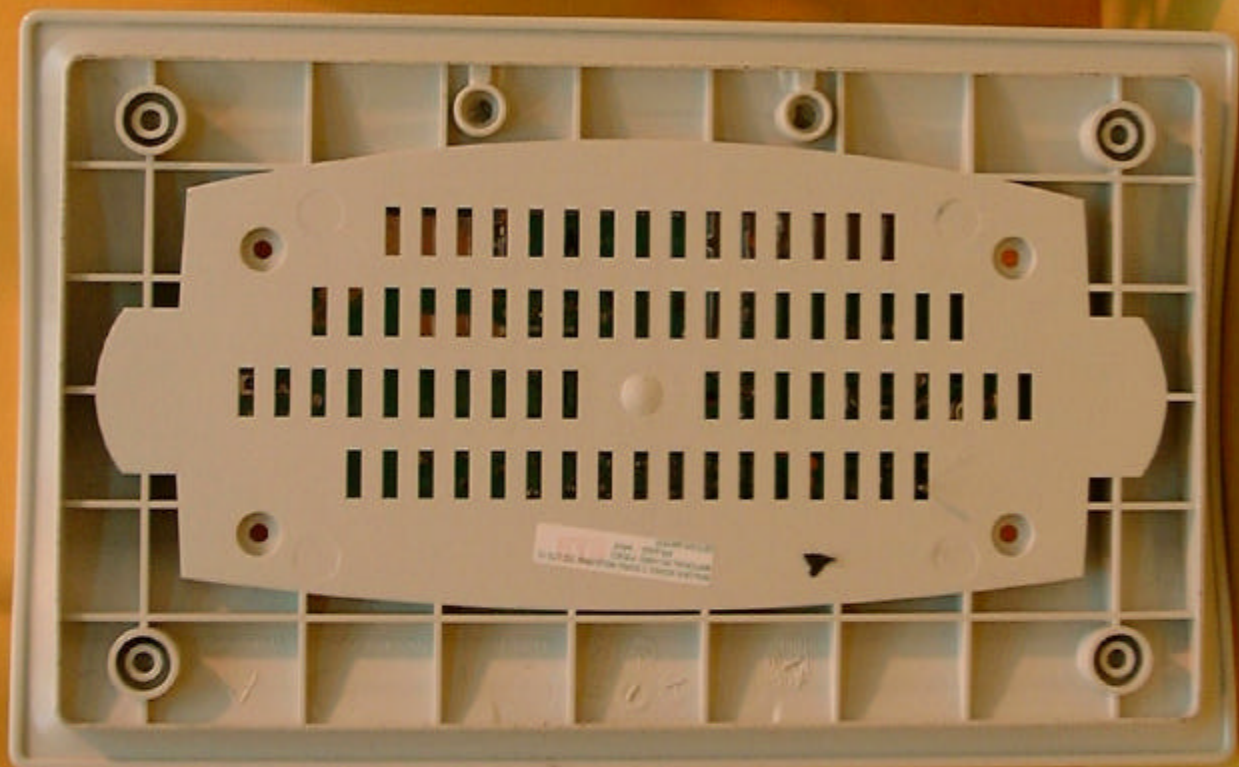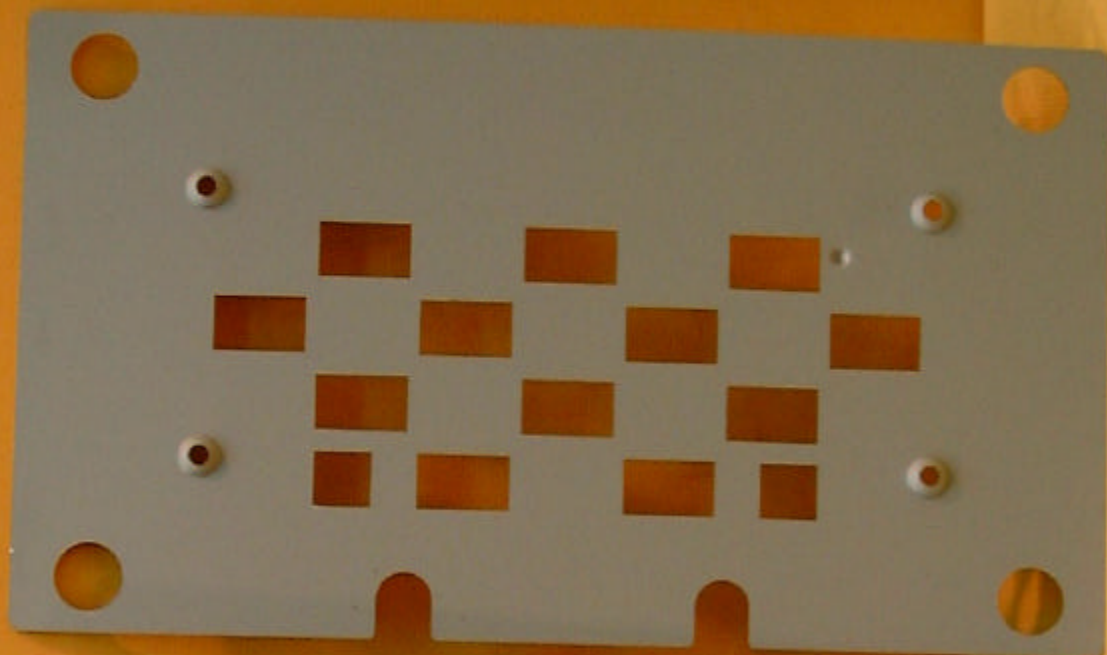

89071308

89071308


R/S-5 (POWER BOARD)
REV: 2.0 NOV. 22. 1999


0016

1.1
87 94U-0

TMP320006
HJC 0016A0

CAUTION:
FOR CONTINUED PROTECTION AGAINST RISK OF FIRE, REPLACE ONLY WITH SAME TYPE

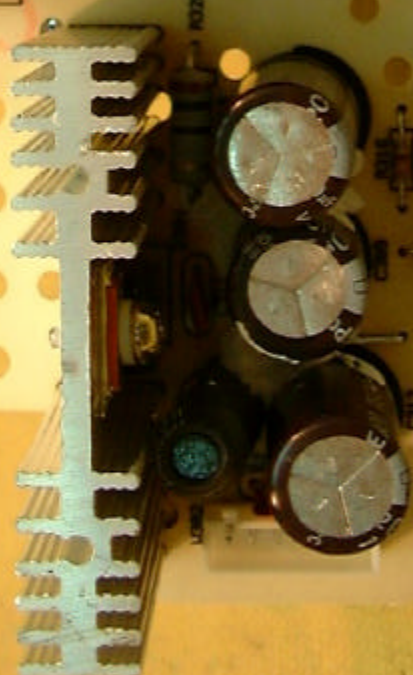

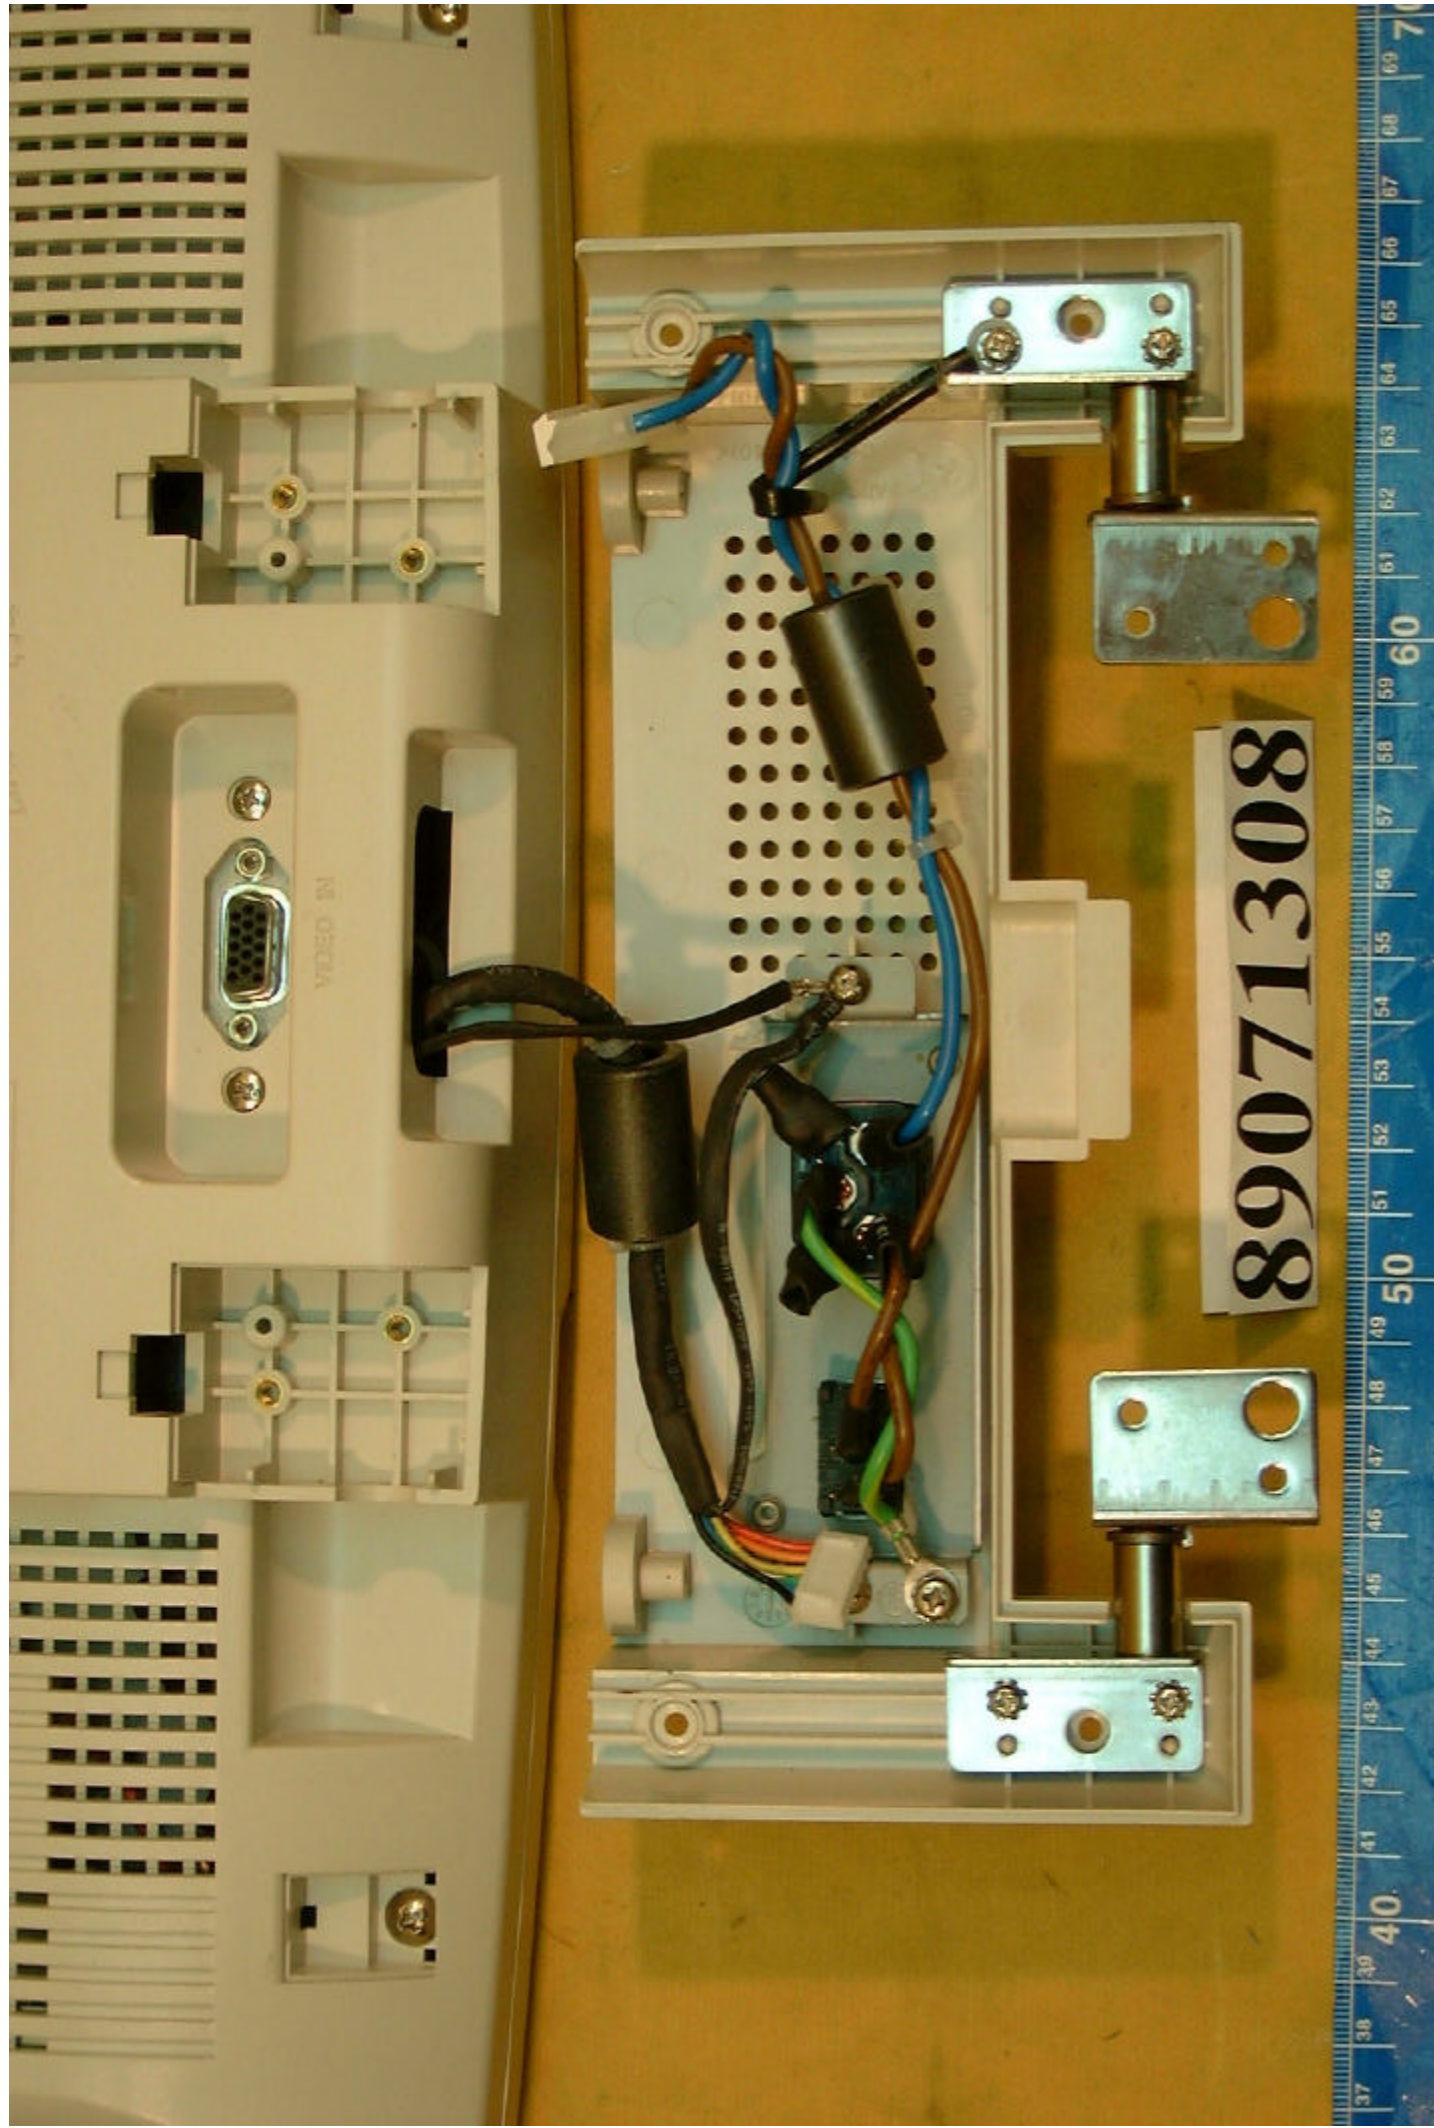


89071308



89071308


89071308



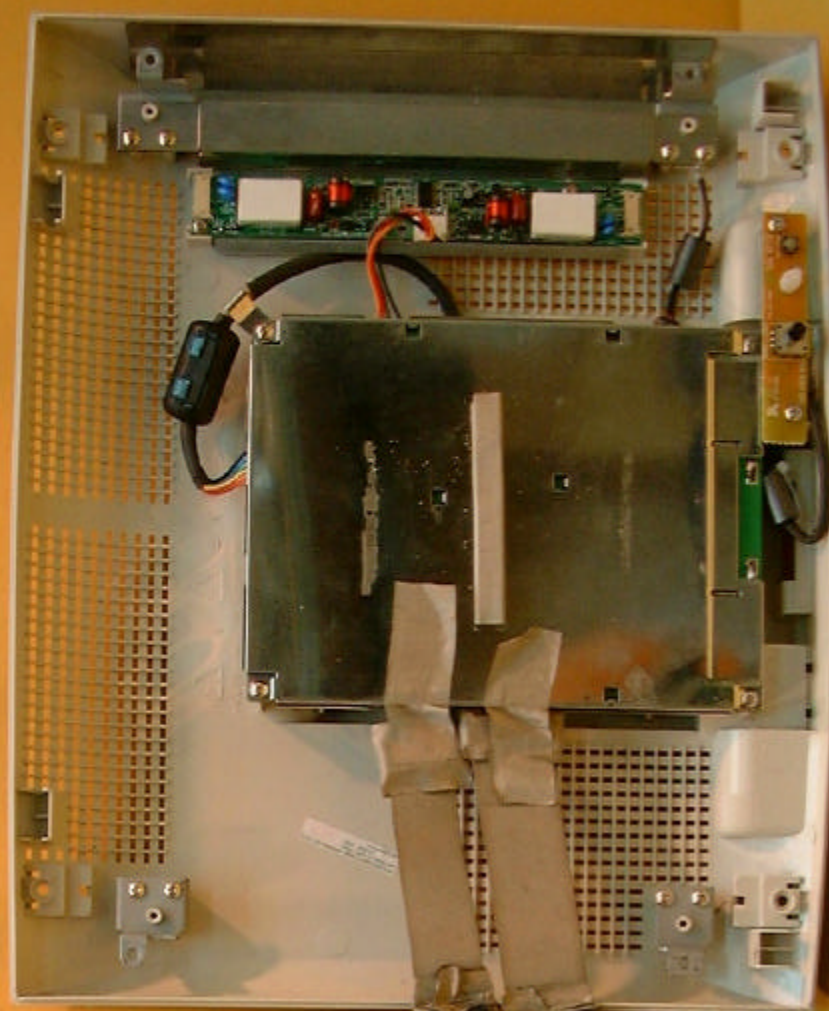

89071308




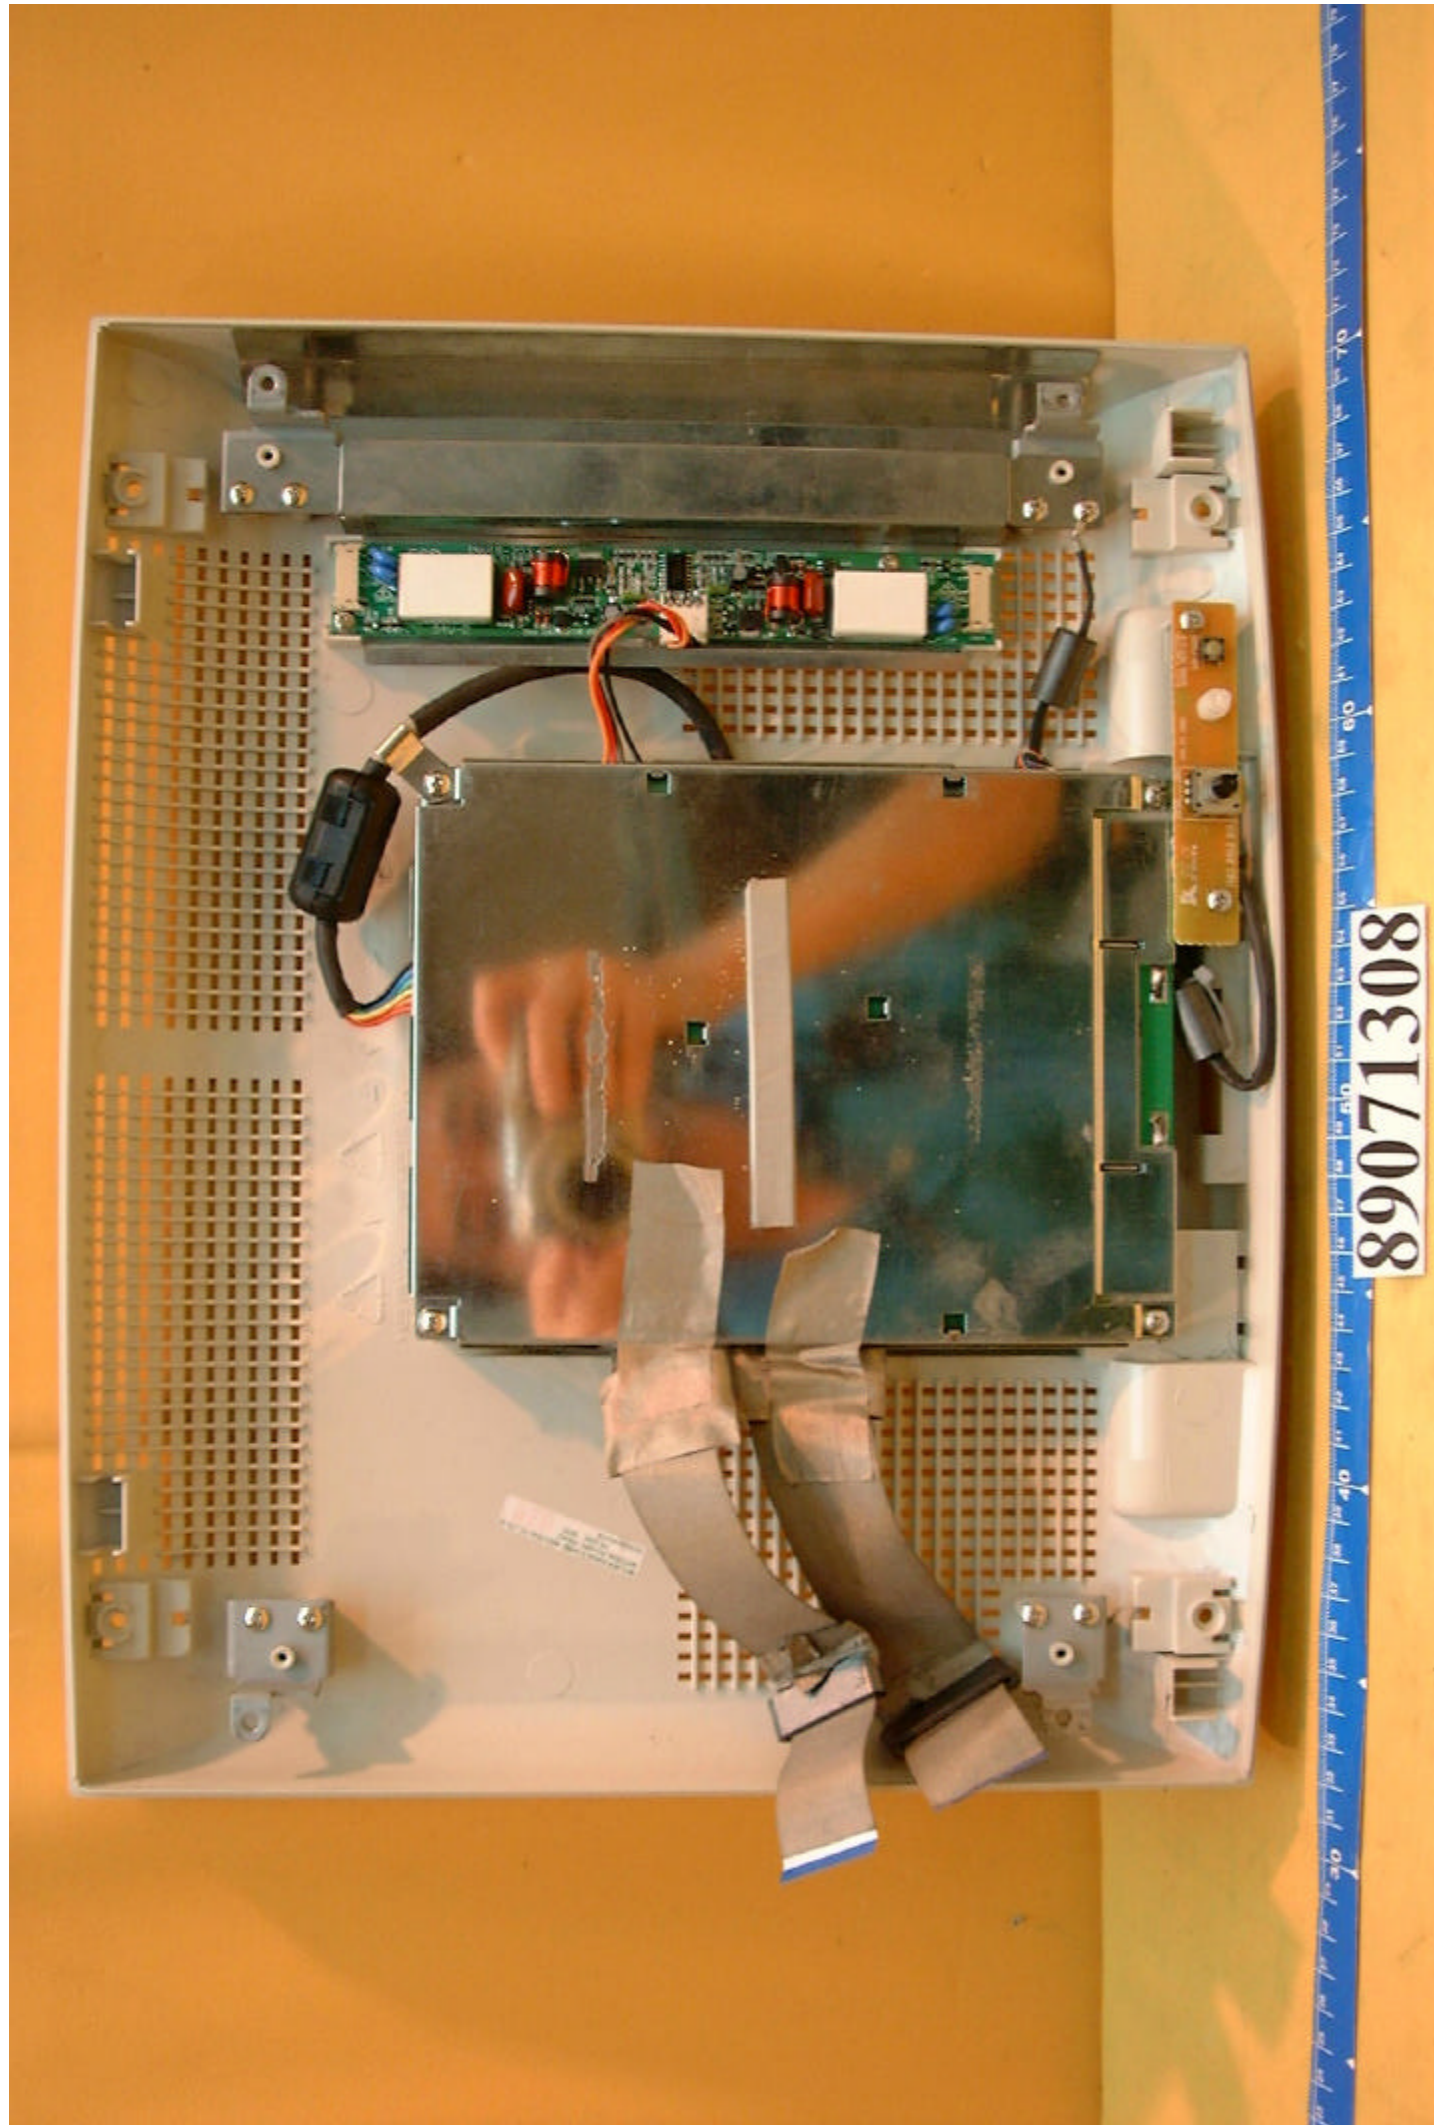


89071308



89071308

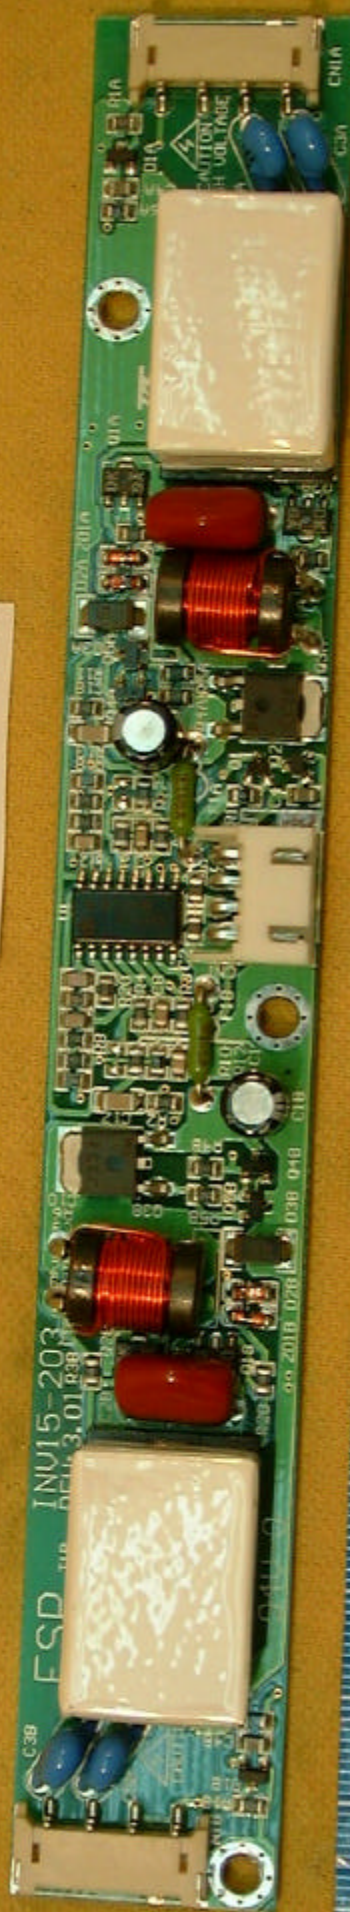



89071308

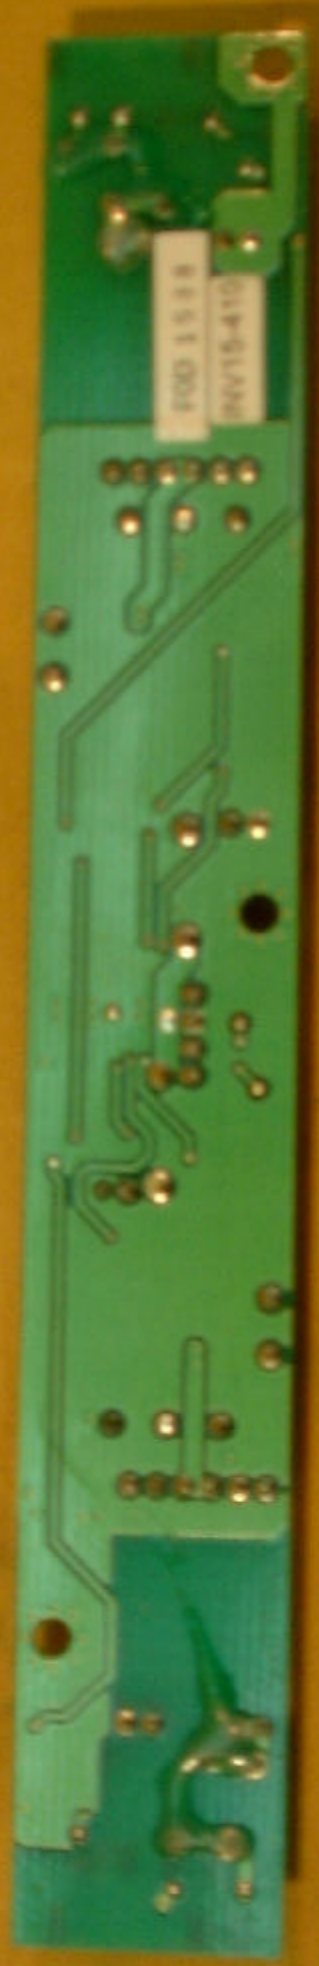

100 1338
REV15-410


89071308

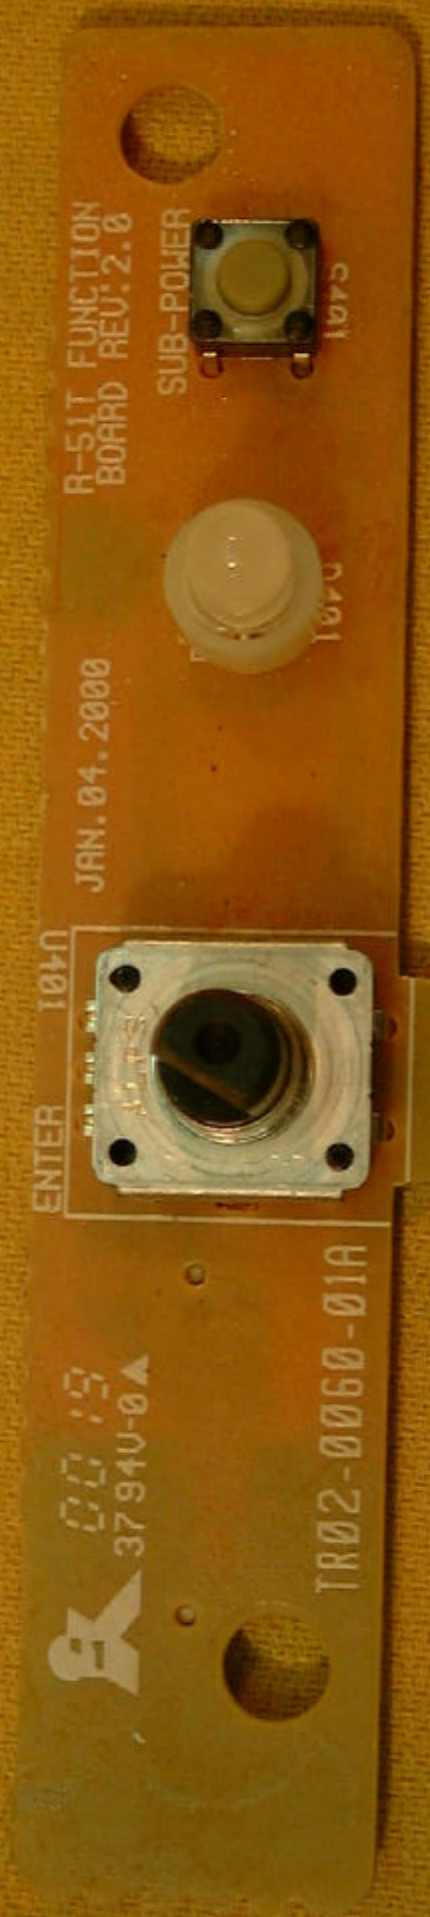

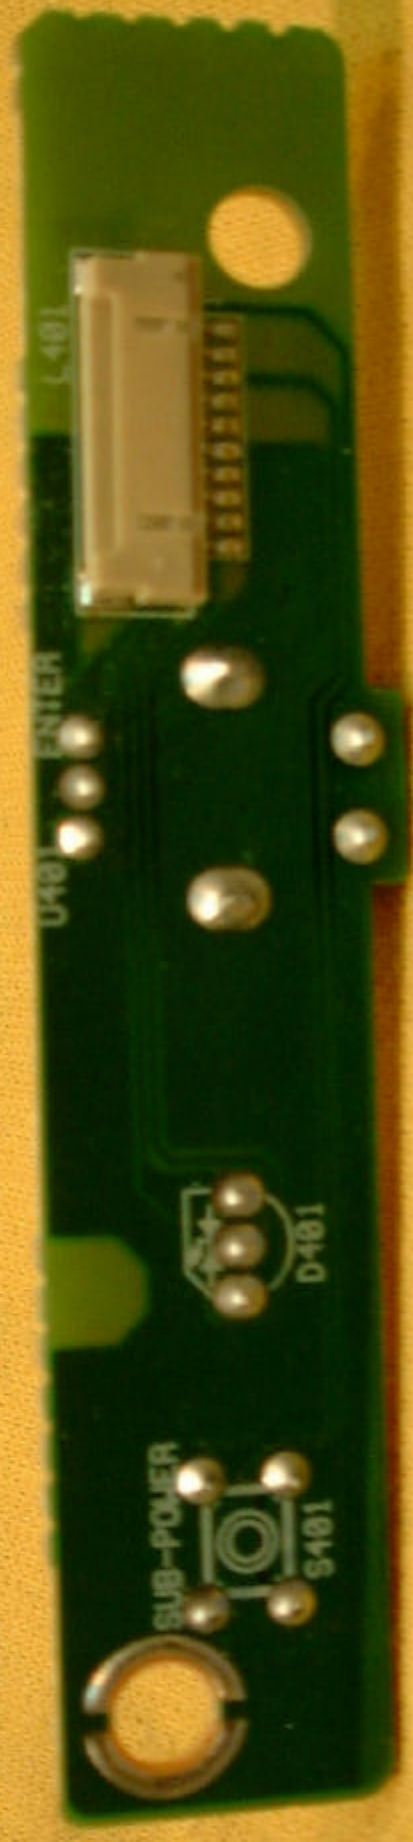



89071308



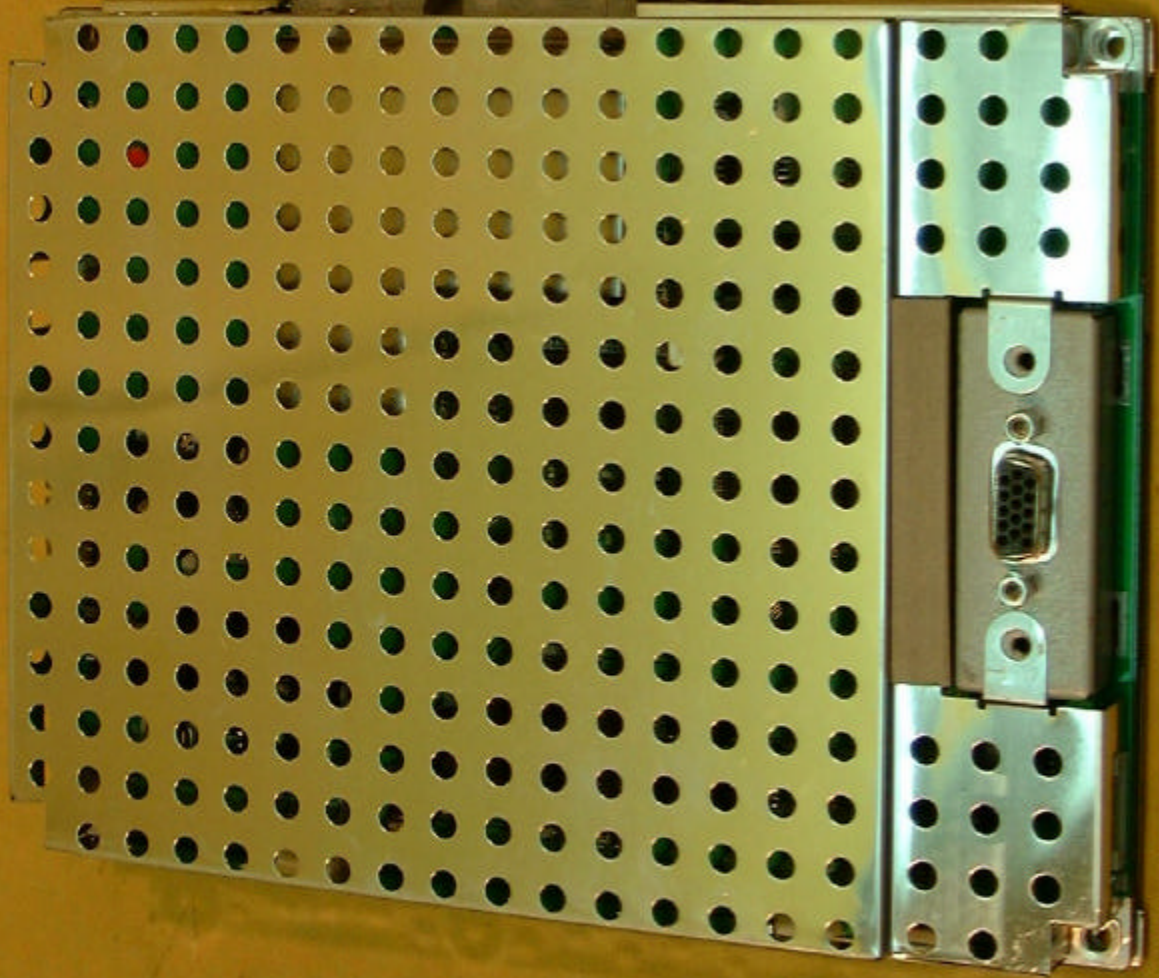


89071308



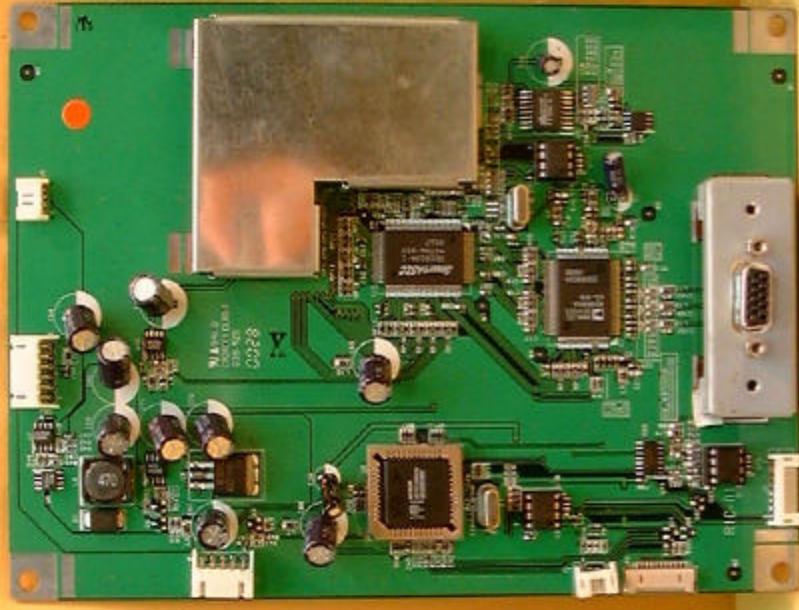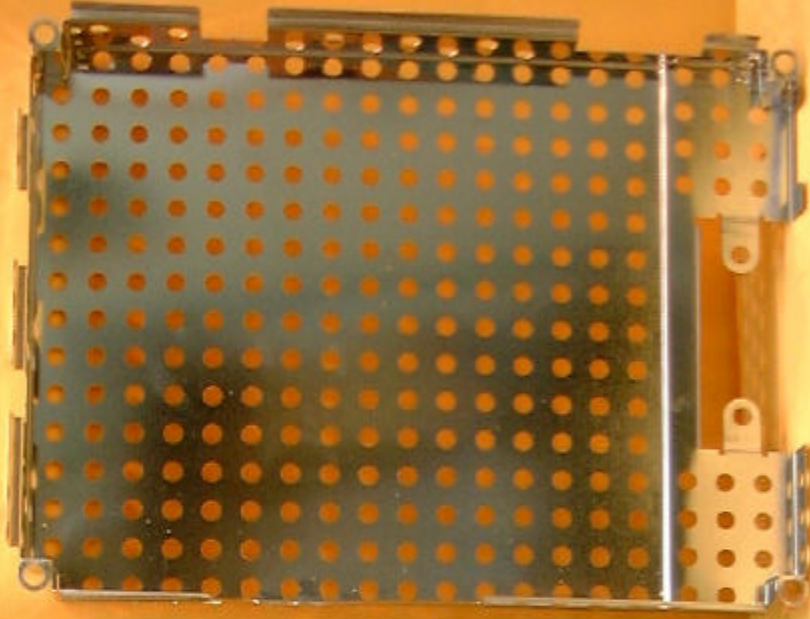


89071308

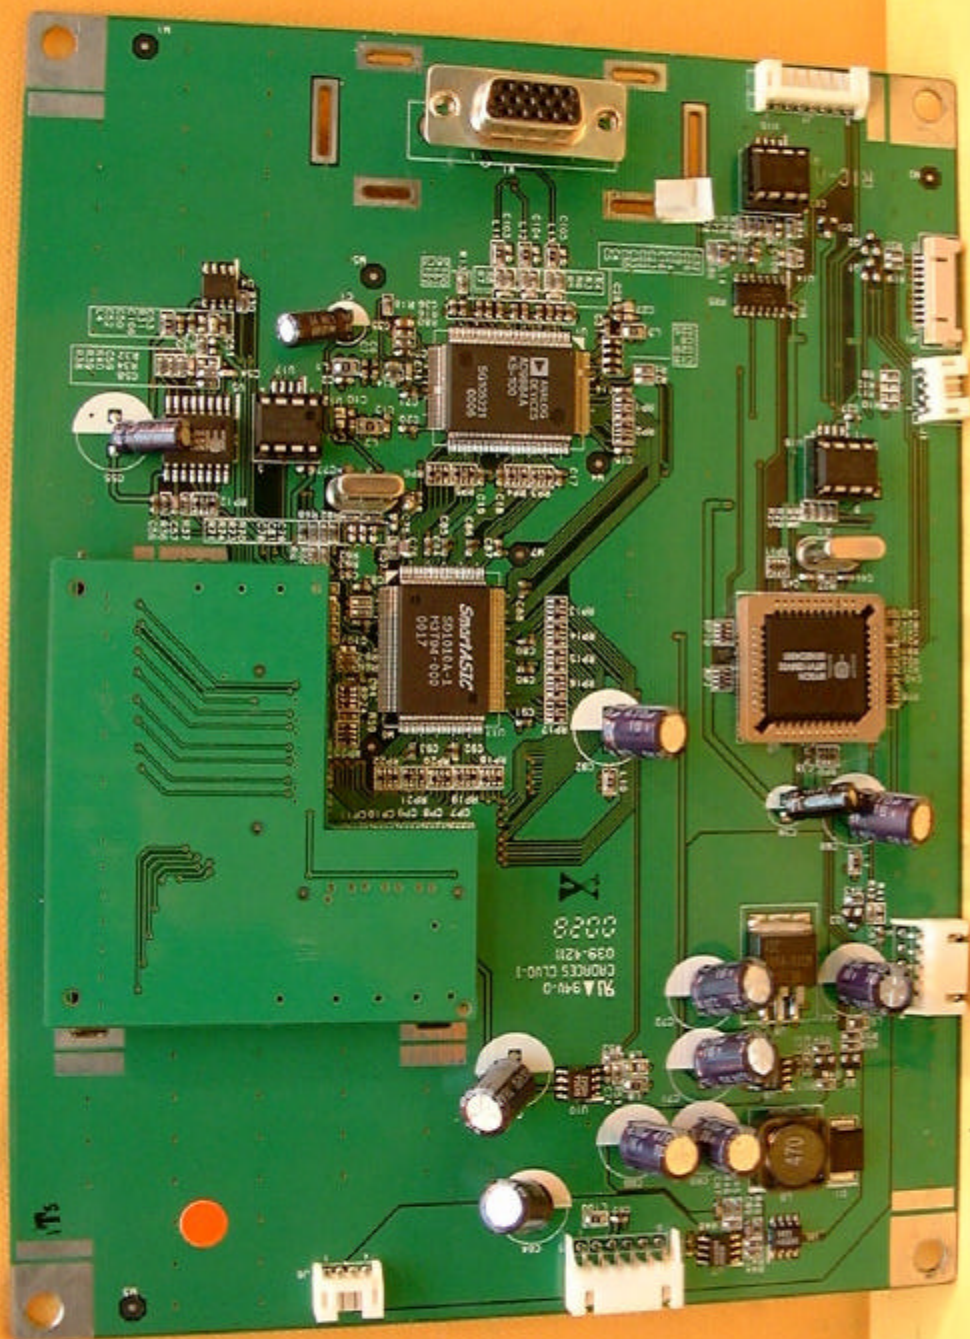


89071308




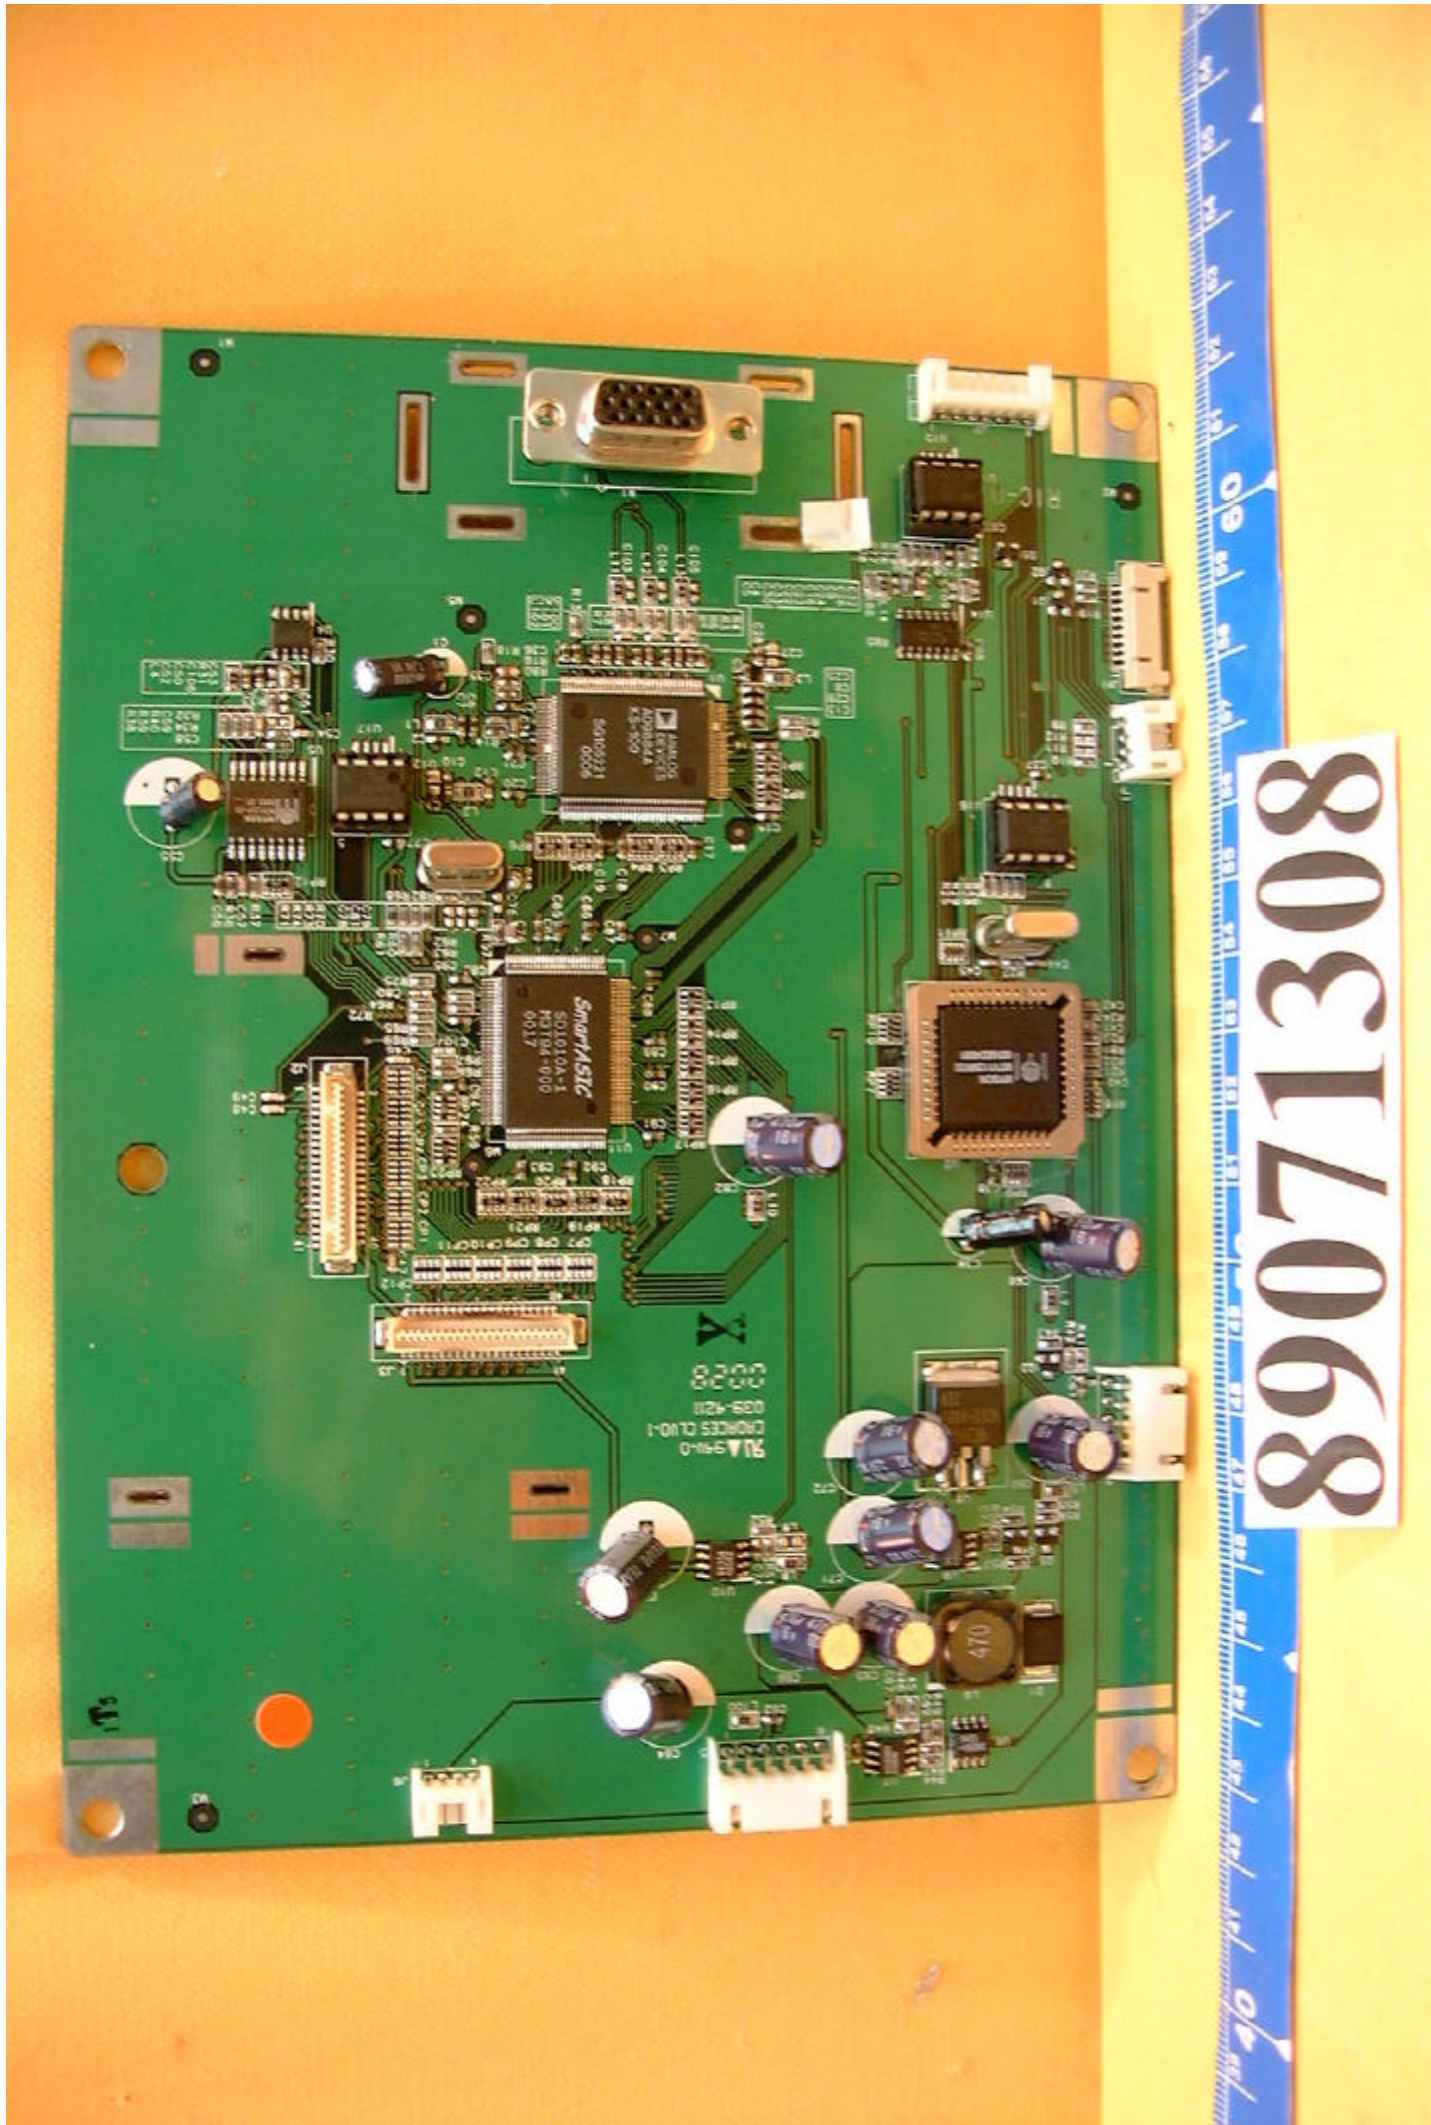

89071308


89071308

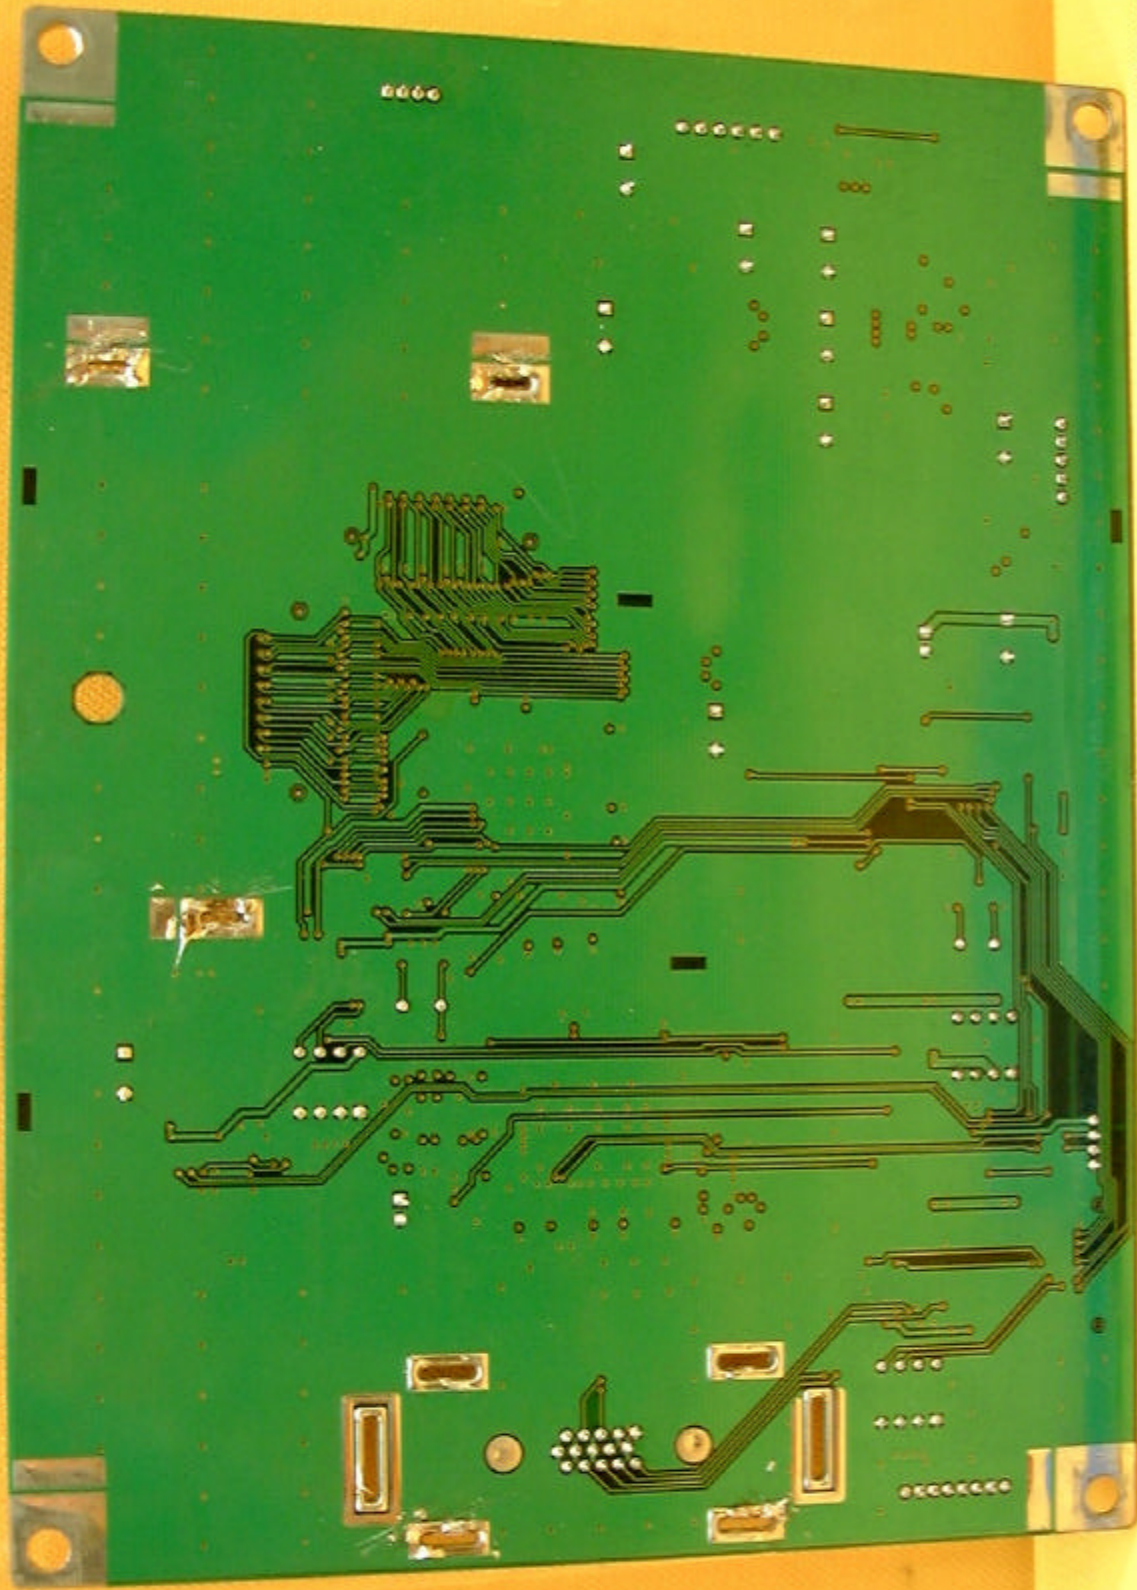

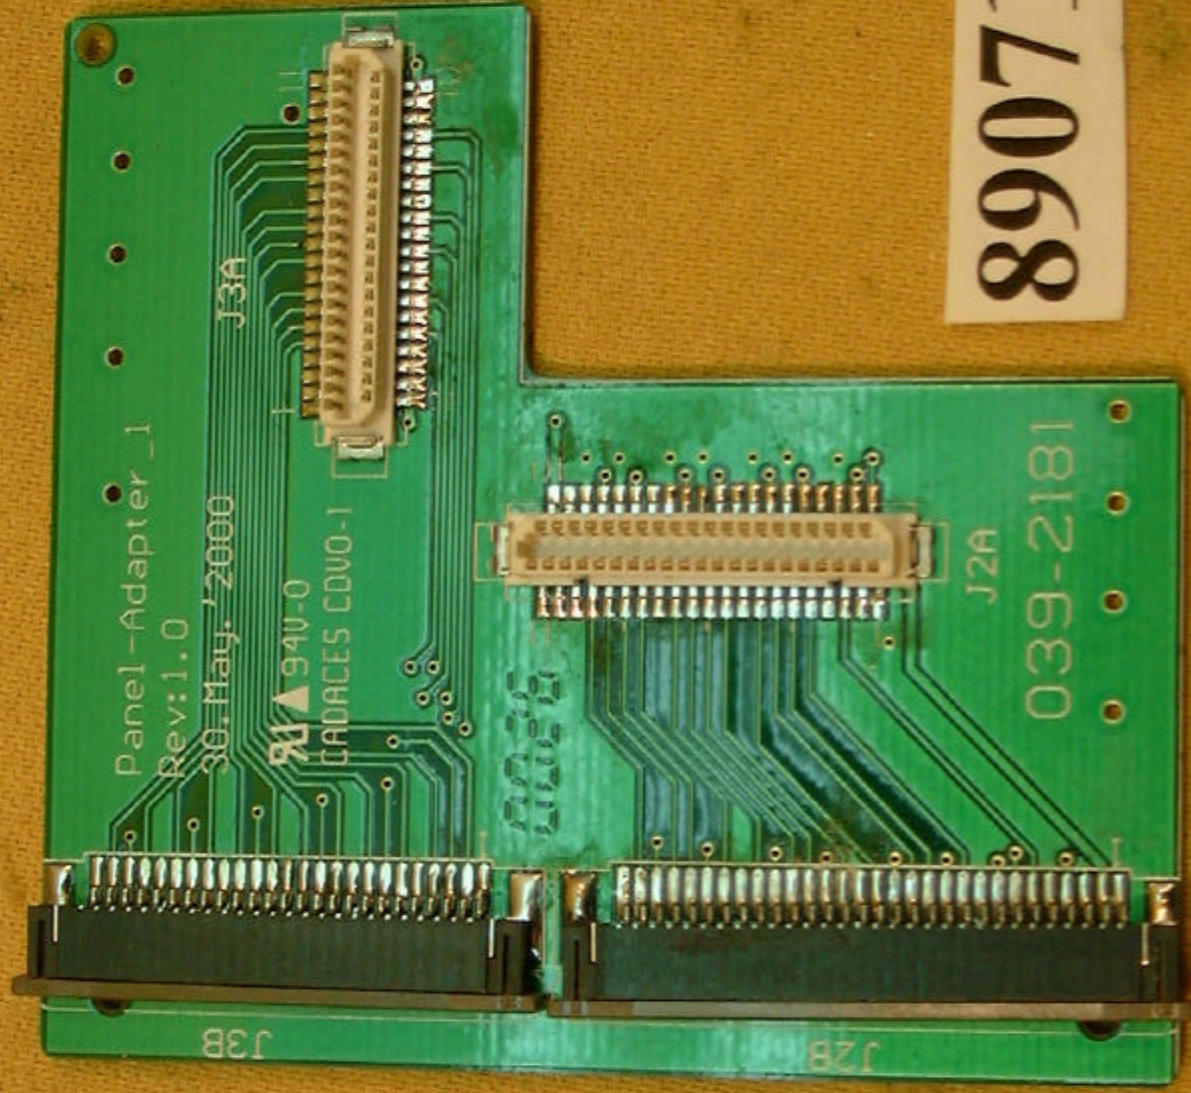

89071308

89071308

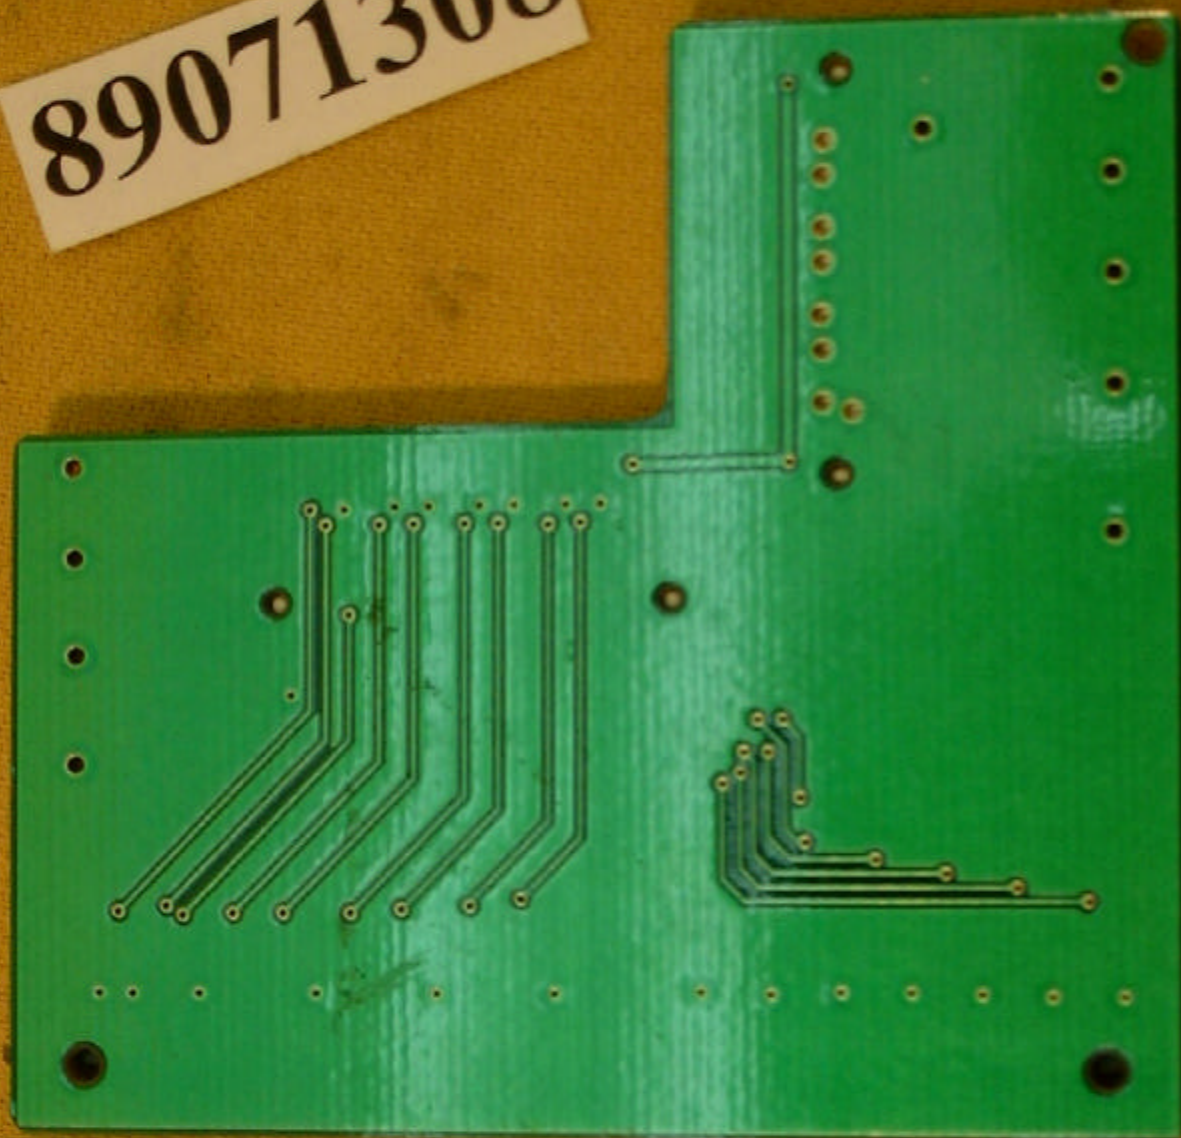

△ 注意
高圧注意
CAUTION
HIGH VOLTAGE


THE COLOR LED
CONTAINS COLD CATHODE
FLUORESCENT LAMPS PLEASE
FOLLOW LOCAL ORDINANCES
FOR DISPOSAL OF THIS
PRODUCT.

・本製品は、AC70-100V、50/60Hz
の電源で動作します。電源電圧が
規定値と異なる場合は、動作に
異常が生じます。

89071308



89071308

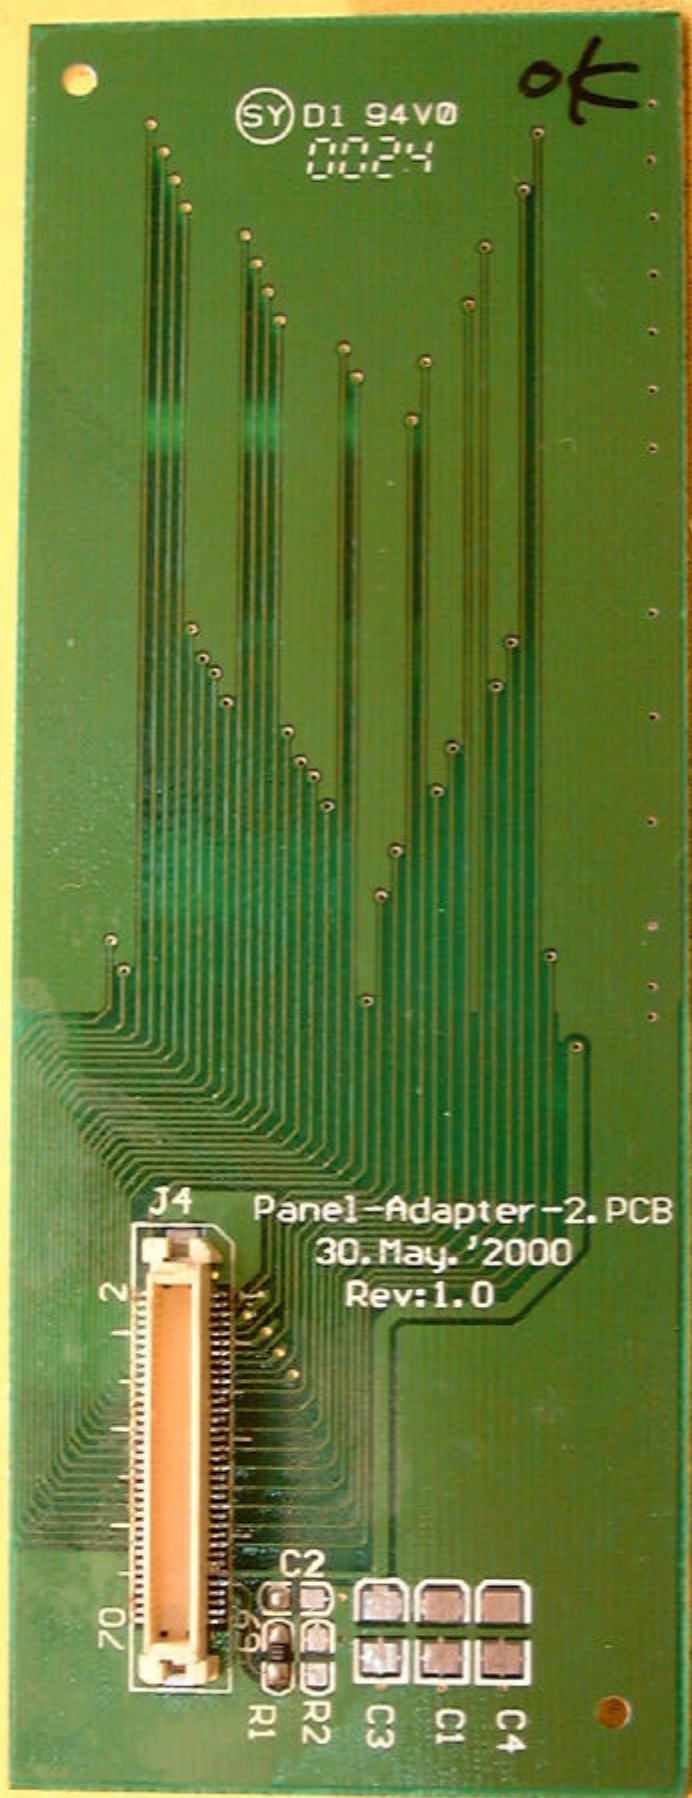

(SY) D1 94V0
0024

OK

J4
20 2
Panel-Adapter-2.PCB
30. May. '2000
Rev: 1.0

R1 R2 R3 R4
C1 C2 C3 C4

89071308

89071308



注意
警告
CAUTION
HIGH VOLTAGE

THE COLOR LCD
CONTAINS FLUORESCENT
TUBES WHICH MAY LEAK
TOXIC SUBSTANCES IF
FOLLOW LOCAL ORDINANCES
OR REGULATIONS FOR ITS
DISPOSAL.

液晶表示装置は蛍光管を
内蔵し、破損した場合、
有害物質を漏洩する
可能性があります。

89071308



89071308