



*A Tradition In Testing Services*

**Part 15, Class A Verification Report  
Emissions Test Report  
of the  
Digital Wireless Corporation  
HopNet HN-2000  
July 10, 1998  
UST Project No. 98-325**

**Total Number of Pages Contained Within This Report: 22**



A Tradition in Testing Services

I certify that I am authorized to sign for the manufacturer and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

**UNITED STATES TECHNOLOGIES, INC. (AGENT RESPONSIBLE FOR TEST):**

By: Timothy R. Johnson

Name: Timothy R. Johnson

Title: Lab Manager

Date: July 6, 1998

Digital Wireless Corporation  
One Meca Way  
Norcross, GA 30093

By: Paul Maziarzyk

Name: PAUL MAZIARCZYK

Title: SR. ELECTRONIC TECH

Date: 8-31-98

This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of U.S. Technologies. The results contained in this report are subject to the adequacy and representative character of the sample provided.



## **FCC CLASS A LABELING INFORMATION**

### **MANUAL**

(a) For a Class A digital device or peripheral, the user instructions must include the following or similar statement, placed in a prominent location in the text of the manual:

**NOTE:** This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

### **15.21 INFORMATION TO USER**

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### **15.27 SPECIAL ACCESSORIES**

Accessory items that can be readily obtained from multiple retail outlets are not considered to be special accessories and are not required to be marketed with the equipment. The manual included with the equipment must specify what additional components or accessories are required to be used in order to ensure compliance (i.e. shielded cables), and it is the responsibility of the user to provide and use those components and accessories.

### **15.19 LABELING REQUIREMENTS**

This device shall bear the following statement in a conspicuous location on the device:

#### **LABEL**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## **NOTICE TO CUSTOMERS SELLING DIGITAL DEVICES IN CANADA**

### **CANADIAN MANDATORY EMI REGULATION**

As of January 31, 1989, Canada has implemented mandatory EMI regulations which apply to every digital apparatus manufactured or imported into Canada as of January 31, 1989.

The technical requirements of the Canadian regulations are equivalent to the US FCC Part 15 and Canada will accept tests performed using the ANSI C63.4 procedure. Equipment compliant with FCC Part 15 is also compliant with the Canadian regulation. Canada does require a label be placed on equipment. Where because of insufficient space or other restrictions it is not feasible to affix a label to the apparatus, the notice may be in the form of a statement included in the user's manual.

The device shall bear the following statement in a conspicuous location:

"This (Class A/Class B)\* digital apparatus meets all requirements of the Canadian Interference Causing Equipment Regulations."

"Cet appareil numérique (de la classe A/de la classe B)\* respecte toutes les exigences du Règlement sur le matériel brouilleur du Canada."

It is recommended that the label be in both French and English, especially in French speaking areas of Canada.

\*Indicate only the class of digital apparatus which is appropriate for the specific application.

### **NOTICE FOR PRODUCTS WHICH CONTAIN A PREVIOUSLY APPROVED MODULAR TRANSMITTER/TRANSCIEVER**

In some cases, Industry Canada may require additional information regarding your approved transmitter/transceiver. If your company requires assistance with submittal of any information, please contact U.S. Tech at (770)740-0717.

## **EXHIBIT A EVALUATION REPORT**

### **A. DESCRIPTION OF EQUIPMENT UNDER TEST (EUT):**

The Equipment Under Test (EUT) is the Digital Wireless Corporation HopNet HN-2000. The HopNet HN-2000 is 2.4 GHz frequency hopping dual wireless modem repeater intended for demanding wireless data systems integration projects. The HN-2000 features high data rates (250 Kbps over-the-air) and long range (10 miles or longer) using both HopNet external antennas. The HN-2000 can be used to create complex extended range networks either point-to-point or multi-point, with either half or full duplex I/O rates up to 115.2 Kbps, asynchronous. The HN-2000 has a built-in rechargeable lead acid battery for continuous operation under intermittent power conditions. The HN-2000 can interoperate with all other HopNet series products, including the HN-1000/1500 wireless remotes/base modems and HN-3000 integrated wireless modem/antenna remote unit.

### **B. TEST PROCEDURE (GENERAL):**

The EUT was configured as shown in the following block diagram(s) and photograph(s). The sample was tested per ANSI C63.4, Methods of Measurement from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (1992). Conducted and radiated emissions data were taken with the test receiver or spectrum analyzer's resolution bandwidth adjusted to 9 kHz and 120 kHz, respectively. All measurements are peak unless stated otherwise. The video filter on the spectrum analyzer was OFF throughout the evaluation process. Interconnecting cables were manipulated as necessary to maximize emissions. Table A4 describes other instruments and accessories used to evaluate this product.

### **C. CHARACTERIZATION OF SAMPLE TESTED**

The sample used for testing was received by U.S. Technologies on July 7, 1998 in good condition.

### **D. EUT ELECTRICAL MODE OF OPERATION**

The primary mains voltage was 120 VAC, 60 Hz.

**E. TEST SOFTWARE**

Not Applicable

**F. TEST SITE:**

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA. This site has been fully described and submitted to the FCC, and accepted in their letter marked 31040/SIT. Additionally, this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number IC2982.

**G. MODIFICATIONS:**

No modifications were necessary to bring the EUT into compliance with FCC Rules and Regulations.


**H. TEST RESULTS:**

The worst-case radiated emission was 8.3 dB below the limit at 39.5 MHz. All other radiated emissions were at least 8.6 dB below the limit.

The worst-case line conducted emission was 22.0 dB below the limit at 0.5 MHz. All other conducted emissions were at least 23.0 dB below the limit.

TEST DATE: July 7, 1998  
UST PROJECT: 98-325  
CUSTOMER: Digital Wireless Corporation  
MODEL: HopNet HN-2000

Configuration of Tested System

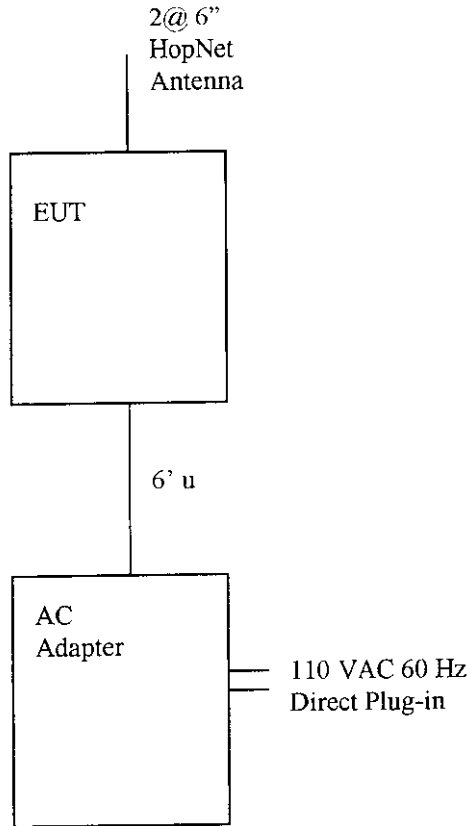

TEST DATE: July 7, 1998  
UST PROJECT: 98-325  
CUSTOMER: Digital Wireless Corporation  
MODEL: HopNet HN-2000

**EUT and Peripherals**

PERIPHERAL MANU.	MODEL NUMBER	SERIAL NUMBER	FCC ID:	CABLES P/D
EUT Digital Wireless Corporation	HopNet HN-2000	384-61	HSW-HN2000 (pending)	6' u 2@ 6" HopNet Antenna
AC Adapter Voltek	5-8313A	None	None	None



## TABLE A1. RADIATED EMISSIONS DATA

## CLASS A

TEST DATE: July 7, 1998  
 UST PROJECT: 98-325  
 CUSTOMER: Digital Wireless Corporation  
 MODEL: HopNet HN-2000

FREQ. (MHz)	TEST DATA (dBm) @ 10m	ANTENNA FACTOR + CABLE ATTEN.	RESULTS (uV/m) @ 10m	LIMITS (uV/m) @ 10m	MARGIN BELOW LIMIT (dB)
36.8	-90.0	13.4	33.3	90.0	8.6
39.5	-89.0	12.8	34.7	90.0	8.3
151.1	-92.0	15.1	31.9	150.0	13.4
154.0	-92.0	15.3	32.7	150.0	13.2
156.3	-92.0	15.4	33.3	150.0	13.1

## SAMPLE CALCULATIONS:

RESULTS uV/m @ 10m =

Antilog  $((-90.0 + 13.4 + 107)/20) = 33.3$

CONVERSION FROM dBm TO dBuV = 107 dB

Tested by

Signature: 

Name: Erik D. Collins

## TABLE A2. CONDUCTED EMISSIONS DATA

## CLASS A

TEST DATE: July 7, 1998  
 UST PROJECT: 98-325  
 CUSTOMER: Digital Wireless Corporation  
 MODEL: HopNet HN-2000

FREQ. (MHz)	TEST DATA (dBm)		RESULTS (uV)		FCC LIMITS (uV)	MARGIN BELOW LIMIT (dB) PHASE	MARGIN BELOW LIMITS (dB) NEUTRAL
	PHASE	NEUTRAL	PHASE	NEUTRAL			
0.52	-69.0	-70.0	79.4	70.8	1000.0	22.0	23.0
1.0	-75.0	-72.0	39.8	56.2	1000.0	28.0	25.0
4.5	-69.0	-69.0	79.4	79.4	3000.0	31.5	31.5
4.6	-67.0	-71.0	100.0	63.1	3000.0	29.5	33.5
7.0	-67.0	-63.0	100.0	158.5	3000.0	29.5	25.5
7.1	-67.0	-63.0	100.0	158.5	3000.0	29.5	25.5

## SAMPLE CALCULATIONS:

RESULTS uV =  
 $\text{Antilog}((-69.0 + 107)/20) = 79.4$   
 CONVERSION FROM dBm TO dBuV = 107 dB

Tested by  
 Signature: 

Name: Erik D. Collins

TABLE A4. INSTRUMENTS AND ACCESSORIES

TYPE	SPECIFICATIONS	MANUFACTURER	MODEL
SPECTRUM ANALYZER	.1- 1300 MHz	HEWLETT-PACKARD	8558B
SPECTRUM ANALYZER	.1 - 1500 MHz	HEWLETT-PACKARD	8558B
SPECTRUM ANALYZER	9 KHz - 22 GHz	HEWLETT-PACKARD	8593E
COMB GENERATOR		HEWLETT-PACKARD	8406A
TEST RECEIVER	20 - 1000 MHz	ROHDE & SCHWARZ	ESV
RF PREAMP	1 - 26.5 GHz	HEWLETT-PACKARD	8449B
LISN 8012-50-R-24-BNC	120V	SOLAR ELE.	8012
BILOG ANTENNA	30 MHz - 2 GHz	CHASE	6112A
LISN (x 2) 8028-50-TS24-BNC	600V	SOLAR ELE.	8028
BICON	30-3000 MHz	EMCO	3110B
LOG PERIODIC	200-1000 MHz	EMCO	3146

## **B. FCC Measurement Report**

## **B. FCC Measurement Report**

### **I. Description Of The EUT**

The EUT is a Digital Wireless Model WIT2400M modular frequency hopping, spread spectrum, nominal 100 mW transceiver intended for data-link applications in the 2400 - 2483.5 band.

## II. Test Procedure and Results

Digital Wireless is requesting a modular approval on their transceiver unit. The transceiver portion of this equipment has been certified in other configurations under FCC ID: HSW-WIT2400E, date of grant 6/19/96. Since only minor electrical or mechanical changes have been made to the transceiver portion, a complete retest was not necessary. New data has been supplied for the AC Power-Line Conducted Emissions, Spurious Radiated Emissions, and General Radiated Emissions. All other test data has been provided from the original submittal by Digital Wireless.

### Antenna (Paragraph 15.203)

The WIT2400M incorporates a MMCX-50-0-1 jack at the bulkhead of the transceiver.

The following types of antennas were tested with the EUT:

<u>Antenna Type</u>	<u>Manufacture</u>	<u>Model</u>	<u>Gain</u>	<u>Type of Connector</u>
Dipole	Ace Antenna	2400	2 dBi	SMA
DWC Patch	Digital Wireless	A-7030-0192	6 dBi	MMCX-50-0-1
Parabolic	Hyperlink Tech	HG2424G	24 dBi	N
Yagi	Cushcraft	PC2415N	15 dBi	N
Patch	Dynatech	1085018	11 dBi	TNC
Gain Omni	Mobile Mark	244509	9 dBi	N

Digital Wireless had to provide a special pigtail to mate each antenna to the EUT for the purpose of testing. Digital Wireless has provided additional information on how the requirements of 15.203 will be satisfied in the final product.

### Channel Carrier Bandwidth (Paragraph 15.247 (a)(1)(ii))

The Digital Wireless Model WIT2400M employs a minimum of 80 frequencies in the 2400-2483.5 MHz band. Figure 1 is a plot of multiple-sweep spectrum analyzer display having a 10 MHz/Div horizontal scale, 10 dB/Div vertical scale taken with a 100 kHz resolution bandwidth at 100 mS/Div sweep rate. Storage time was a nominal 5 minutes.

The plot shows that the emissions remain within the 2400-2483.5 MHz band.

Figures 2-4 are plots of the occupied bandwidth for low, medium, and high channels. The 20 dB downpoints from the carrier are within the 1 MHz channel bandwidth limits.

A justification of the nominal dwell time over a 30 second period is given by Digital Wireless on the following page(s). This justification shows that the occupancy time on each channel during a 30 second interval is less than the allowed 400 mSec.

## Test Procedure and Results Continued

### Peak Power (Paragraph 15.247(b))

Power was measured using an HP 8593E spectrum analyzer. Maximum measured power was +18.7 dBm or 74.1 mW. Peak power measurements for low, medium, and high channels are shown in Figures 5 - 7.

### Spurious Emissions - Conducted (Paragraph 15.247(c))

Radio frequency power in any 100 kHz bandwidth produced by the modulation products, the information sequence, and the carrier was greater than 20 dB below the 100 kHz band containing maximum power. Data was taken at three frequencies corresponding to low, mid and high channels and is shown in Figures 8 - 19.

### Spurious Emissions - Radiated (Paragraph 15.247(c))

With the transmitter operating using each antenna, radiated spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to low, mid and high channels in the 2400 - 2483.5 MHz band. The results of peak radiated spurious emissions are given in Figure 20 through Figure 73 and Table 1A through Table 11C (odd numbered only). The results of average spurious emissions are given in Table 2A through Table 12C (even numbered only).

### Power Line - Conducted (Paragraph 15.207(a))

Conducted voltage measurements in the frequency range 0.45 - 30 MHz

The conducted voltage measurements have been carried out in accordance with FCC Section 15.107, with a spectrum analyzer connected to a LISN. The results are given in Table 13.

### Radiated Emissions (Paragraph 15.109(a))

Radiated field strength measurements in the frequency range 30 - 1000 MHz.

The radiated field strength measurements have been carried out in accordance with FCC Section 15.109a and ANSI 63.4. See Figure 38 for the test setups. The test data was shown in Table 14. All correction factors, such as cable attenuation and antenna factors are included in the measuring results.

**B. FCC Measurement Report (continued)****III. Test Site**

Testing was performed at US Tech's measurement facility located at 3505 Francis Circle, Alpharetta, GA as described to and acknowledged by the FCC in the letter marked 31040/SIT/USTECH.

**IV. Modification**

No modifications were made by US Tech to bring the EUT in to compliance.

**V. Measuring Instruments**

Spectrum Analyzer	9 kHz - 22 GHz	HP 8593E
Amplifier	1 - 26.5 GHz	HP 8449B
Amplifier	1 - 22 GHz	HP 8449A
Amplifier	0.1 - 1300 MHz	HP 8447D
Biconical Antenna	30 - 300 MHz	EMCO 3110
Log Periodic Antenna	200 - 1000 MHz	EMCO 3146
Double Ridge Horn Guide	1 - 18 GHz	EMCO 3115
Double Ridge Horn Guide	18 - 40 GHz	EMCO 3116
LISN 8012-50-R-24-BNC	120 V	Solar Ele.
Plotter		HP 7475A
High Pass Filter	H3ROZOG2	Microwave Circuits



## EUT and Peripherals

Description	Model No.	Serial No.	FCC ID	Cable Description
EUT Digital Wireless	WIT2400M	None	HSW-2400M (Pending)	6' S
Lap Top Computer NEC Technologies	Prospeed 286	9200071HM	A3D5YRXB715A	6' U Power Cord
AC Adapter Cuistack	DV-1280	None	None	6' U

## EUT and Peripherals Continued

Antenna	Manufacturer	Model No.	Gain	Connector
Dipole	Ace Antenna	2400	2 dBi	SMA
DWC Patch	Digital Wireless	A-7030-0192	6 dBi	MMCX-50-0-1
Parabolic	Hyperlink Technologies	HG2424G	24 dBi	N
Yagi	Cushcraft	PC2415N	15 dBi	N
Patch	Dynatech	1085018	11 dBi	TNC
Gain Omni	Mobile mark	244509	9 dBi	N

**Table 1A. PEAK RADIATED SPURIOUS EMISSIONS (Low End)  
Model WIT2400M with Dipole Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.802	-67.0**	33.7	30.6	4.8	120.7	5000
7.203	-63.5**	33.9	36.6	6.2	417.3	5000
12.005	-65.1**	32.9	40.0	8.6	757.6	5000

**Table 1B. PEAK RADIATED SPURIOUS EMISSIONS (Middle)  
Model WIT2400M with Dipole Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.880	-67.2**	33.7	30.3	4.8	115.1	5000
7.320	-59.8**	33.9	36.9	6.3	665.3	5000
12.200	-61.8**	32.9	39.4	8.7	1052.0	5000

**Table 1C. PEAK RADIATED SPURIOUS EMISSIONS (High End)  
Model WIT2400M with Dipole Antenna**

Freq. (GHz)	Test Data* (dBm) @3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.960	-67.9**	33.7	30.0	4.9	103.6	5000
7.440	-62.1**	33.9	37.2	6.3	532.1	5000
12.400	-61.8**	32.9	38.9	8.8	997.7	5000

SAMPLE CALCULATION:

RESULTS (uV/m @ 3m) = Antilog ((-67.0 - 33.7 + 30.6 + 4.8 + 107)/20) = 120.7

CONVERSION FROM dBm TO dBuV = 107 dB

\* = Data adjusted by +1 dB for high pass filter

\*\* = Instrumentation ground floor.

**Table 2A. AVERAGE RADIATED SPURIOUS EMISSIONS (Low End)  
Model WIT2400M with Dipole Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.802	-76.6**	33.7	30.6	4.8	40.0	500
7.203	-73.1**	33.9	36.6	6.2	138.2	500
12.005	-74.7**	32.9	40.0	8.6	250.9	500

**Table 2B. AVERAGE RADIATED SPURIOUS EMISSIONS (Middle)  
Model WIT2400M with Dipole Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.880	-76.8**	33.7	30.3	4.8	38.1	500
7.320	-69.4**	33.9	36.9	6.3	220.3	500
12.200	-71.4**	32.9	39.4	8.7	348.3	500

**Table 2C. AVERAGE RADIATED SPURIOUS EMISSIONS (High End)  
Model WIT2400M with Dipole Antenna**

Freq. (GHz)	Test Data* (dBm) @3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.960	-77.5**	33.7	30.0	4.9	34.3	500
7.440	-71.7**	33.9	37.2	6.3	176.2	500
12.400	-71.4**	32.9	38.9	8.8	330.4	500

**SAMPLE CALCULATION:**

RESULTS (uV/m @ 3m) = Antilog  $((-76.6 - 33.7 + 30.6 + 4.8 + 107)/20) = 40.0$

CONVERSION FROM dBm TO dBuV = 107 dB

\* = Peak Data adjusted by +1 dB for high pass filter and worse case duty cycle by  $20 \log (.306) = -9.6\text{dB}$

\*\* = Instrumentation ground floor.

**Table 3A. PEAK RADIATED SPURIOUS EMISSIONS (Low End)**  
**Model WIT2400M with 6dBi DWC Patch Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.802	-68.0**	33.7	30.6	4.8	107.6	5000
7.203	-61.7**	33.9	36.6	6.2	513.4	5000
12.005	-61.1**	32.9	40.0	8.6	1200.7	5000

**Table 3B. PEAK RADIATED SPURIOUS EMISSIONS (Middle)**  
**Model WIT2400M with 6dBi DWC Patch Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.920	-67.9**	33.7	30.2	4.9	104.9	5000
7.400	-59.5**	33.9	37.1	6.3	707.9	5000
12.360	-60.9**	32.9	39.0	8.8	1118.4	5000

**Table 3C. PEAK RADIATED SPURIOUS EMISSIONS (High End)**  
**Model WIT2400M with 6dBi DWC Patch Antenna**

Freq. (GHz)	Test Data* (dBm) @3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.960	-67.5**	33.7	30.0	4.9	108.5	5000
7.440	-62.1**	33.9	37.2	6.3	532.1	5000
12.400	-61.7**	32.9	38.9	8.8	1009.3	5000

**SAMPLE CALCULATION:**

RESULTS (uV/m @ 3m) = Antilog ((-68.0 - 33.7 + 30.6 + 4.8 + 107)/20) = 107.6

CONVERSION FROM dBm TO dBuV = 107 dB

\* = Data adjusted by +1 dB for high pass filter

\*\* = Instrumentation ground floor.

**Table 4A. AVERAGE RADIATED SPURIOUS EMISSIONS (Low End)  
Model WIT2400M with 6dBi DWC Patch Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.802	-77.6**	33.7	30.6	4.8	35.6	500
7.203	-71.3**	33.9	36.6	6.2	170.0	500
12.005	-70.7**	32.9	40.0	8.6	397.6	500

**Table 4B. AVERAGE RADIATED SPURIOUS EMISSIONS (Middle)  
Model WIT2400M with 6dBi DWC Patch Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.920	-77.5**	33.7	30.2	4.9	34.7	500
7.400	-69.1**	33.9	37.1	6.3	234.4	500
12.360	-70.5**	32.9	39.0	8.8	370.3	500

**Table 4C. AVERAGE RADIATED SPURIOUS EMISSIONS (High End)  
Model WIT2400M with 6dBi DWC Patch Antenna**

Freq. (GHz)	Test Data* (dBm) @3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.960	-77.1**	33.7	30.0	4.9	35.9	500
7.440	-71.7**	33.9	37.2	6.3	176.2	500
12.400	-71.3**	32.9	38.9	8.8	334.2	500

SAMPLE CALCULATION:

RESULTS (uV/m @ 3m) = Antilog  $((-77.6 - 33.7 + 30.6 + 4.8 + 107)/20)$  = 35.6

CONVERSION FROM dBm TO dBuV = 107 dB

\* = Peak Data adjusted by +1 dB for high pass filter and worse case duty cycle by  $20 \log (.306) = -9.6\text{dB}$

\*\* = Instrumentation ground floor.

**Table 5A. PEAK RADIATED SPURIOUS EMISSIONS (Low End)**  
**Model WIT2400M with Parabolic Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.802	-67.9**	33.7	30.6	4.8	108.8	5000
7.203	-61.2**	33.9	36.6	6.2	543.8	5000
12.005	-61.5**	32.9	40.0	8.6	1146.6	5000

**Table 5B. PEAK RADIATED SPURIOUS EMISSIONS (Middle)**  
**Model WIT2400M with Parabolic Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.880	-67.9**	33.7	30.3	4.8	106.2	5000
7.320	-61.9**	33.9	36.9	6.3	522.4	5000
12.200	-61.9**	32.9	39.4	8.7	1039.9	5000

**Table 5C. PEAK RADIATED SPURIOUS EMISSIONS (High End)**  
**Model WIT2400M with Parabolic Antenna**

Freq. (GHz)	Test Data* (dBm) @3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.960	-67.4**	33.7	30.0	4.9	109.7	5000
7.440	-60.5**	33.9	37.2	6.3	639.7	5000
12.400	-62.7**	32.9	38.9	8.8	899.5	5000

SAMPLE CALCULATION:

RESULTS (uV/m @ 3m) = Antilog ((-67.9 - 33.7 + 30.6 + 4.8 + 107)/20) = 108.8

CONVERSION FROM dBm TO dBuV = 107 dB

\* = Data adjusted by +1 dB for high pass filter

\*\* = Instrumentation ground floor.

**Table 6A. AVERAGE RADIATED SPURIOUS EMISSIONS (Low End)  
Model WIT2400M with Parabolic Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.802	-77.5**	33.7	30.6	4.8	36.0	500
7.203	-70.8**	33.9	36.6	6.2	180.1	500
12.005	-71.1**	32.9	40.0	8.6	379.7	500

**Table 6B. AVERAGE RADIATED SPURIOUS EMISSIONS (Middle)  
Model WIT2400M with Parabolic Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.880	-77.5**	33.7	30.3	4.8	35.2	500
7.320	-71.5**	33.9	36.9	6.3	173.0	500
12.200	-71.5**	32.9	39.4	8.7	344.3	500

**Table 6C. AVERAGE RADIATED SPURIOUS EMISSIONS (High End)  
Model WIT2400M with Parabolic Antenna**

Freq. (GHz)	Test Data* (dBm) @3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.960	-77.0**	33.7	30.0	4.9	36.3	500
7.440	-70.1**	33.9	37.2	6.3	211.8	500
12.400	-72.3**	32.9	38.9	8.8	297.9	500

**SAMPLE CALCULATION:**

RESULTS (uV/m @ 3m) = Antilog  $((-77.5 - 33.7 + 30.6 + 4.8 + 107)/20)$  = 36.0

CONVERSION FROM dBm TO dBuV = 107 dB

\* = Peak Data adjusted by +1 dB for high pass filter and worse case duty cycle by  $20 \log (.306) = -9.6\text{dB}$

\*\* = Instrumentation ground floor.

**Table 7A. PEAK RADIATED SPURIOUS EMISSIONS (Low End)  
Model WIT2400M with Yagi Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.802	-68.0**	33.7	30.6	4.8	107.6	5000
7.203	-61.6**	33.9	36.6	6.2	519.3	5000
12.005	-60.7**	32.9	40.0	8.6	1257.3	5000

**Table 7B. PEAK RADIATED SPURIOUS EMISSIONS (Middle)  
Model WIT2400M with Yagi Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.880	-68.5**	33.7	30.3	4.8	99.1	5000
7.320	-60.7**	33.9	36.9	6.3	599.8	5000
12.200	-60.0**	32.9	39.4	8.7	1294.2	5000

**Table 7C. PEAK RADIATED SPURIOUS EMISSIONS (High End)  
Model WIT2400M with Yagi Antenna**

Freq. (GHz)	Test Data* (dBm) @3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.960	-66.8**	33.7	30.0	4.9	117.6	5000
7.440	-61.0**	33.9	37.2	6.3	603.9	5000
12.400	-62.0**	32.9	38.9	8.8	975.0	5000

**SAMPLE CALCULATION:**

RESULTS (uV/m @ 3m) = Antilog ((-68.0 - 33.7 + 30.6 + 4.8 + 107)/20) = 107.6

CONVERSION FROM dBm TO dBuV = 107 dB

\* = Data adjusted by +1 dB for high pass filter

\*\* = Instrumentation ground floor.



**Table 8A. AVERAGE RADIATED SPURIOUS EMISSIONS (Low End)  
Model WIT2400M with Yagi Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.802	-77.6**	33.7	30.6	4.8	35.6	500
7.203	-71.2**	33.9	36.6	6.2	172.0	500
12.005	-70.3**	32.9	40.0	8.6	416.3	500

**Table 8B. AVERAGE RADIATED SPURIOUS EMISSIONS (Middle)  
Model WIT2400M with Yagi Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.880	-78.1**	33.7	30.3	4.8	32.8	500
7.320	-70.3**	33.9	36.9	6.3	198.6	500
12.200	-69.6**	32.9	39.4	8.7	428.5	500

**Table 8C. AVERAGE RADIATED SPURIOUS EMISSIONS (High End)  
Model WIT2400M with Yagi Antenna**

Freq. (GHz)	Test Data* (dBm) @3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.960	-76.4**	33.7	30.0	4.9	38.9	500
7.440	-70.6**	33.9	37.2	6.3	200.0	500
12.400	-71.6**	32.9	38.9	8.8	322.8	500

**SAMPLE CALCULATION:**

RESULTS (uV/m @ 3m) = Antilog ((-77.6 - 33.7 + 30.6 + 4.8 + 107)/20) = 35.6

CONVERSION FROM dBm TO dBuV = 107 dB

\* = Peak Data adjusted by +1 dB for high pass filter and worse case duty cycle by  
20 log (.306) = - 9.6dB

\*\* = Instrumentation ground floor.

**Table 9A. PEAK RADIATED SPURIOUS EMISSIONS (Low End)**  
**Model WIT2400M with 11dBi Patch Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.802	-68.2**	33.7	30.6	4.8	105.1	5000
7.203	-62.6**	33.9	36.6	6.2	462.9	5000
12.005	-61.5**	32.9	40.0	8.6	1146.6	5000

**Table 9B. PEAK RADIATED SPURIOUS EMISSIONS (Middle)**  
**Model WIT2400M with 11dBi Patch Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.880	-67.7**	33.7	30.3	4.8	108.7	5000
7.320	-60.3**	33.9	36.9	6.3	628.1	5000
12.200	-61.5**	32.9	39.4	8.7	1088.9	5000

**Table 9C. PEAK RADIATED SPURIOUS EMISSIONS (High End)**  
**Model WIT2400M with 11dBi Patch Antenna**

Freq. (GHz)	Test Data* (dBm) @3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.960	-68.1**	33.7	30.0	4.9	101.3	5000
7.440	-60.7**	33.9	37.2	6.3	625.2	5000
12.400	-62.0**	32.9	38.9	8.8	975.0	5000

SAMPLE CALCULATION:

RESULTS (uV/m @ 3m) = Antilog ((-68.2 - 33.7 + 30.6 + 4.8 + 107)/20) = 105.1

CONVERSION FROM dBm TO dBuV = 107 dB

\* = Data adjusted by +1 dB for high pass filter

\*\* = Instrumentation ground floor.

**Table 10A. AVERAGE RADIATED SPURIOUS EMISSIONS (Low End)  
Model WIT2400M with 11dBi Patch Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.802	-77.8**	33.7	30.6	4.8	35.6	500
7.203	-72.2**	33.9	36.6	6.2	172.0	500
12.005	-71.1**	32.9	40.0	8.6	416.3	500

**Table 10B. AVERAGE RADIATED SPURIOUS EMISSIONS (Middle)  
Model WIT2400M with 11dBi Patch Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.880	-77.3**	33.7	30.3	4.8	36.0	500
7.320	-69.9**	33.9	36.9	6.3	208.0	500
12.200	-71.7**	32.9	39.4	8.7	360.6	500

**Table 10C. AVERAGE RADIATED SPURIOUS EMISSIONS (High End)  
Model WIT2400M with 11dBi Patch Antenna**

Freq. (GHz)	Test Data* (dBm) @3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.960	-77.3**	33.7	30.0	4.9	33.5	500
7.440	-70.3**	33.9	37.2	6.3	207.0	500
12.400	-71.6**	32.9	38.9	8.8	322.8	500

SAMPLE CALCULATION:

RESULTS (uV/m @ 3m) = Antilog  $((-77.8 - 33.7 + 30.6 + 4.8 + 107)/20) = 34.8$

CONVERSION FROM dBm TO dBuV = 107 dB

\* = Peak Data adjusted by +1 dB for high pass filter and worse case duty cycle by  
 $20 \log (.306) = -9.6\text{dB}$

\*\* = Instrumentation ground floor.

**Table 11A. PEAK RADIATED SPURIOUS EMISSIONS (Low End)**  
**Model WIT2400M with dBi Omnidirectional Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.802	-68.2**	33.7	30.6	4.8	105.1	5000
7.203	-61.9**	33.9	36.6	6.2	501.7	5000
12.005	-61.6**	32.9	40.0	8.6	1133.5	5000

**Table 11B. PEAK RADIATED SPURIOUS EMISSIONS (Middle)**  
**Model WIT2400M with dBi Omnidirectional Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.880	-67.6**	33.7	30.3	4.8	110.0	5000
7.320	-60.9**	33.9	36.9	6.3	586.1	5000
12.200	-62.2**	32.9	39.4	8.7	1004.6	5000

**Table 11C. PEAK RADIATED SPURIOUS EMISSIONS (High End)**  
**Model WIT2400M with dBi Omnidirectional Antenna**

Freq. (GHz)	Test Data* (dBm) @3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.960	-67.8**	33.7	30.0	4.9	104.8	5000
7.440	-60.0**	33.9	37.2	6.3	671.6	5000
12.400	-62.3**	32.9	38.9	8.8	941.9	5000

**SAMPLE CALCULATION:**

RESULTS (uV/m @ 3m) = Antilog ((-68.2 - 33.7 + 30.6 + 4.8 + 107)/20) = 105.1

CONVERSION FROM dBm TO dBuV = 107 dB

\* = Data adjusted by +1 dB for high pass filter

\*\* = Instrumentation ground floor.

**Table 12A. AVERAGE RADIATED SPURIOUS EMISSIONS (Low End)  
Model WIT2400M with dBi Omnidirectional Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.802	-77.8**	33.7	30.6	4.8	35.6	500
7.203	-71.5**	33.9	36.6	6.2	172.0	500
12.005	-71.2**	32.9	40.0	8.6	416.3	500

**Table 12B. AVERAGE RADIATED SPURIOUS EMISSIONS (Middle)  
Model WIT2400M with dBi Omnidirectional Antenna**

Freq. (GHz)	Test Data* (dBm) @ 3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.880	-77.2**	33.7	30.3	4.8	36.4	500
7.320	-70.5**	33.9	36.9	6.3	194.1	500
12.200	-71.8**	32.9	39.4	8.7	332.7	500

**Table 12C. AVERAGE RADIATED SPURIOUS EMISSIONS (High End)  
Model WIT2400M with dBi Omnidirectional Antenna**

Freq. (GHz)	Test Data* (dBm) @3m	Amp. Gain (dB)	Antenna Factor (dB)	Cable Loss (dB)	Results (uV/m) 3m	FCC Limits (uV/m)
4.960	-77.4**	33.7	30.0	4.9	34.7	500
7.440	-69.6**	33.9	37.2	6.3	224.4	500
12.400	-71.9**	32.9	38.9	8.8	311.9	500

**SAMPLE CALCULATION:**

RESULTS (uV/m @ 3m) = Antilog  $((-77.8 - 33.7 + 30.6 + 4.8 + 107)/20)$  = 34.8

CONVERSION FROM dBm TO dBuV = 107 dB

\* = Peak Data adjusted by +1 dB for high pass filter and worse case duty cycle by  $20 \log (.306) = -9.6\text{dB}$

\*\* = Instrumentation ground floor.

## TABLE 13. CONDUCTED EMISSIONS DATA

## CLASS B

TEST DATE: April 28, 1997  
 UST PROJECT: 97-183  
 CUSTOMER: Digital Wireless  
 PRODUCT: Model WIT2400M

FREQUENCY (MHz)	TEST DATA (dBm)		RESULTS (uV)		FCC LIMITS (uV)
	PHASE	NEUTRAL	PHASE	NEUTRAL	
0.45	-66.0*	-66.0*	112.2	112.2	250
2.6	-65.5*	-63.0*	118.9	158.5	250
3.8	-79.7	-77.0	23.2	31.6	250
4.4	-81.6	-80.6	18.6	20.9	250
16.5	-85.7	-87.2	11.6	9.8	250
20.0	-78.6	-77.7	26.3	29.2	250

\* = QUASI PEAK

SAMPLE CALCULATION:

RESULTS uV = Antilog  $((-66.0 + 107)/20) = 112.2$

CONVERSION FROM dBm TO dBuV = 107 dB

Tester

Signature: Tim Johnson

Name: Tim Johnson

**TABLE 14. RADIATED EMISSIONS DATA**  
**CLASS B**


**TEST DATE:** April 28, 1997  
**UST PROJECT:** 97-183  
**CUSTOMER:** Digital Wireless  
**PRODUCT:** Model WIT2400M

Frequency (MHz)	Polarity (V/H)	Receiver Reading (dBm) @ 3m	Correction Factor (dB)	Corrected Reading (uV/m)	3 Meter Limit (uV/m)
30.0	V	-90.0	16.2	45.7	100
54.0	V	-84.0*	11.7	54.1	100
66.0	V	-85.0*	11.1	45.3	100
143.9	H	-83.0*	15.0	88.7	150
180.0	V	-90.0	16.2	45.7	150
252.0	H	-87.0	16.4	66.0	200

\* = Quasi Peak

**SAMPLE CALCULATION:**

RESULTS uV/m @ 3m = Antilog  $((-90.0 + 16.2 + 107)/20)$  = 45.7 uV/m  
 CONVERSION FROM dBm TO dBuV = 107 dB

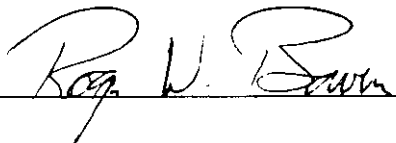**Tester**  
**Signature:**  **Name:** Roger Bowen

**Figure 1**  
**2400-2483.5 Band Occupancy 15.247(1)(i)**  
From Submittal for FCC ID: HSW-WIT2400E

10:48:44 MAY 16, 1997  
DIGITAL WIRELESS WIT 2400M  
REF 30.0 dBm    ATTEN 40 dB


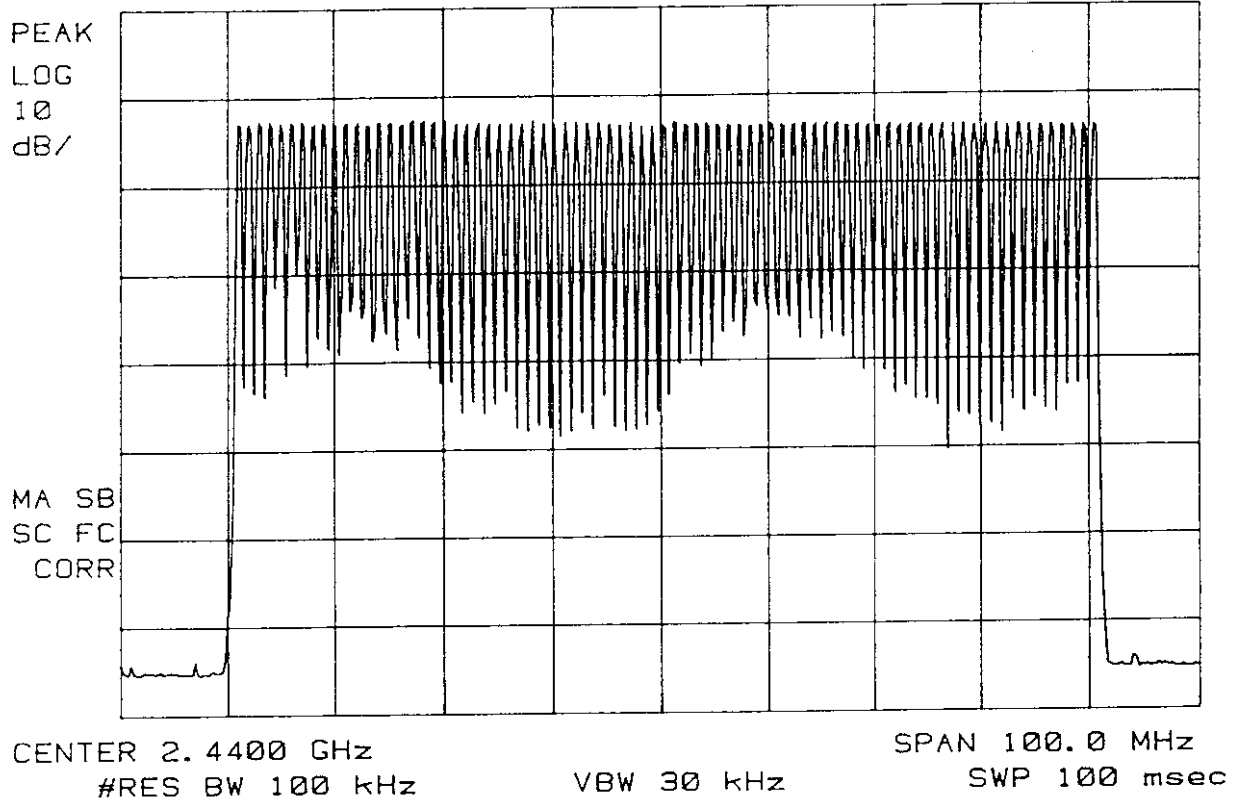




Figure 2  
20 dB Band 15.47(a)(ii) Low  
From Submittal for FCC ID: HSW-WIT2400E

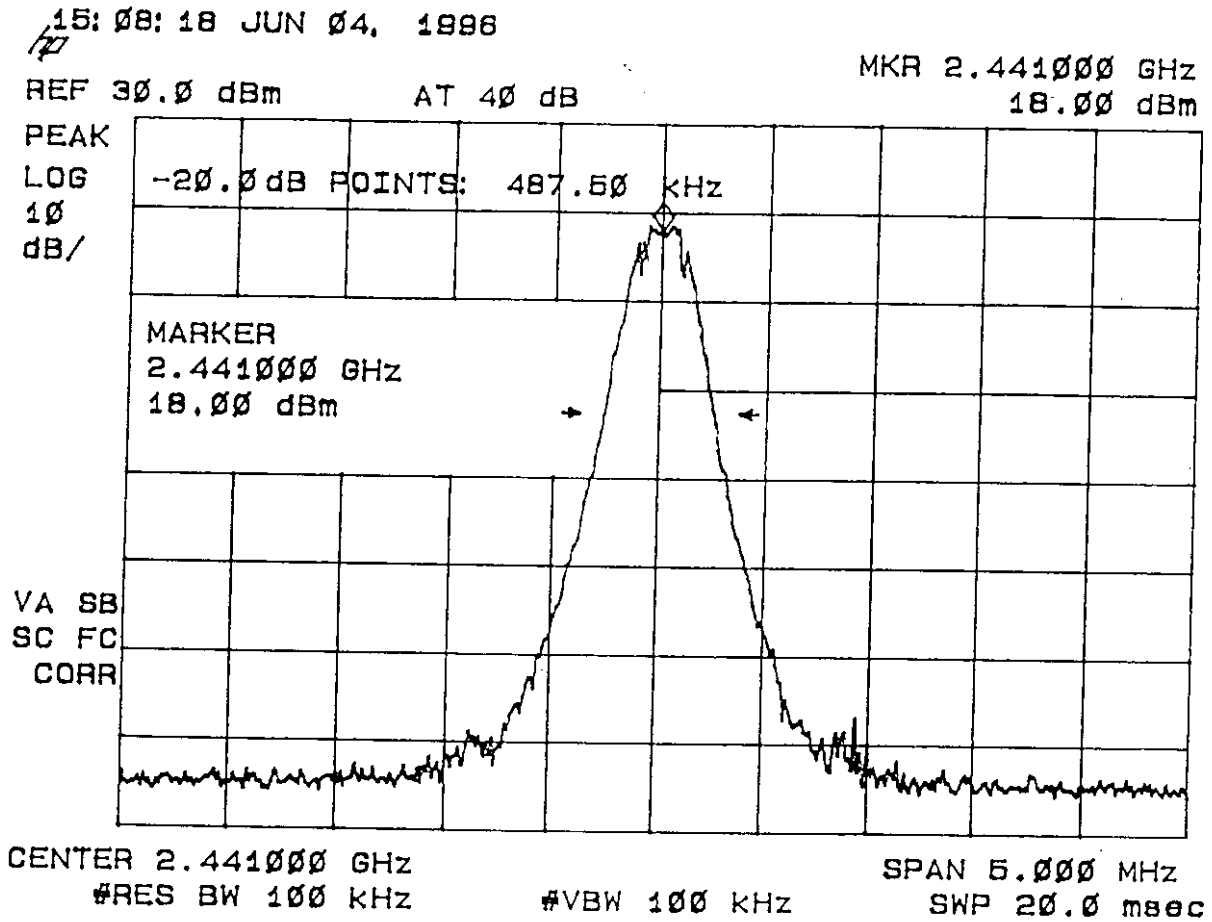

**Figure 3**  
**20 dB Band 15.247(a)(ii) Middle**  
From Submittal for FCC ID: HSW-WIT2400E


15:05:18 JUN 04, 1996

MKR 2.401000 GHz

REF 30.0 dBm

AT 40 dB

18.06 dBm

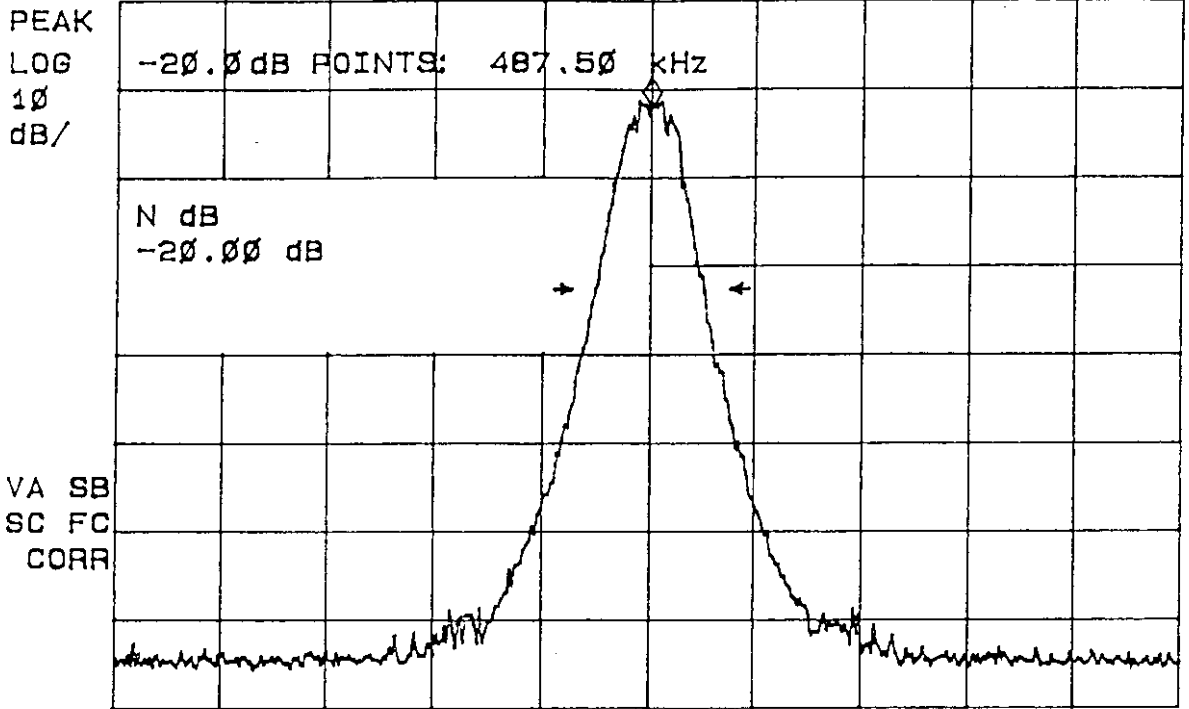

CENTER 2.401000 GHz

#RES BW 100 kHz

#VBW 100 kHz

SPAN 5.000 MHz

SWP 20.0 msec

**Figure 4**  
**20 dB Band 15.247(a)(ii) High**  
From Submittal for FCC ID: HSW-WIT2400E

15: 11: 15 JUN 04, 1996

~~10~~


MKR 2.482000 GHz

REF 30.0 dBm

AT 40 dB

17.82 dBm

PEAK  
LOG  
10  
dB/

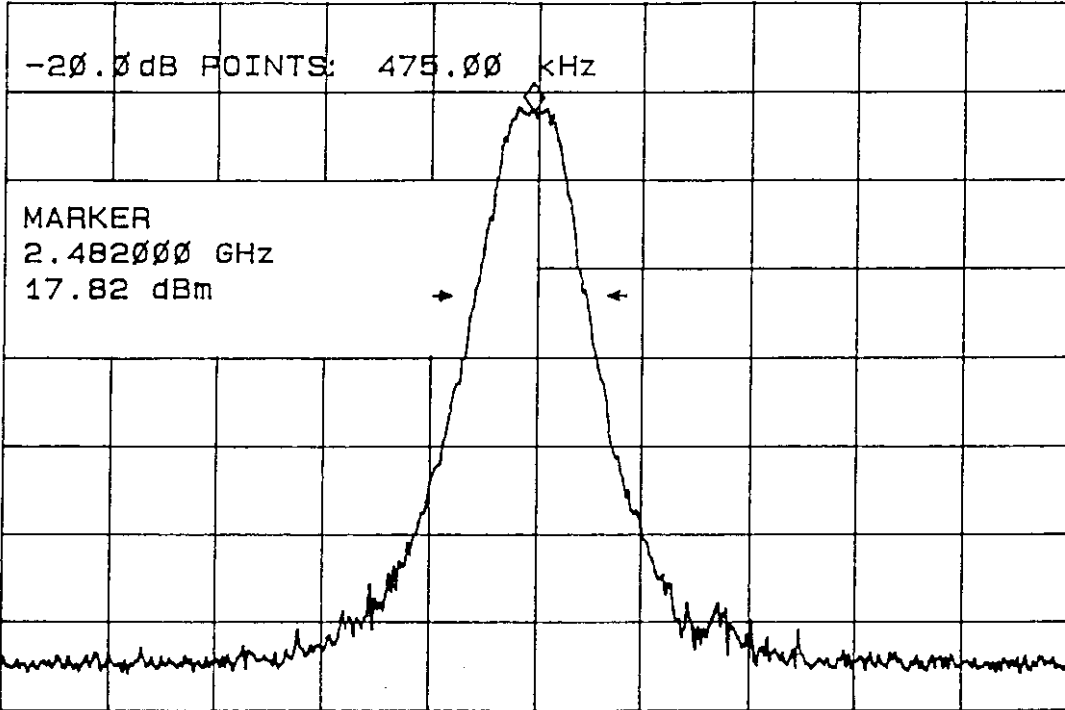

CENTER 2.482025 GHz

#RES BW 100 kHz

#VBW 100 kHz

SPAN 5.000 MHz

SWP 20.0 msec

Figure 5  
Peak Power 15.247 (b)Low  
From Submittal for FCC ID: HSW-WIT2400E

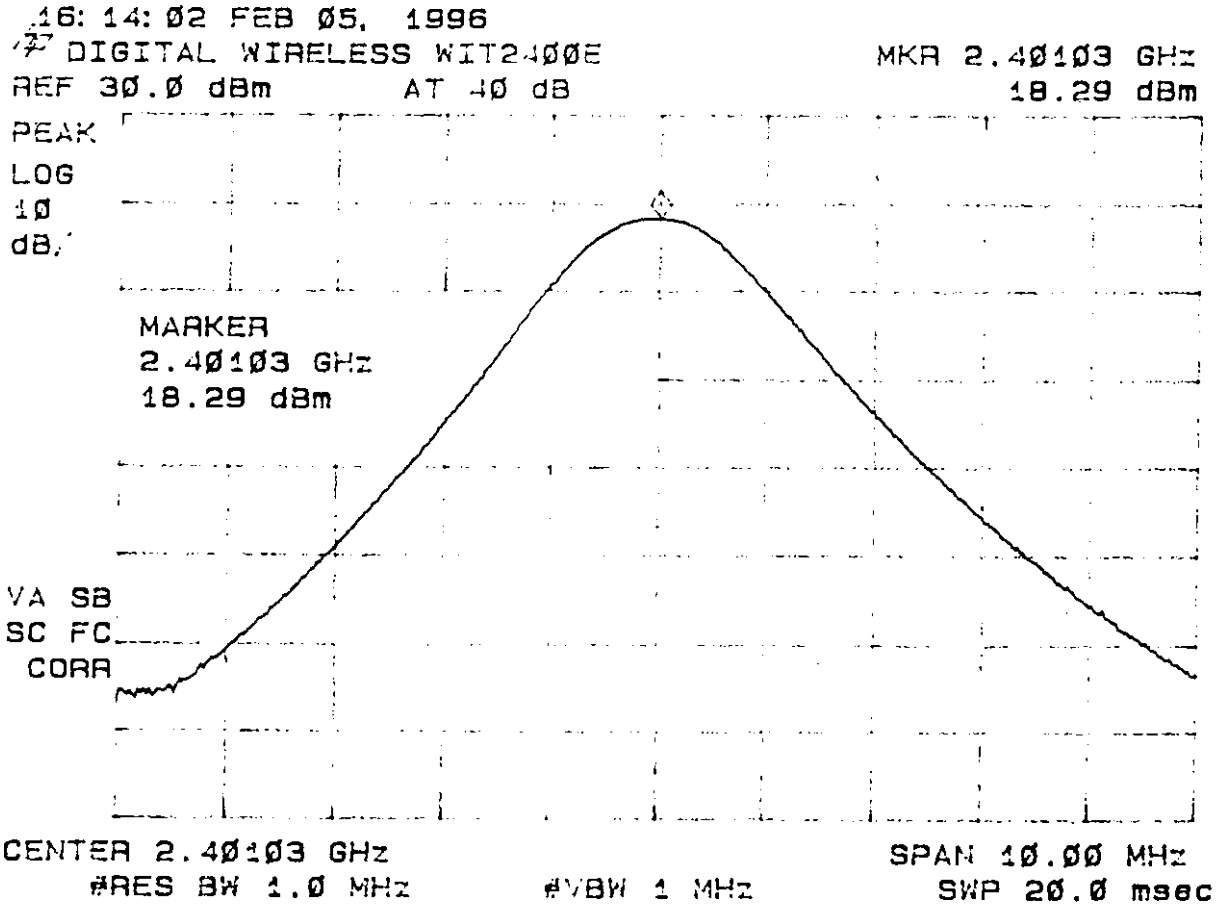


Figure 6  
Peak Power 15.247 (b)Middle  
From Submittal for FCC ID: HSW-WIT2400E


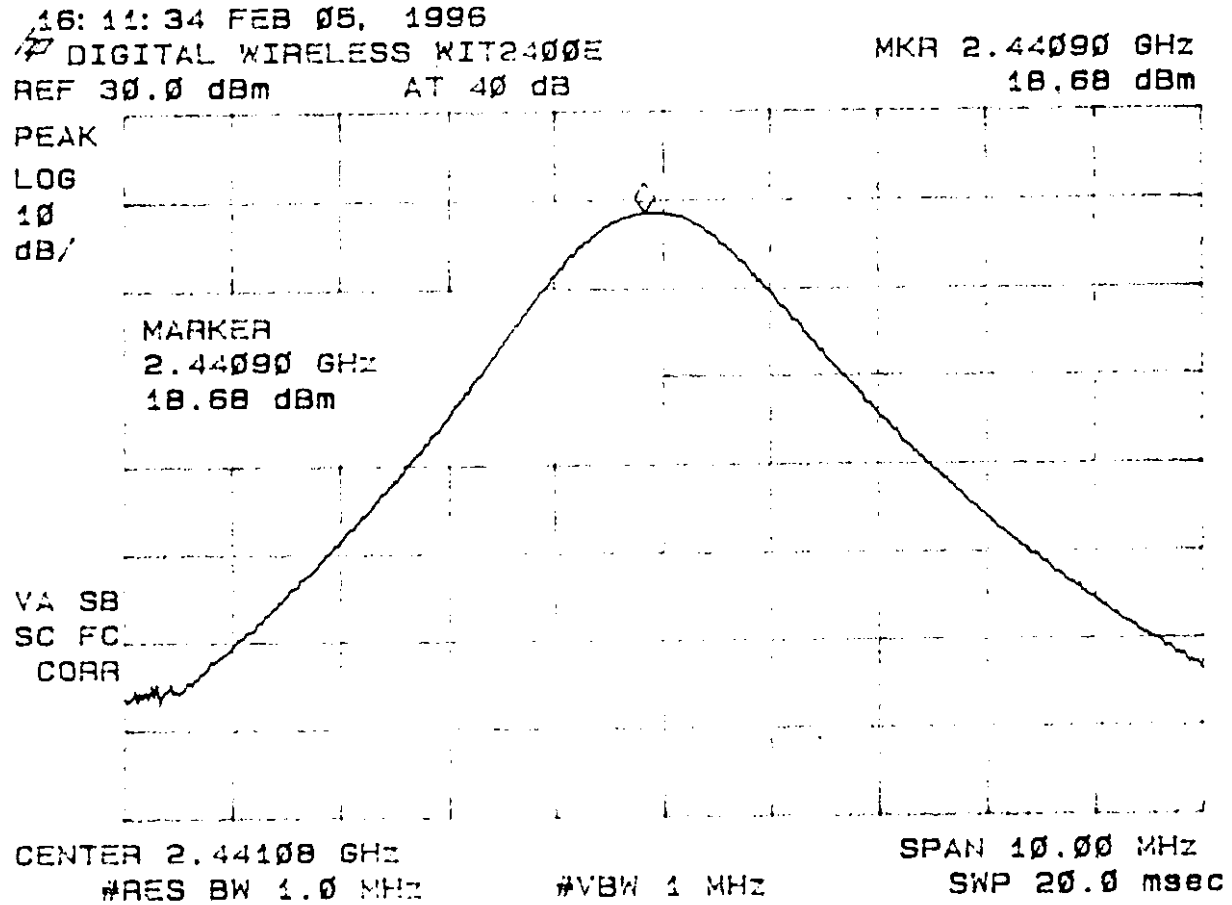


Figure 7  
Peak Power 15.247 (b)High  
From Submittal for FCC ID: HSW-WIT2400E

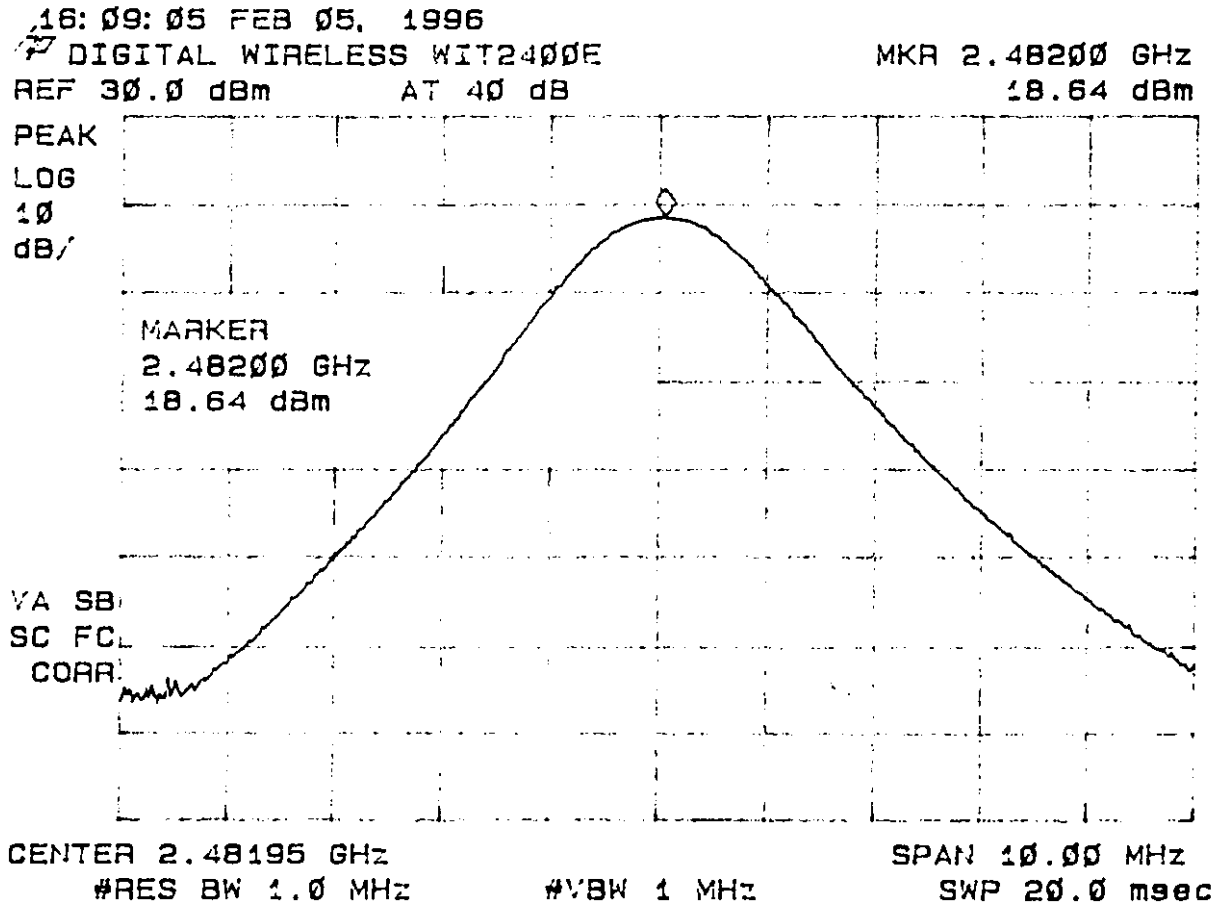

**Figure 17**  
**Antenna Conducted Emission 15.247(c)High**  
From Submittal for FCC ID: HSW-WIT2400E


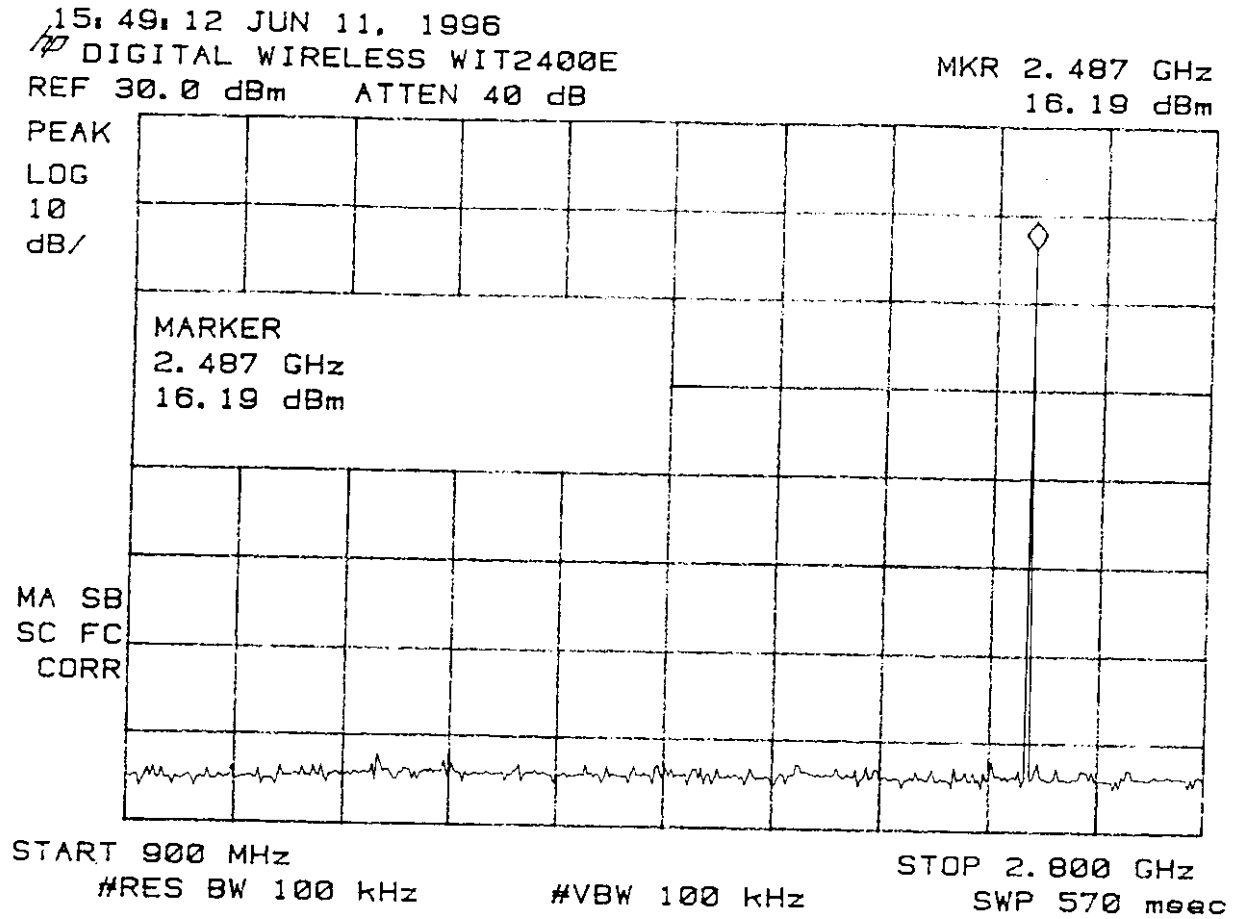


Figure 18  
Antenna Conducted Emission 15.247(c)High  
From Submittal for FCC ID: HSW-WIT2400E

15:51:48 JUN 11, 1996  
DIGITAL WIRELESS WIT2400E  
REF 30.0 dBm ATTEN 40 dB

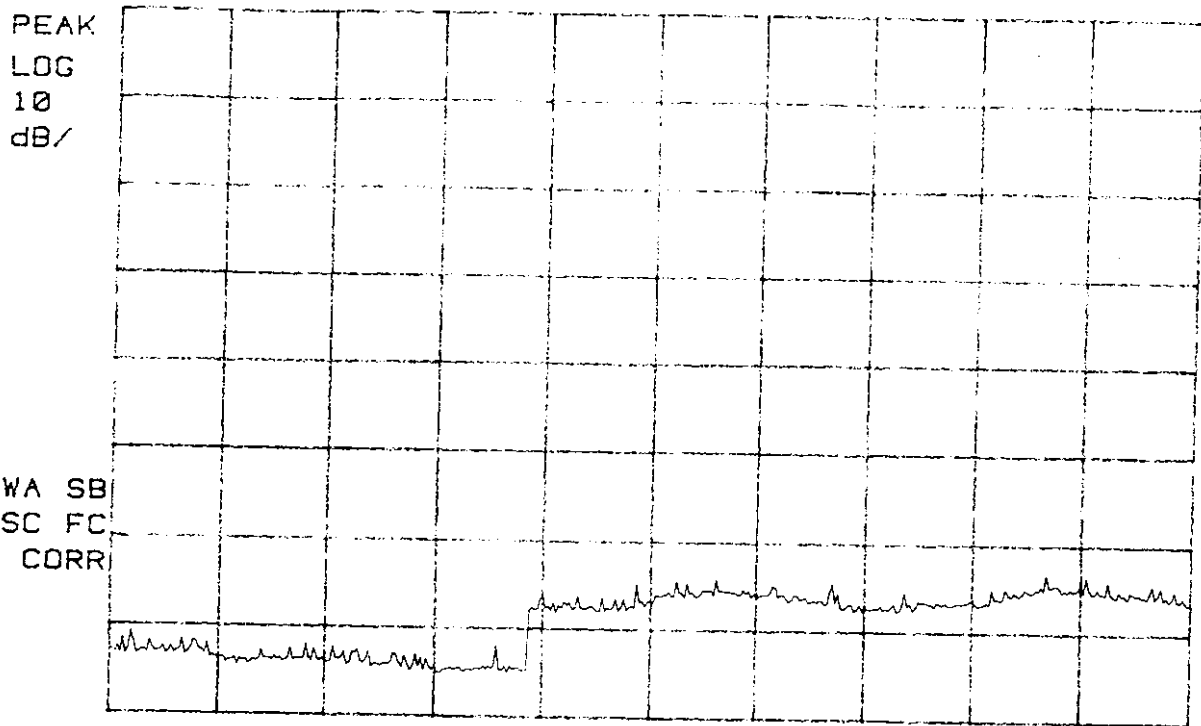

START 2.679 GHz STOP 12.000 GHz  
#RES BW 100 kHz #VBW 100 kHz SWP 2.8 sec



Figure 19  
Antenna Conducted Emission 15.247(c)High  
From Submittal for FCC ID: HSW-WIT2400E

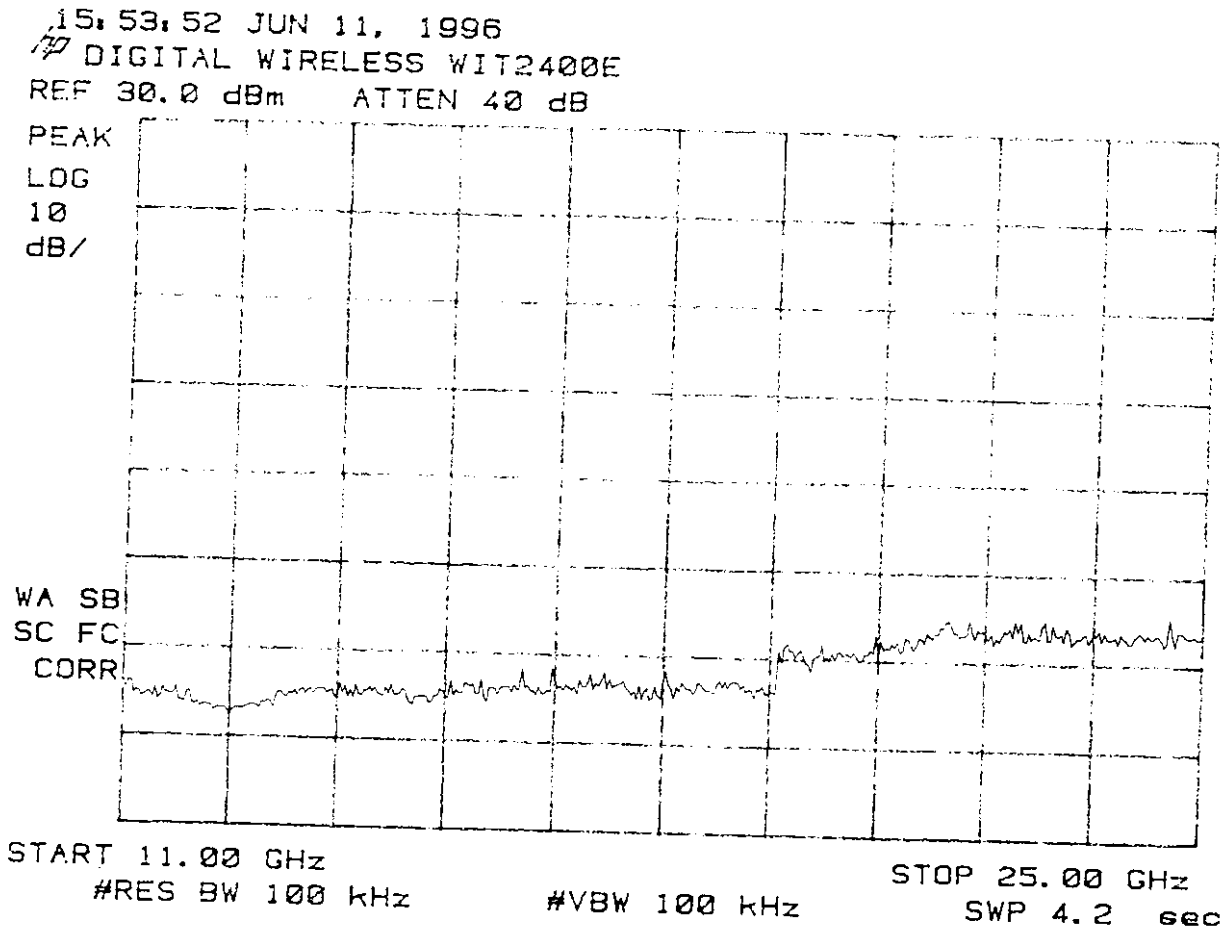


Figure 16  
Antenna Conducted Emission 15.247(c)High  
From Submittal for FCC ID: HSW-WIT2400E

15:46:30 JUN 11, 1996  
DIGITAL WIRELESS WIT2400E  
REF 30.0 dBm ATTEN 40 dB



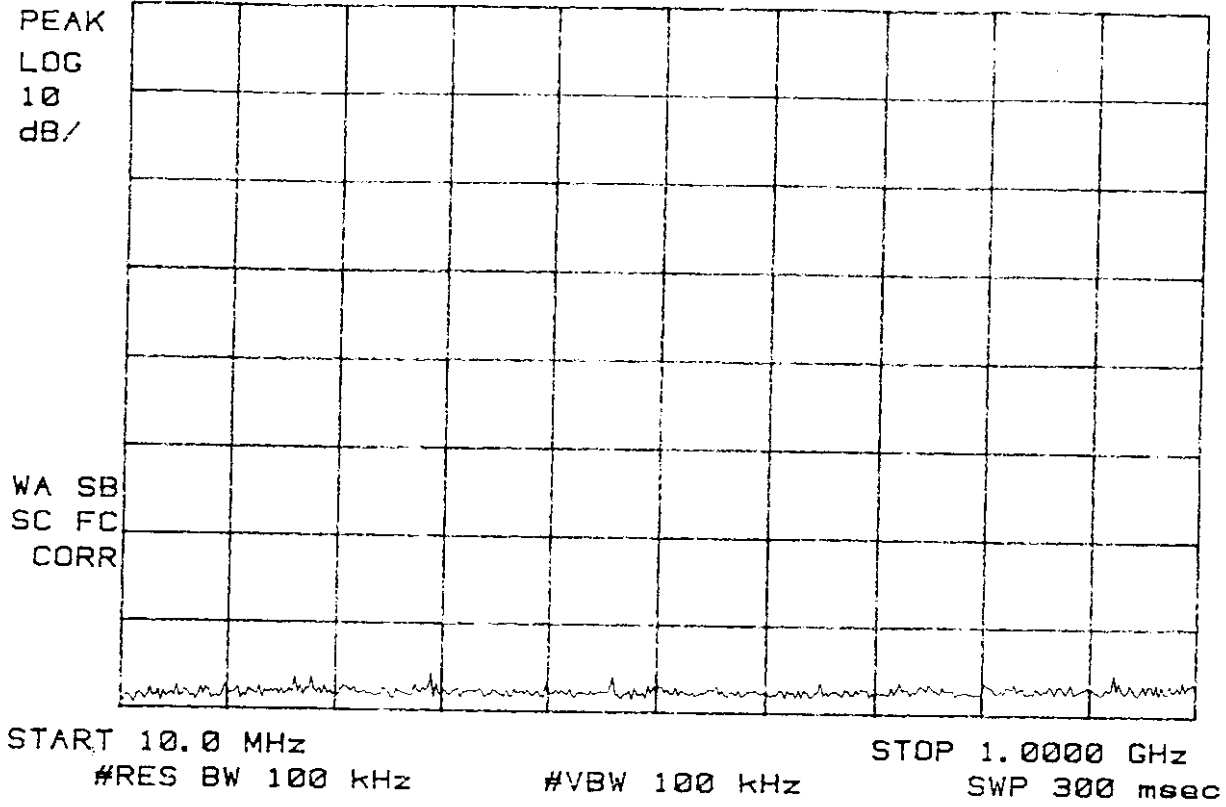


Figure 13  
Antenna Conducted Emission 15.247(c)Middle  
From Submittal for FCC ID: HSW-WIT2400E

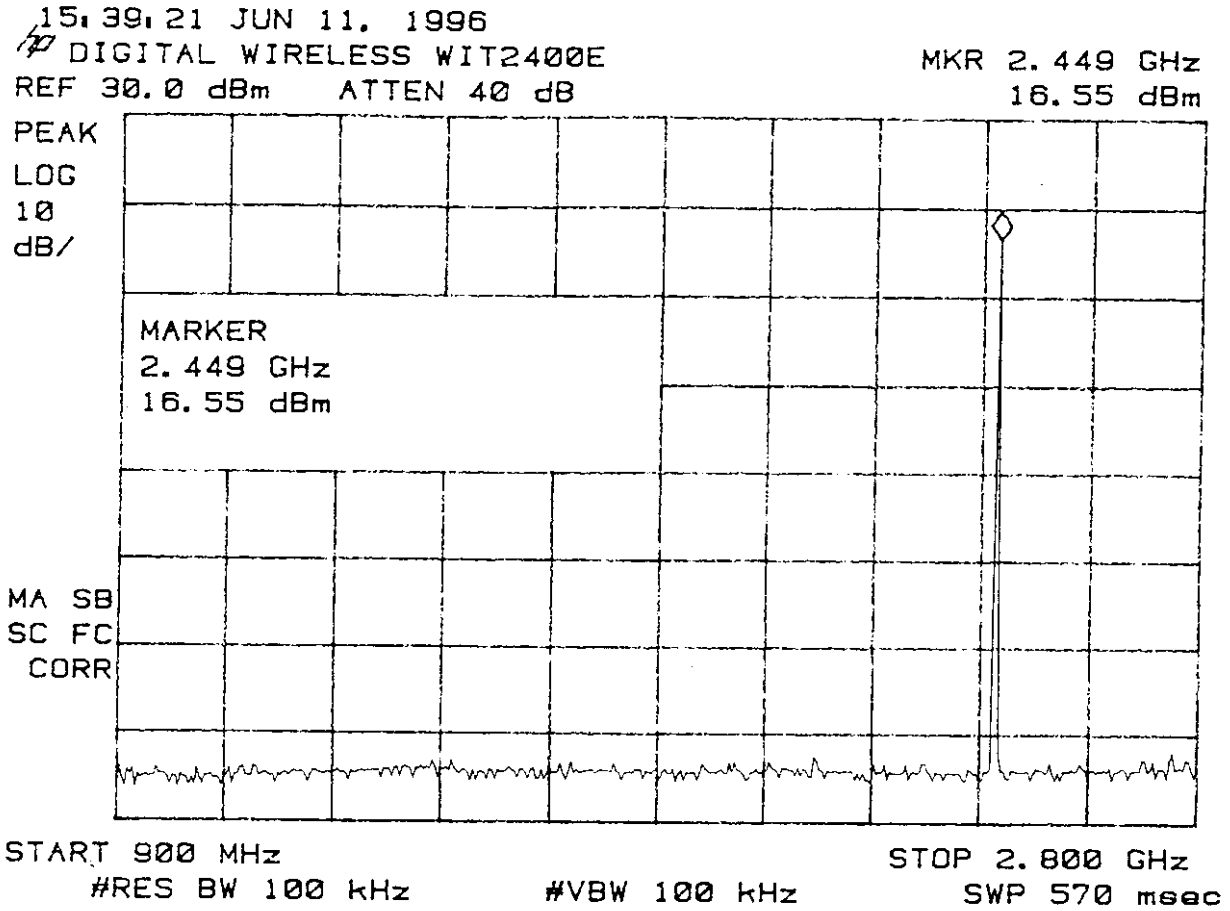


**Figure 14**  
**Antenna Conducted Emission 15.247(c)Middle**  
From Submittal for FCC ID: HSW-WIT2400E

15:42:11 JUN 11, 1996  
DIGITAL WIRELESS WIT2400E  
REF 30.0 dBm    ATTEN 40 dB

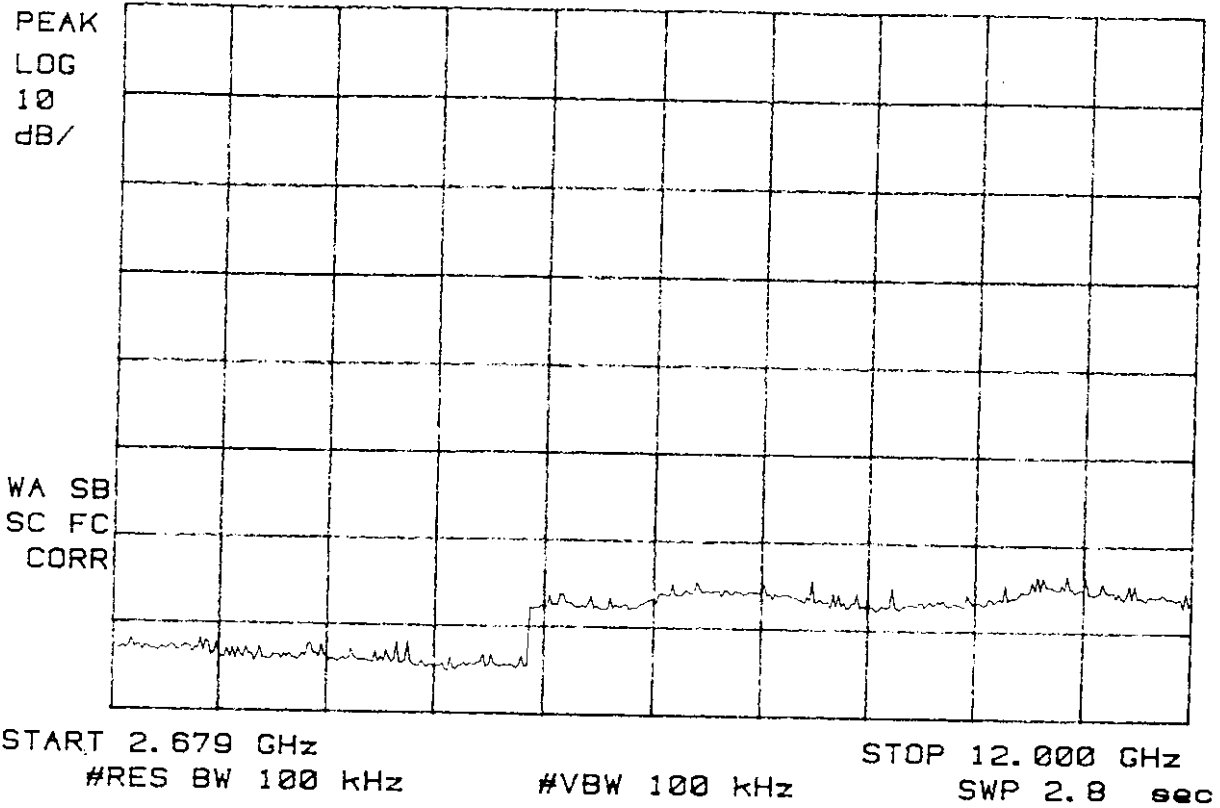

**Figure 15**  
**Antenna Conducted Emission 15.247(c)Middle**  
From Submittal for FCC ID: HSW-WIT2400E


15:44:17 JUN 11, 1996  
DIGITAL WIRELESS WIT2400E  
REF 30.0 dBm ATTEN 40 dB

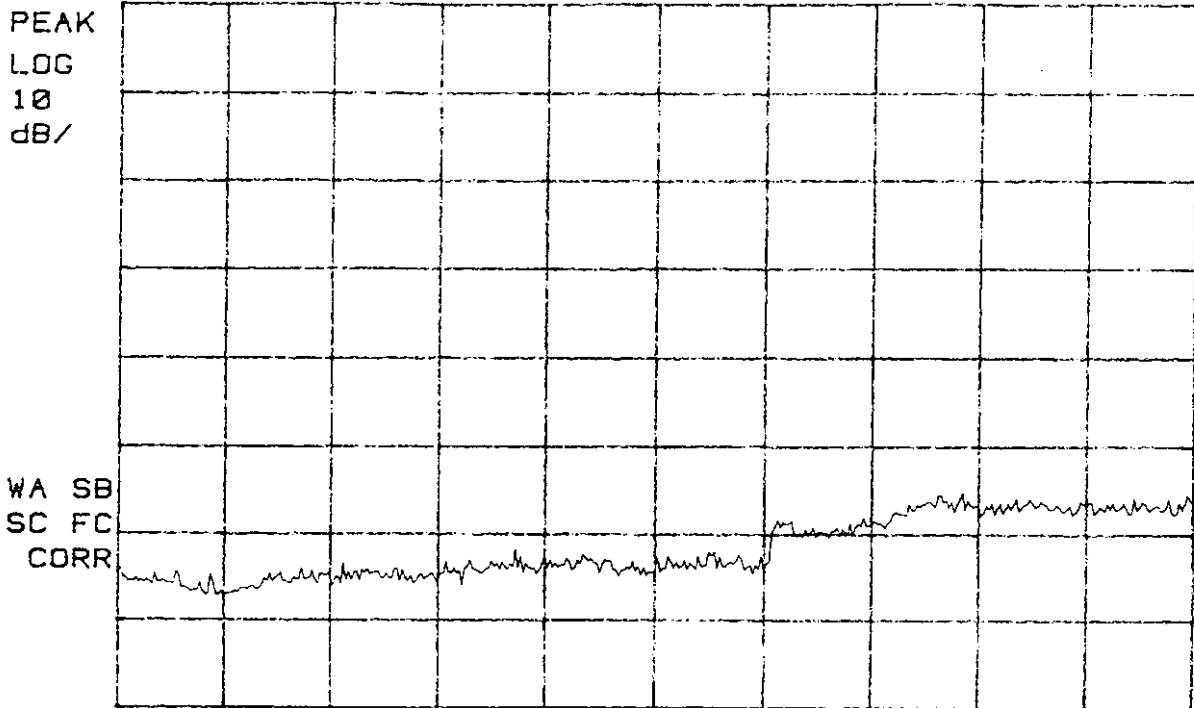

START 11.00 GHz STOP 25.00 GHz  
#RES BW 100 kHz #VBW 100 kHz SWP 4.2 sec

**Figure 8**  
**Antenna Conducted Emission 15.247(c) Low**  
From Submittal for FCC ID: HSW-WIT2400E

15:21:17 JUN 11, 1996  
DIGITAL WIRELESS WIT2400E  
REF 30.0 dBm ATTEN 40 dB

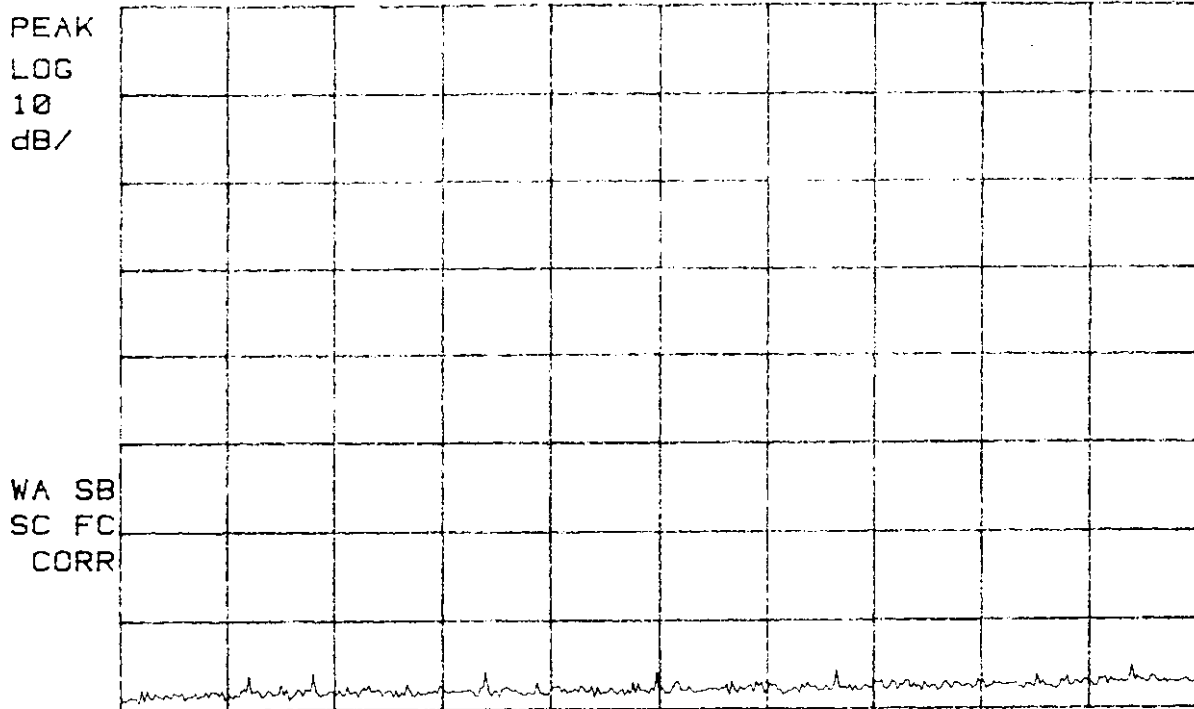


START 10.0 MHz      STOP 1.0000 GHz  
#RES BW 100 kHz      #VBW 100 kHz      SWP 300 msec

Figure 9  
Antenna Conducted Emission 15.247(c)Low  
From Submittal for FCC ID: HSW-WIT2400E

15:24:36 JUN 11, 1996  
DIGITAL WIRELESS WIT2400E  
REF 30.0 dBm ATTEN 40 dB

MKR 2.406 GHz  
16.96 dBm

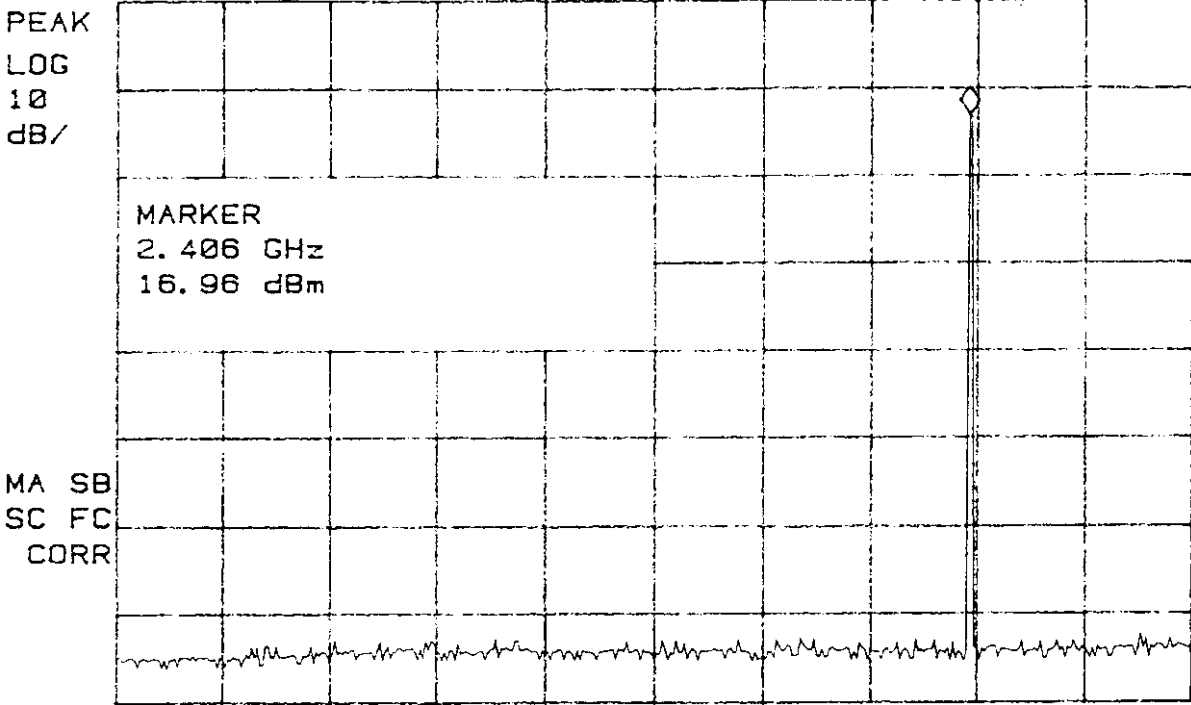

START 900 MHz STOP 2.800 GHz  
#RES BW 100 kHz #VBW 100 kHz SWP 570 msec

Figure 10  
Antenna Conducted Emission 15.247(c)Low  
From Submittal for FCC ID: HSW-WIT2400E

15.28.25 JUN 11, 1996  
DIGITAL WIRELESS WIT2400E  
REF 30.0 dBm ATTEN 40 dB

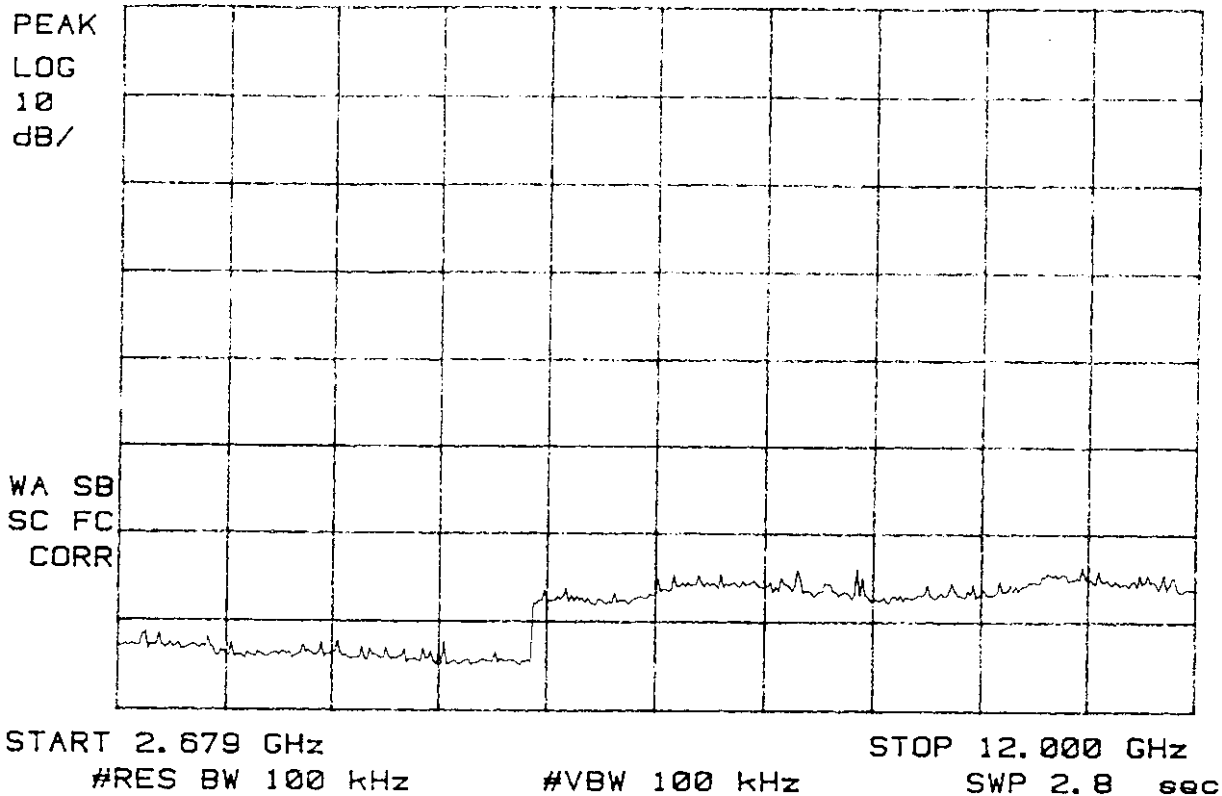




Figure 11  
Antenna Conducted Emission 15.247(c)Low  
From Submittal for FCC ID: HSW-WIT2400E

15:31:03 JUN 11, 1996  
DIGITAL WIRELESS WIT2400E  
REF 30.0 dBm ATTEN 40 dB

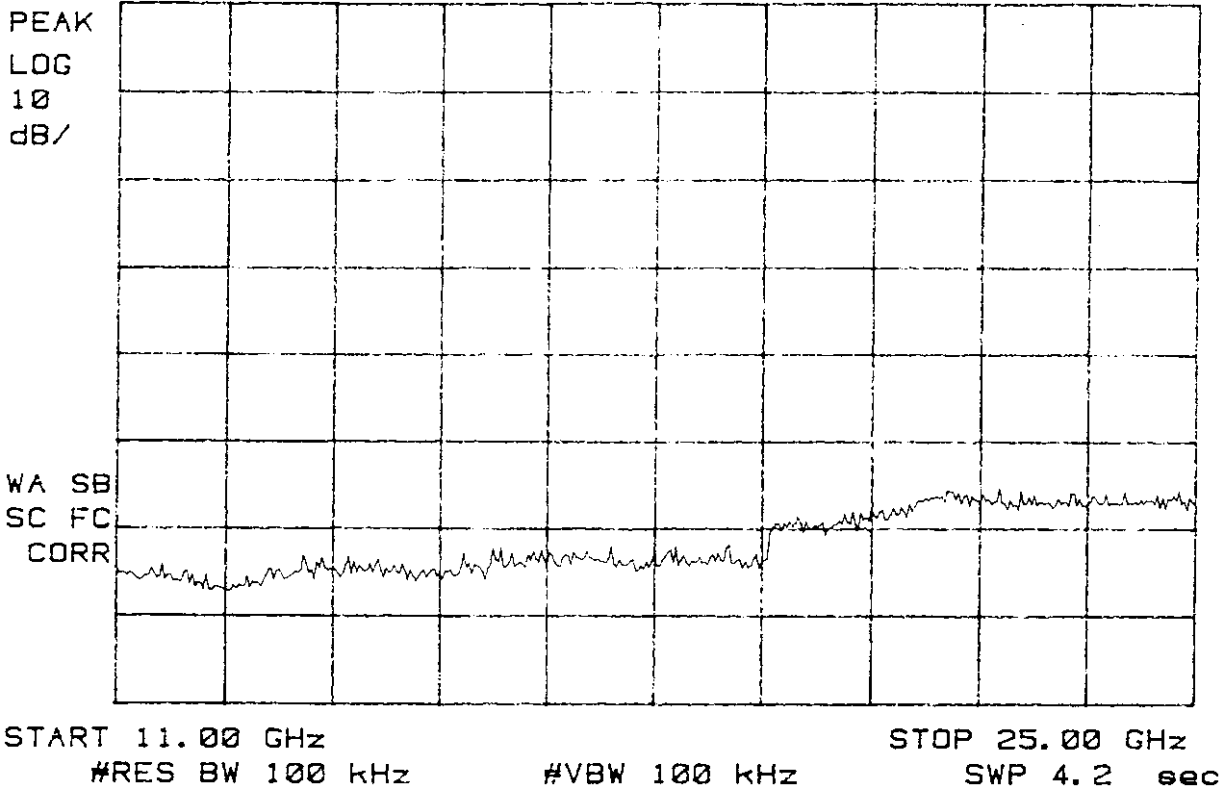


Figure 12  
Antenna Conducted Emission 15.247(c)Low  
From Submittal for FCC ID: HSW-WIT2400E

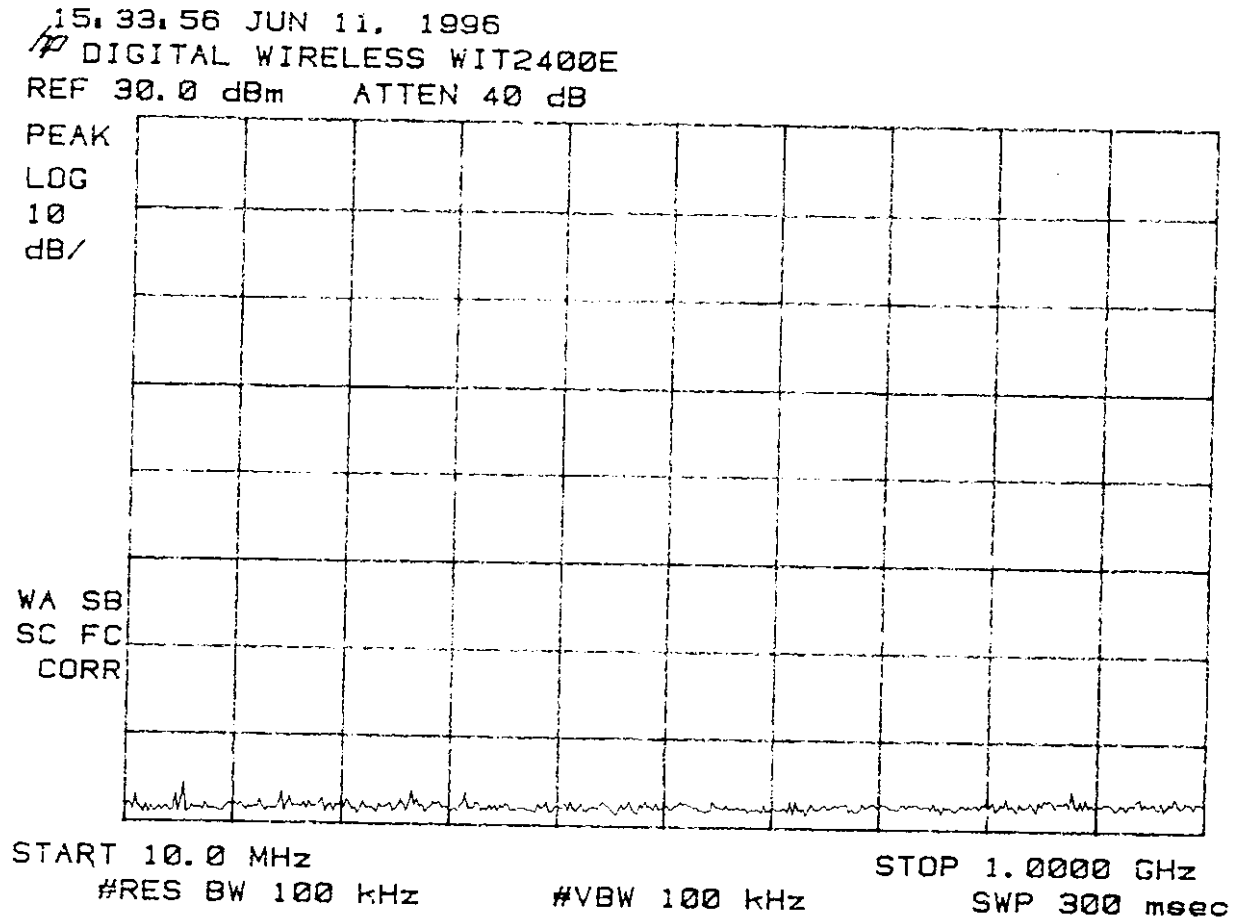


Figure 20  
Peak Spurious Emissions 15.247(c) Low  
(Dipole Antenna - 2 dBi gain)

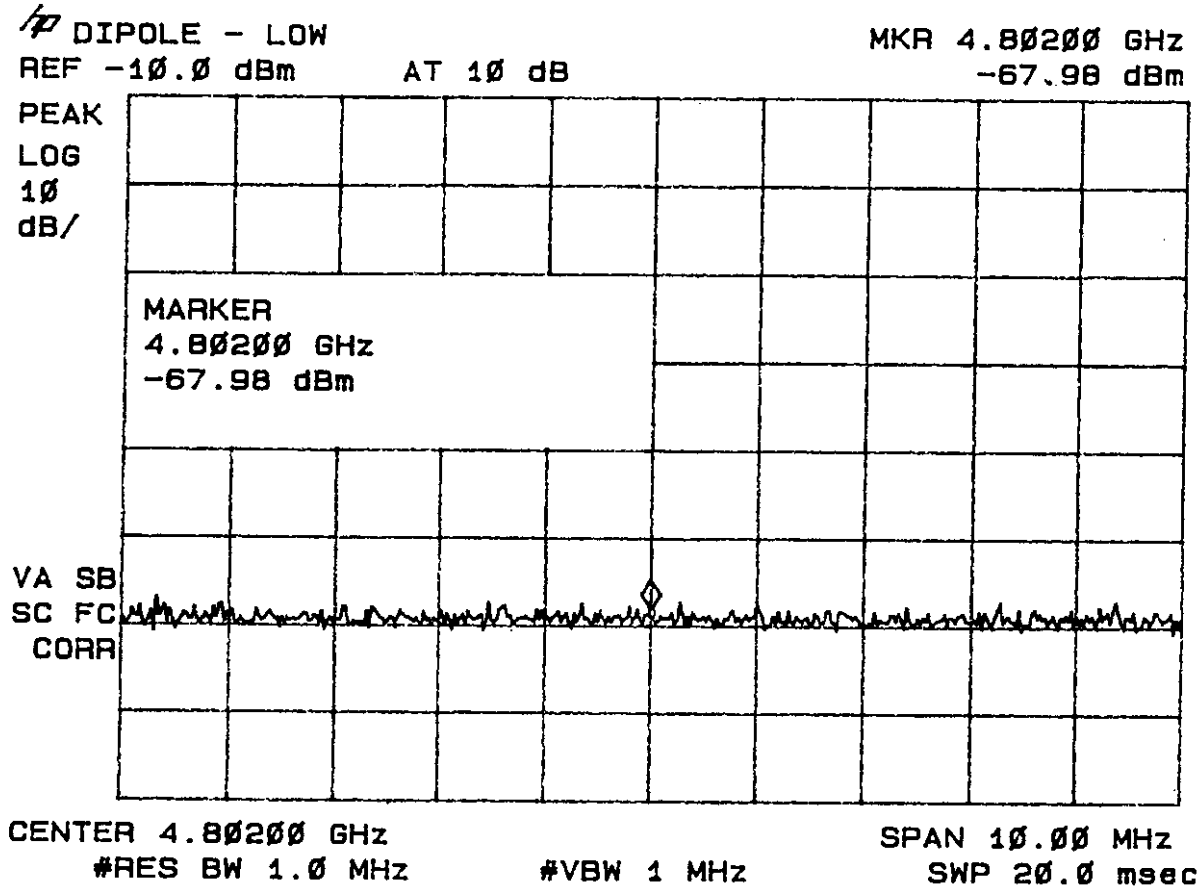


Figure 21  
Peak Spurious Emissions 15.247(c) Low  
(Dipole Antenna - 2 dBi gain)



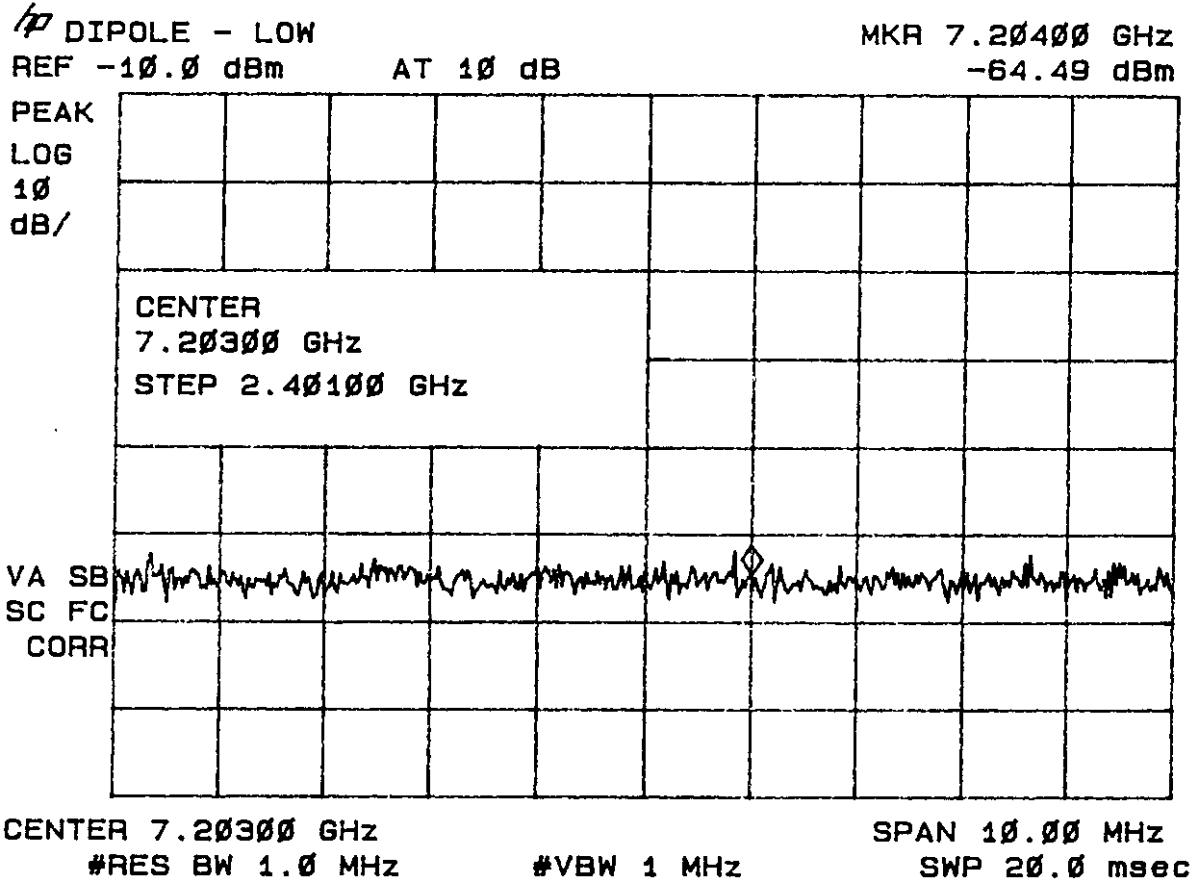



Figure 22  
Peak Spurious Emissions 15.247(c) Low  
(Dipole Antenna - 2 dBi gain)

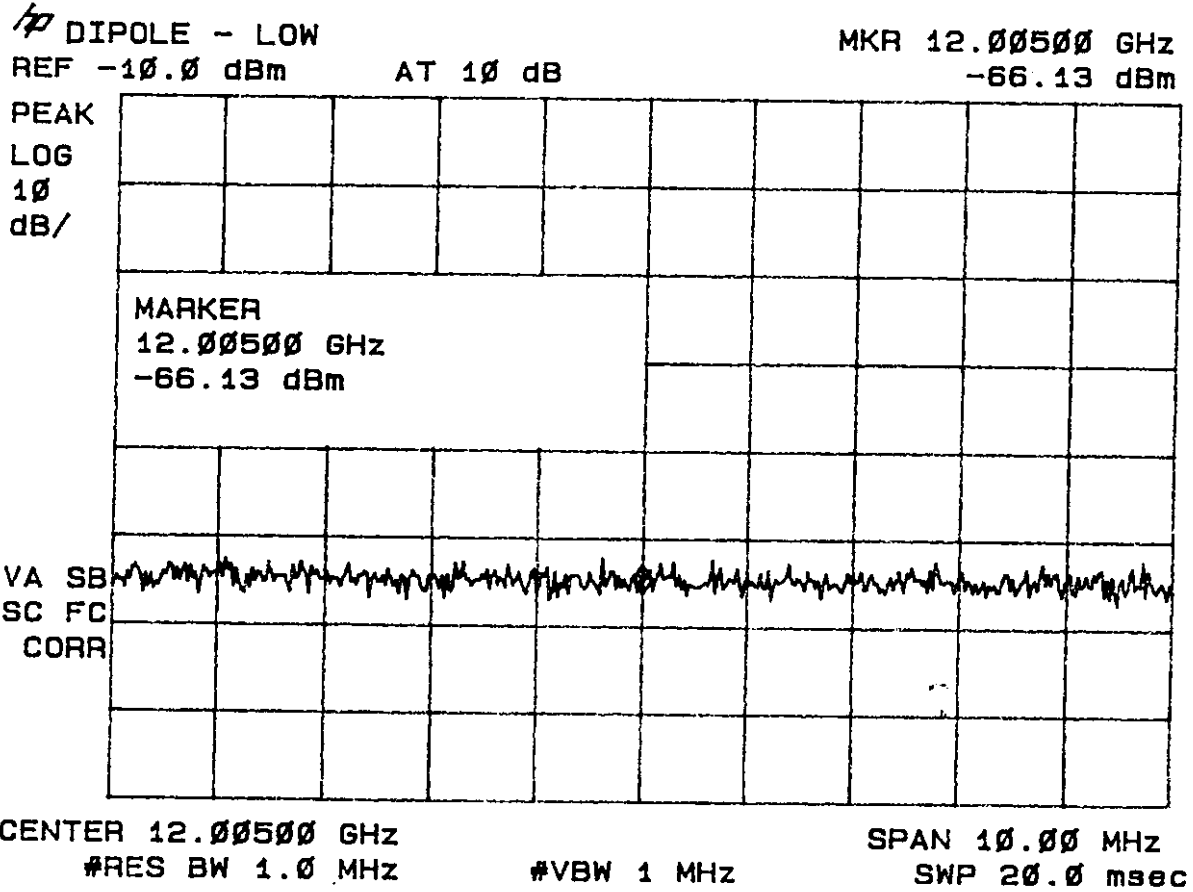


**Figure 23**  
**Peak Spurious Emissions 15.247(c) Middle**  
**(Dipole Antenna - 2 dBi gain)**

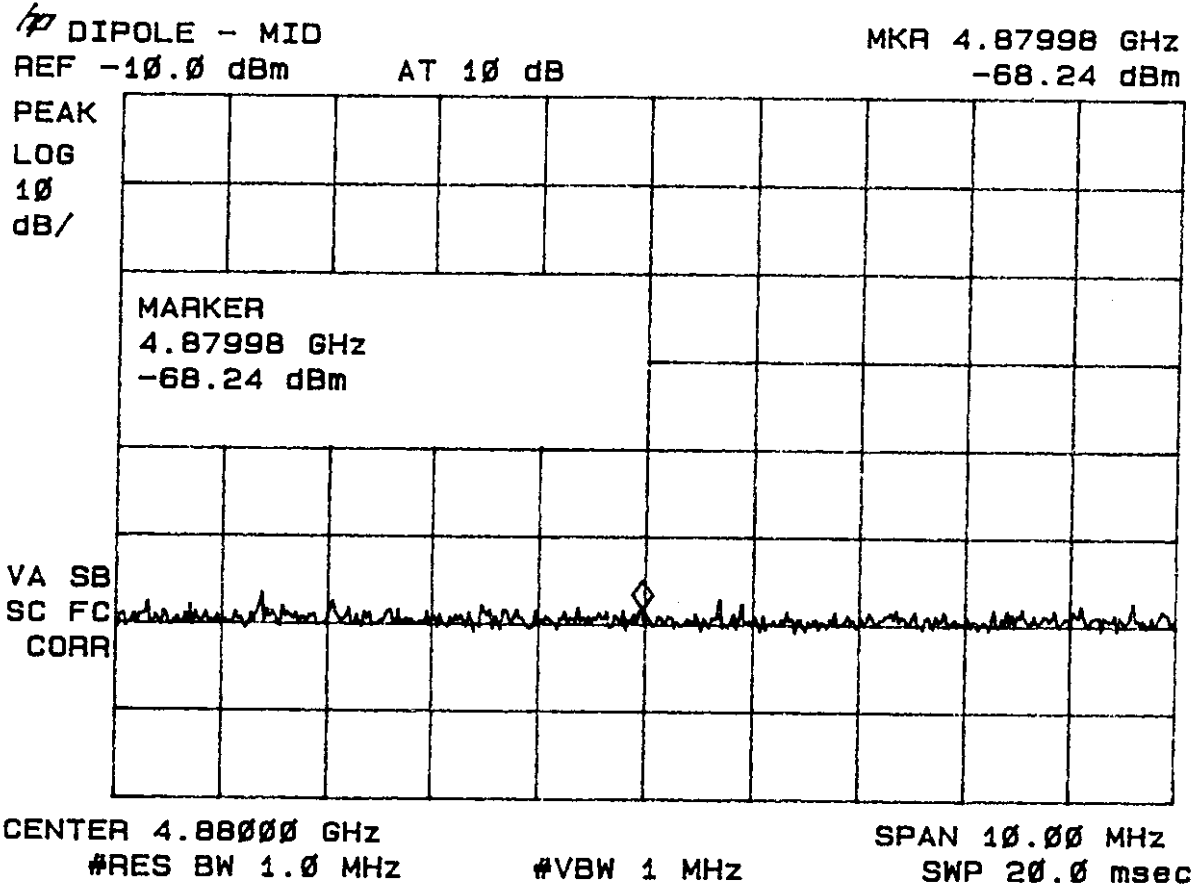

**Figure 24**  
**Peak Spurious Emissions 15.247(c) Middle**  
**(Dipole Antenna - 2 dBi gain)**

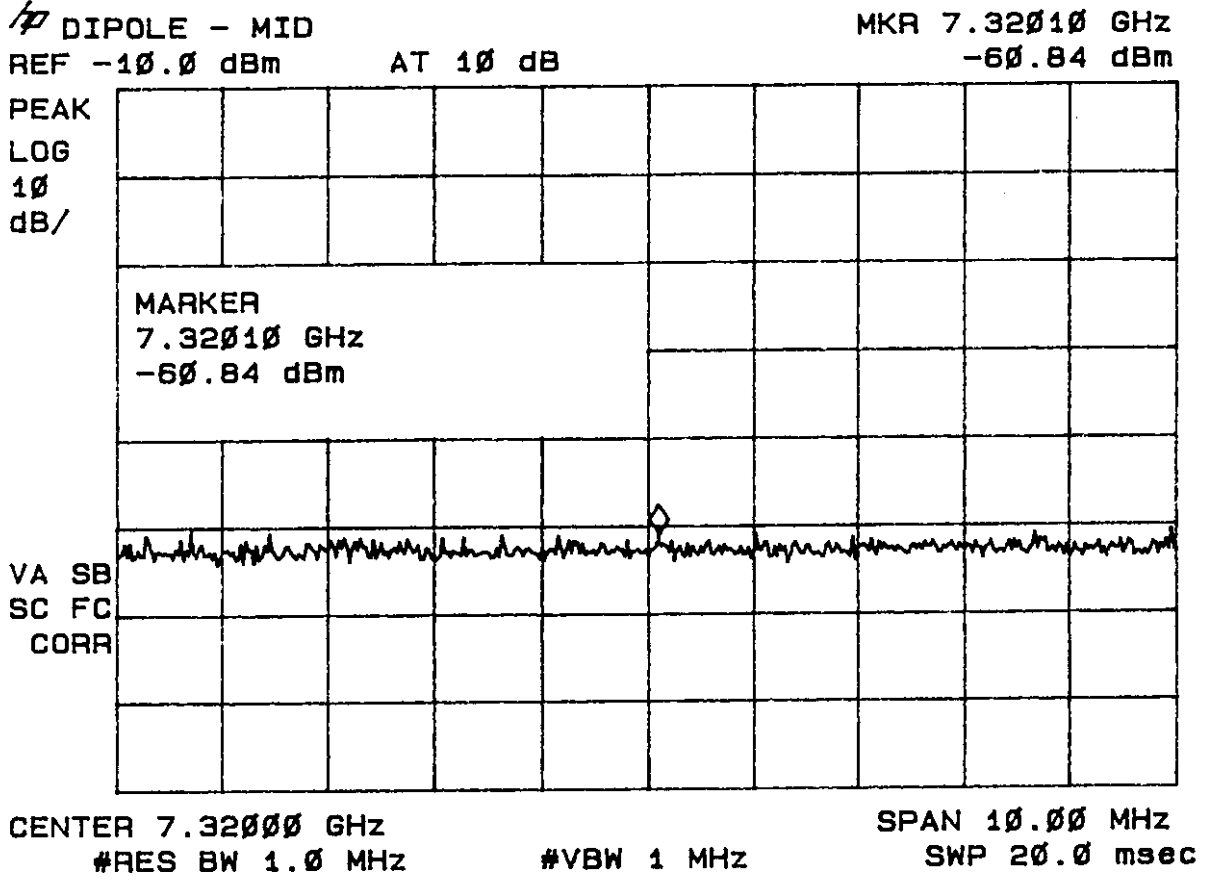

**Figure 25**  
**Peak Spurious Emissions 15.247(c) Middle**  
**(Dipole Antenna - 2 dBi gain)**

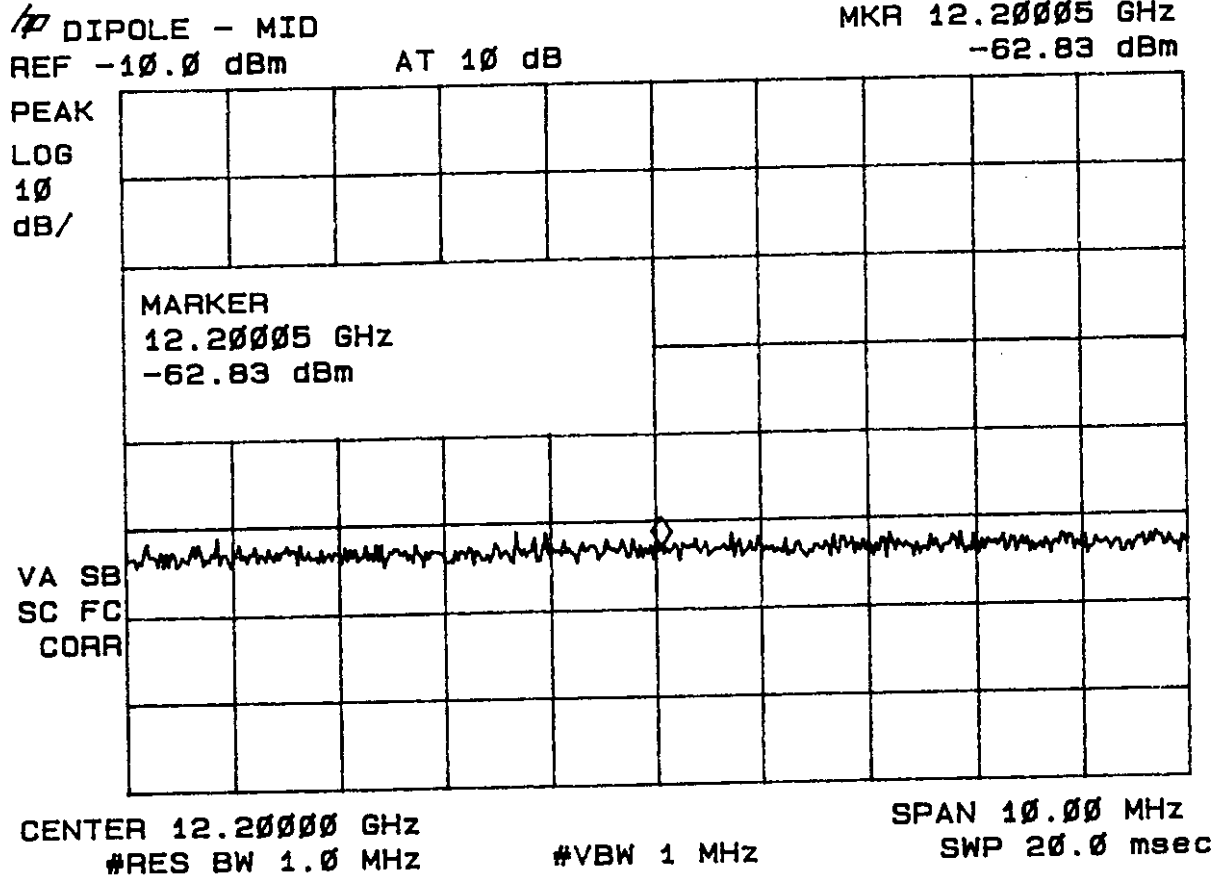



**Figure 26**  
**Peak Spurious Emissions 15.247(c) High**  
**(Dipole Antenna - 2 dBi gain)**

DIPOLE - HIGH


MKR 4.96005 GHz

REF -10.0 dBm

AT 10 dB

-68.94 dBm

PEAK  
LOG  
10  
dB/

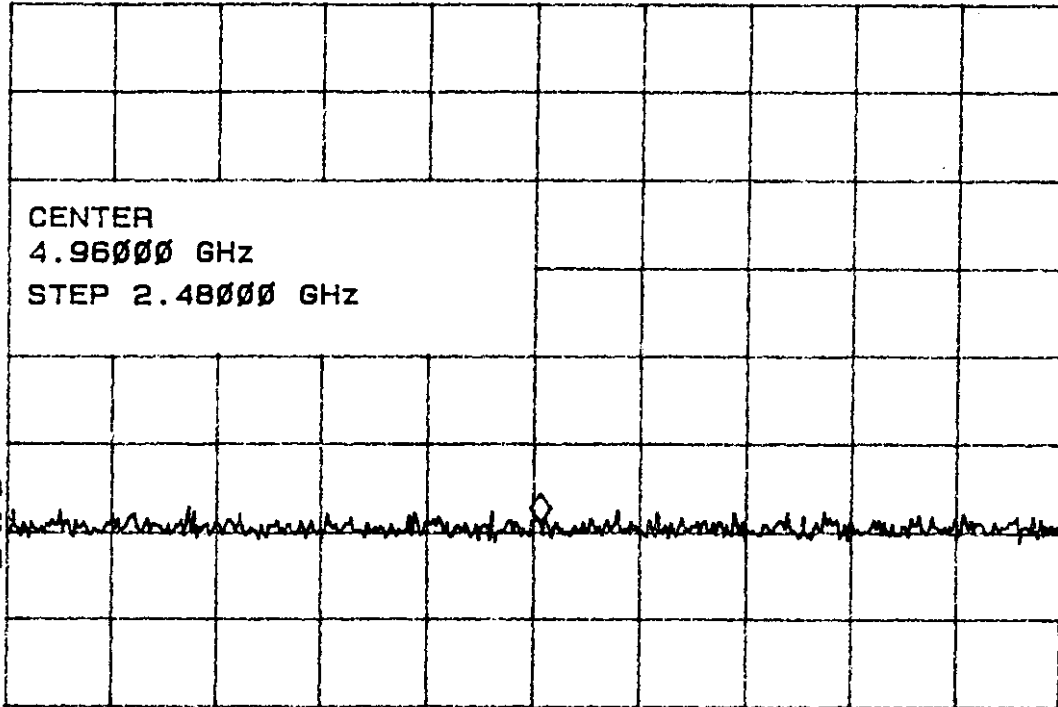

CENTER 4.96000 GHz


SPAN 10.00 MHz

#RES BW 1.0 MHz


#VBW 1 MHz

SWP 20.0 msec

Figure 27  
Peak Spurious Emissions 15.247(c) High  
(Dipole Antenna - 2 dBi gain)

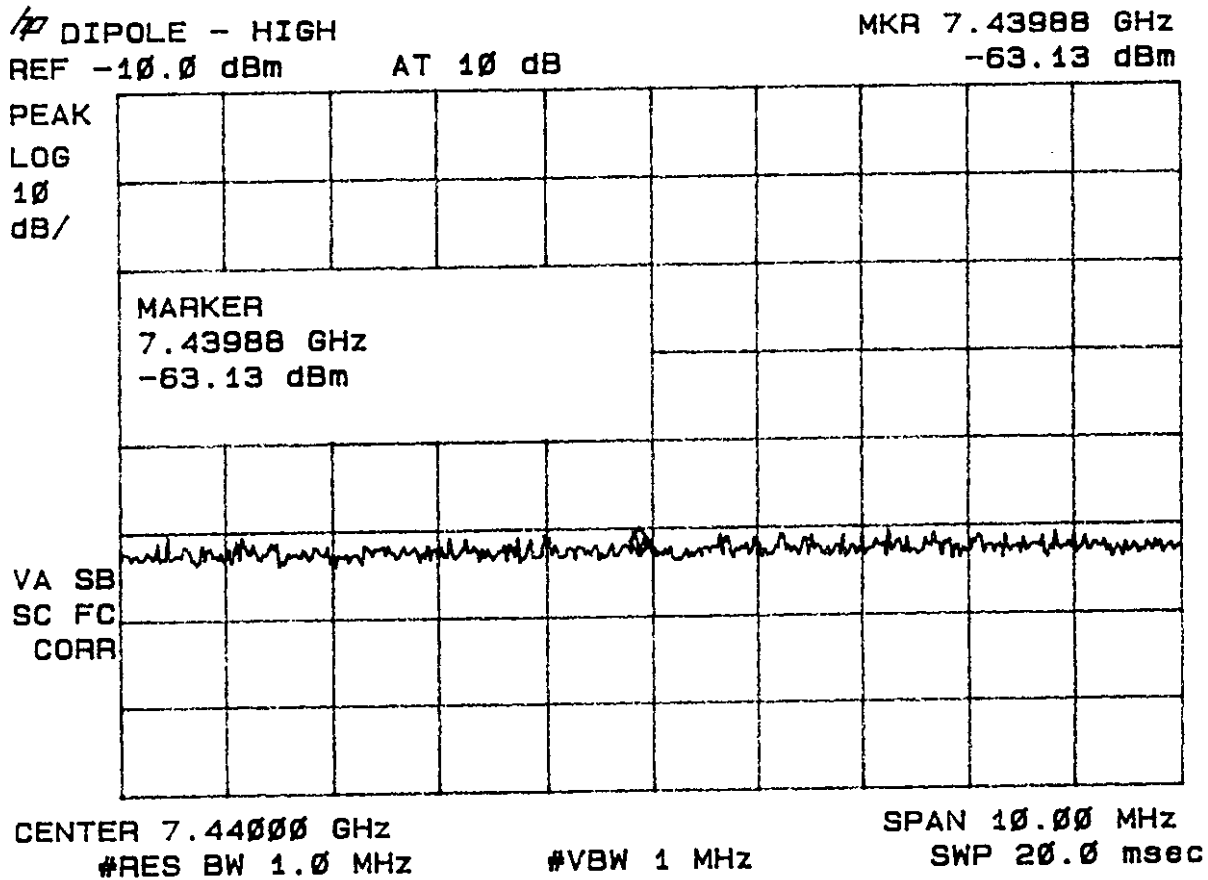

**Figure 28**  
**Peak Spurious Emissions 15.247(c) High**  
**(Dipole Antenna - 2 dBi gain)**

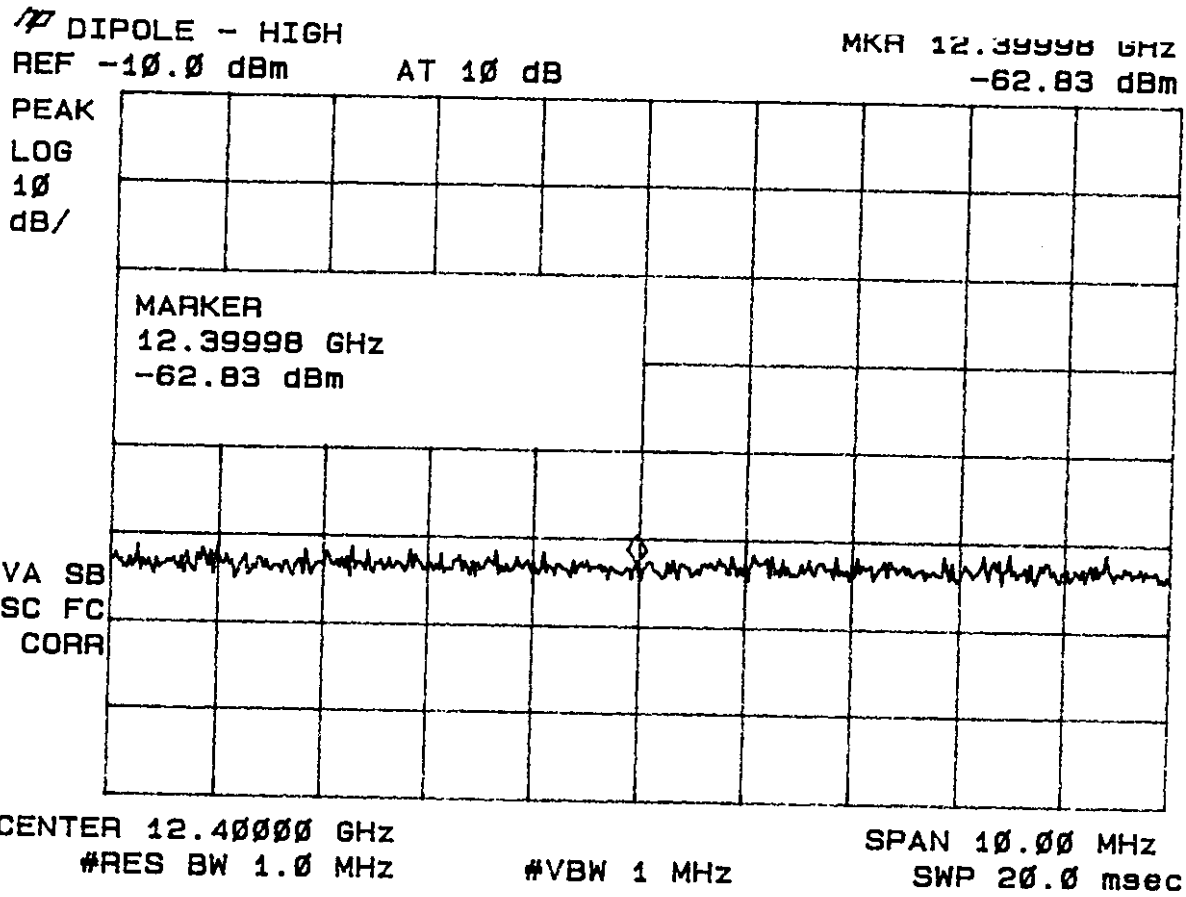

**Figure 29**  
**Peak Spurious Emissions 15.247(c) Low**  
**(DWC Patch Antenna - 6 dBi gain)**



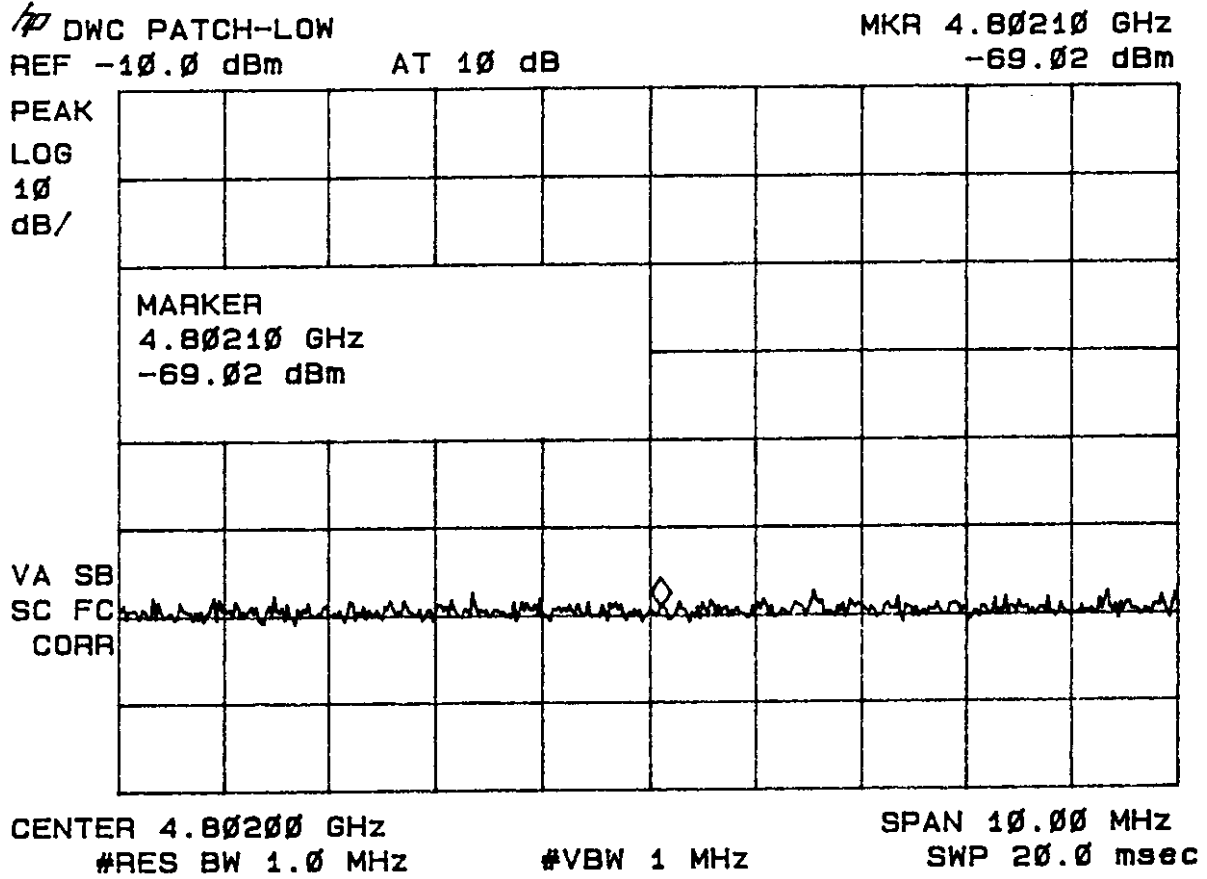


Figure 30


Peak Spurious Emissions 15.247(c) Low  
(DWC Patch Antenna - 6 dBi gain)

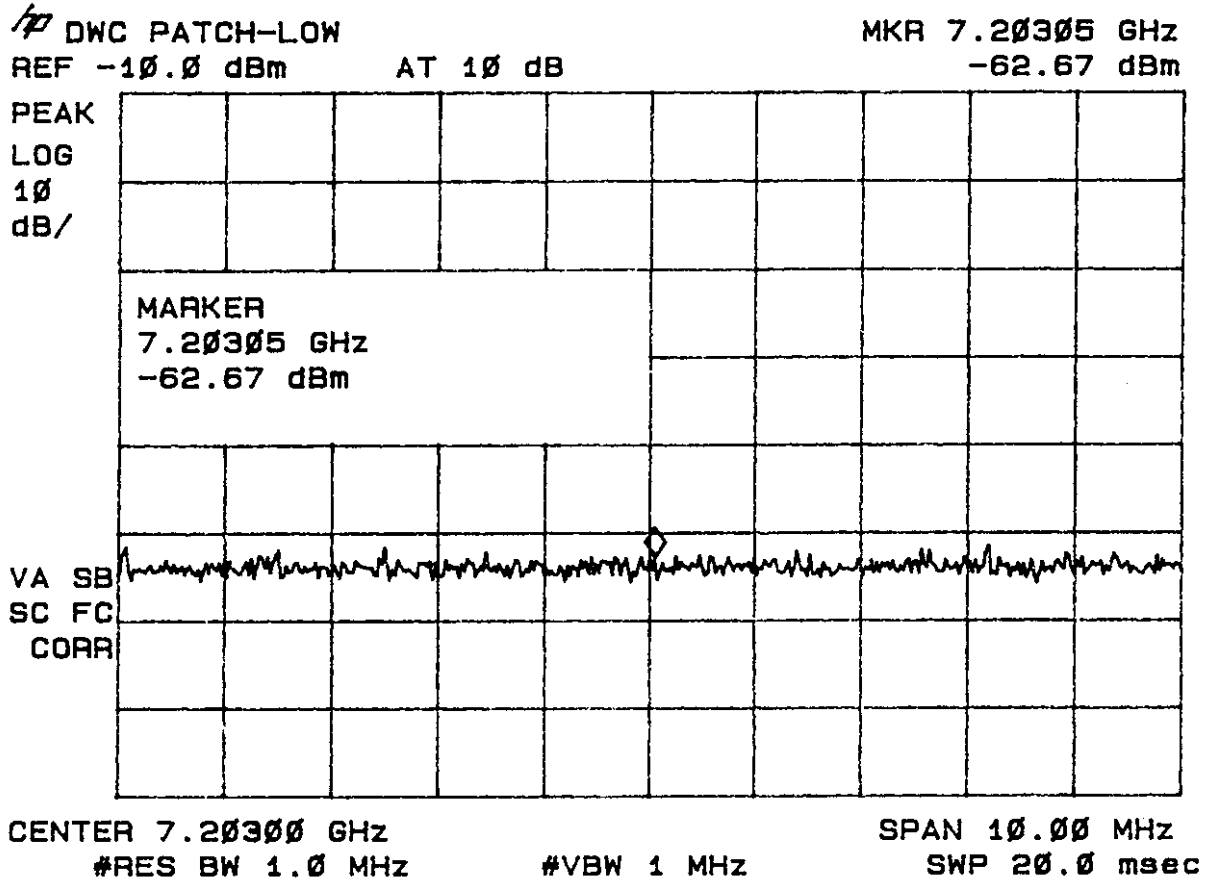


**Figure 31**  
**Peak Spurious Emissions 15.247(c) Low**  
**(DWC Patch Antenna - 6 dBi gain)**

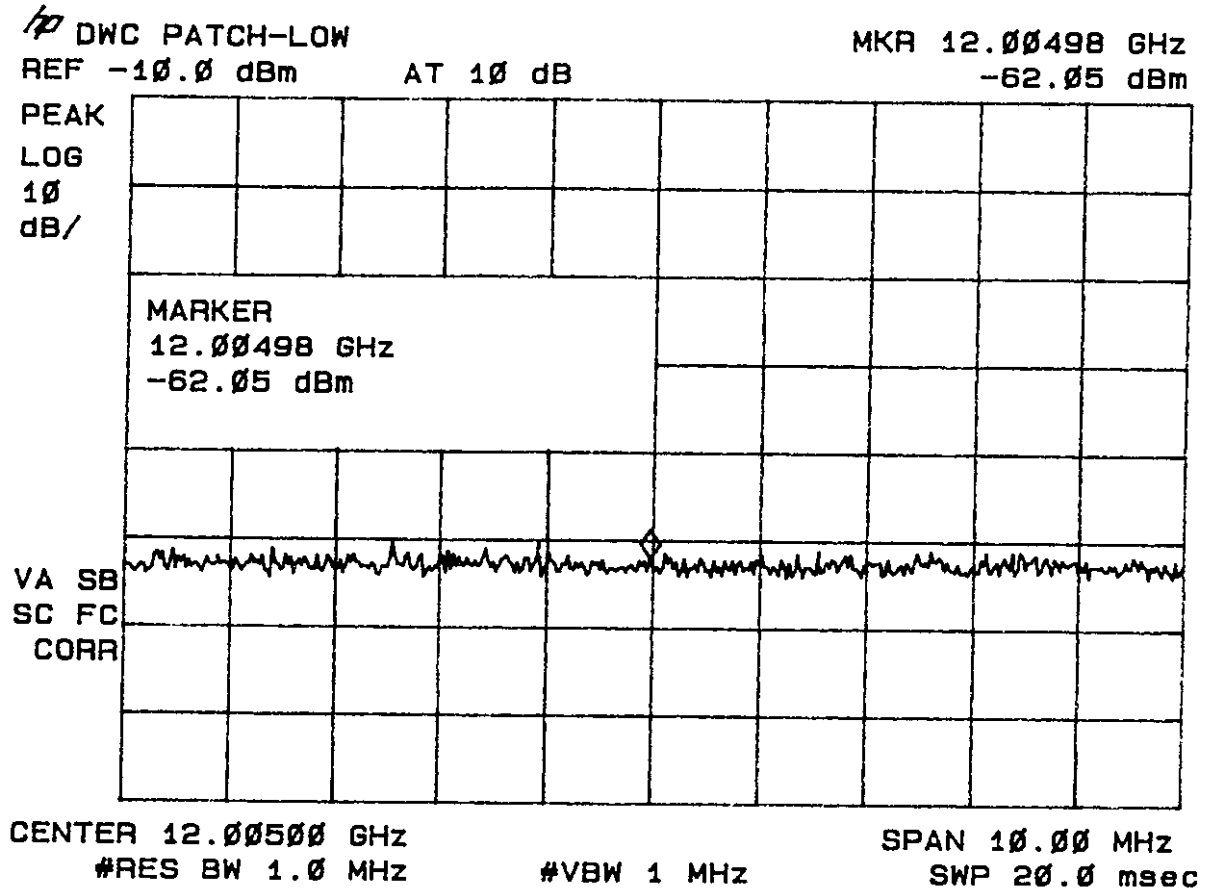

**Figure 32**  
**Peak Spurious Emissions 15.247(c) Middle**  
**(DWC Patch Antenna - 6 dBi gain)**

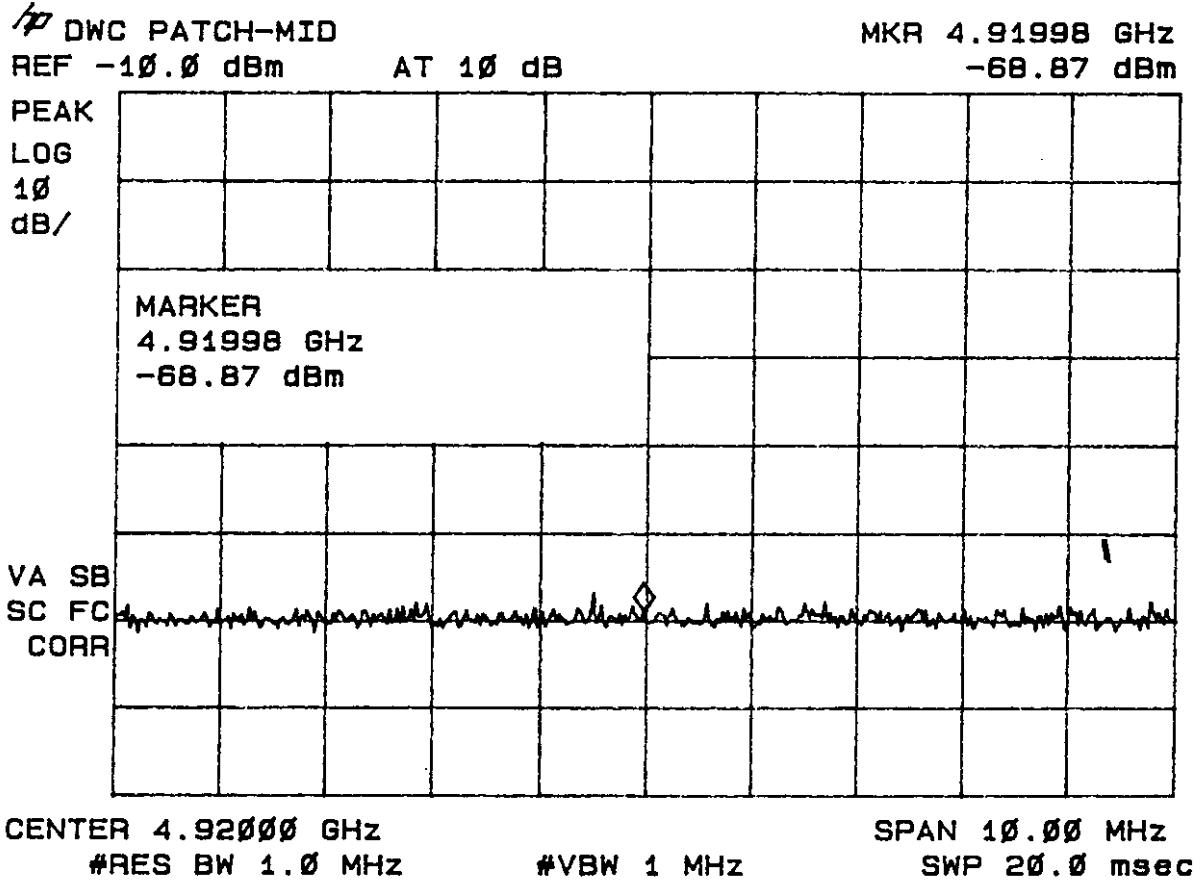


**Figure 33**  
**Peak Spurious Emissions 15.247(c) Middle**  
**(DWC Patch Antenna - 6 dBi gain)**

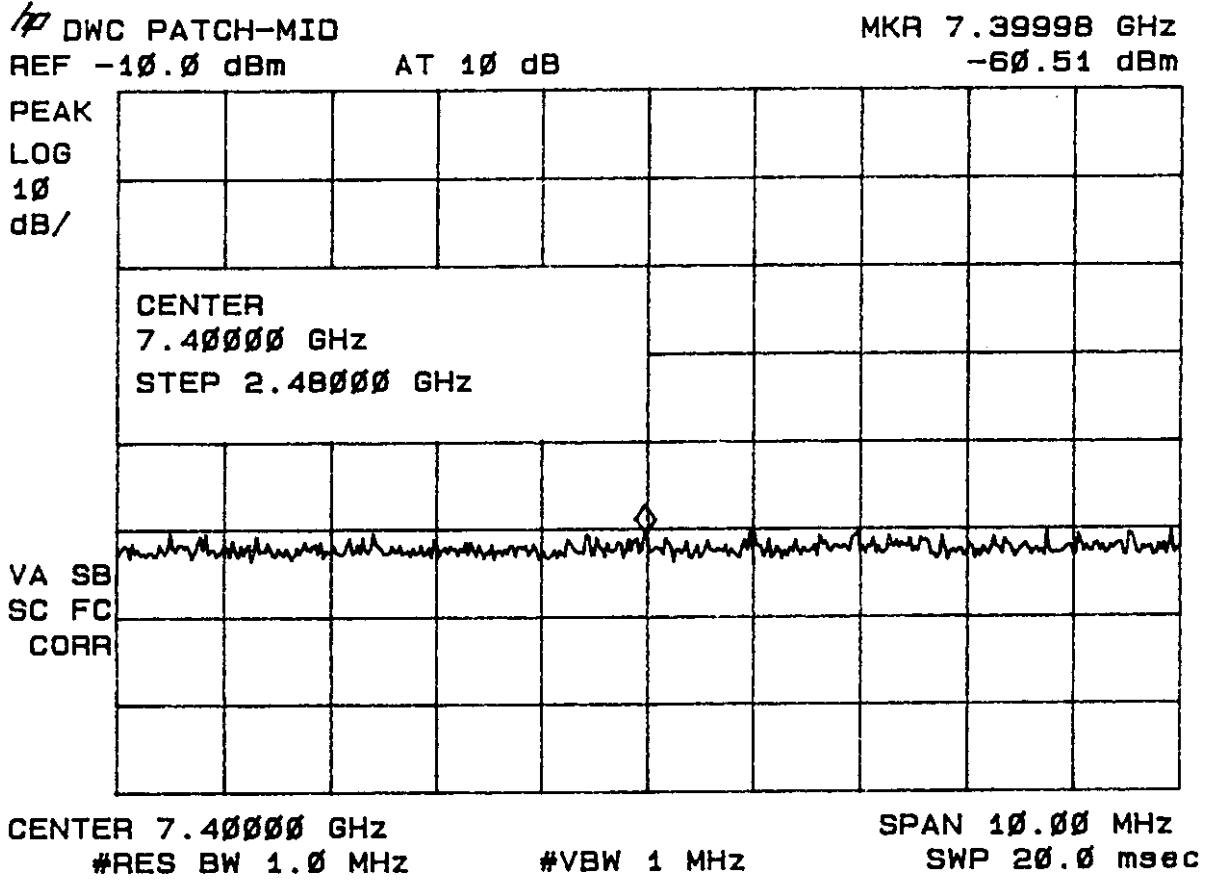




**Figure 34**  
**Peak Spurious Emissions 15.247(c) Middle**  
**(DWC Patch Antenna - 6 dBi gain)**

~~1~~ **DWC PATCH-MID** **MKR 12.35995 GHz**  
**REF -10.0 dBm** **AT 10 dB** **-61.92 dBm**

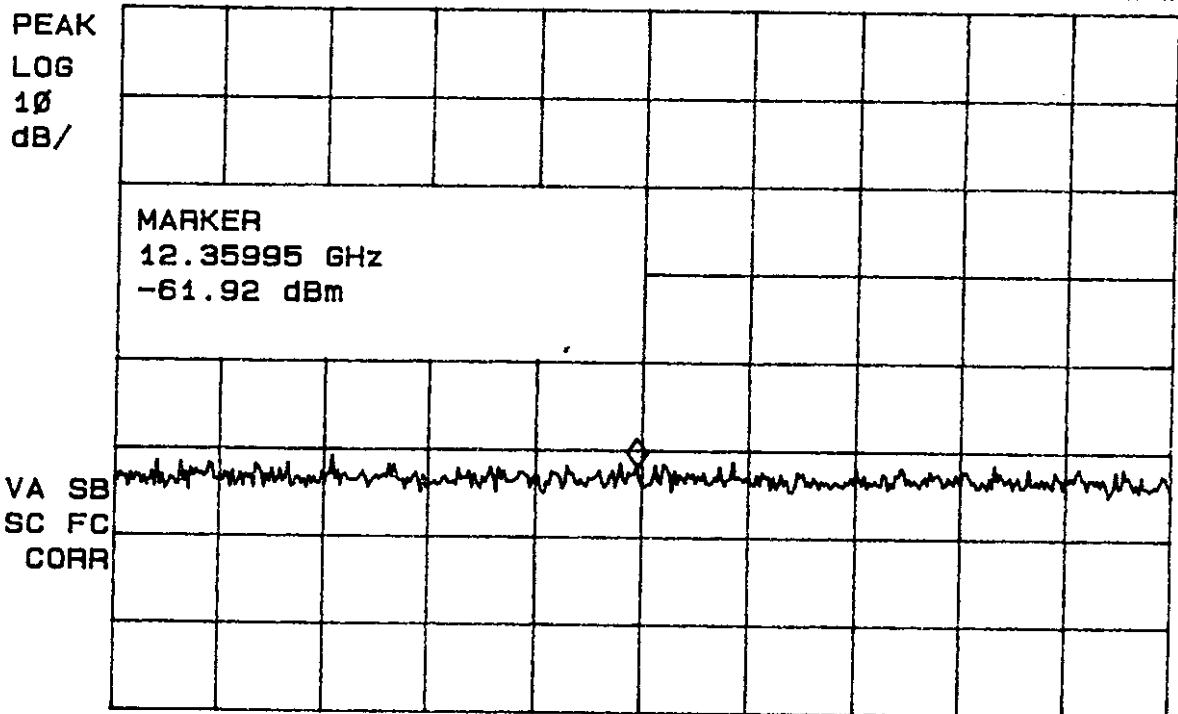


**CENTER 12.36000 GHz** **SPAN 10.00 MHz**  
**#RES BW 1.0 MHz** **#VBW 1 MHz** **SWP 20.0 msec**


**Figure 35**  
**Peak Spurious Emissions 15.247(c) High**  
**(DWC Patch Antenna - 6 dBi gain)**

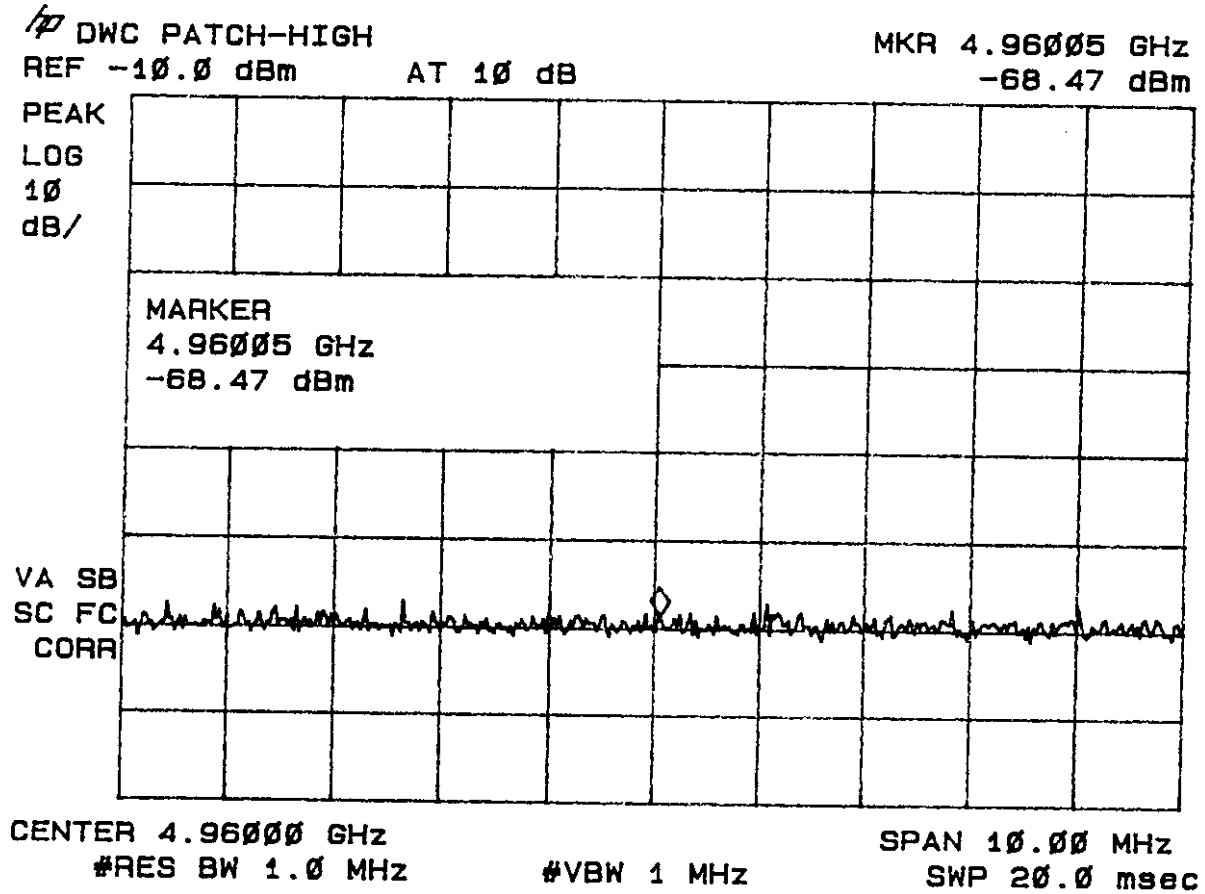


**Figure 36**  
**Peak Spurious Emissions 15.247(c) High**  
**(DWC Patch Antenna - 6 dBi gain)**

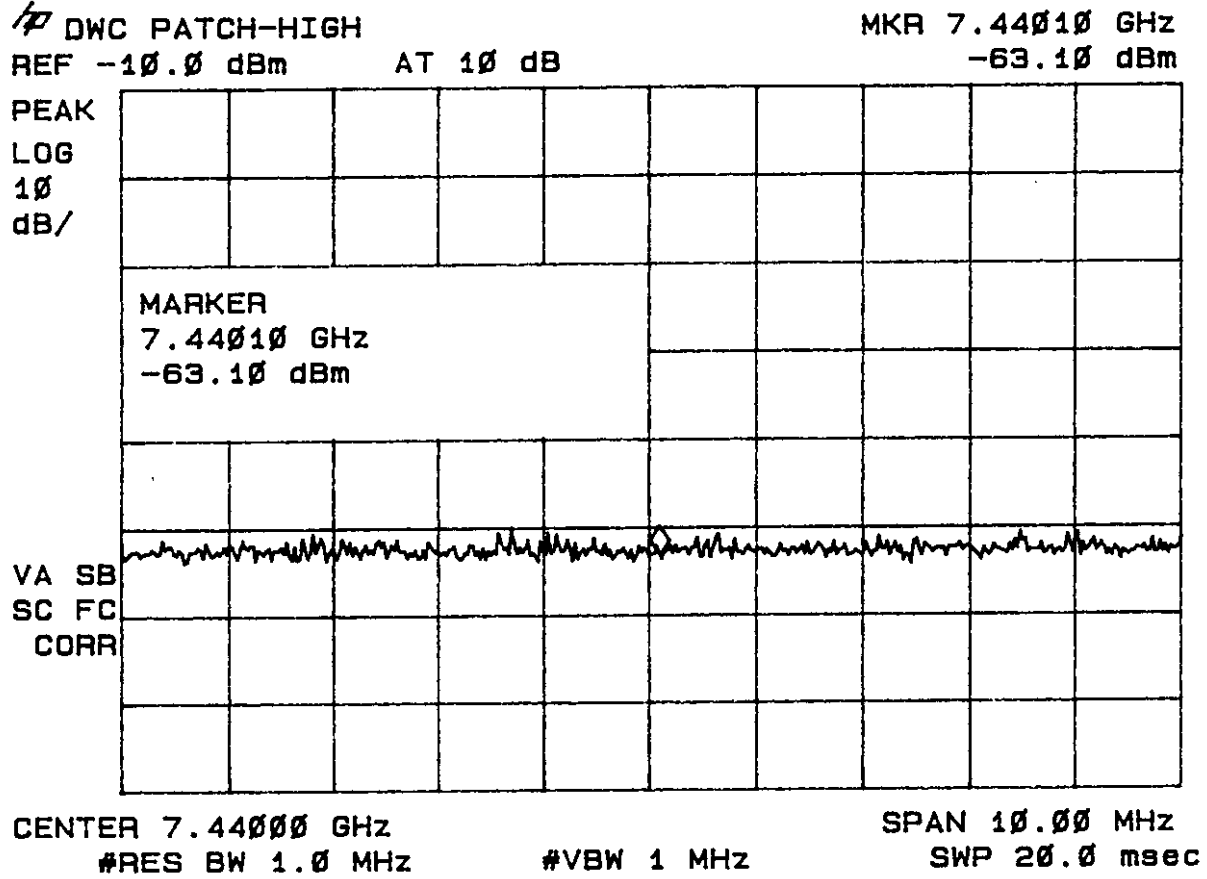


**Figure 37**  
**Peak Spurious Emissions 15.247(c) High**  
**(DWC Patch Antenna - 6 dBi gain)**

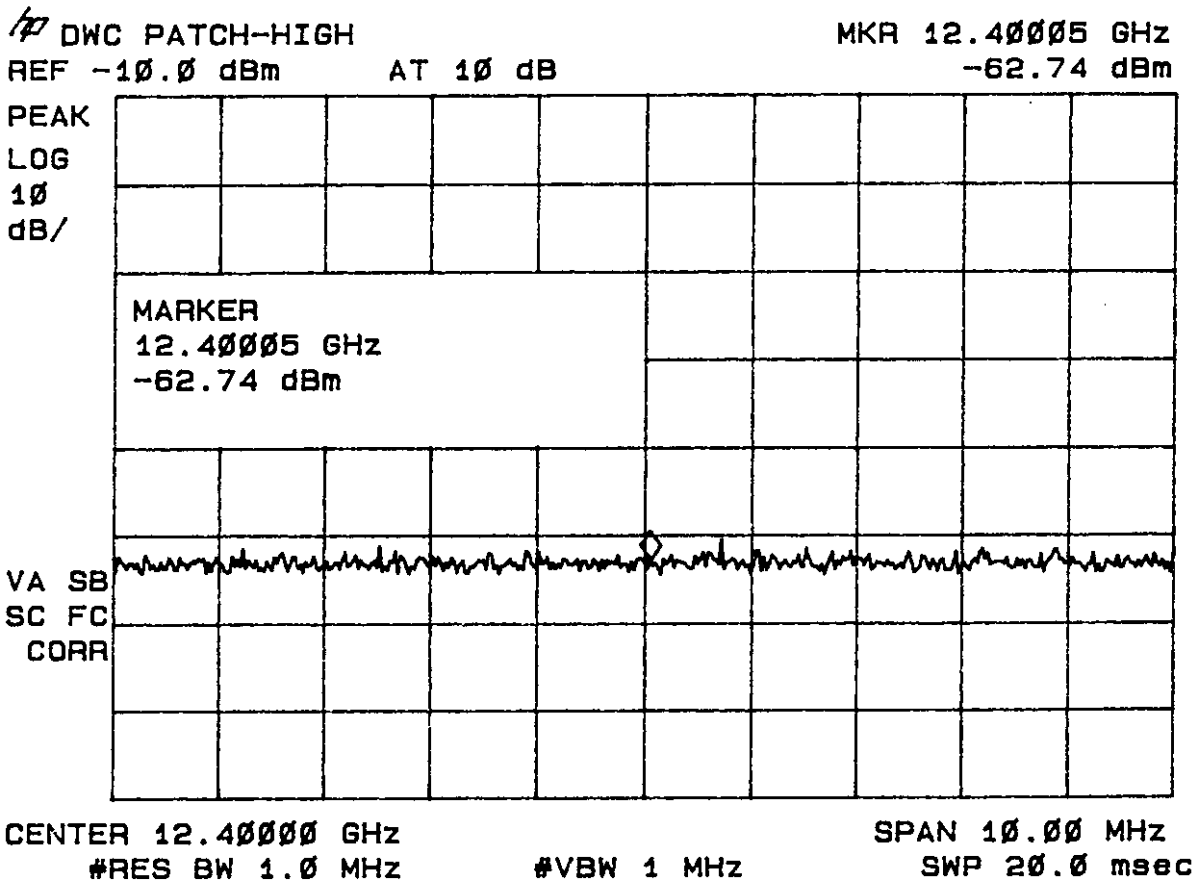


**Figure 38**  
**Peak Spurious Emissions 15.247(c) Low**  
**(Parabolic Antenna - 24 dBi gain)**

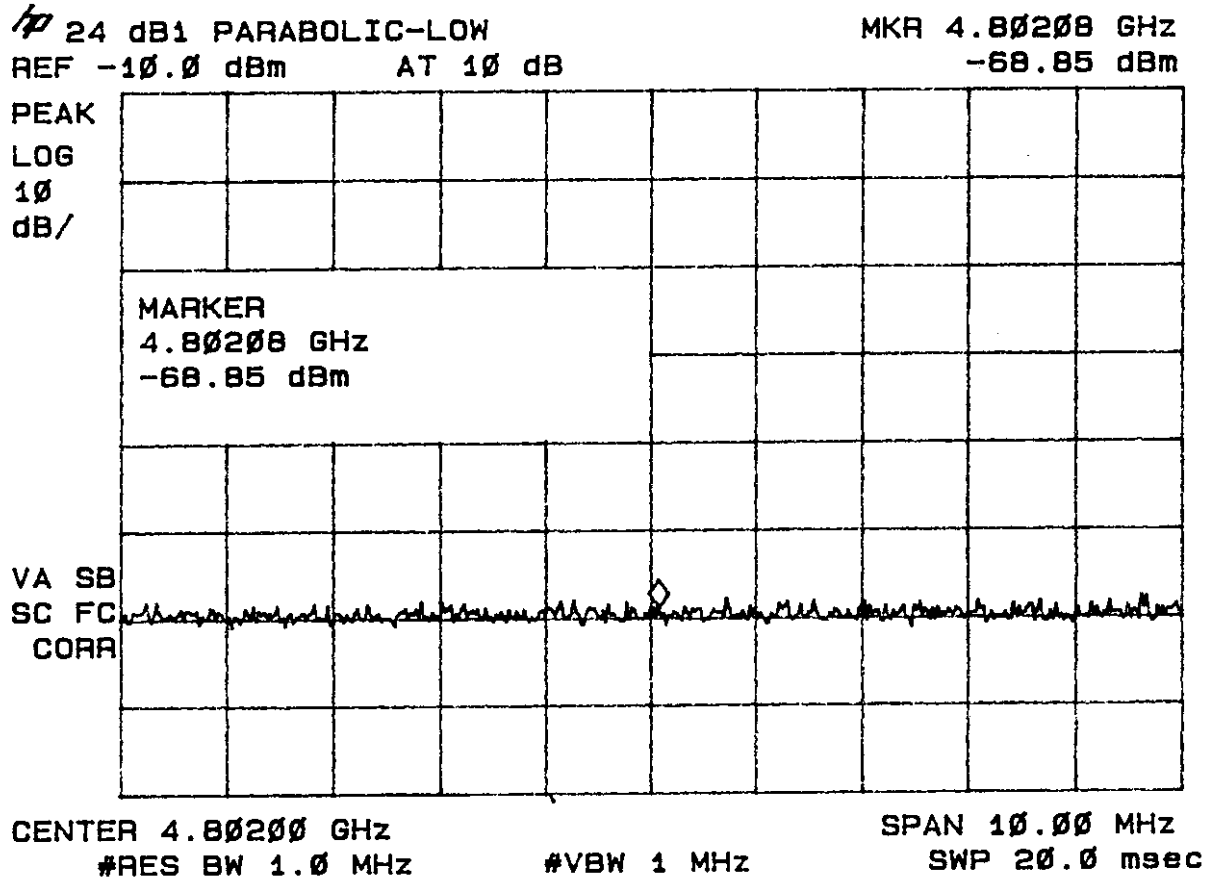


**Figure 39**  
**Peak Spurious Emissions 15.247(c) Low**  
**(Parabolic Antenna - 24 dBi gain)**

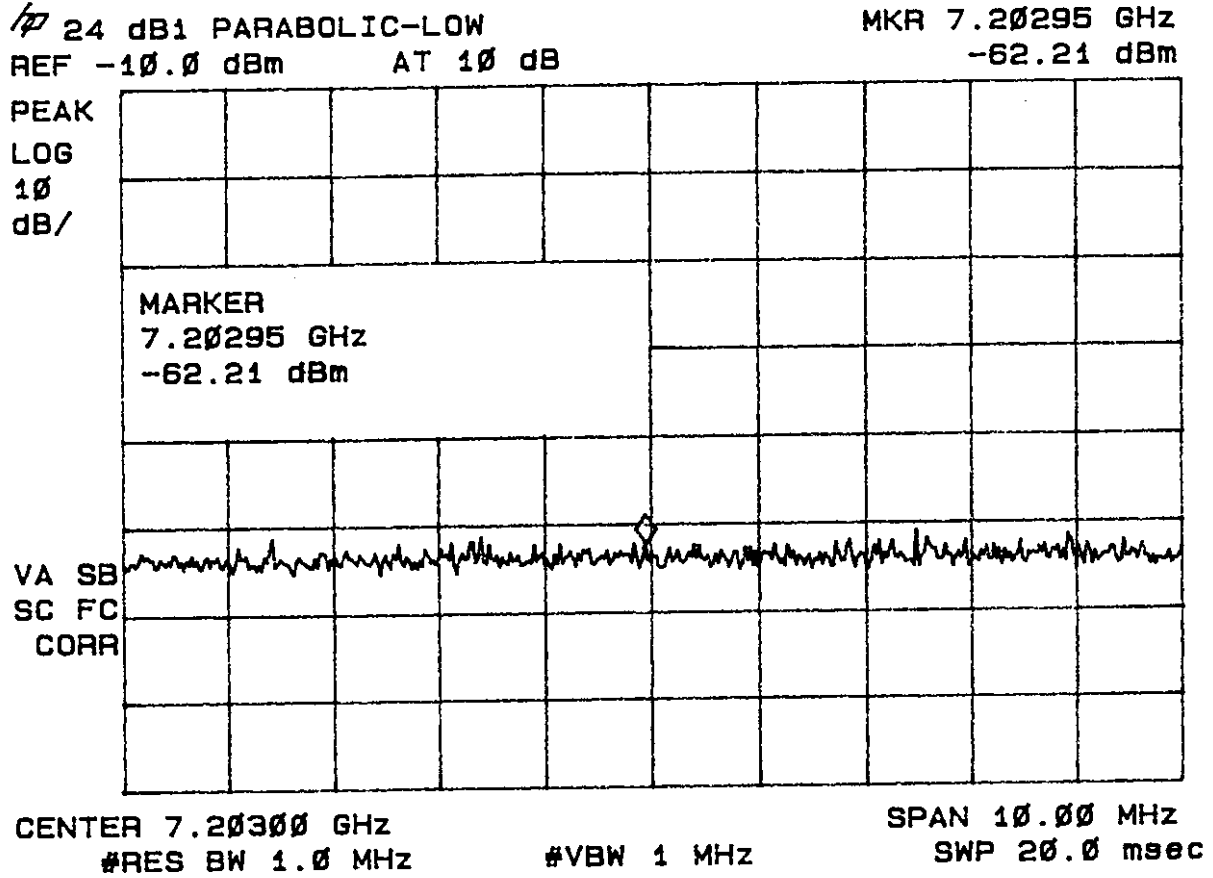

**Figure 40**  
**Peak Spurious Emissions 15.247(c) Low**  
**(Parabolic Antenna - 24 dBi gain)**

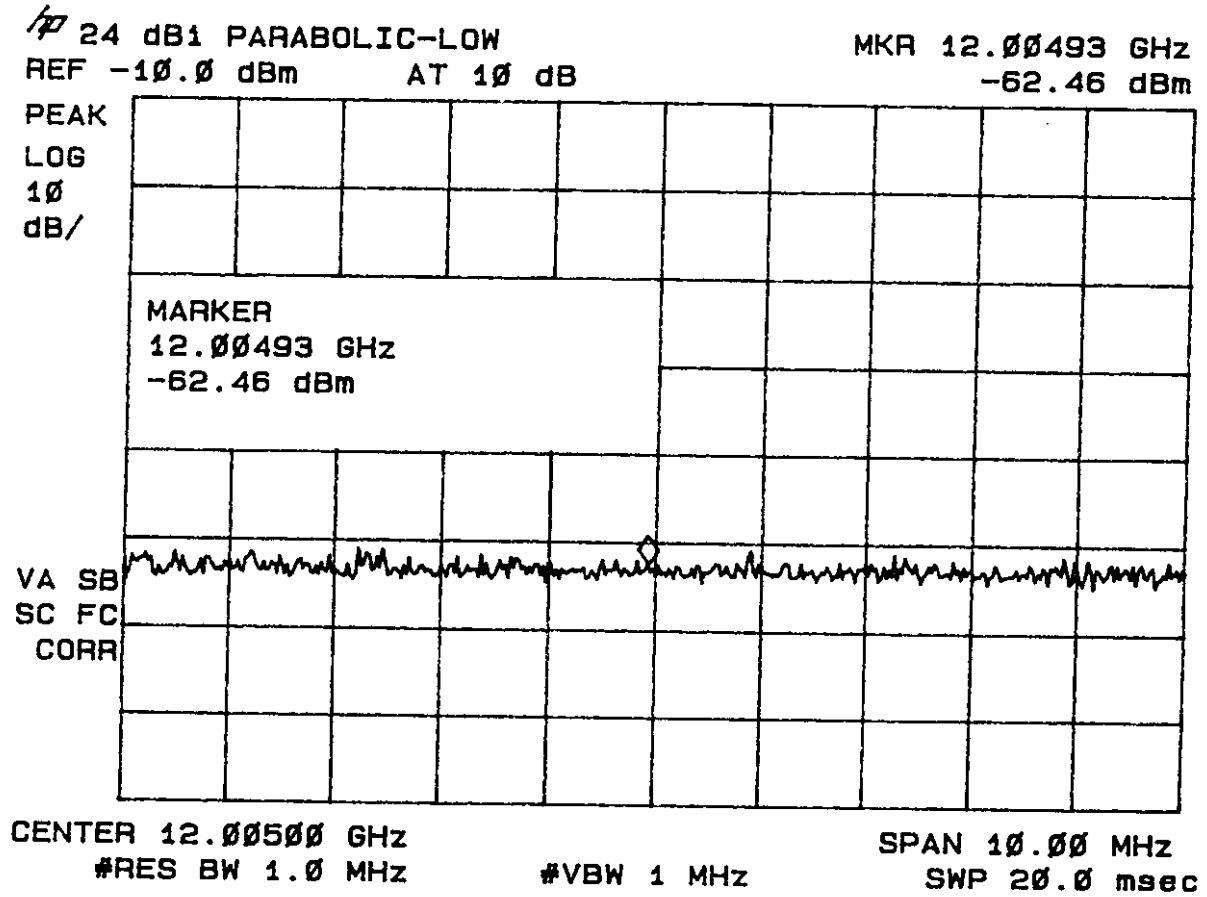

**Figure 41**  
**Peak Spurious Emissions 15.247(c) Middle**  
**(Parabolic Antenna - 24 dBi gain)**

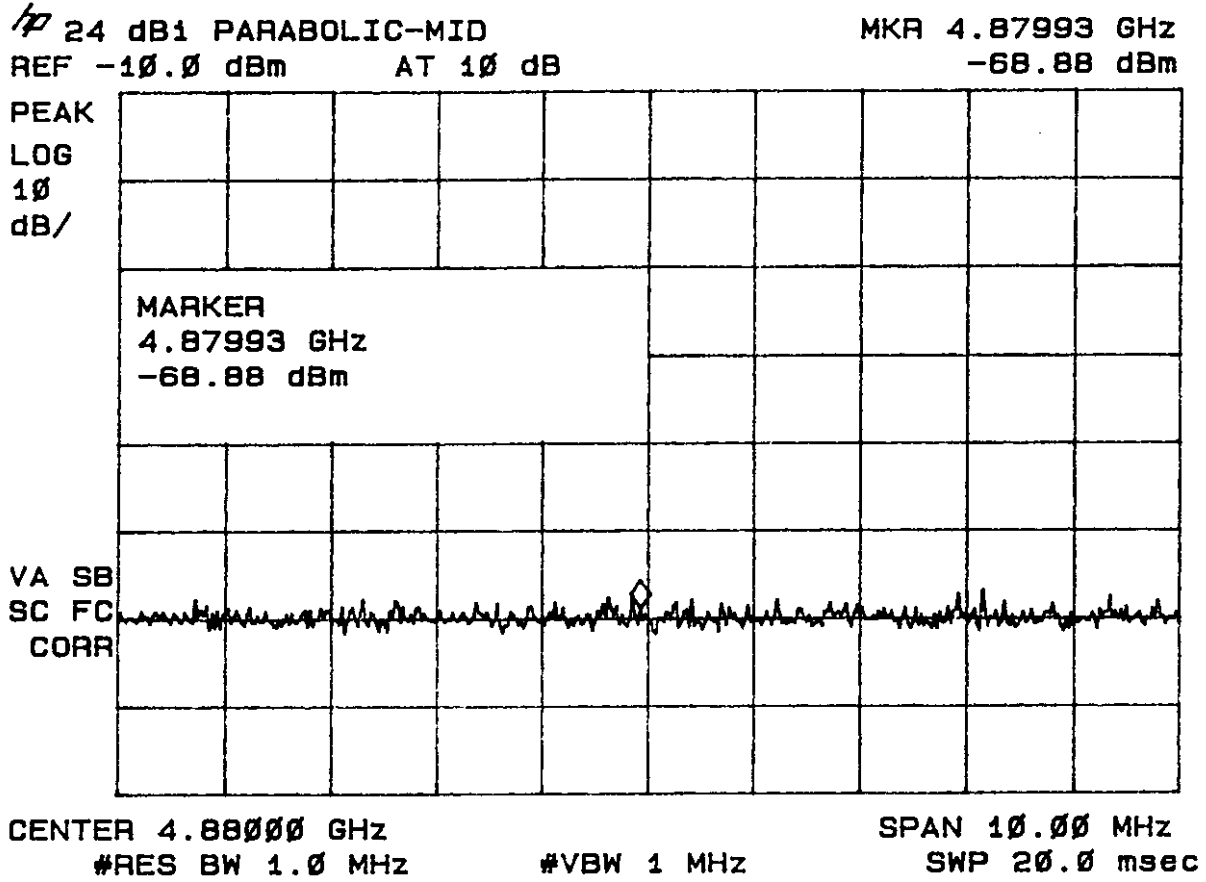



**Figure 42**  
**Peak Spurious Emissions 15.247(c) Middle**  
**(Parabolic Antenna - 24 dBi gain)**


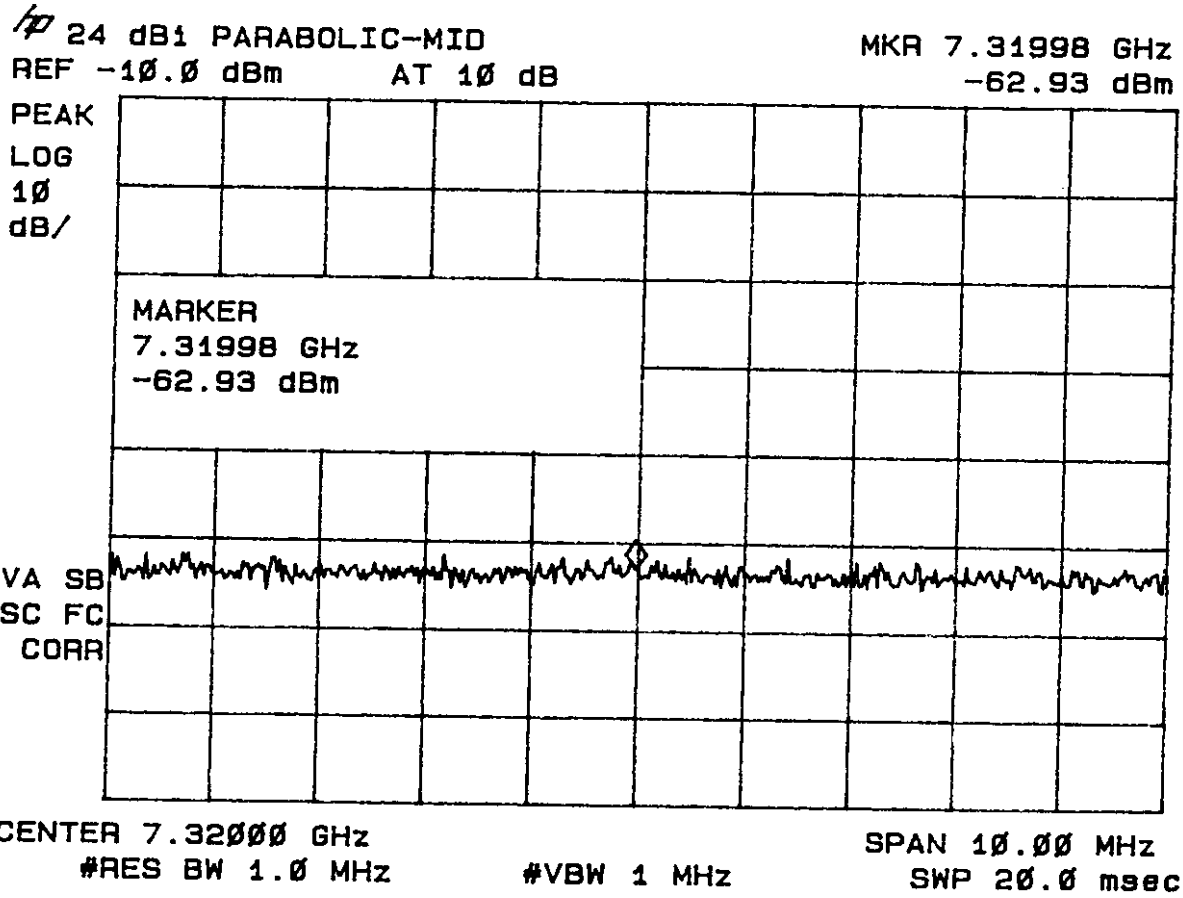



Figure 43  
Peak Spurious Emissions 15.247(c) Middle  
(Parabolic Antenna - 24 dBi gain)

24 dBi PARABOLIC-MID MKR 12.19998 GHz  
REF -10.0 dBm AT 10 dB -62.90 dBm

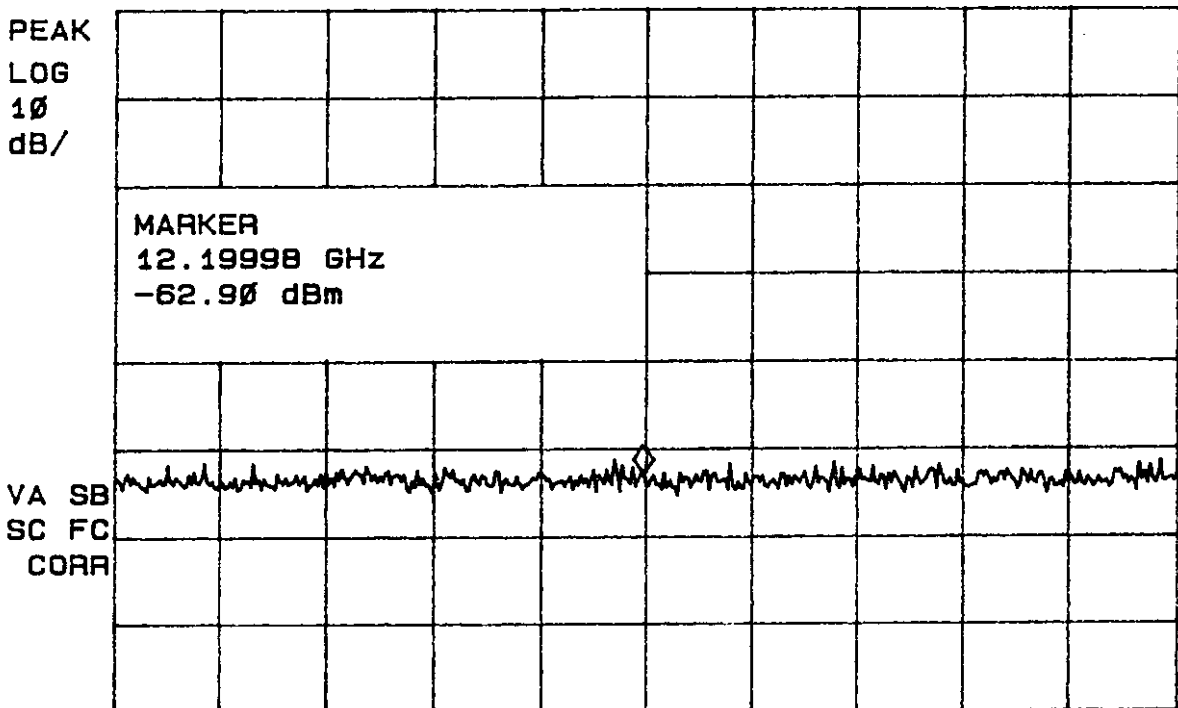


CENTER 12.20000 GHz SPAN 10.00 MHz  
#RES BW 1.0 MHz #VBW 1 MHz SWP 20.0 msec


**Figure 44**  
**Peak Spurious Emissions 15.247(c) High**  
**(Parabolic Antenna - 24 dBi gain)**

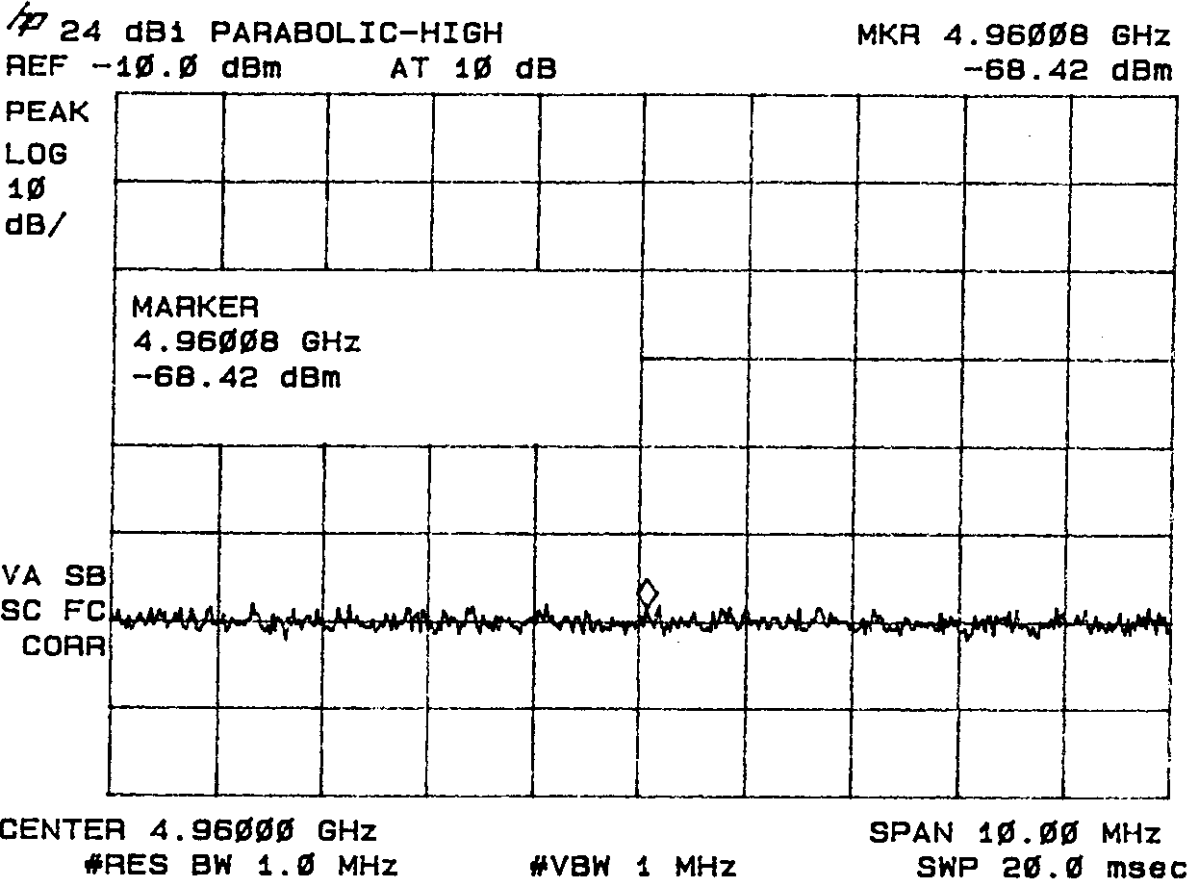


**Figure 45**  
**Peak Spurious Emissions 15.247(c) High**  
**(Parabolic Antenna - 24 dBi gain)**

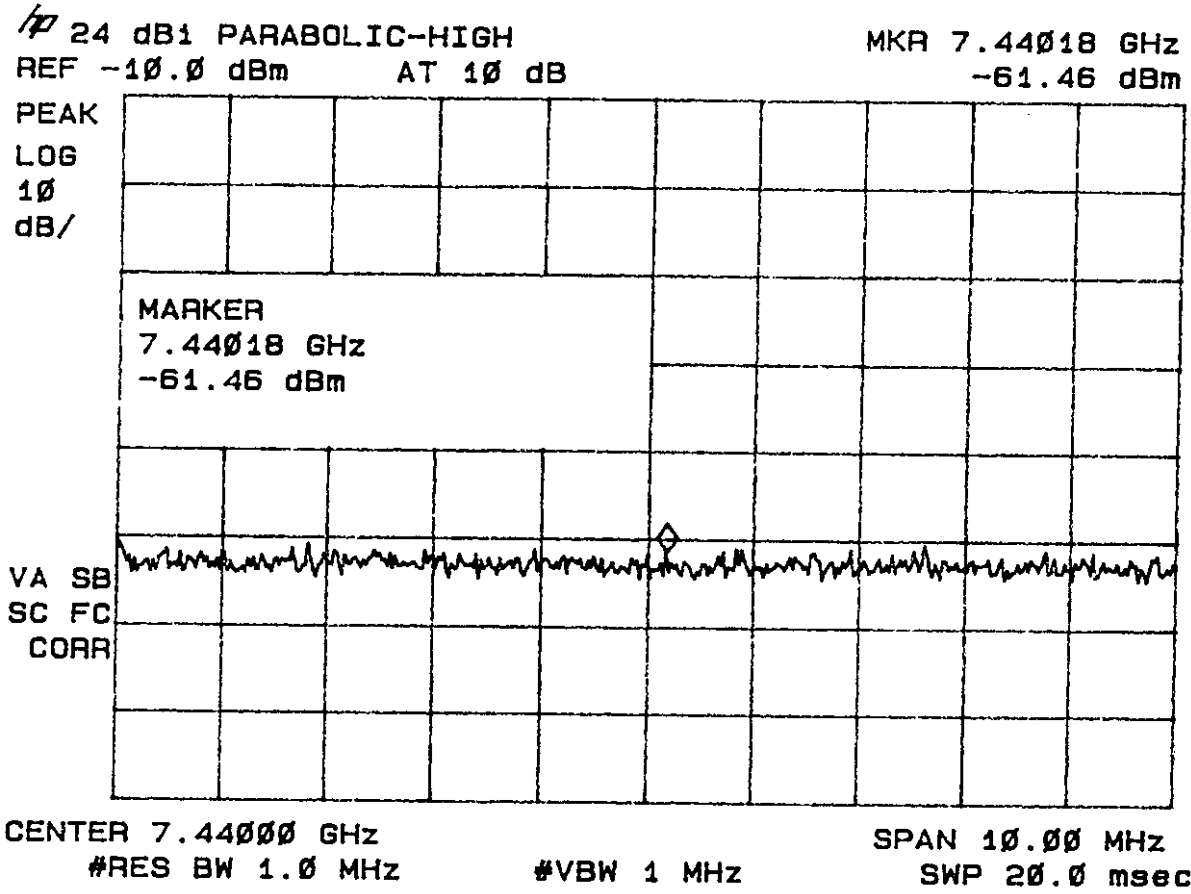

**Figure 46**  
**Peak Spurious Emissions 15.247(c) High**  
**(Parabolic Antenna - 24 dBi gain)**

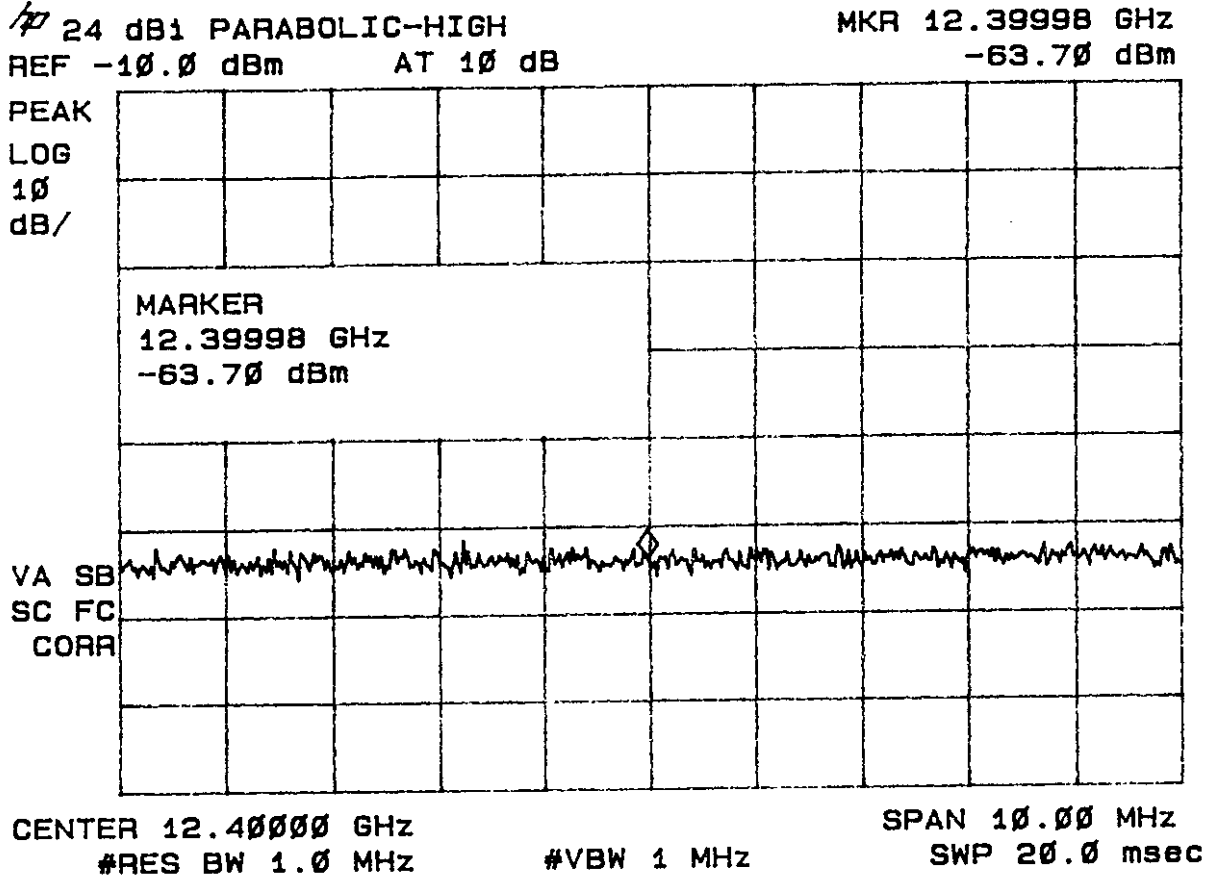

**Figure 47**  
**Peak Spurious Emissions 15.247(c) Low**  
**(Yagi Antenna - 15 dBi gain)**

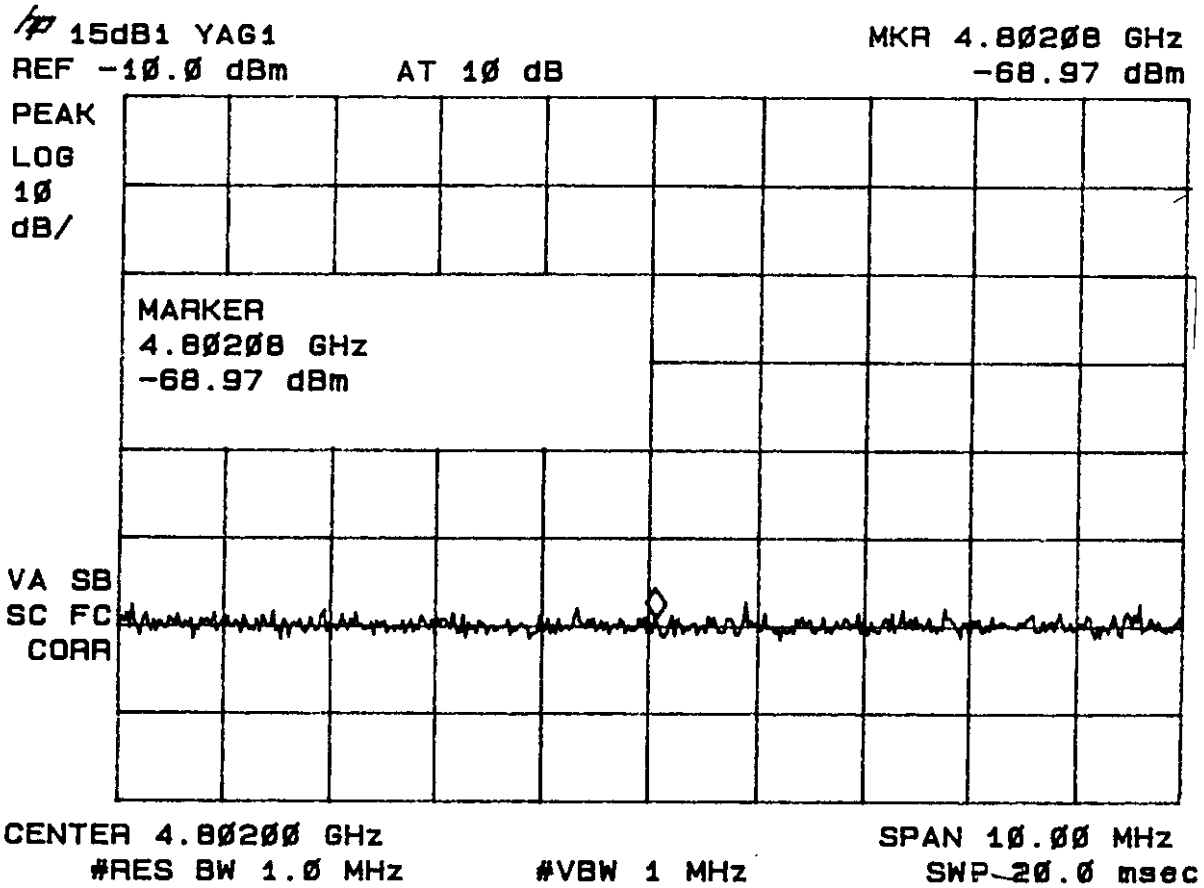

**Figure 48**  
**Peak Spurious Emissions 15.247(c) Low**  
**(Yagi Antenna - 15 dBi gain)**



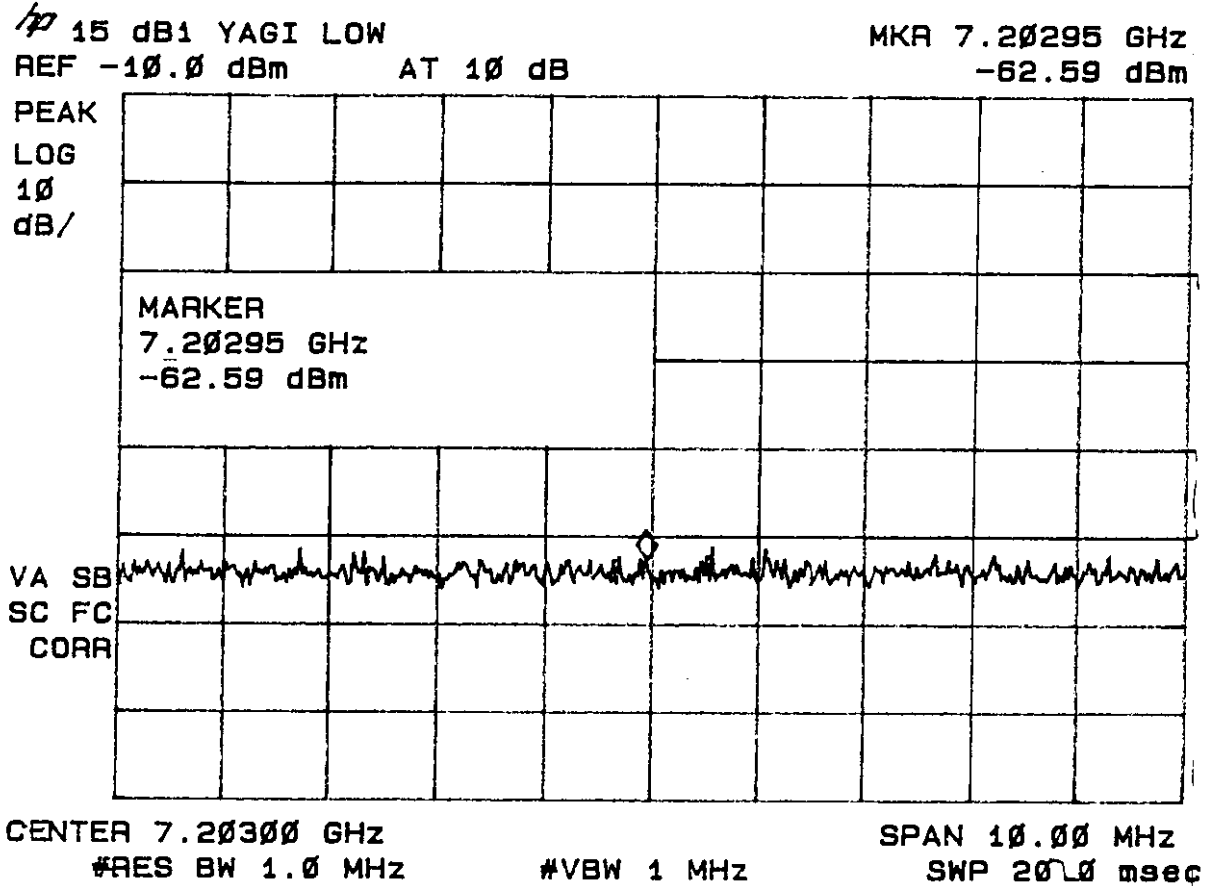


Figure 49  
Peak Spurious Emissions 15.247(c) Low  
(Yagi Antenna - 15 dBi gain)




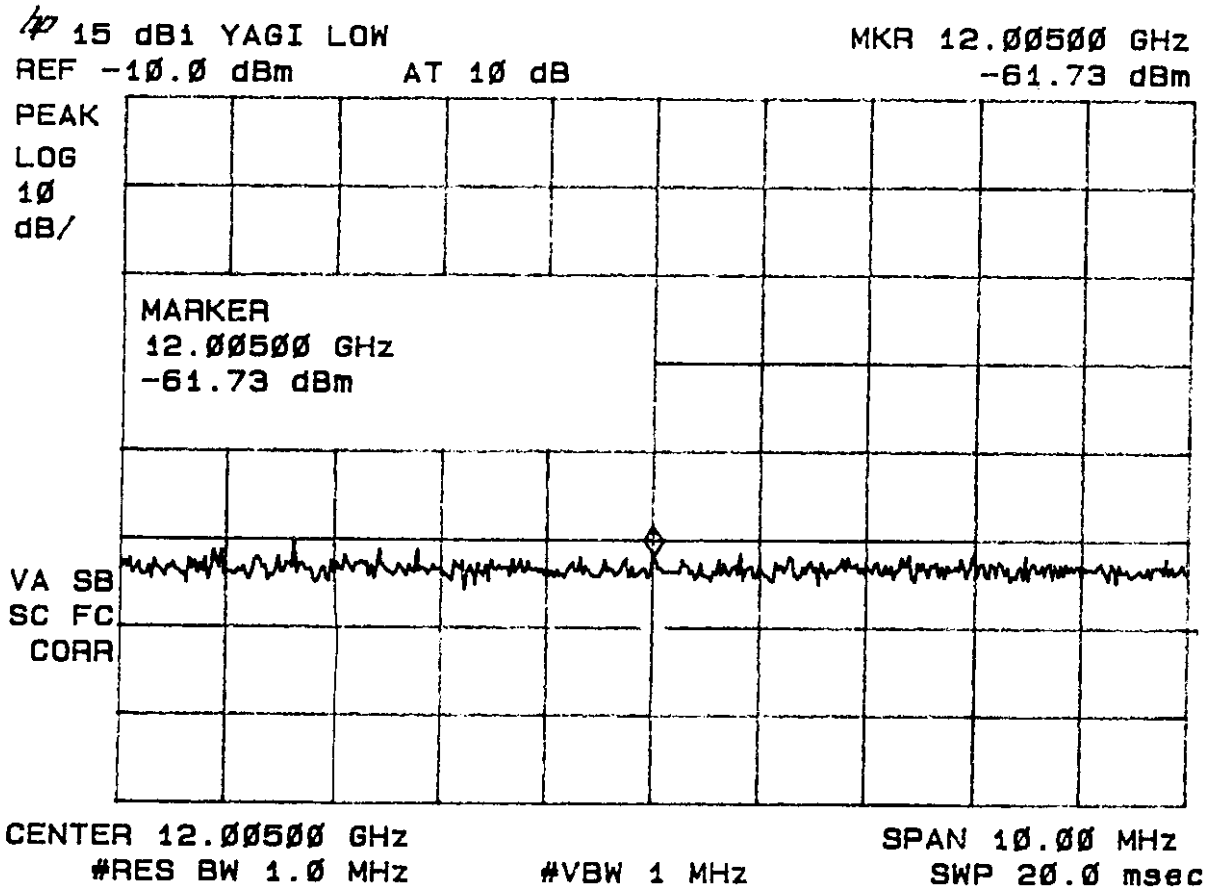


**Figure 50**  
**Peak Spurious Emissions 15.247(c) Middle**  
**(Yagi Antenna - 15 dBi gain)**

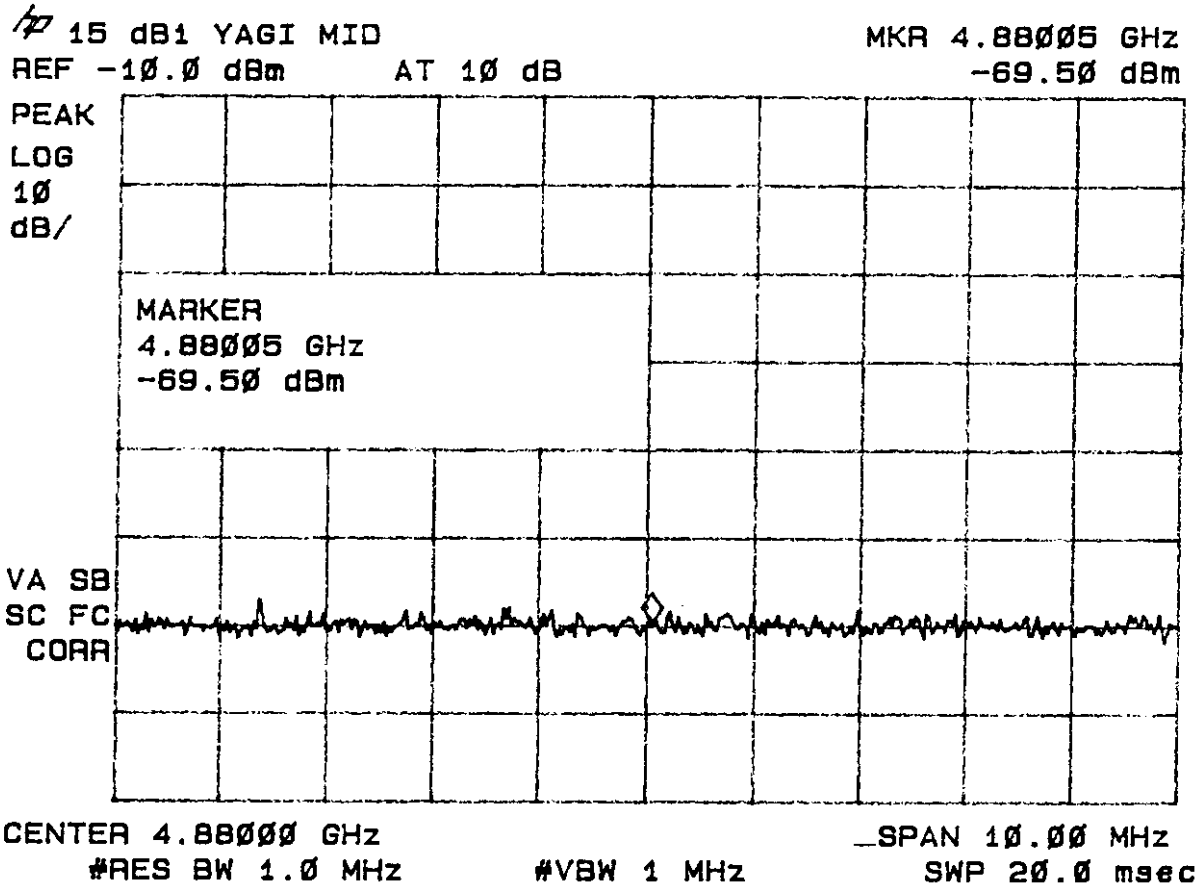


**Figure 51**  
**Peak Spurious Emissions 15.247(c) Middle**  
**(Yagi Antenna - 15 dBi gain)**

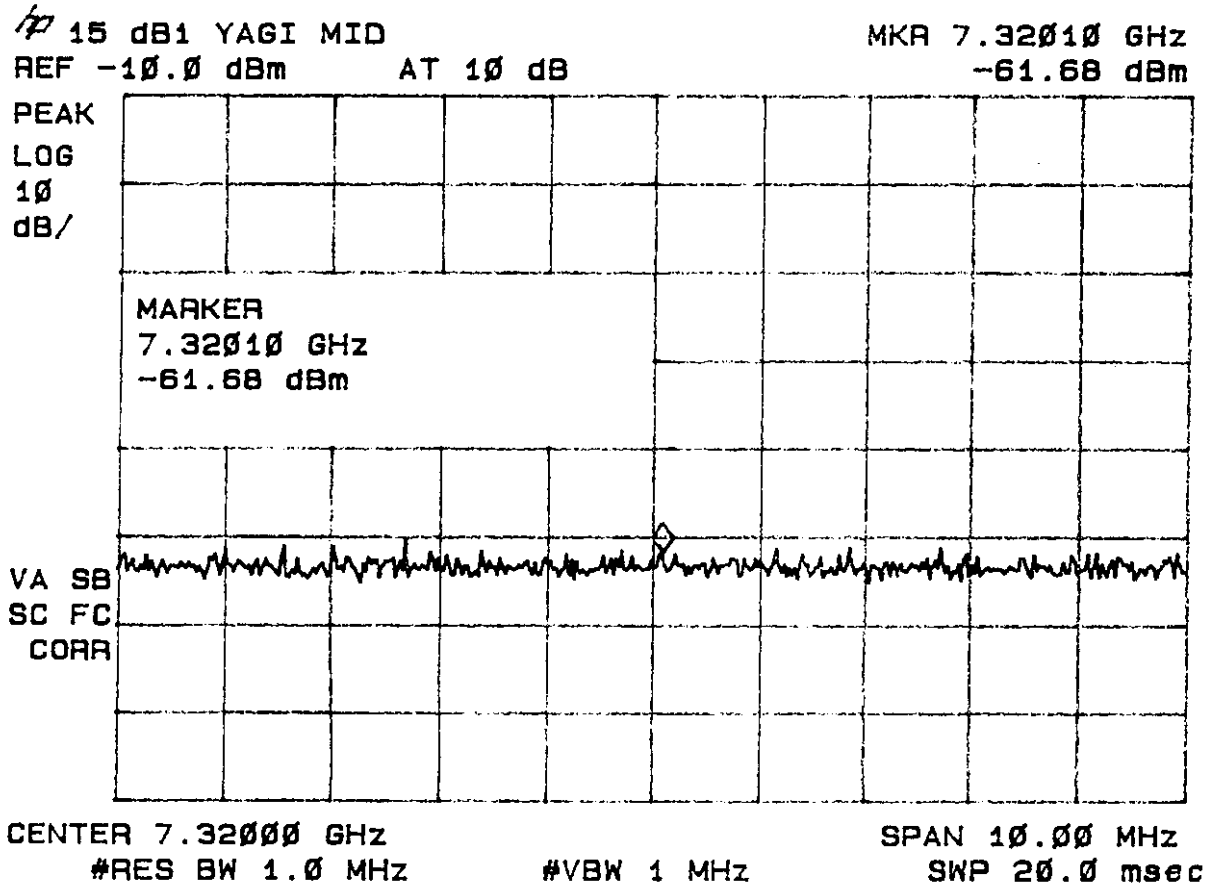


**Figure 52**  
**Peak Spurious Emissions 15.247(c) Middle**  
**(Yagi Antenna - 15 dBi gain)**

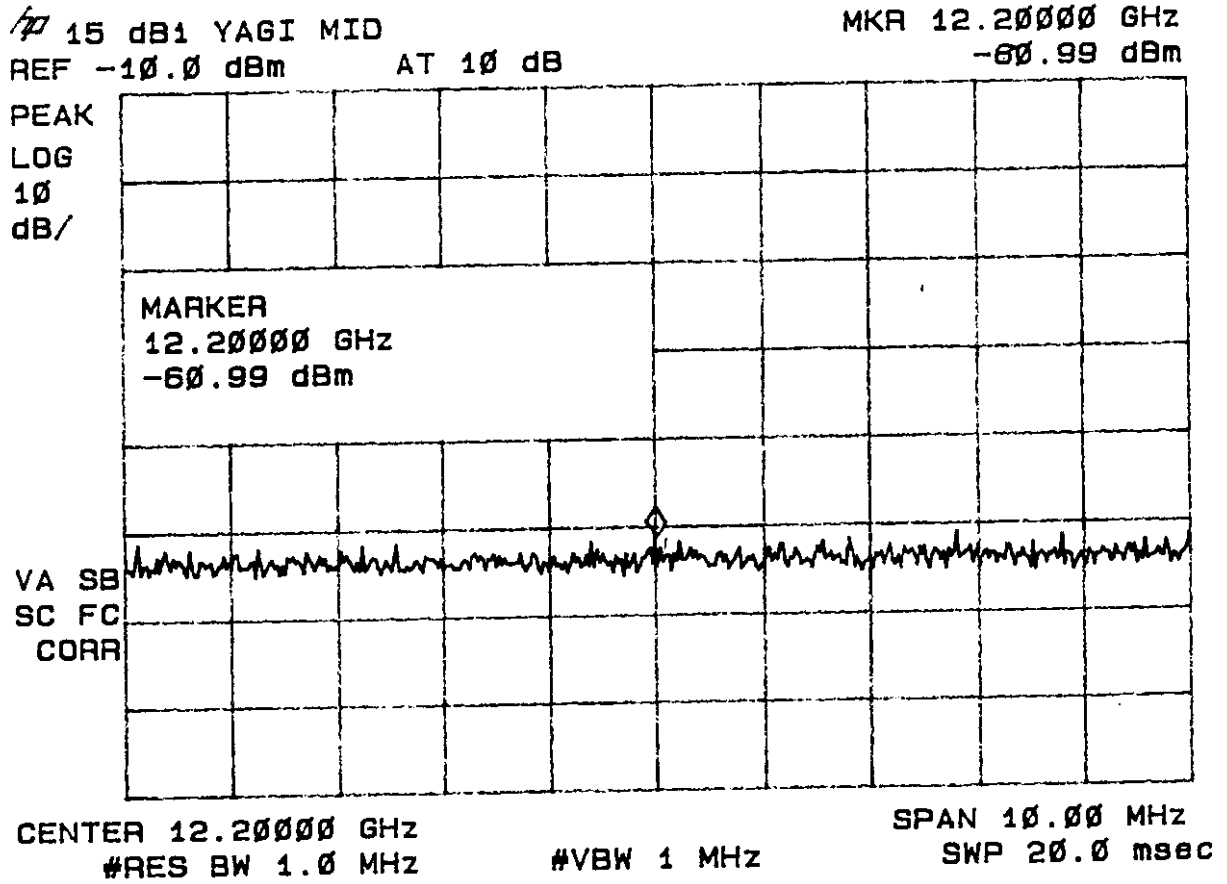


**Figure 53**  
**Peak Spurious Emissions 15.247(c) High**  
**(Yagi Antenna - 15 dBi gain)**

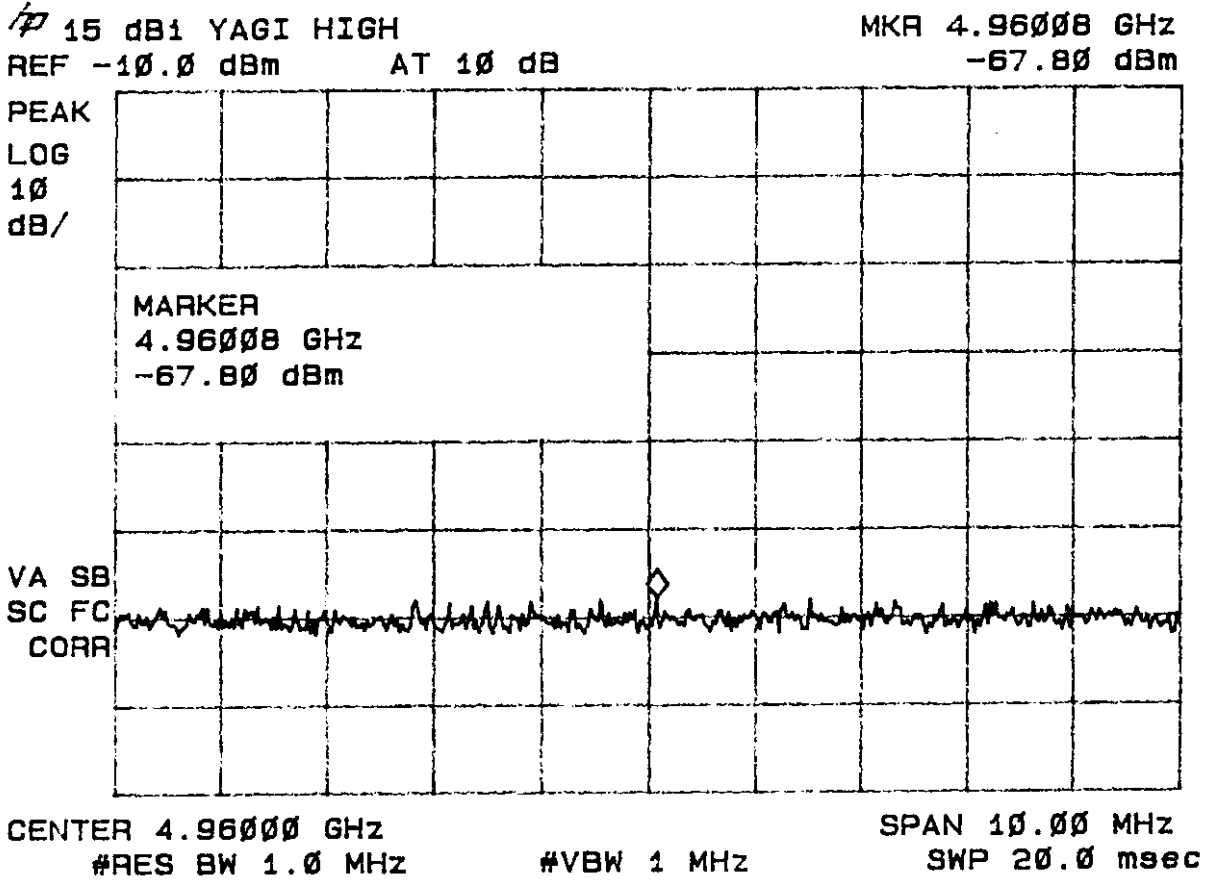


**Figure 54**  
**Peak Spurious Emissions 15.247(c) High**  
**(Yagi Antenna - 15 dBi gain)**

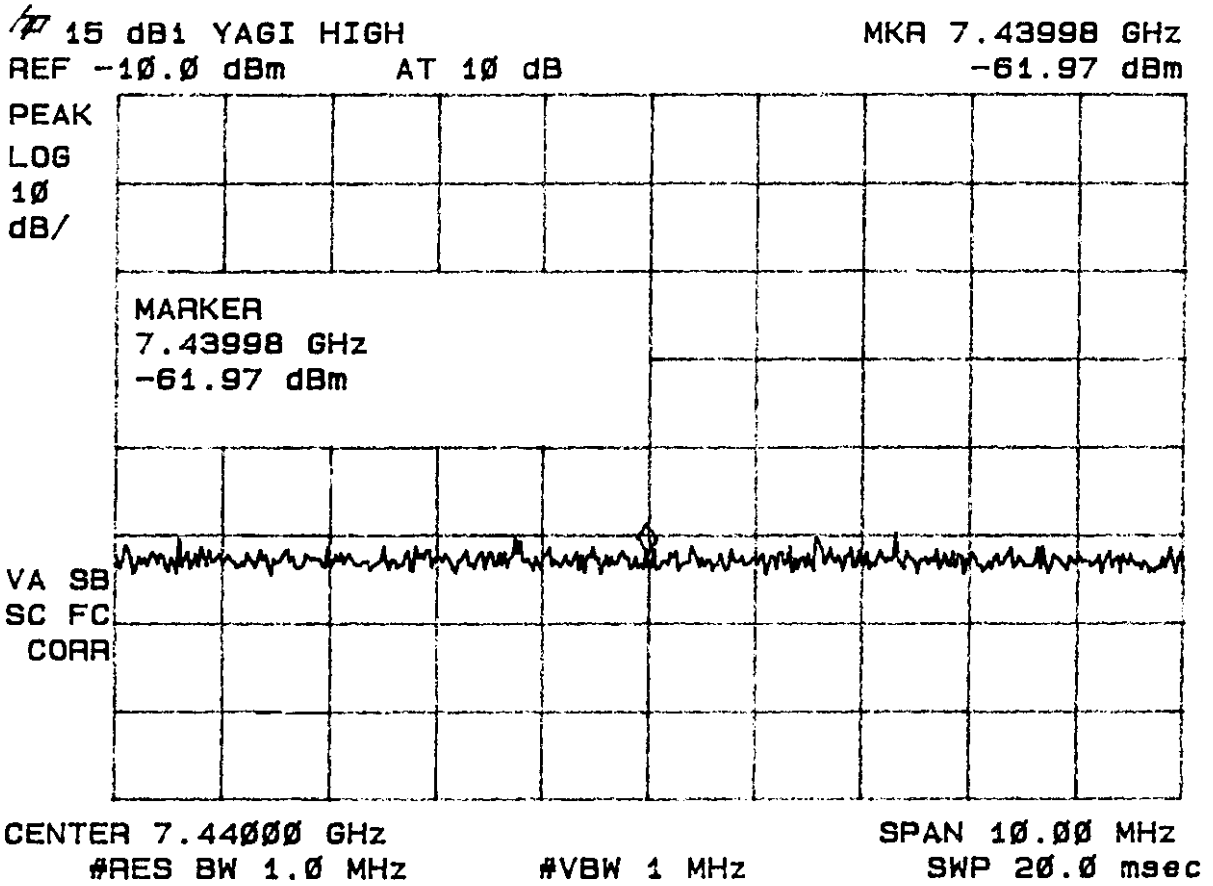


**Figure 55**  
**Peak Spurious Emissions 15.247(c) High**  
**(Yagi Antenna - 15 dBi gain)**

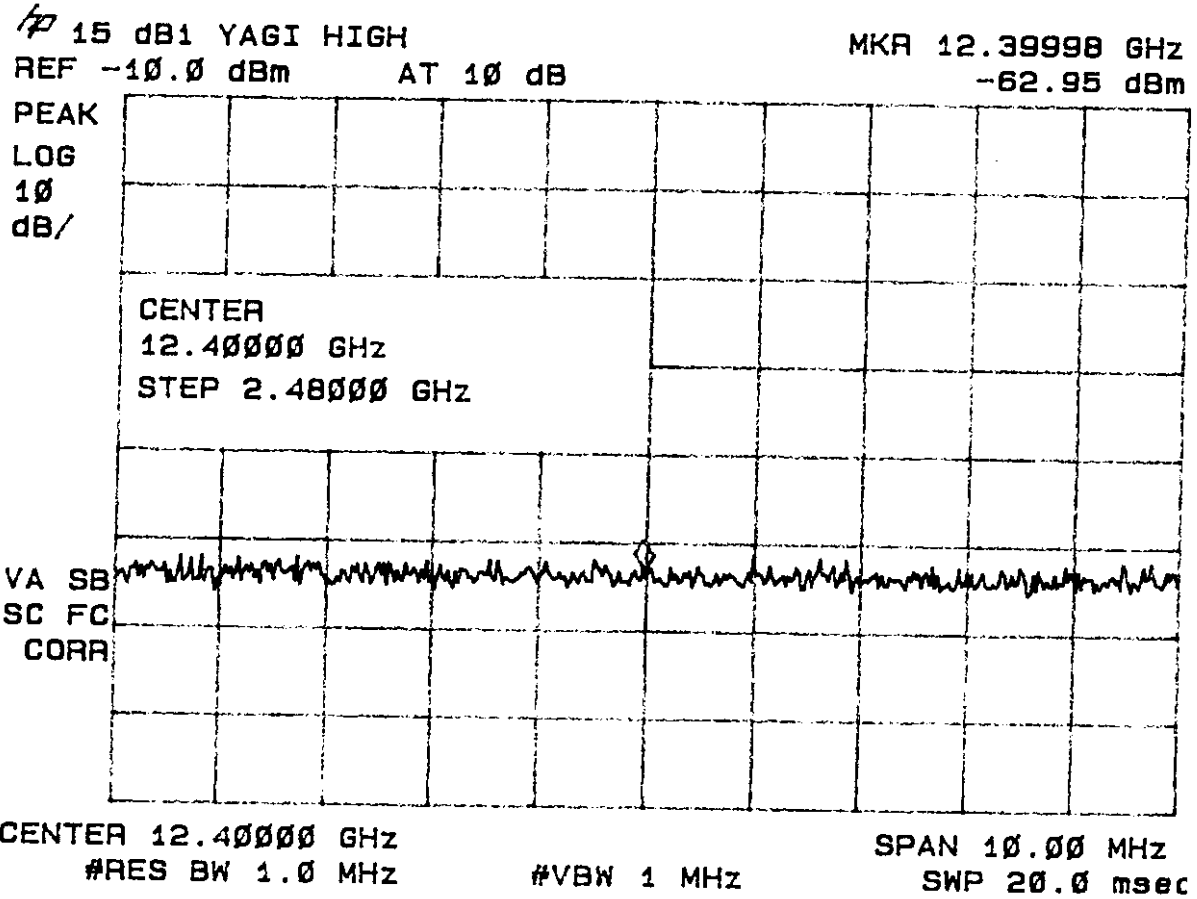

**Figure 56**  
**Peak Spurious Emissions 15.247(c) Low**  
**(Patch Antenna - 11 dBi gain)**

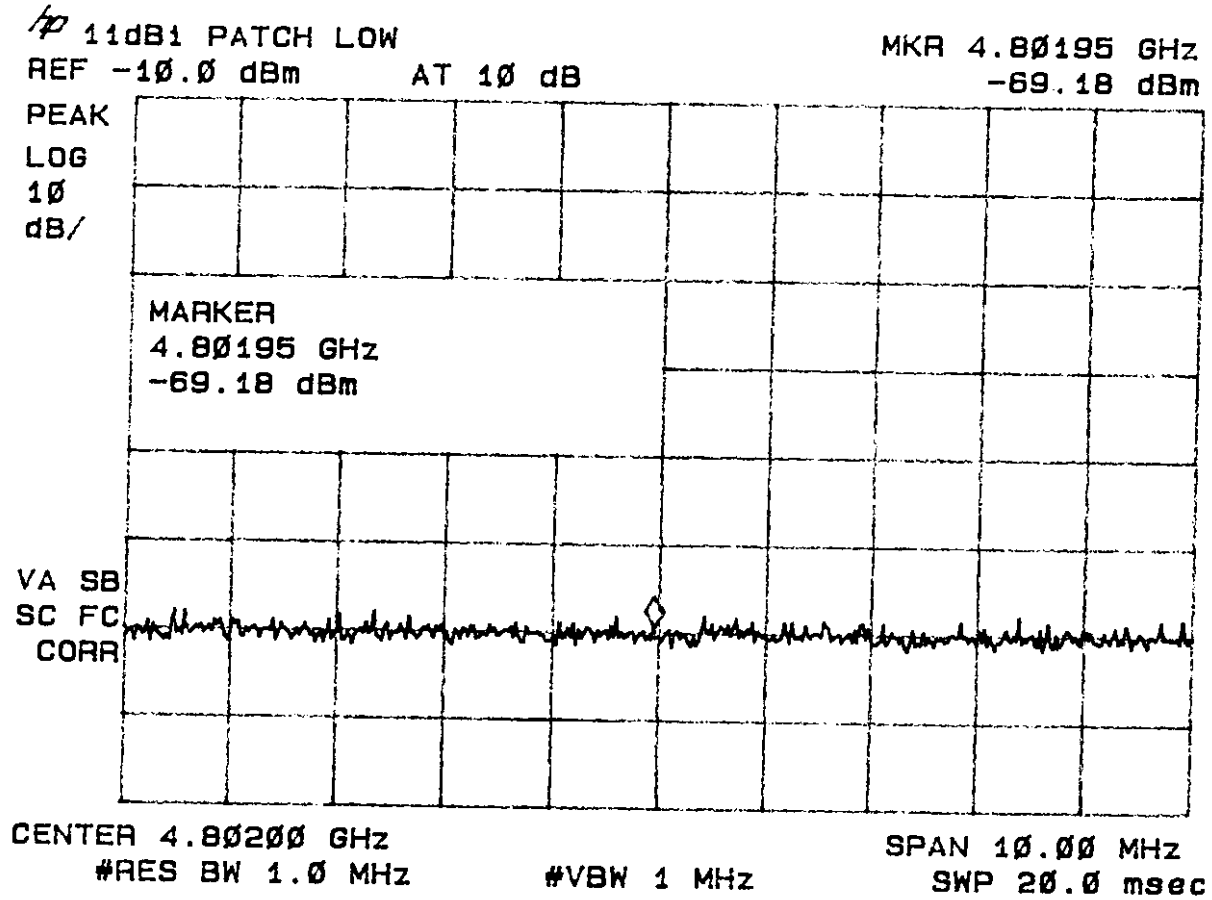


**Figure 57**  
**Peak Spurious Emissions 15.247(c) Low**  
**(Patch Antenna - 11 dBi gain)**

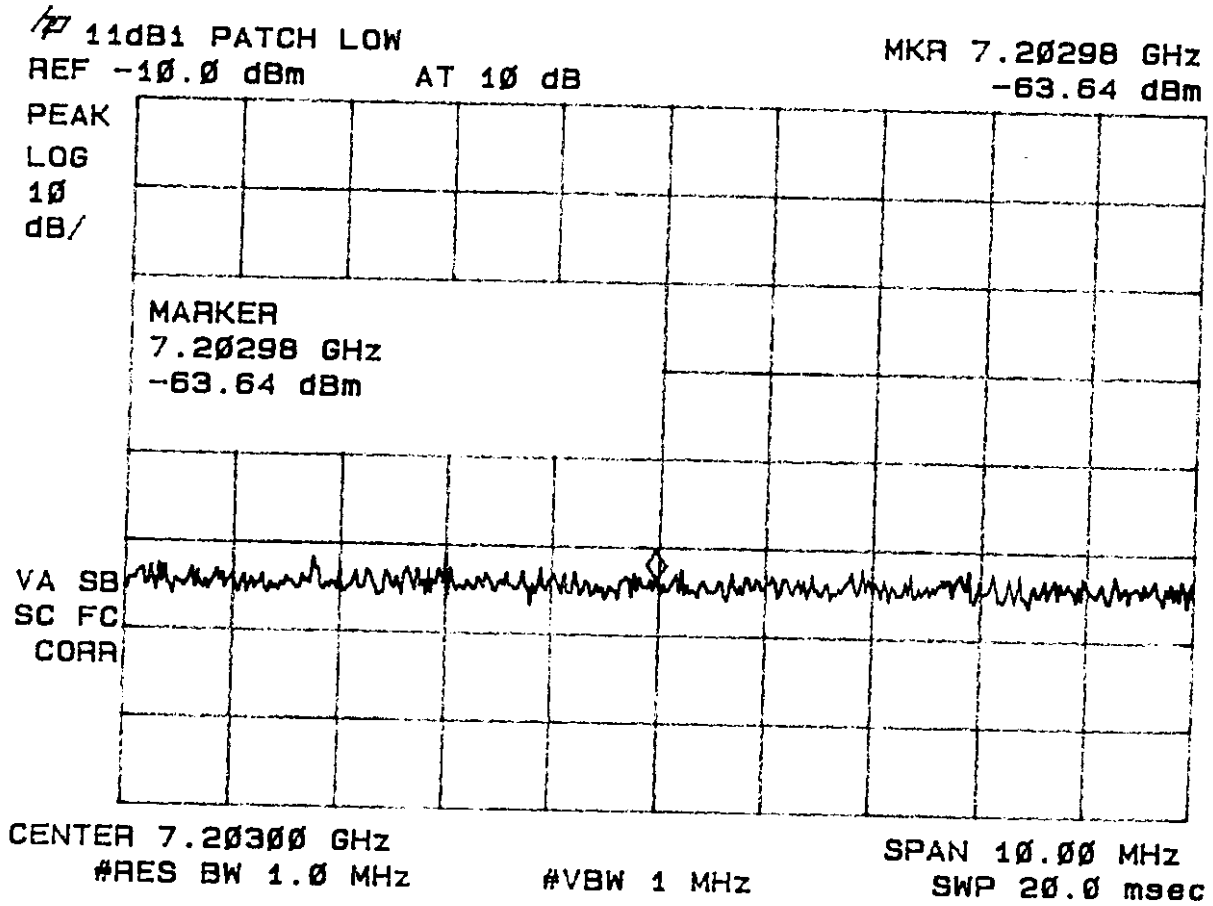




**Figure 58**  
**Peak Spurious Emissions 15.247(c) Low**  
**(Patch Antenna - 11 dBi gain)**

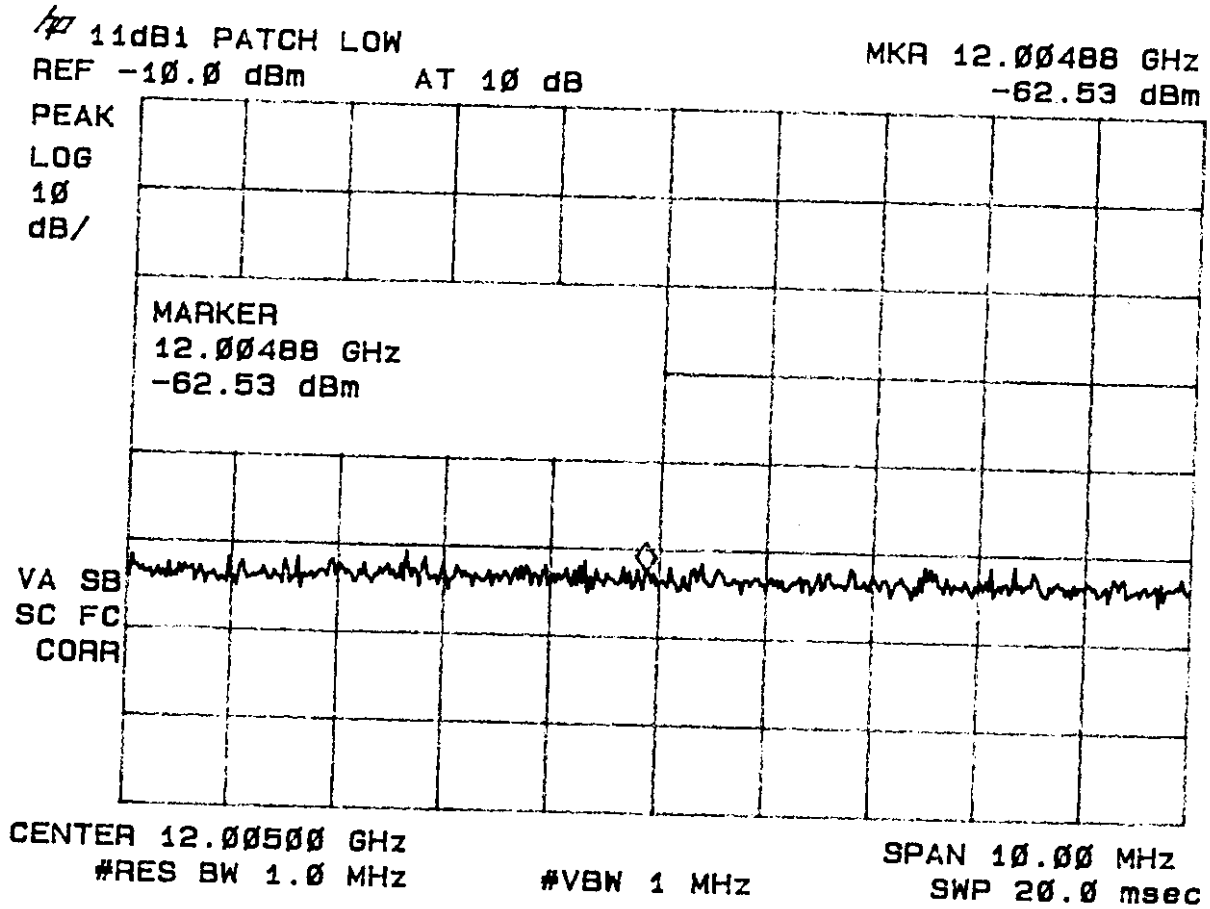

**Figure 59**  
**Peak Spurious Emissions 15.247(c) Middle**  
**(Patch Antenna - 11 dBi gain)**

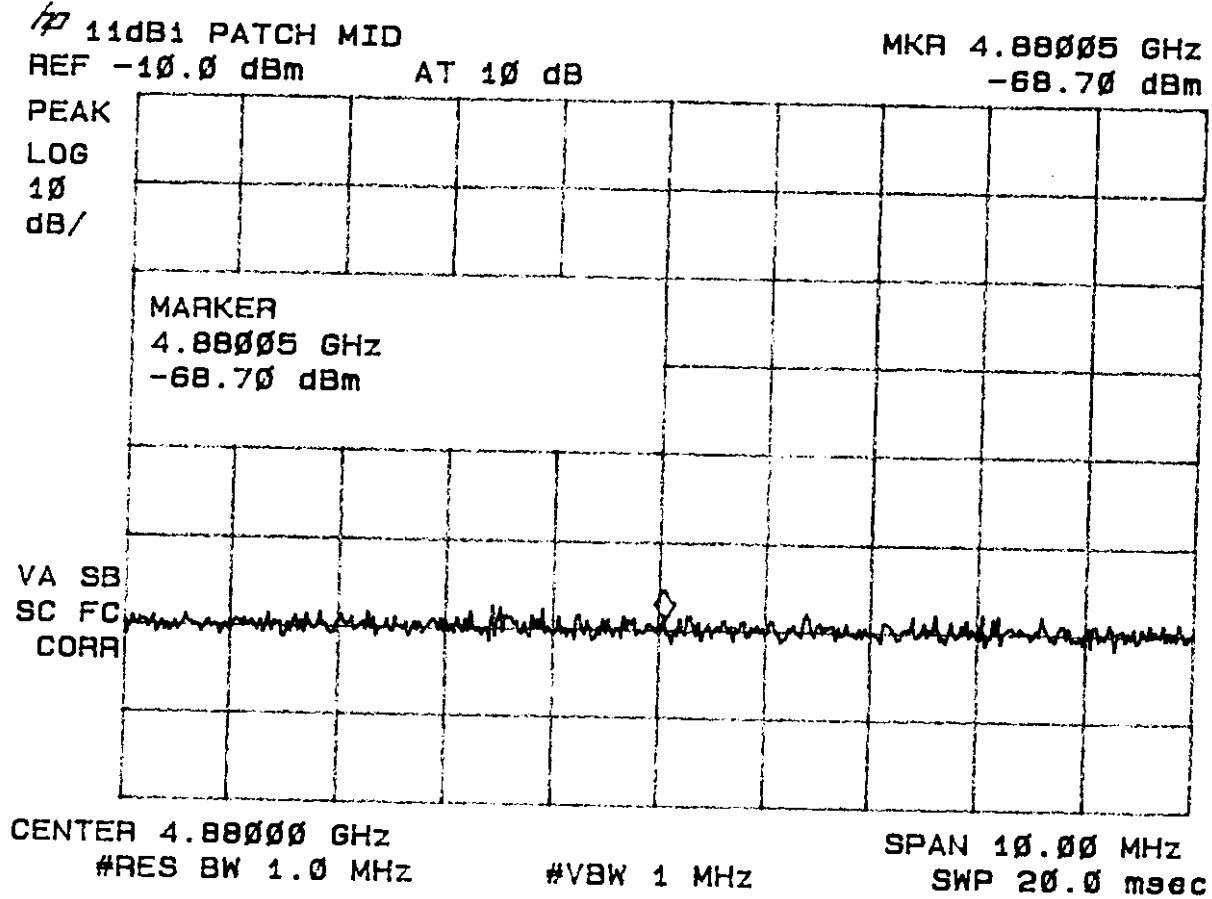

**Figure 60**  
**Peak Spurious Emissions 15.247(c) Middle**  
**(Patch Antenna - 11 dBi gain)**

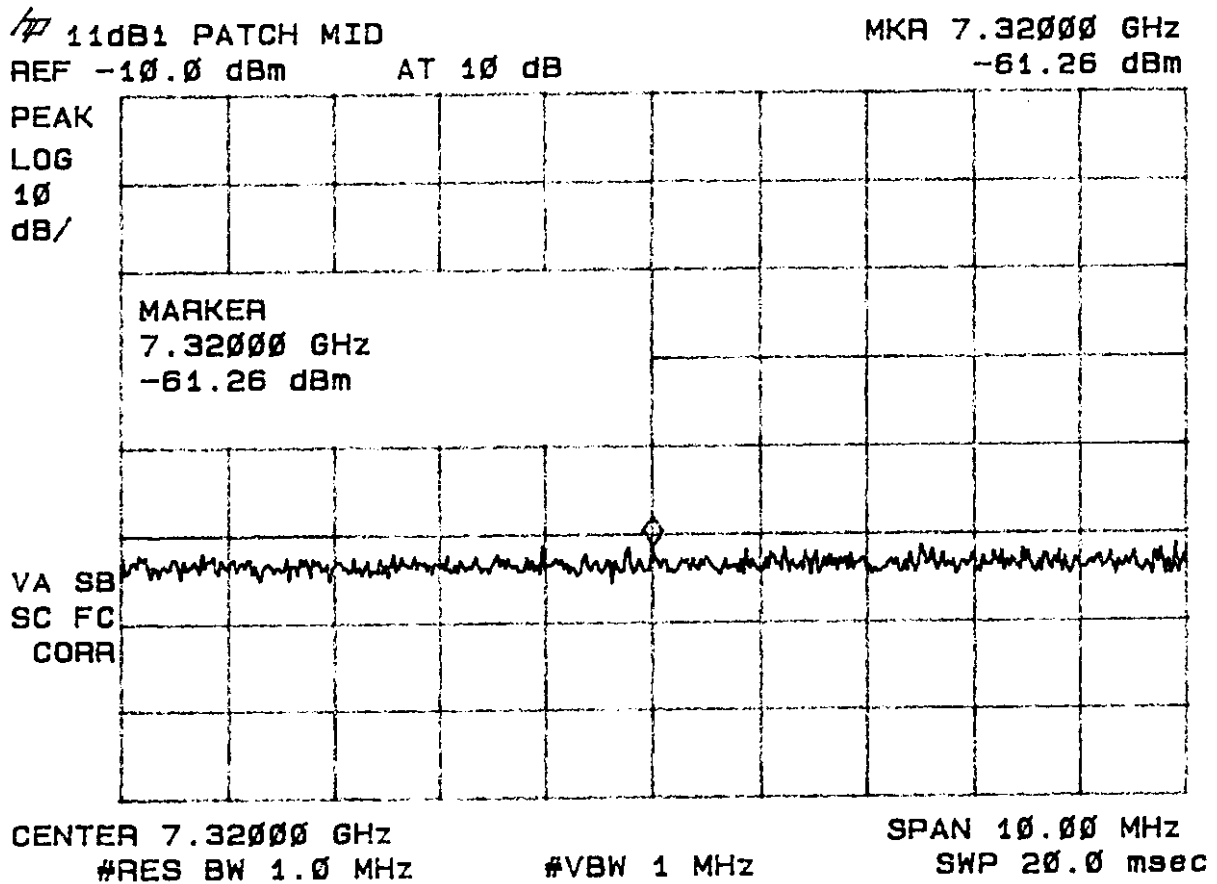


Figure 61  
Peak Spurious Emissions 15.247(c) Middle  
(Patch Antenna - 11 dBi gain)

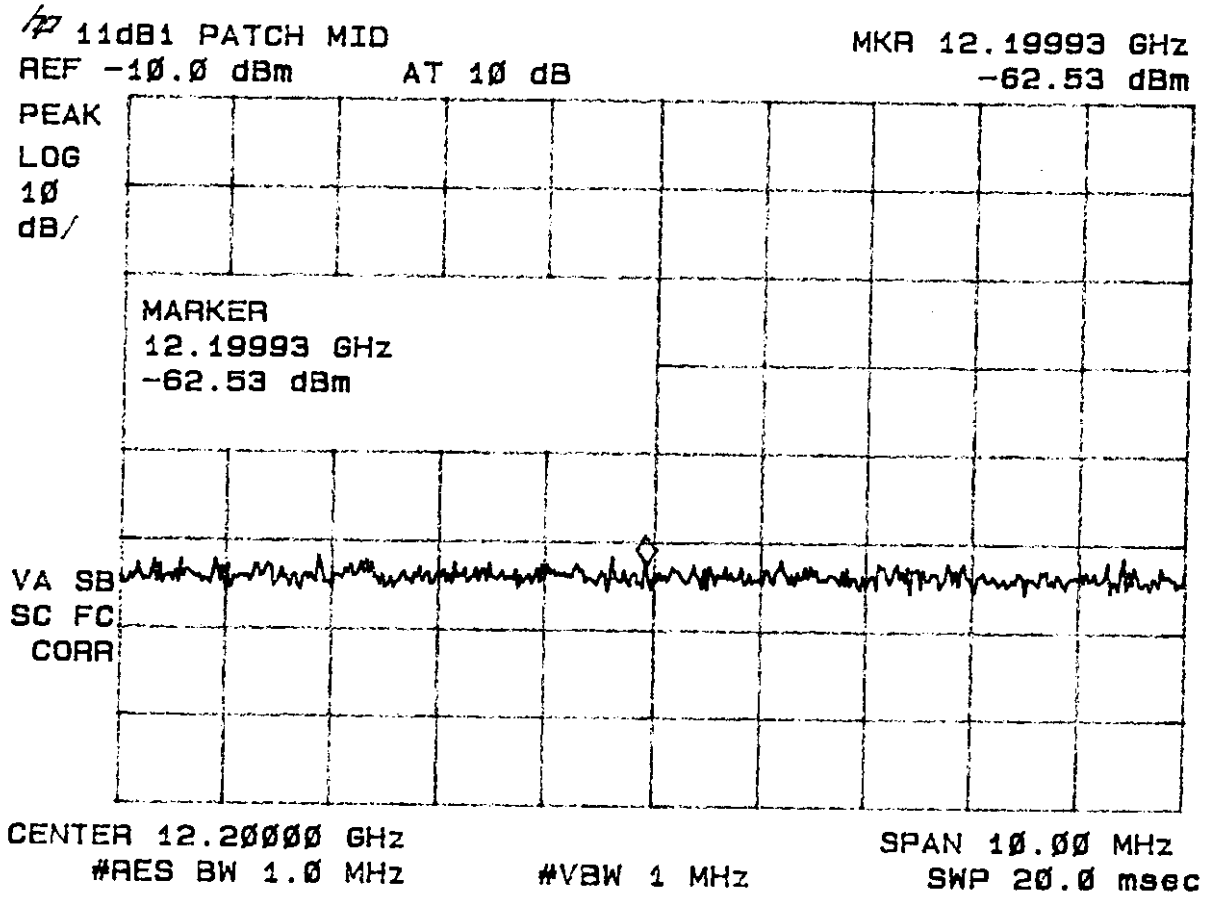


Figure 62  
Peak Spurious Emissions 15.247(c) High  
(Patch Antenna - 11 dBi gain)



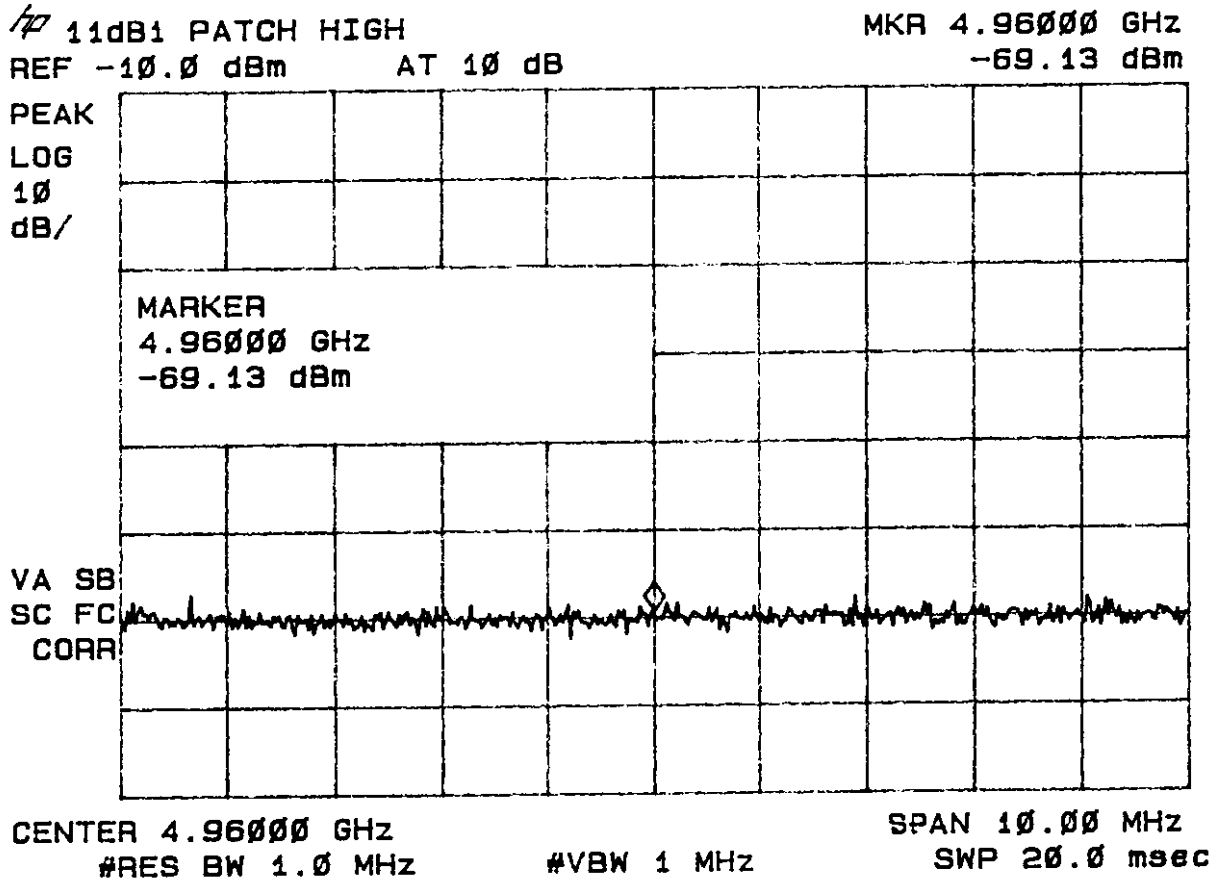


Figure 63  
Peak Spurious Emissions 15.247(c) High  
(Patch Antenna - 11 dBi gain)

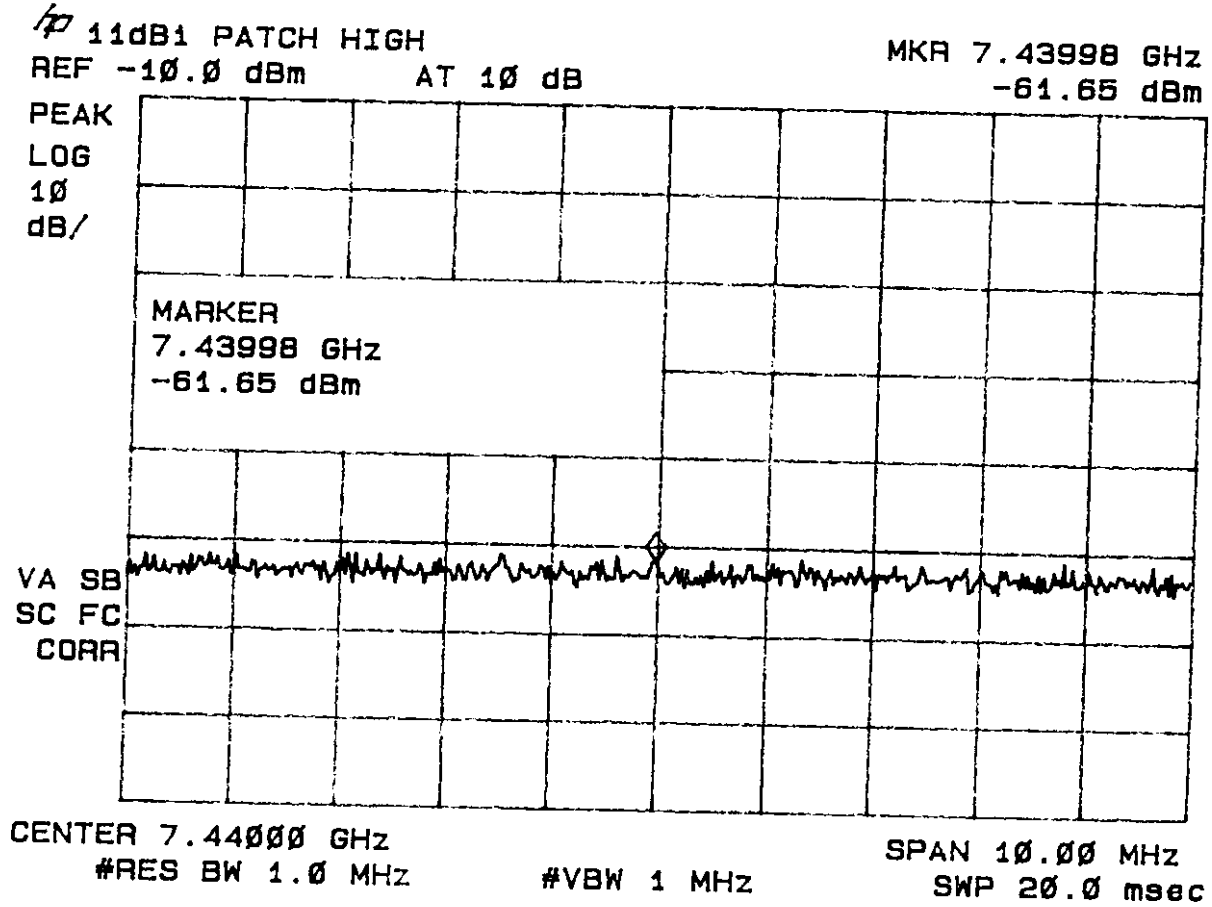

**Figure 64**  
**Peak Spurious Emissions 15.247(c) High**  
**(Patch Antenna - 11 dBi gain)**

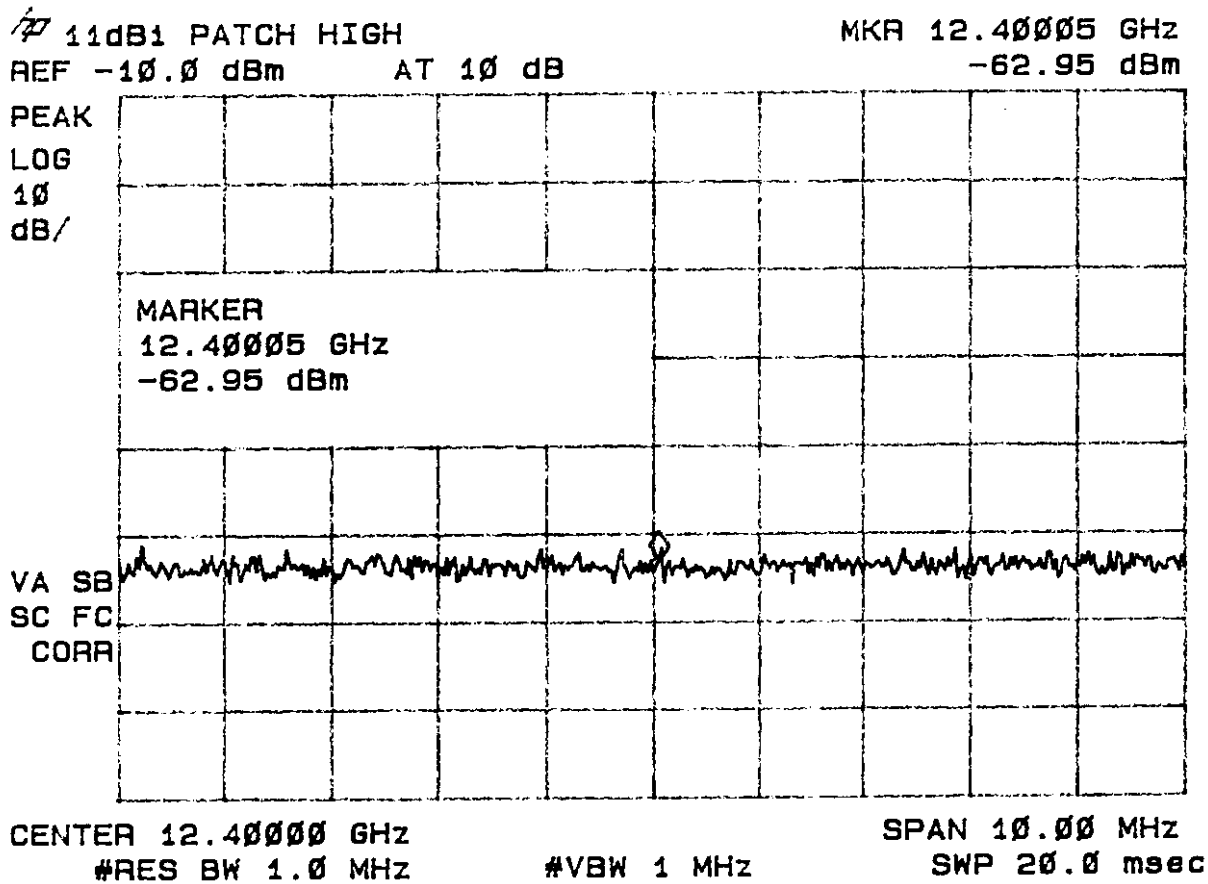

**Figure 65**  
**Peak Spurious Emissions 15.247(c) Low**  
**(Omni Antenna - 9 dBi gain)**



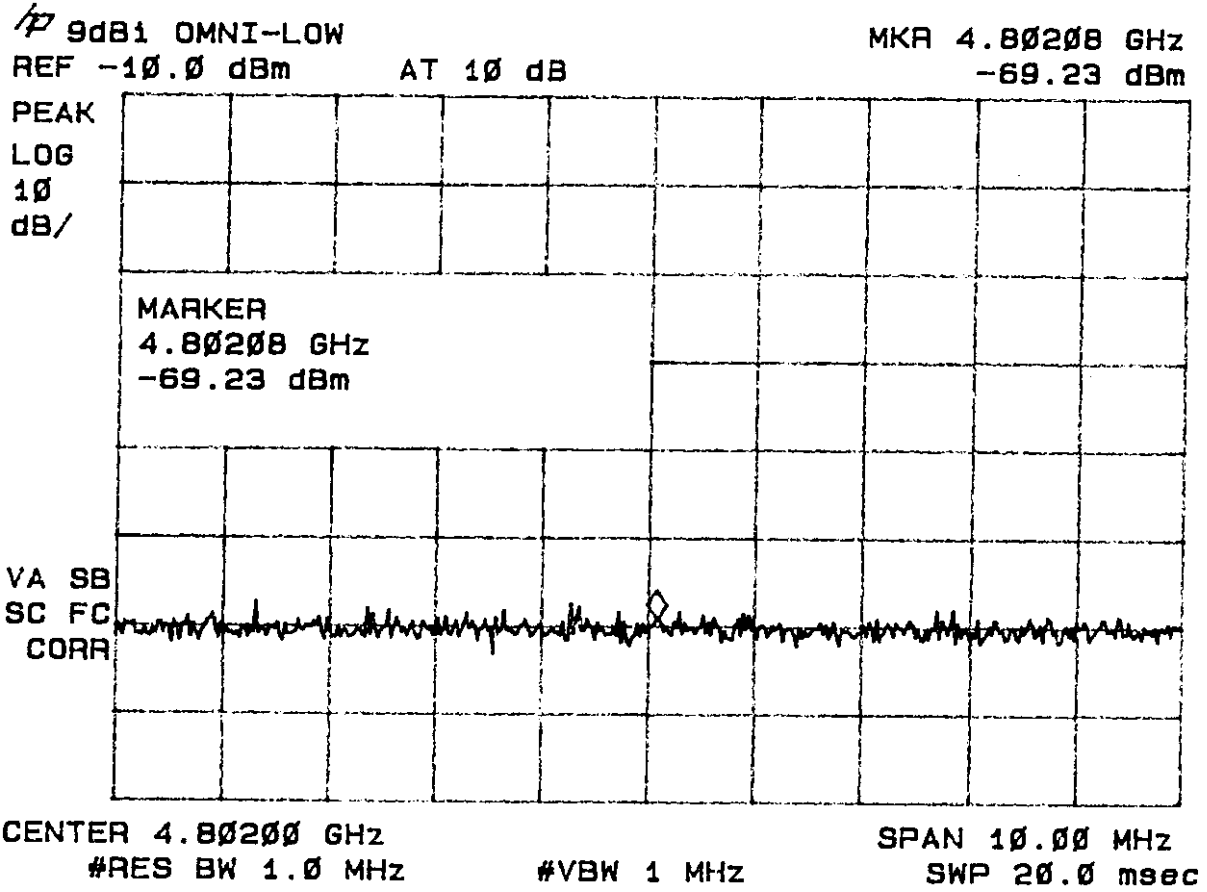





Figure 66  
Peak Spurious Emissions 15.247(c) Low  
(Omni Antenna - 9 dBi gain)

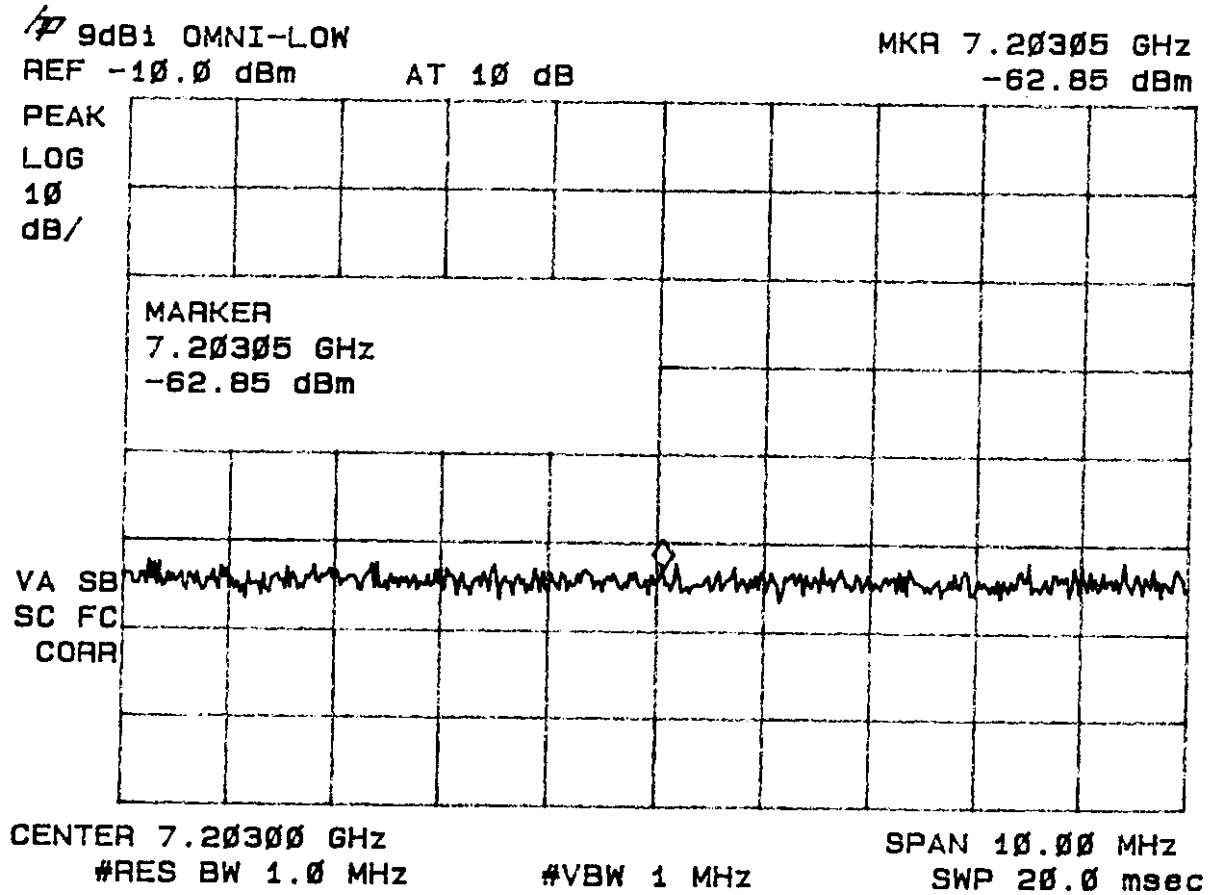


**Figure 67**  
**Peak Spurious Emissions 15.247(c) Low**  
**(Omni Antenna - 9 dBi gain)**

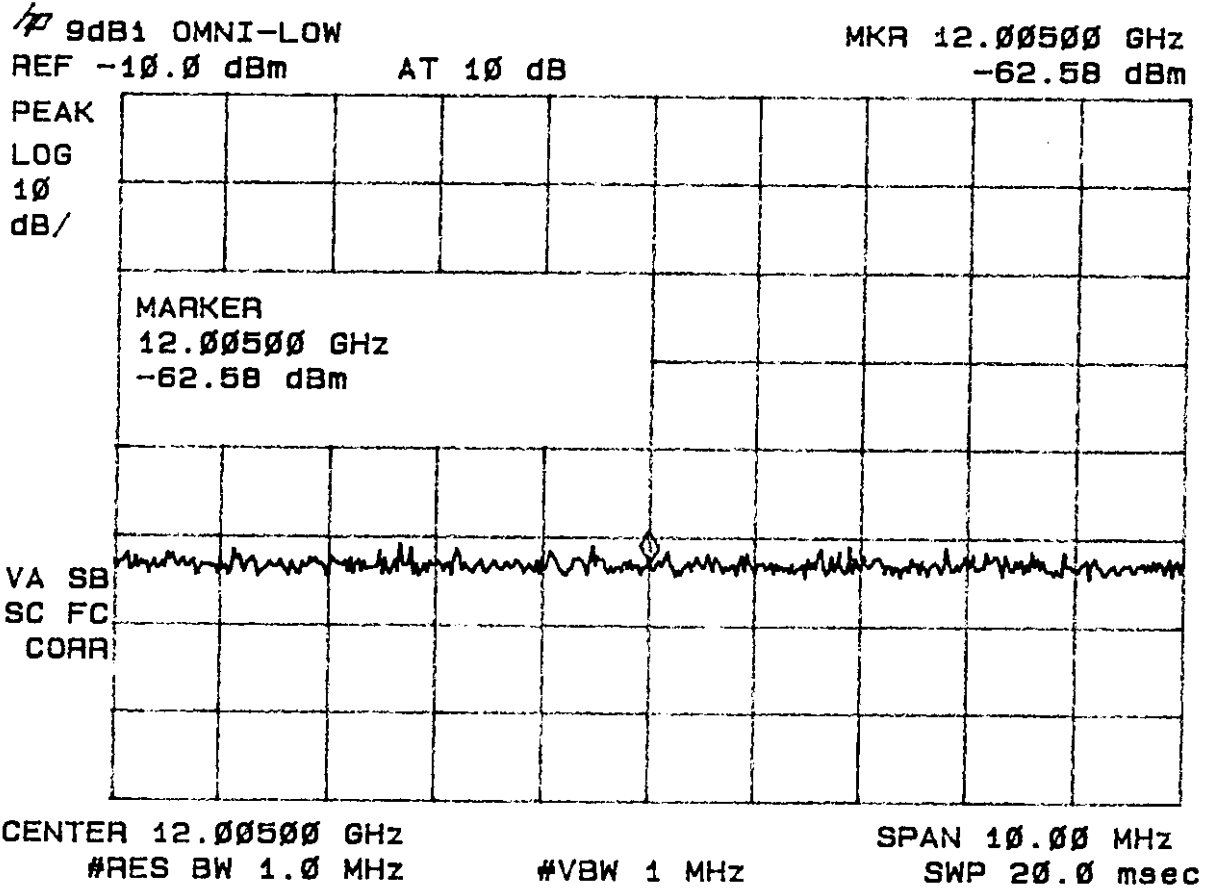

**Figure 68**  
**Peak Spurious Emissions 15.247(c) Middle**  
**(Omni Antenna - 9 dBi gain)**

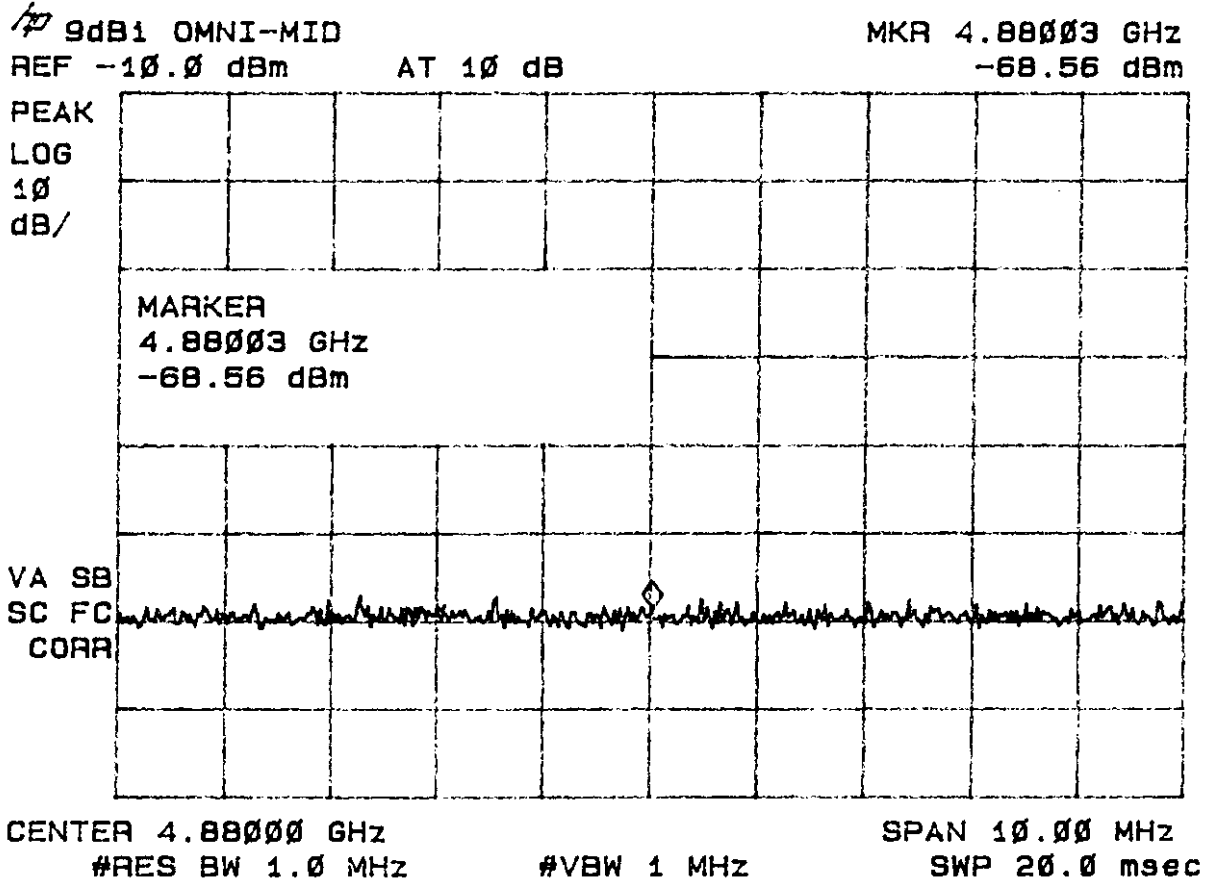

**Figure 69**  
**Peak Spurious Emissions 15.247(c) Middle**  
**(Omni Antenna - 9 dBi gain)**

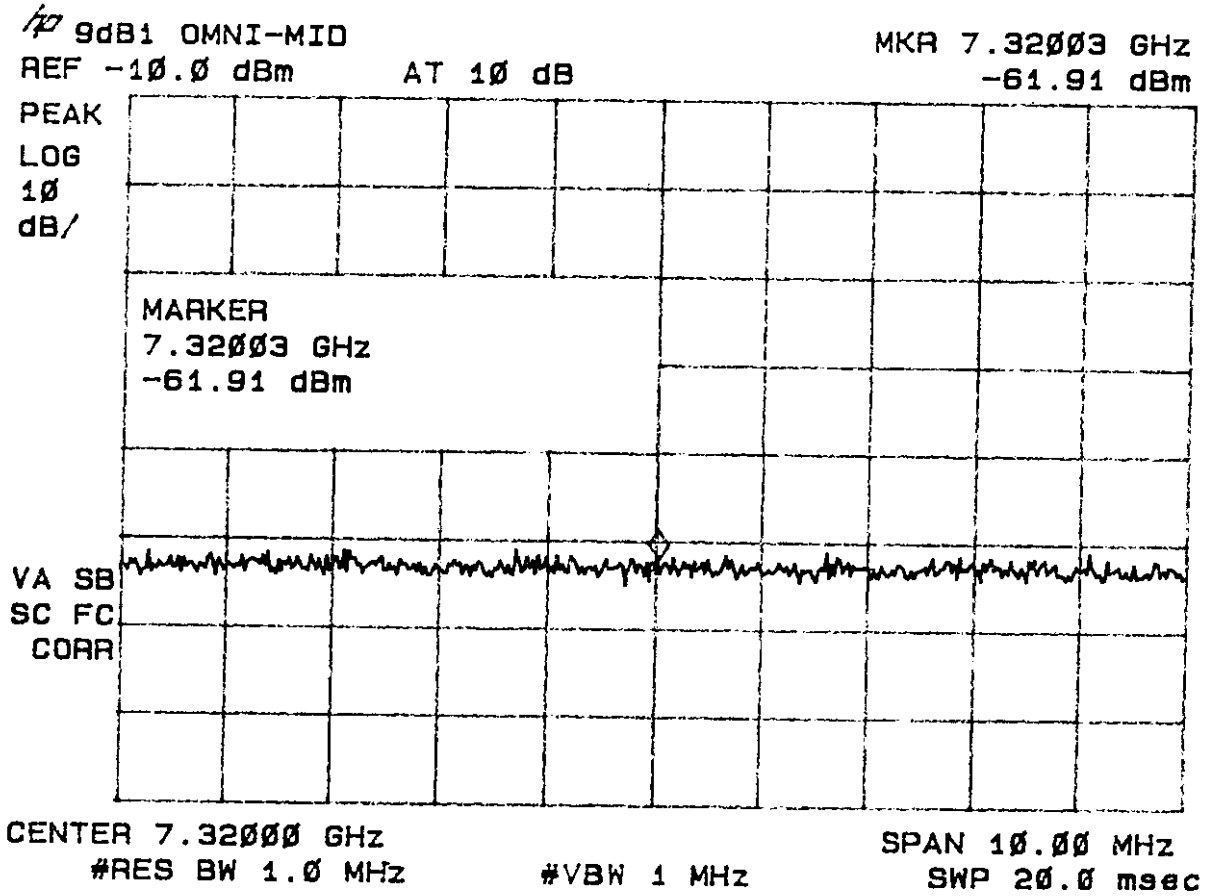

**Figure 70**  
**Peak Spurious Emissions 15.247(c) Middle**  
**(Omni Antenna - 9 dBi gain)**


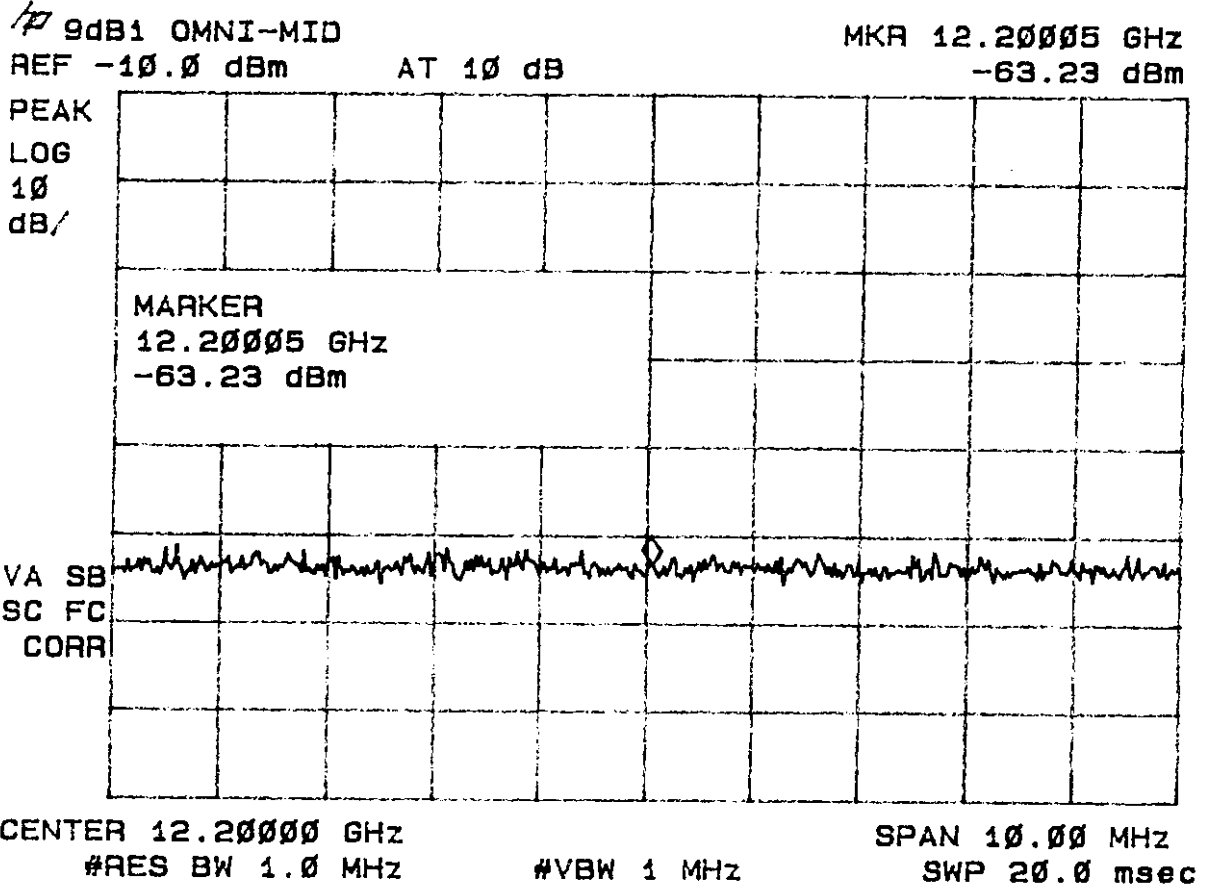


Figure 71  
Peak Spurious Emissions 15.247(c) High  
(Omni Antenna - 9 dBi gain)

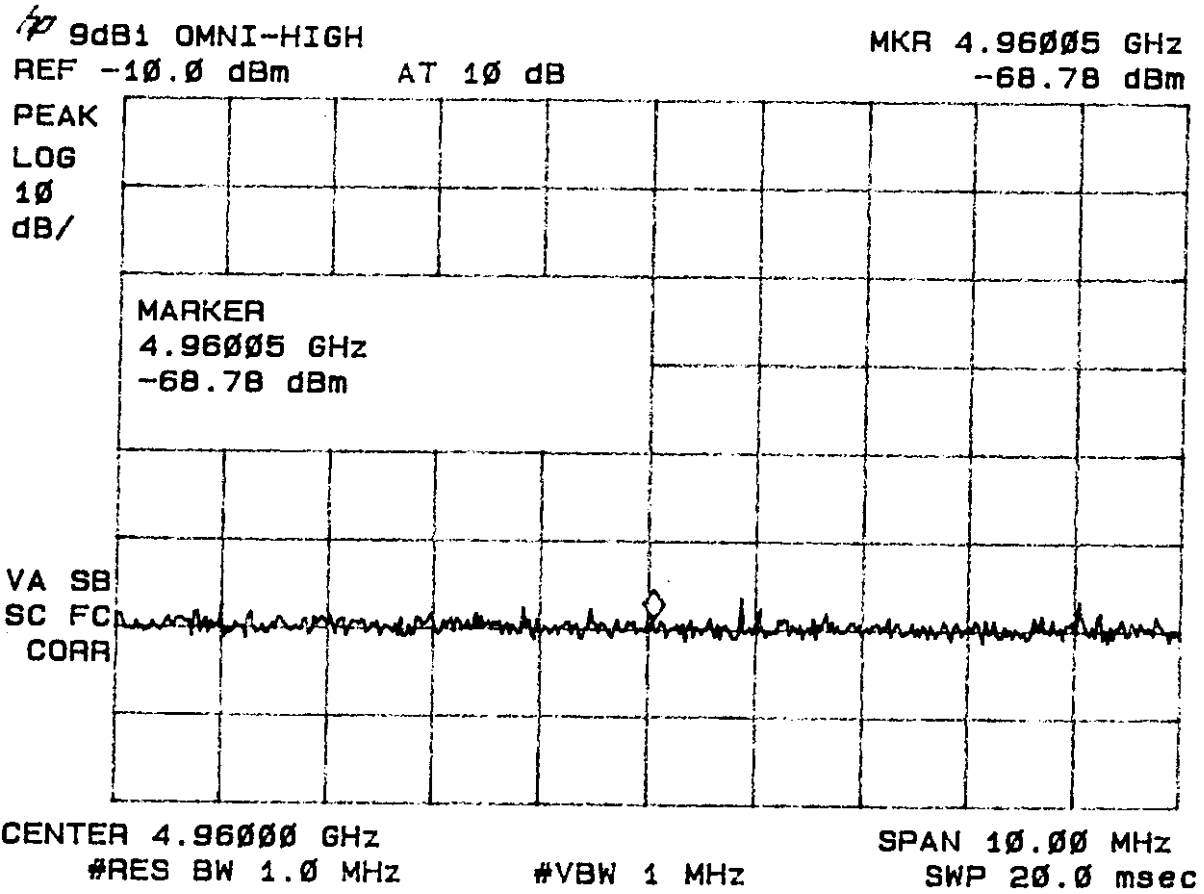

**Figure 72**  
**Peak Spurious Emissions 15.247(c) High**  
**(Omni Antenna - 9 dBi gain)**

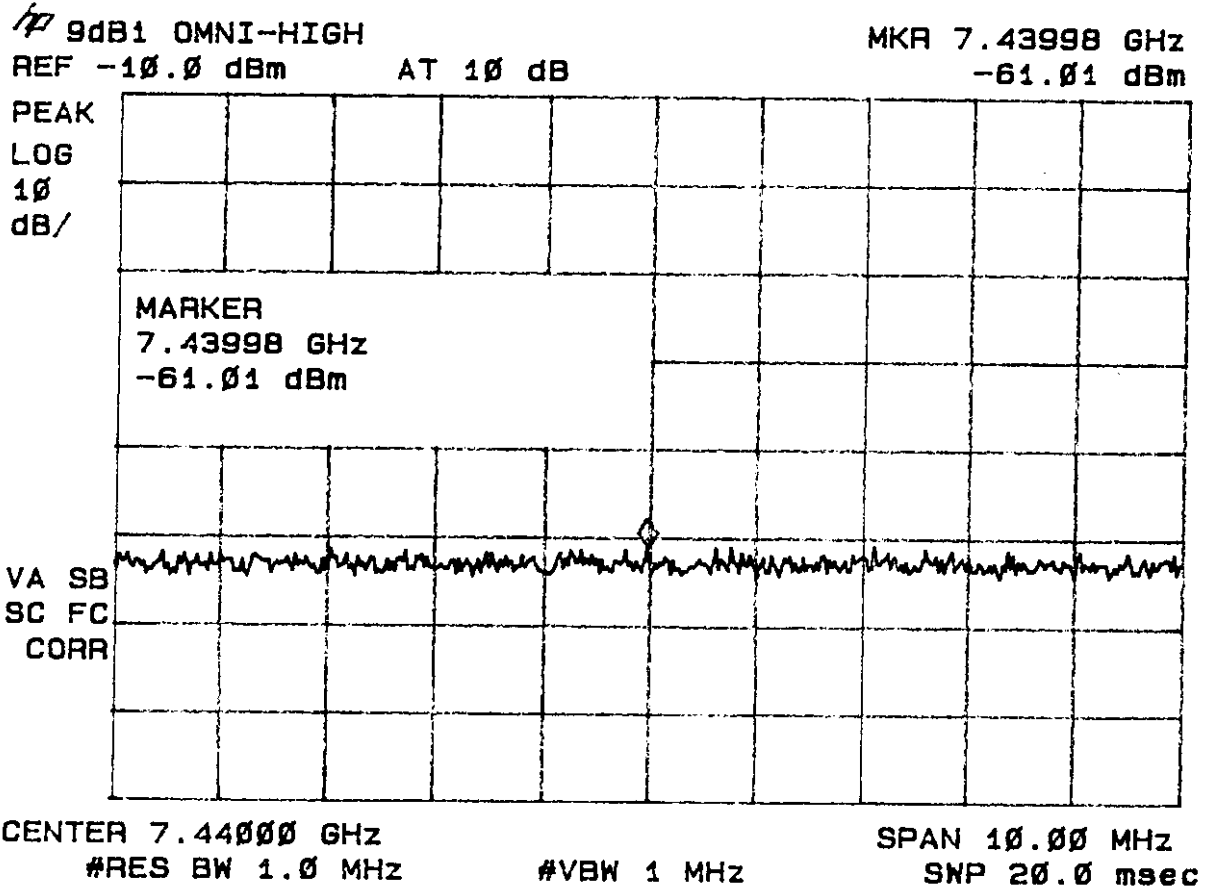


Figure 73

Peak Spurious Emissions 15.247(c) High  
(Omni Antenna - 9 dBi gain)

9dBi OMNI-HIGH


MKR 12.39993 GHz

REF -10.0 dBm

AT 10 dB

-63.27 dBm

PEAK  
LOG  
10  
dB/

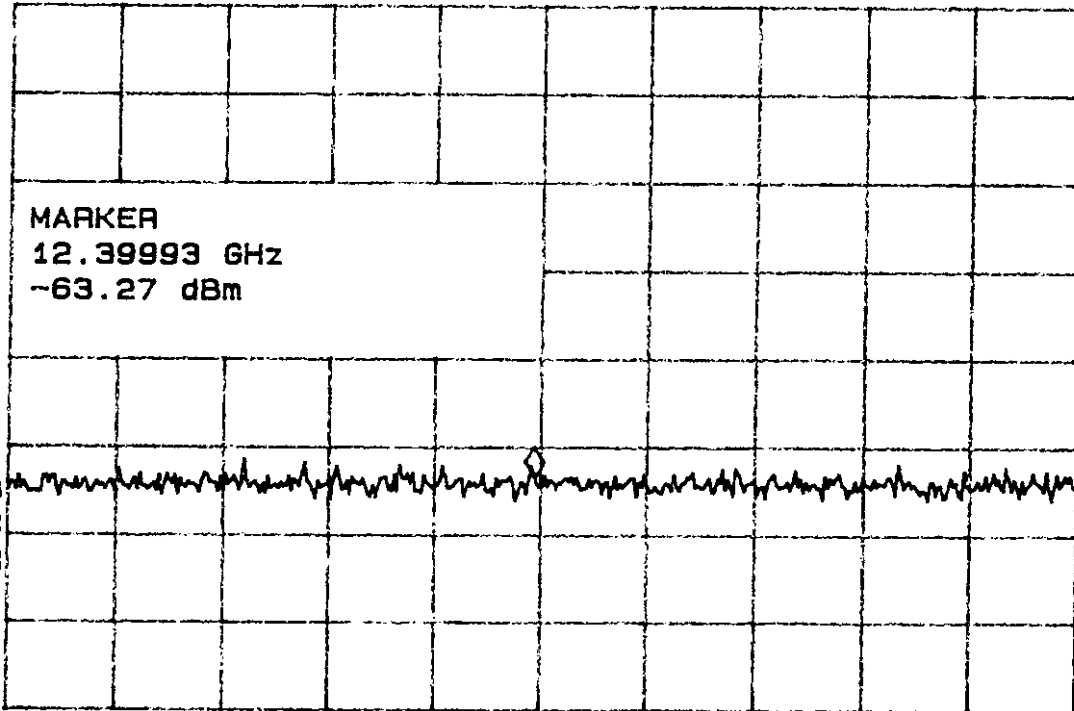

CENTER 12.40000 GHz

#RES BW 1.0 MHz

#VBW 1 MHz

— SPAN 10.00 MHz

SWP 20.0 msec



**FIGURE 74. Test Set-up  
Model WIT2400M**

