

## Report on the RF Testing of:

Wacom Co., Ltd.  
Active Electrostatic Stylus, Model: CS-322A  
FCC ID: HV4CS322A

## In accordance with FCC Part 15 Subpart C

Prepared for: Wacom Co., Ltd.  
2-510-1 Toyonodai, Kazo-shi, Saitama  
349-1148, Japan  
Phone: +81-480-78-1257 Fax: +81-480-78-1404



Japan

Add value.  
Inspire trust.

## COMMERCIAL-IN-CONFIDENCE

Document Number: JPD-TR-19058-0

### SIGNATURE

*Hiro Suzuki*

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Hiroaki Suzuki	Deputy Manager of RF Group	Approved Signatory	13 MAR 2019

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Japan Ltd. document control rules.

### EXECUTIVE SUMMARY

A sample(s) of this product was tested and found to be compliant with FCC Part 15 Subpart C.



### DISCLAIMER AND COPYRIGHT

The results in this report are applicable only to the equipment tested.  
This report shall not be re-produced except in full without the written approval of TÜV SÜD Japan Ltd.

### ACCREDITATION

This test report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, ILAC-MRA, or any agency of the federal government.

TÜV SÜD Japan Ltd.  
Yonezawa Testing Center  
5-4149-7 Hachimanpara,  
Yonezawa-shi, Yamagata,  
992-1128 Japan

Phone: +81 (0) 238 28 2881  
Fax: +81 (0) 238 28 2888  
www.tuv-sud.jp



## Contents

<b>1</b>	<b>Summary of Test</b> .....	<b>3</b>
1.1	Modification history of the test report.....	3
1.2	Standards.....	3
1.3	Test methods.....	3
1.4	Deviation from standards.....	3
1.5	List of applied test(s) of the EUT.....	3
1.6	Test information.....	3
1.7	Test set up.....	3
1.8	Test period.....	3
<b>2</b>	<b>Equipment Under Test</b> .....	<b>4</b>
2.1	EUT information.....	4
2.2	Modification to the EUT.....	4
2.3	Variation of family model(s).....	5
2.4	Operating channels and frequencies.....	5
2.5	Operating mode.....	5
2.6	Operating flow.....	6
<b>3</b>	<b>Configuration of Equipment</b> .....	<b>7</b>
3.1	Equipment used.....	7
3.2	Cable(s) used.....	7
3.3	System configuration.....	7
<b>4</b>	<b>Test Result</b> .....	<b>8</b>
4.1	6dB Bandwidth.....	8
4.2	Maximum Peak Output Power.....	10
4.3	Band Edge Compliance of RF Conducted Emissions.....	11
4.4	Spurious emissions - Conducted -.....	13
4.5	Spurious Emissions - Radiated -.....	17
4.6	Restricted Band of Operation.....	29
4.7	Transmitter Power Spectral Density.....	33
4.8	AC Power Line Conducted Emissions.....	35
<b>5</b>	<b>Antenna requirement</b> .....	<b>38</b>
<b>6</b>	<b>Measurement Uncertainty</b> .....	<b>39</b>
<b>7</b>	<b>Laboratory Information</b> .....	<b>40</b>
	<b>Appendix A. Test Equipment</b> .....	<b>41</b>
	<b>Appendix B. Duty Cycle</b> .....	<b>42</b>

## 1 Summary of Test

### 1.1 Modification history of the test report

Document Number	Modification History	Issue Date
JPD-TR-19058-0	First Issue	Refer to the cover page

### 1.2 Standards

CFR47 FCC Part 15 Subpart C

### 1.3 Test methods

ANSI C63.10-2013,  
KDB 558074 D01 15.247 Meas Guidance v05

### 1.4 Deviation from standards

None

### 1.5 List of applied test(s) of the EUT

Test item section	Test item	Condition	Result	Remark
15.247(a)(2)	6dB Bandwidth	Conducted	PASS	-
15.247(b)(3)	Maximum Peak Output Power	Conducted	PASS	-
15.247(d)	Band Edge Compliance of RF Conducted Emissions	Conducted	PASS	-
15.247(d) 15.205 15.209	Spurious Emissions	Conducted Radiated	PASS	-
15.247(d) 15.205 15.209	Restricted Bands of Operation	Radiated	PASS	-
15.247(e)	Transmitter Power Spectral Density	Conducted	PASS	-
15.207	AC Power Line Conducted Emissions	Conducted	PASS	-

### 1.6 Test information

None

### 1.7 Test set up

Table-top

### 1.8 Test period

02-February-2019 - 07-March-2019

## 2 Equipment Under Test

### 2.1 EUT information

Applicant	Wacom Co., Ltd. 2-510-1 Toyonodai, Kazo-shi, Saitama 349-1148, Japan Phone: +81-480-78-1257 Fax: +81-480-78-1404
Equipment Under Test (EUT)	Active Stylus for Tablet
Model number	CS-322A
Serial number	N/A
Trade name	Wacom
Number of sample(s)	1
EUT condition	Pre-production
Power rating	Battery: DC 3.7 V
Size	Length 153.0mm Diameter (excluding the rear cap part) 10.1mm
Environment	Indoor and Outdoor use
Terminal limitation	Temperature: 5°C to 40°C Humidity: 30% to 80%
RF Specification	
Protocol	Bluetooth 5.0
Frequency range	2402 MHz-2480 MHz
Number of RF Channels	40 Channels
Modulation method/Data rate	GFSK (1 Mbps)
Channel separation	2 MHz
Conducted power	0.589 mW
Antenna type	Internal antenna
Antenna gain	1.6 dBi

### 2.2 Modification to the EUT

The table below details modifications made to the EUT during the test project.

Modification State	Description of Modification	Modification fitted by	Date of Modification
Model: CS-322A, S/N: N/A			
0	As supplied by the applicant	Not Applicable	Not Applicable

## 2.3 Variation of family model(s)

### 2.3.1 List of family model(s)

Not applicable

### 2.3.2 Reason for selection of EUT

Not applicable

## 2.4 Operating channels and frequencies

Channel	Frequency [MHz]	Channel	Frequency [MHz]
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

## 2.5 Operating mode

The EUT had been tested under operating condition.  
There are three channels have been tested as following:

Tested Channel	Frequency [MHz]
Low	2402
Middle	2440
High	2480

The pre-test has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

Tested Channel	Modulation Type	Data Rate
Low, Middle, High	GFSK	1 Mbps

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in Z-axis, Open and the worst case recorded.



Japan

## 2.6 Operating flow

[Tx mode]

- i) Pen test setup by PC
- ii) Select a Test mode  
Operating frequency: Channel Low: 2402 MHz, Channel Middle: 2440 MHz, Channel High: 2480 MHz
- iii) Start test mode

[Rx mode]

- i) Pen test setup by PC
- ii) Select a Test mode  
Operating frequency: Channel Low: 2402 MHz, Channel Middle: 2440 MHz, Channel High: 2480 MHz
- iii) Start test mode

### 3 Configuration of Equipment

Numbers assigned to equipment on the diagram in “3.3 System configuration” correspond to the lists in “3.1 Equipment used” and “3.2 Cable(s) used”.


#### 3.1 Equipment used

No.	Equipment	Company	Model No.	Serial No.	FCC ID / DoC	Comment
1	Active Stylus for Tablet	MITSUMI	CS-322A	N/A	HV4CS322A	EUT
2	Personal Computer	HP	HP 250 G6	CND8253G8T	DoC	-
3	AC Adaptor (for Personal Computer)	HP	TPN-FA02	N/A	-	-

#### 3.2 Cable(s) used

No.	Cable	Length[m]	Shield	Connector	Comment
a	Signal cable	0.3	No	Plastic	-
b	USB cable	5.0	Yes	Metal	-
c	DC cable	1.8	No	Plastic	-
d	AC cable	0.8	No	Plastic	-

#### 3.3 System configuration

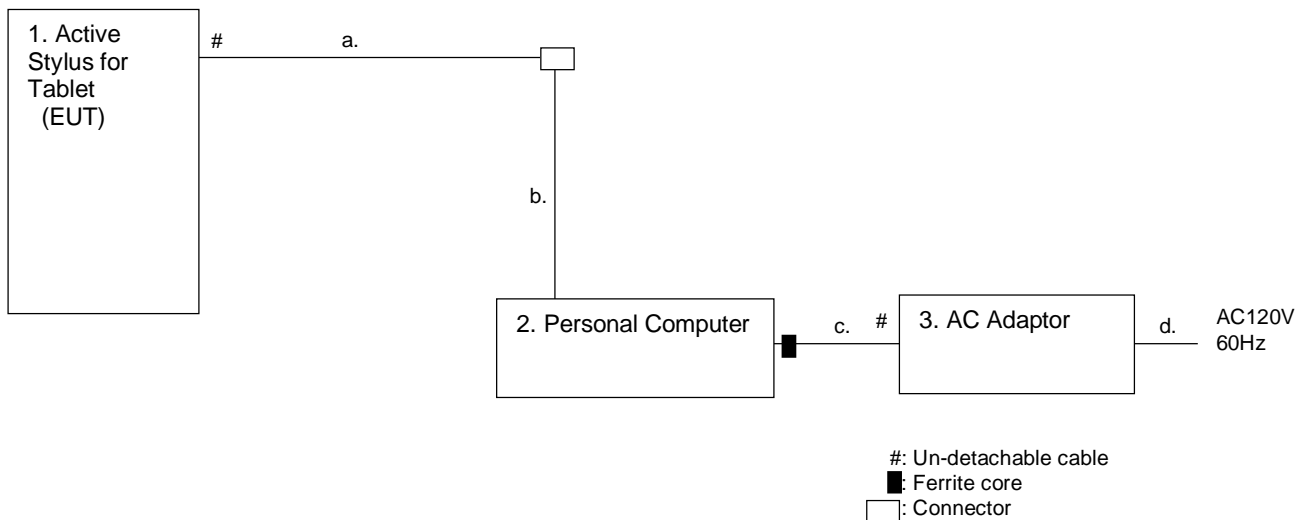

## 4 Test Result

### 4.1 6dB Bandwidth

#### 4.1.1 Measurement procedure


[FCC 15.247(a)(2), KDB558074 D01 v05]

The bandwidth at 6 dB down from the highest inband spectral density is measured with spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) RBW = 100 kHz
- b) VBW  $\geq 3 \times$  RBW
- c) Sweep time = auto-couple
- d) Detector = peak
- e) Trace mode = max hold

- Test configuration

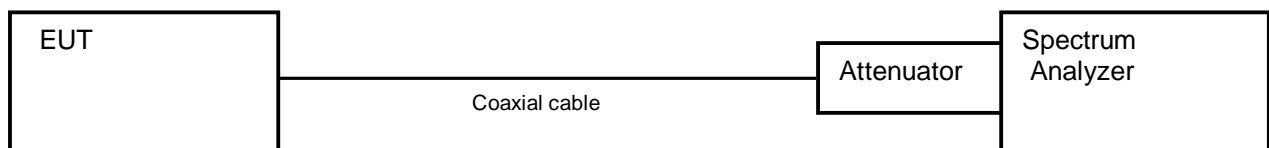

#### 4.1.2 Limit

The minimum permissible 6dB bandwidth is 500kHz.

#### 4.1.3 Measurement result

Date : 7-March-2019  
 Temperature : 20.6 [°C]  
 Humidity : 25.9 [%]  
 Test place : Shielded room No.4  
 Test engineer : Taiki Watanabe

Channel	Frequency [MHz]	6 dB bandwidth [MHz]
Low	2402	0.695
Middle	2440	0.698
High	2480	0.685




#### 4.1.4 Trace data


##### Channel Low



##### Channel Middle

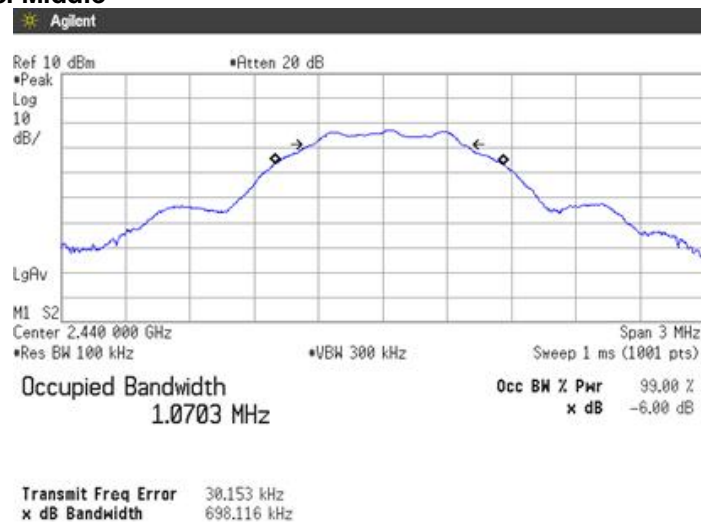

##### Channel High

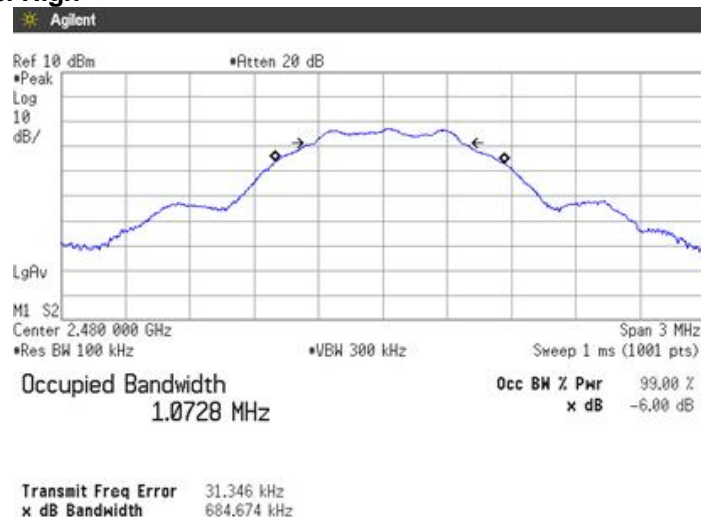




**4.2 Maximum Peak Output Power**

**4.2.1 Measurement procedure**

**[FCC 15.247(b)(3), KDB558074 D01 v05]**

The peak power is measured with a power sensor connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

- Test configuration

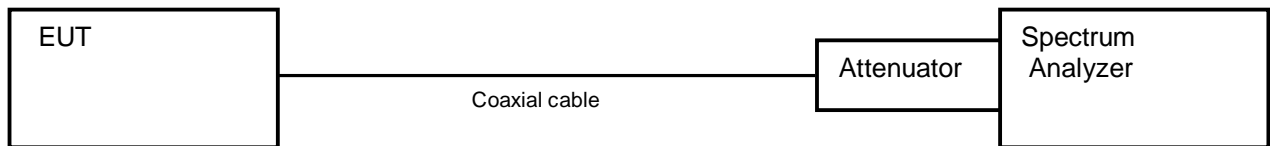

**4.2.2 Limit**

1 W(1000 mW) or less

**4.2.3 Measurement result**

Date : 7-March-2019  
 Temperature : 20.6 [°C]  
 Humidity : 25.9 [%]  
 Test place : Shielded room No.4  
 Test engineer : Taiki Watanabe

Battery Full

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Peak Output Power (mW)	Limit (mW)	Result
Low	2402	-12.83	10.48	-2.35	0.582	≤1000	PASS
Middle	2440	-12.83	10.48	-2.35	0.582	≤1000	PASS
High	2480	-12.78	10.48	-2.30	0.589	≤1000	PASS

Calculation;  
 Reading (dBm) + Factor (dB) = Level (dBm)  
 $10\log P = \text{Level (dBm)}$   
 $P = 10^{(\text{Maximum Peak Output Power} / 10)}$  (mW)



### 4.3 Band Edge Compliance of RF Conducted Emissions

#### 4.3.1 Measurement procedure


##### [FCC 15.247(d), KDB558074 D01 v05]

The Band Edge is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = Arbitrary setting. (Setting suitable for measurement.)
- b) RBW = 100 kHz
- c) VBW  $\geq 3 \times$  RBW
- d) Sweep time = auto-couple
- e) Detector = peak
- f) Trace mode = max hold

- Test configuration

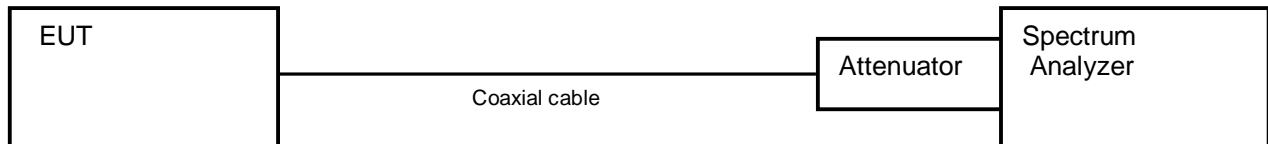

#### 4.3.2 Limit

In any 100kHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

#### 4.3.3 Measurement result


Date : 7-March-2019  
 Temperature : 20.6 [°C]  
 Humidity : 25.9 [%]  
 Test place : Shielded room No.4

Test engineer : Taiki Watanabe


Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2402	-12.80	2399.80	-62.38	49.58	At least 20dB below from peak of RF	PASS
High	2480	-12.62	2483.60	-65.26	52.64	At least 20dB below from peak of RF	PASS

### 4.3.4 Trace data

#### Channel: Low

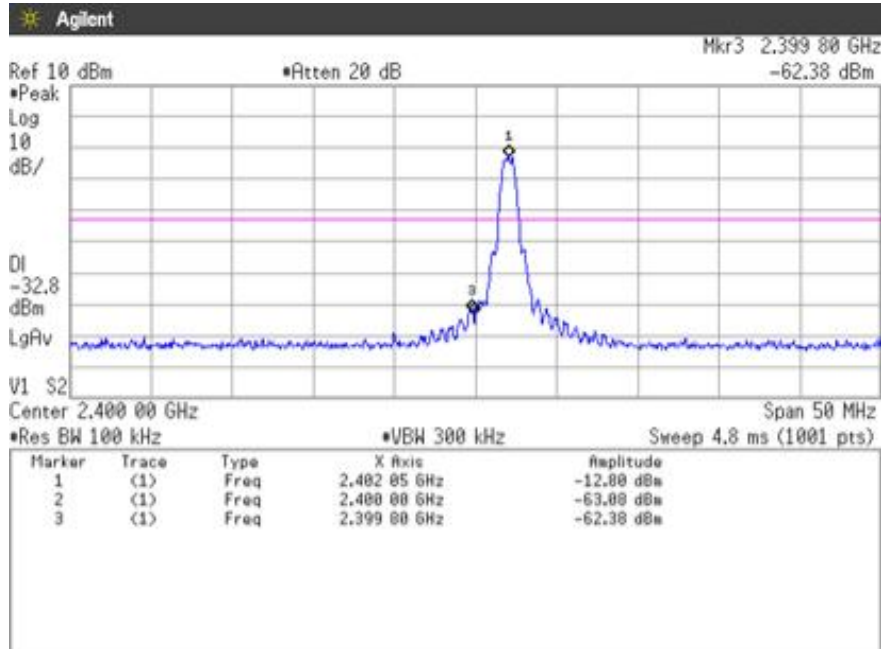

#### Channel: High

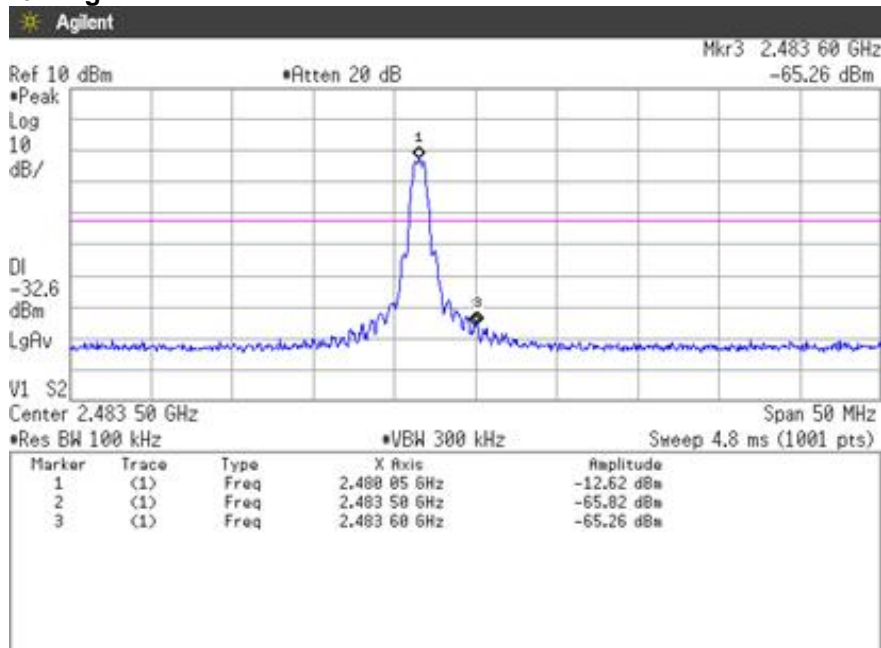

#### 4.4 Spurious emissions - Conducted -

##### 4.4.1 Measurement procedure


###### [FCC 15.247(d), KDB558074 D01 v05]

The spurious emissions (Conducted) are measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = wide enough to fully capture the emission being measured.
- b) RBW = 100 kHz
- c) VBW ≥ RBW
- d) Sweep time = auto-couple
- e) Detector = peak
- f) Trace mode = max hold

- Test configuration

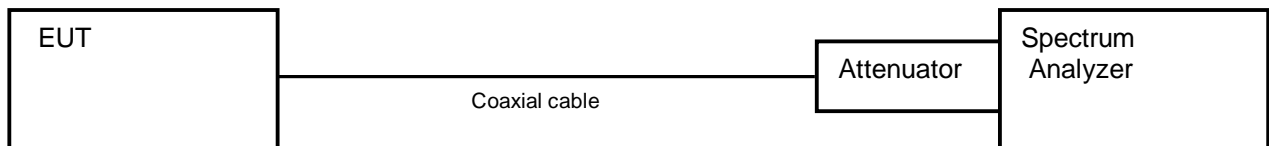

##### 4.4.2 Limit

In any 100kHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

##### 4.4.3 Measurement result


Date : 7-March-2019  
 Temperature : 20.6 [°C]  
 Humidity : 35.9 [%]  
 Test place : Shielded room No.4

Test engineer : Taiki Watanabe


Channel	Frequency [MHz]	Limit [dB]	Results Chart	Result
Low	2402	At least 20dB below from peak of RF	See the trace Data	PASS
Middle	2440	At least 20dB below from peak of RF	See the trace Data	PASS
High	2480	At least 20dB below from peak of RF	See the trace Data	PASS

### 4.4.4 Trace data


#### Channel: Low 30 MHz-1 GHz

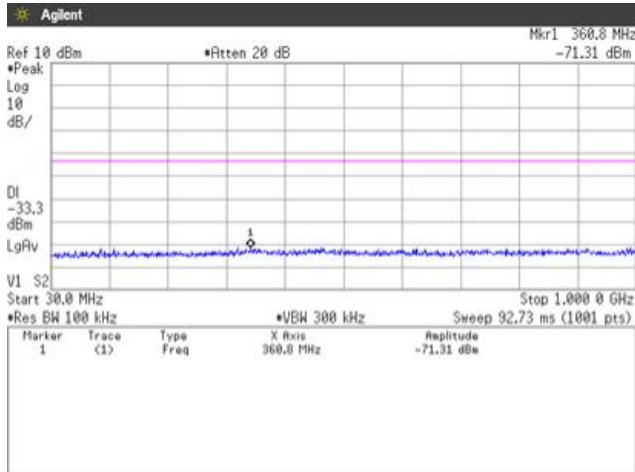


#### 1 GHz-5 GHz

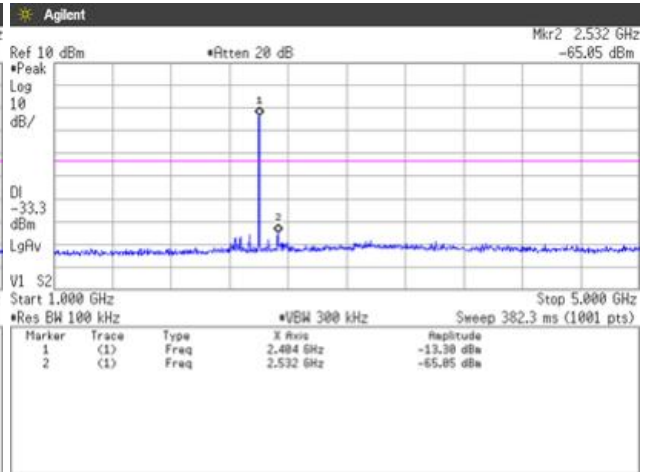


#### 5 GHz-10 GHz

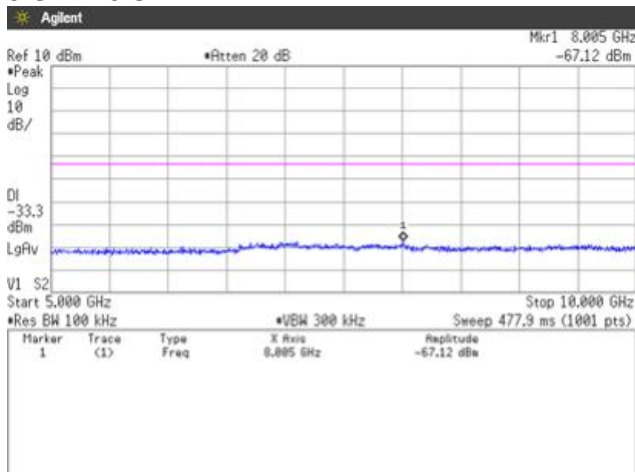


#### 10 GHz-15 GHz

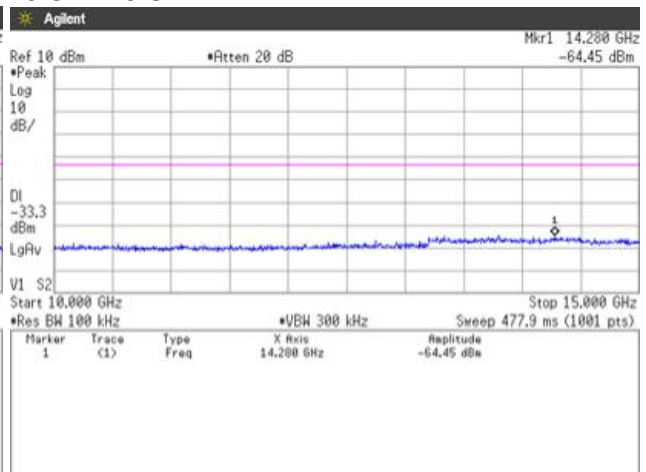

#### 15 GHz-20 GHz

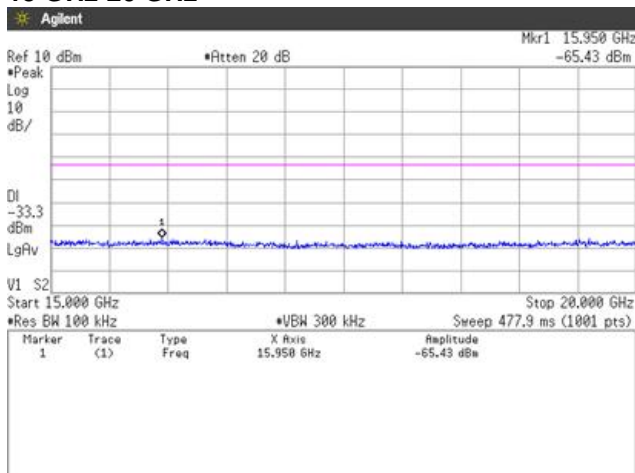


#### 20 GHz-25 GHz

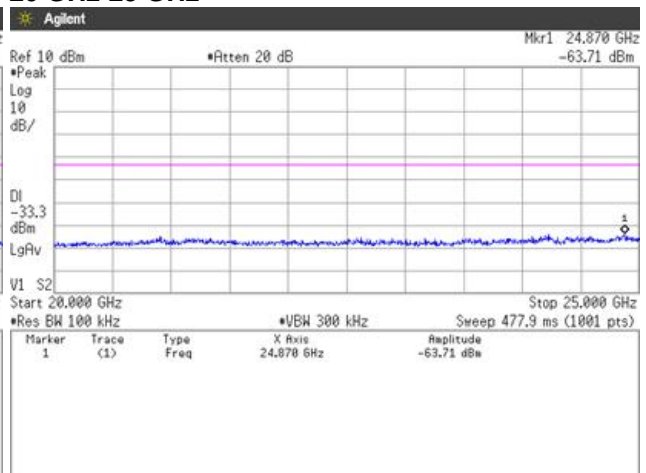





**Channel: Middle**  
**30 MHz-1 GHz**

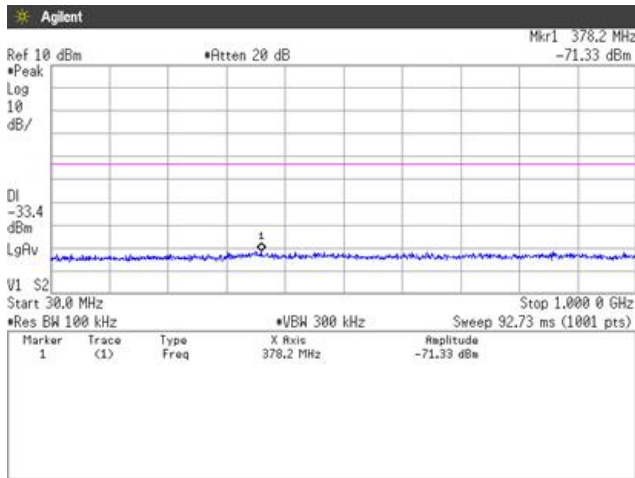


**1 GHz-5 GHz**

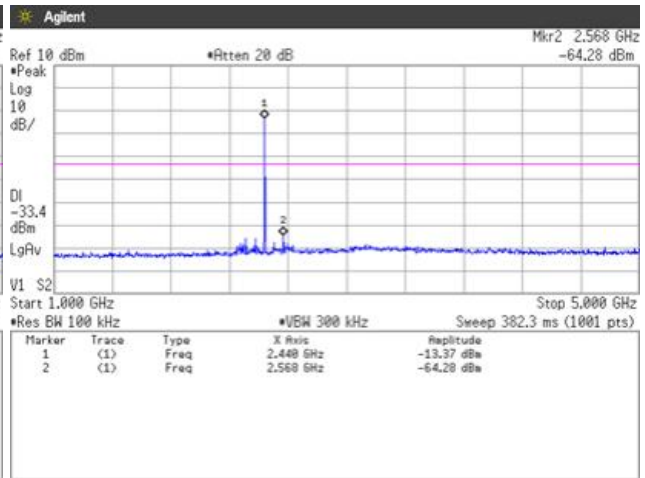


**5 GHz-10 GHz**

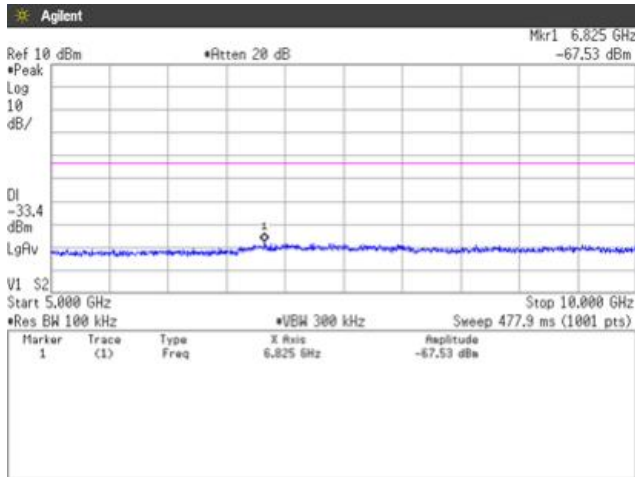


**10 GHz-15 GHz**

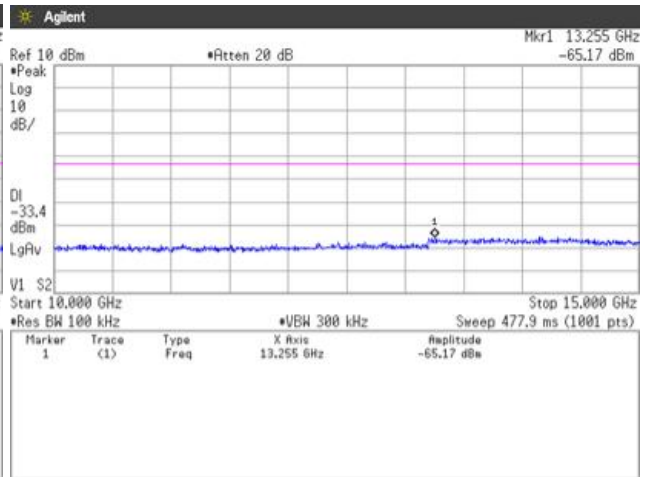

**15 GHz-20 GHz**

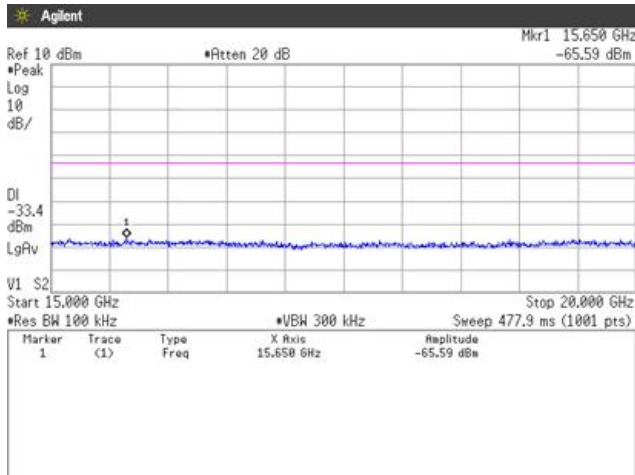


**20 GHz-25 GHz**

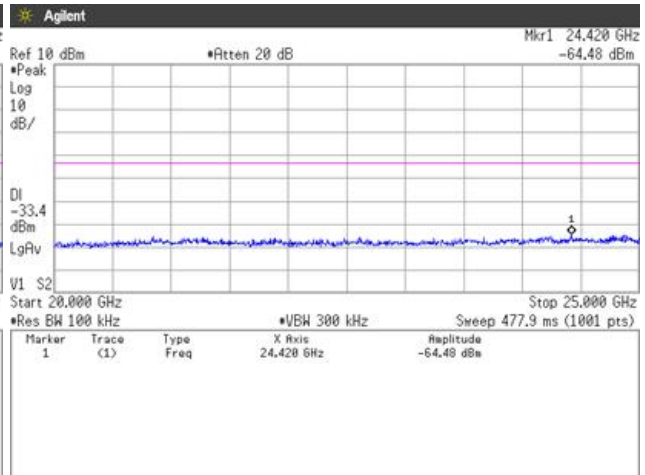





**Channel: High**  
**30 MHz-1 GHz**

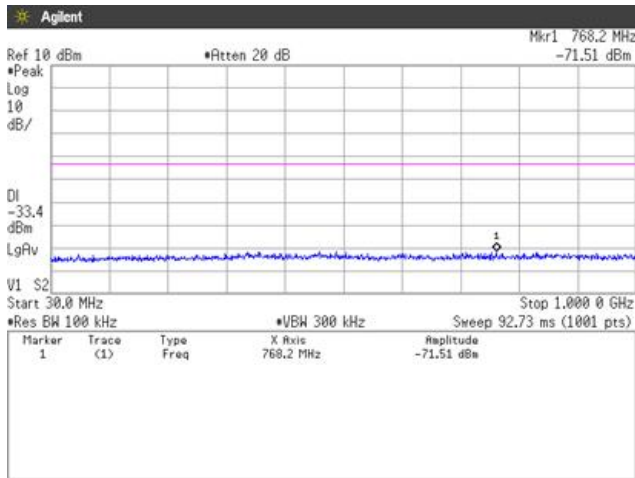


**1 GHz-5 GHz**

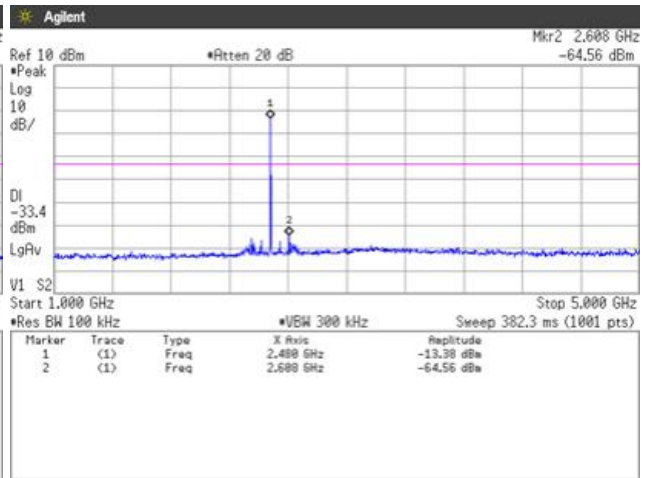


**5 GHz-10 GHz**

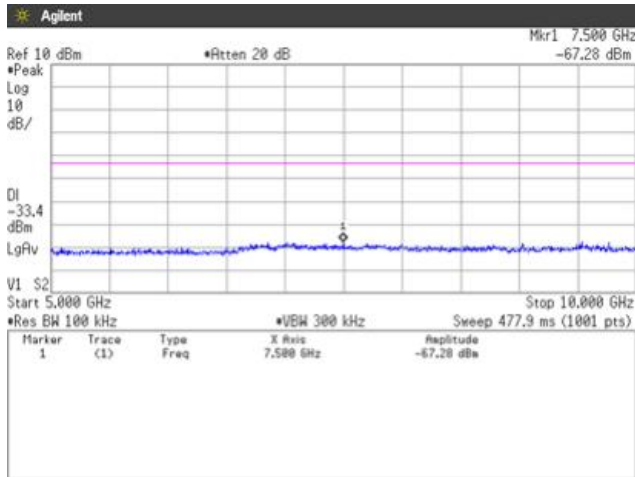


**10 GHz-15 GHz**

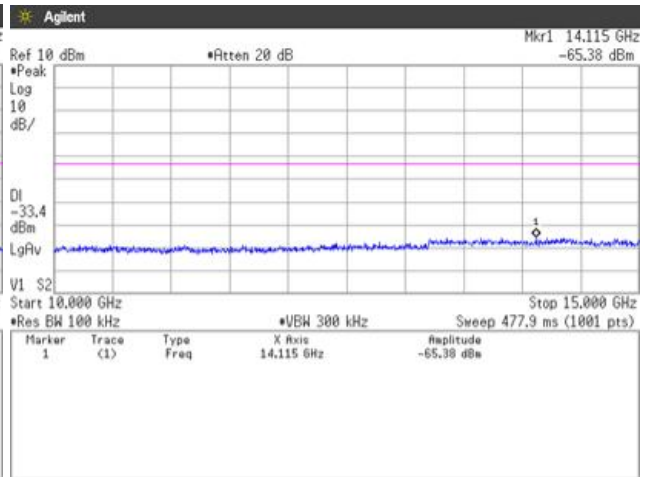

**15 GHz-20 GHz**

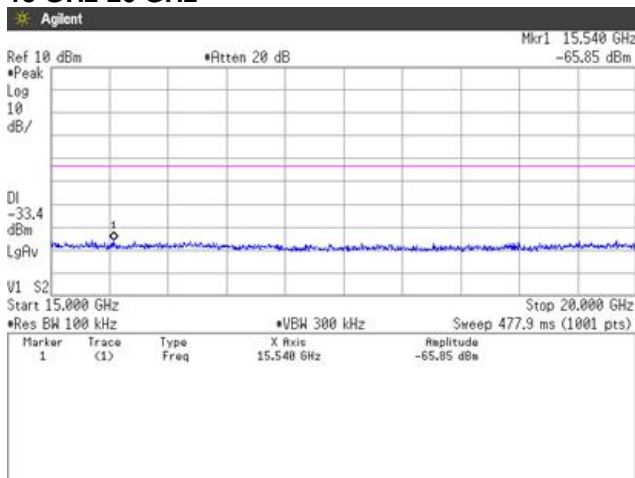

**20 GHz-25 GHz**

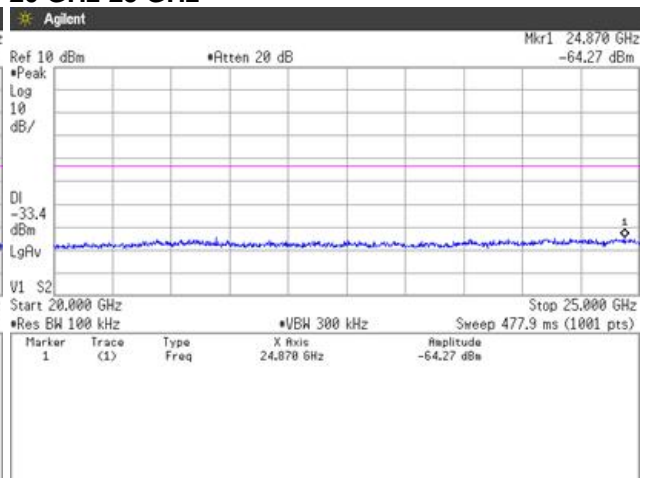



**4.5 Spurious Emissions - Radiated -**

**4.5.1 Measurement procedure**

**[FCC 15.247(d), 15.205, 15.209, KDB558074 D01 v05]**

Test was applied by following conditions.

- Test method : ANSI C63.10
- Frequency range : 9kHz to 25GHz
- Test place : 3m Semi-anechoic chamber
- EUT was placed on : Styrofoam table / (W)1.0m x (D)1.0m x (H)0.8m (below 1GHz)  
Styrofoam table / (W)0.6m x (D)0.6m x(H)1.5m (above 1GHz)
- Antenna distance : 3m
- Test receiver setting : Below 1GHz
  - Detector : Average (9kHz-90kHz, 110kHz-490kHz), Quasi-peak
  - Bandwidth : 200Hz, 120kHz
- Spectrum analyzer setting : Above 1GHz
  - Peak : RBW=1MHz, VBW=3MHz, Span=0Hz, Sweep=auto
  - Average : RBW=1MHz, VBW=3kHz, Span=0Hz, Sweep=auto  
Display mode=Linear


**Average Measurement Setting [VBW]**

Mode	Duty Cycle (%)	T <sub>on</sub> (us)	T <sub>off</sub> (us)	1/T <sub>on</sub> (kHz)	Determined VBW Setting
Bluetooth 4.1 LE	62.56	391	234	2.558	3kHz

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

Radiated emission measurements are performed at 3m distance with the broadband antenna (Loop antenna, Biconical antenna, Log periodic antenna, Double ridged guide antenna and Broad-band horn Antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission. As for the Loop antenna, it is positioned with its plane vertical, and the center of the Loop antenna is 1m above the ground plane. The EUT is Placed on a turntable, which is 0.8m/1.5m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

**- Test configuration**

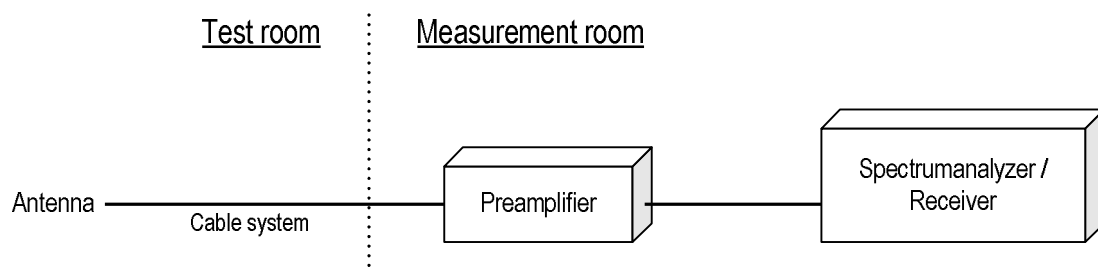

#### 4.5.2 Calculation method

[9kHz to 150kHz]

Emission level = Reading + (Ant factor + Cable system loss)

Margin = Limit – Emission level

[150kHz to 25GHz]

Emission level = Reading + (Ant factor + Cable system loss - Amp. Gain)

Margin = Limit – Emission level

Example:

Limit @ 4804.0MHz : 74.0dBuV/m (Peak Limit)

S.A Reading = 39.9dBuV Cable system loss = 8.3dB

Result = 39.9 + 8.3 = 48.2dBuV/m

Margin = 74.0 - 48.2 = 25.8dB

#### 4.5.3 Limit

Frequency [MHz]	Field strength		Distance [m]
	[uV/m]	[dBuV/m]	
0.009-0.490	2400 / F [kHz]	20logE [uV/m]	300
0.490-1.705	24000 / F [kHz]	20logE [uV/m]	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20log Emission [uV/m]
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition modulation.



Japan

#### 4.5.4 Test data

Date : 4-February-2019  
Temperature : 20.8 [°C]  
Humidity : 25.9 [%]  
Test place : 3m Semi-anechoic chamber

Test engineer : Taiki Watanabe

Date : 5-February-2019  
Temperature : 20.3 [°C]  
Humidity : 26.3 [%]  
Test place : 3m Semi-anechoic chamber


Test engineer : Taiki Watanabe



Japan

**[Transmit mode]  
Channel: Low  
BELOW 1 GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

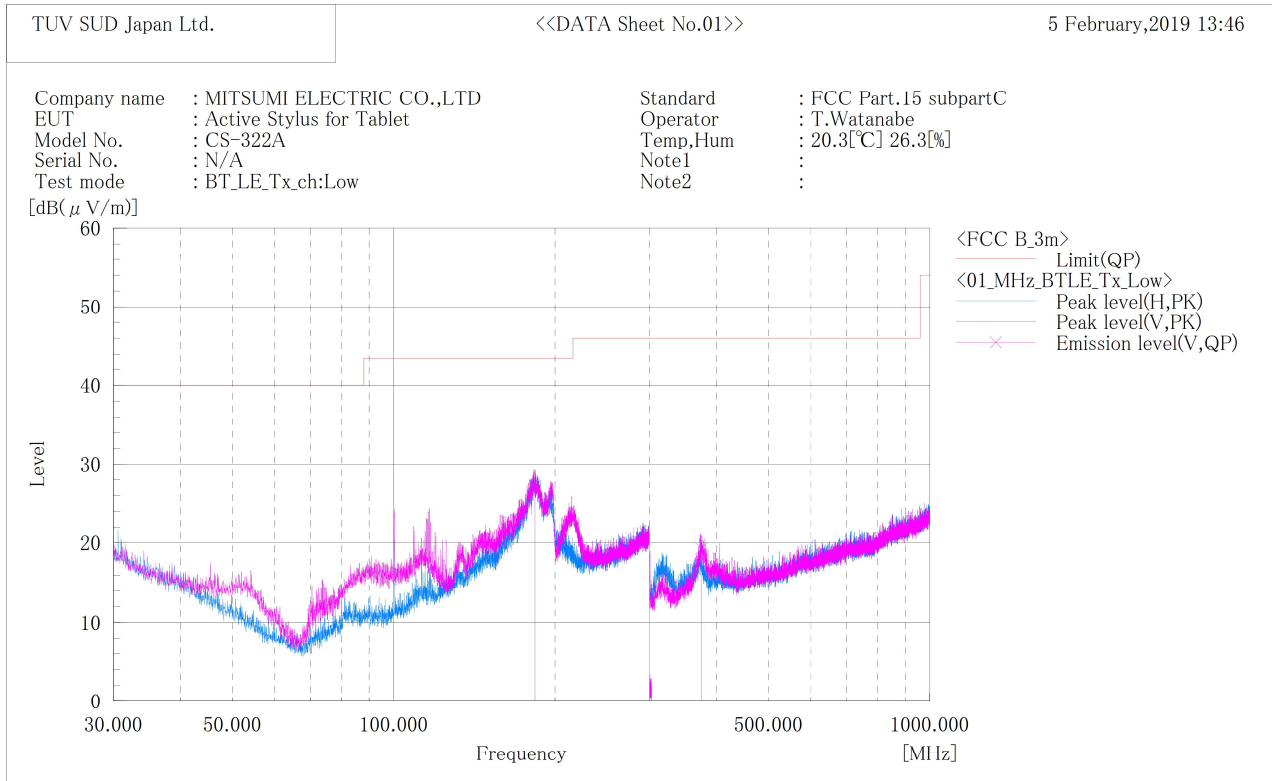

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c. f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	183.480	V	35.4	-8.2	27.2	43.5	16.3	100.0	268.0	
2	374.870	V	31.1	-11.8	19.3	46.0	26.7	118.0	115.0	


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.



**Channel: Low  
ABOVE 1 GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

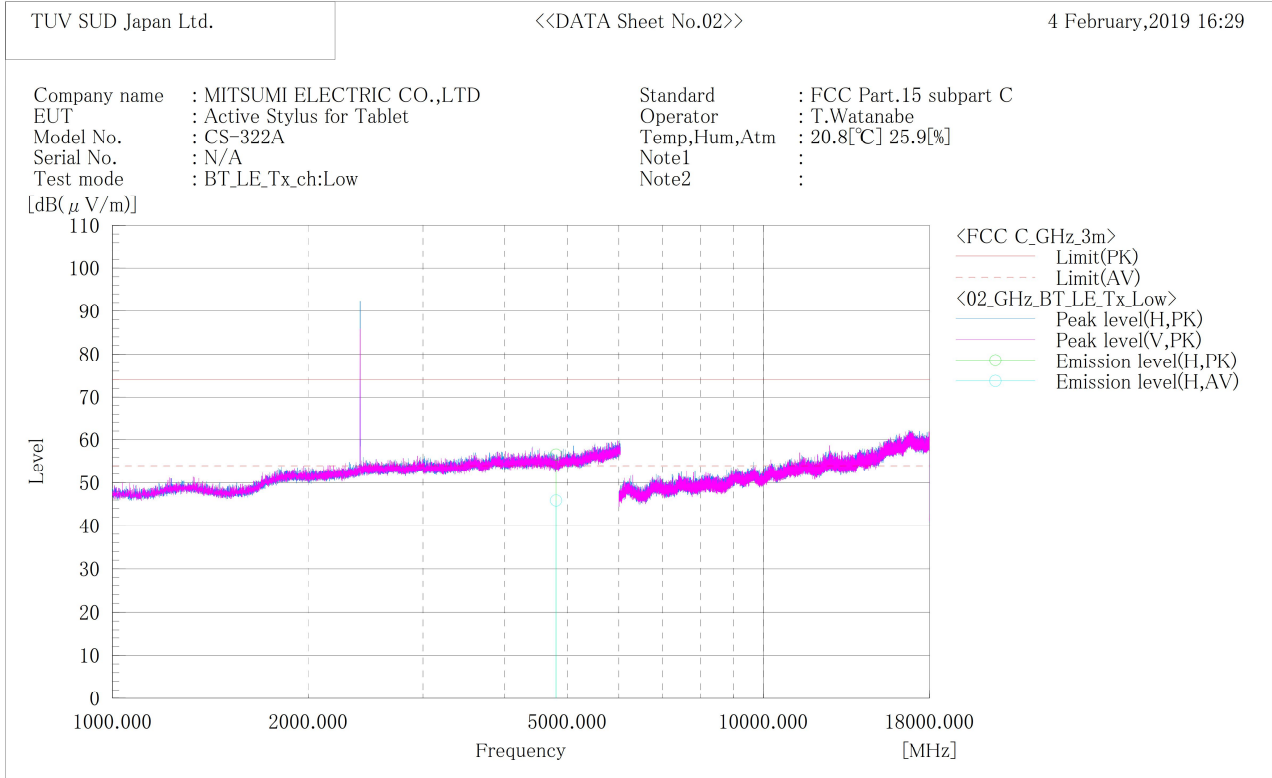

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]	Remark
1	4804.000	H	47.7	37.0	8.9	56.6	45.9	74.0	54.0	17.4	8.1	140.0	268.0	

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.



Japan

**Channel: Middle  
BELOW 1 GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

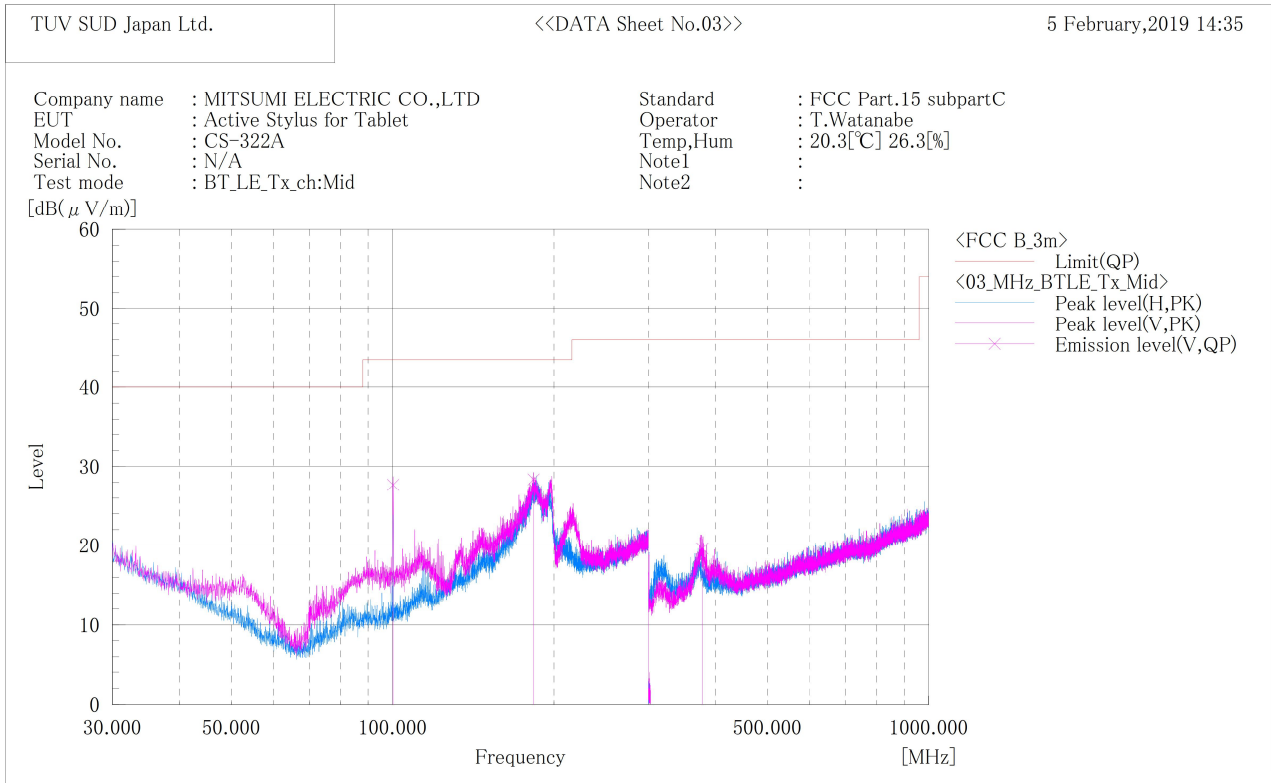

Final Result

No.	Frequency [MHz]	(P)	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	100.202	V	42.4	-14.7	27.7	43.5	15.8	100.0	118.0	
2	183.193	V	36.6	-8.2	28.4	43.5	15.1	100.0	300.0	
3	378.100	V	31.2	-11.6	19.6	46.0	26.4	100.0	121.0	

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable - Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.



Japan

**Channel: Middle  
ABOVE 1 GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

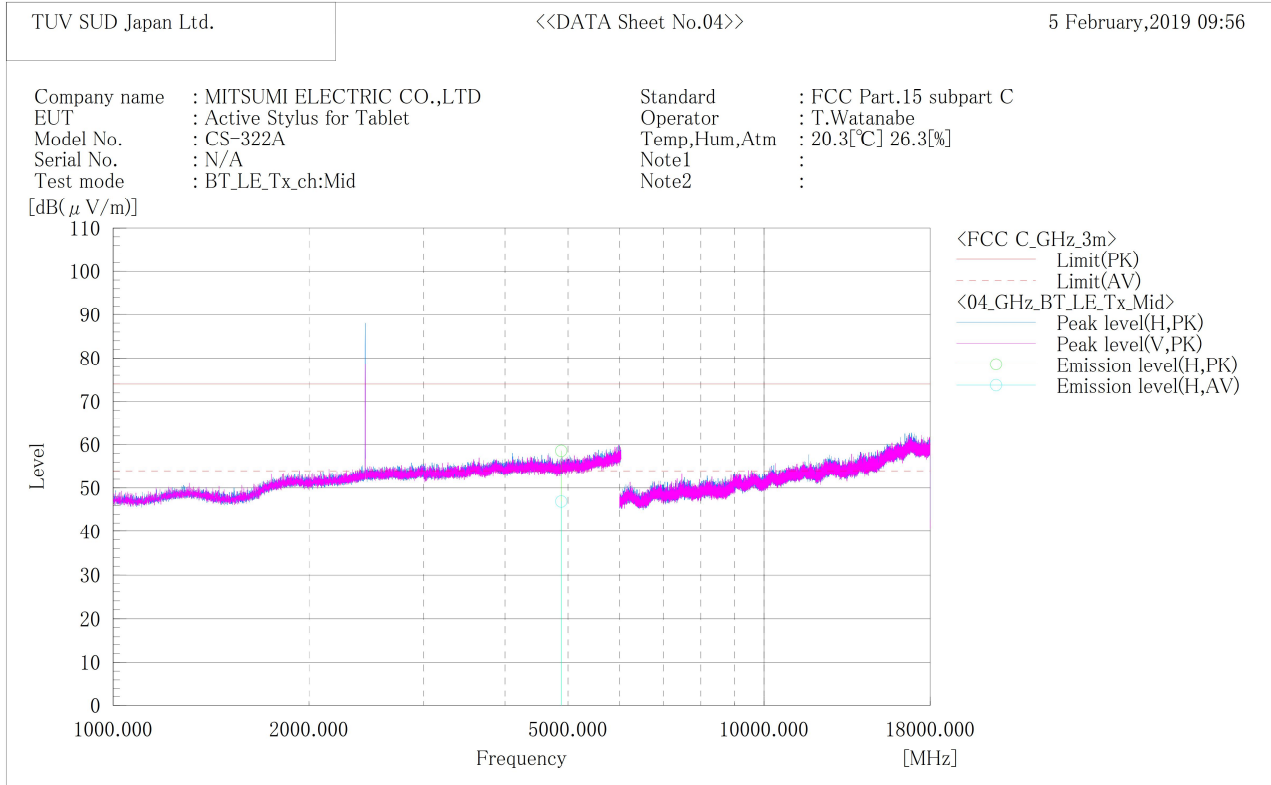

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]	Remark
1	4880.000	H	49.4	37.7	9.2	58.6	46.9	74.0	54.0	15.4	7.1	163.0	293.0	


**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.



**Channel: High  
BELOW 1 GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

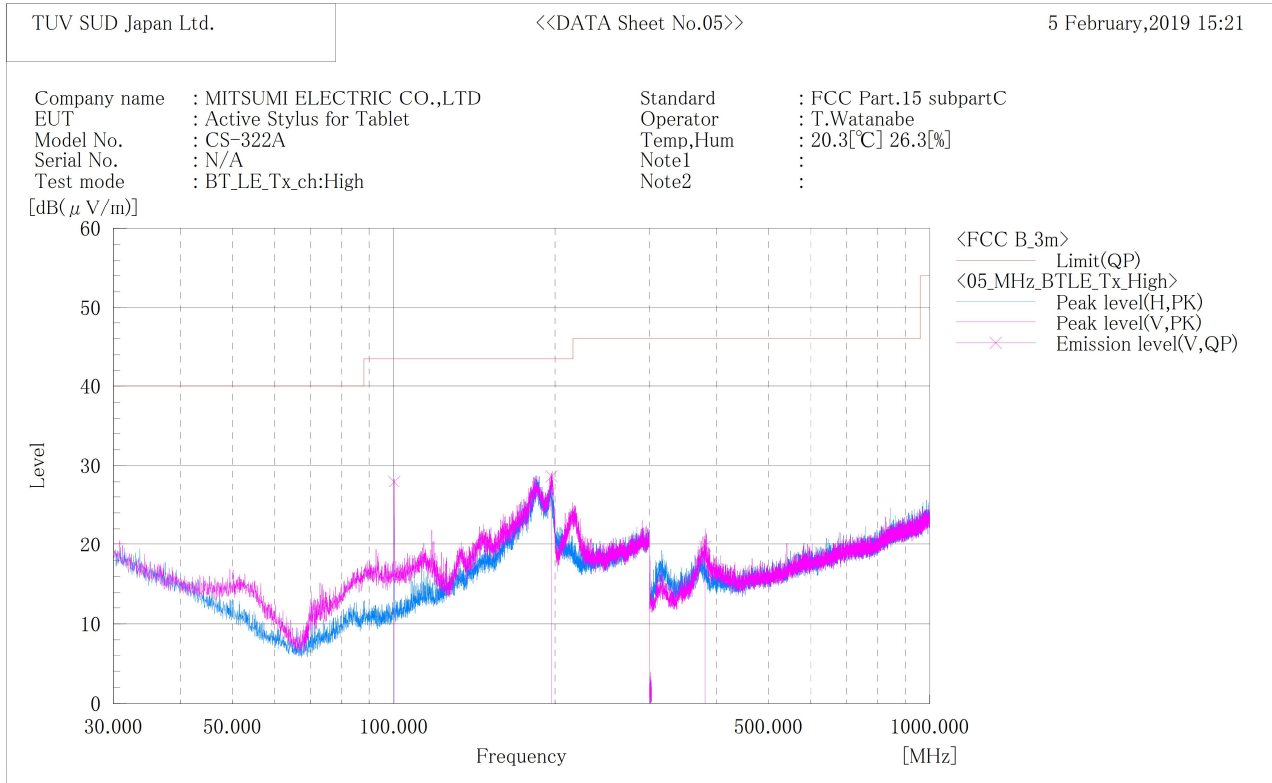

Final Result

No.	Frequency [MHz]	(P)	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	100.169	V	42.7	-14.7	28.0	43.5	15.5	100.0	106.0	
2	197.040	V	36.8	-8.1	28.7	43.5	14.8	100.0	346.0	
3	380.900	V	31.3	-11.5	19.8	46.0	26.2	105.0	129.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable - Amp)]
2. No emission were detected in frequency range 9kHz to 30MHz at the 3 meters distance.






Japan

**Channel: High  
ABOVE 1 GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

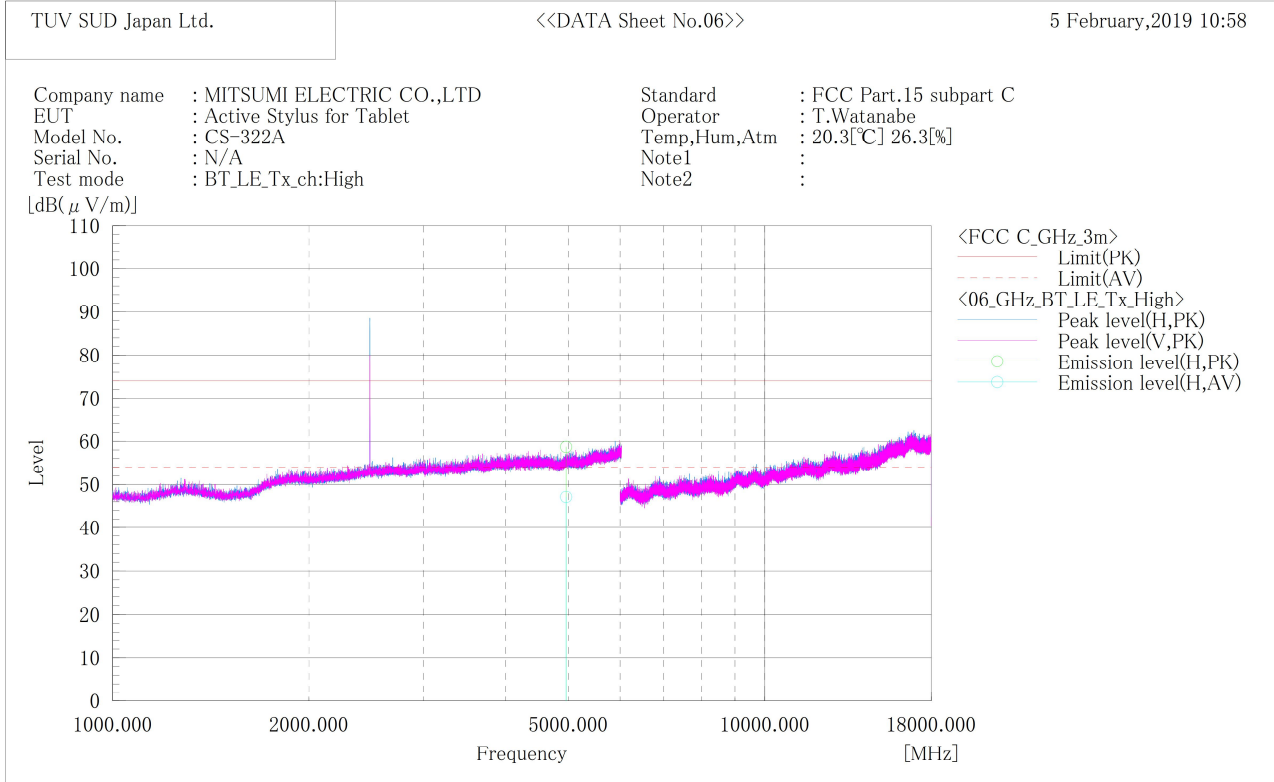

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]	Remark
1	4960.000	H	48.9	37.3	9.8	58.7	47.1	74.0	54.0	15.3	6.9	129.0	101.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.