


# RF Exposure Evaluation Exclusion Letter

**Equipment** : LCD Tablet  
**Brand Name** : Wacom  
**Model No.** : DTH-1320  
**FCC ID** : HV4DTH1320  
**Standard** : IEEE C95.1  
**Applicant /** : Wacom Co., Ltd.  
**Manufacturer** : 2-510-1 Toyonodai, Kazo-shi, Saitama 349-1148 Japan

The product sample received on Oct. 05, 2016 and completely tested on Oct. 18, 2016. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in IEEE C95.1 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

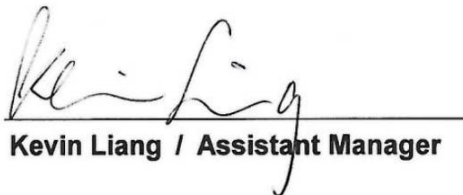

Kevin Liang / Assistant Manager



# SAR Exclusion Letter

Date of Issue: Nov. 08, 2016

---

According to KDB 447498 D01 v06 section 4.3.1, the 1-g SAR test exclusion thresholds at test separation distance  $\leq 50$  mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$

The tune-up power is -74.01 dBm +/- 0.5dB, therefore the highest tune-up power is

$$\mathbf{-73.50 \text{ dBm} \quad (0.00000004 \text{ mW}) \quad @ \text{ 667 kHz}}$$

When the minimum *test separation distance* is  $< 5$  mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

So,

$$(0.00000004 \text{ mW} / 5 \text{ mm}) \cdot (0.0667 \text{ GHz}^{0.5}) = 0.000000021$$

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] = 0.000000021 \leq 3.0$$

Therefore, SAR are not required