




Transmitter Radiated Unwanted Emissions (Below 1GHz)

Transmitter Radiated Unwanted Emissions (Below 1GHz)			
Operating Mode	1	Polarization	V
Operating Function	VHT80 5530MHz, Adapter with charging mode		

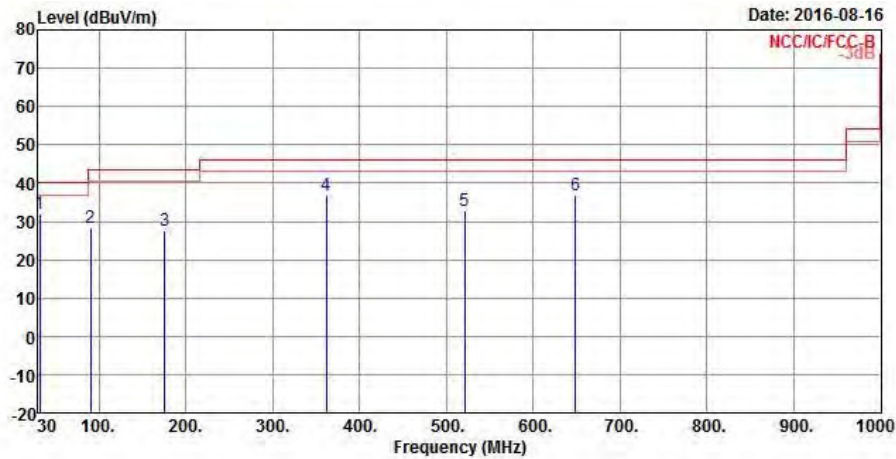


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	31.940	31.94	-8.06	40.00	34.28	24.41	0.80	27.55 Peak
2	90.140	28.41	-15.09	43.50	39.09	15.28	1.45	27.41 Peak
3	175.500	27.74	-15.76	43.50	36.94	15.74	2.10	27.04 Peak
4	361.740	36.86	-9.14	46.00	38.91	21.53	3.12	26.70 Peak
5	520.820	32.71	-13.29	46.00	32.80	24.17	3.59	27.85 Peak
6	648.860	36.88	-9.12	46.00	35.27	25.34	4.25	27.98 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).  
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Polarization	H
Operating Function	VHT80 5530MHz, Adapter with charging mode		

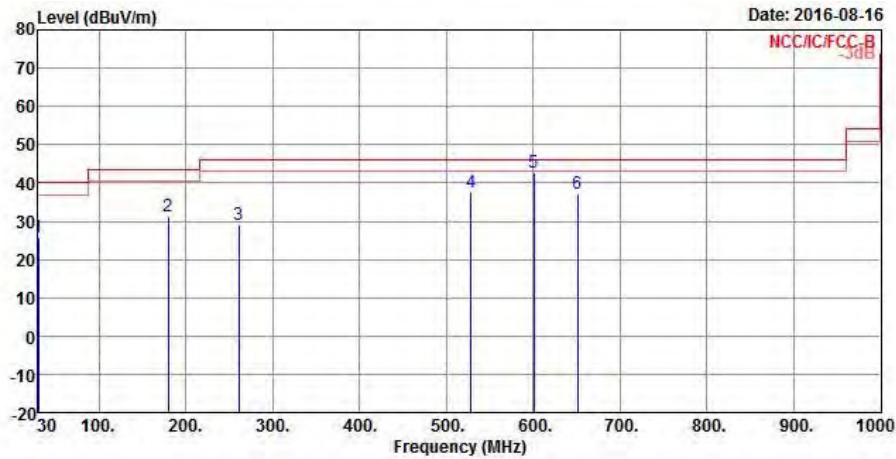

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	30.000	25.84	-14.16	40.00	26.99	25.62	0.78	27.55	Peak
2	179.380	31.39	-12.11	43.50	40.69	15.59	2.13	27.02	Peak
3	260.860	29.15	-16.85	46.00	33.72	19.73	2.49	26.79	Peak
4	528.580	37.48	-8.52	46.00	37.43	24.30	3.61	27.86	Peak
5	600.360	42.74	-3.26	46.00	41.85	24.84	4.07	28.02	Peak
6	650.800	37.31	-8.69	46.00	35.68	25.35	4.25	27.97	QP


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).  
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

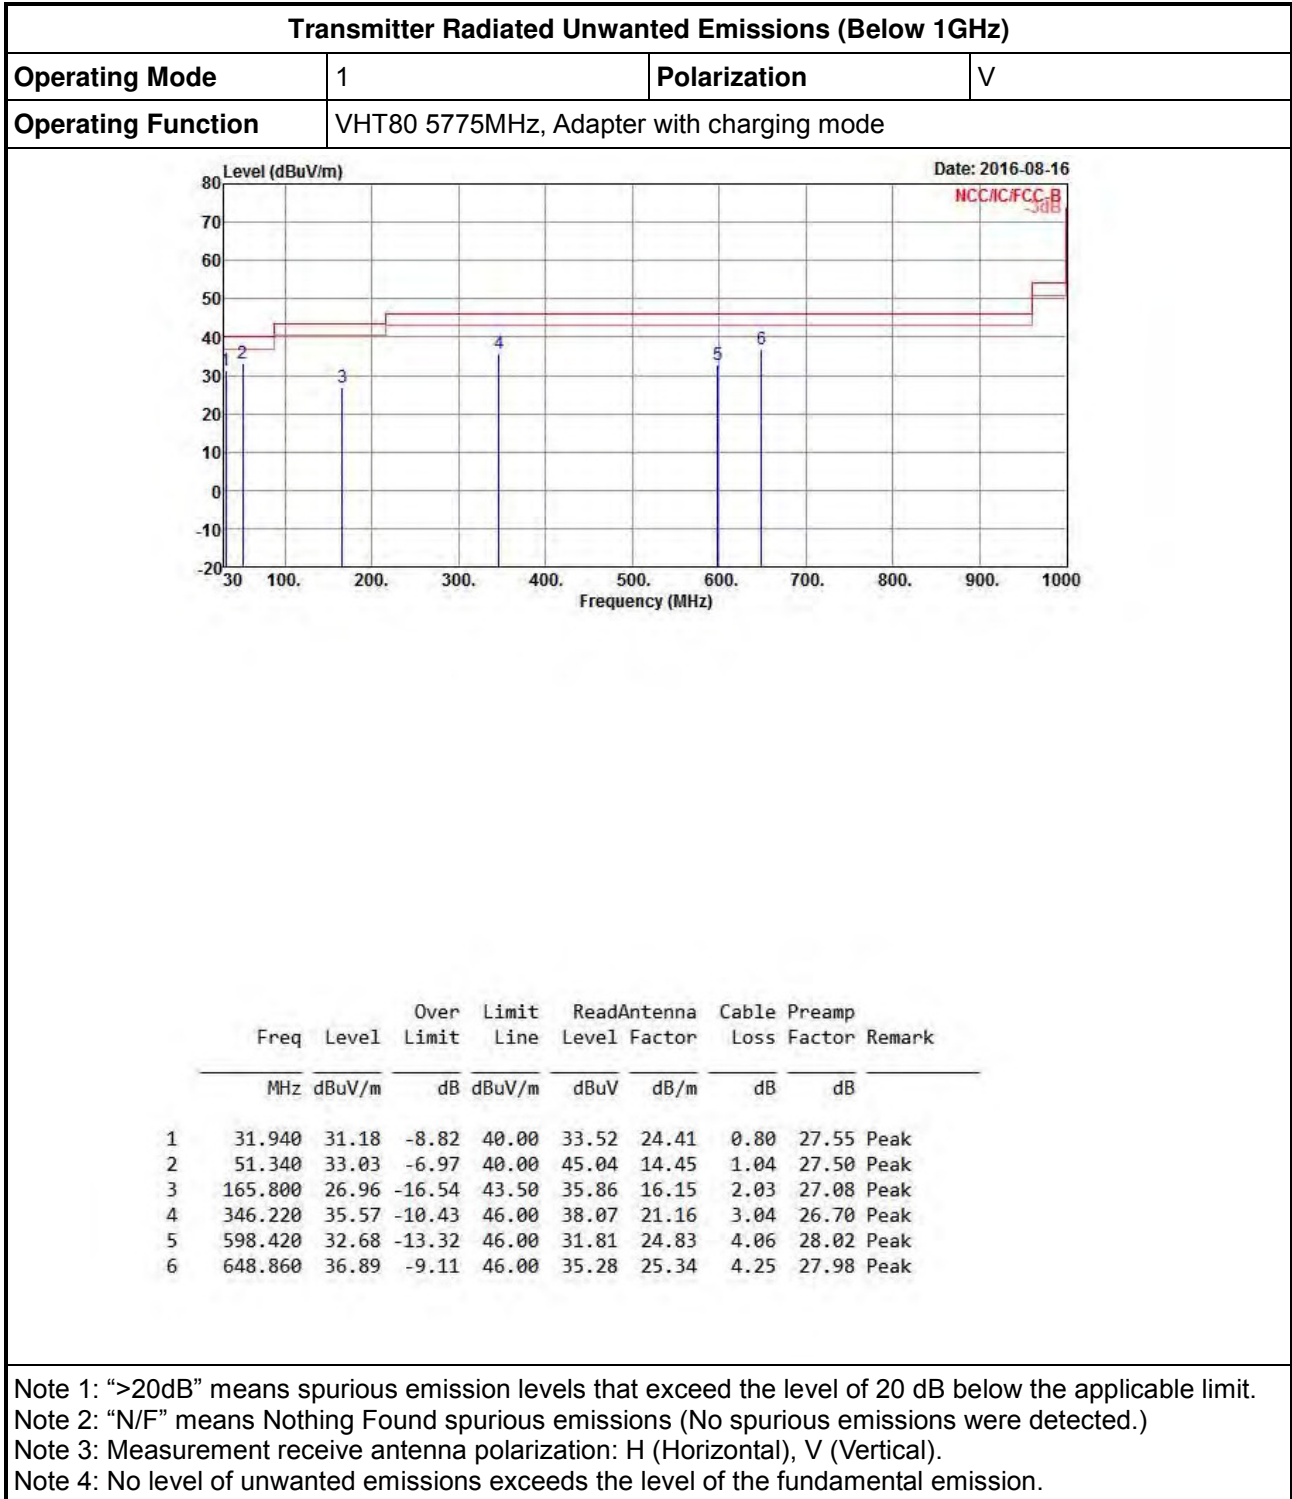



Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Polarization	H
Operating Function	VHT80 5775MHz, Adapter with charging mode		

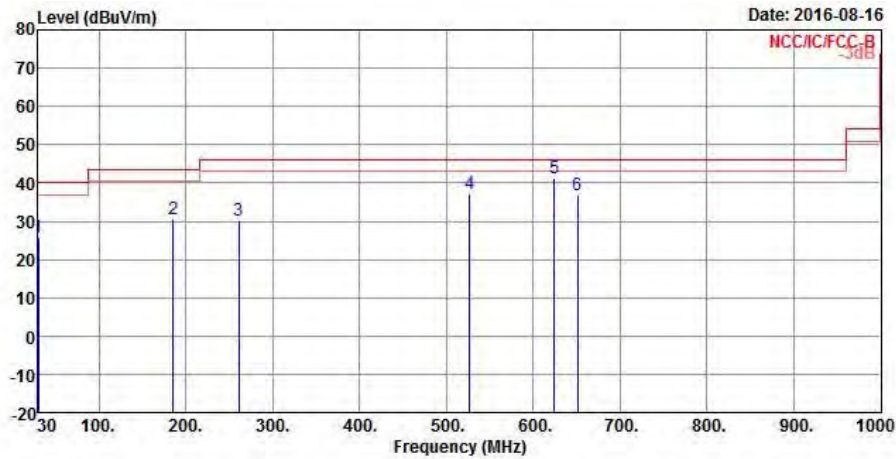

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	30.000	25.73	-14.27	40.00	26.88	25.62	0.78	27.55	Peak
2	185.200	30.69	-12.81	43.50	39.95	15.56	2.17	26.99	Peak
3	260.860	30.16	-15.84	46.00	34.73	19.73	2.49	26.79	Peak
4	526.640	37.13	-8.87	46.00	37.12	24.27	3.60	27.86	Peak
5	624.610	41.15	-4.85	46.00	39.90	25.09	4.16	28.00	Peak
6	650.800	36.88	-9.12	46.00	35.25	25.35	4.25	27.97	QP


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).  
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.






Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5150-5250MHz


Transmitter Radiated Unwanted Emissions (Above 1GHz)			
<b>Modulation Mode</b>	11a	<b>Test Freq. (MHz)</b>	5180
<b>N<sub>TX</sub></b>	2	<b>Polarization</b>	V

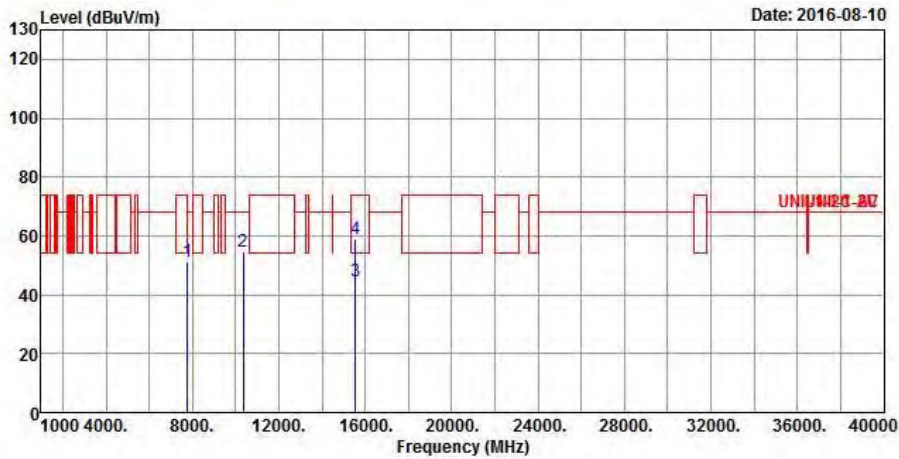



	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	
			dB	dBuV/m	dBuV	dB	dB	
1	7775.000	51.33	-16.87	68.20	42.49	36.74	7.13	35.03 Peak
2	10360.000	54.49	-13.71	68.20	41.84	39.23	8.47	35.05 Peak
3	15540.000	44.61	-9.39	54.00	30.76	38.30	10.41	34.86 Average
4	15540.000	58.96	-15.04	74.00	45.11	38.30	10.41	34.86 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

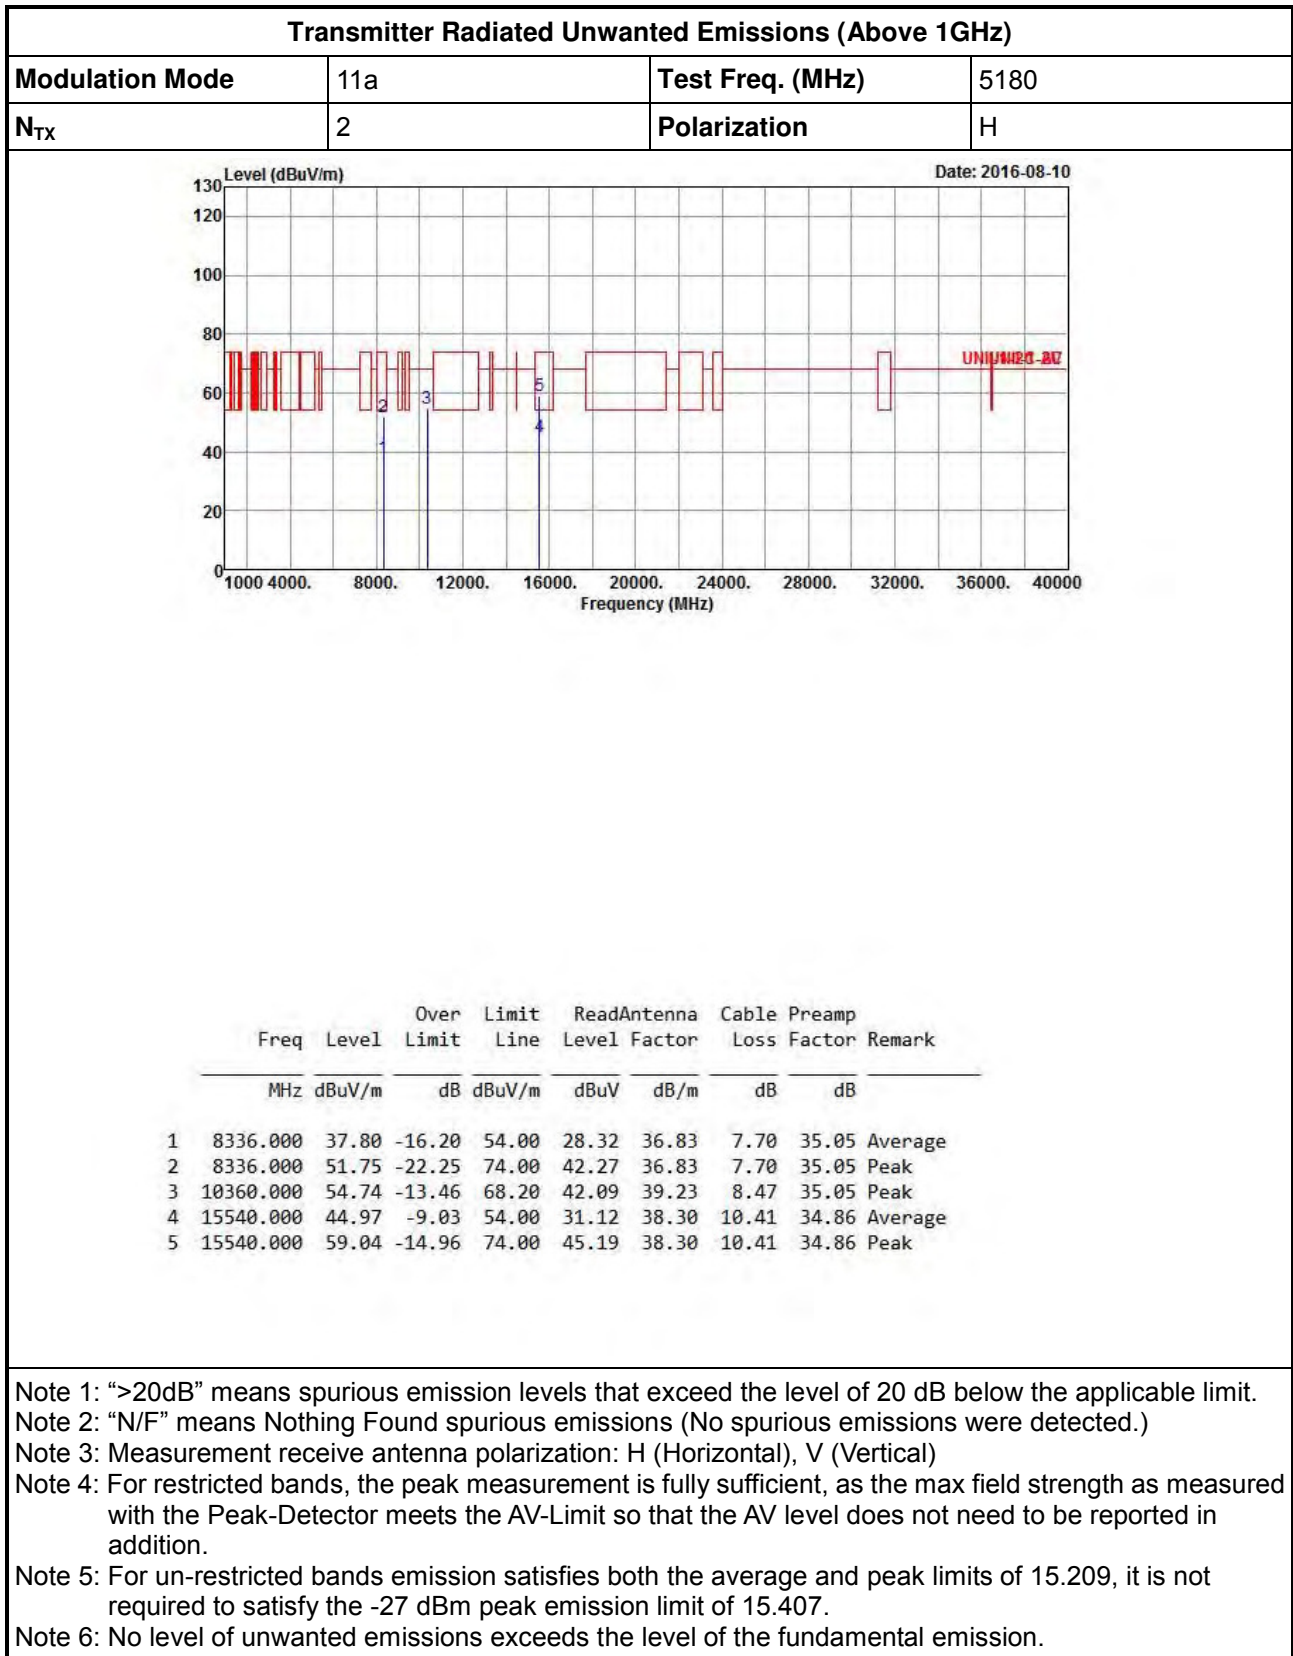


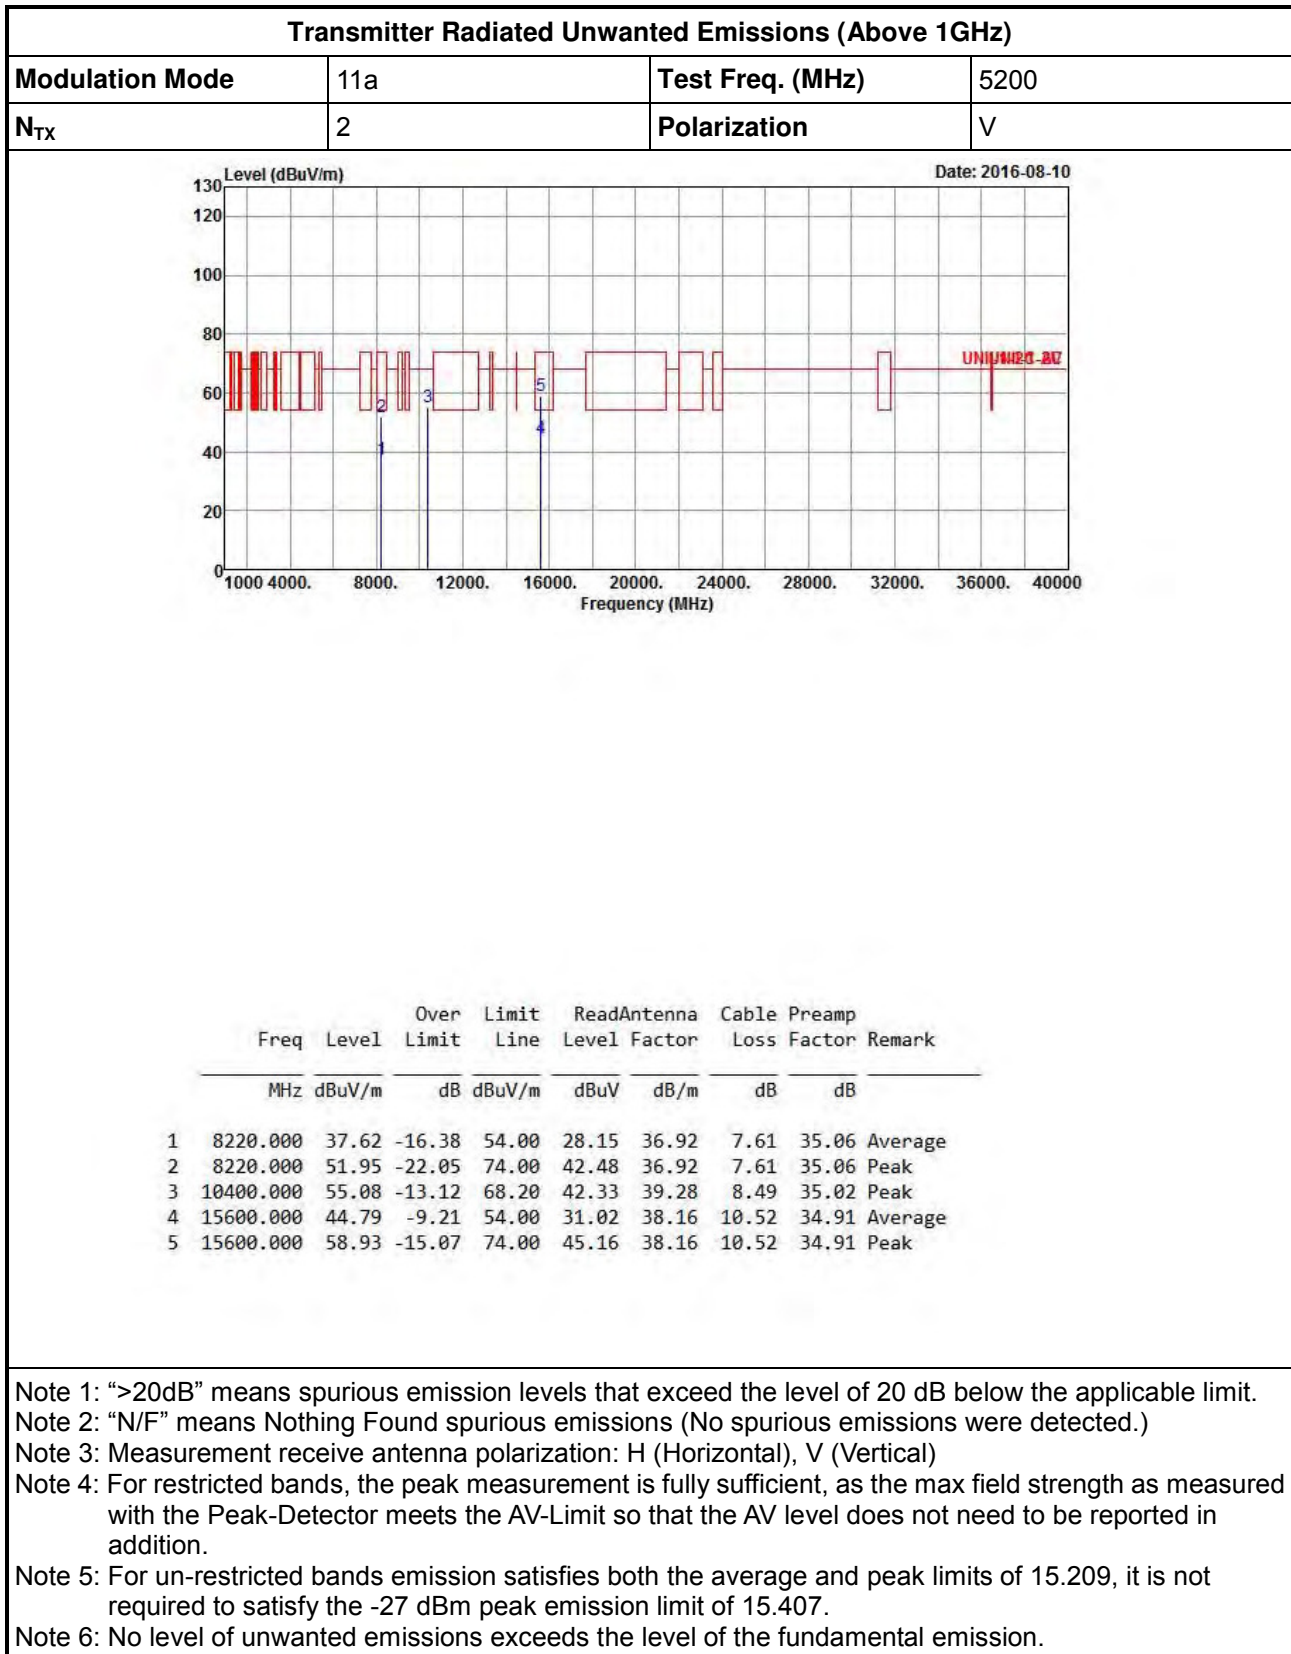


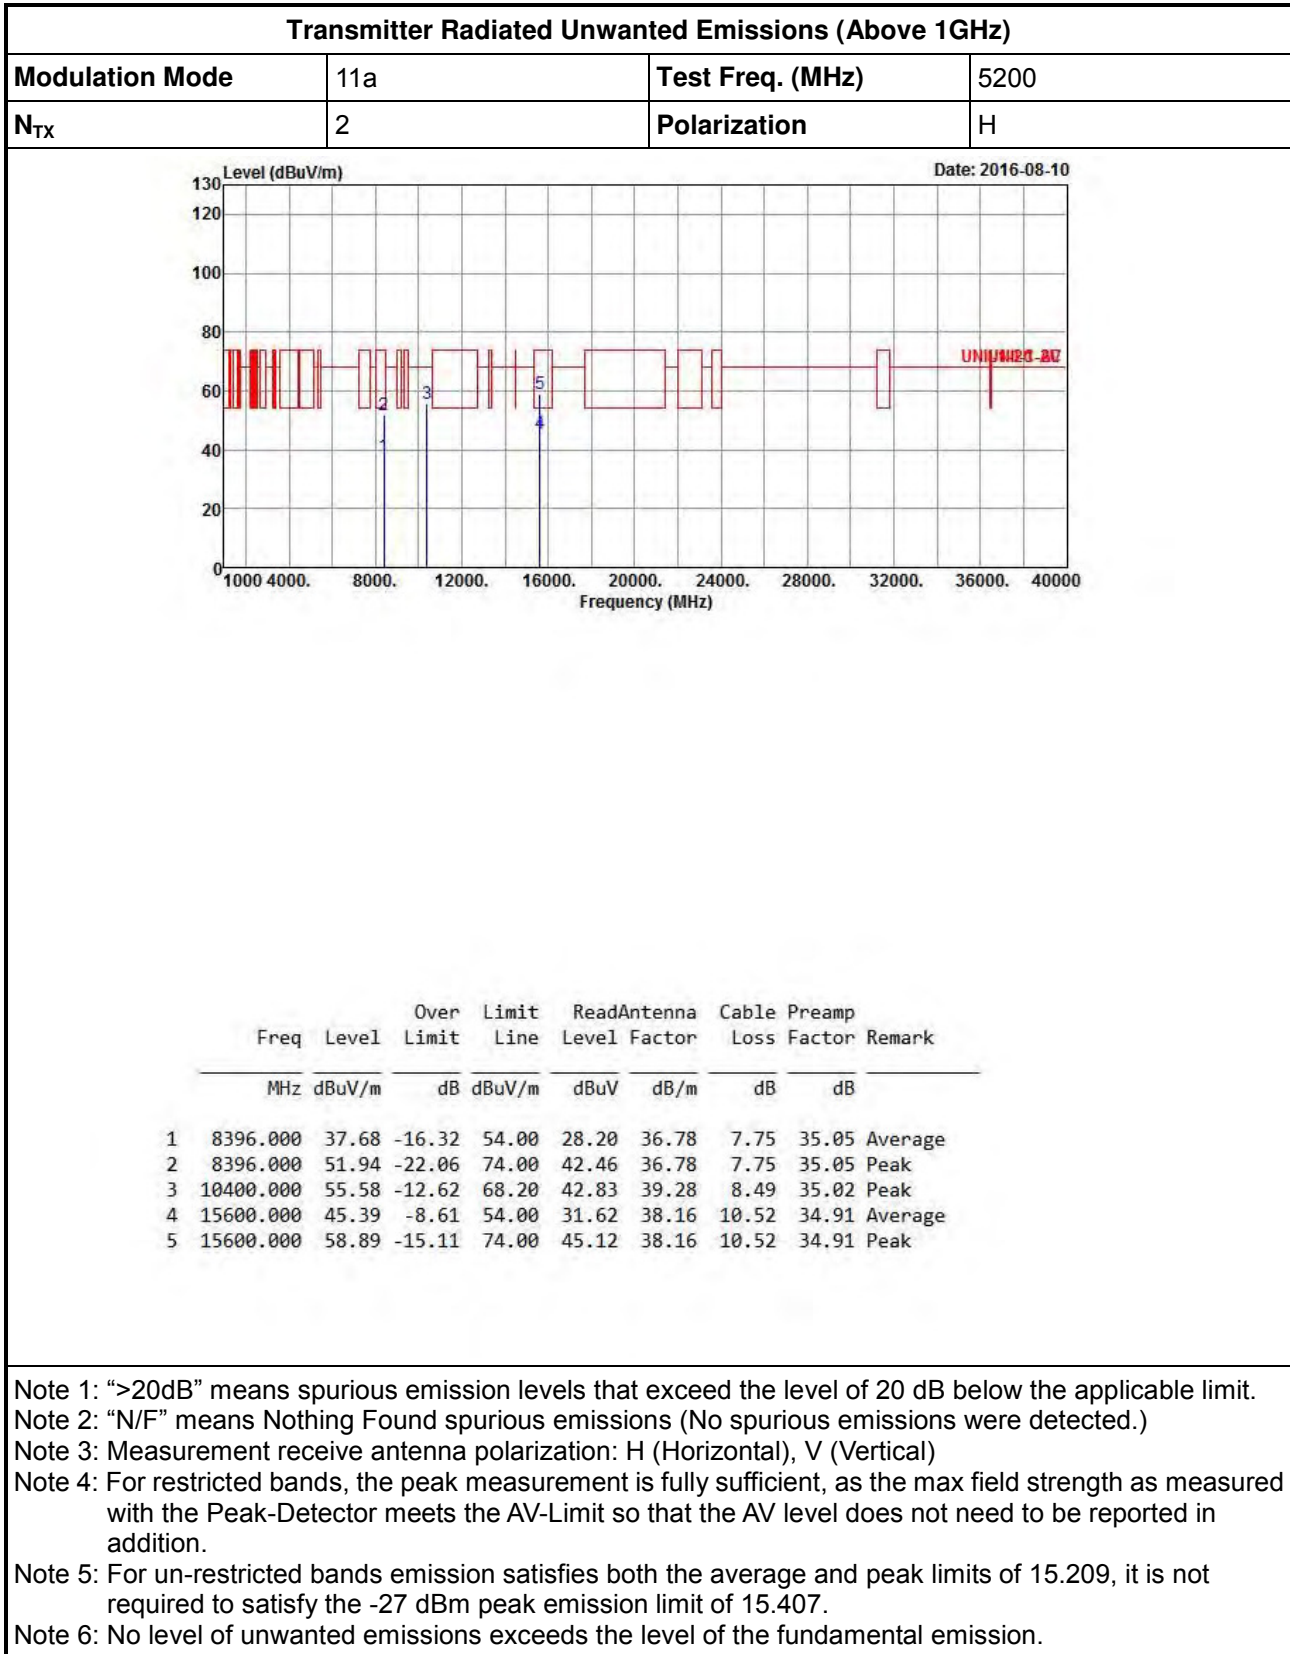


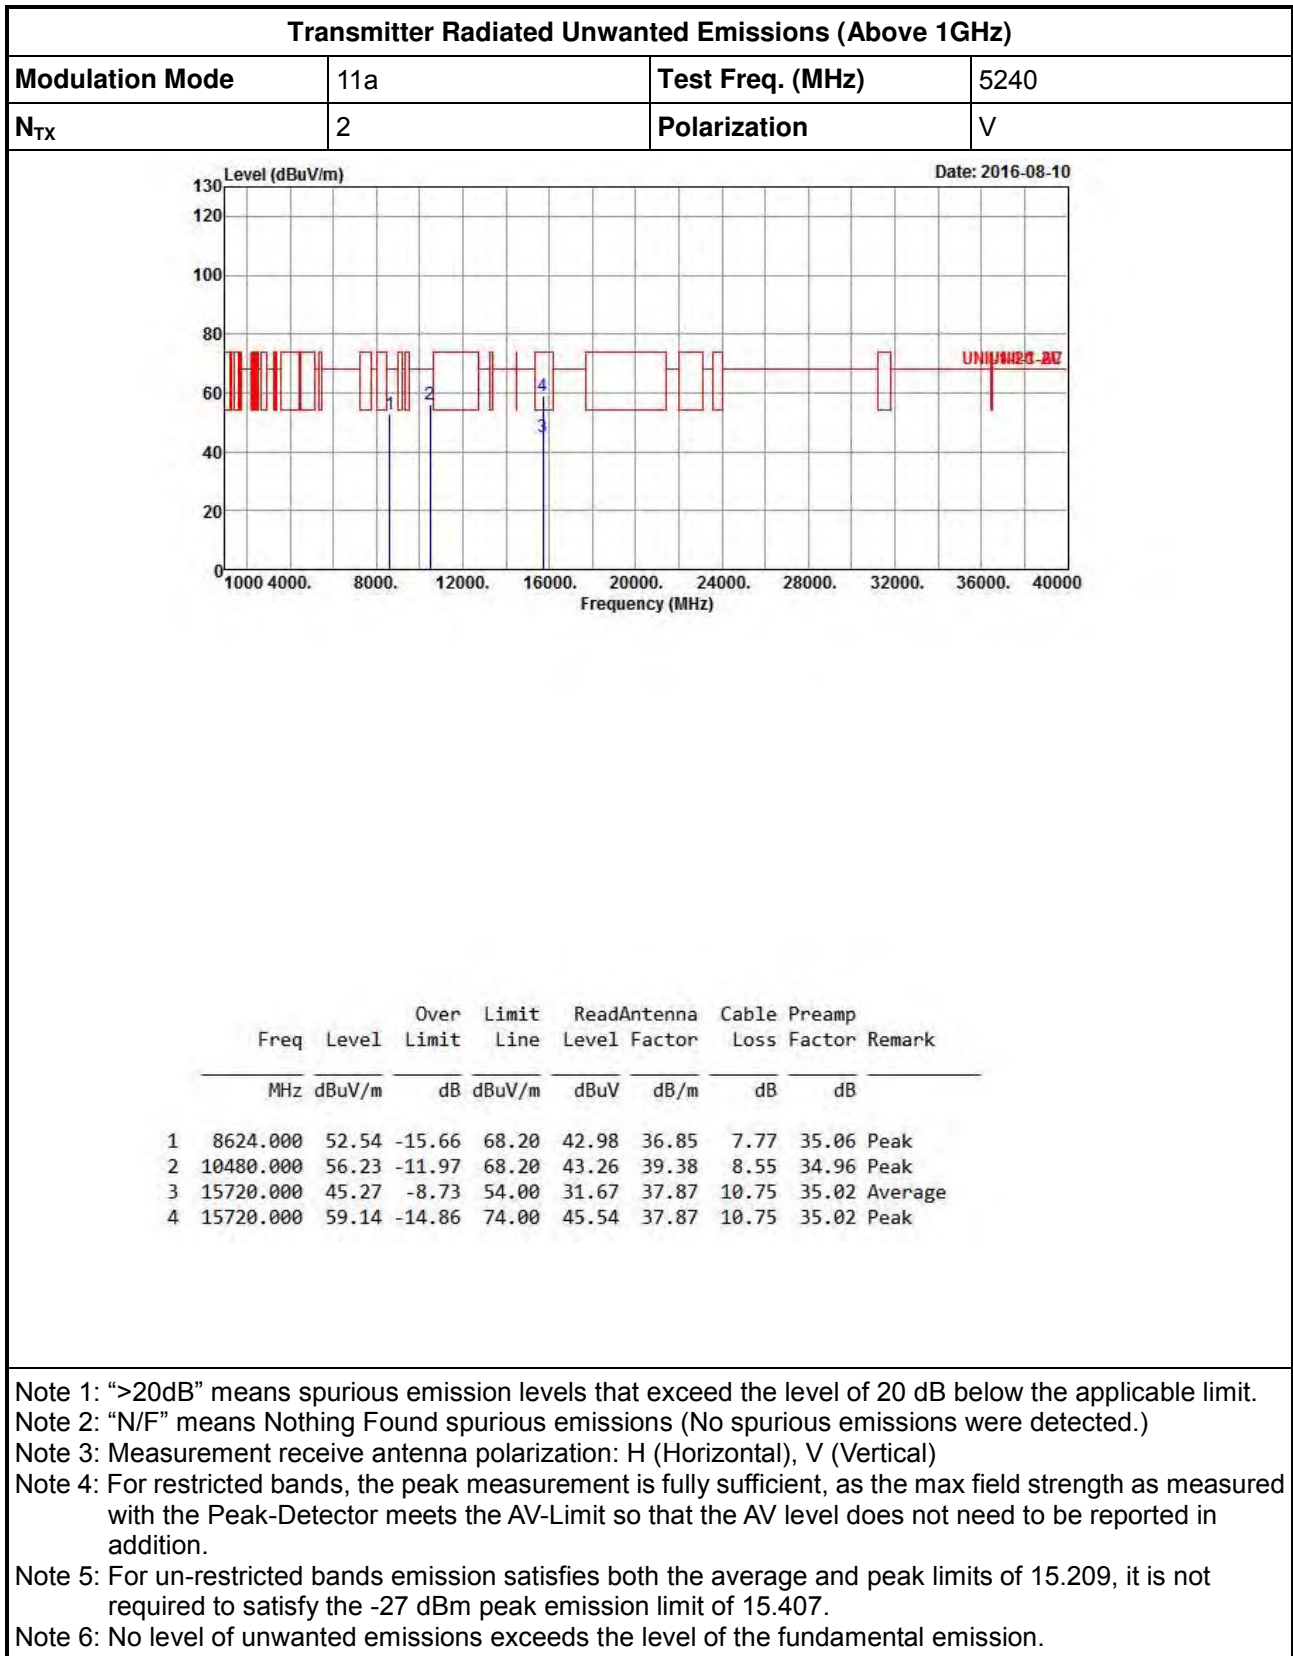





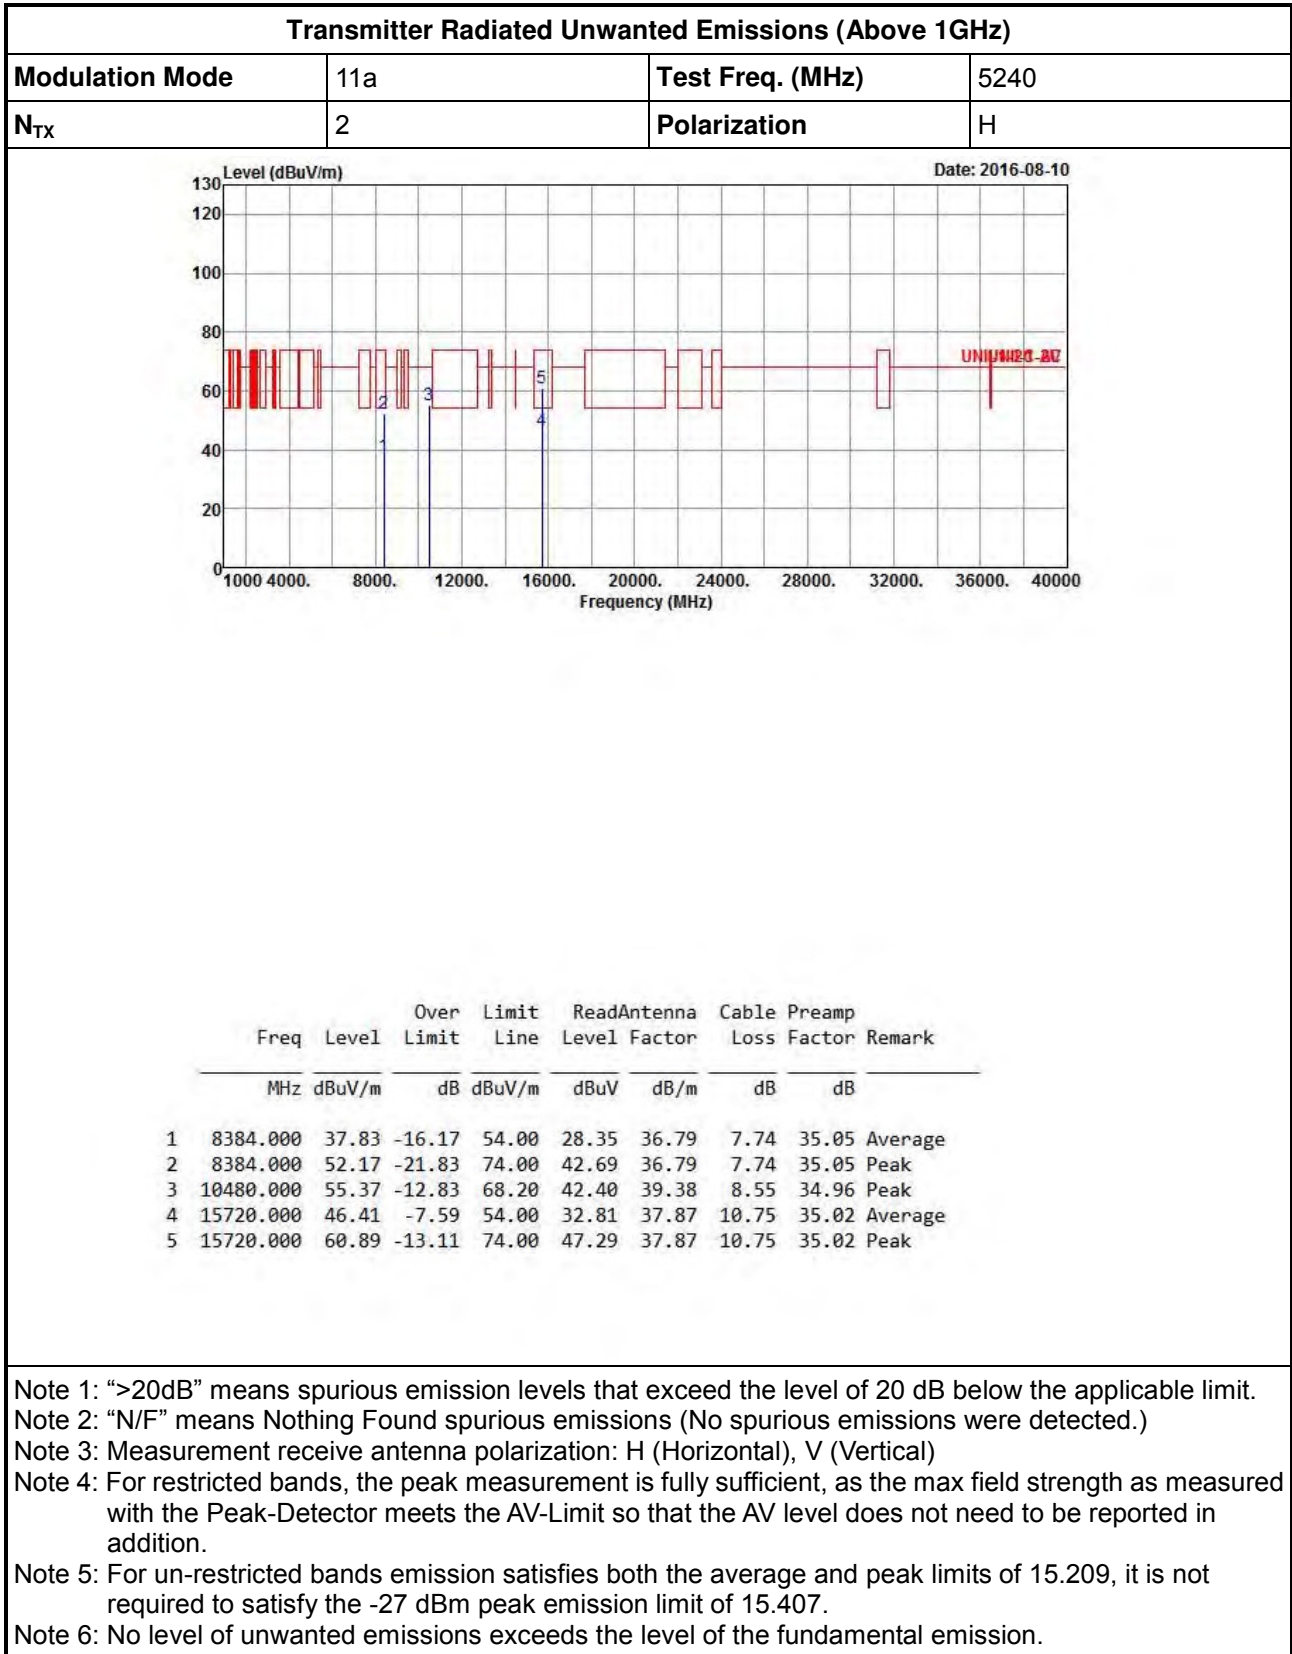

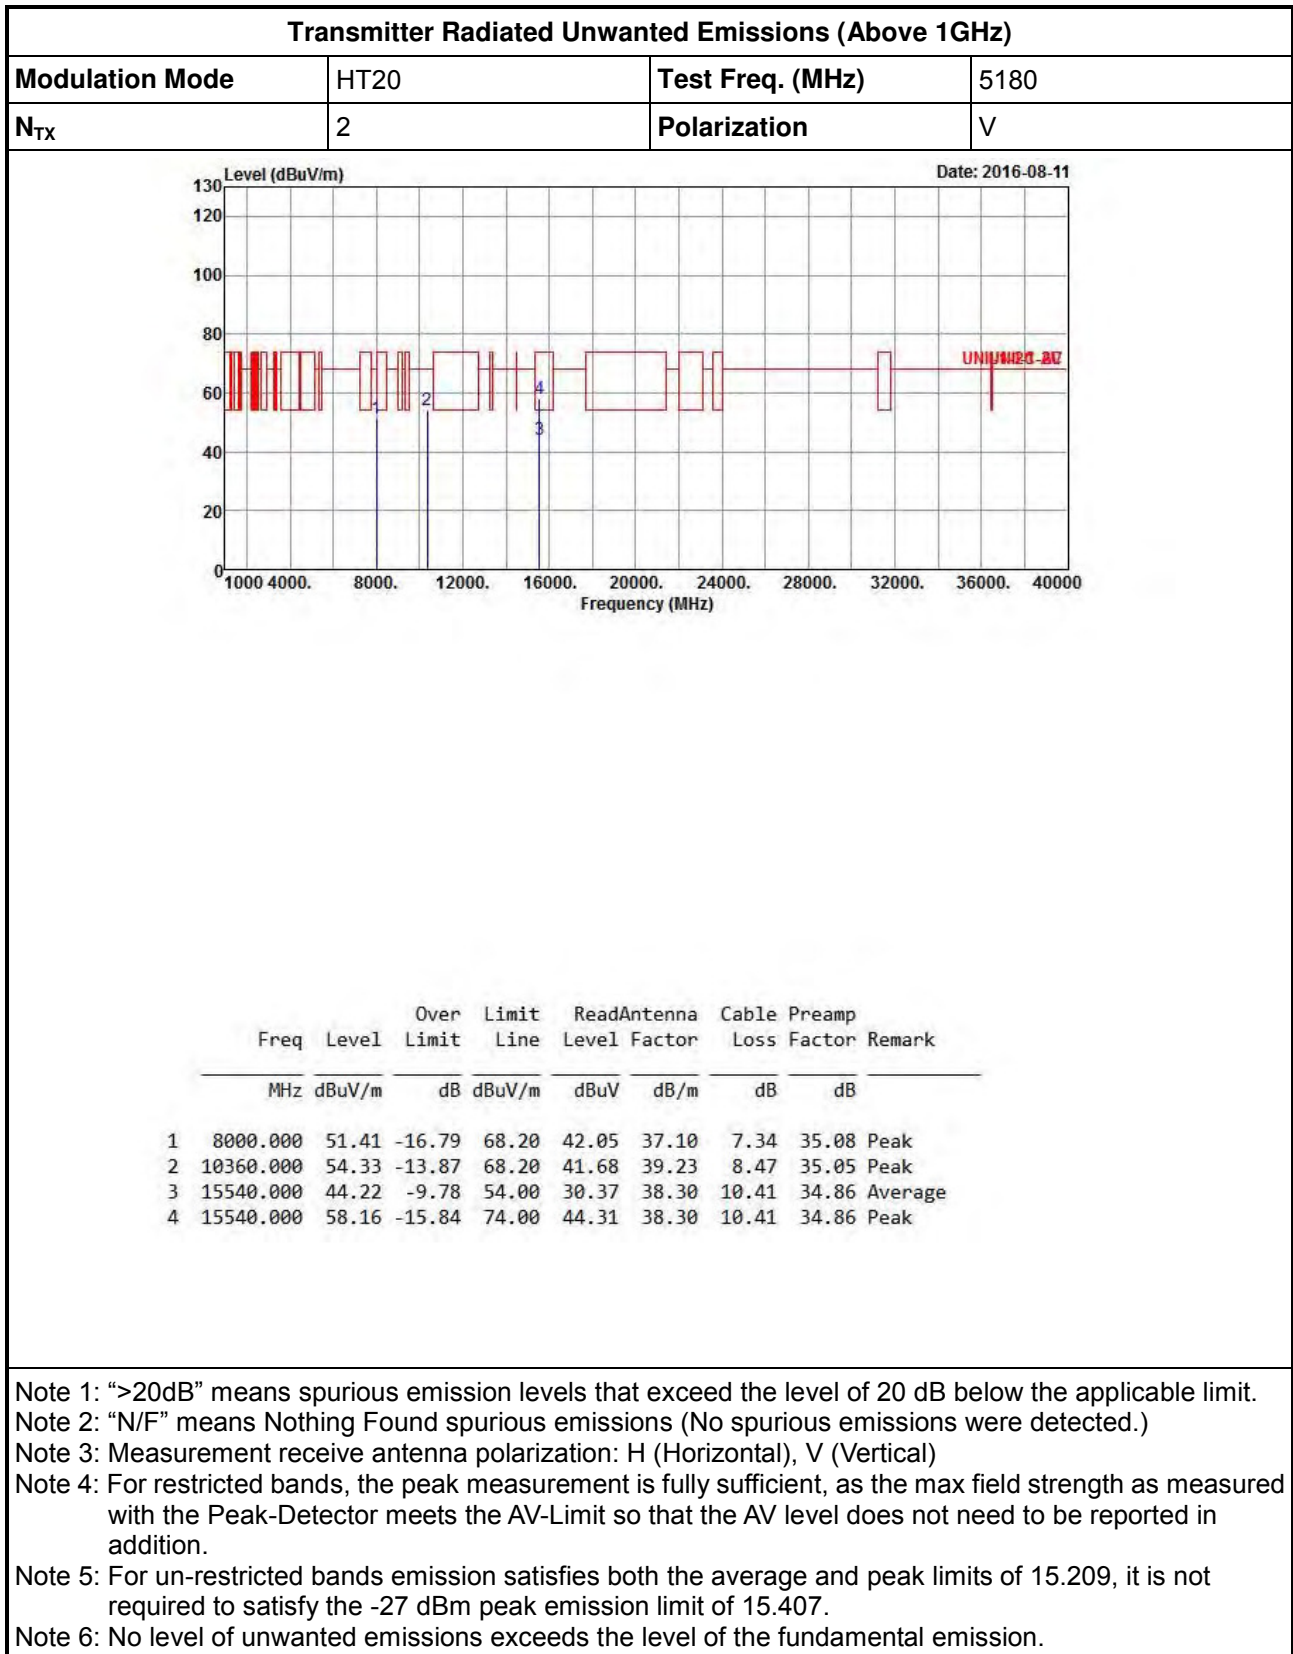


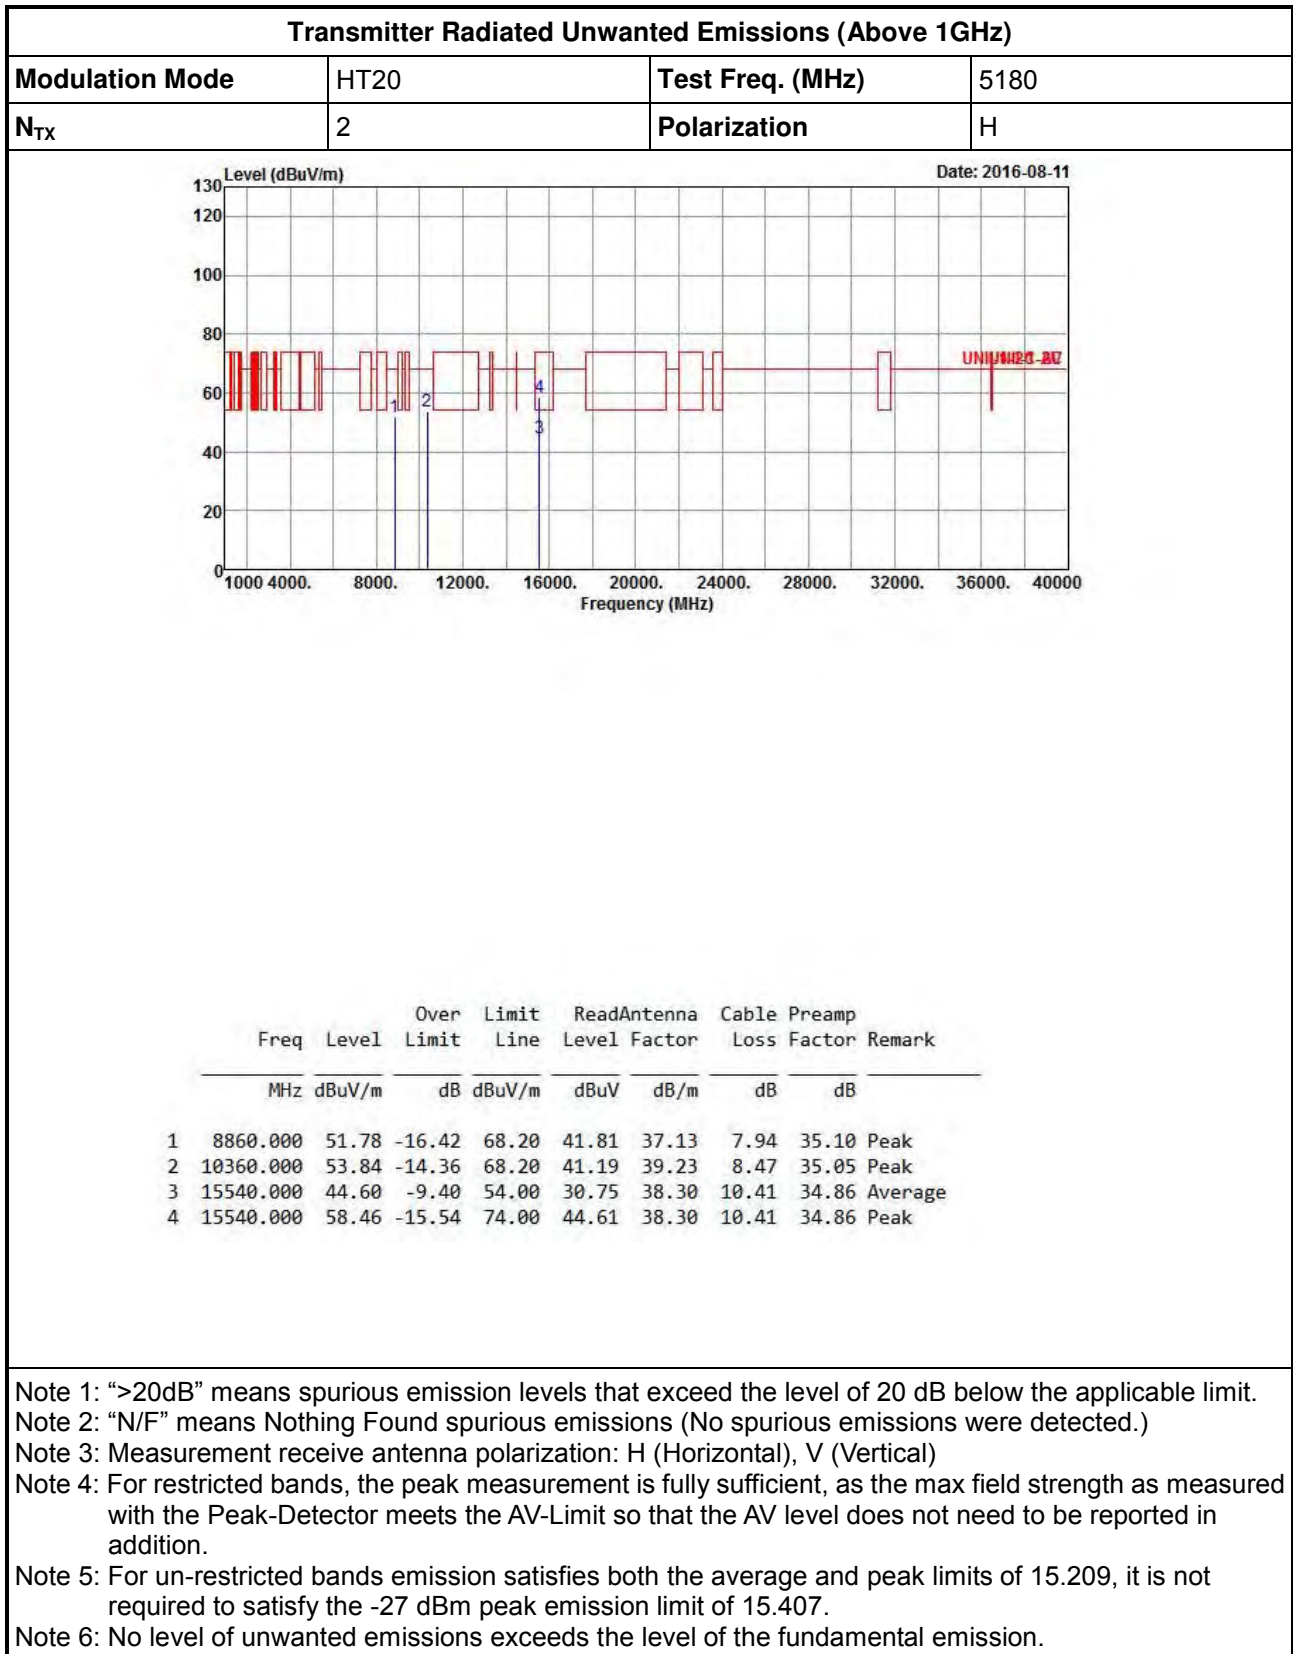


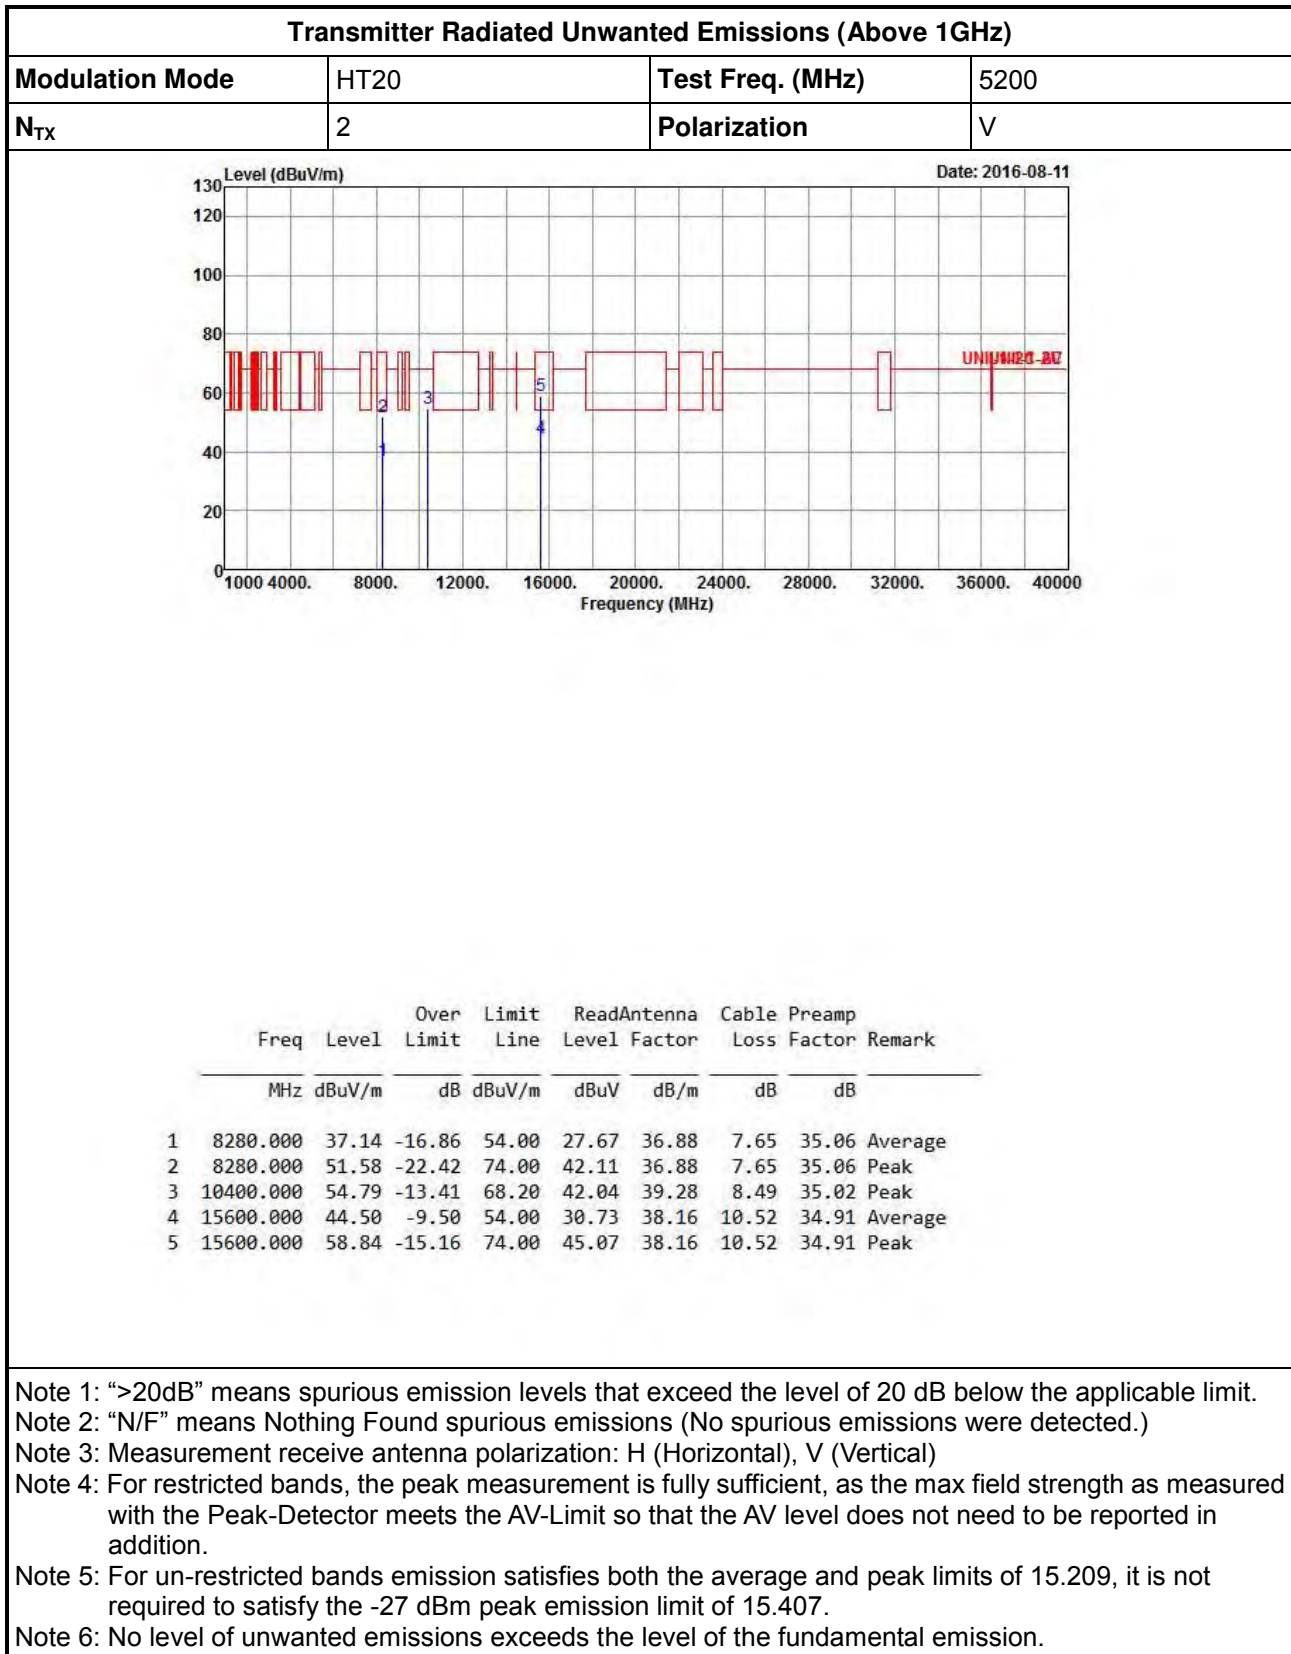


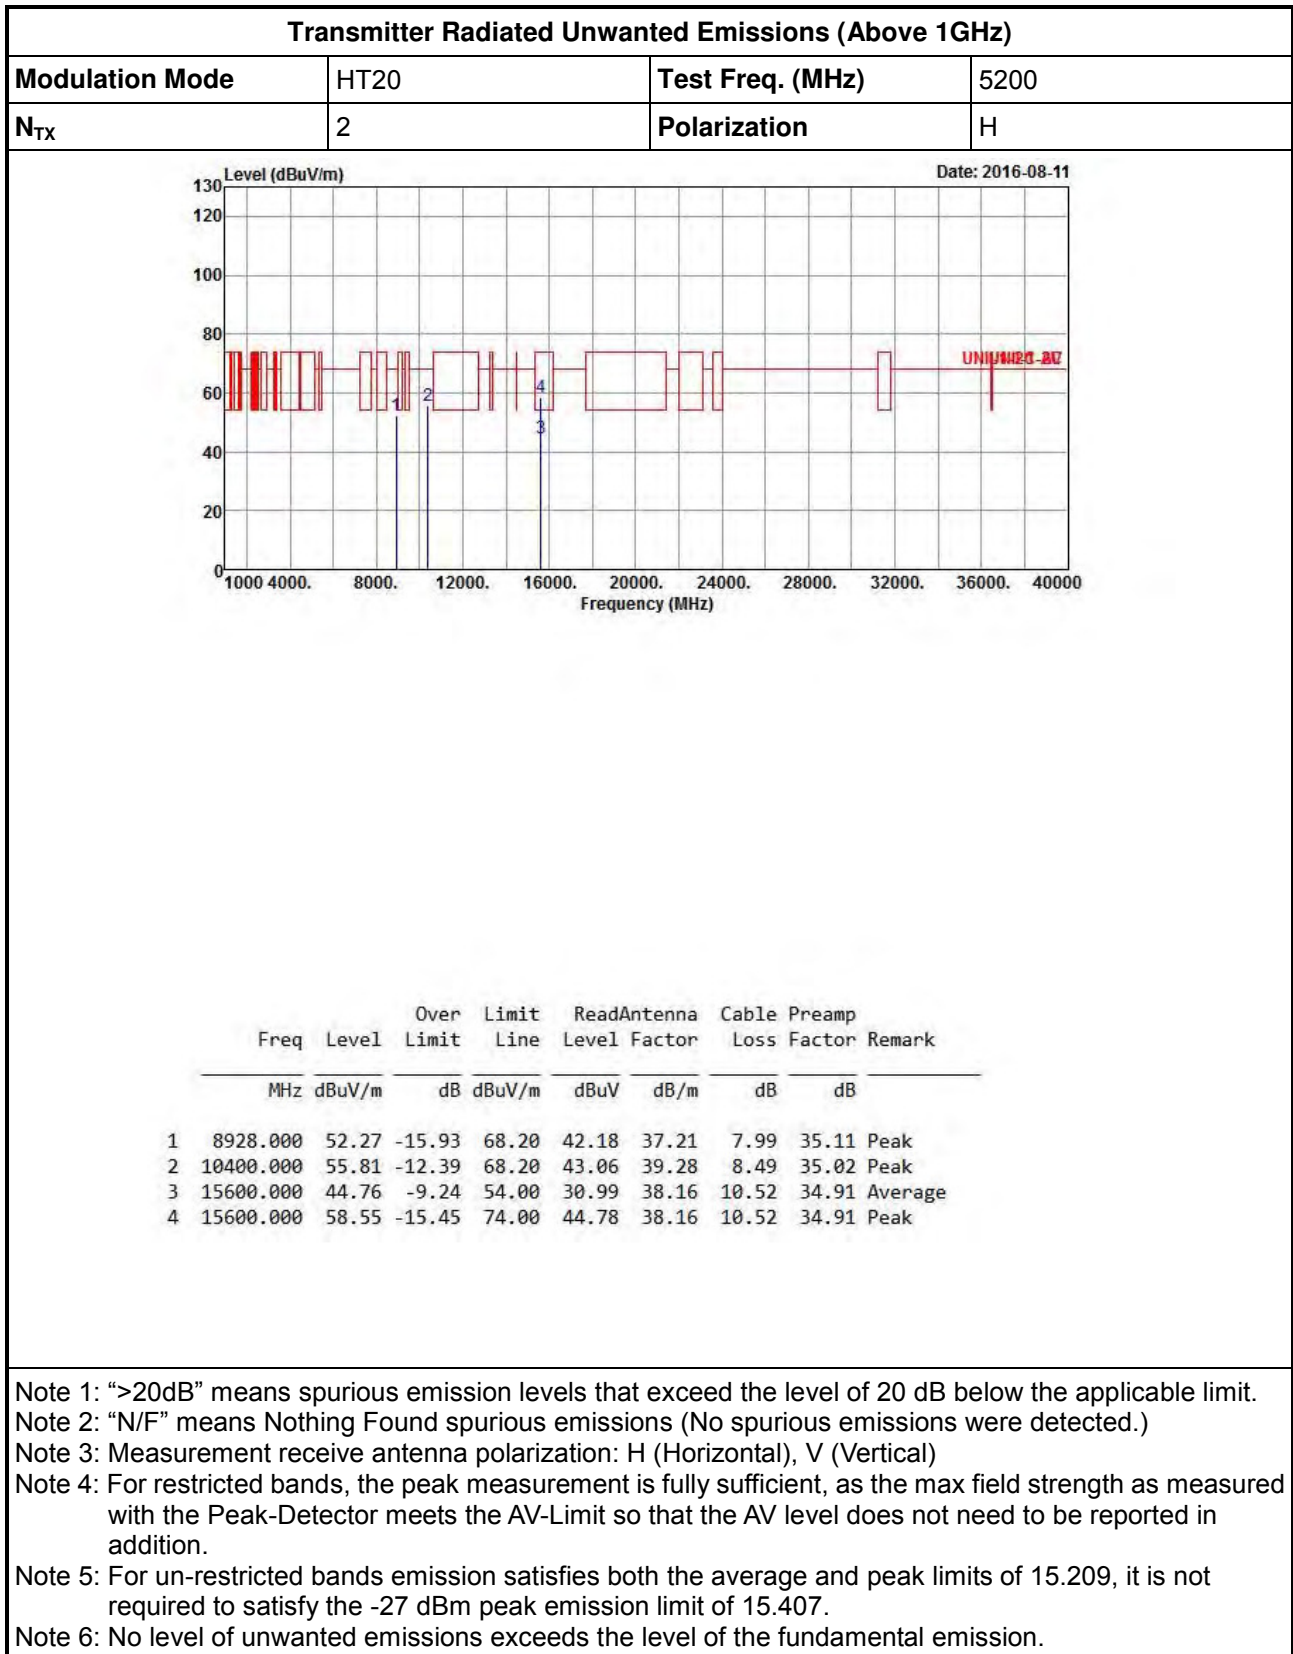





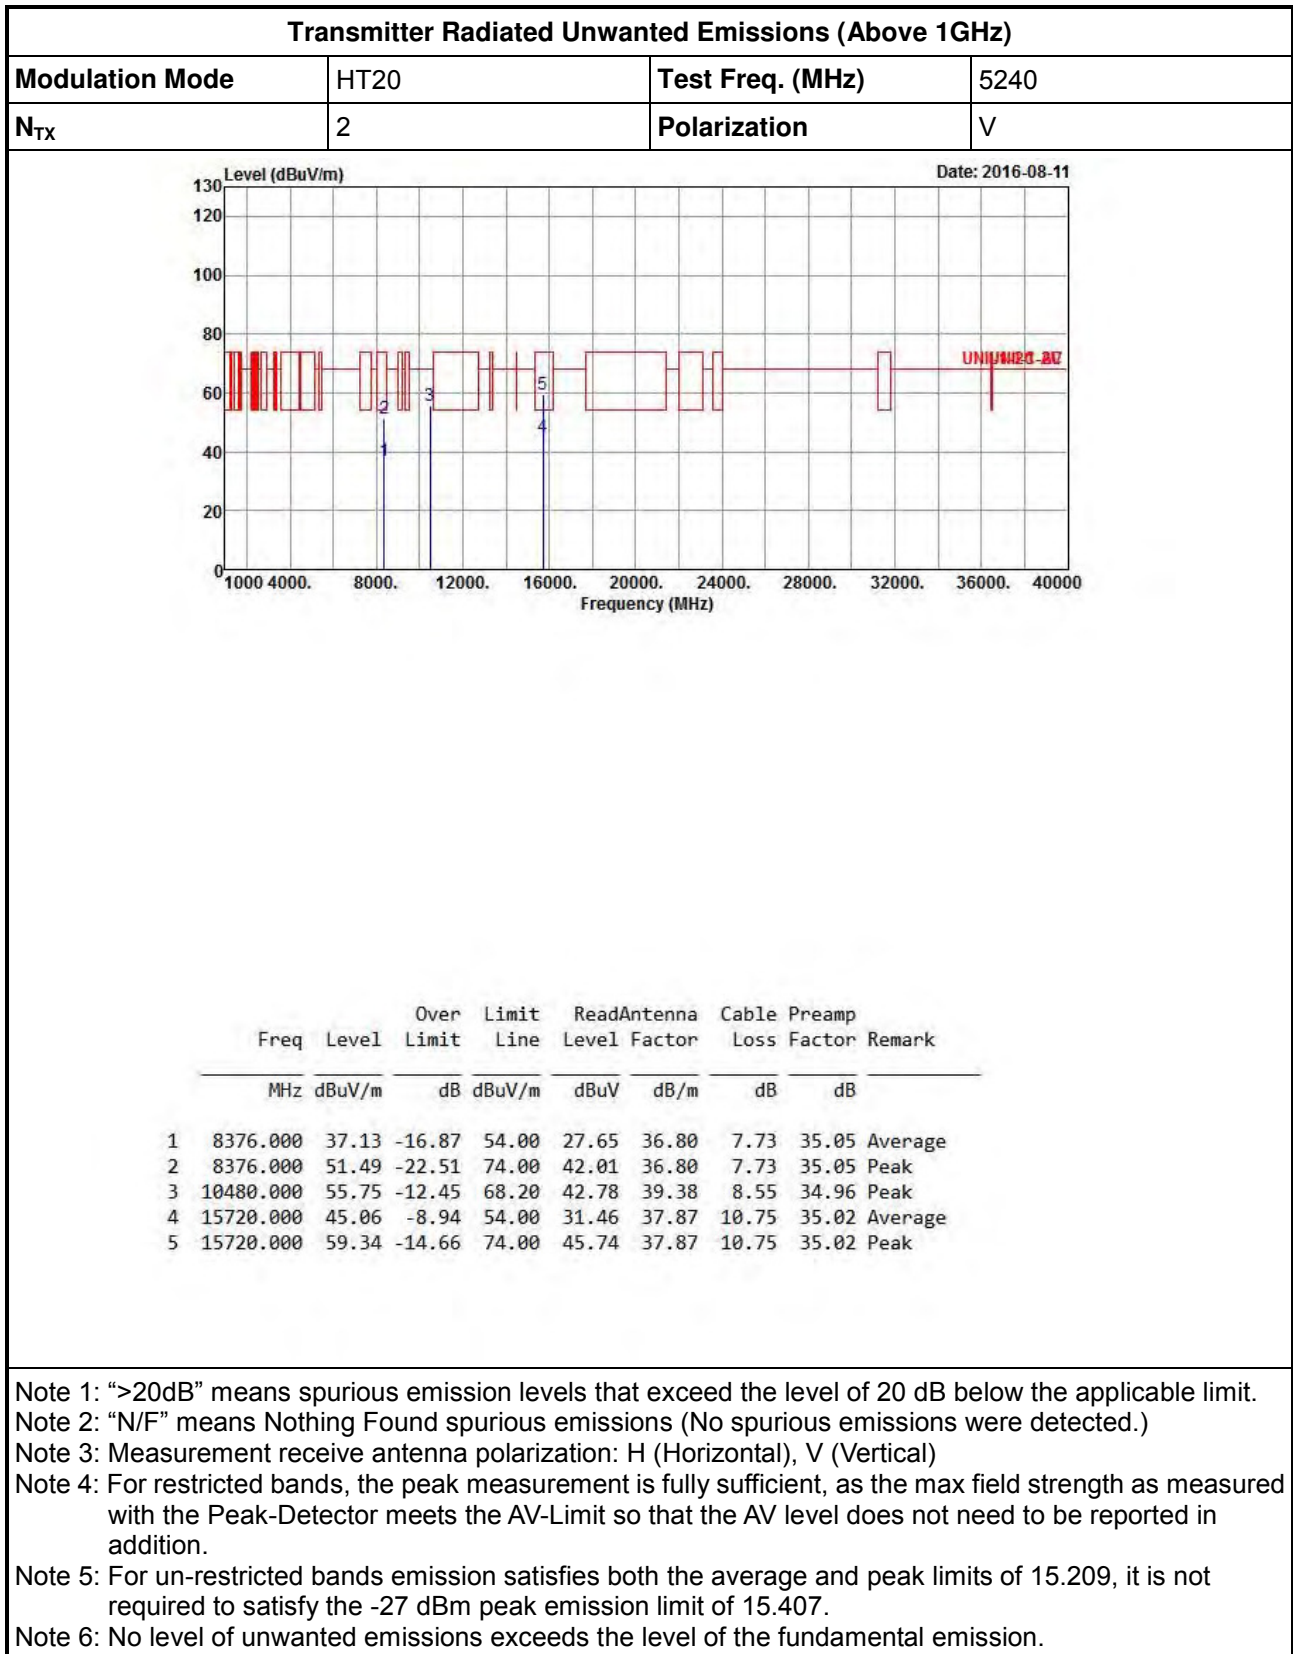

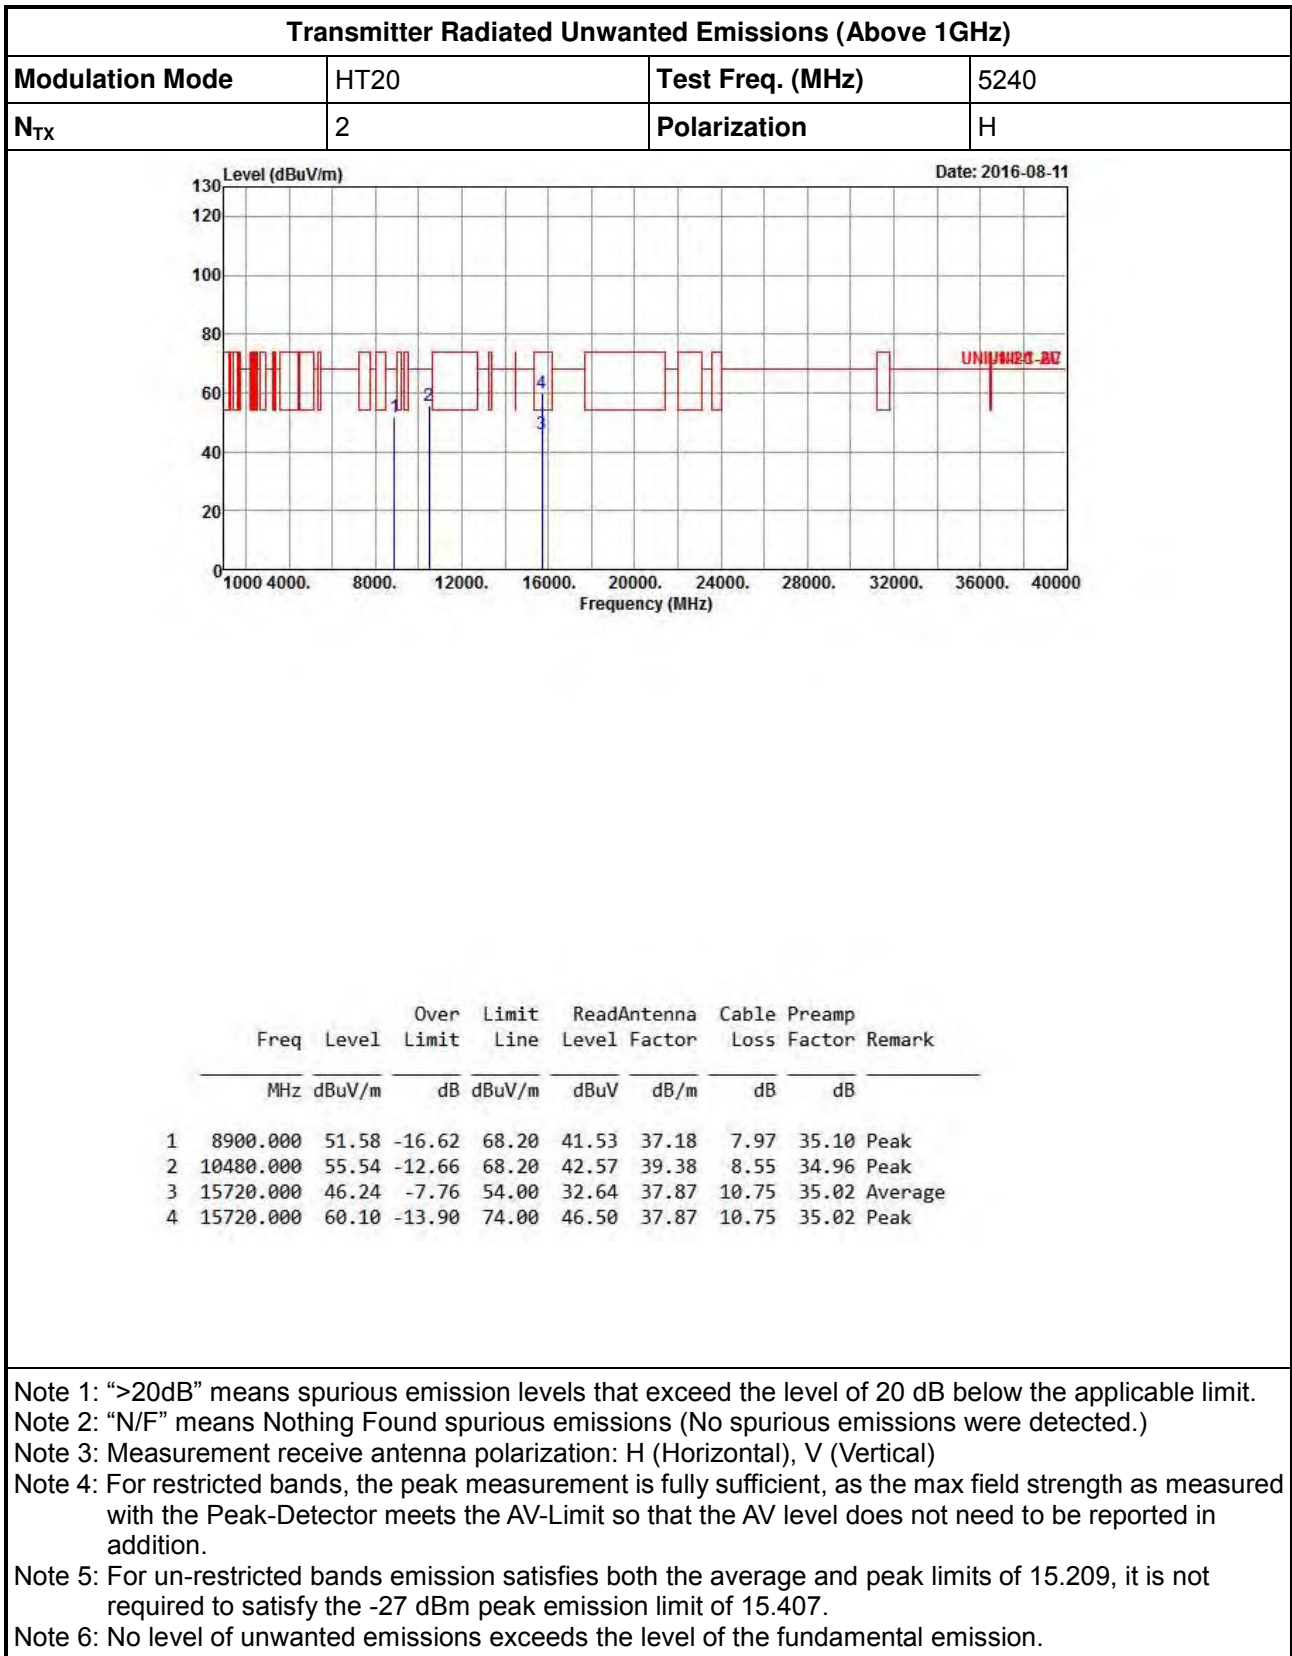


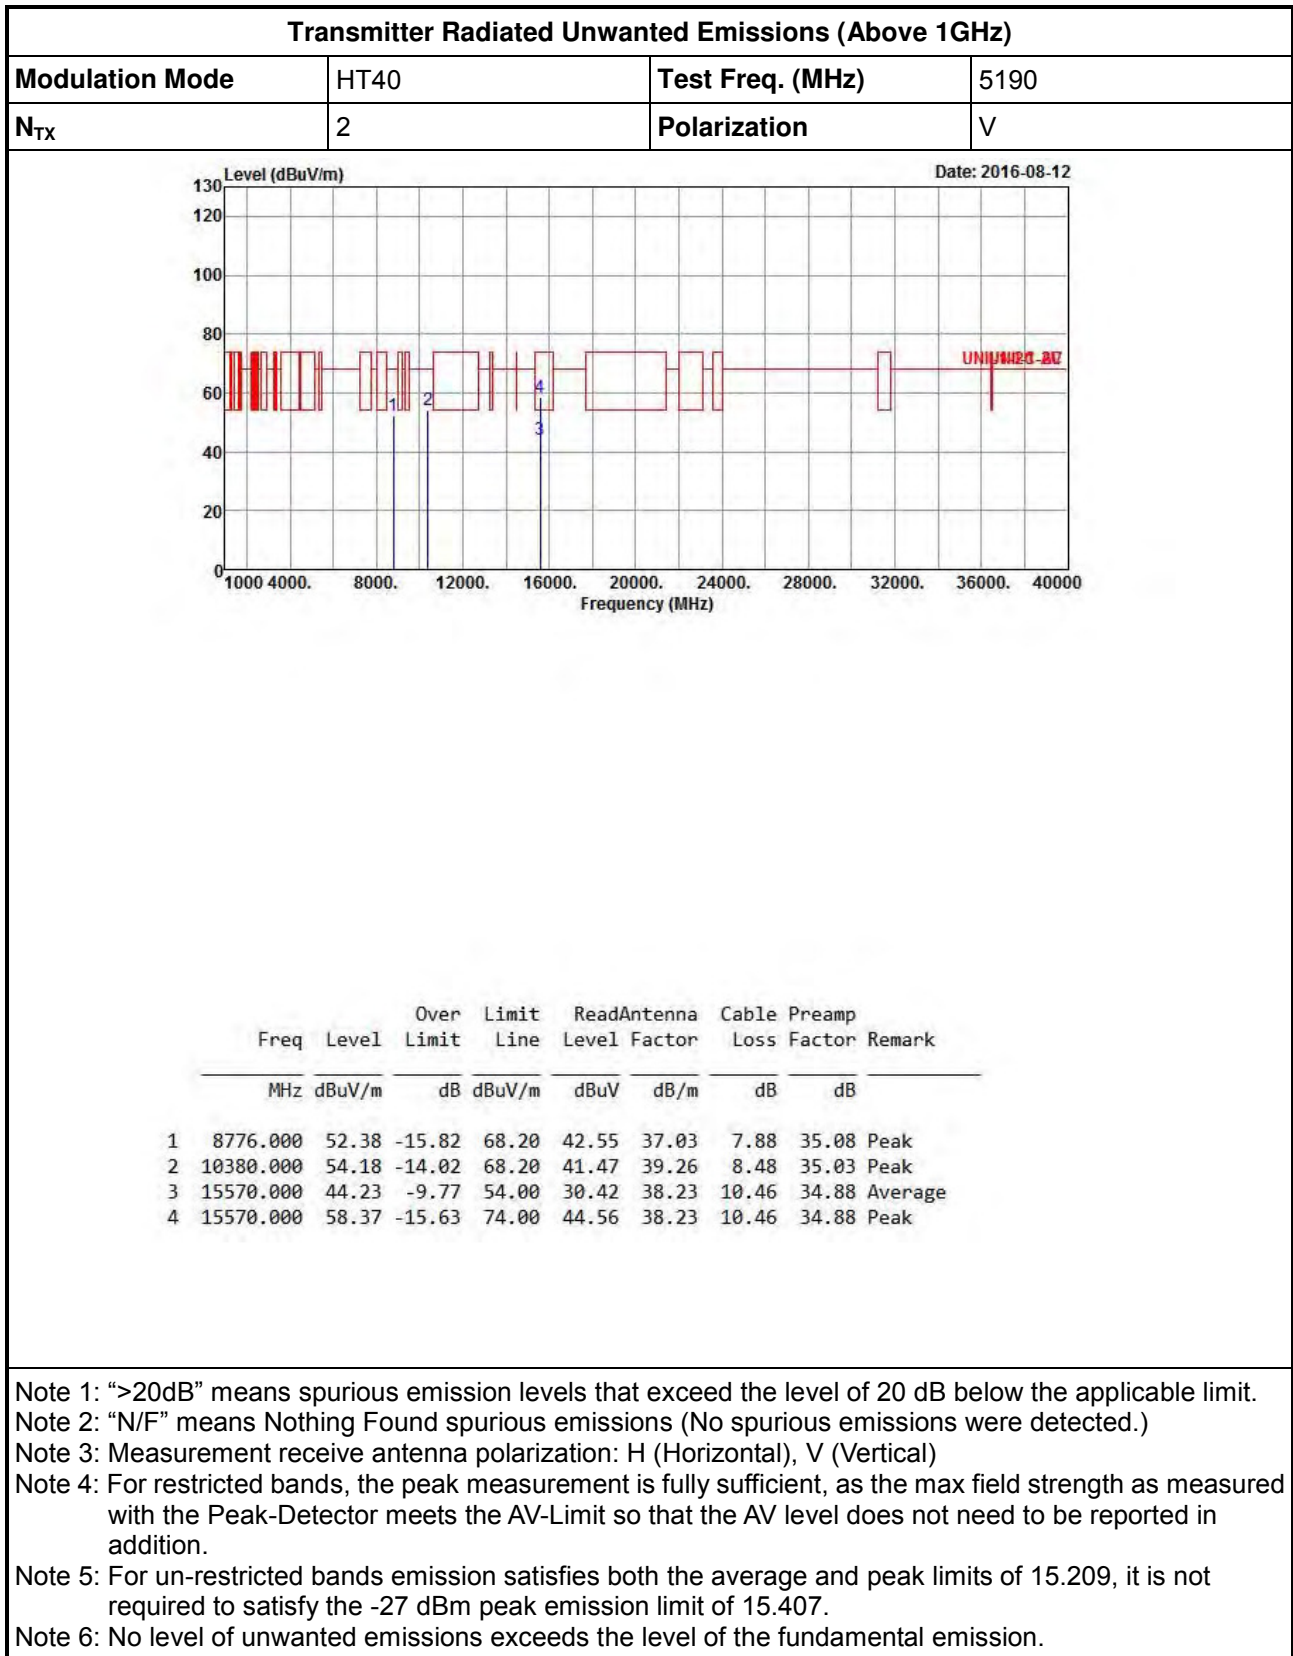


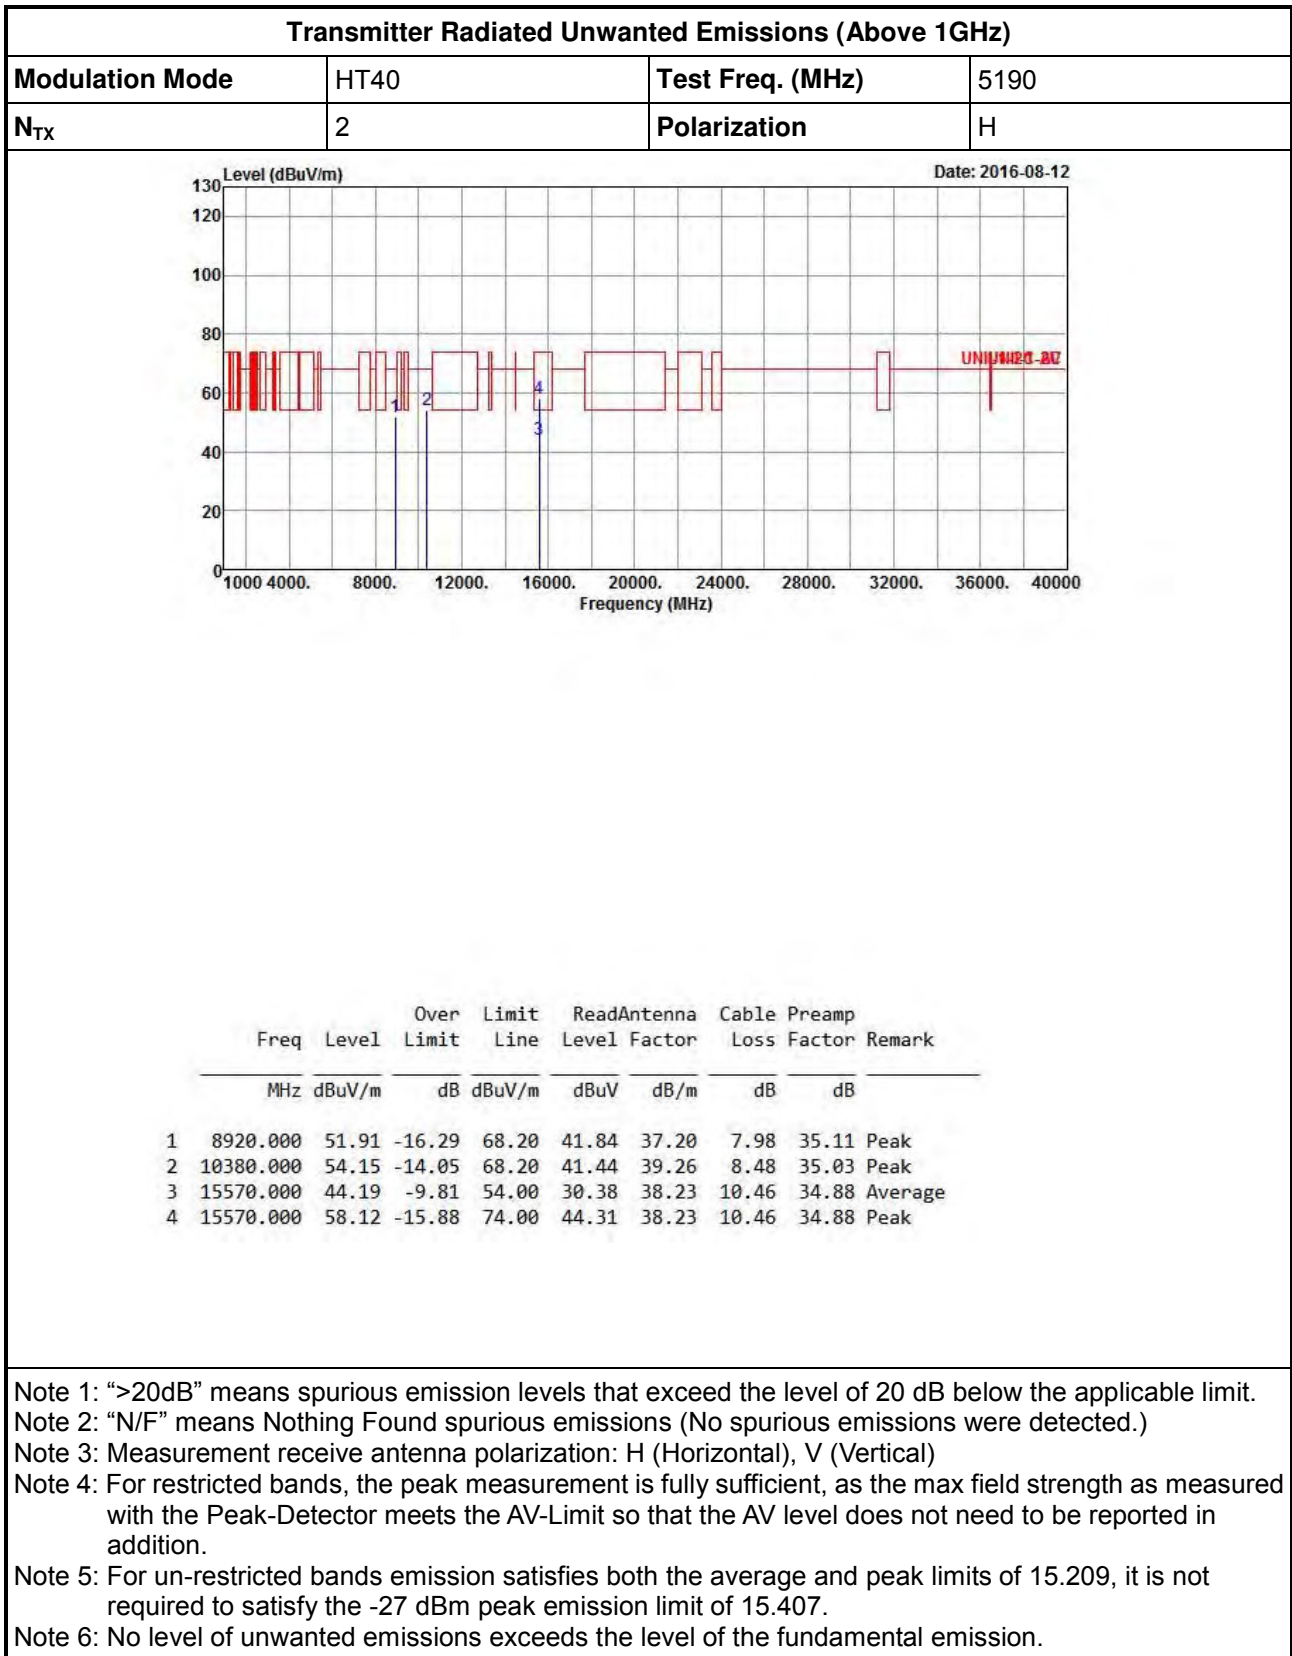


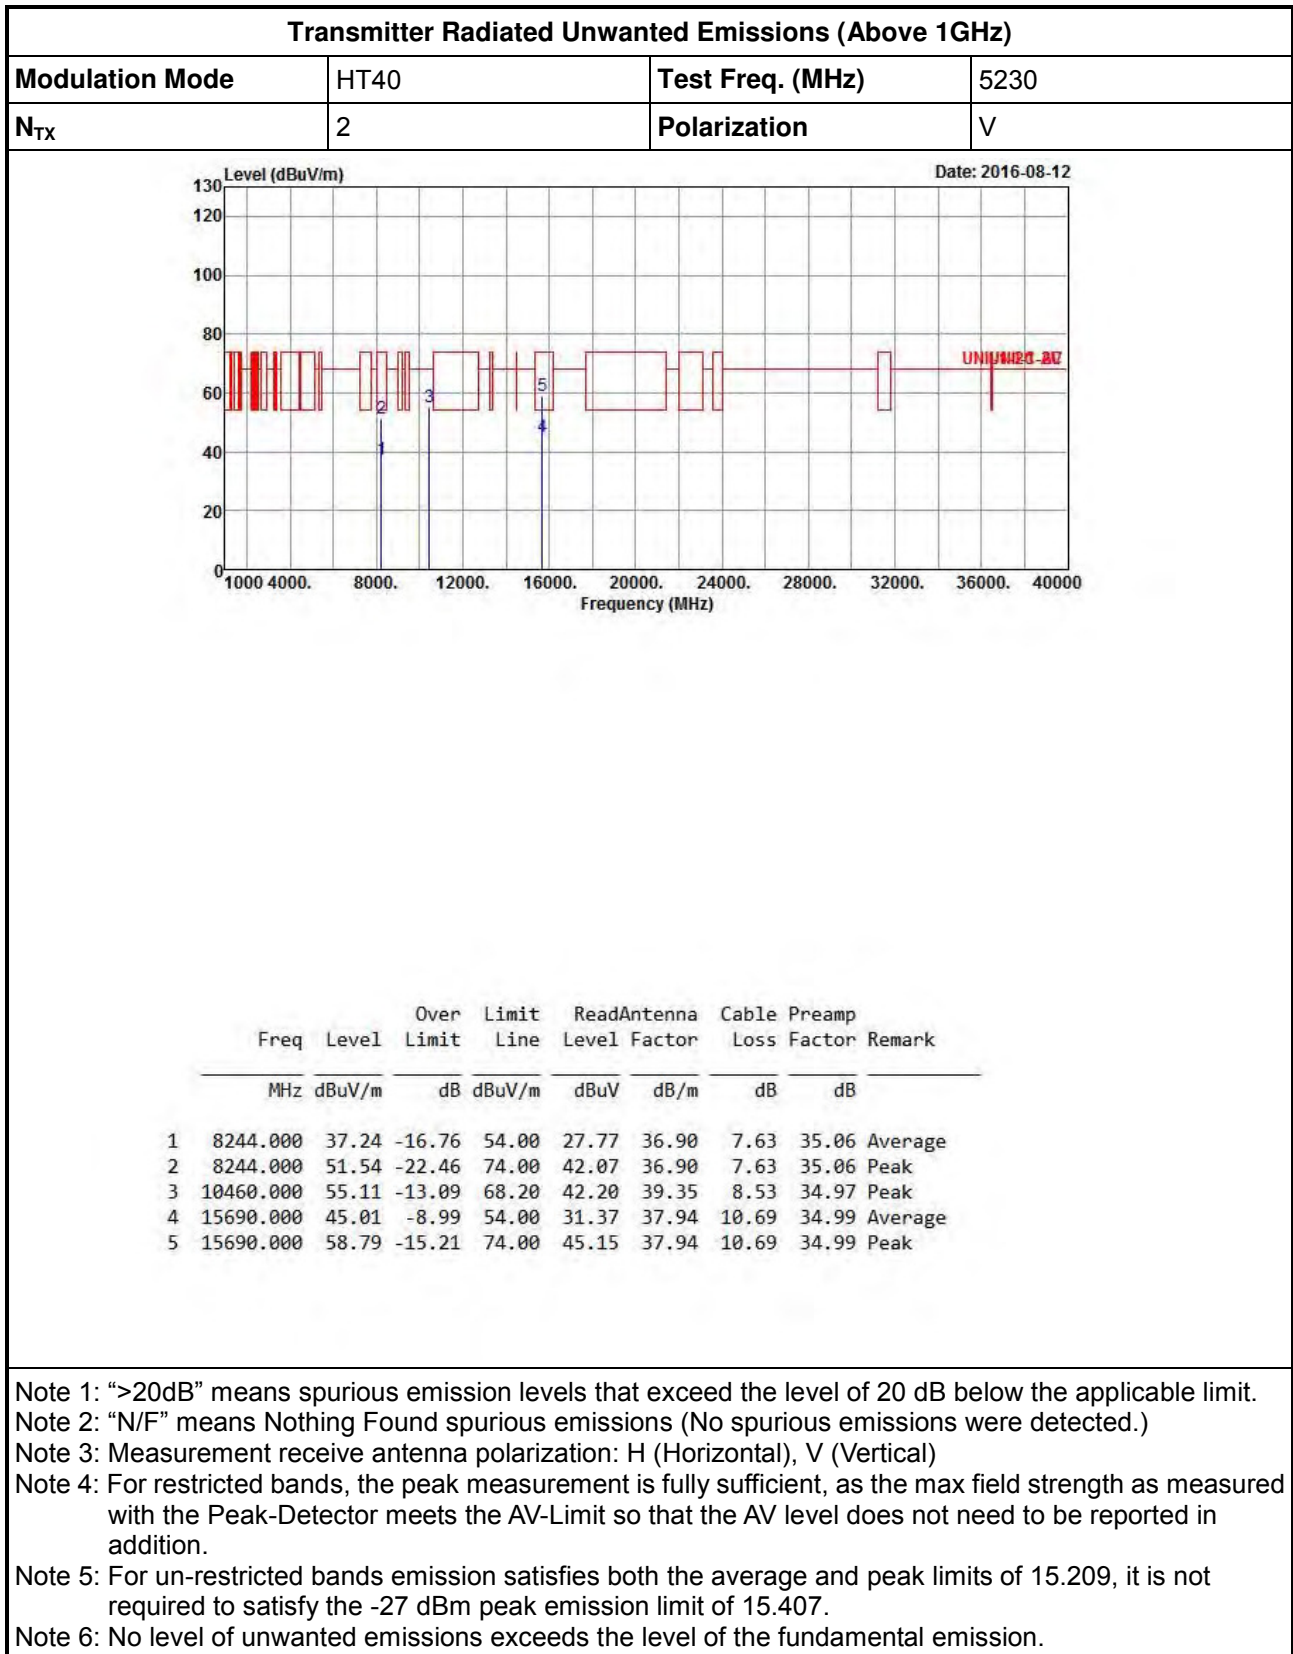



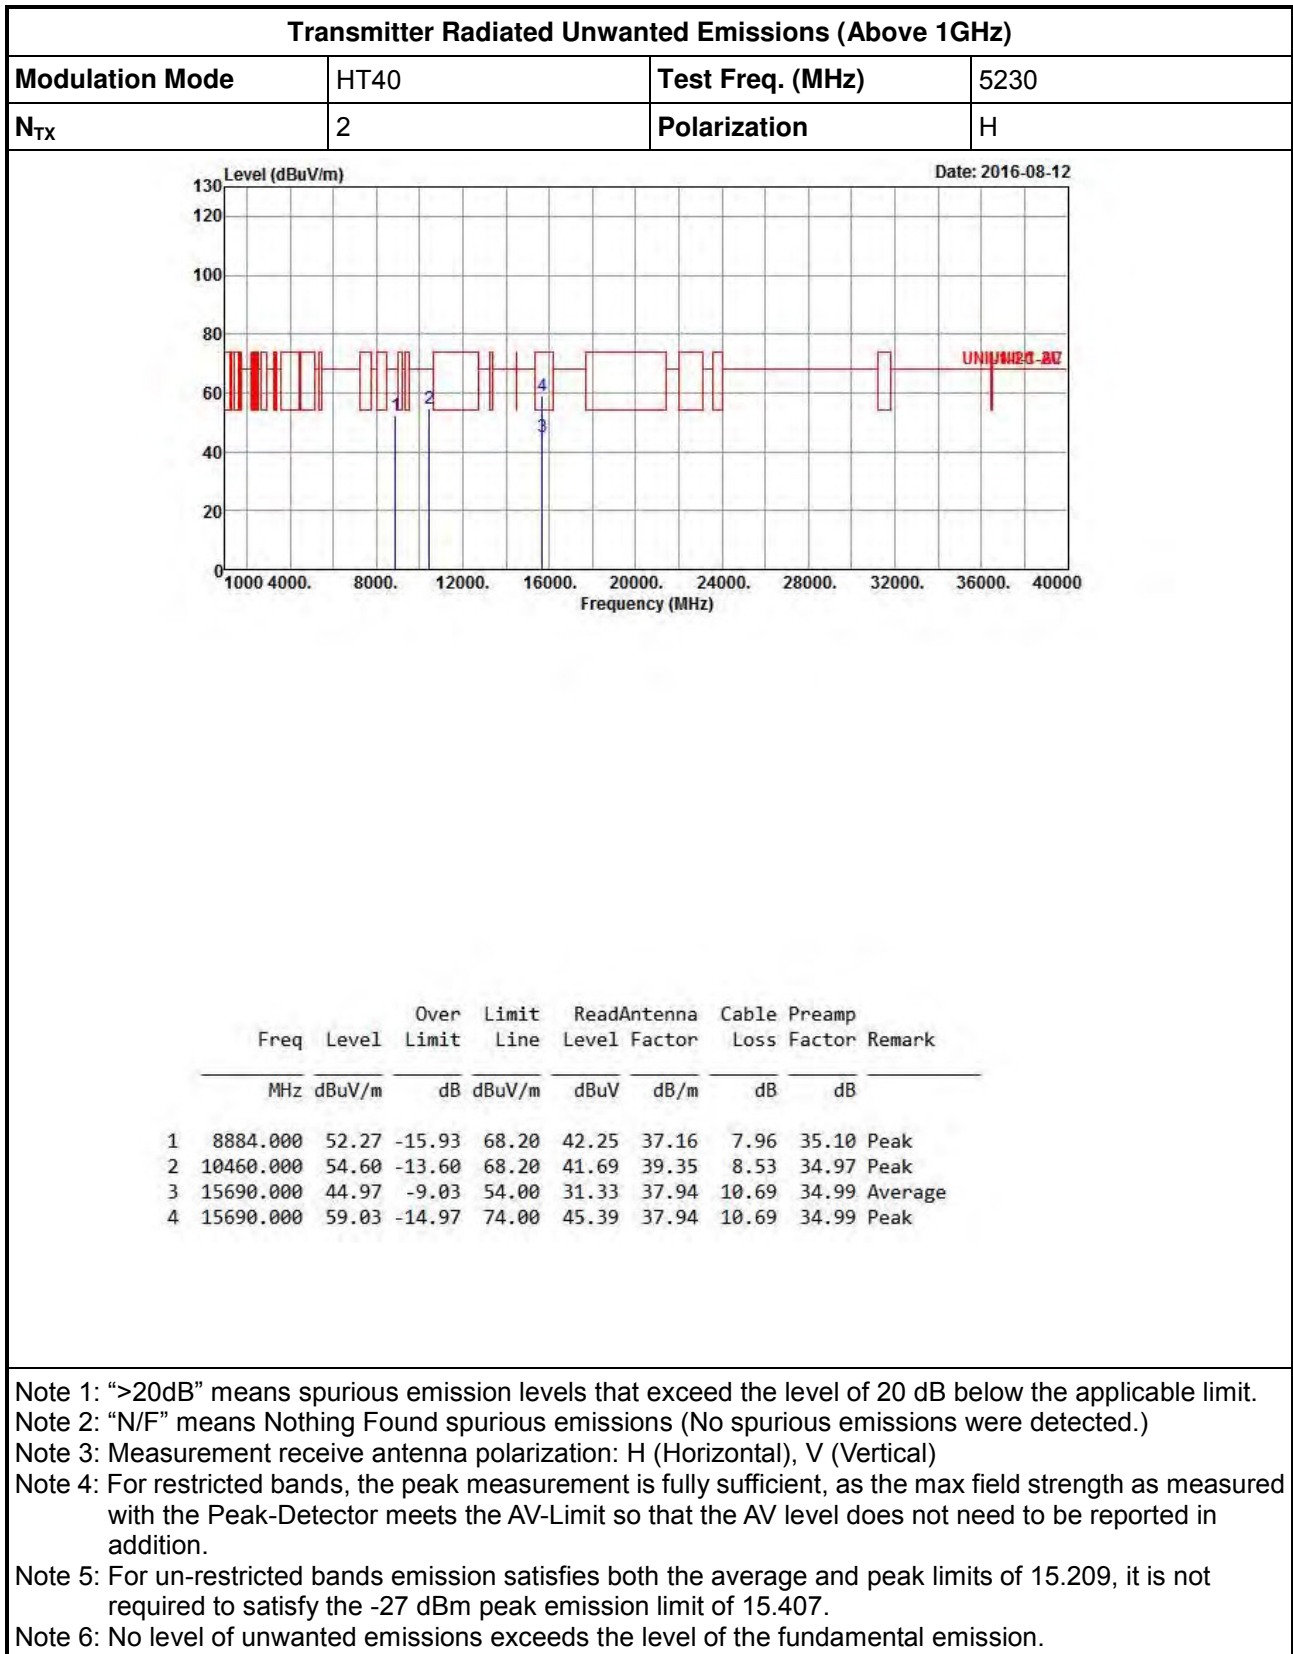

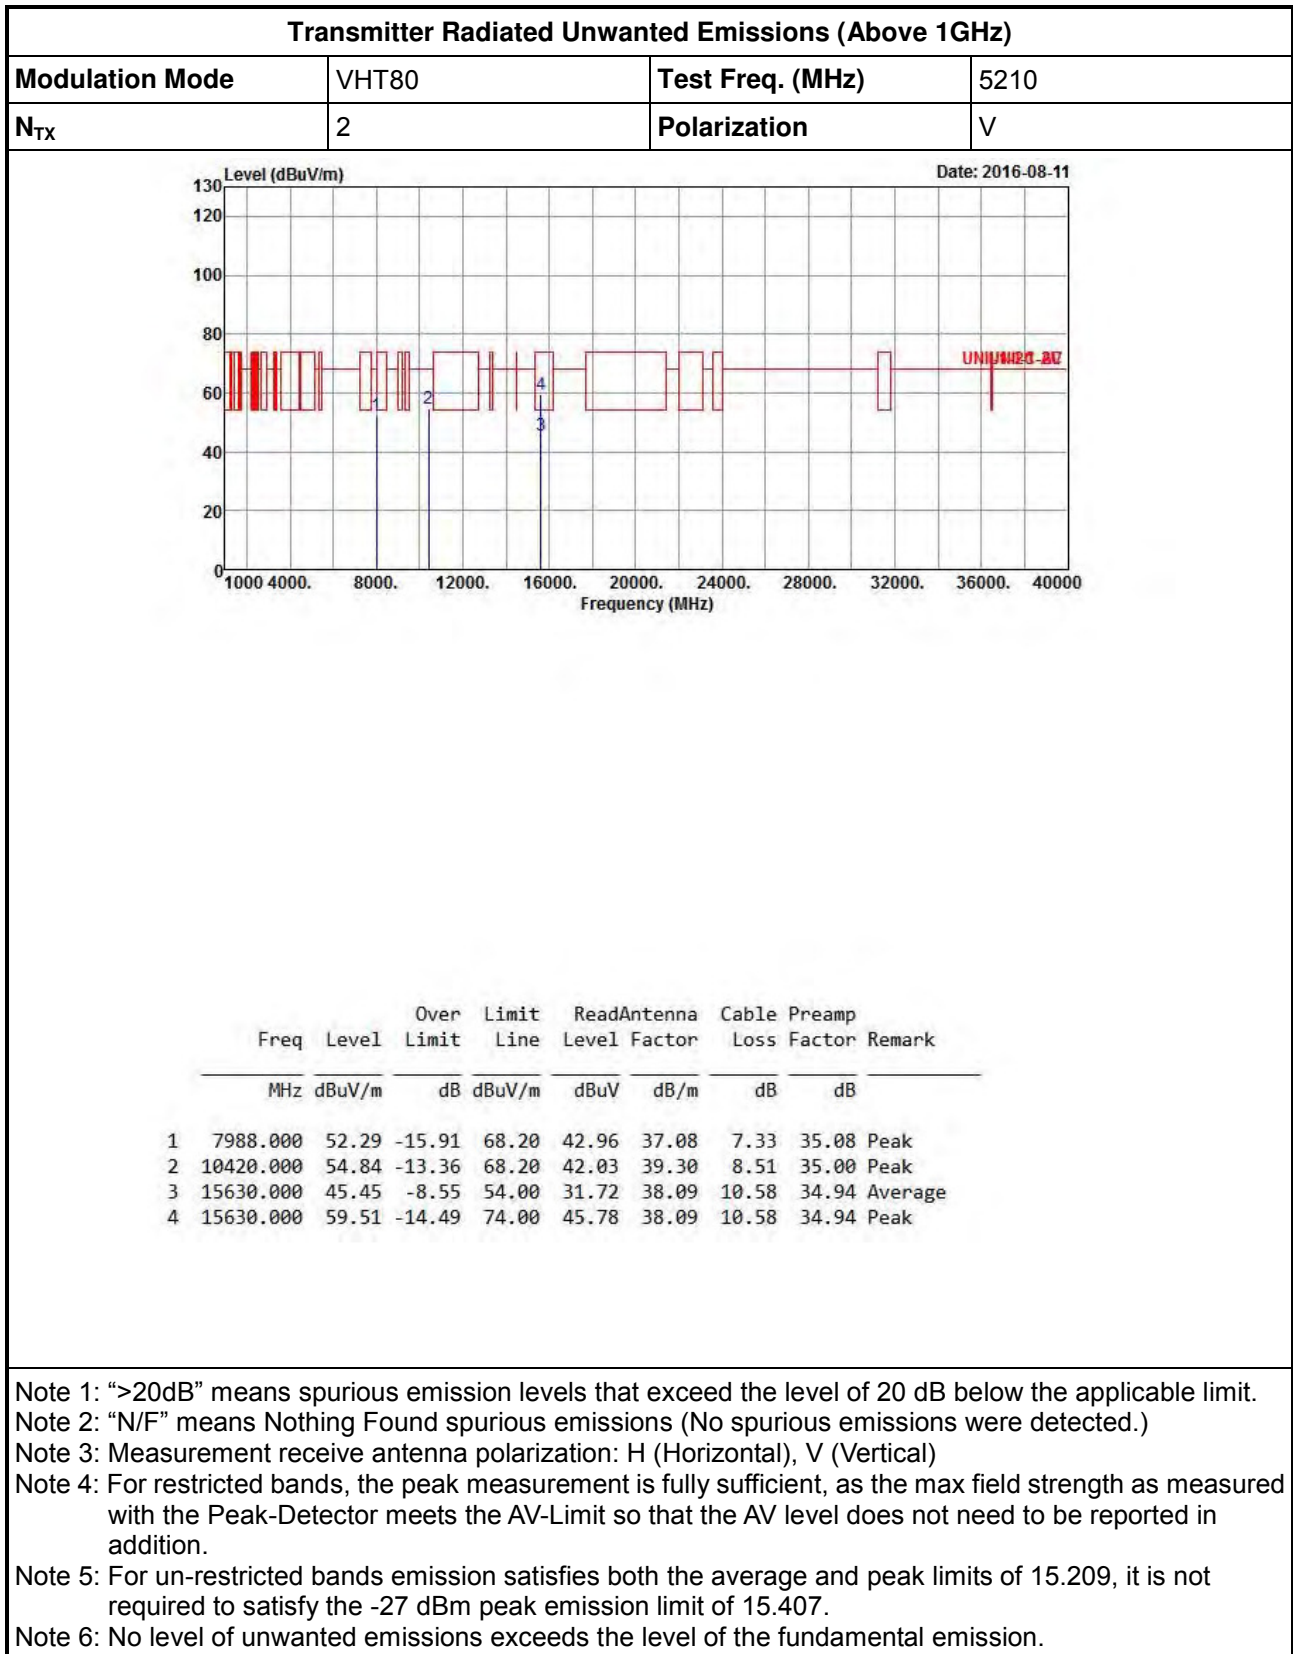


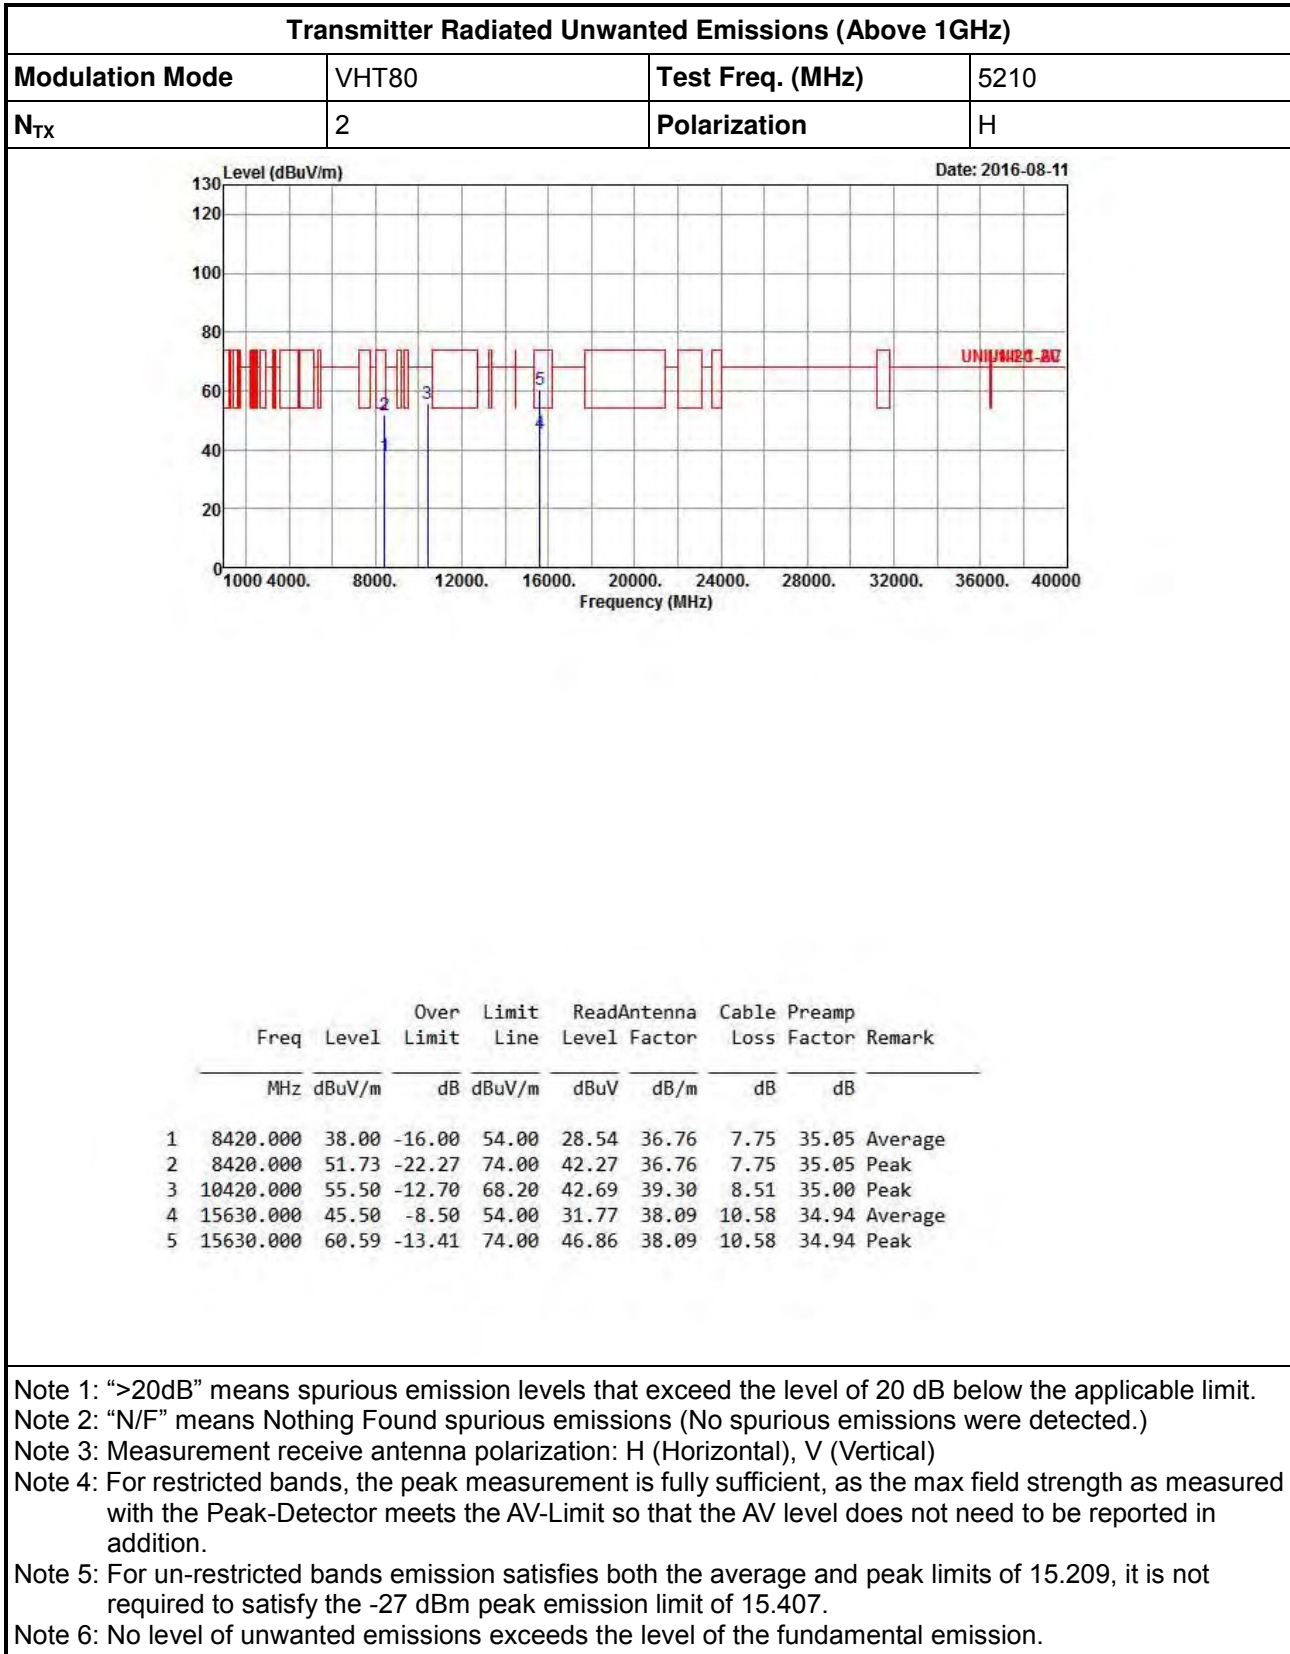




Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5250-5350MHz

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11a	Test Freq. (MHz)	5260
N <sub>TX</sub>	2	Polarization	V

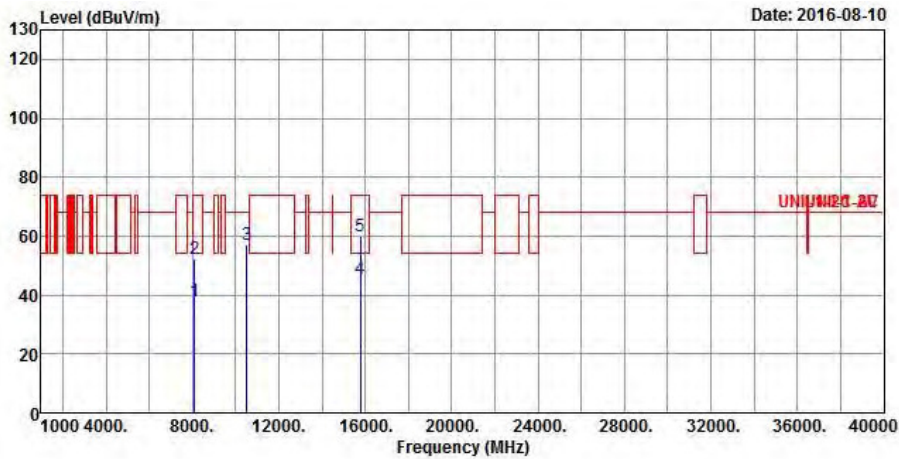



	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8096.000	37.87	-16.13	54.00	28.46	37.02	7.46	35.07 Average
2	8096.000	52.35	-21.65	74.00	42.94	37.02	7.46	35.07 Peak
3	10520.000	57.02	-11.18	68.20	43.94	39.43	8.57	34.92 Peak
4	15780.000	45.70	-8.30	54.00	32.19	37.73	10.86	35.08 Average
5	15780.000	59.74	-14.26	74.00	46.23	37.73	10.86	35.08 Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

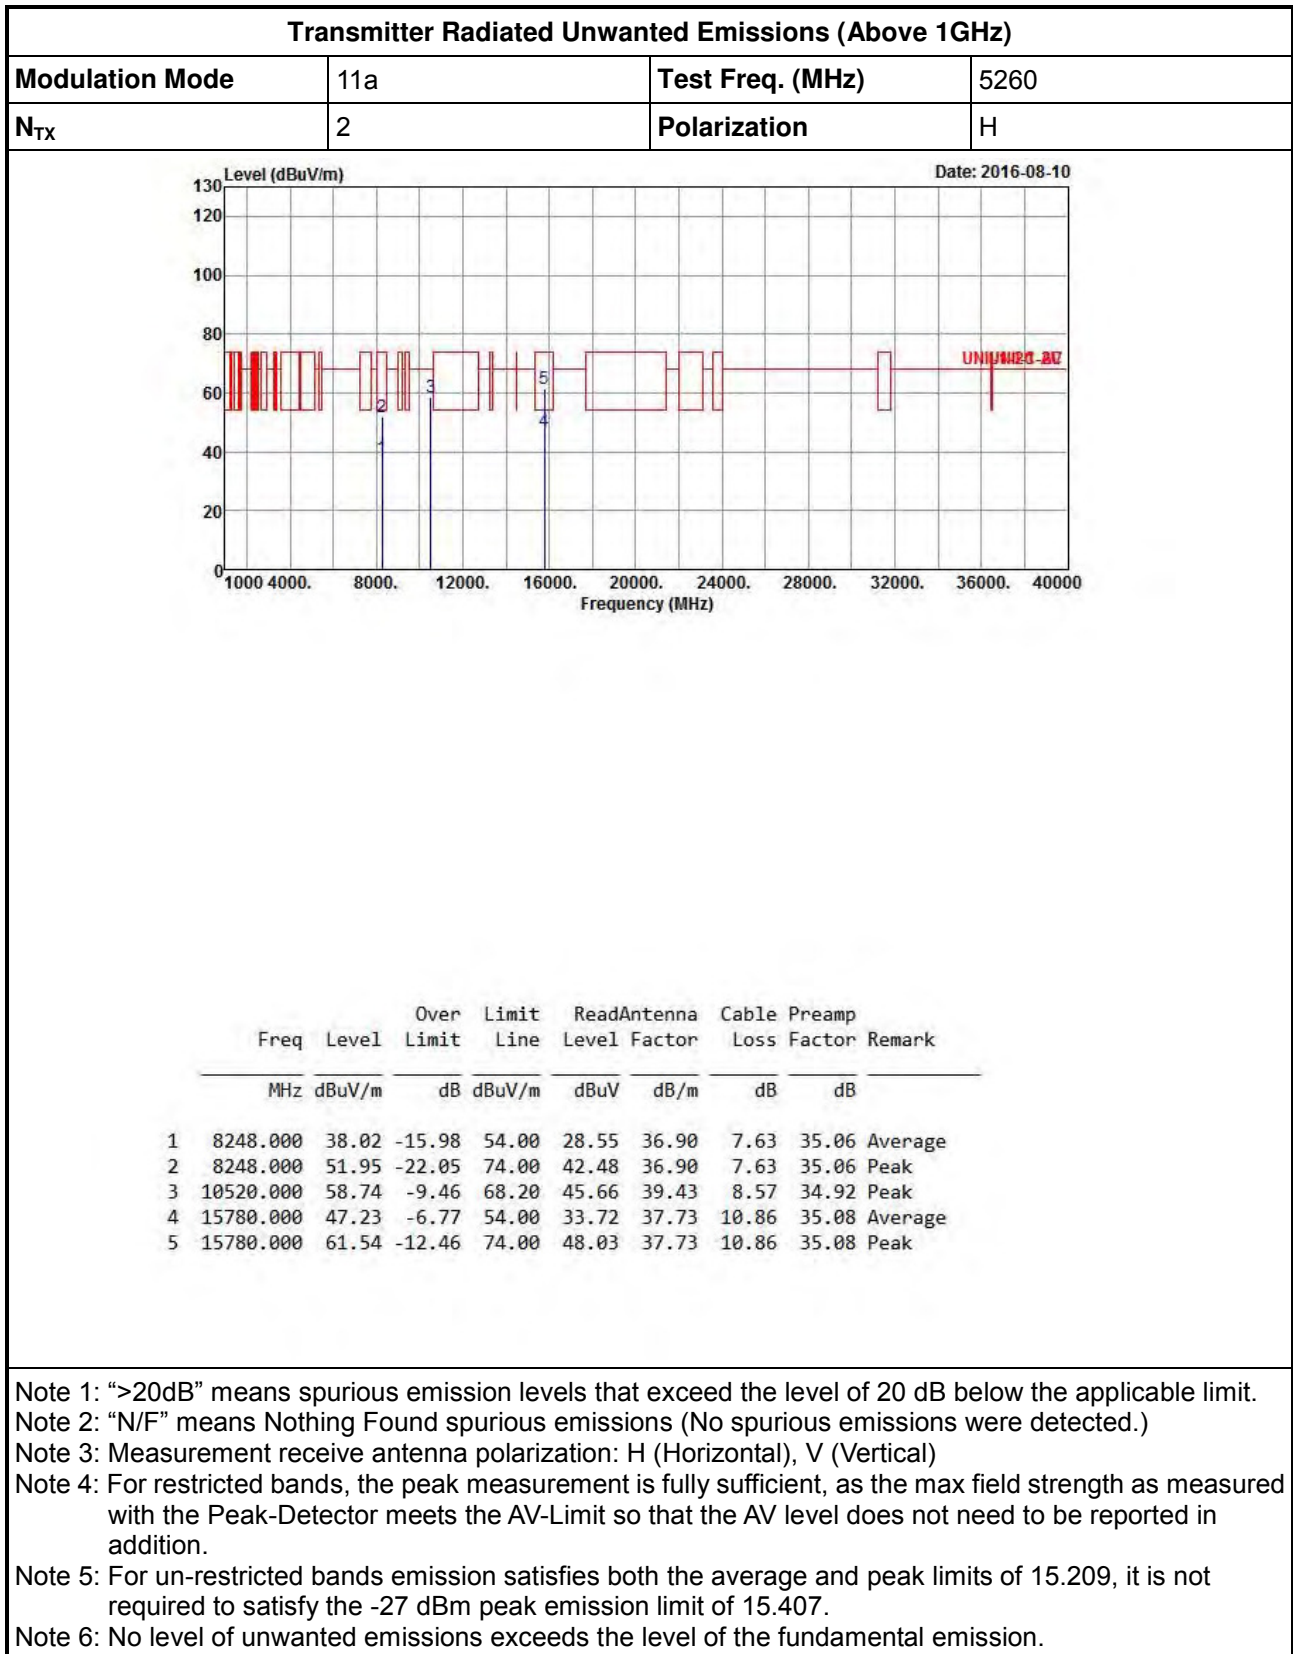





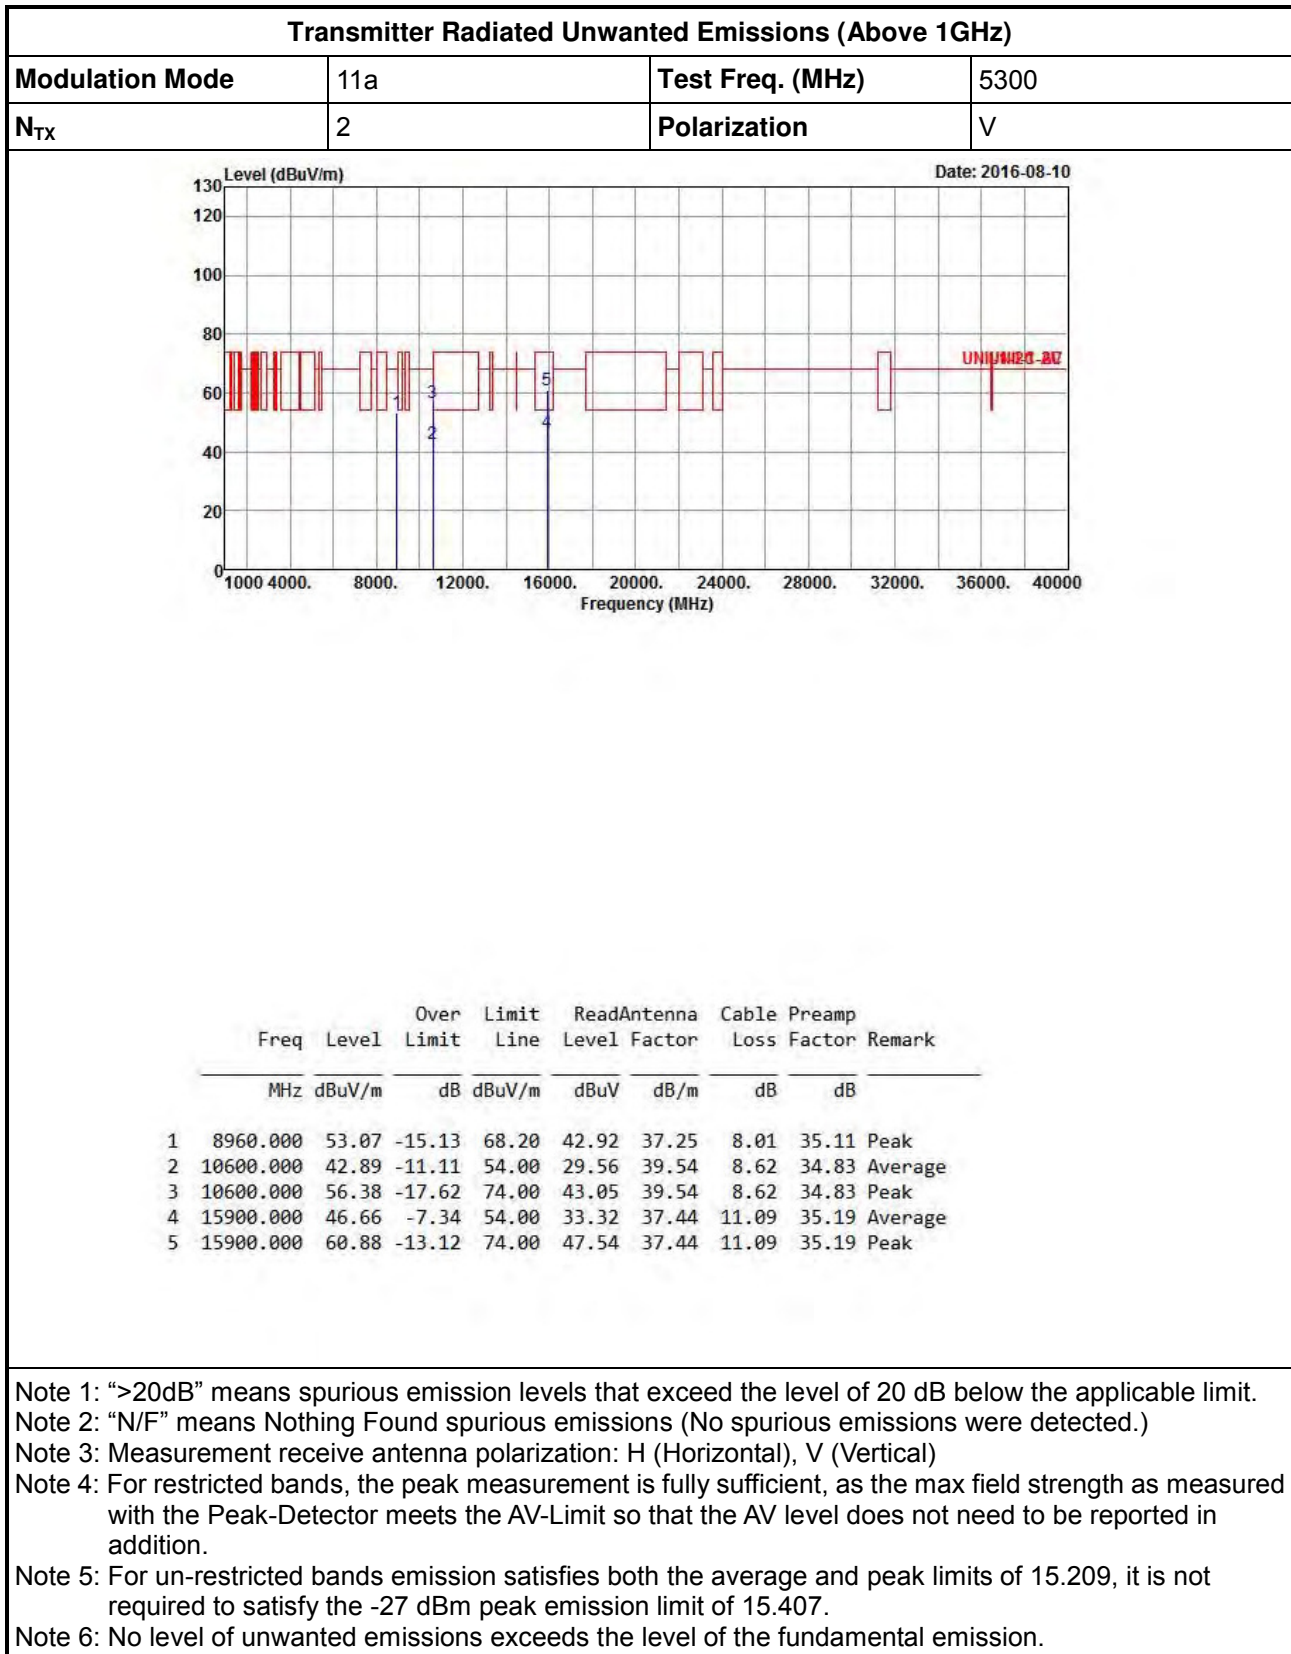

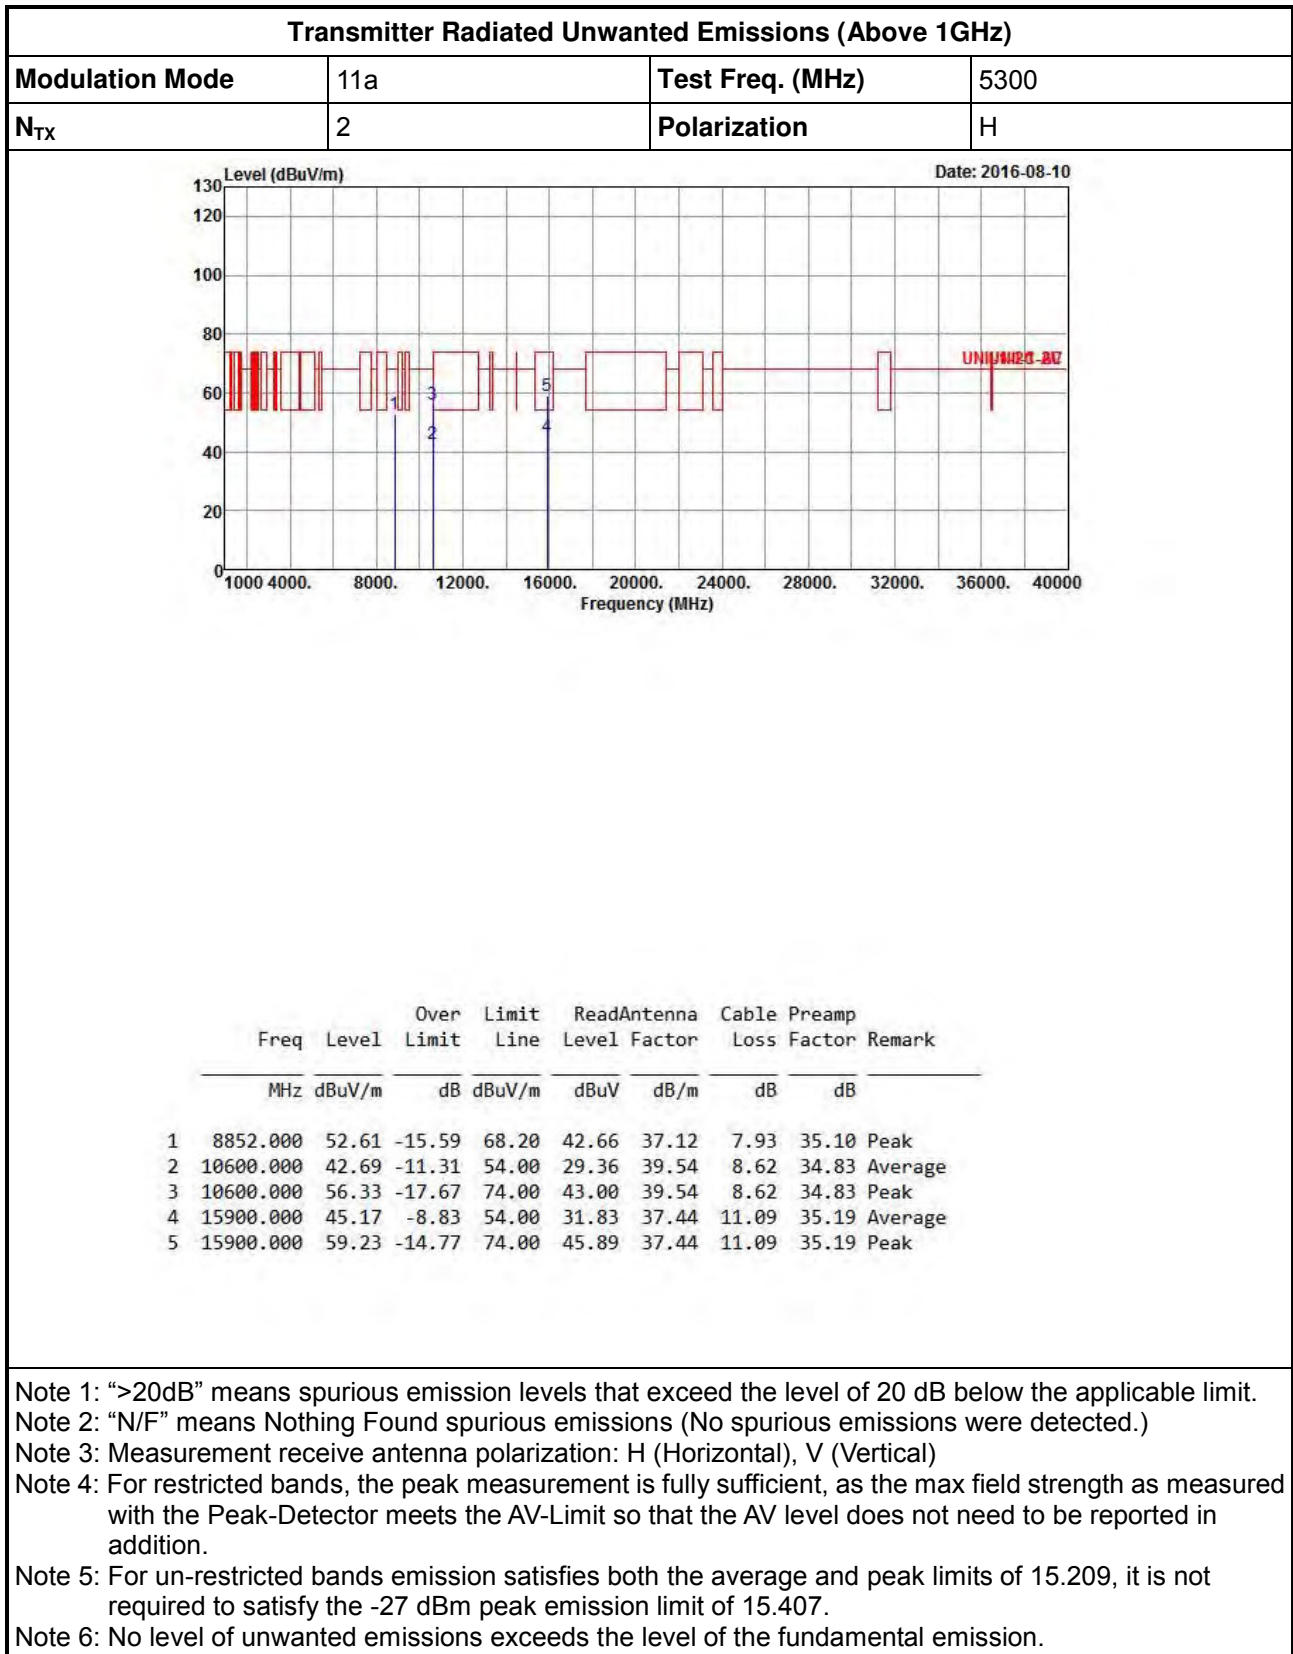


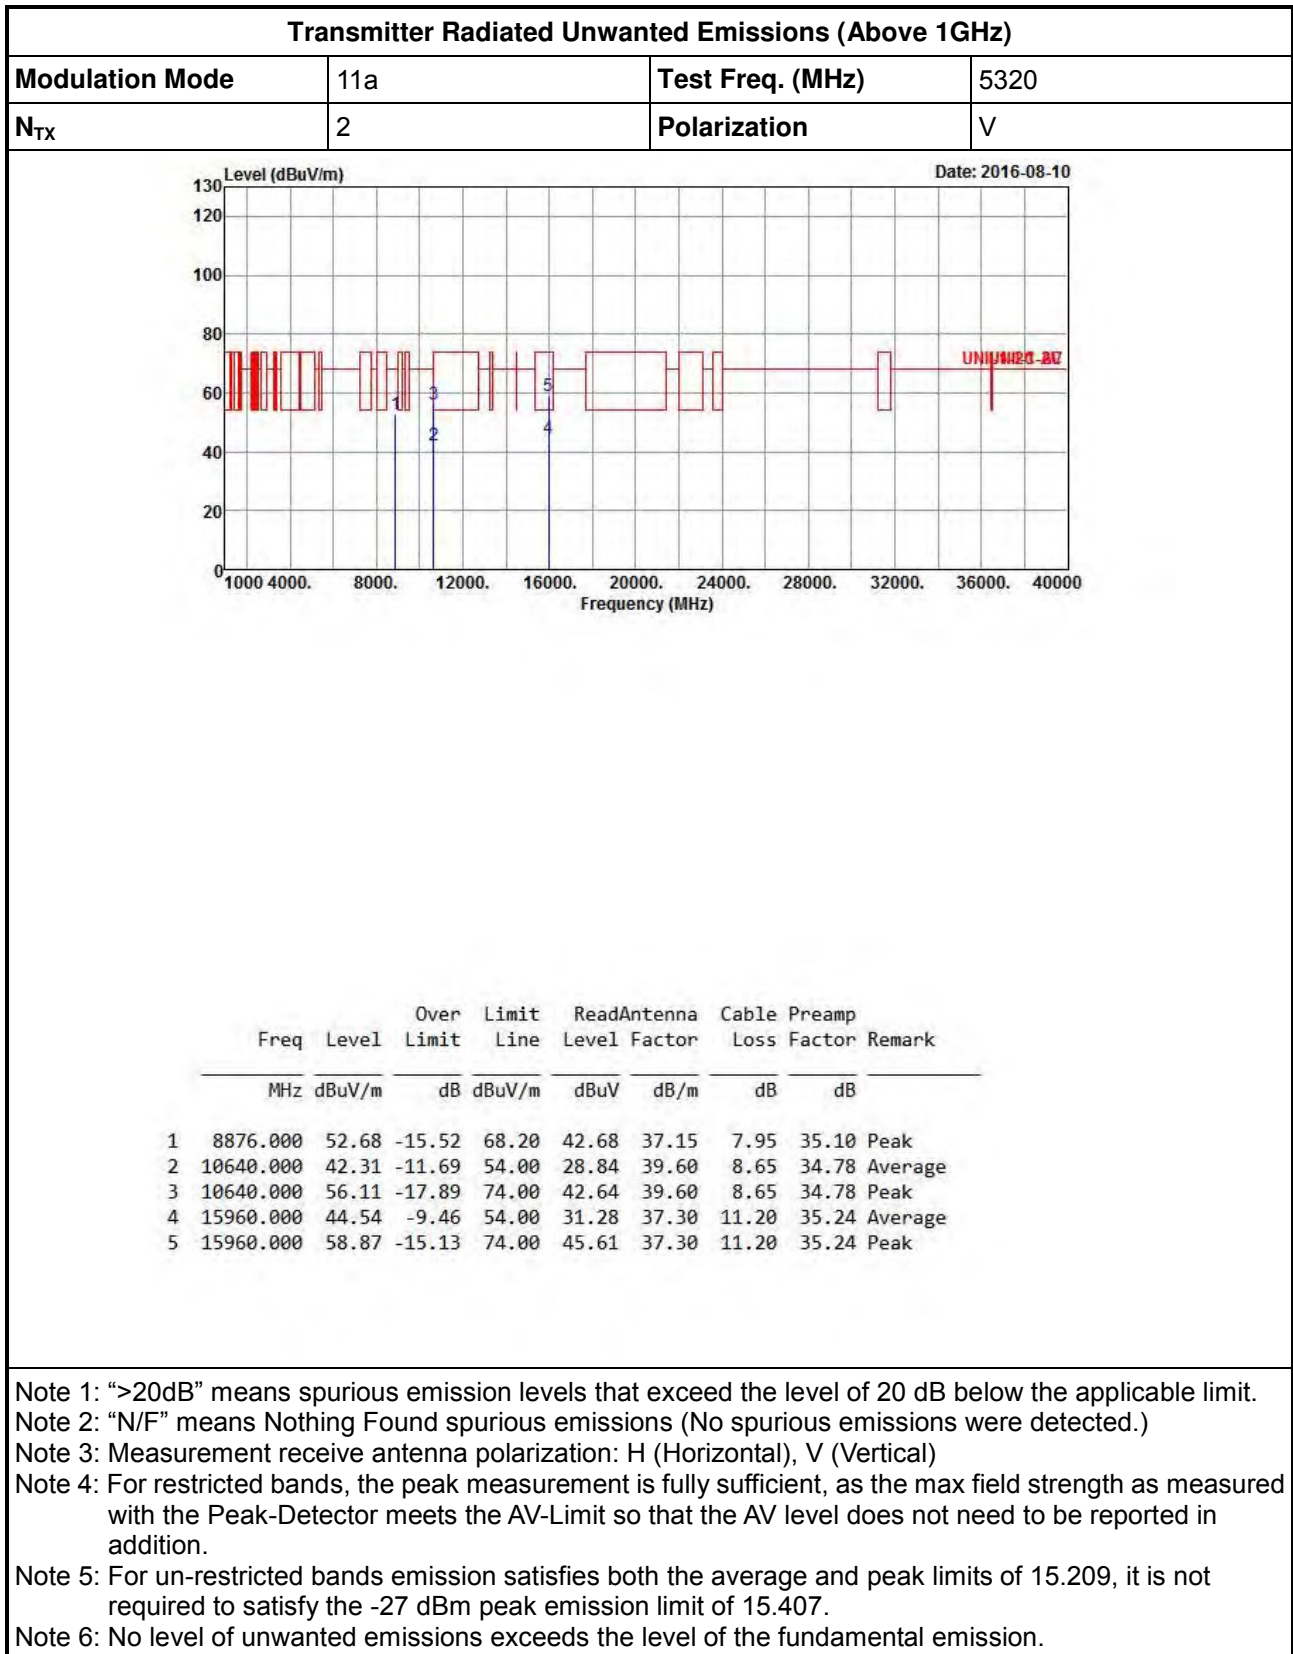


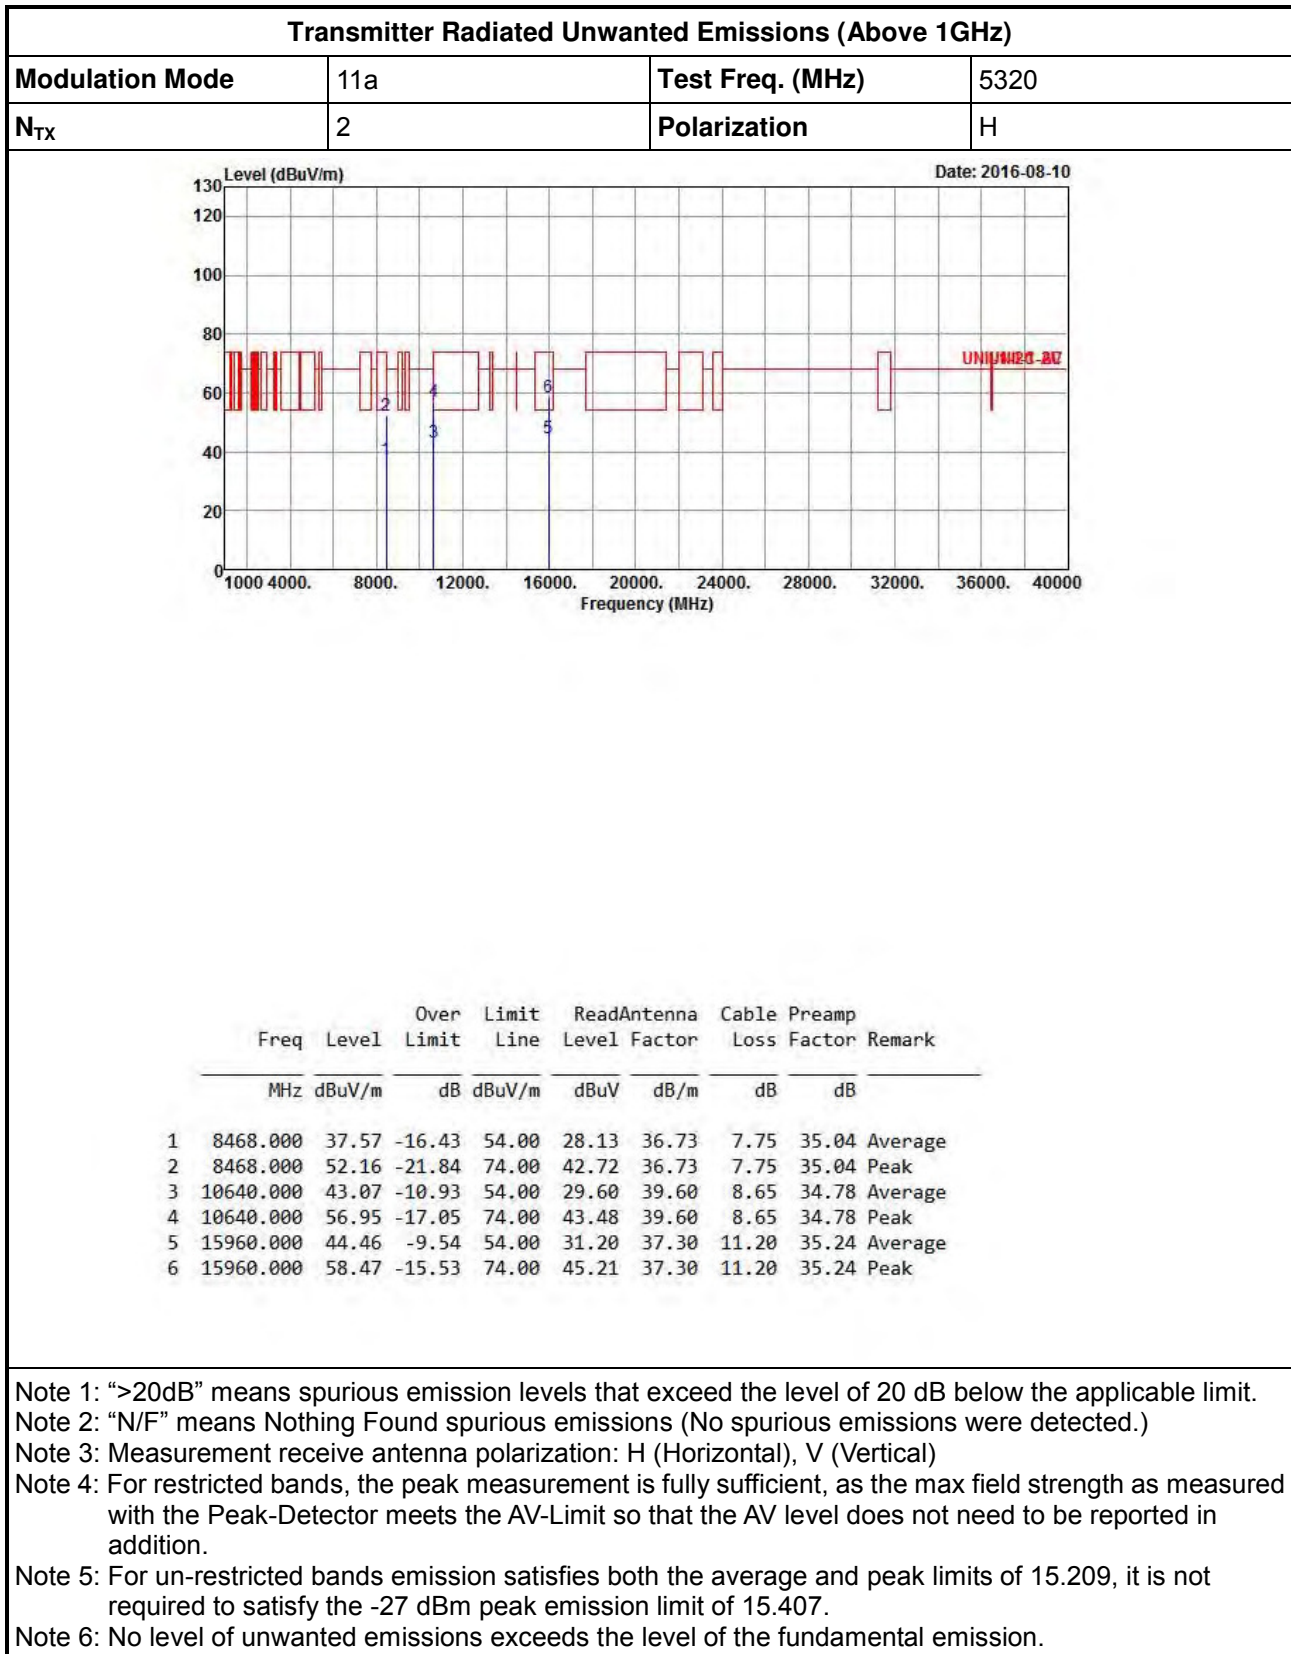


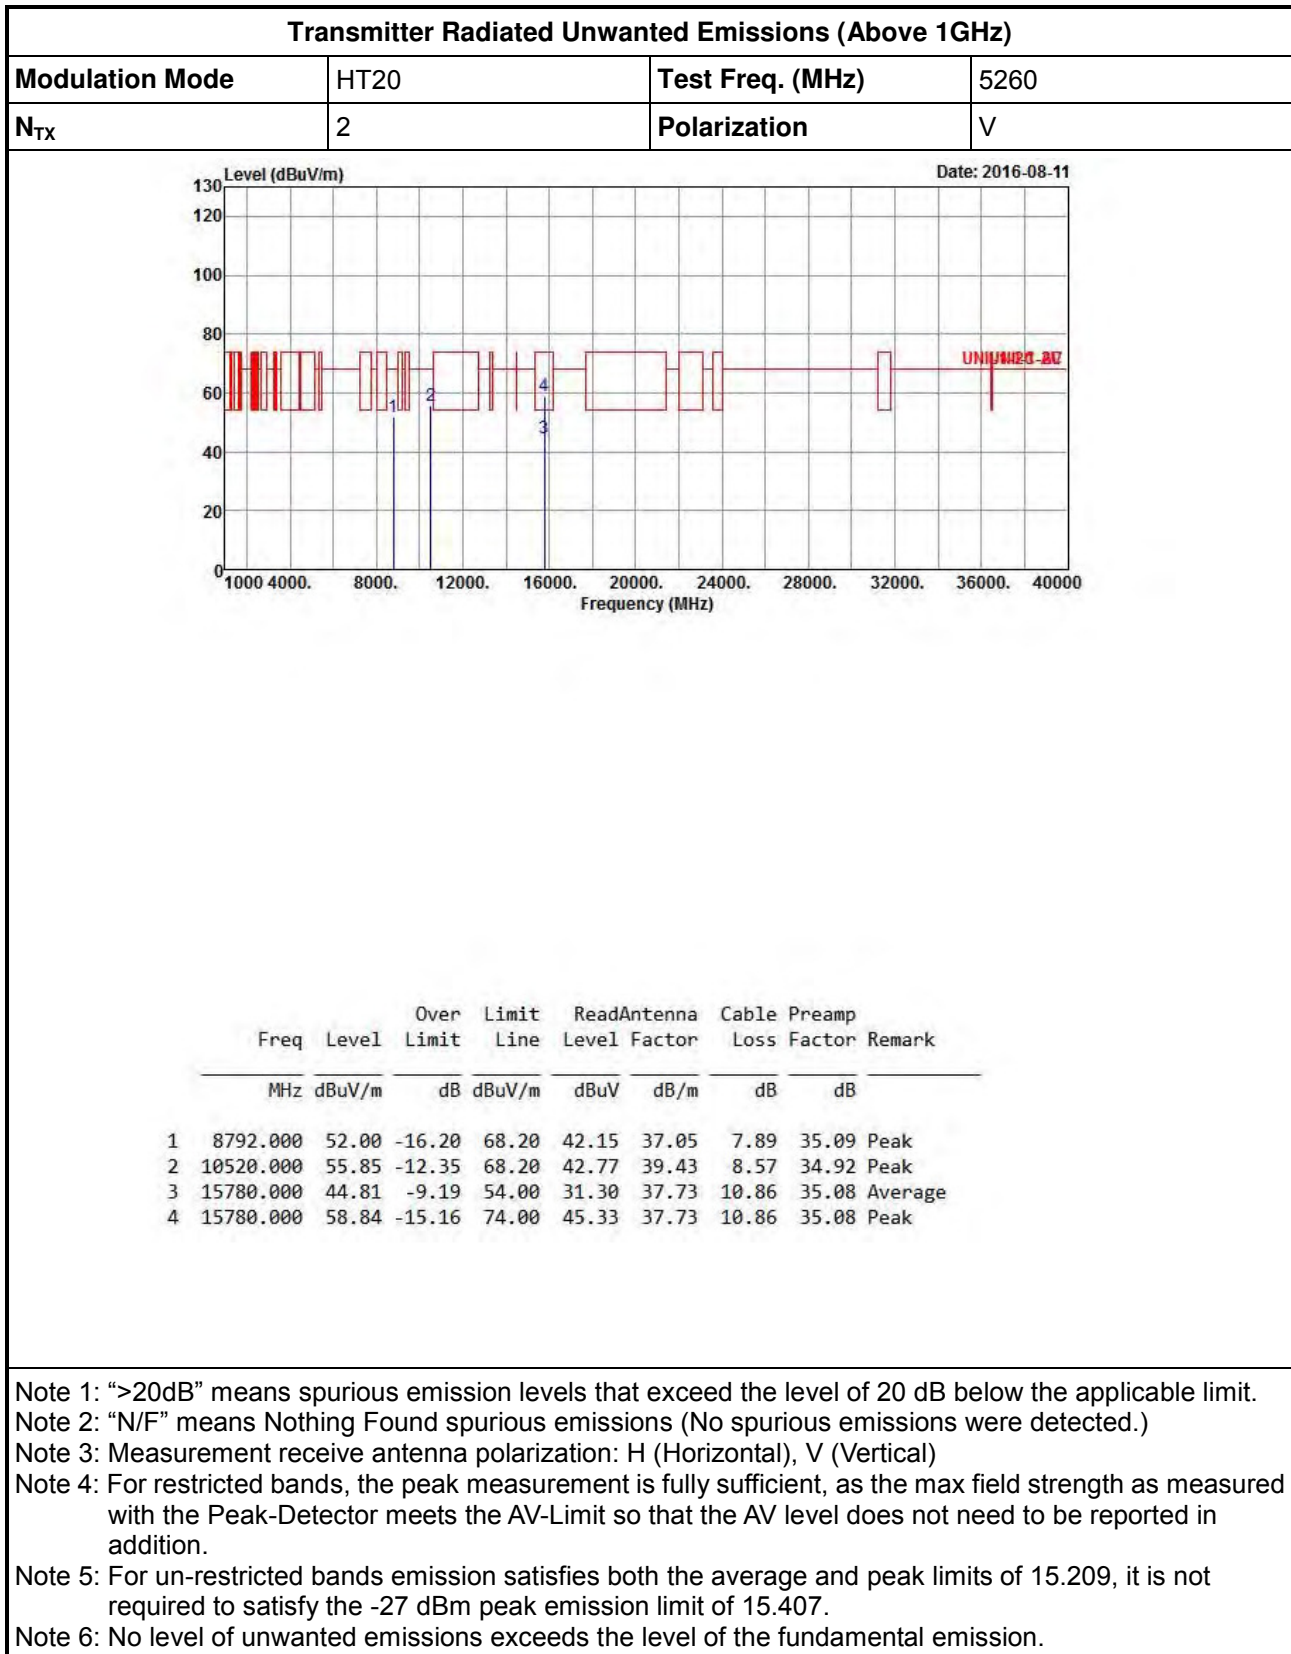





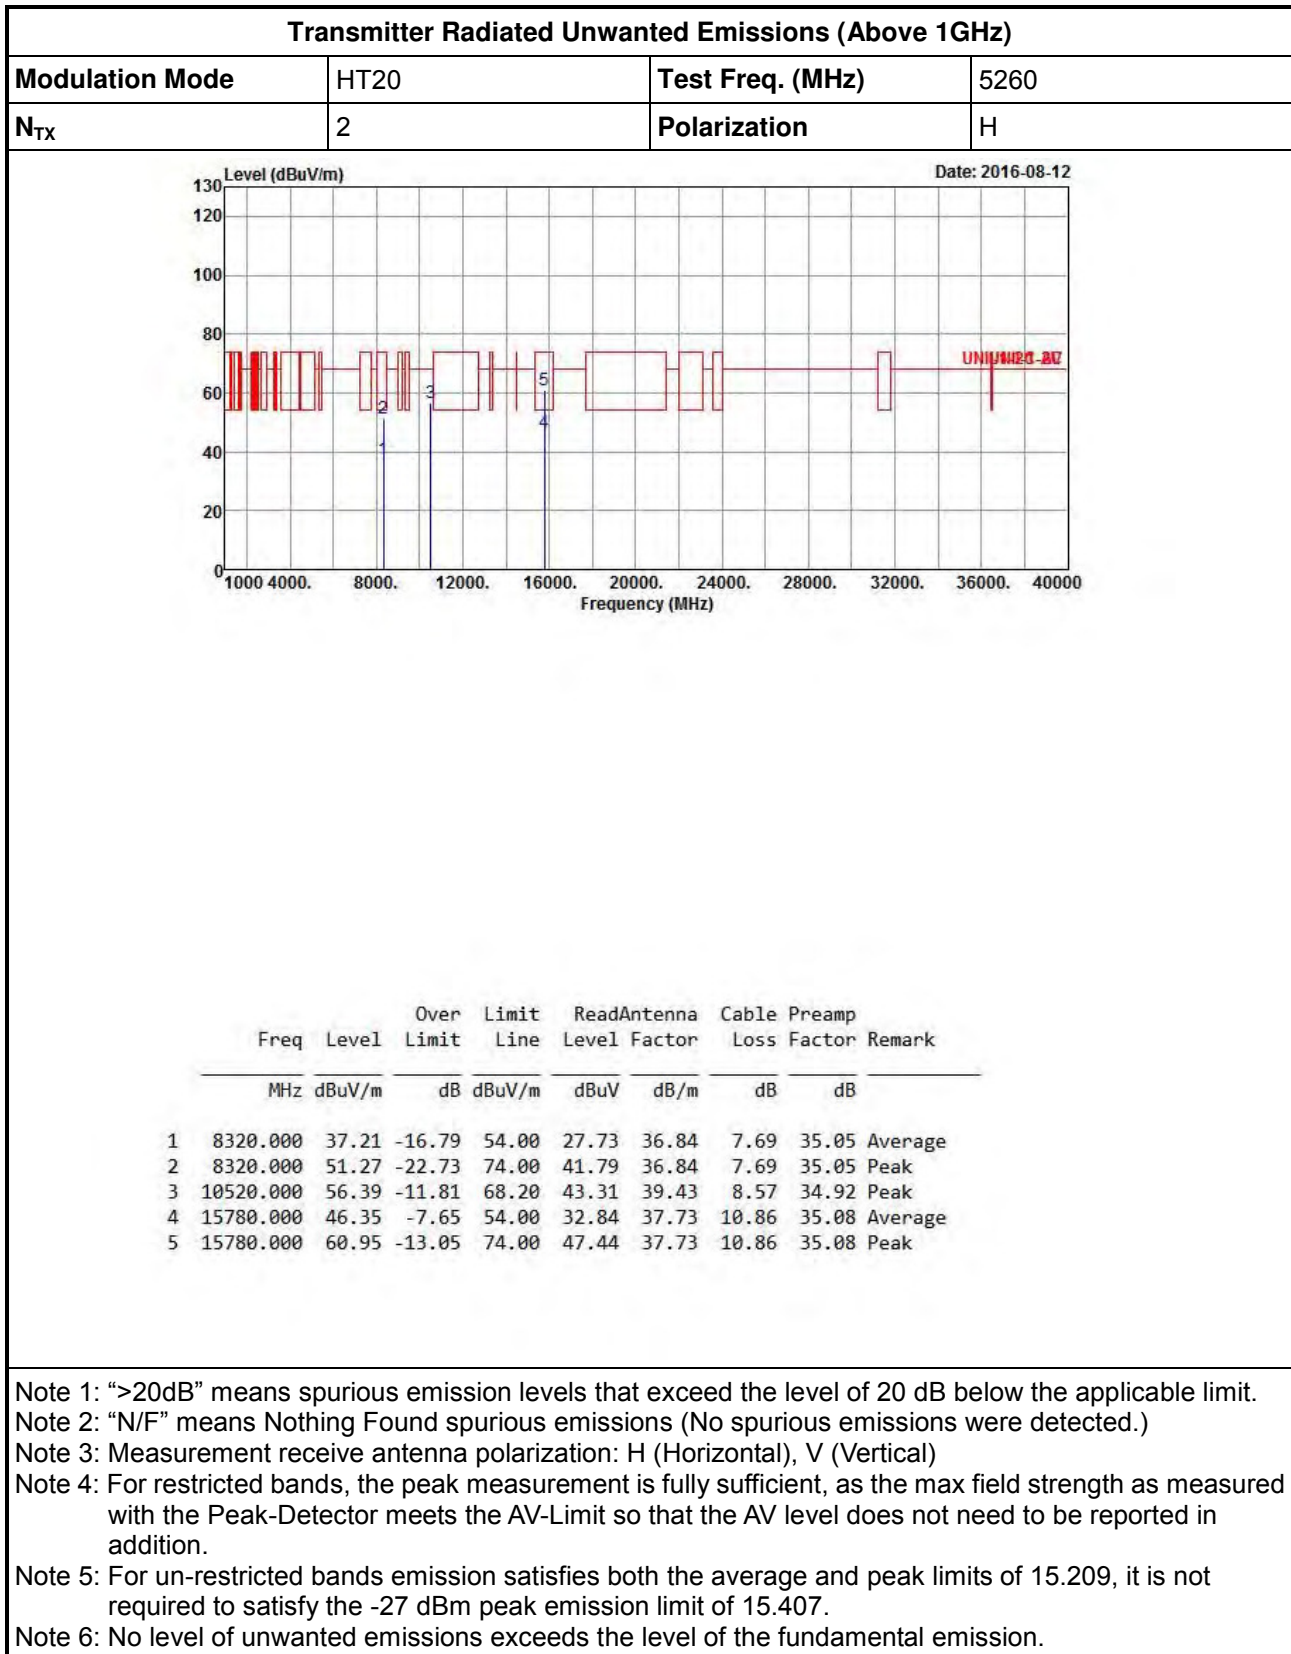

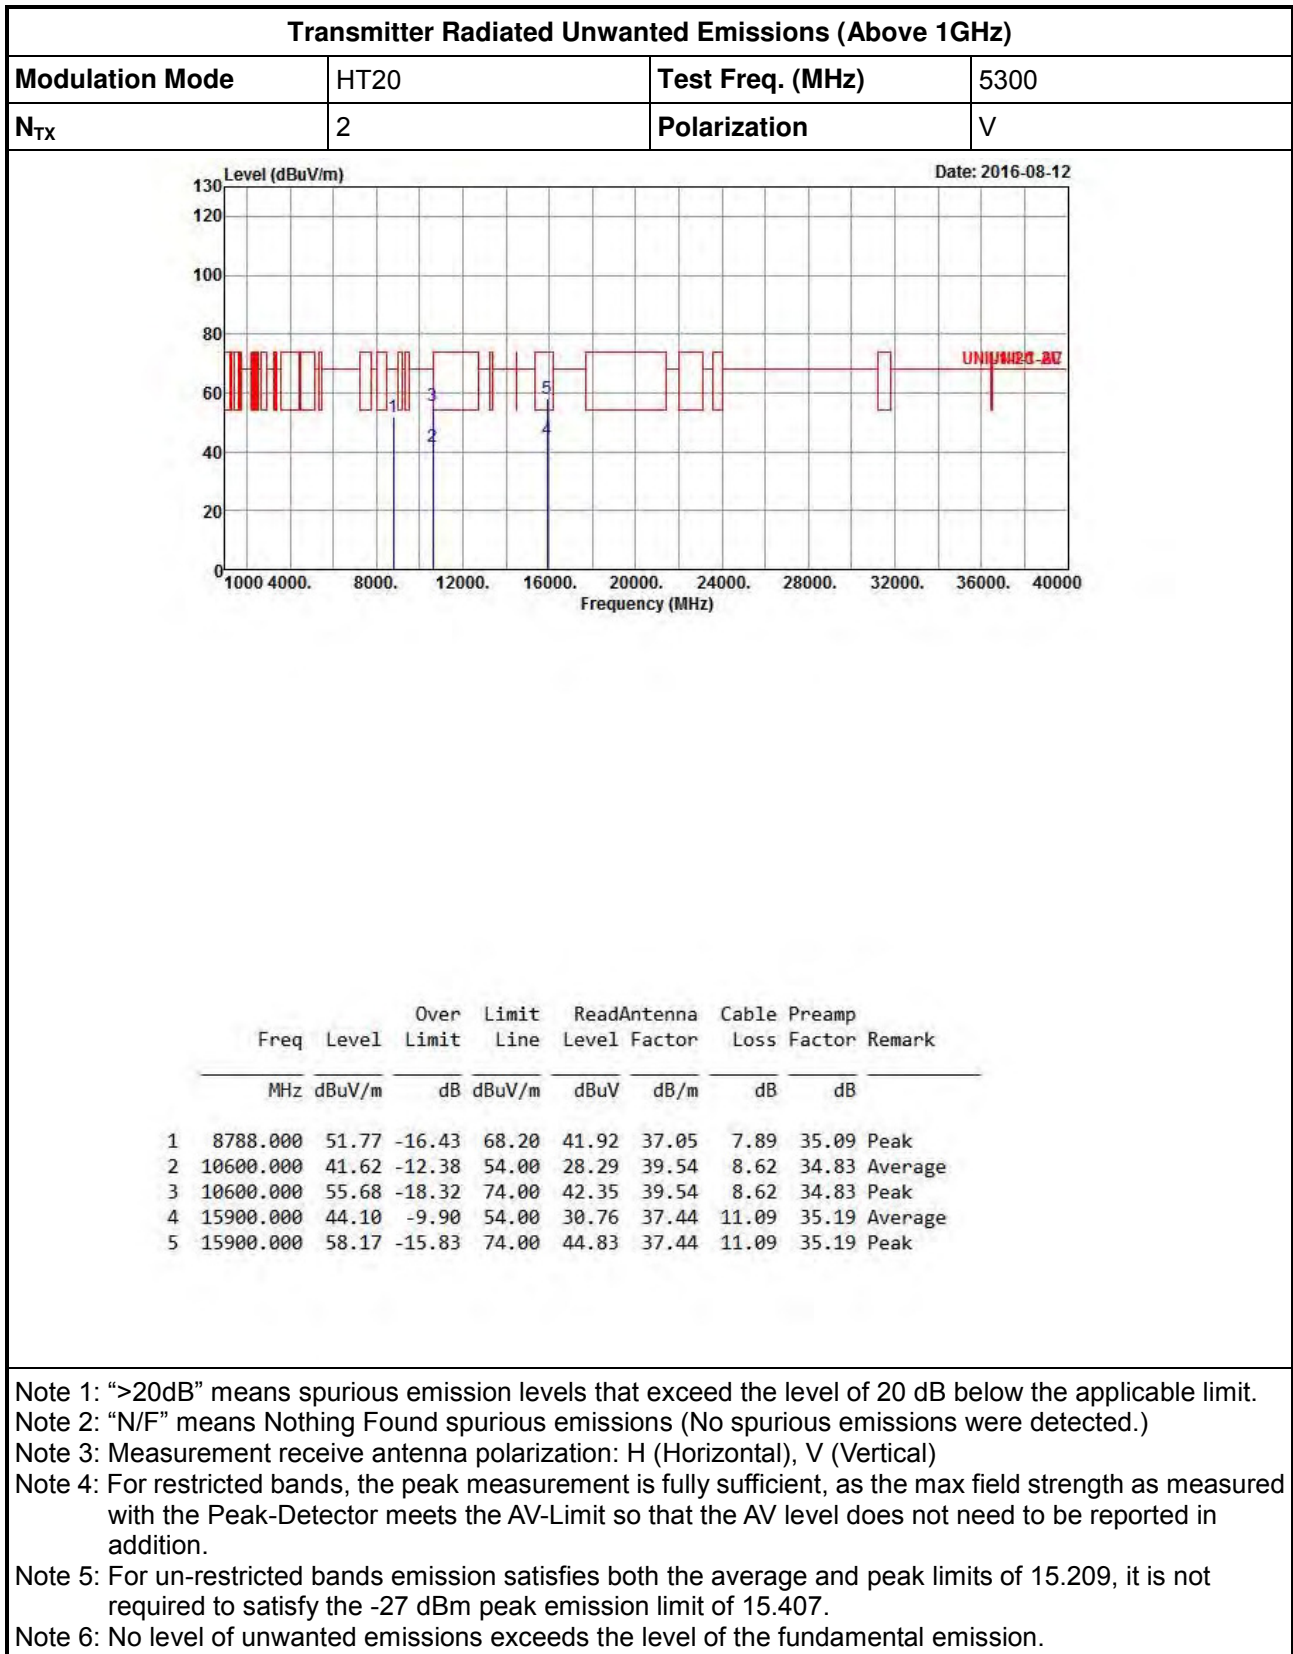


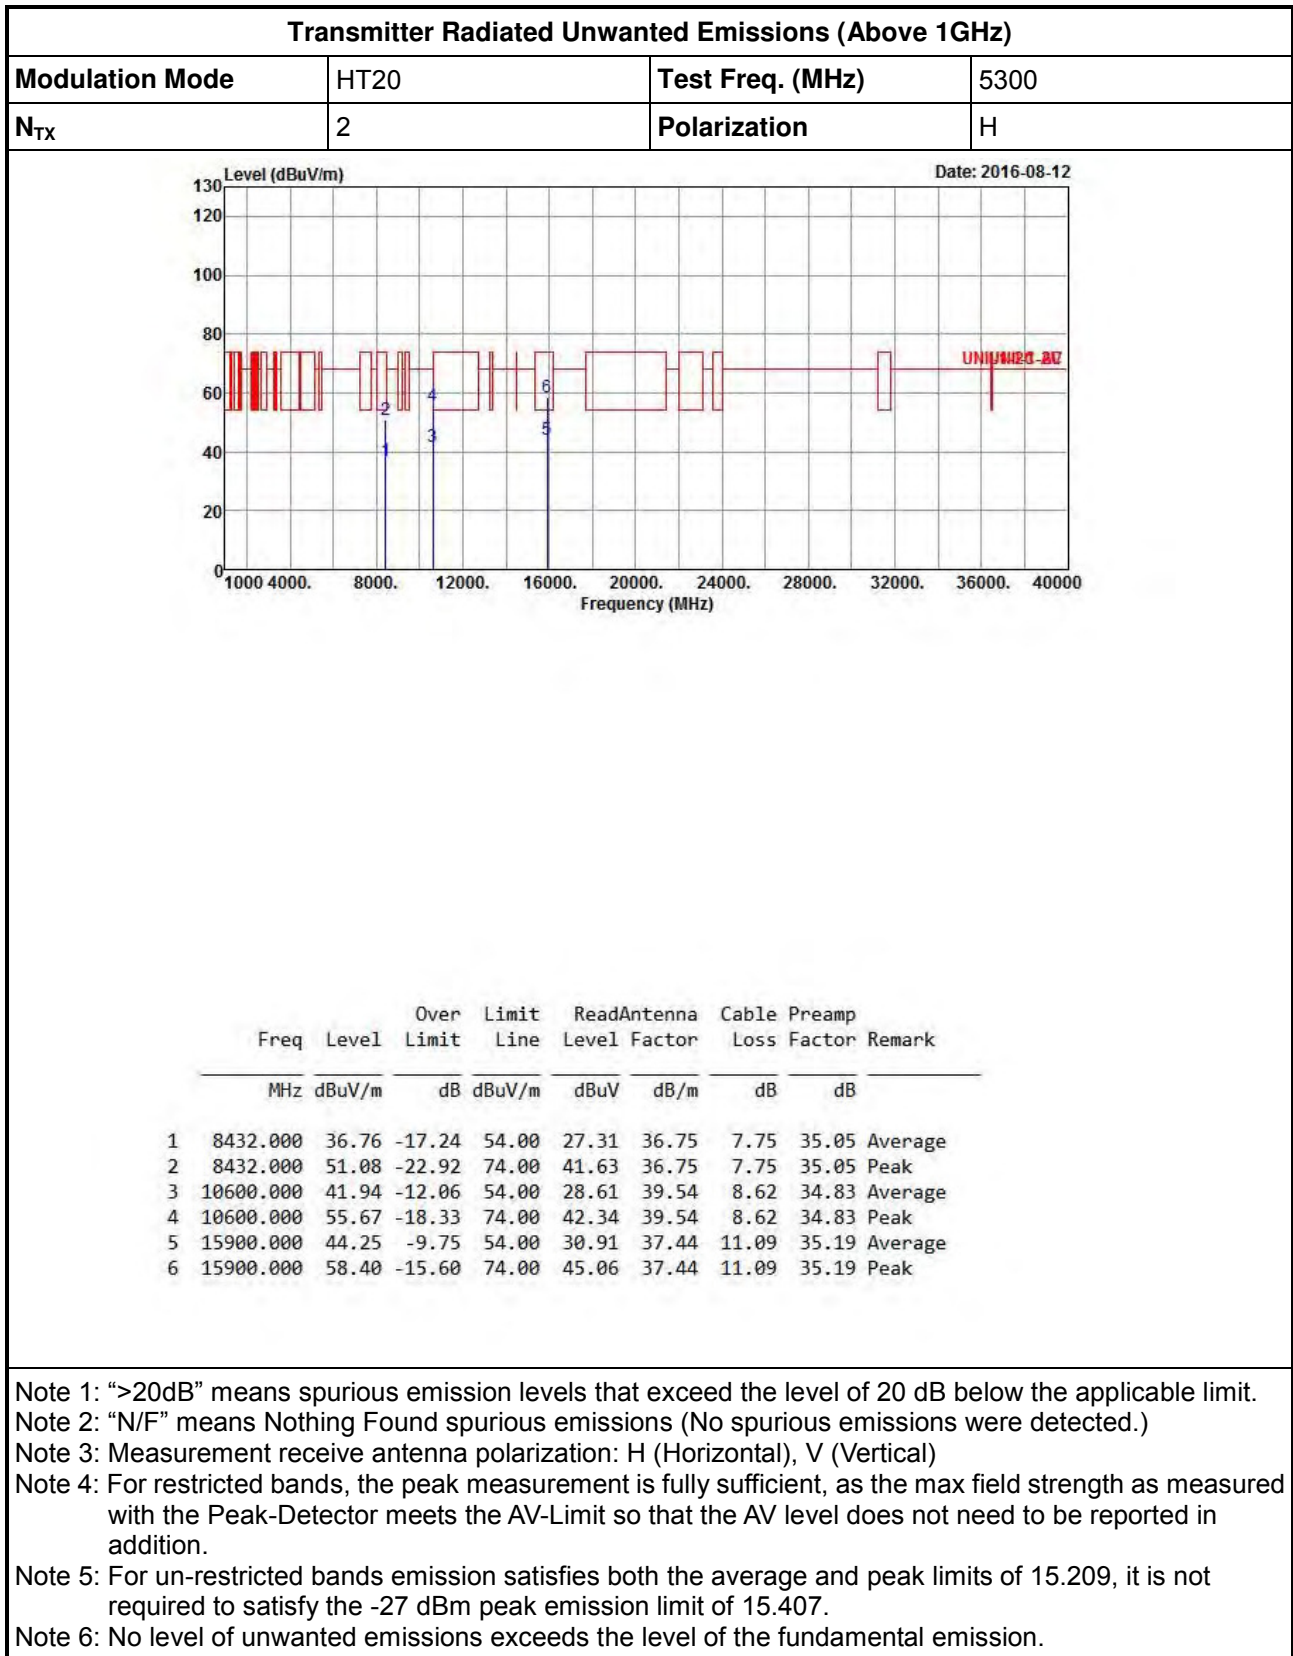


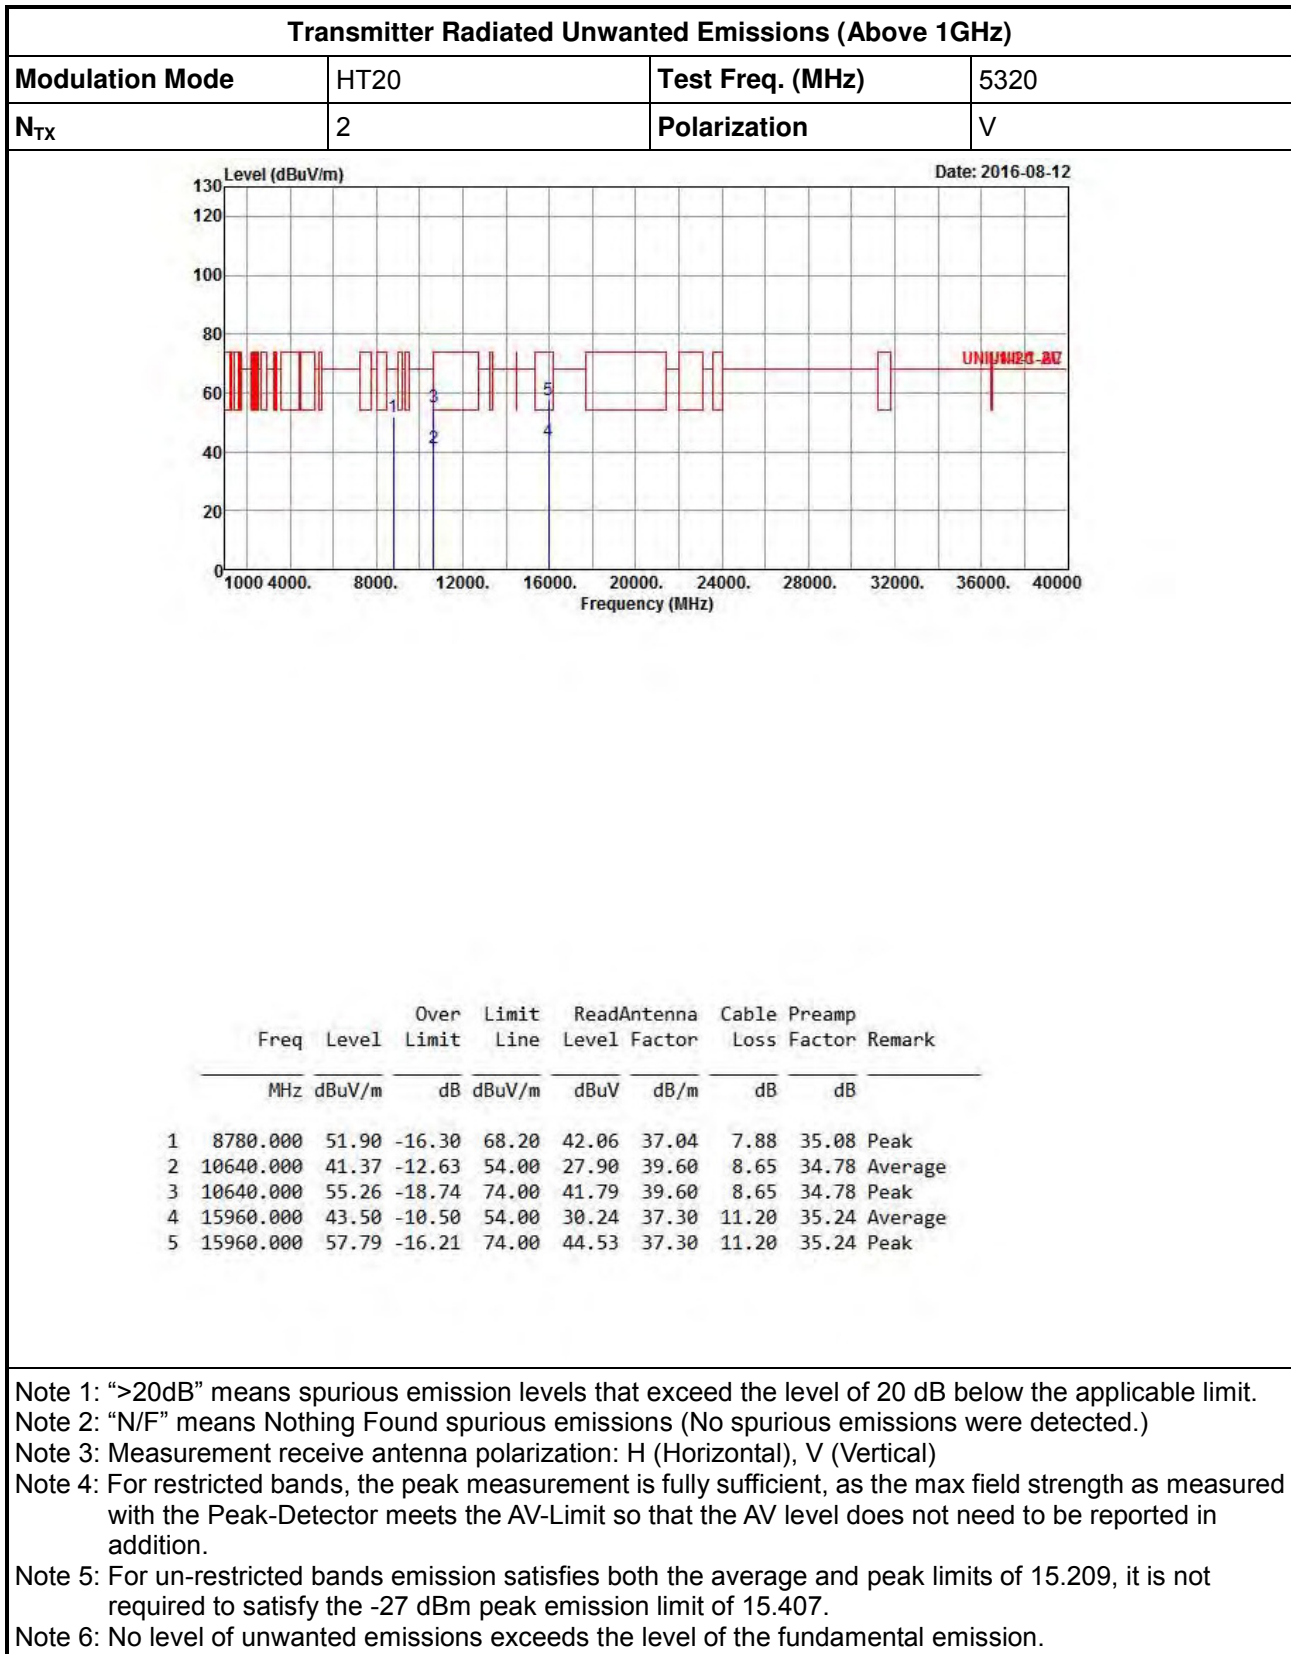


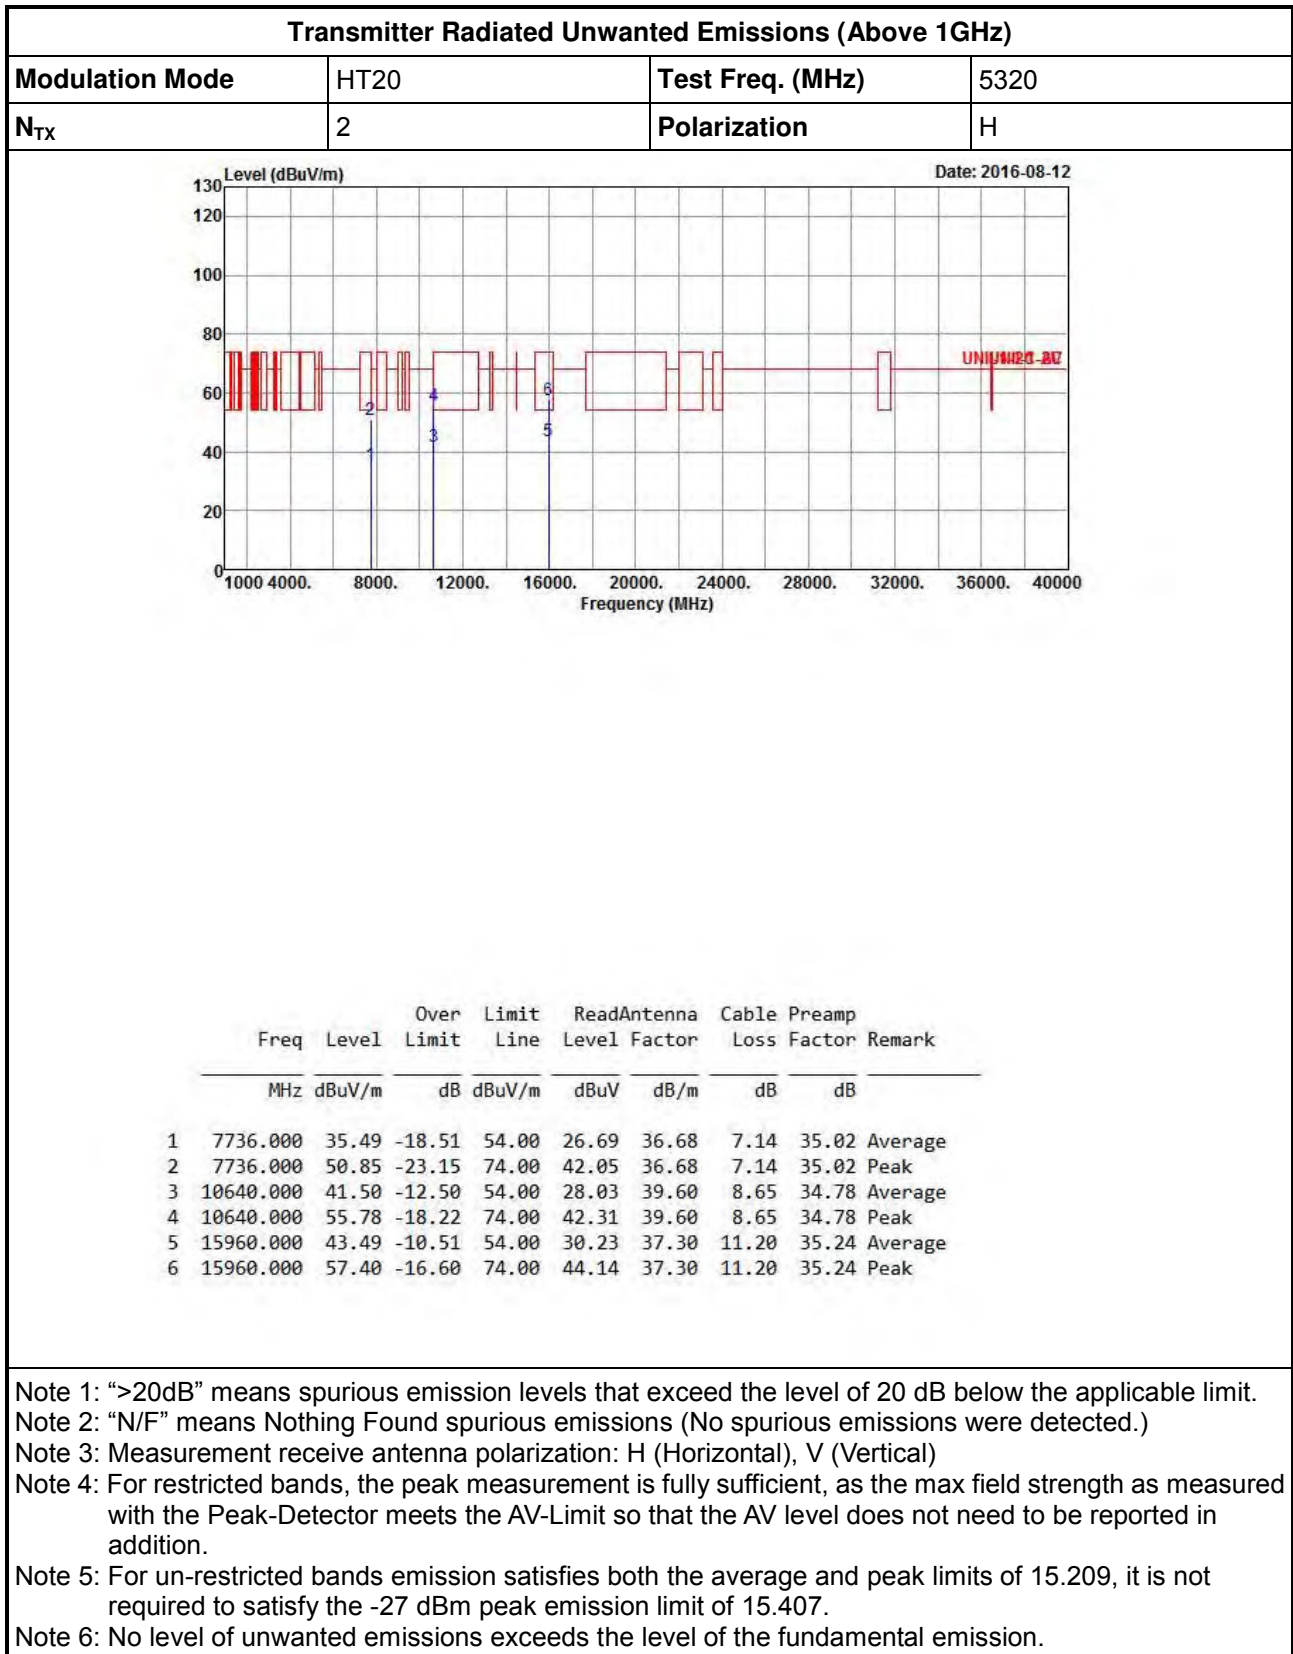





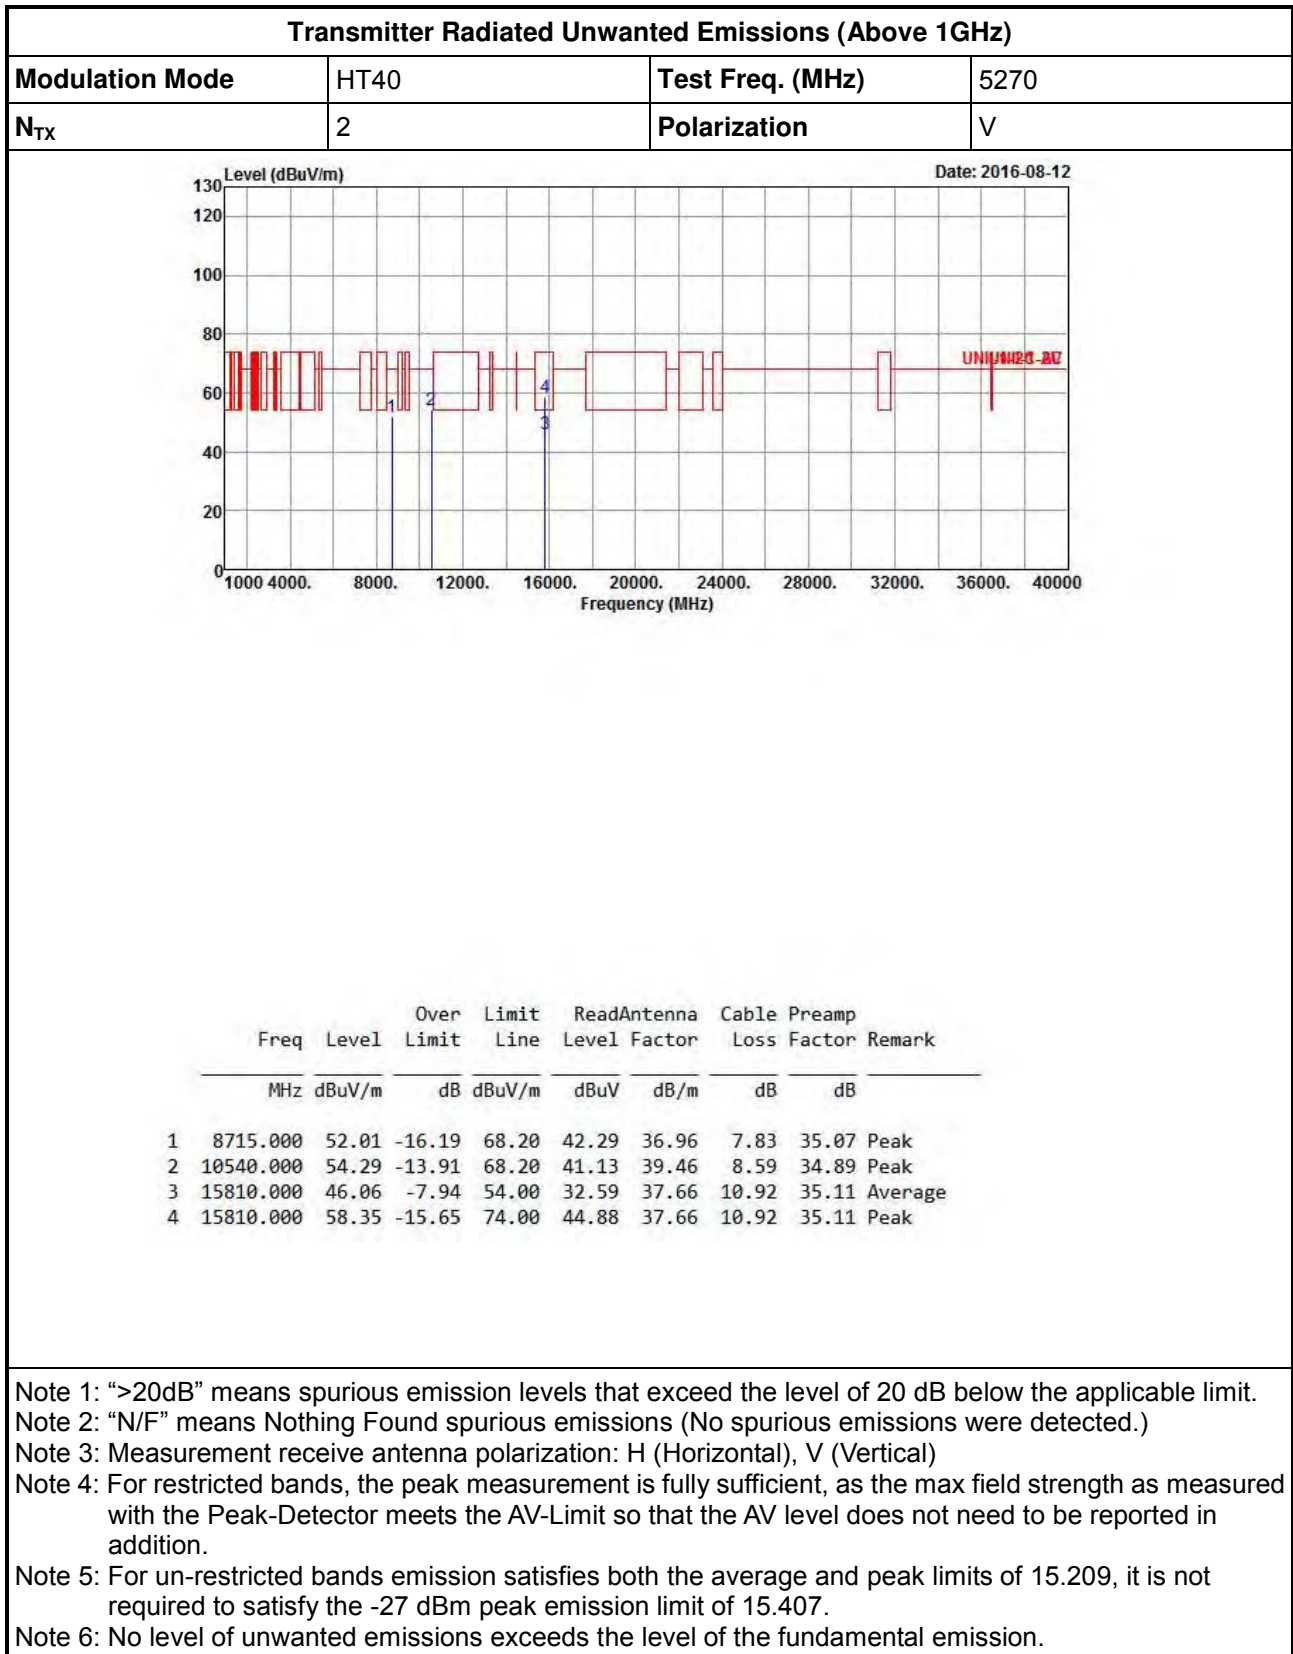

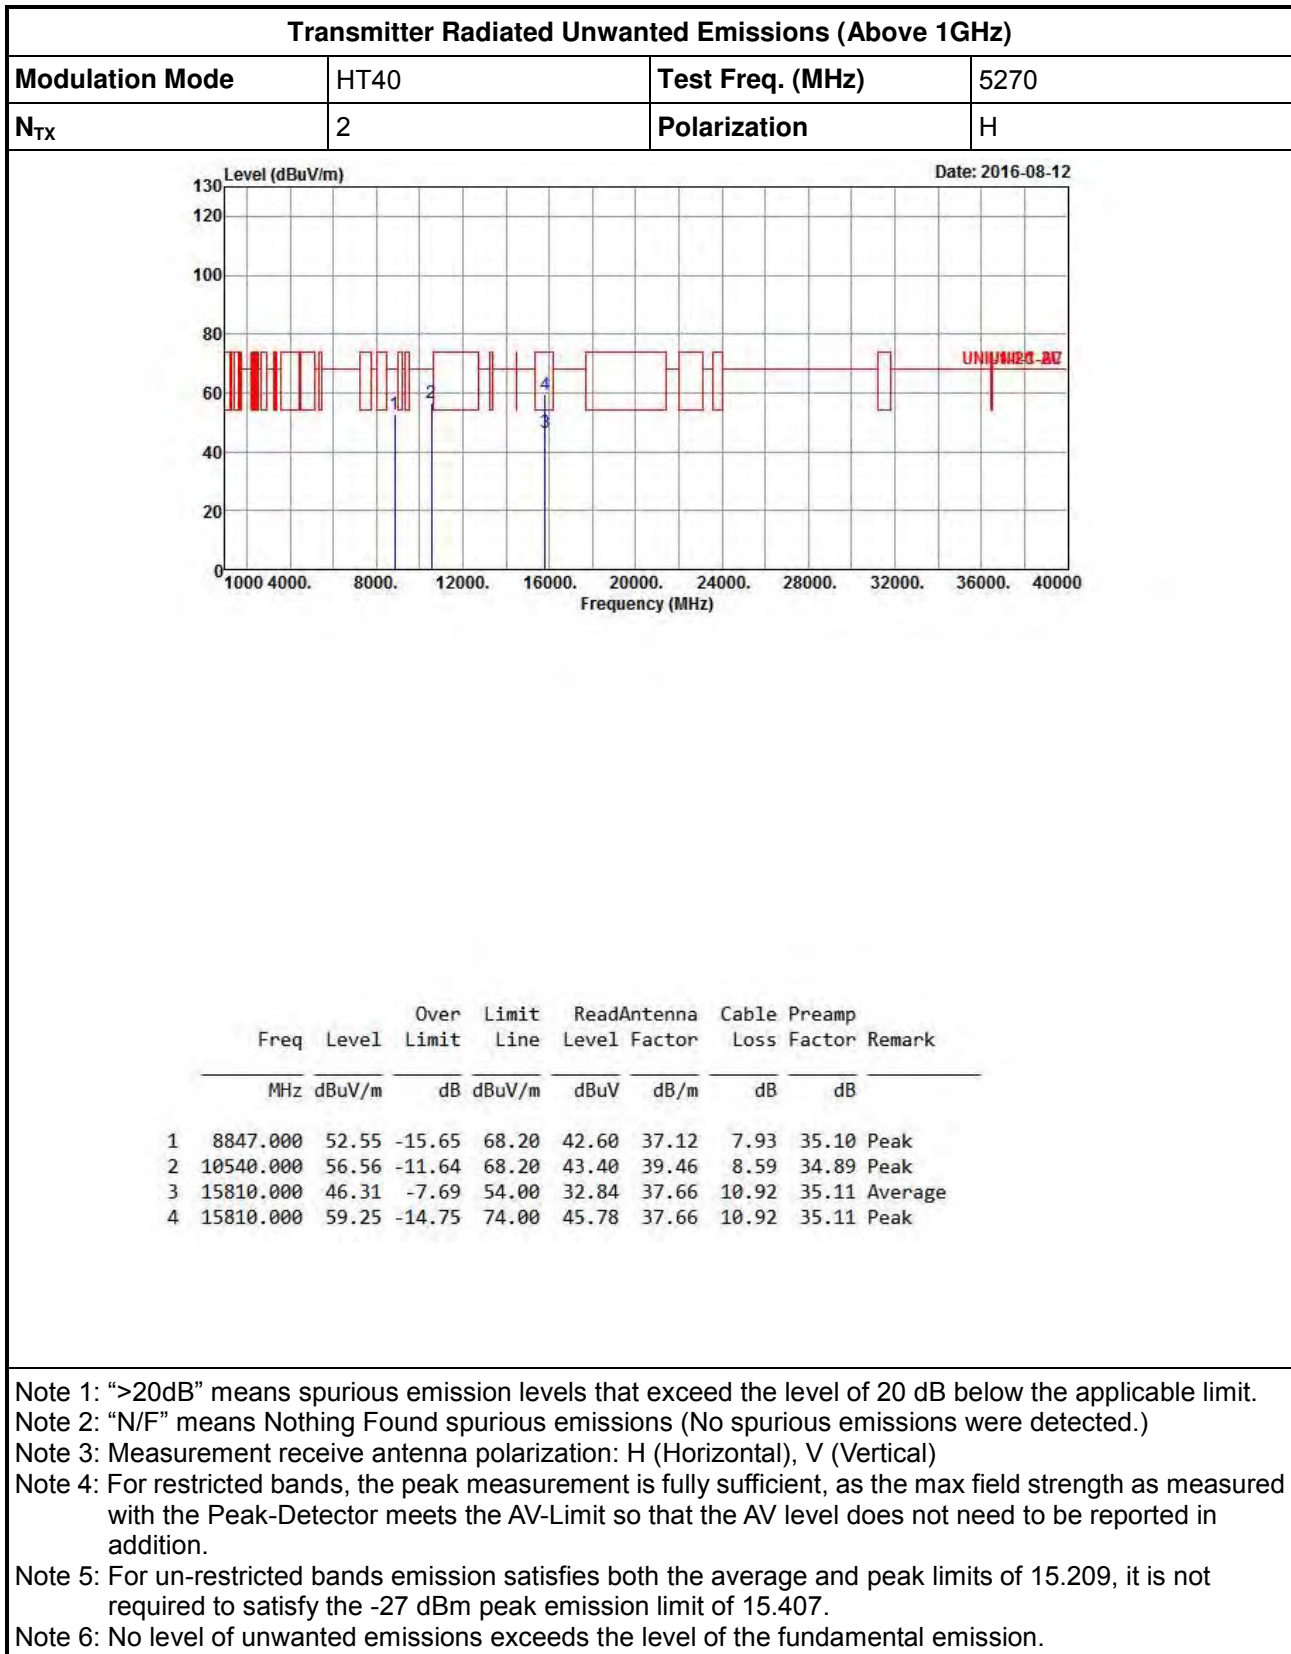


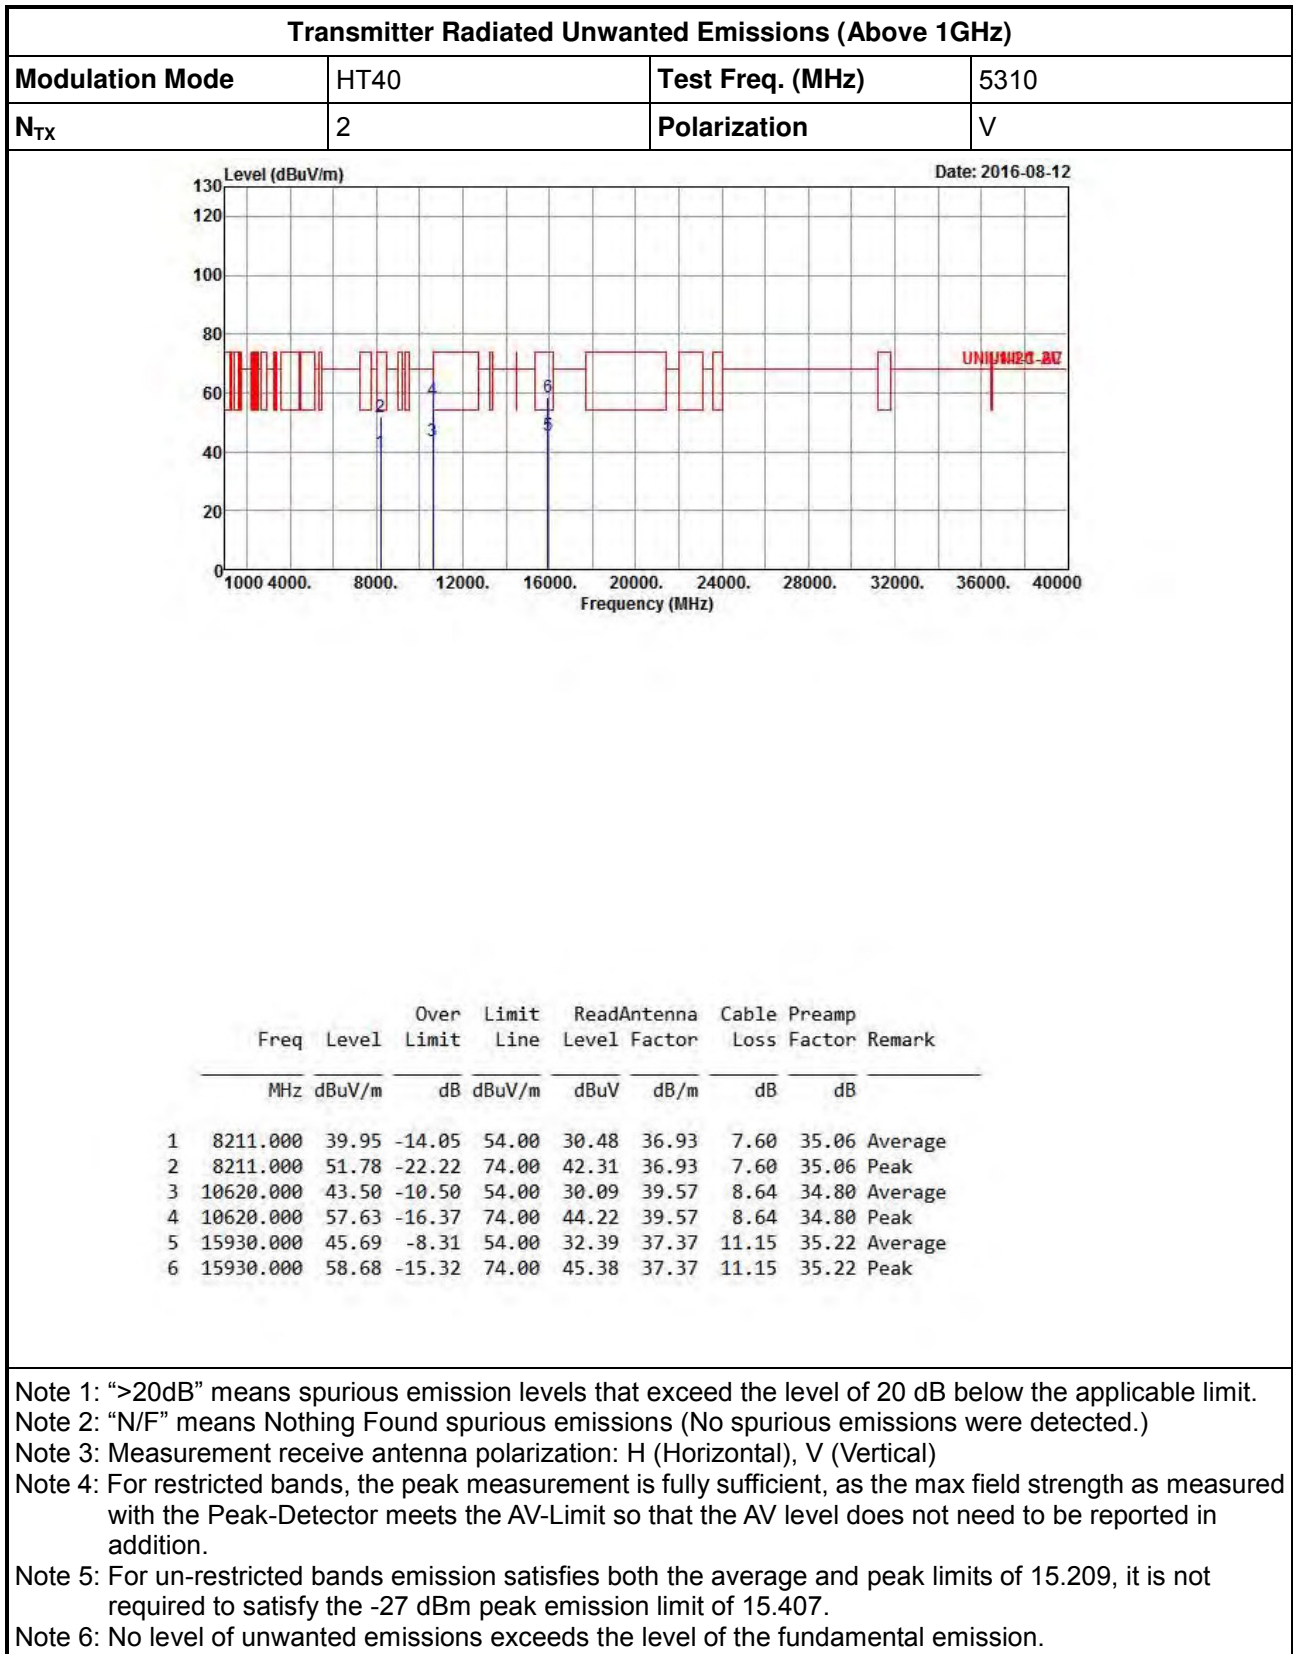

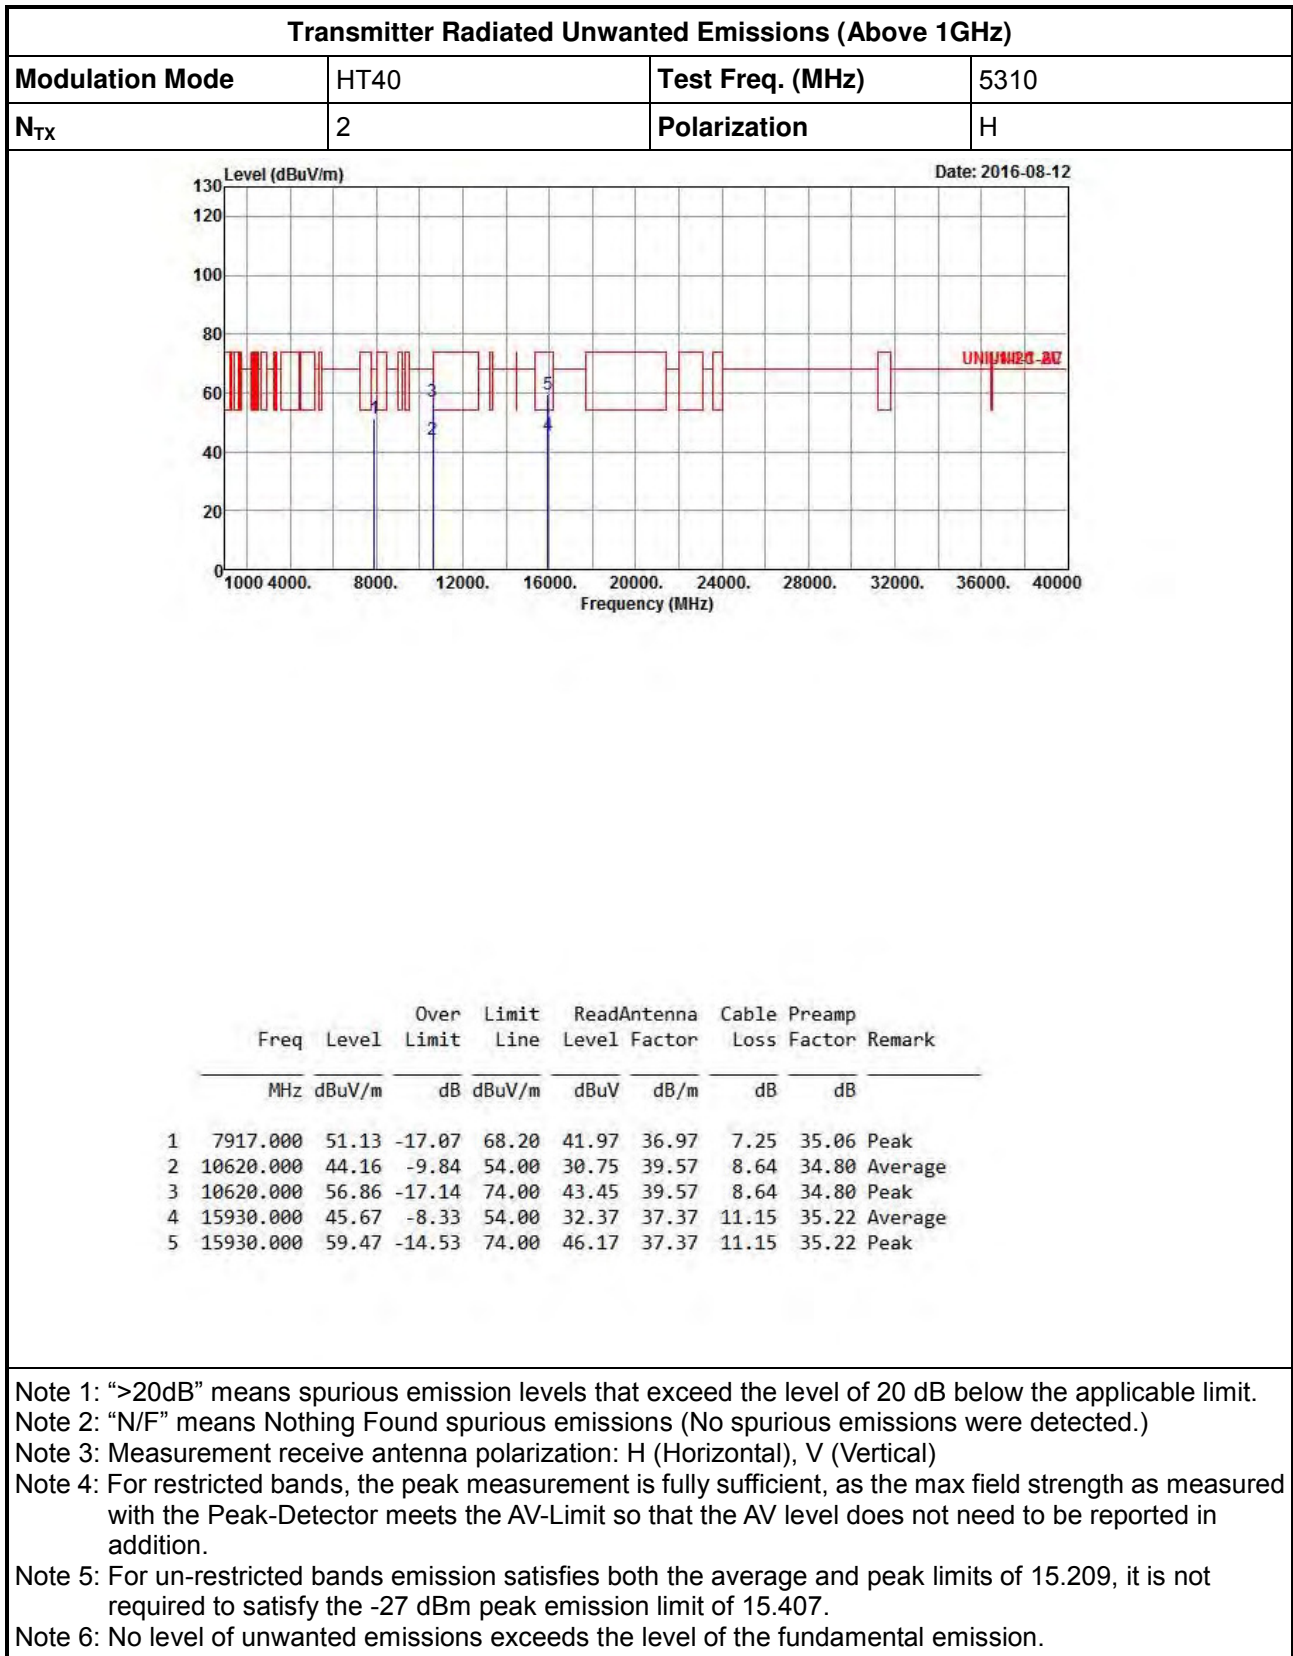

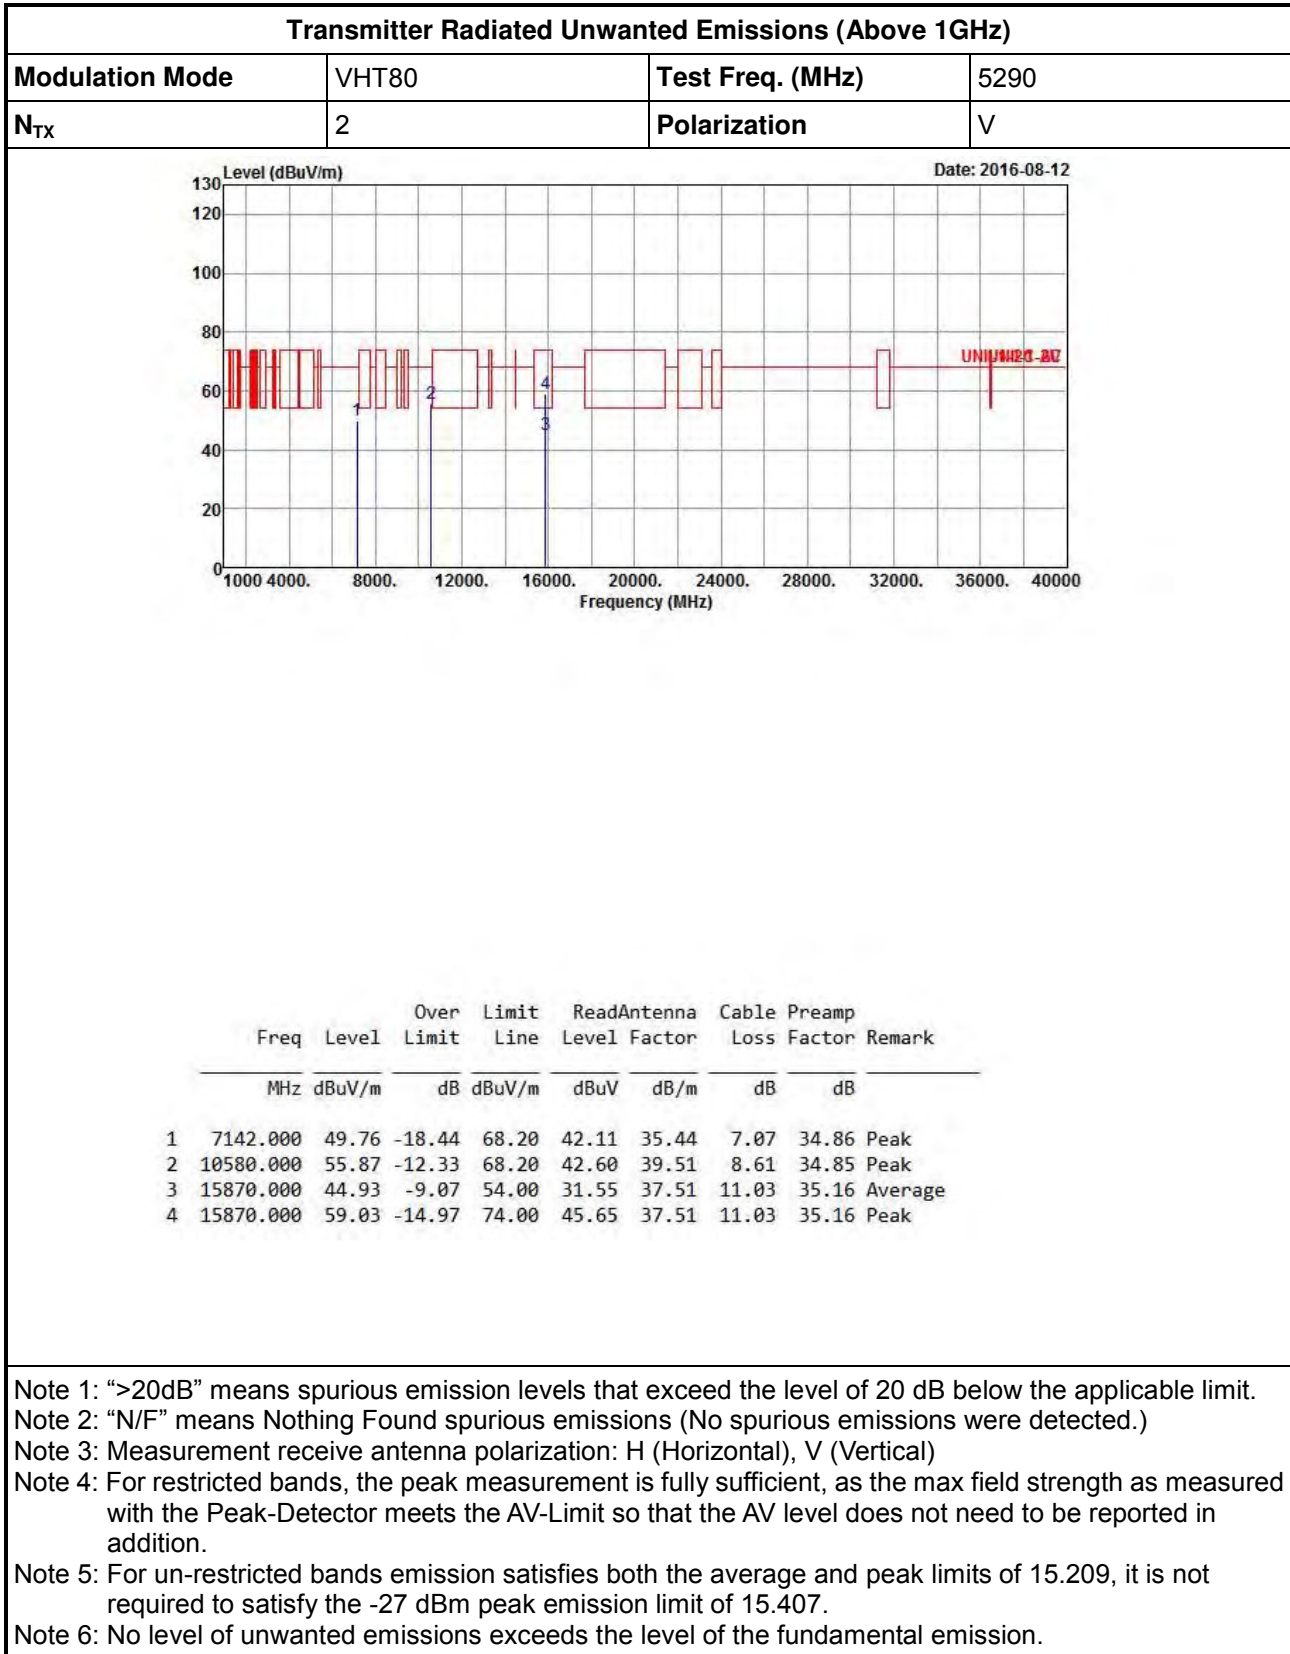




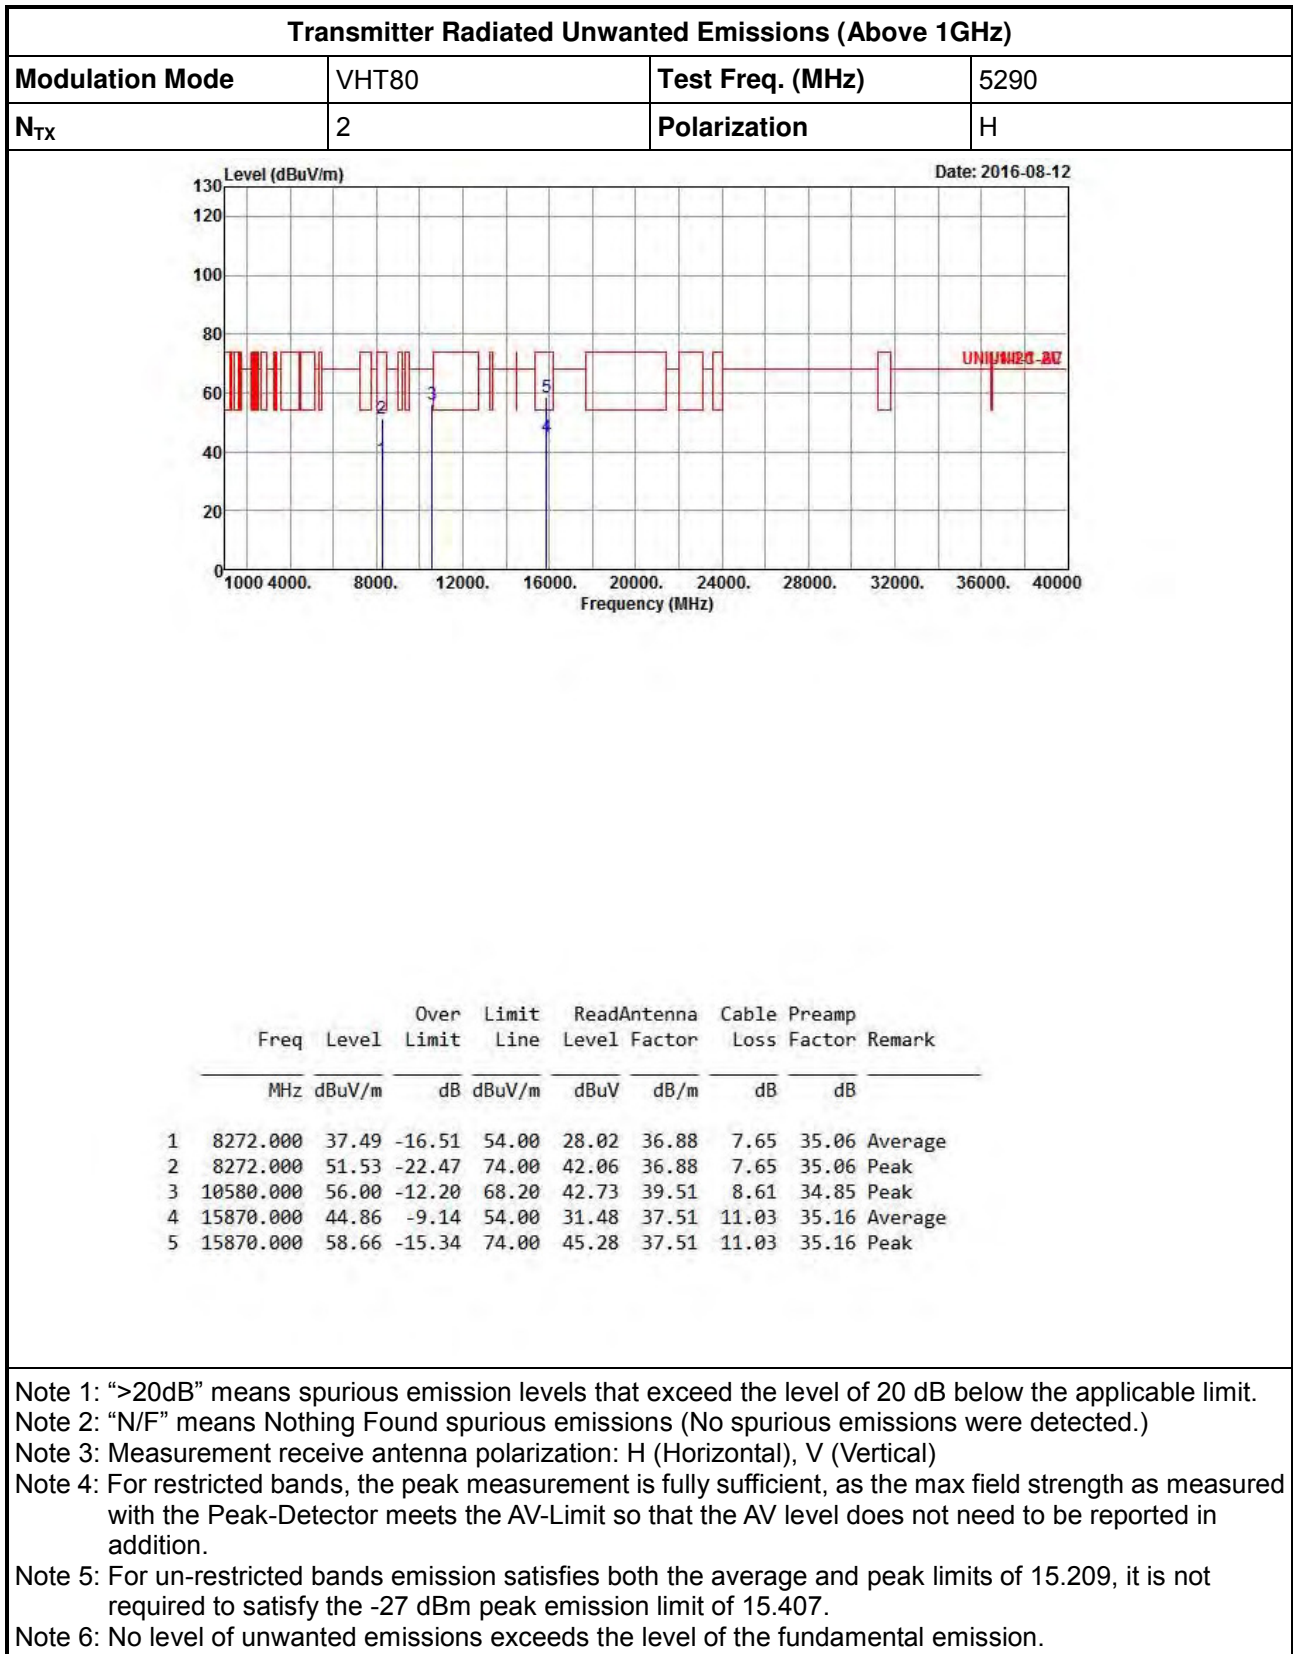



Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5470-5725MHz

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11a	Test Freq. (MHz)	5500
N <sub>TX</sub>	2	Polarization	V

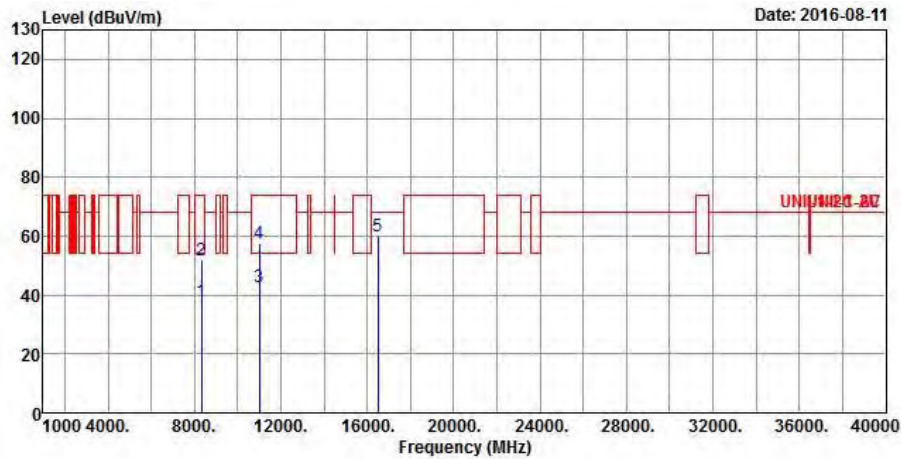


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp	Loss Factor	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8340.000	37.87	-16.13	54.00	28.39	36.83	7.70	35.05	Average
2	8340.000	51.87	-22.13	74.00	42.39	36.83	7.70	35.05	Peak
3	11000.000	42.78	-11.22	54.00	28.17	40.10	8.88	34.37	Average
4	11000.000	57.34	-16.66	74.00	42.73	40.10	8.88	34.37	Peak
5	16500.000	60.19	-8.01	68.20	45.91	38.70	10.40	34.82	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	11a	Test Freq. (MHz)	5500
N <sub>TX</sub>	2	Polarization	H

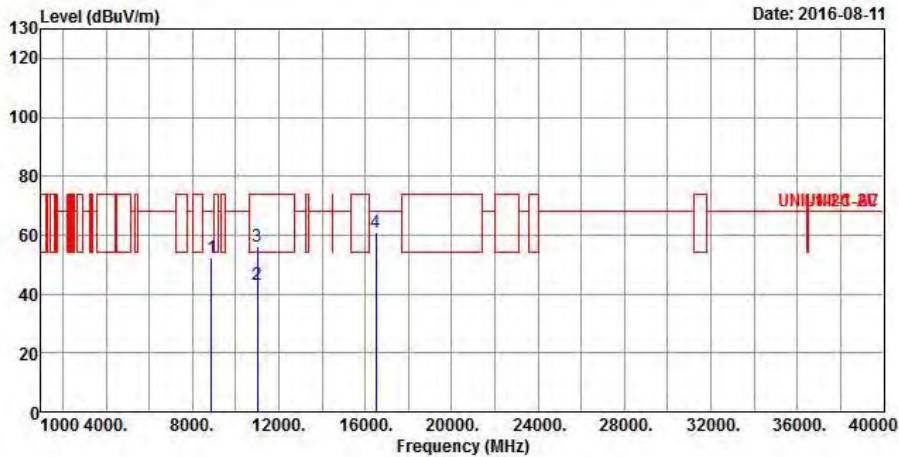


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8900.000	52.50	-15.70	68.20	42.45	37.18	7.97	35.10 Peak
2	11000.000	43.00	-11.00	54.00	28.39	40.10	8.88	34.37 Average
3	11000.000	56.29	-17.71	74.00	41.68	40.10	8.88	34.37 Peak
4	16500.000	61.02	-7.18	68.20	46.74	38.70	10.40	34.82 Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

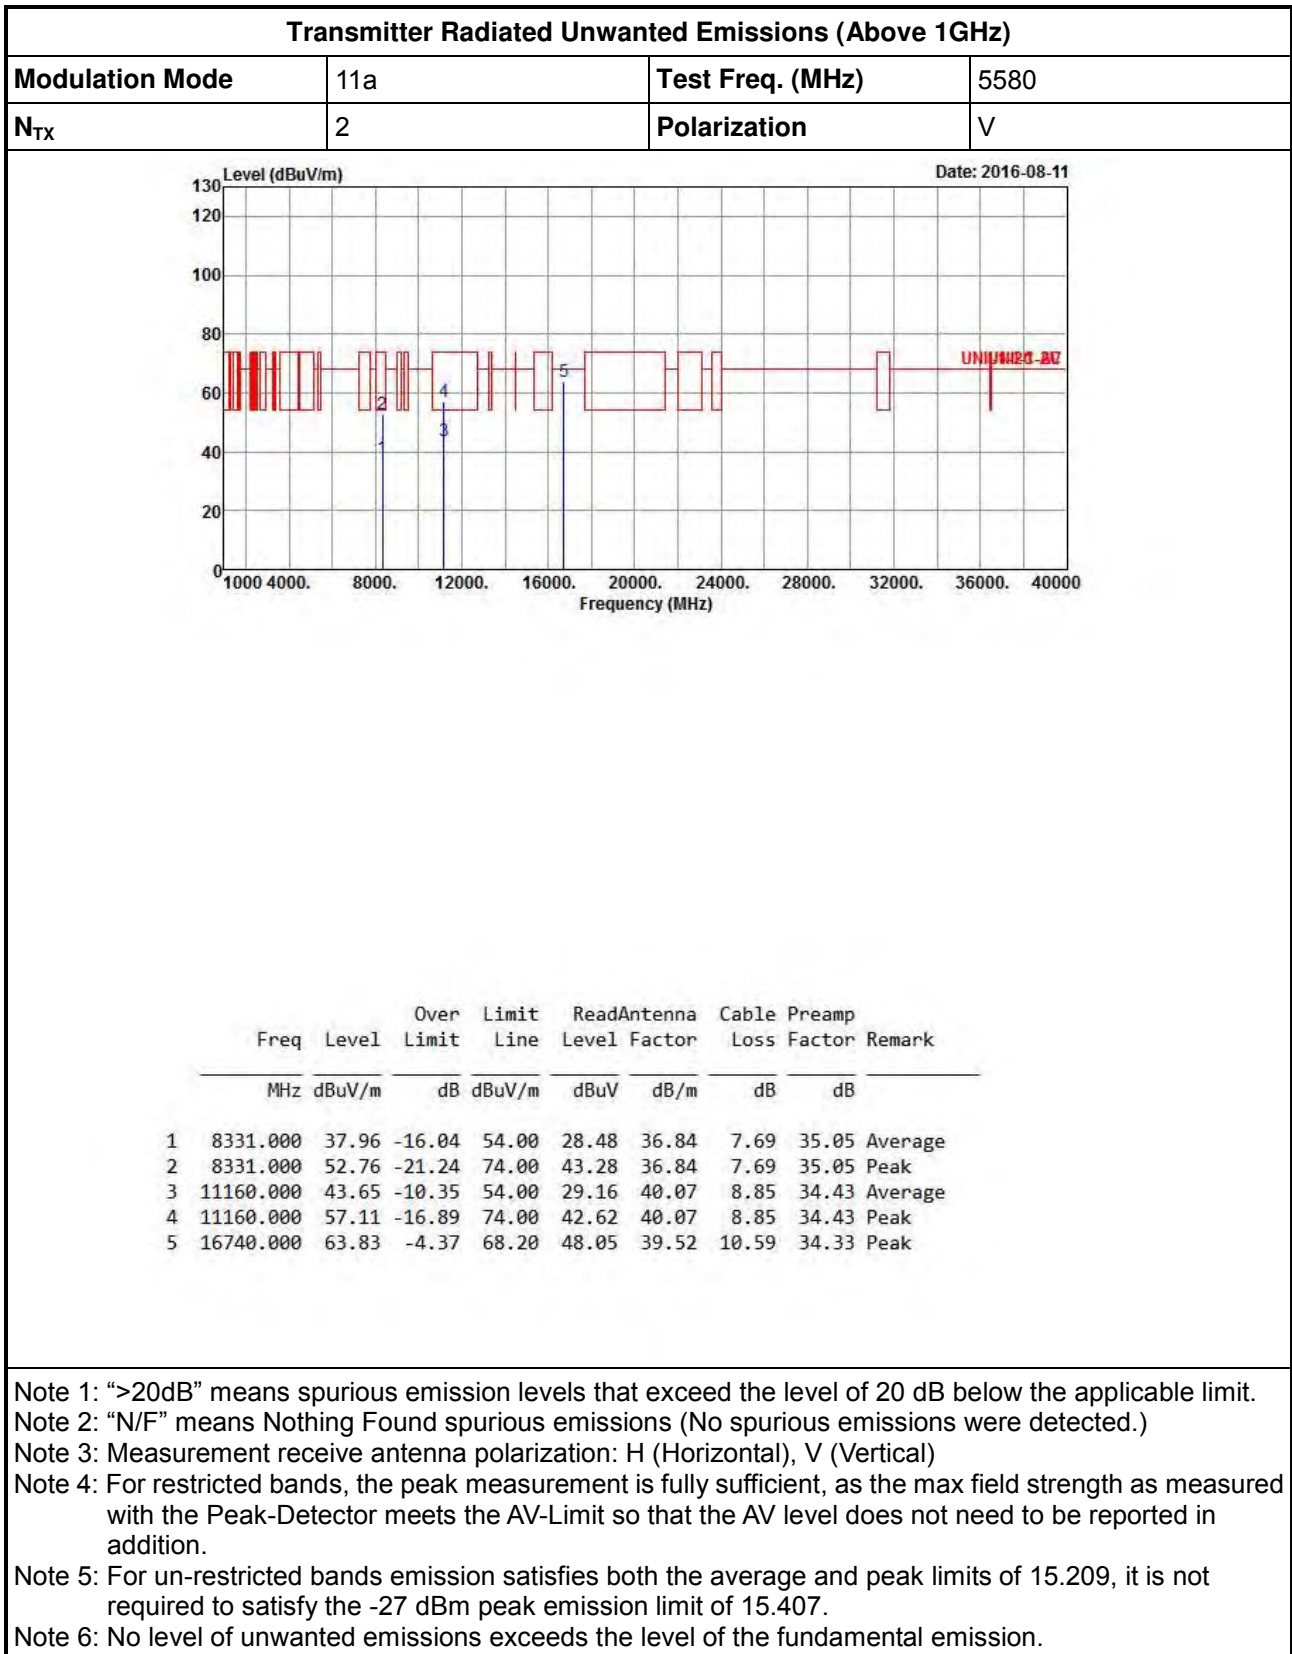


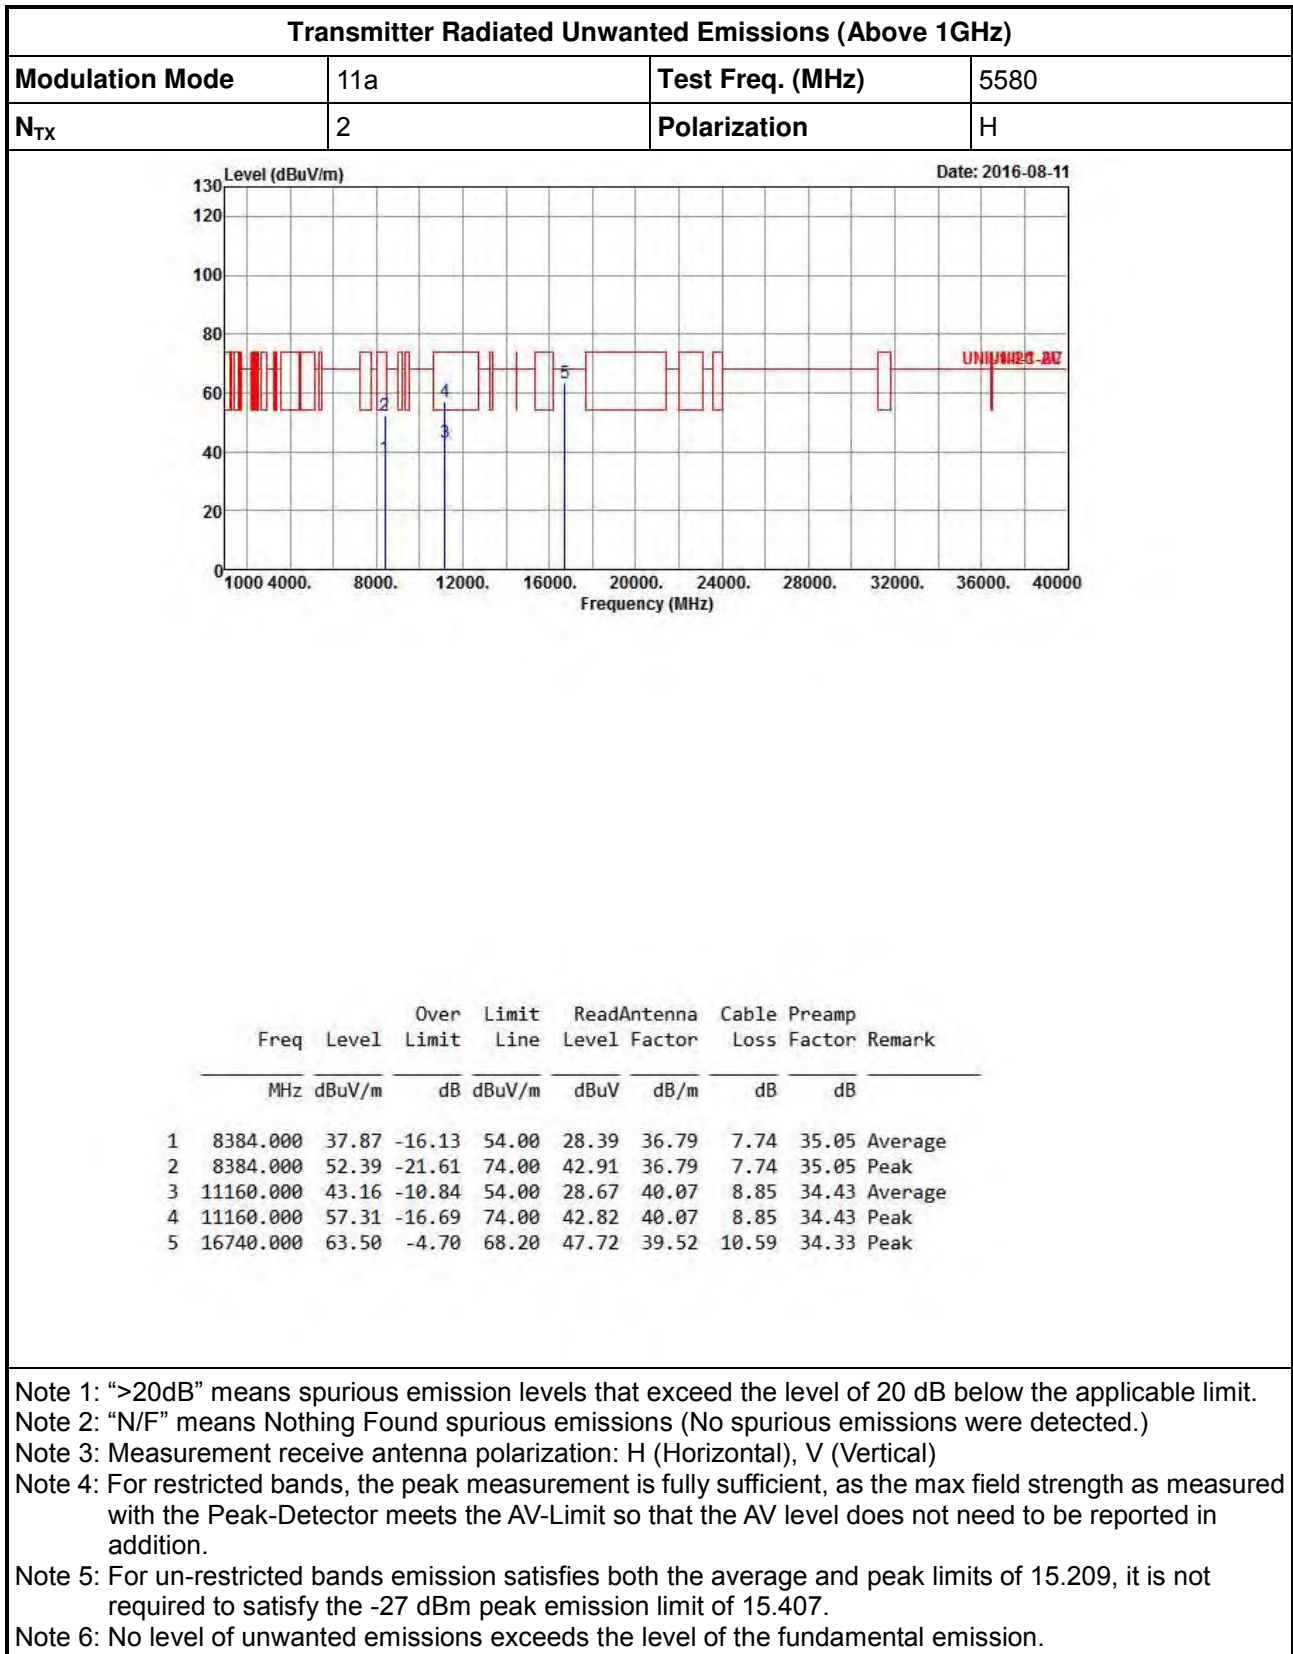





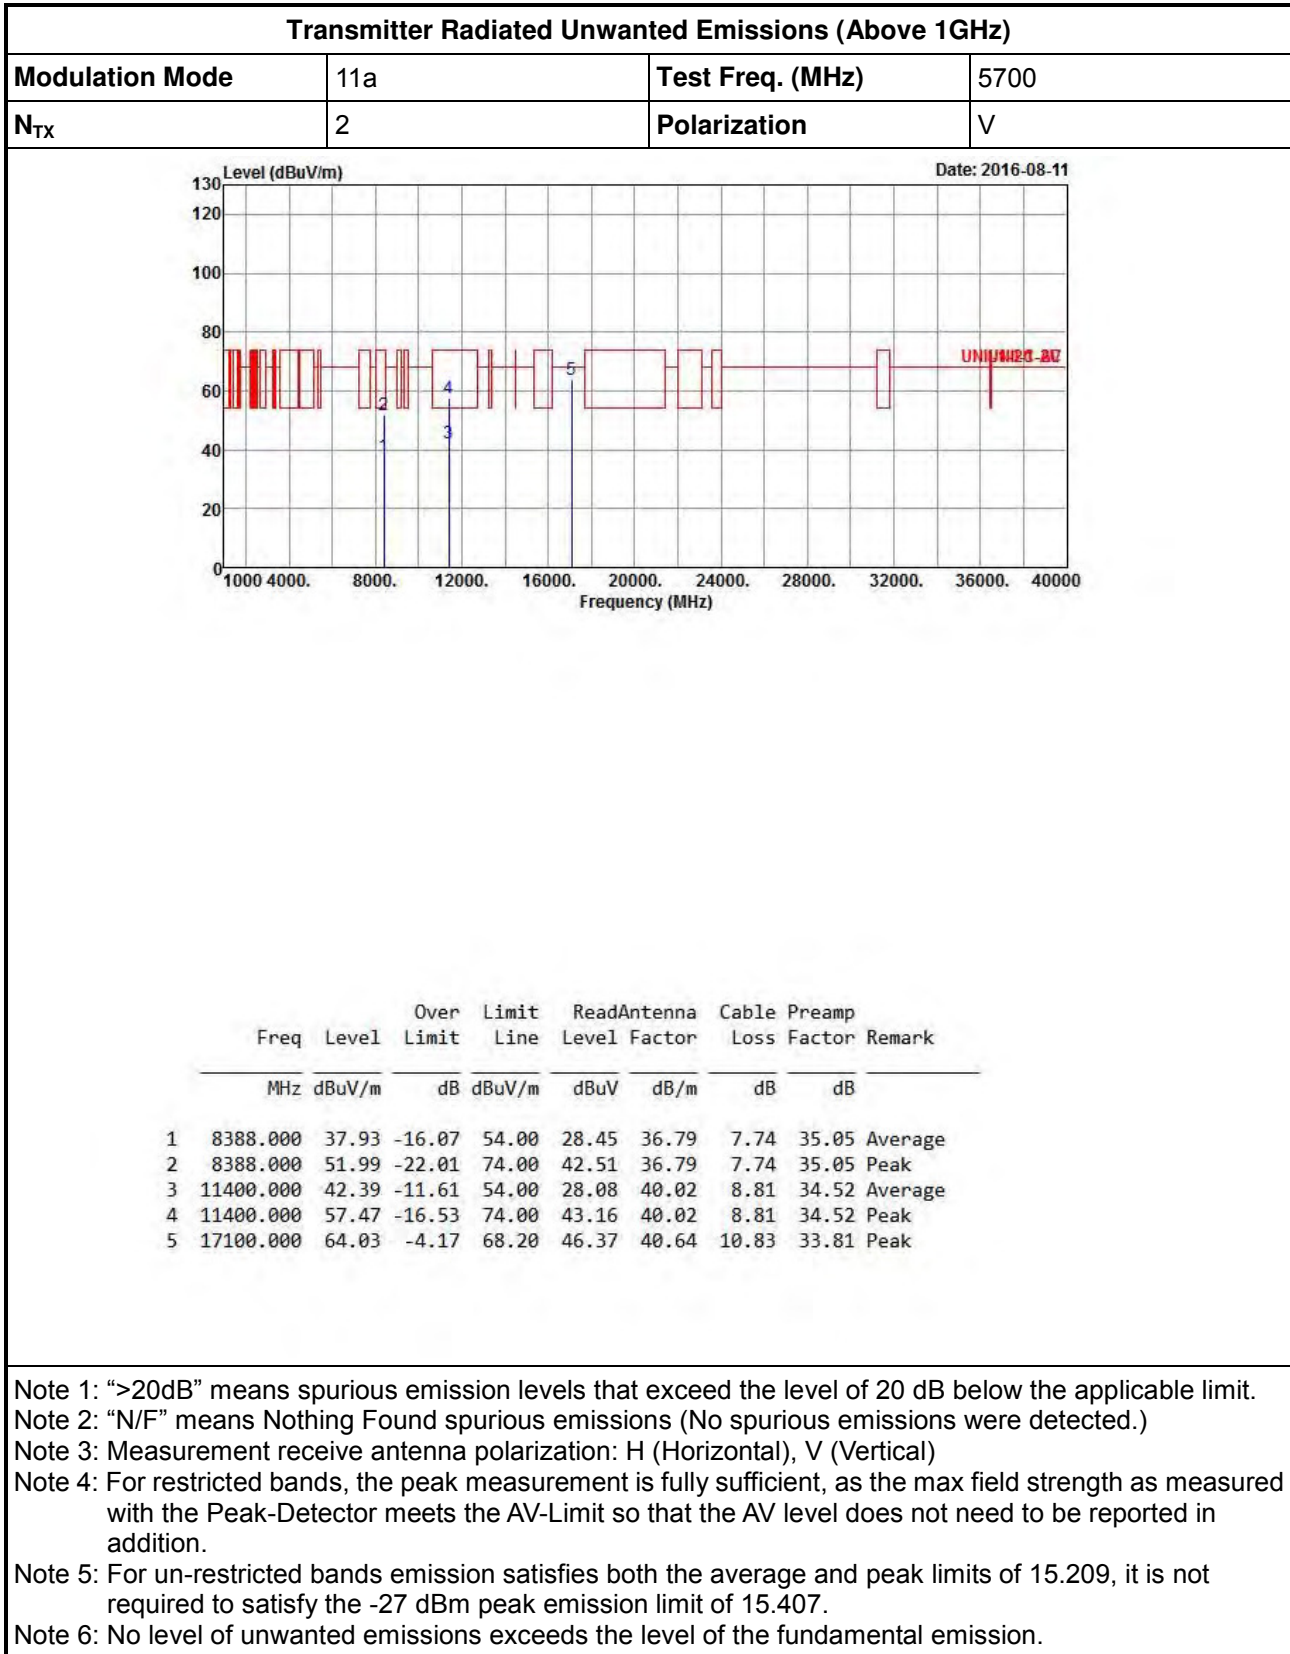

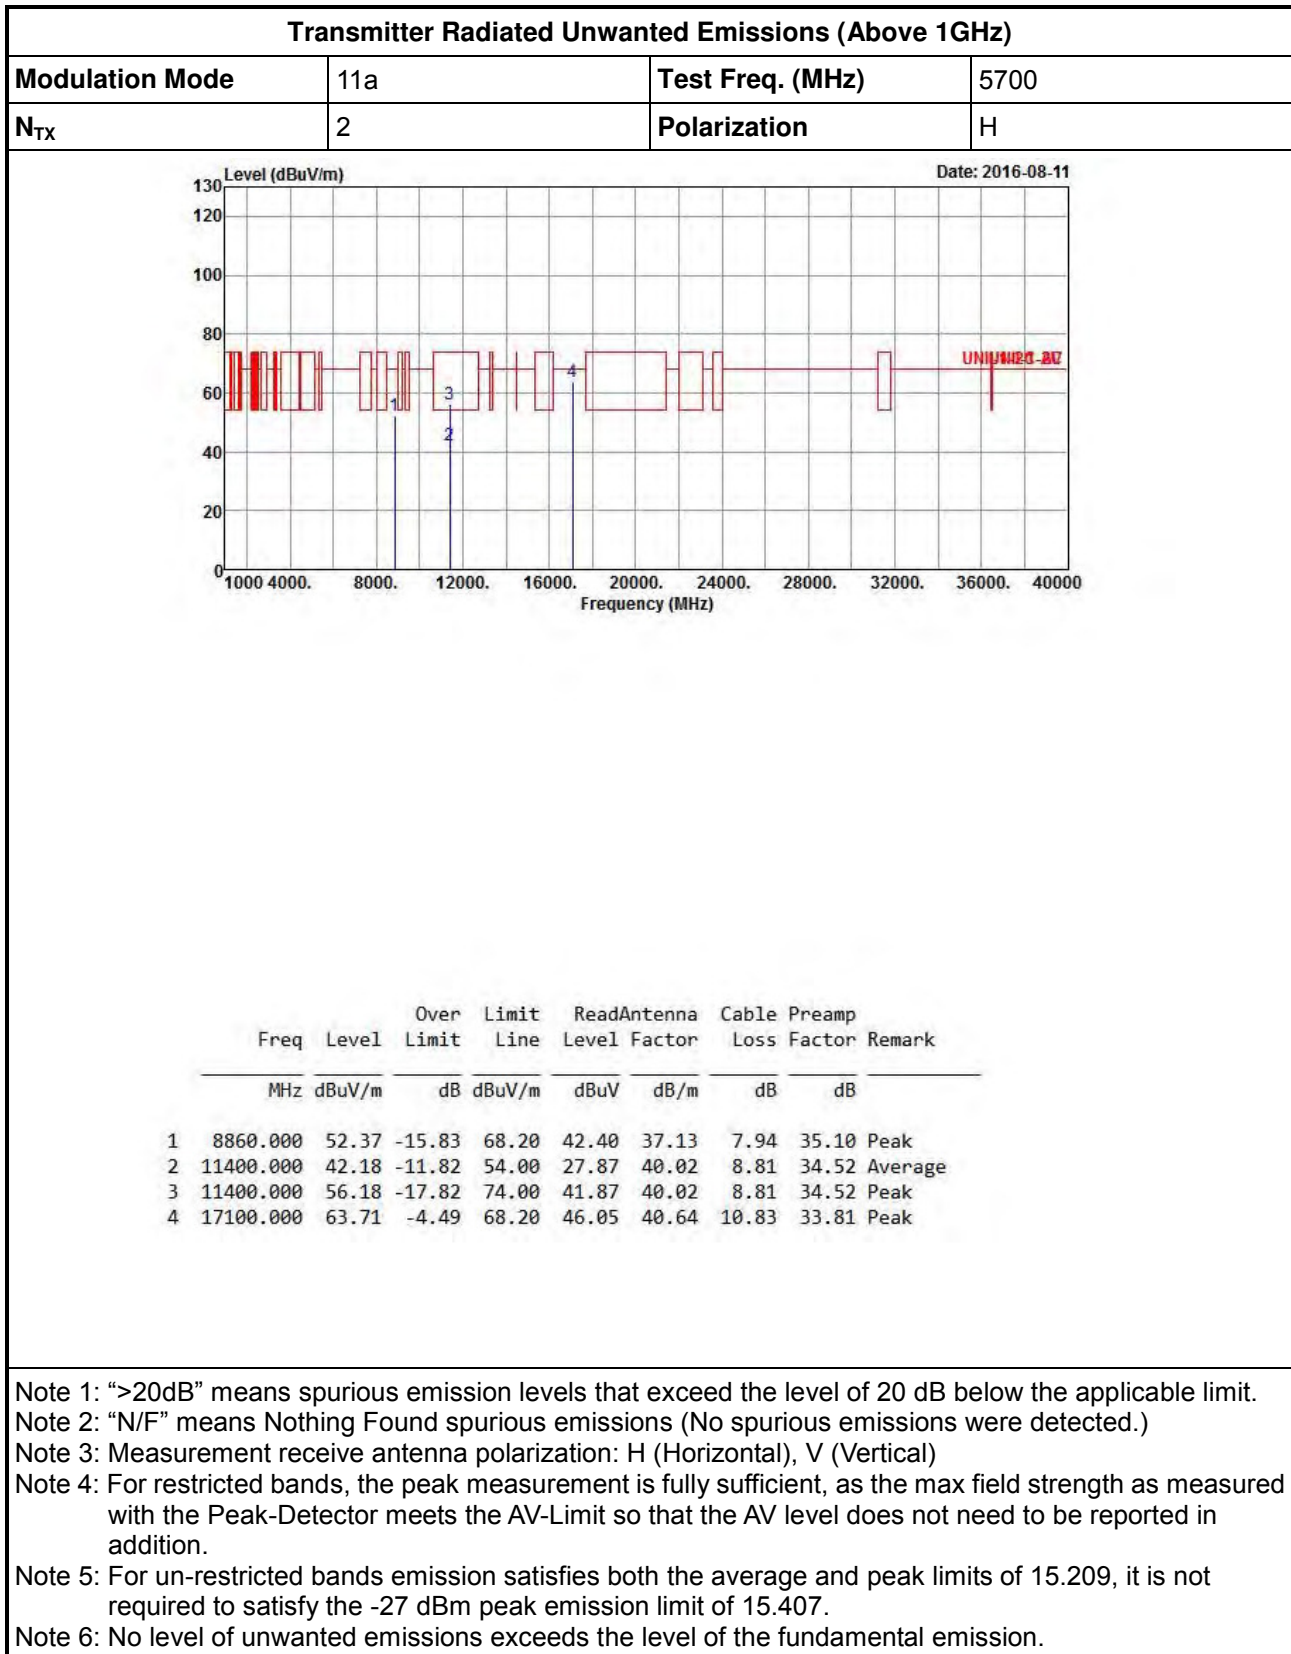


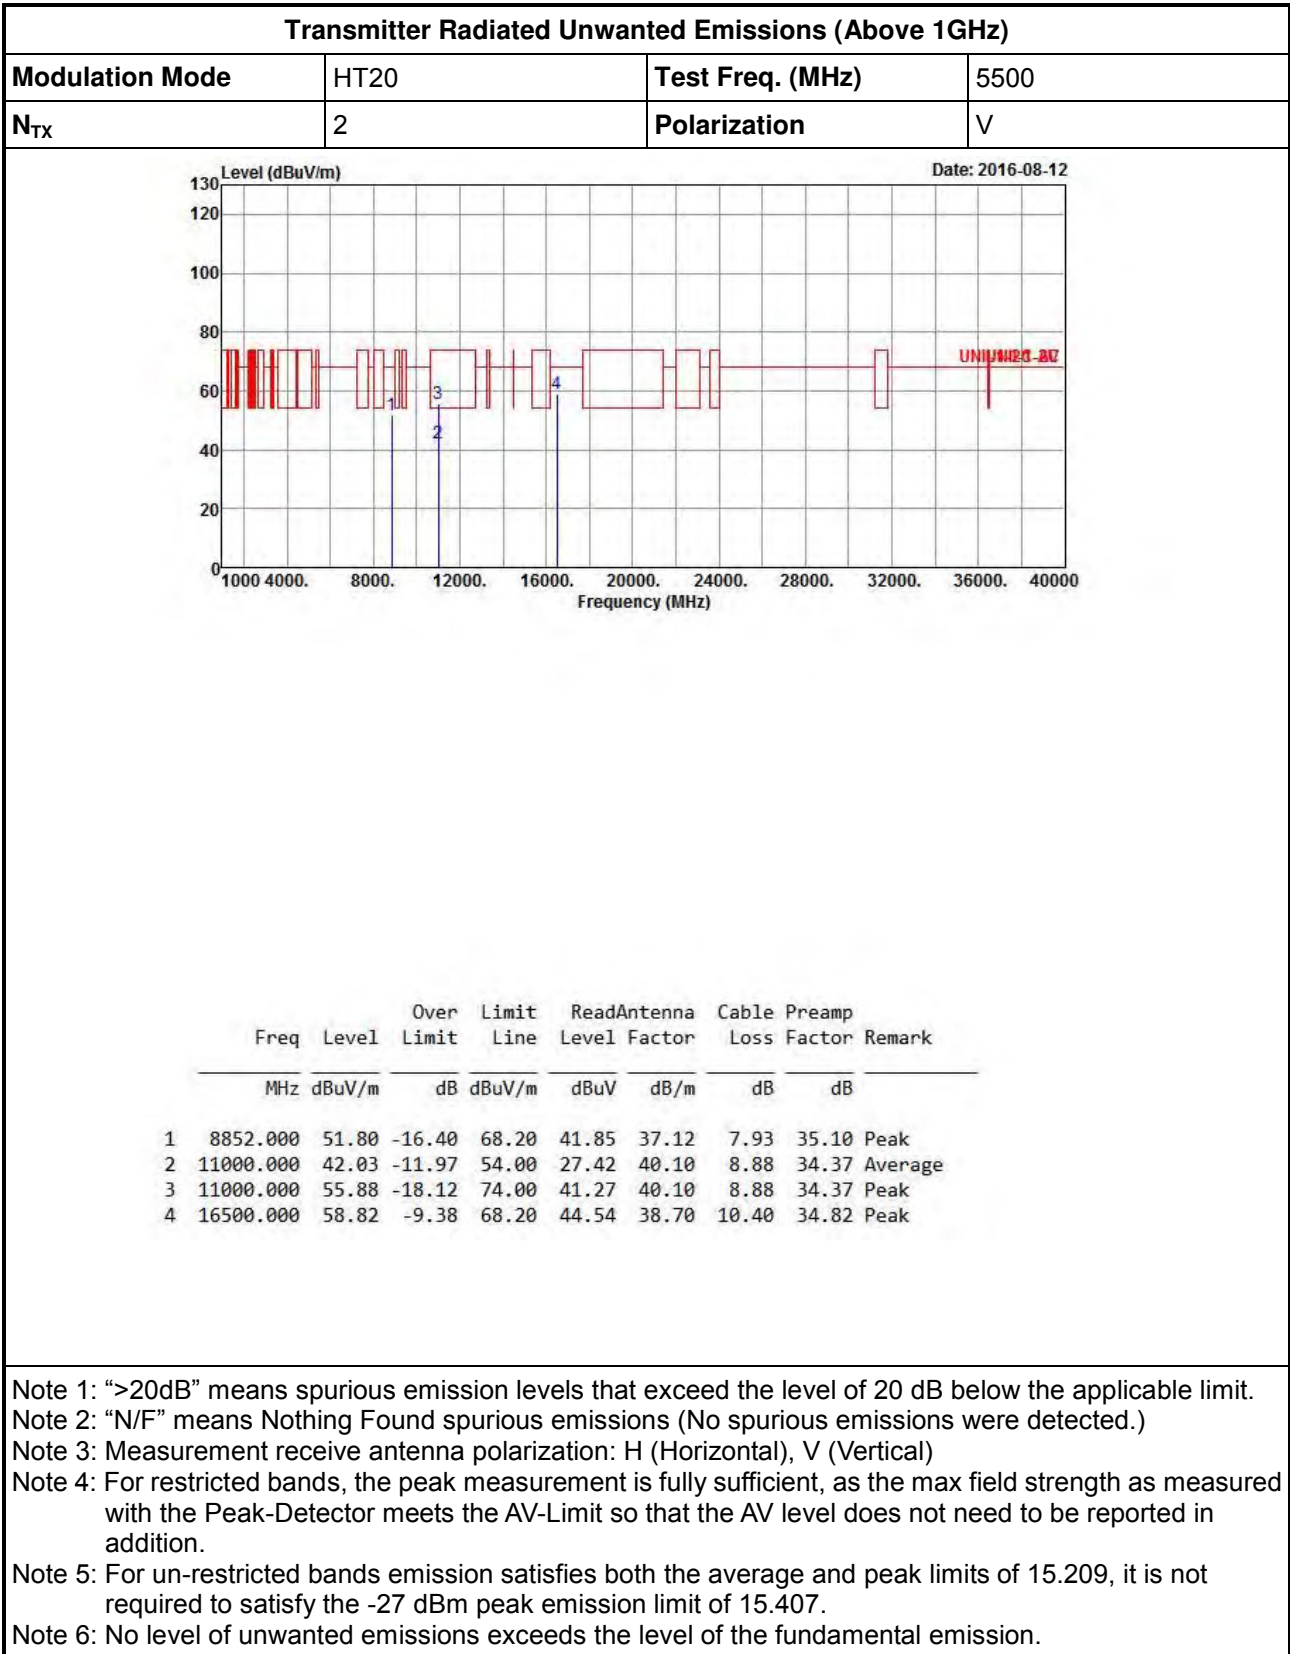


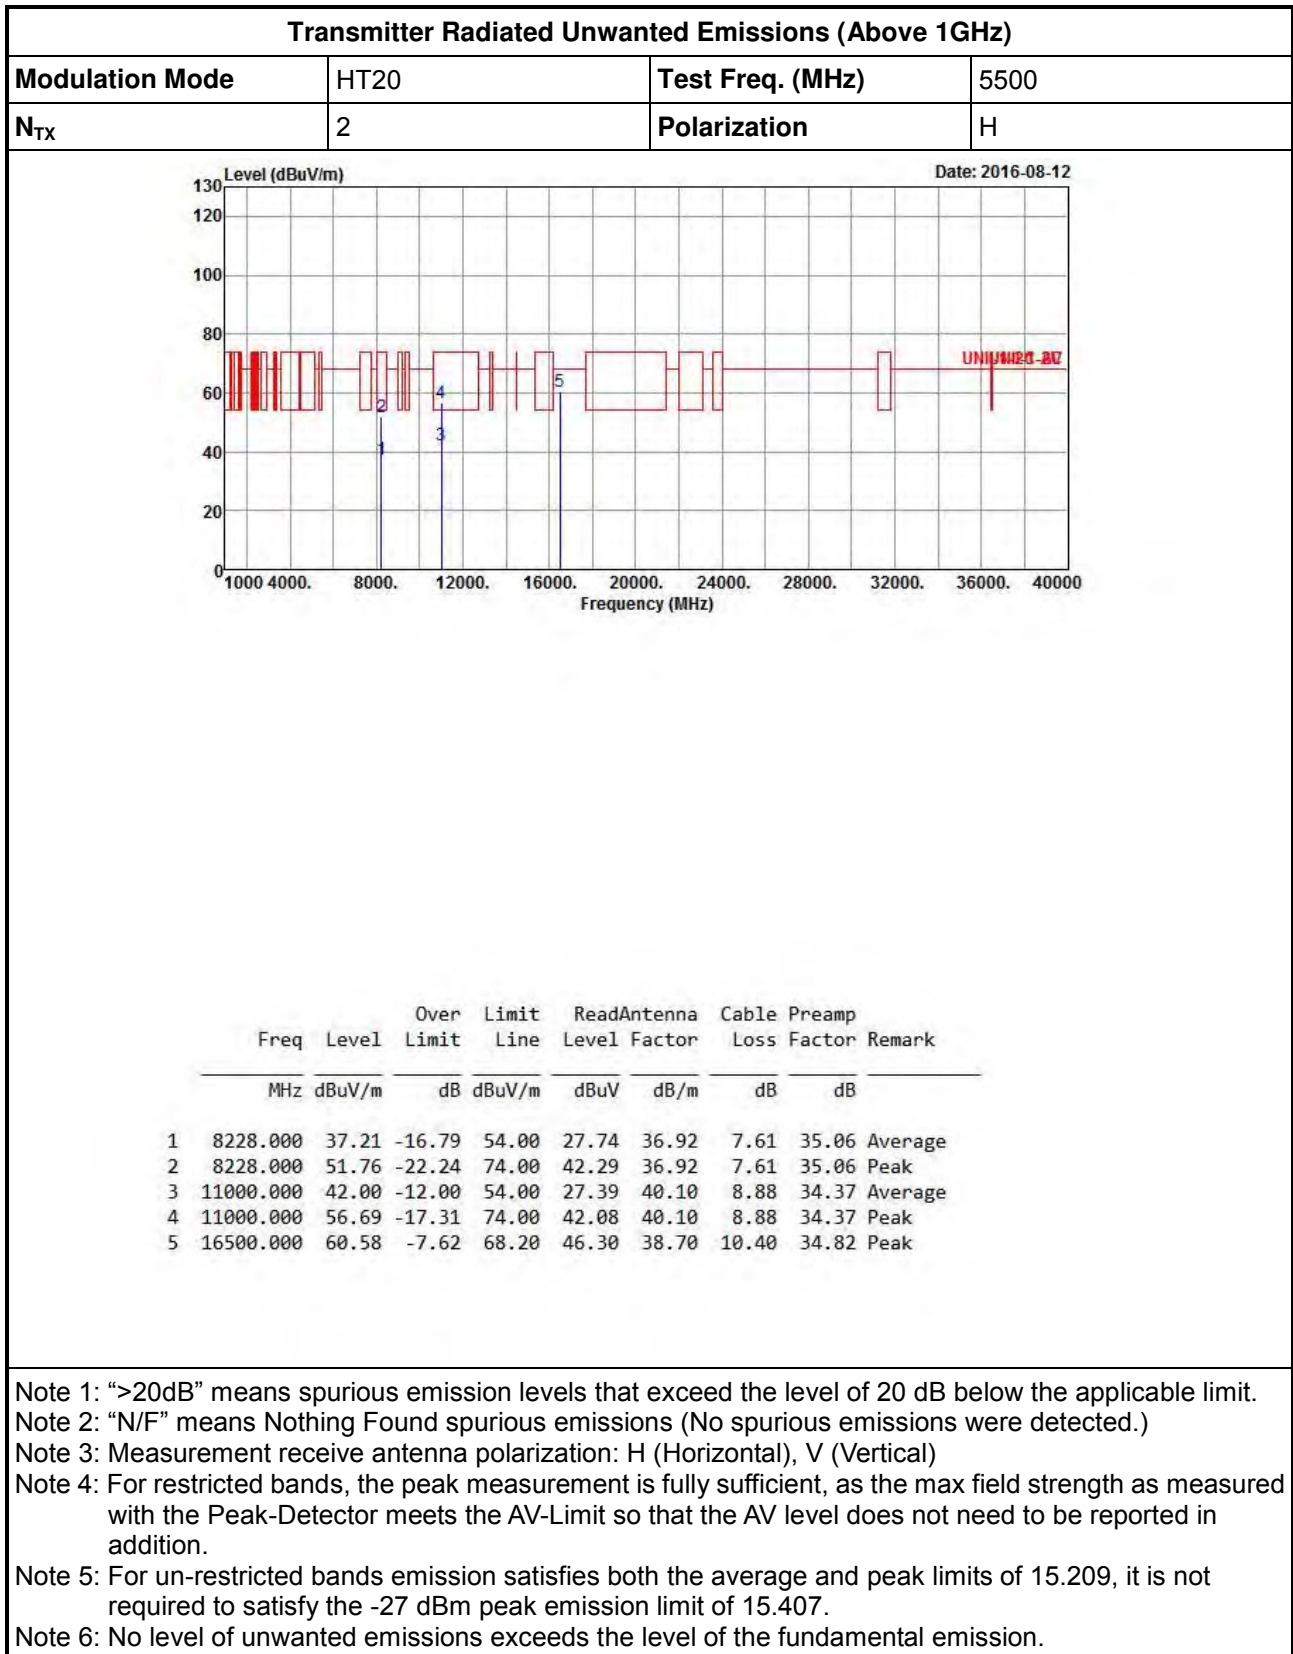


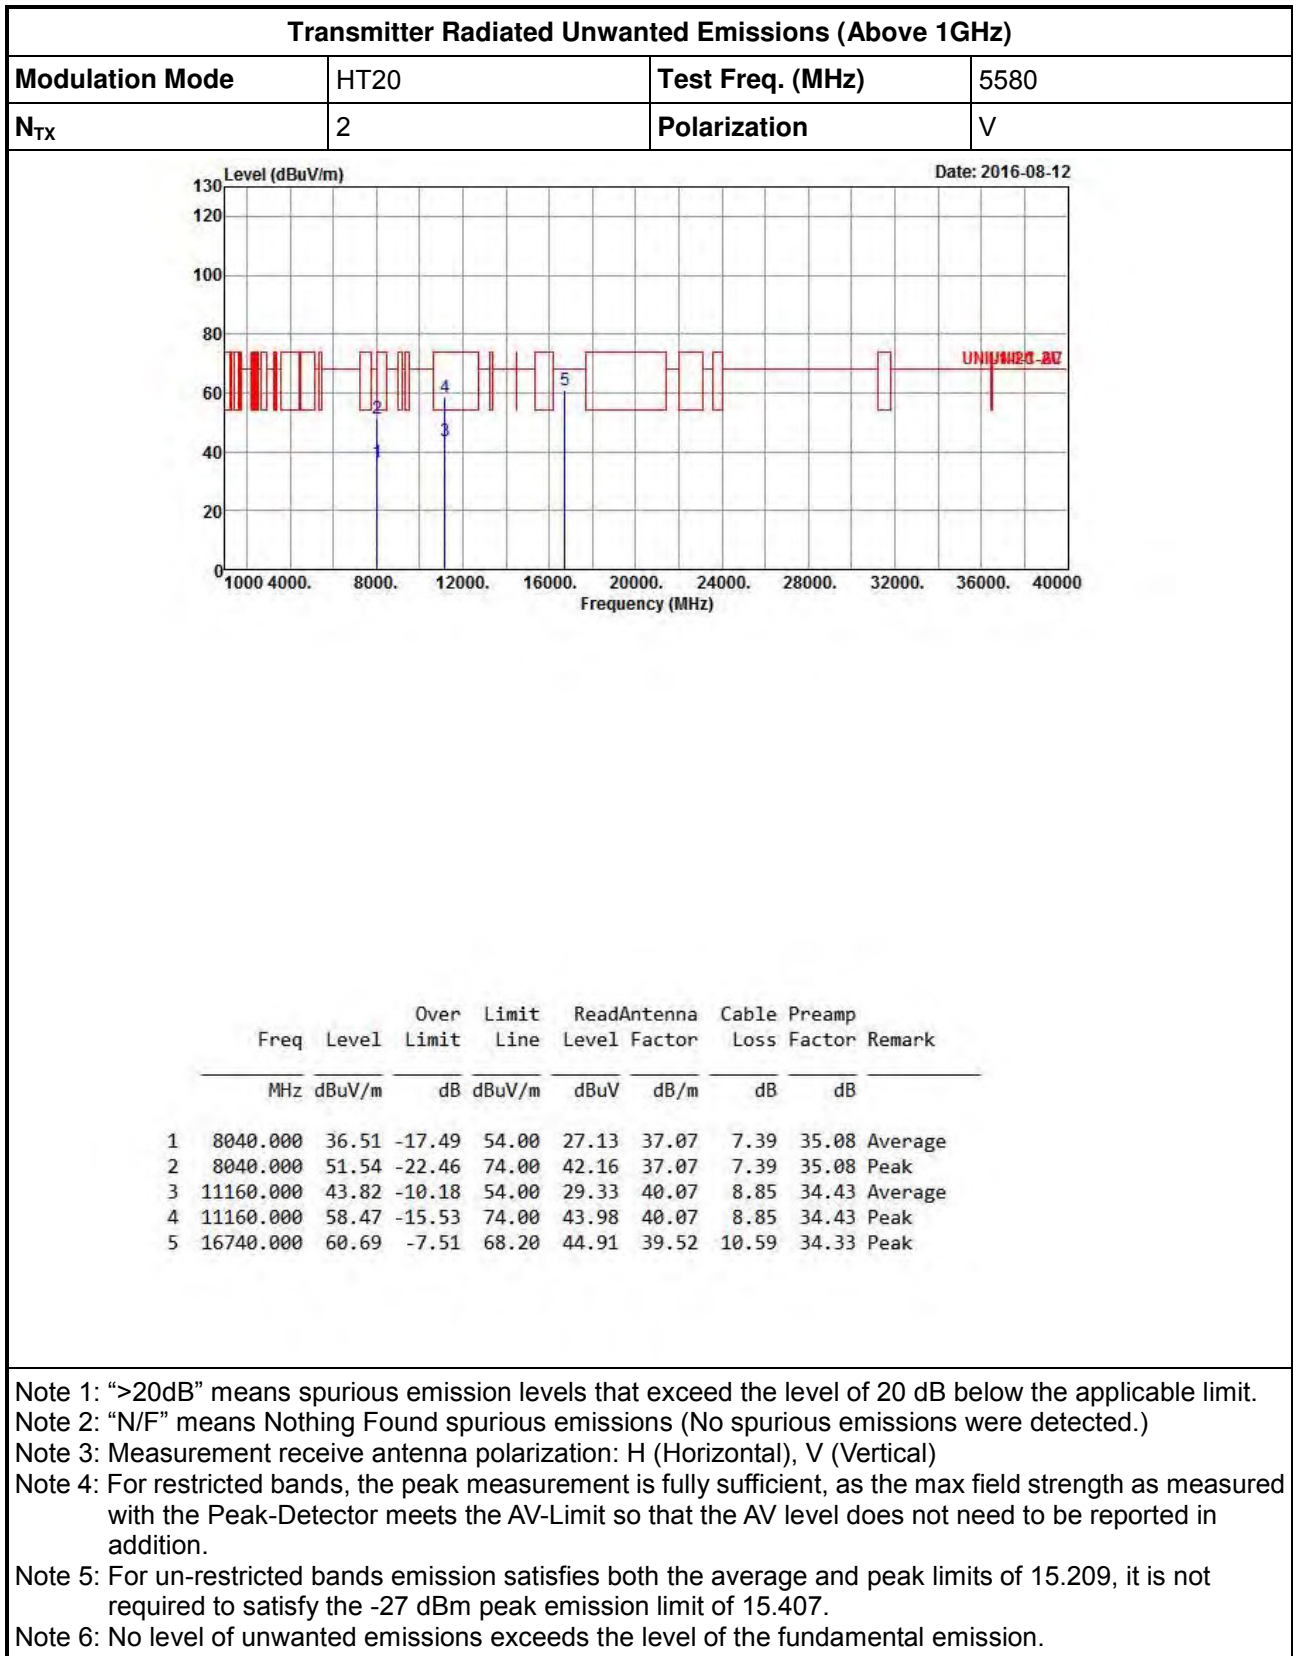





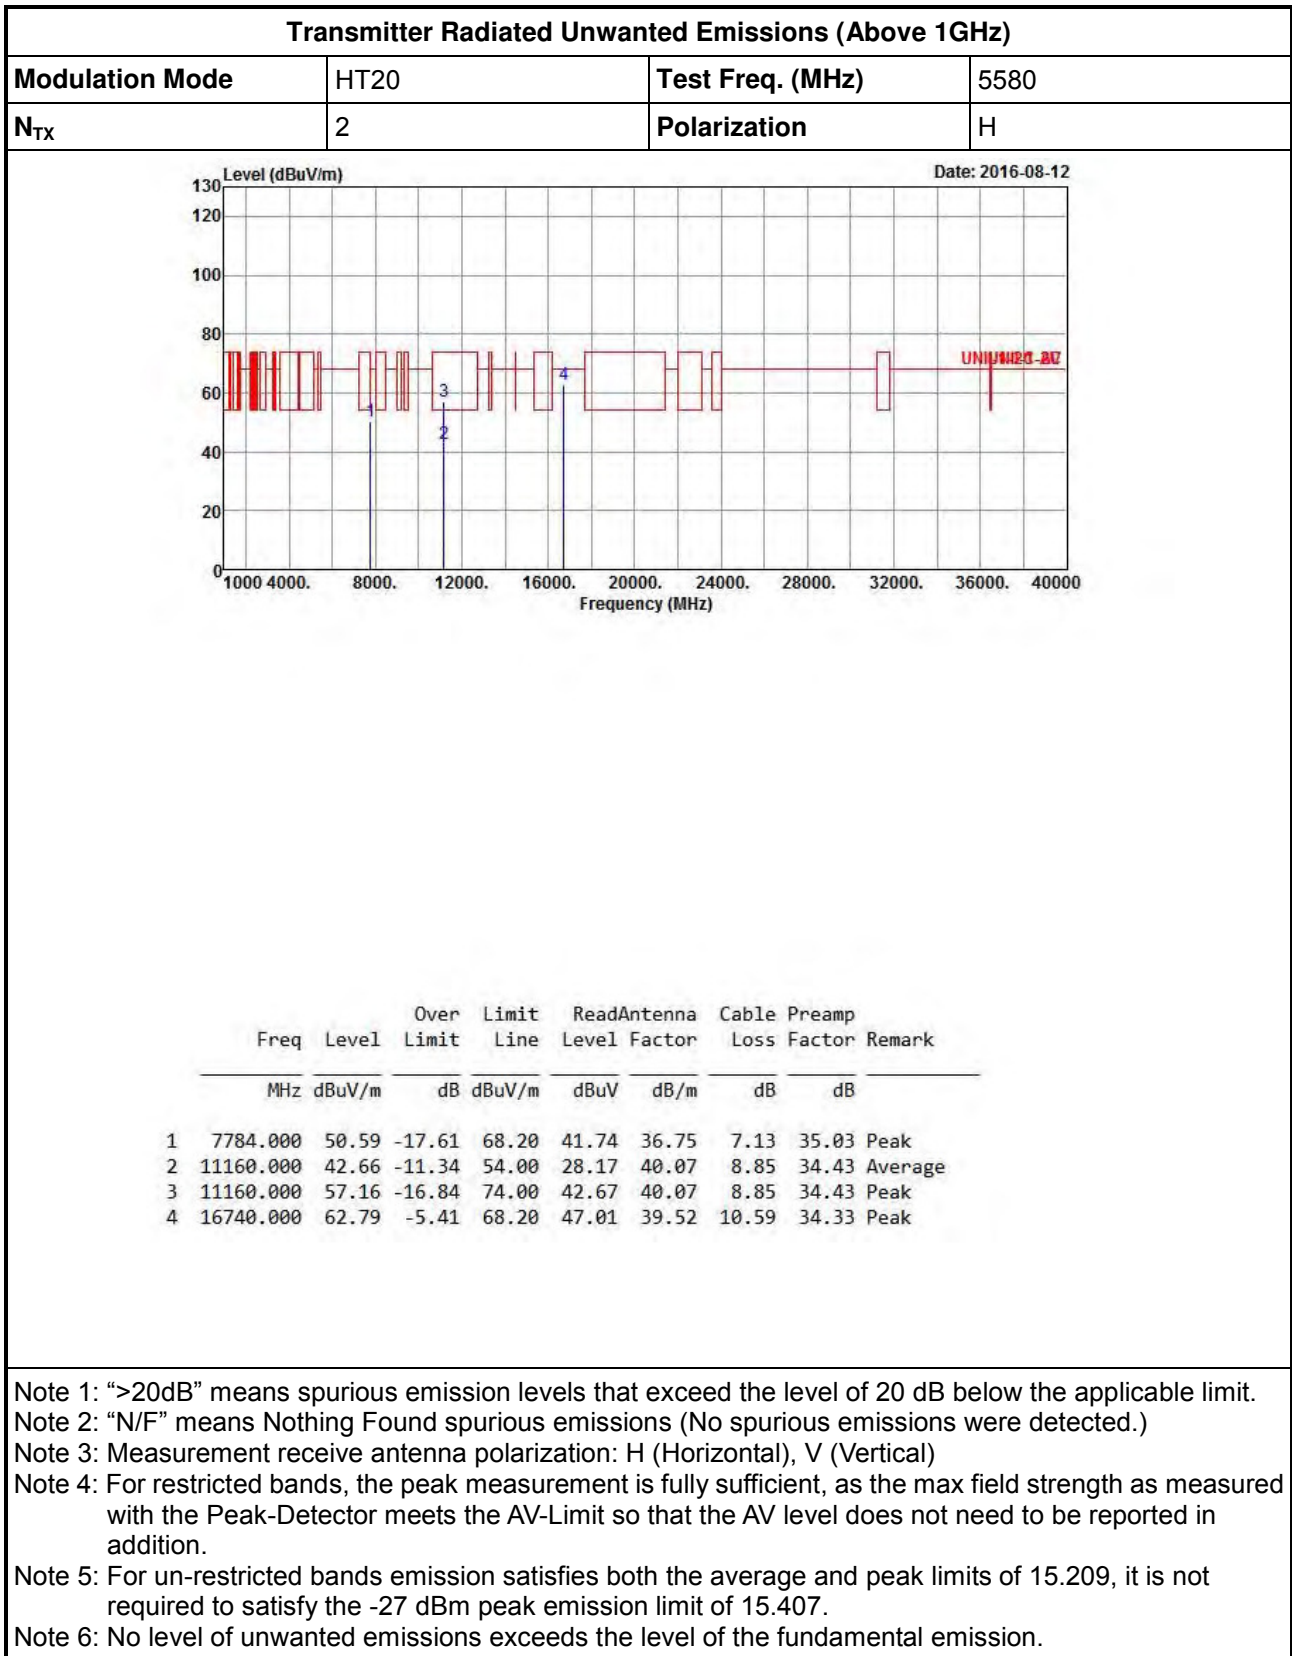

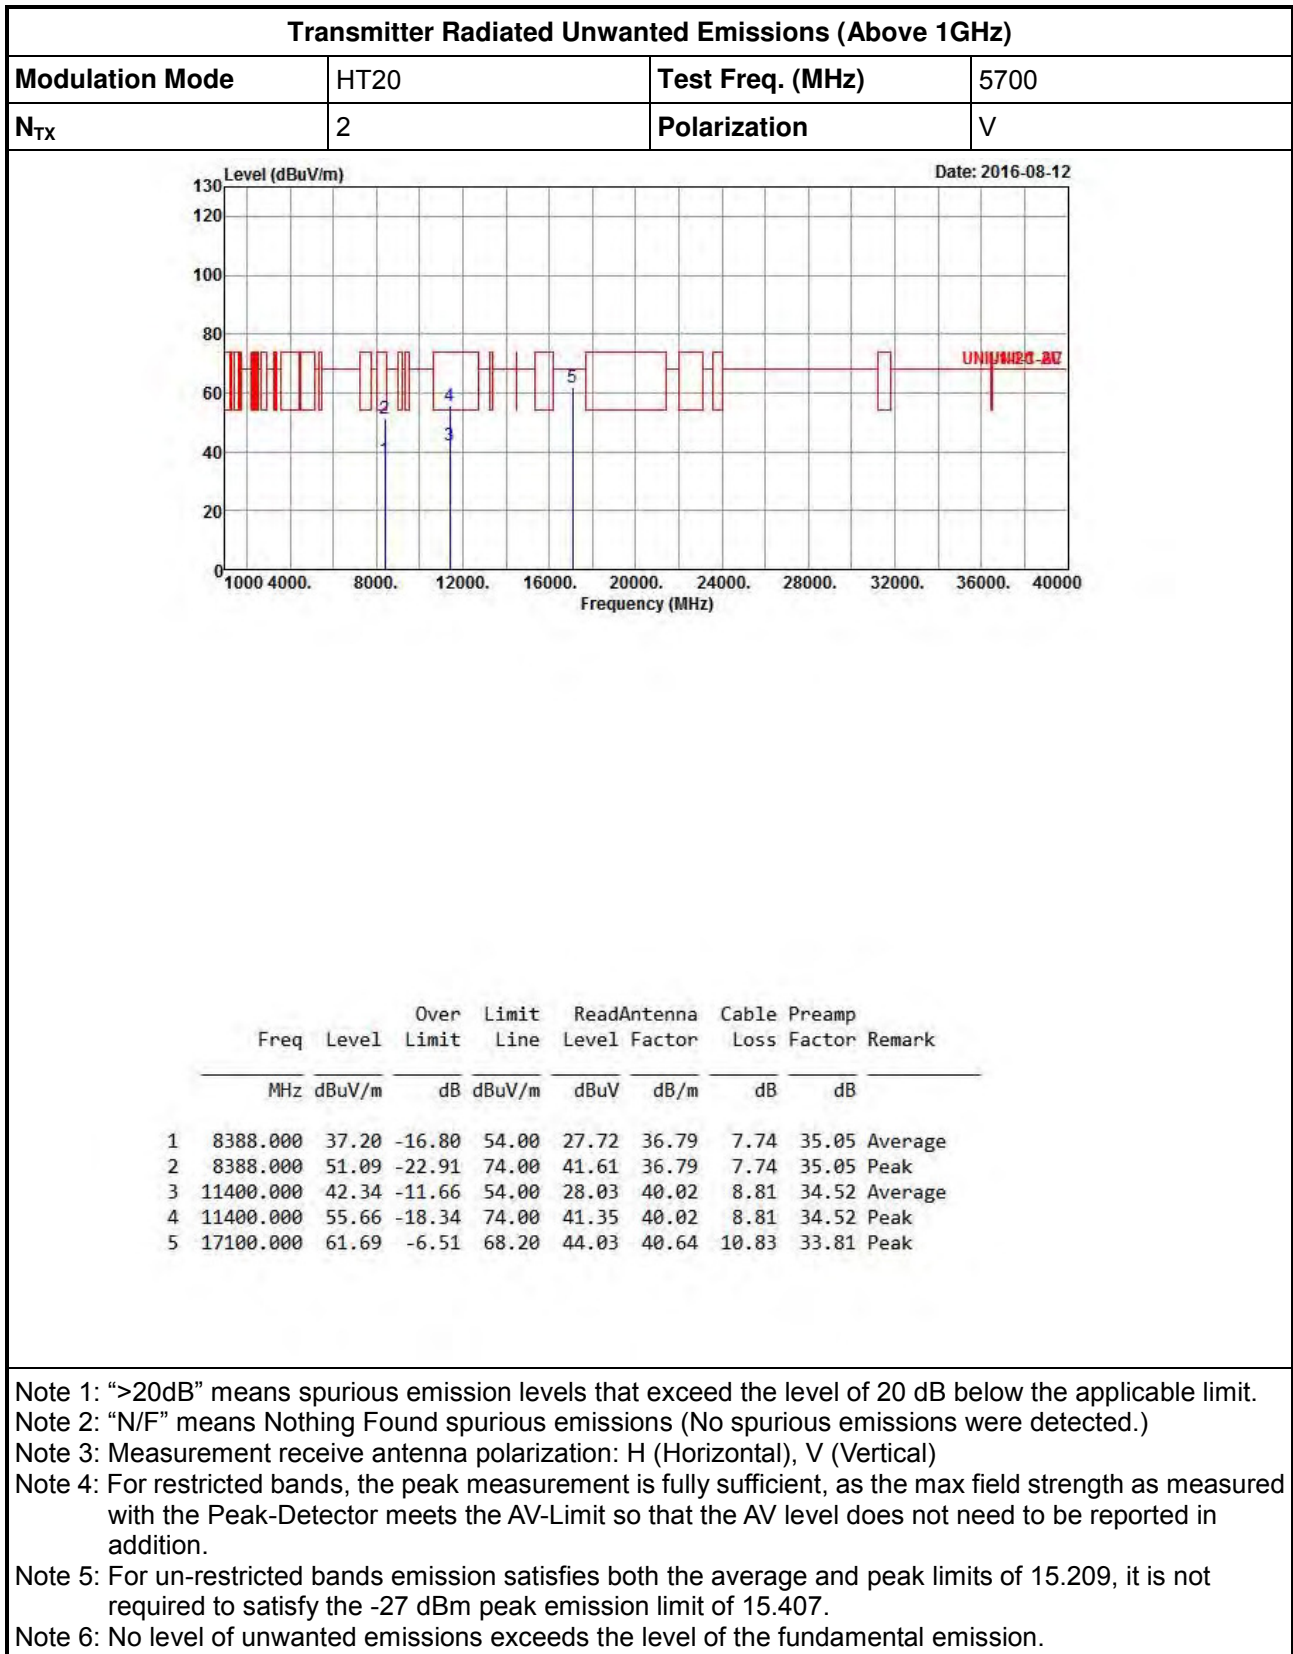


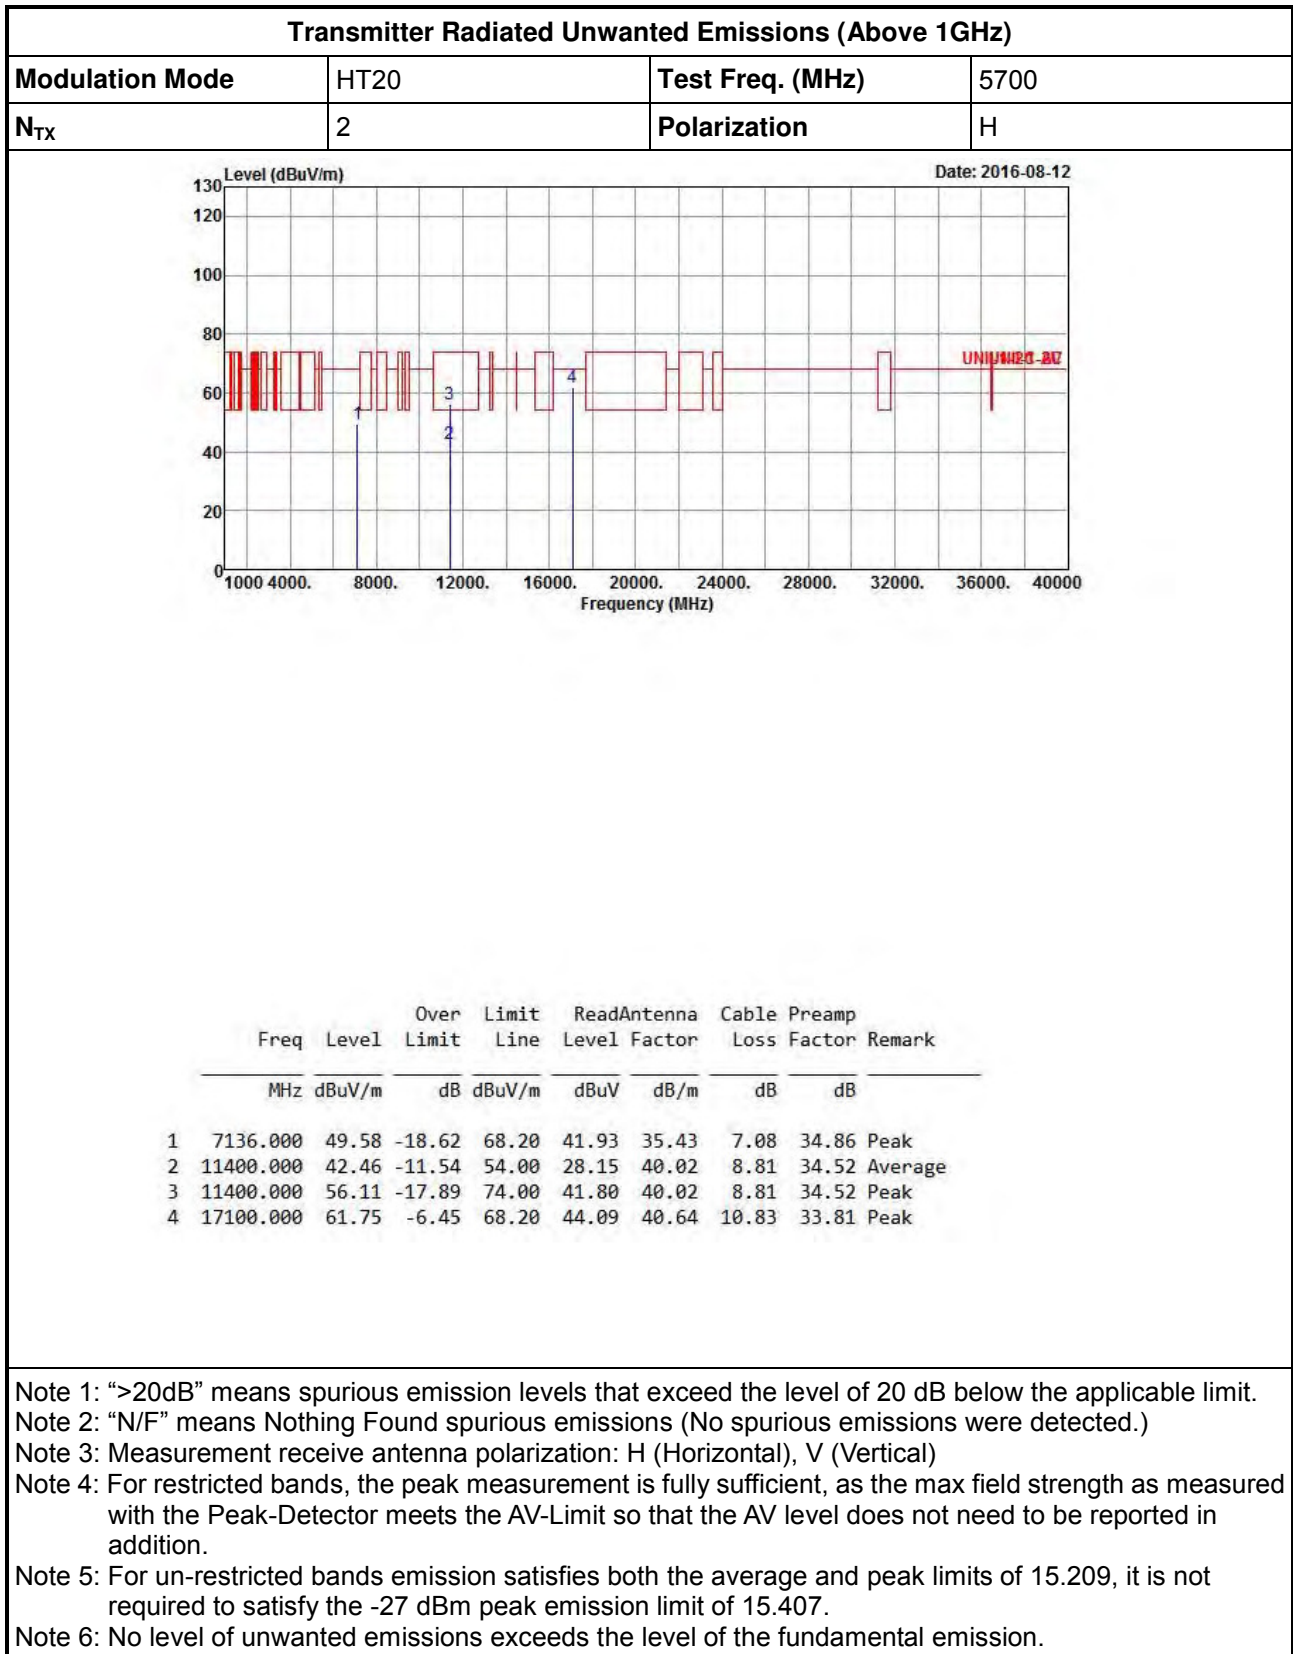


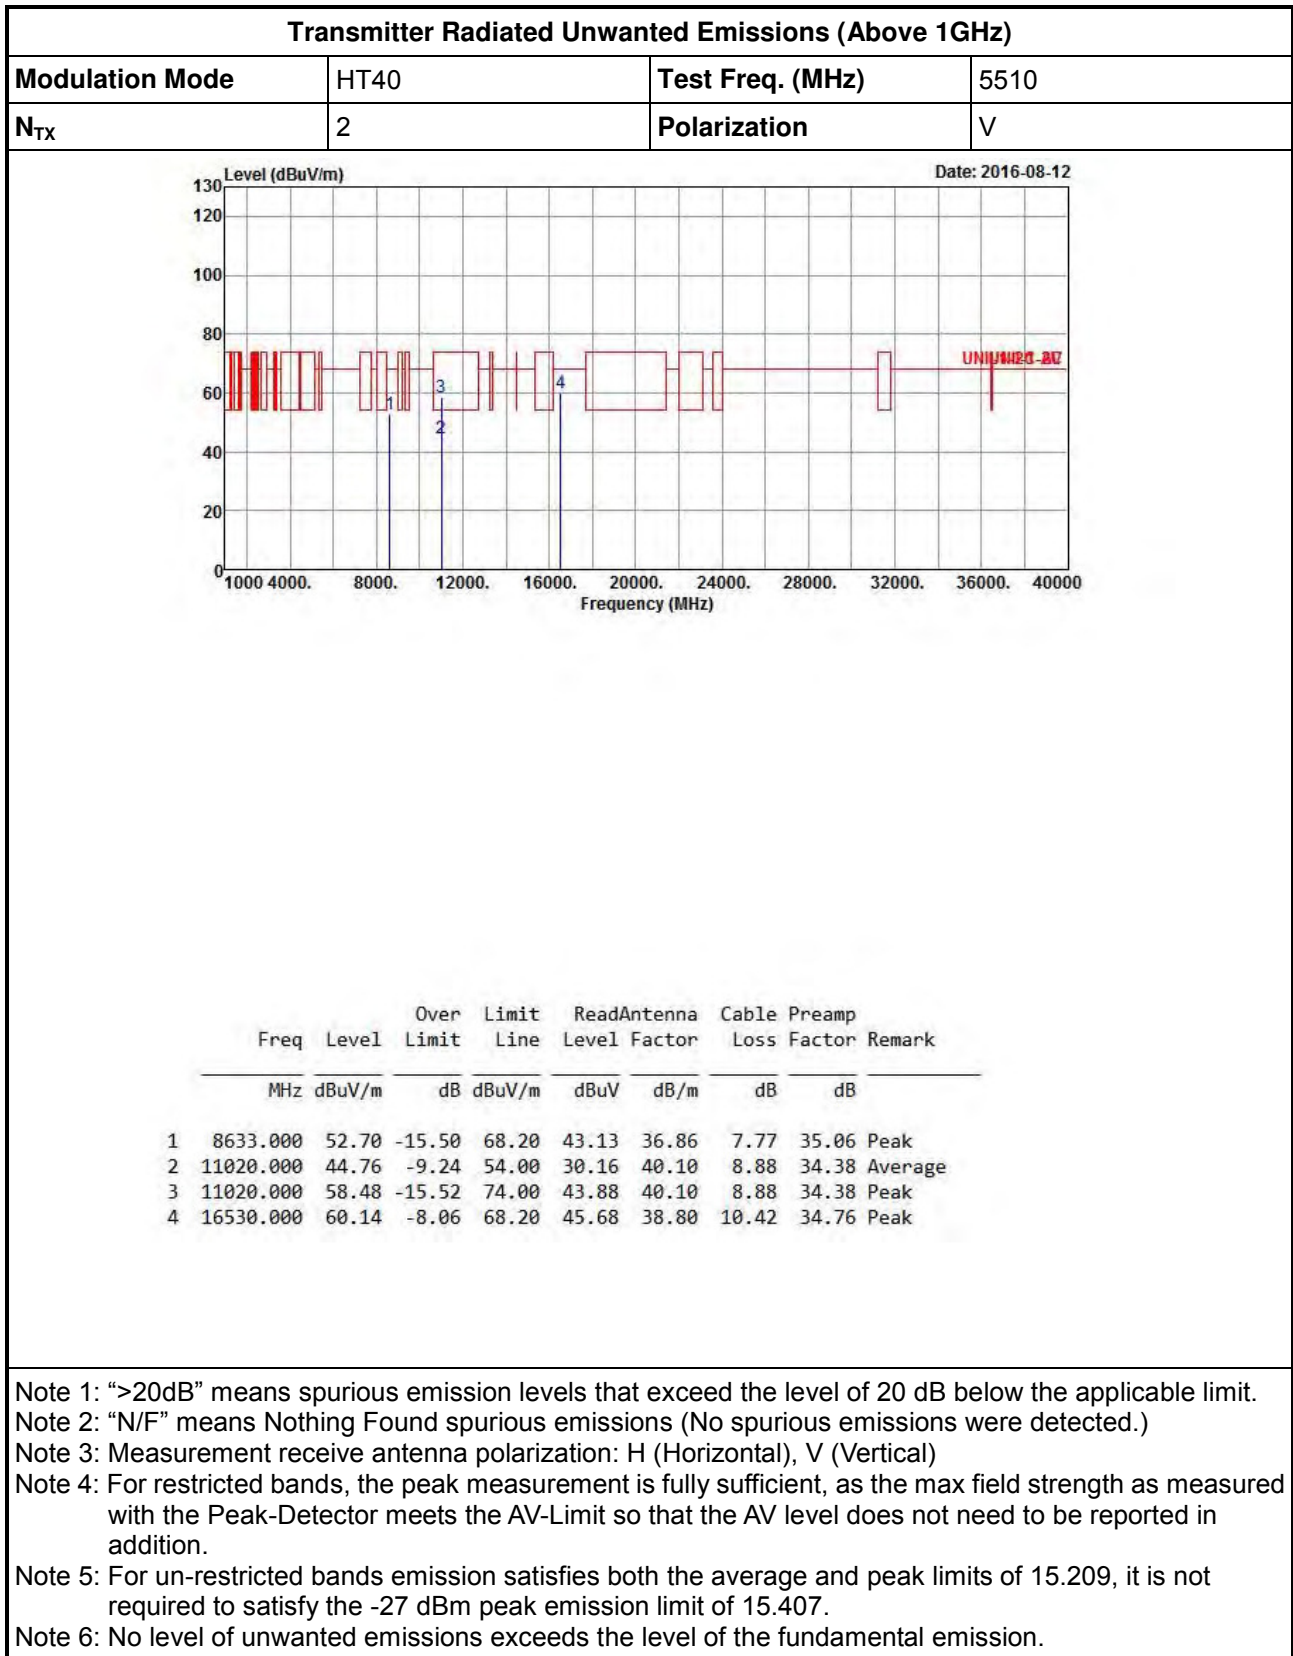


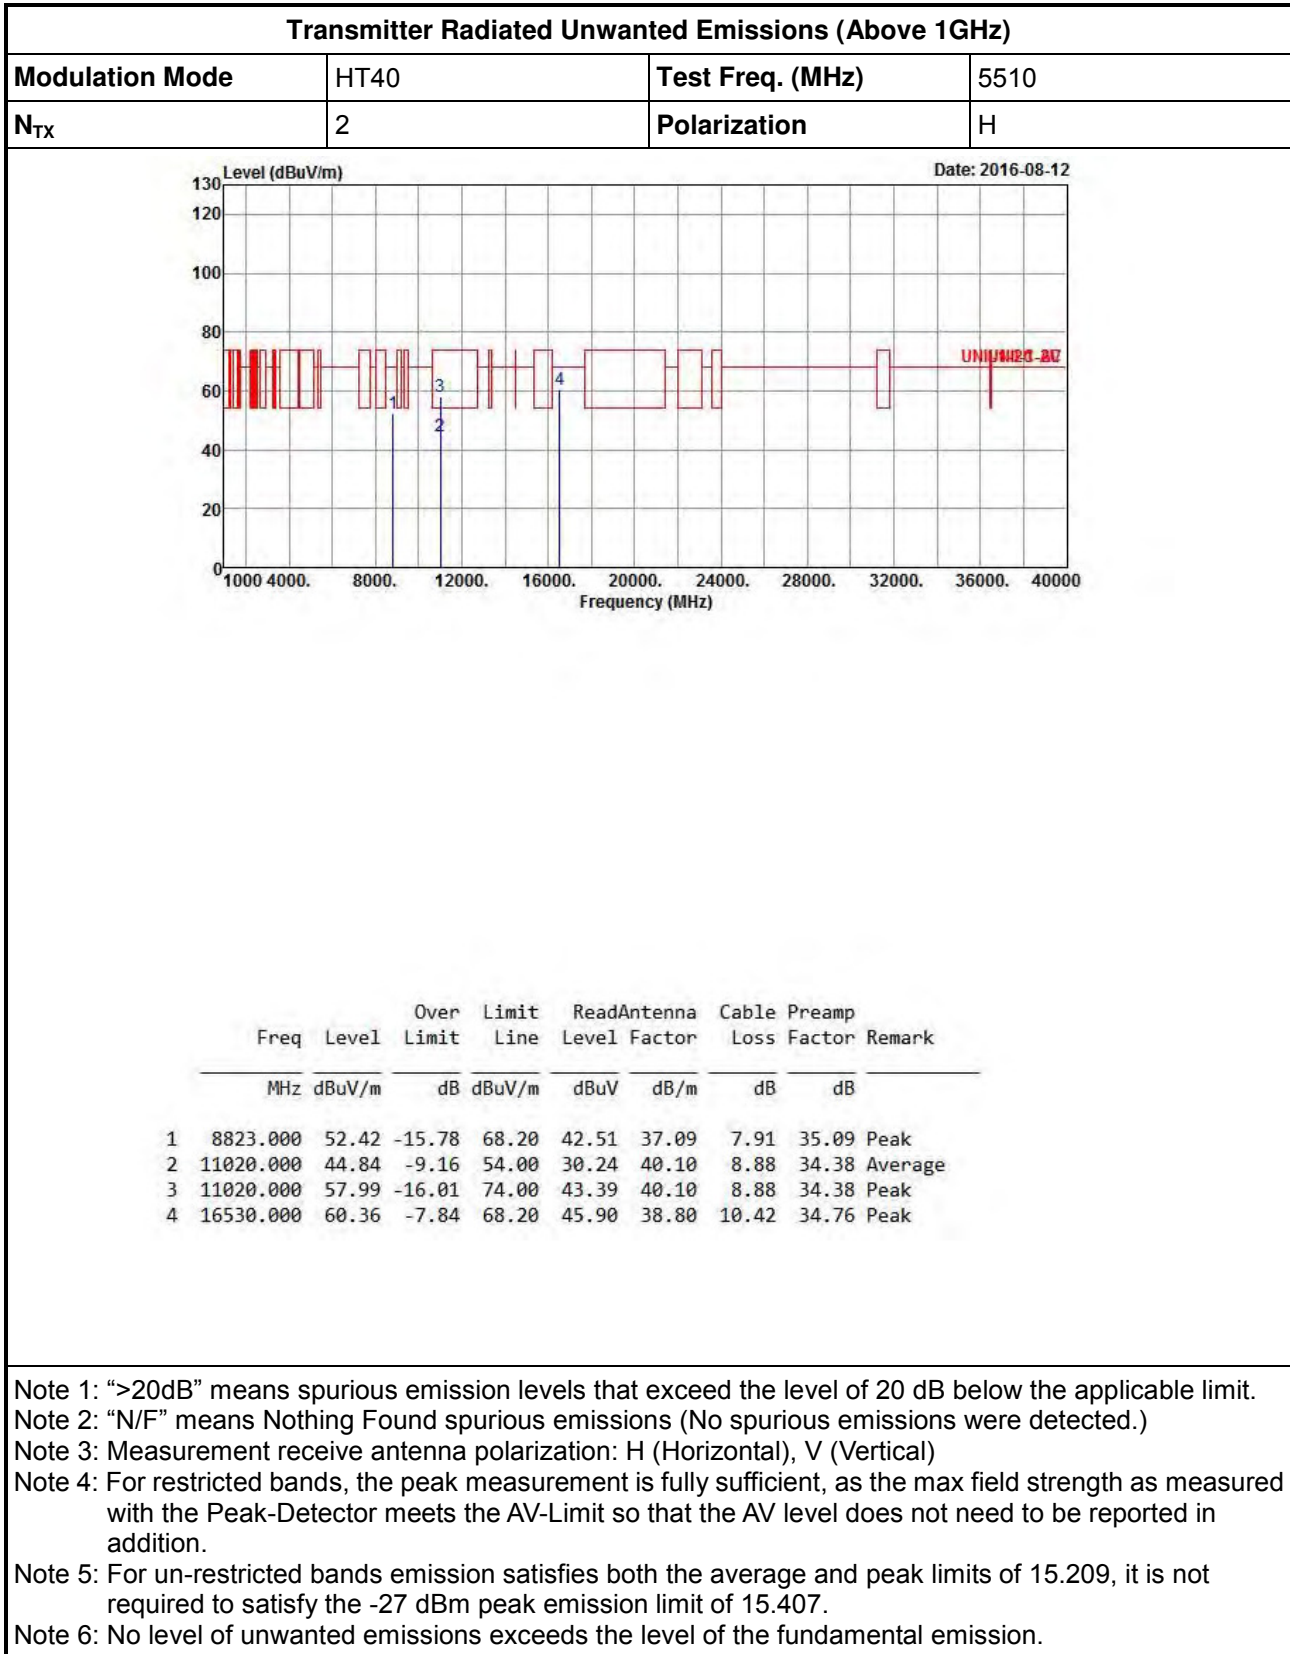




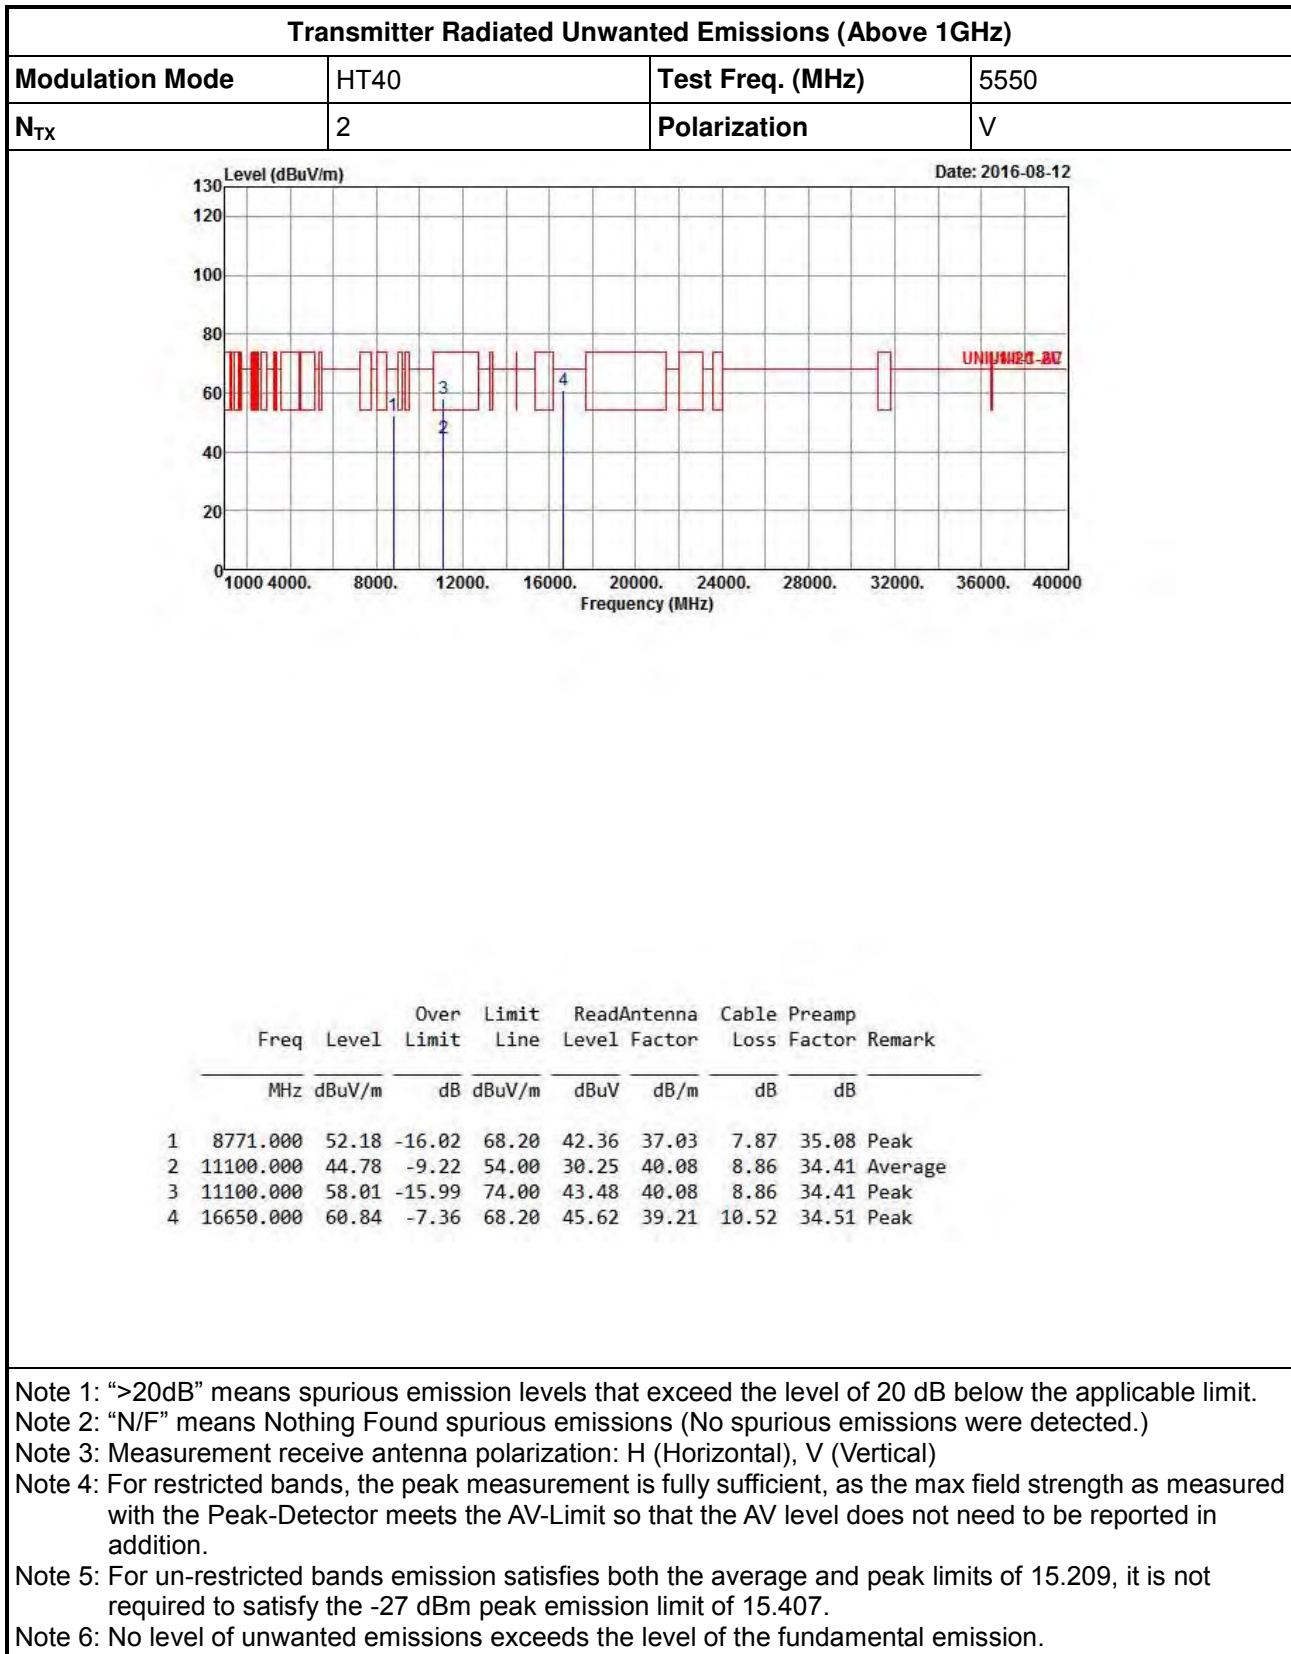

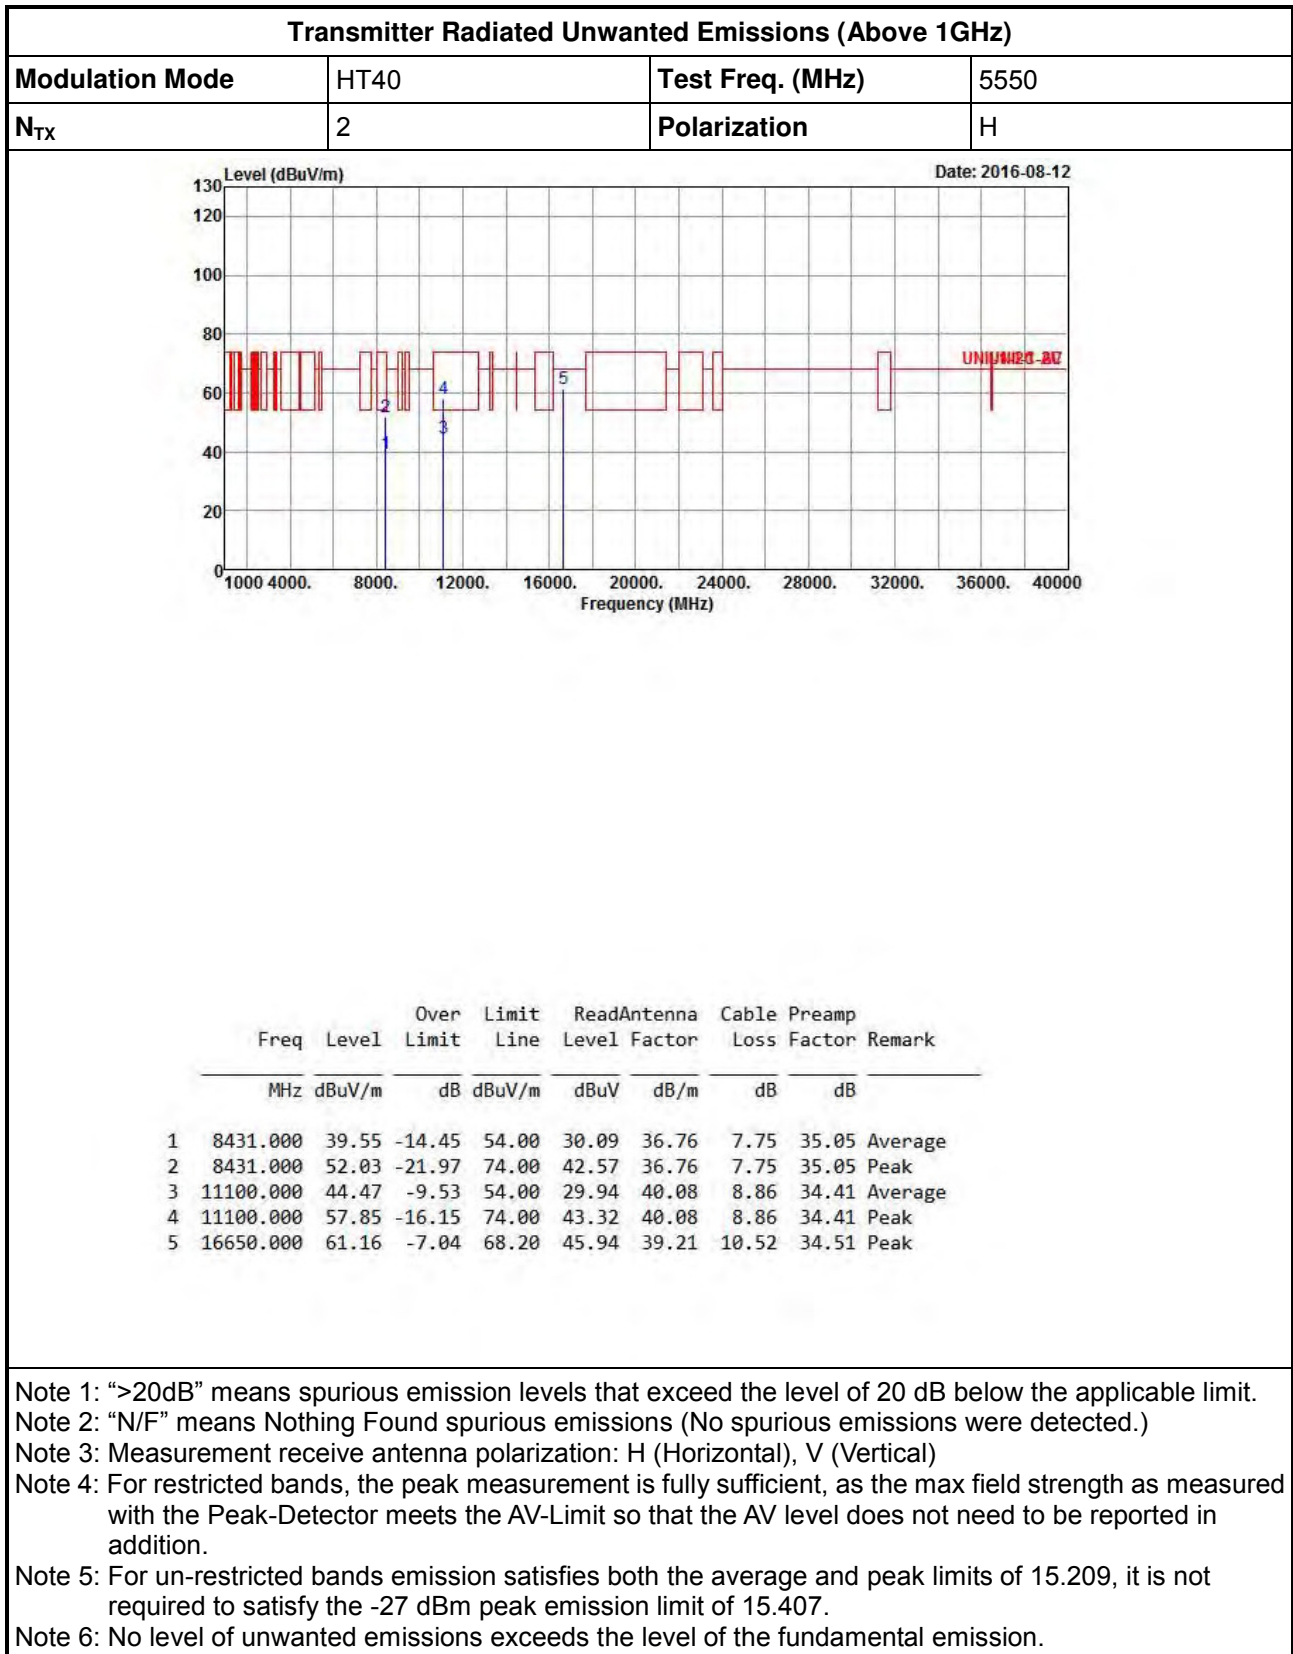

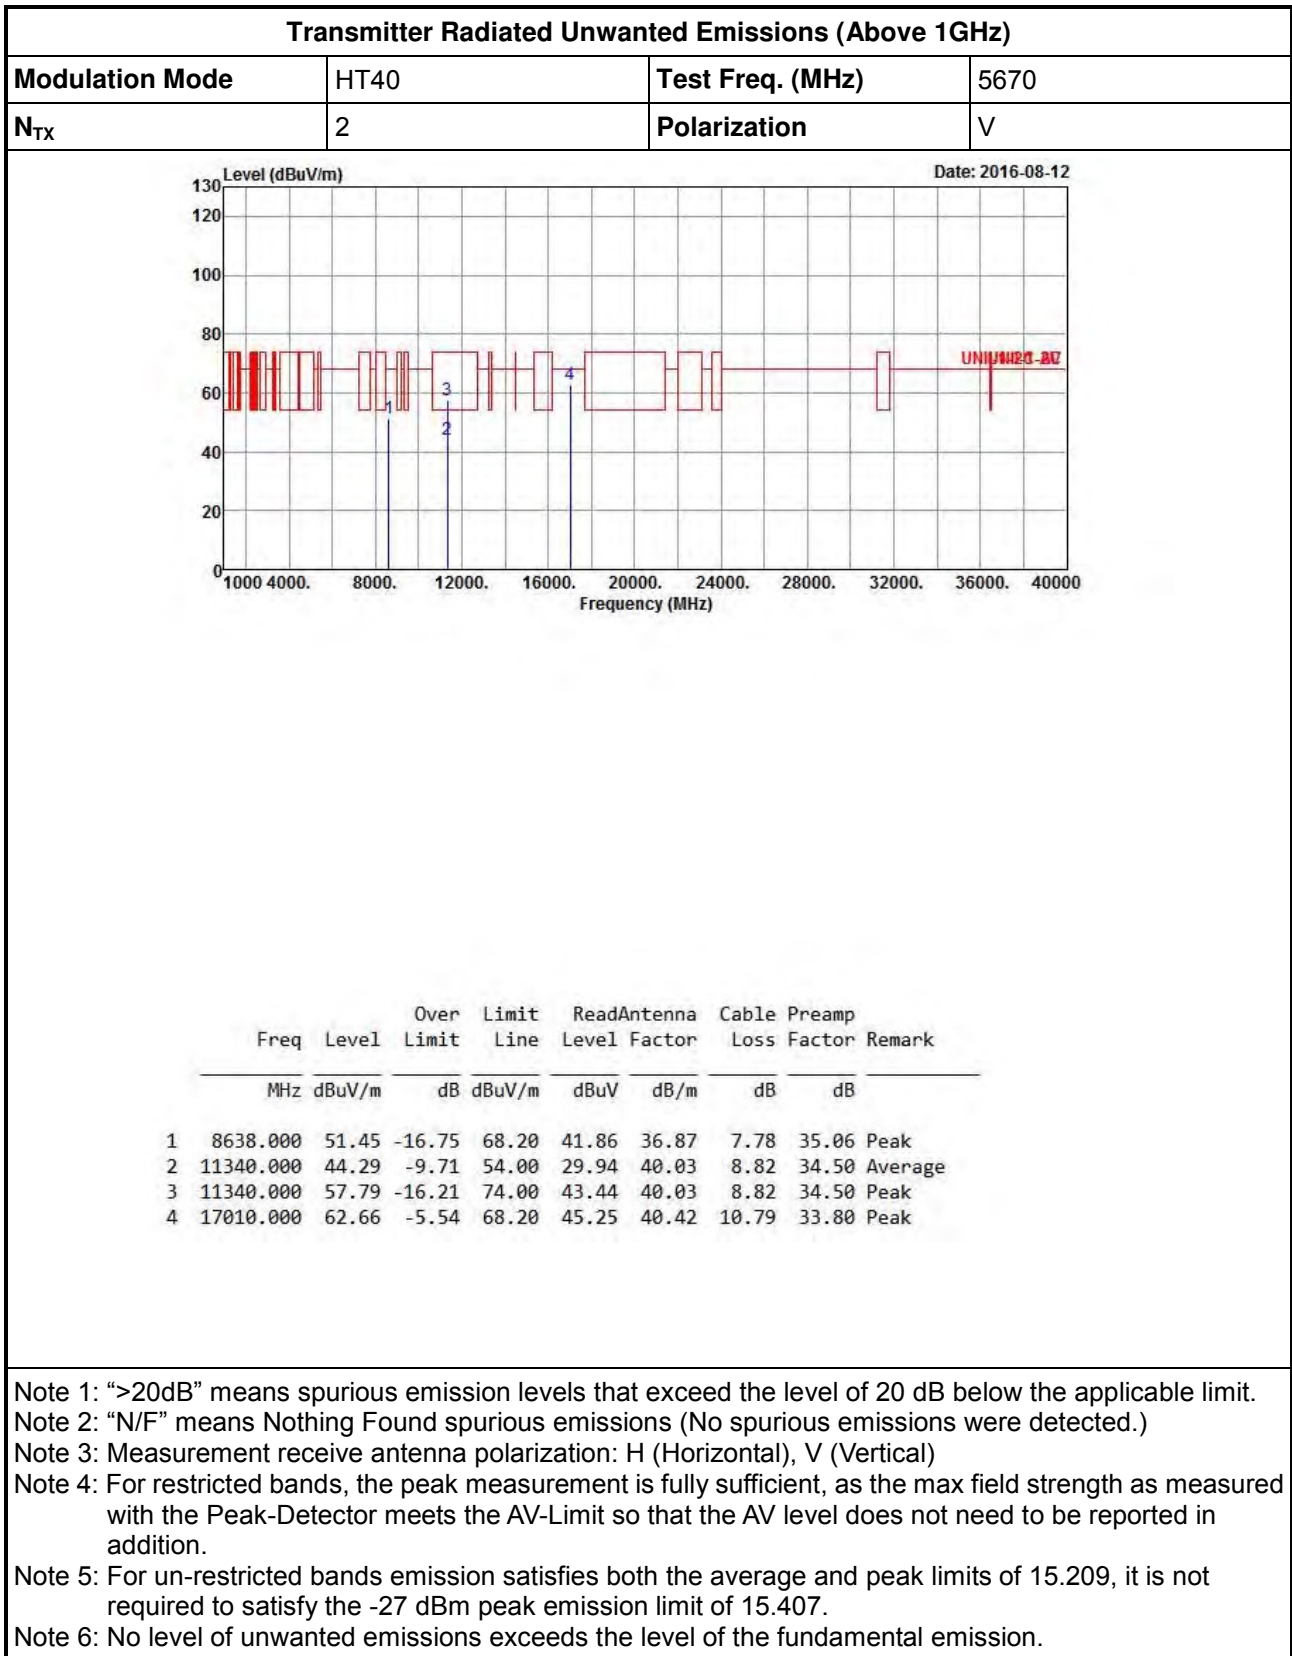


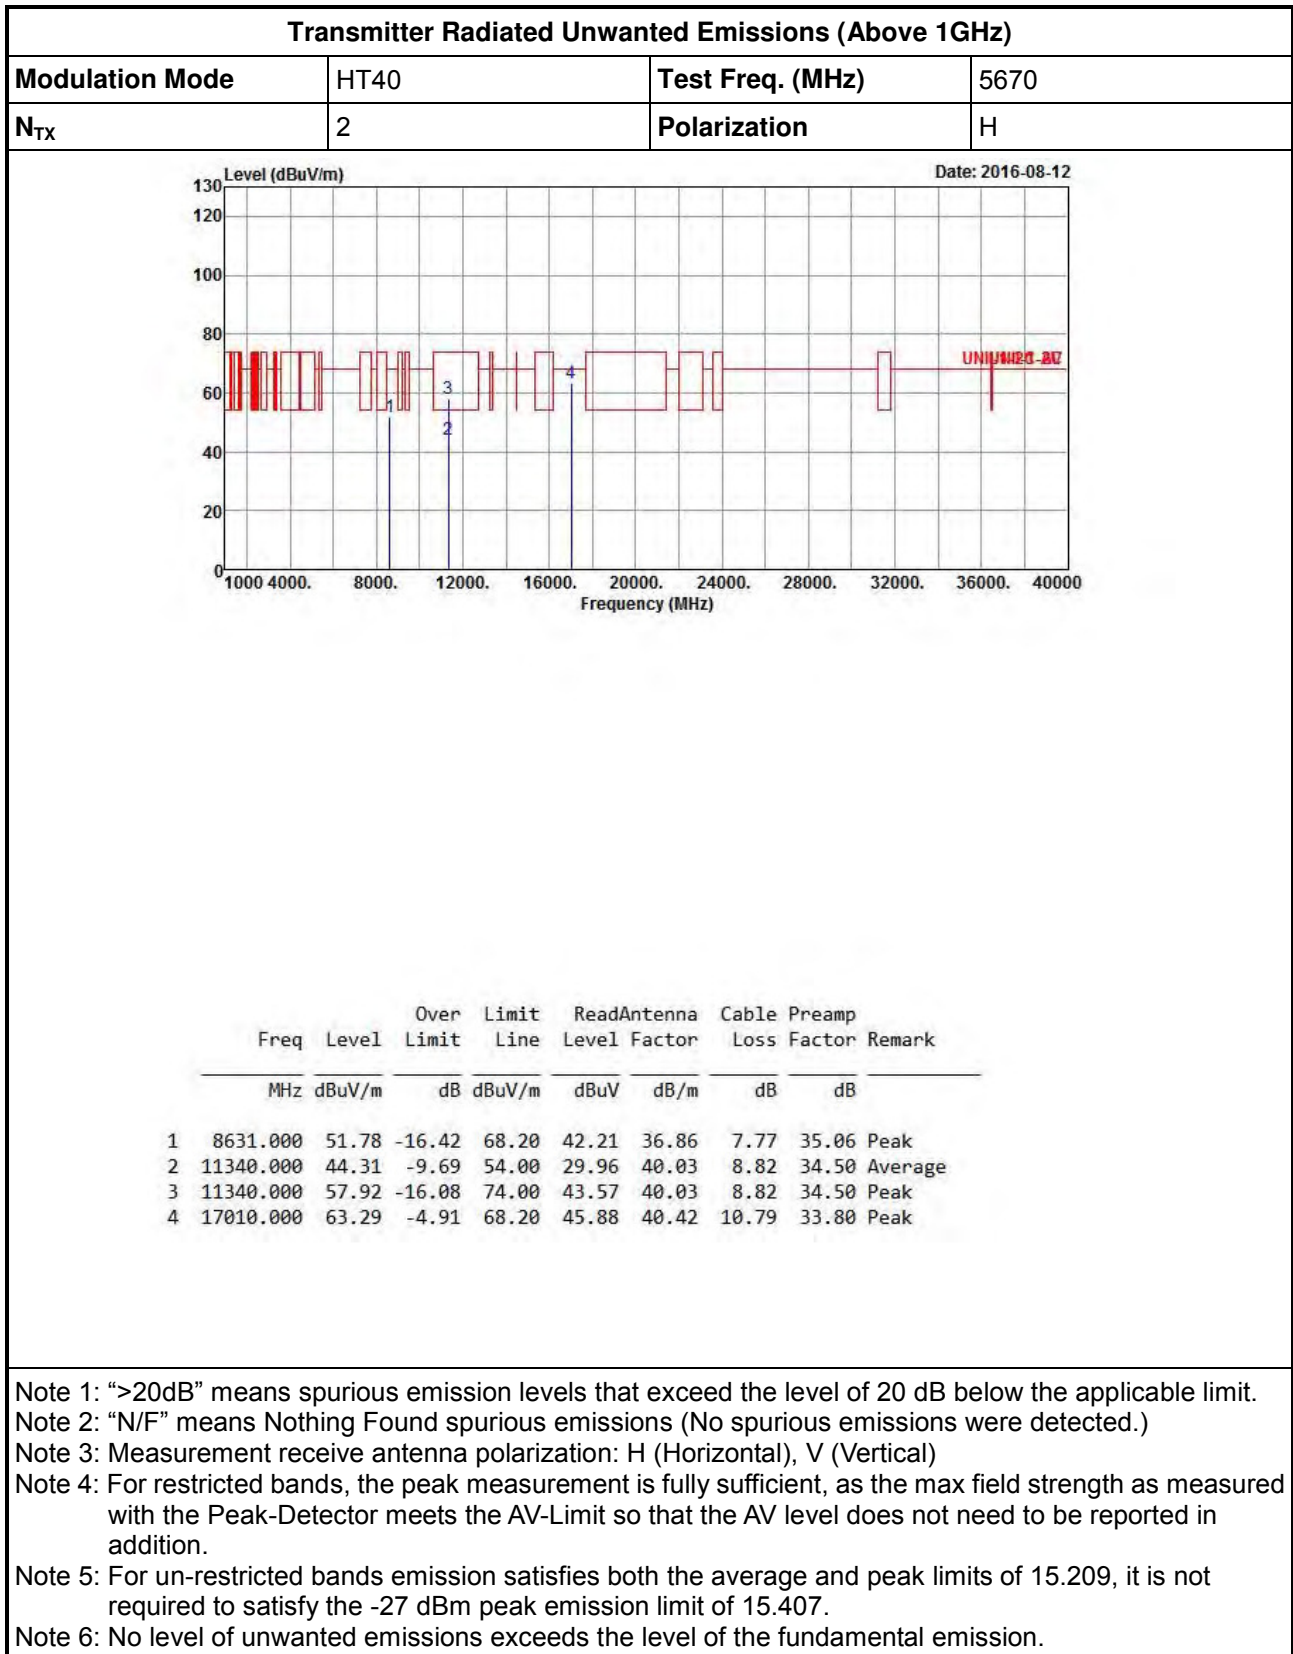



Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																		
Modulation Mode	VHT80	Test Freq. (MHz)	5530																																																															
N <sub>TX</sub>	2	Polarization	V																																																															
<div style="text-align: right;">Date: 2016-08-12</div>																																																																		
<table border="1"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8376.000</td> <td>37.68</td> <td>-16.32</td> <td>54.00</td> <td>28.20</td> <td>36.80</td> <td>7.73</td> <td>35.05 Average</td> </tr> <tr> <td>2</td> <td>8376.000</td> <td>52.25</td> <td>-21.75</td> <td>74.00</td> <td>42.77</td> <td>36.80</td> <td>7.73</td> <td>35.05 Peak</td> </tr> <tr> <td>3</td> <td>11060.000</td> <td>42.51</td> <td>-11.49</td> <td>54.00</td> <td>27.94</td> <td>40.09</td> <td>8.87</td> <td>34.39 Average</td> </tr> <tr> <td>4</td> <td>11060.000</td> <td>56.63</td> <td>-17.37</td> <td>74.00</td> <td>42.06</td> <td>40.09</td> <td>8.87</td> <td>34.39 Peak</td> </tr> <tr> <td>5</td> <td>16590.000</td> <td>60.66</td> <td>-7.54</td> <td>68.20</td> <td>45.82</td> <td>39.01</td> <td>10.47</td> <td>34.64 Peak</td> </tr> </tbody> </table>					Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		1	8376.000	37.68	-16.32	54.00	28.20	36.80	7.73	35.05 Average	2	8376.000	52.25	-21.75	74.00	42.77	36.80	7.73	35.05 Peak	3	11060.000	42.51	-11.49	54.00	27.94	40.09	8.87	34.39 Average	4	11060.000	56.63	-17.37	74.00	42.06	40.09	8.87	34.39 Peak	5	16590.000	60.66	-7.54	68.20	45.82	39.01	10.47	34.64 Peak
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark																																																										
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB																																																											
1	8376.000	37.68	-16.32	54.00	28.20	36.80	7.73	35.05 Average																																																										
2	8376.000	52.25	-21.75	74.00	42.77	36.80	7.73	35.05 Peak																																																										
3	11060.000	42.51	-11.49	54.00	27.94	40.09	8.87	34.39 Average																																																										
4	11060.000	56.63	-17.37	74.00	42.06	40.09	8.87	34.39 Peak																																																										
5	16590.000	60.66	-7.54	68.20	45.82	39.01	10.47	34.64 Peak																																																										
<p>Note 1: "&gt;20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.            Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)            Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)            Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.            Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.            Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</p>																																																																		




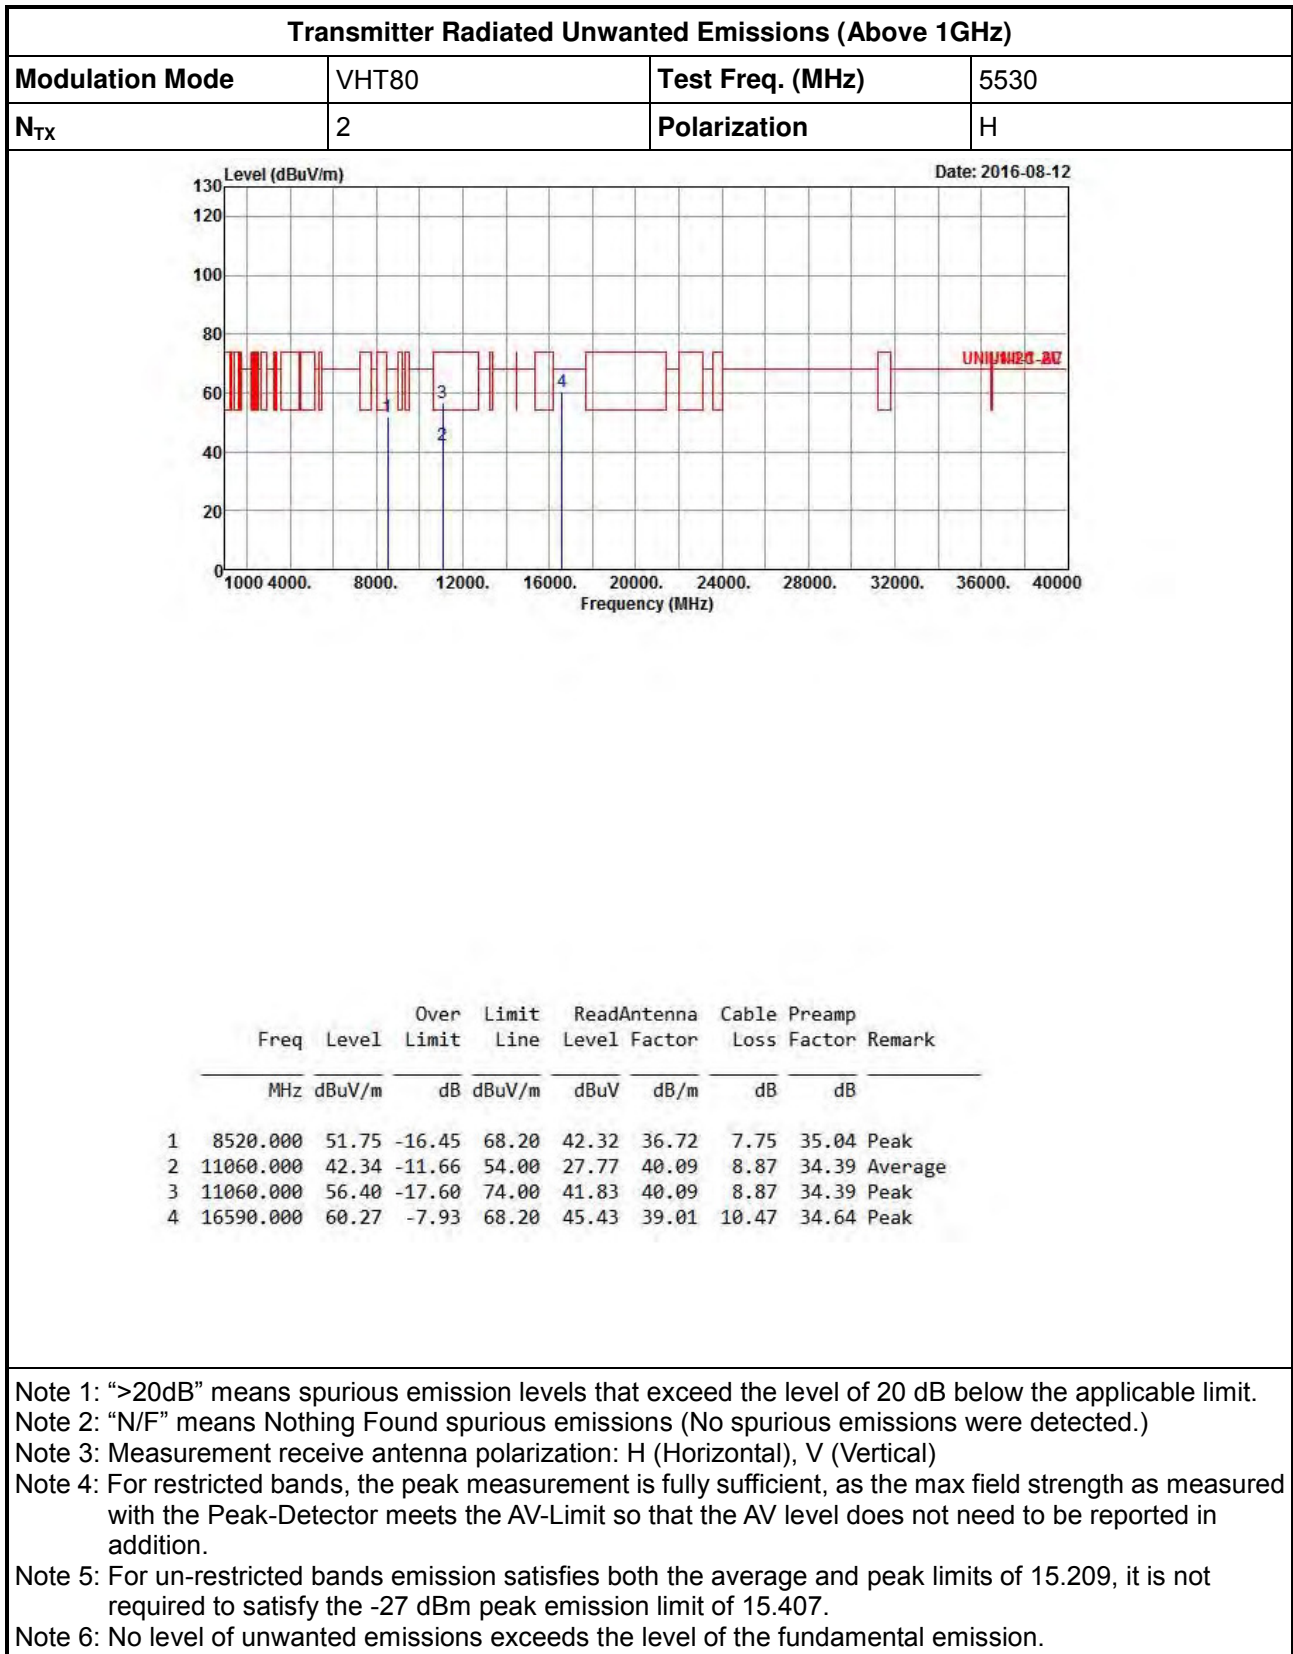



Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5725-5850MHz

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11a	Test Freq. (MHz)	5745
N <sub>TX</sub>	2	Polarization	V

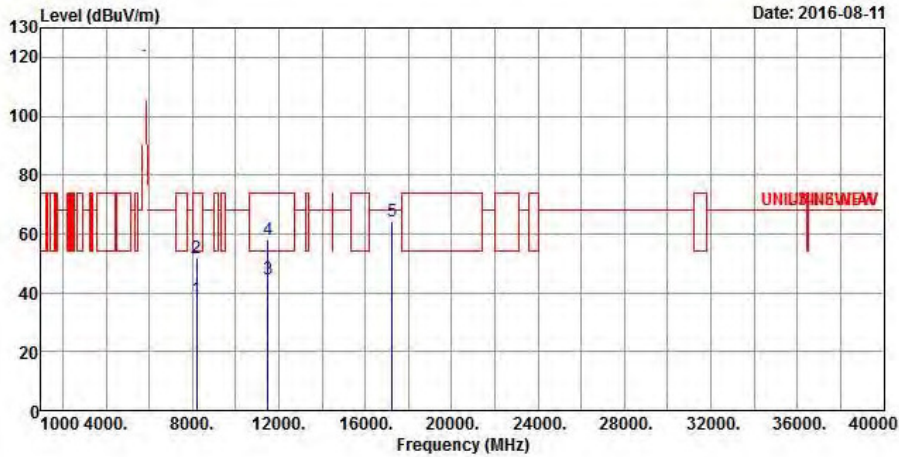


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8184.000	37.73	-16.27	54.00	28.28	36.95	7.57	35.07	Average
2	8184.000	52.00	-22.00	74.00	42.55	36.95	7.57	35.07	Peak
3	11490.000	44.44	-9.56	54.00	30.21	40.00	8.79	34.56	Average
4	11490.000	58.07	-15.93	74.00	43.84	40.00	8.79	34.56	Peak
5	17235.000	64.36	-3.84	68.20	46.32	40.96	10.89	33.81	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	11a	Test Freq. (MHz)	5745
N <sub>TX</sub>	2	Polarization	H

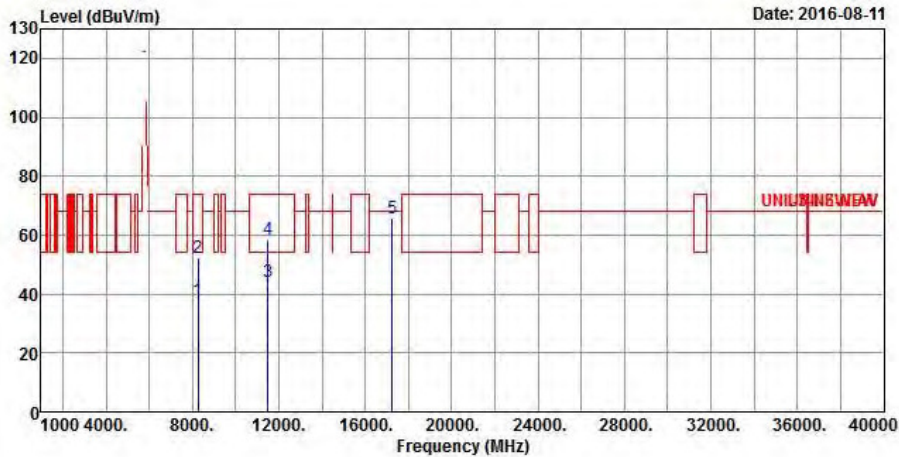


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8252.000	38.00	-16.00	54.00	28.53	36.90	7.63	35.06 Average
2	8252.000	52.24	-21.76	74.00	42.77	36.90	7.63	35.06 Peak
3	11490.000	44.10	-9.90	54.00	29.87	40.00	8.79	34.56 Average
4	11490.000	58.52	-15.48	74.00	44.29	40.00	8.79	34.56 Peak
5	17235.000	65.60	-2.60	68.20	47.56	40.96	10.89	33.81 Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

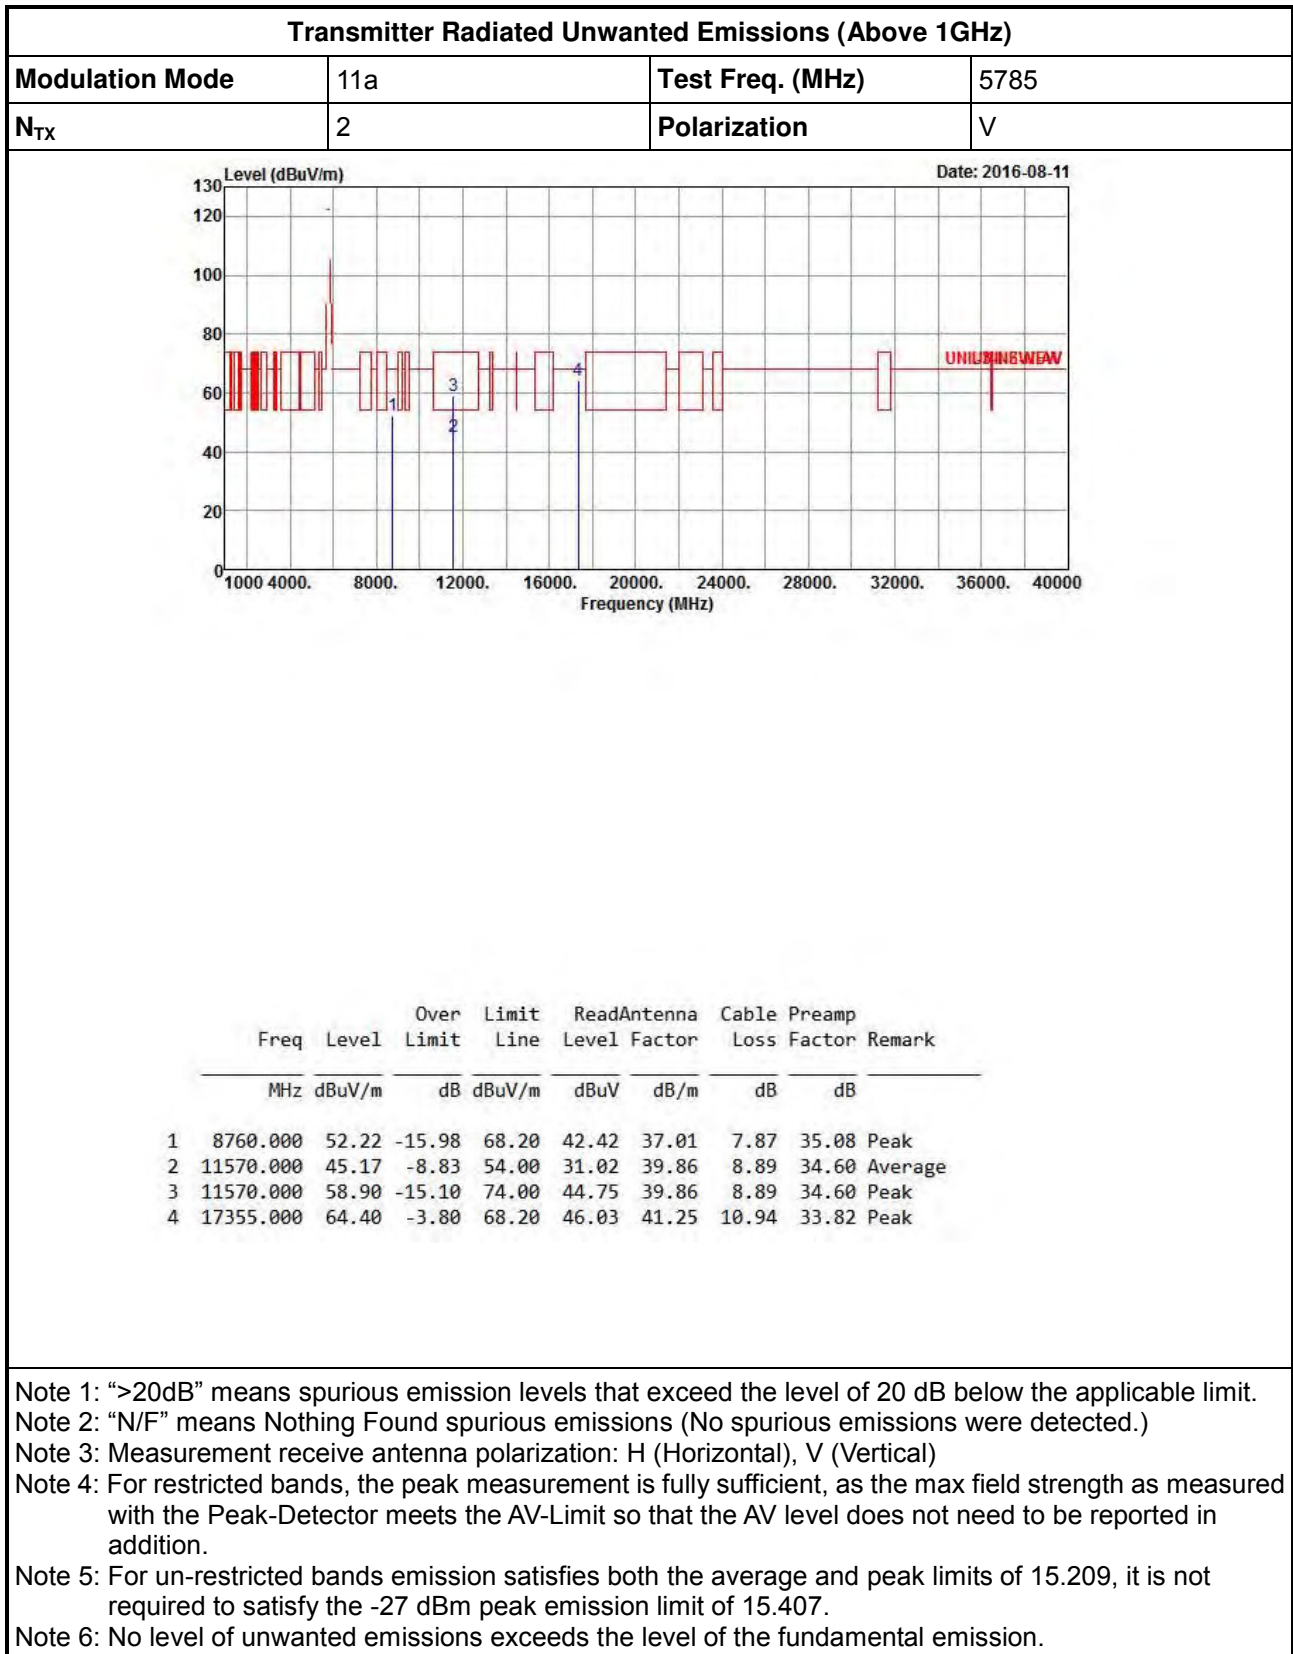

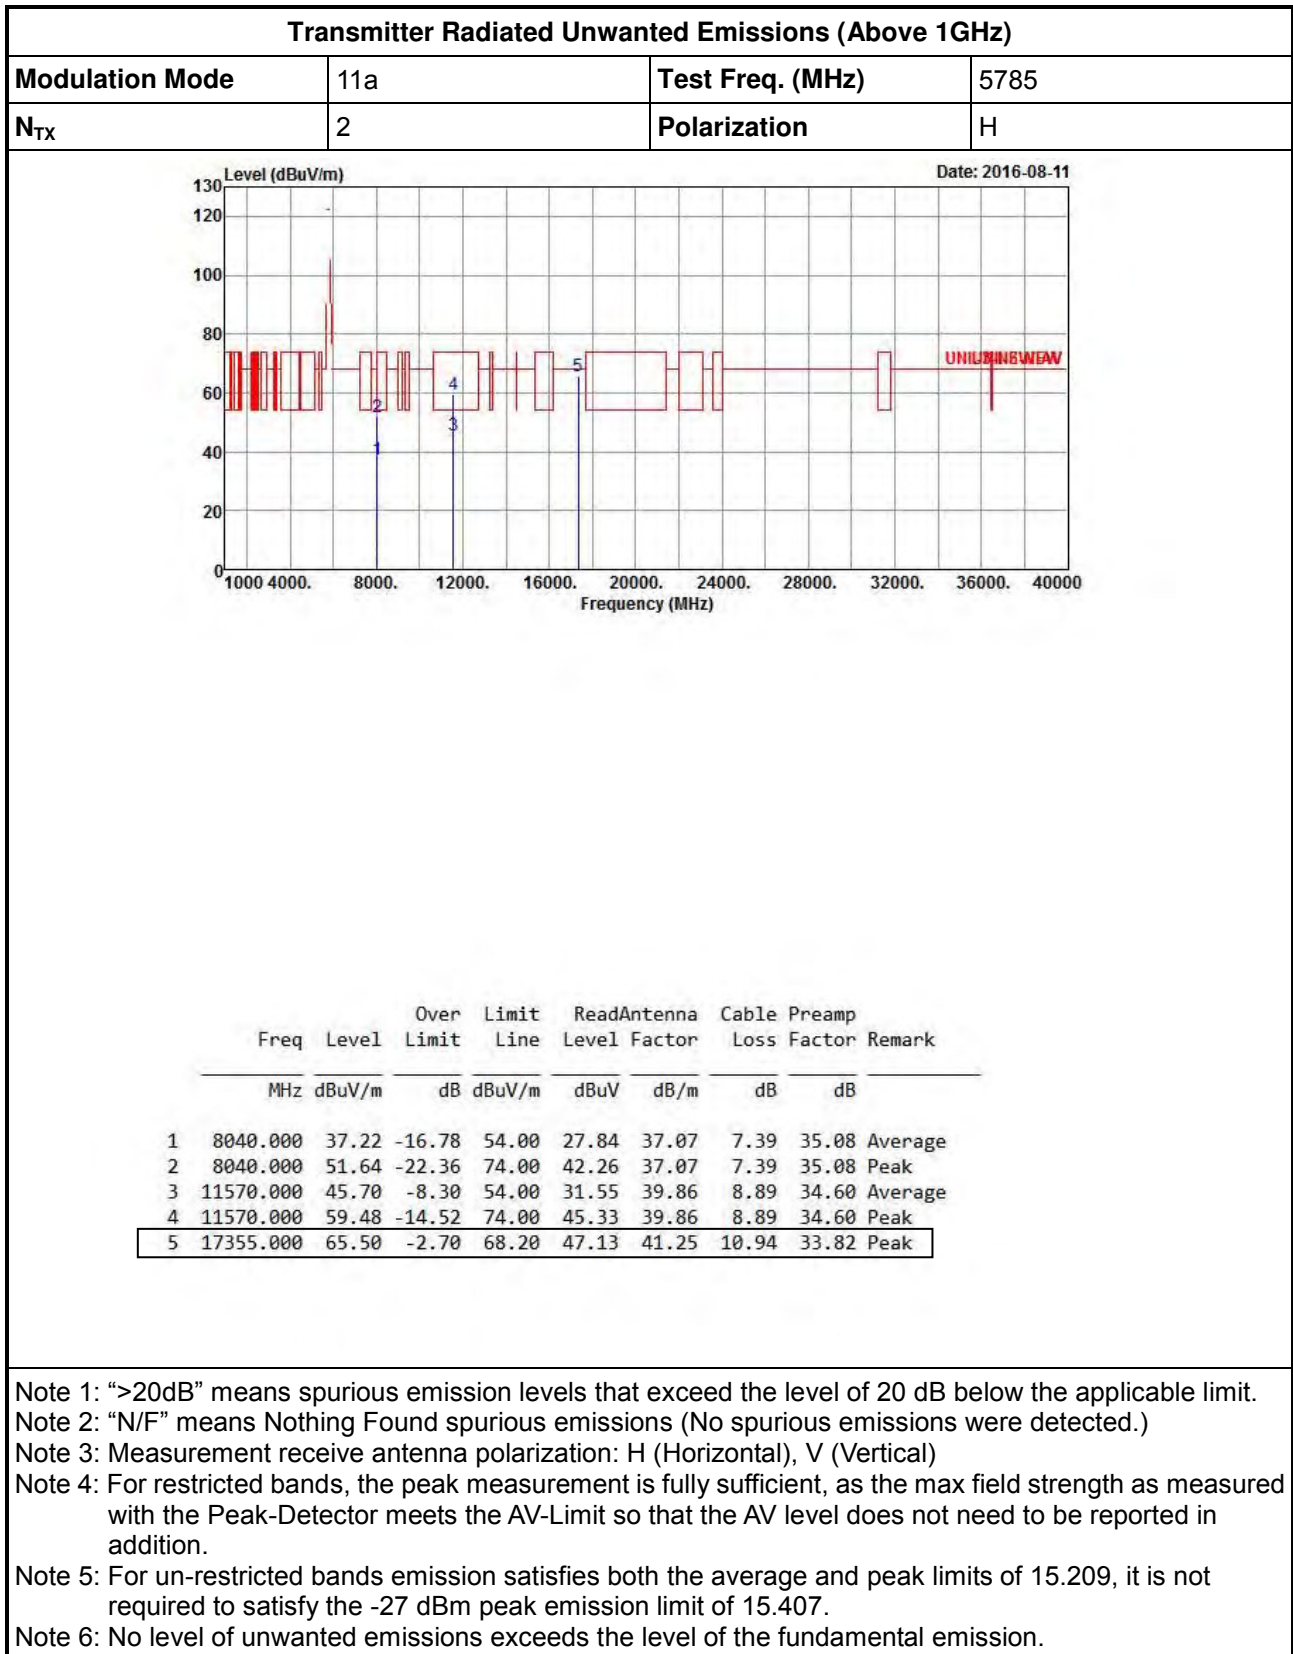



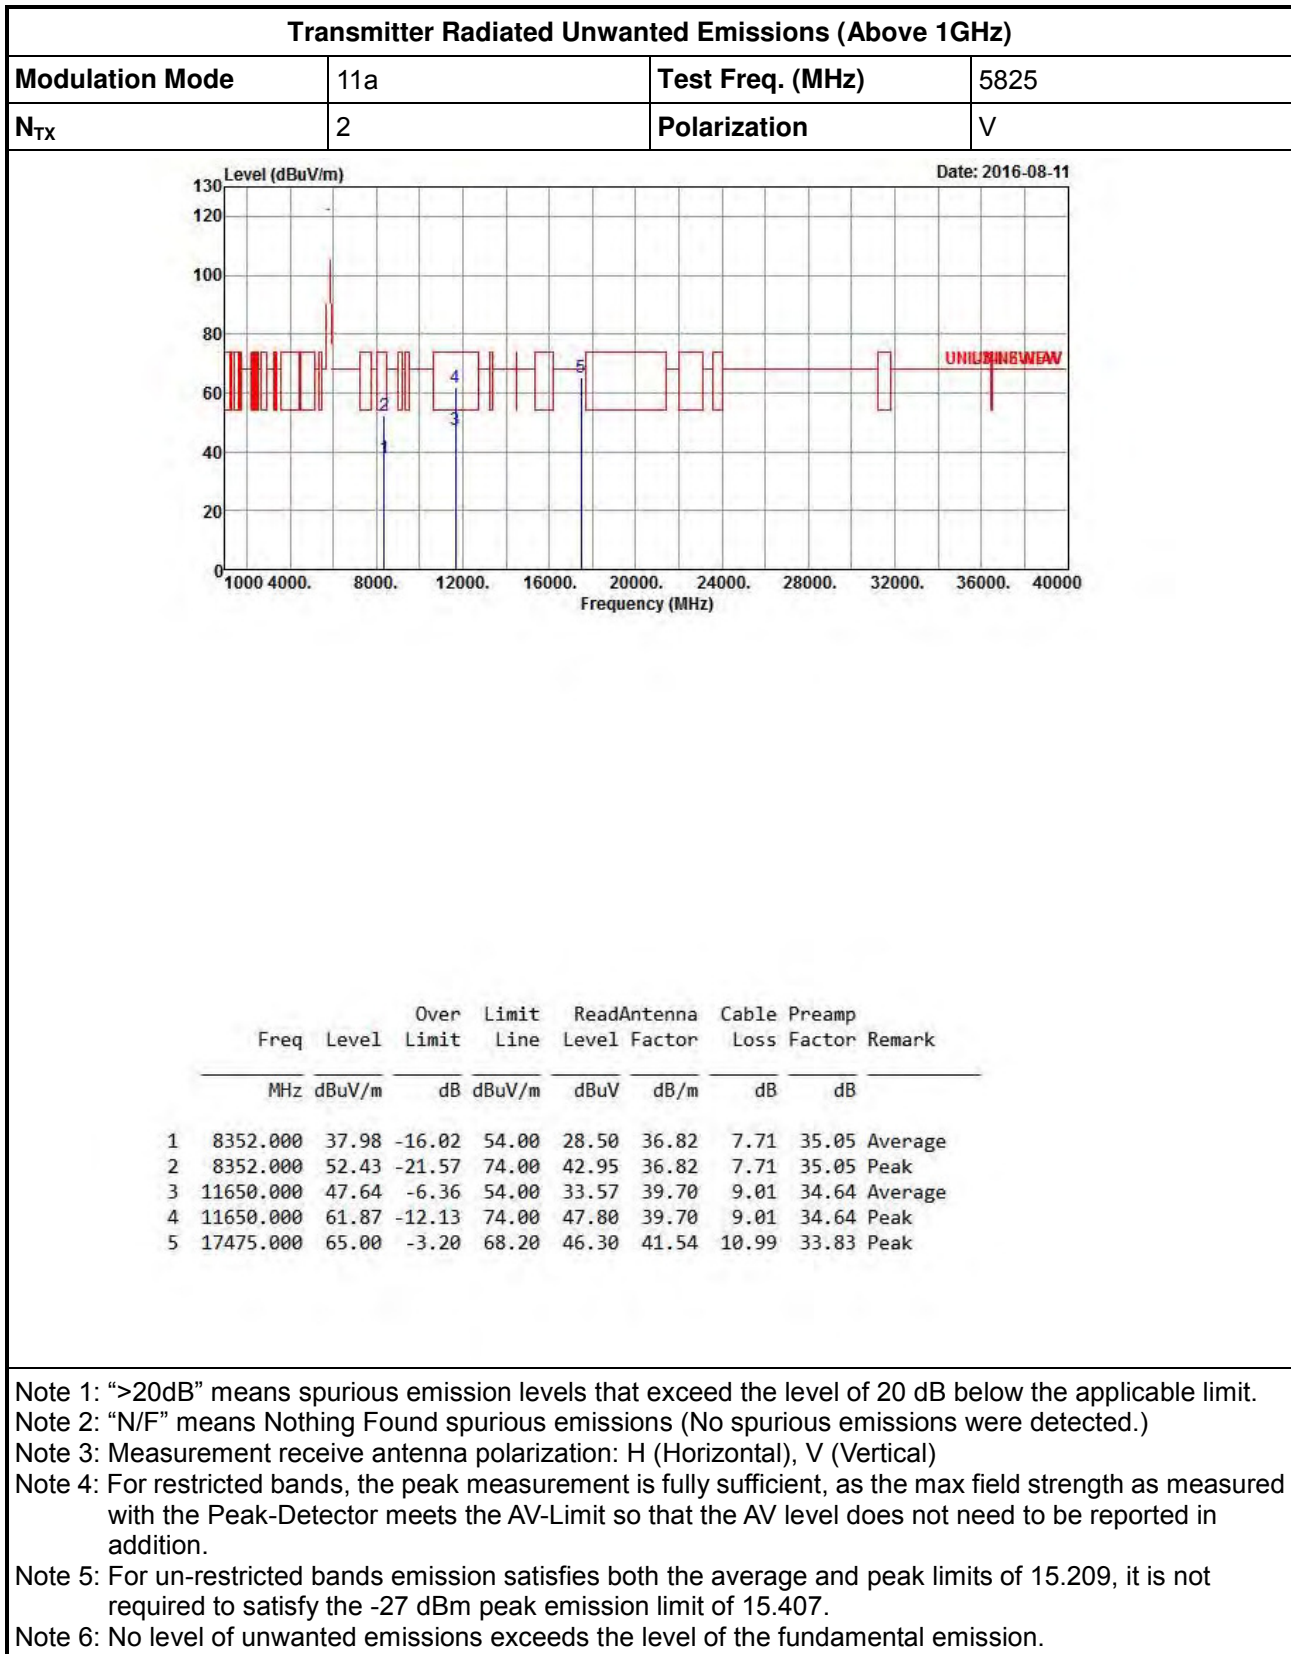


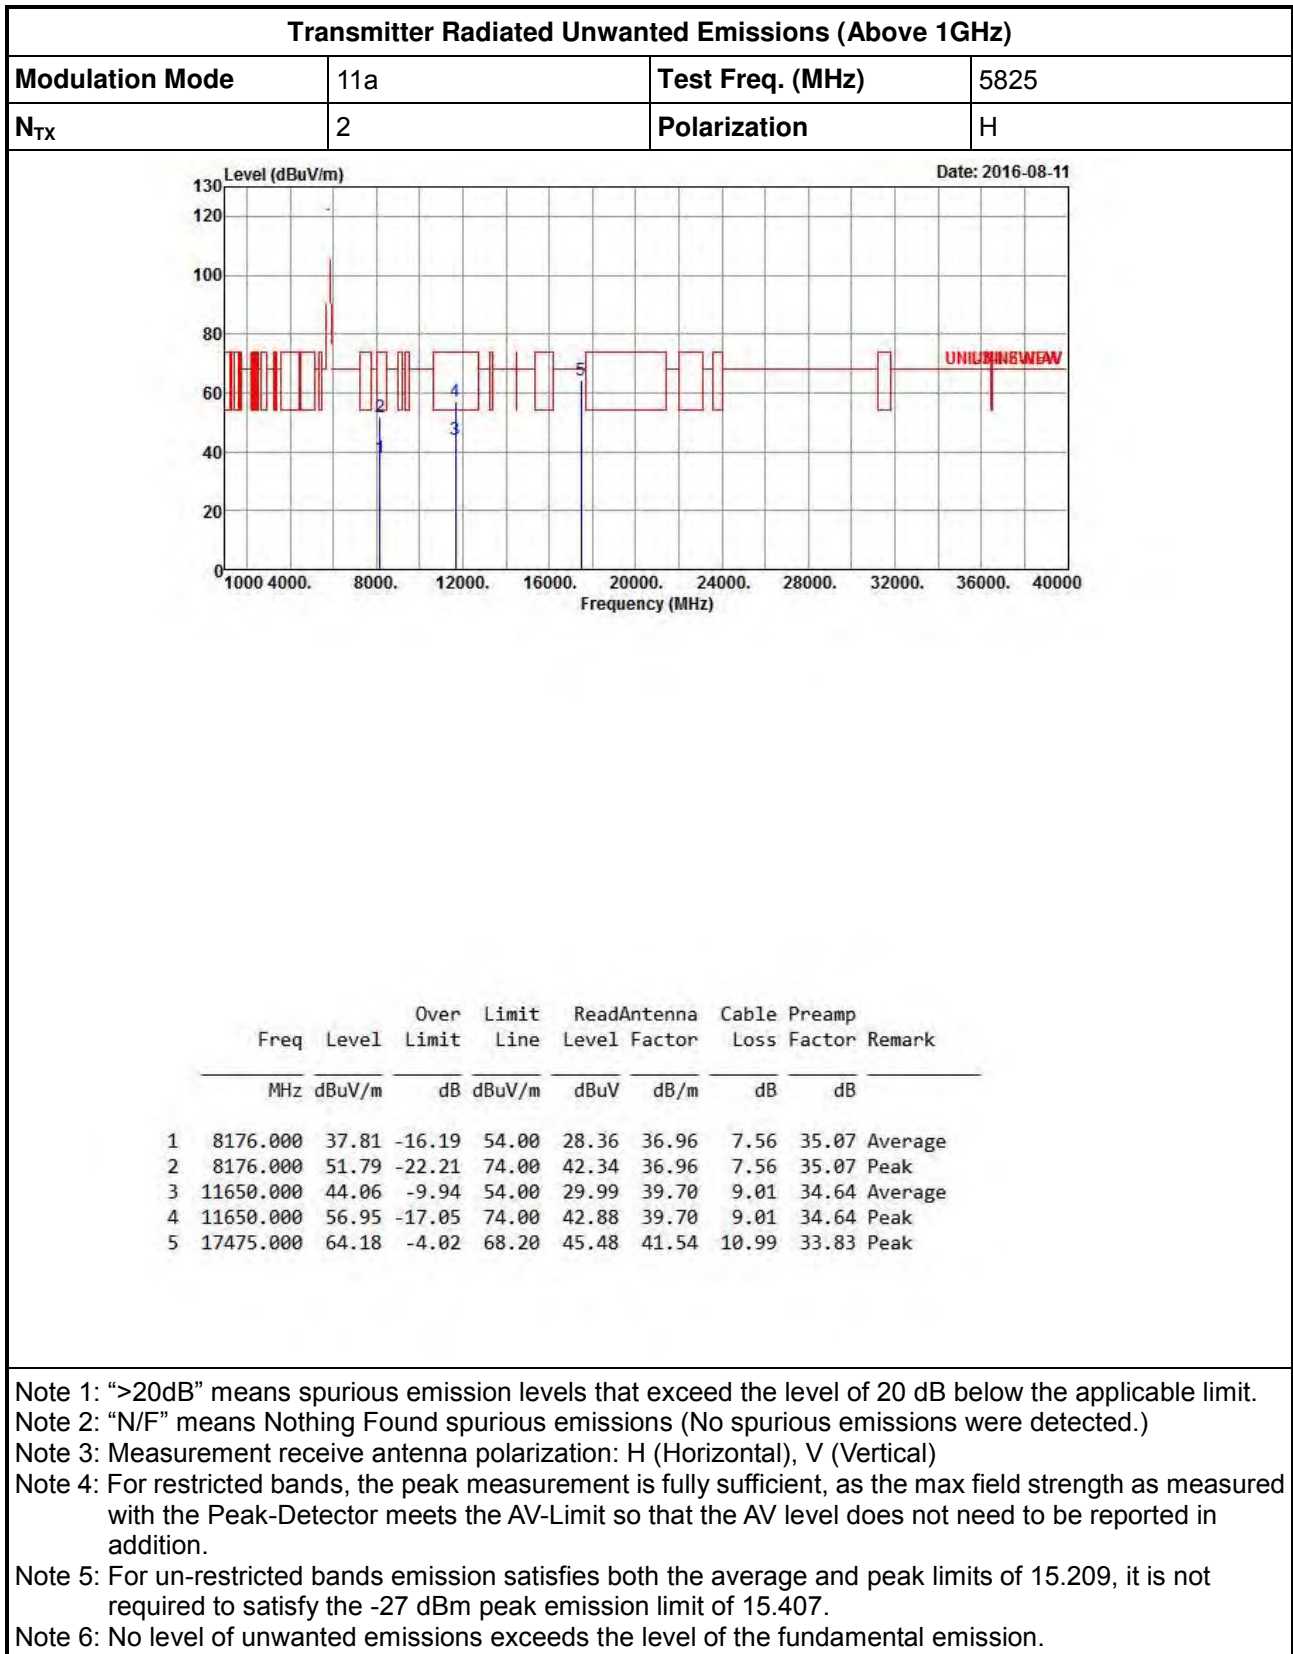




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	HT20	Test Freq. (MHz)	5745
N <sub>TX</sub>	2	Polarization	V

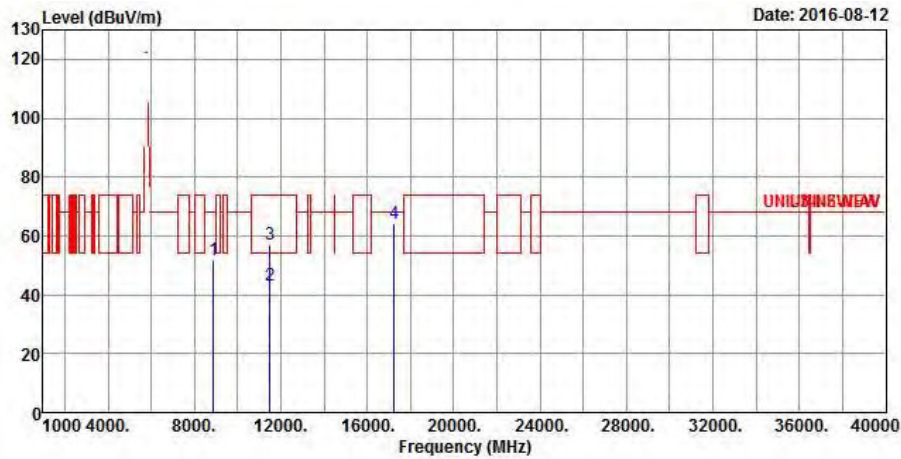


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	8886.000	51.64	-16.56	68.20	41.62	37.16	7.96	35.10 Peak
2	11490.000	43.07	-10.93	54.00	28.84	40.00	8.79	34.56 Average
3	11490.000	57.11	-16.89	74.00	42.88	40.00	8.79	34.56 Peak
4	17235.000	64.41	-3.79	68.20	46.37	40.96	10.89	33.81 Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

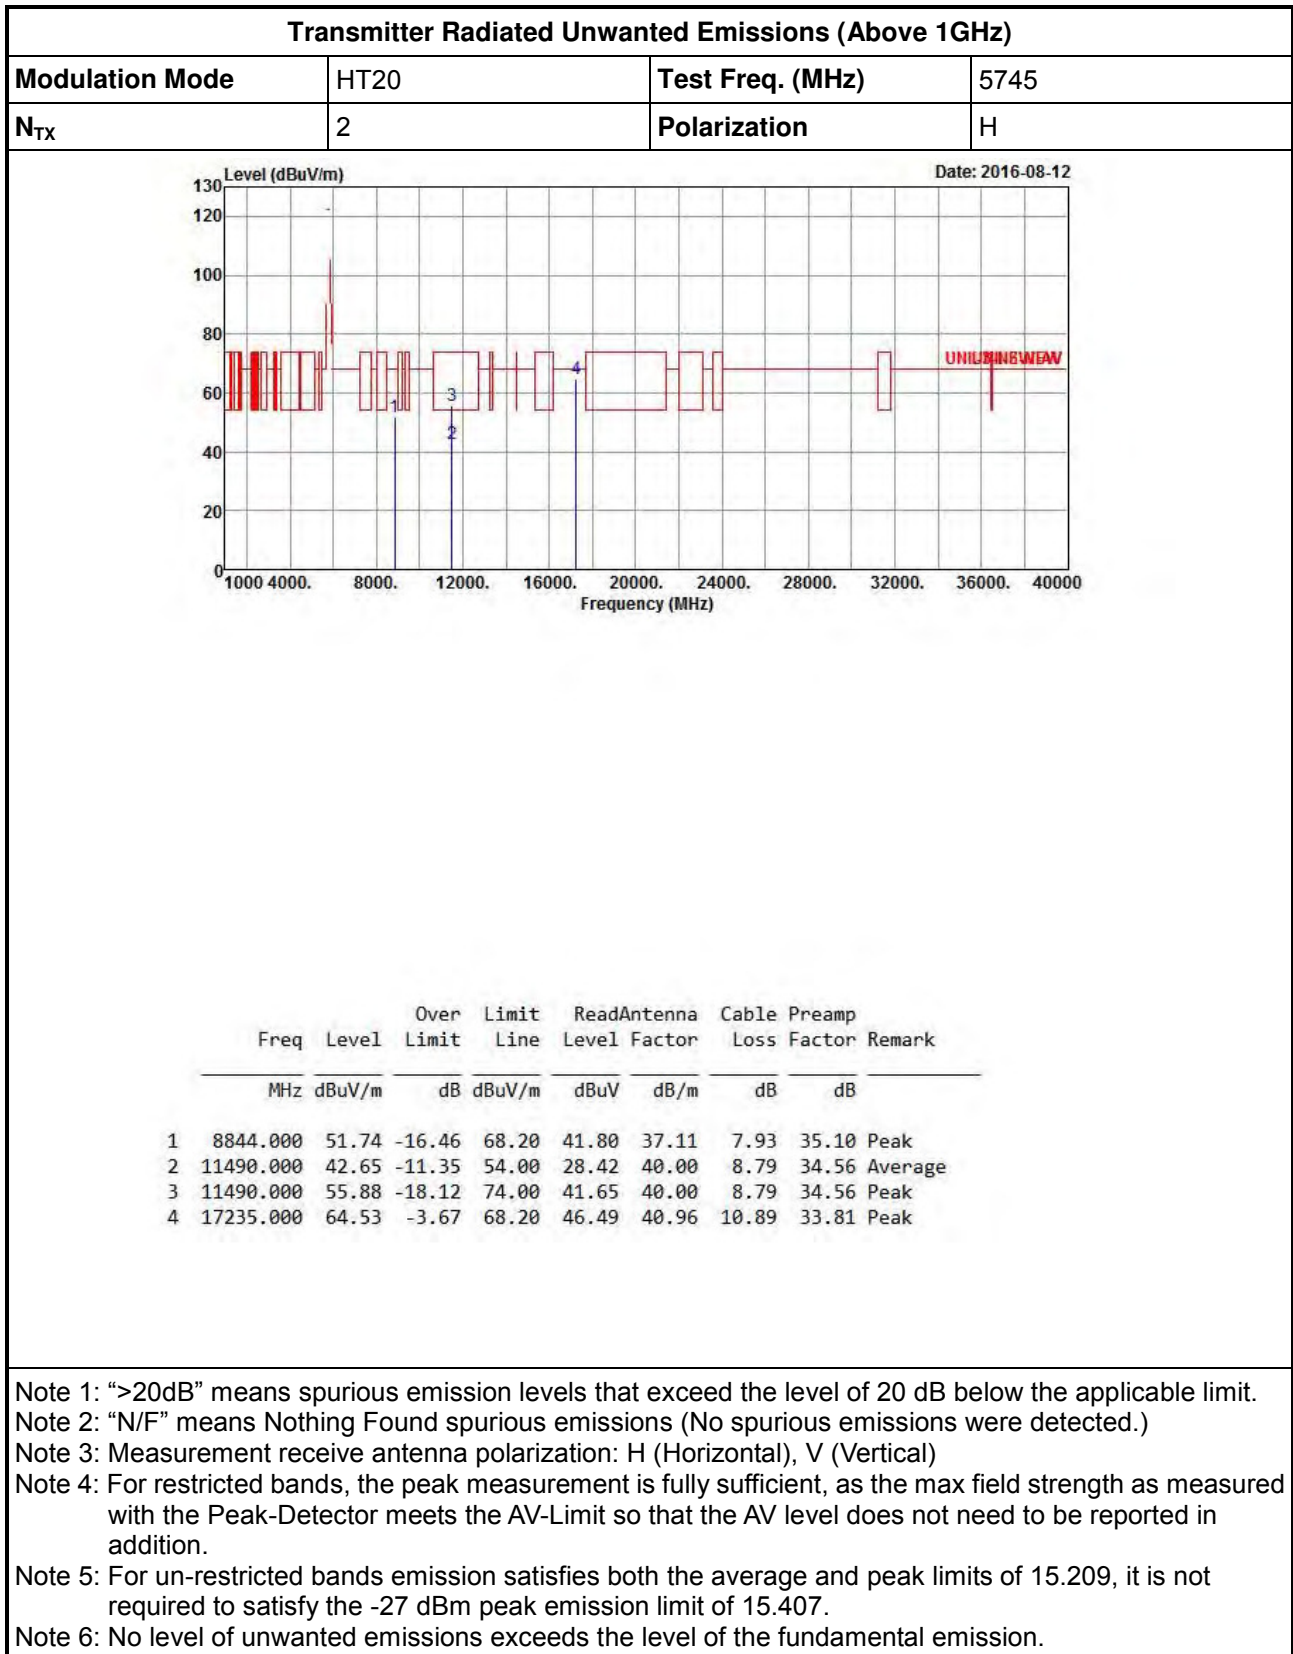


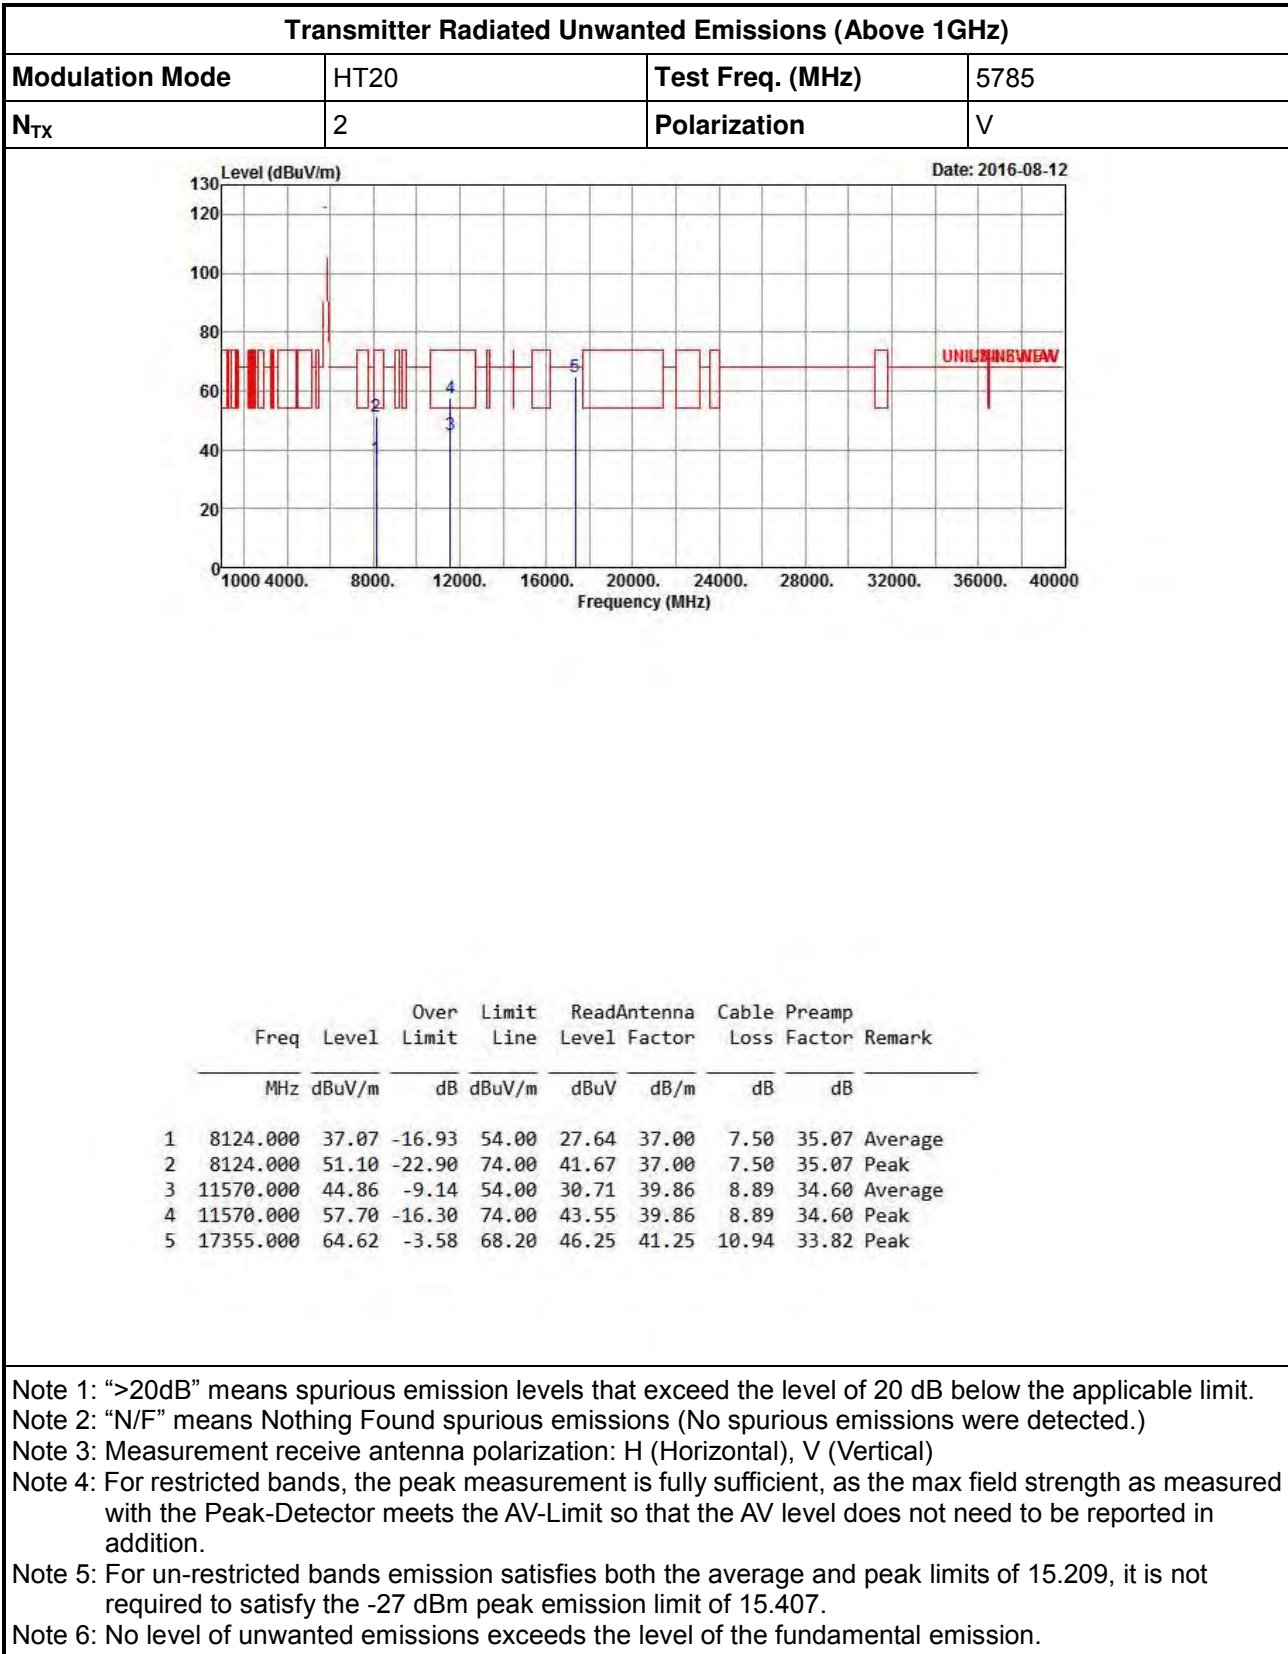





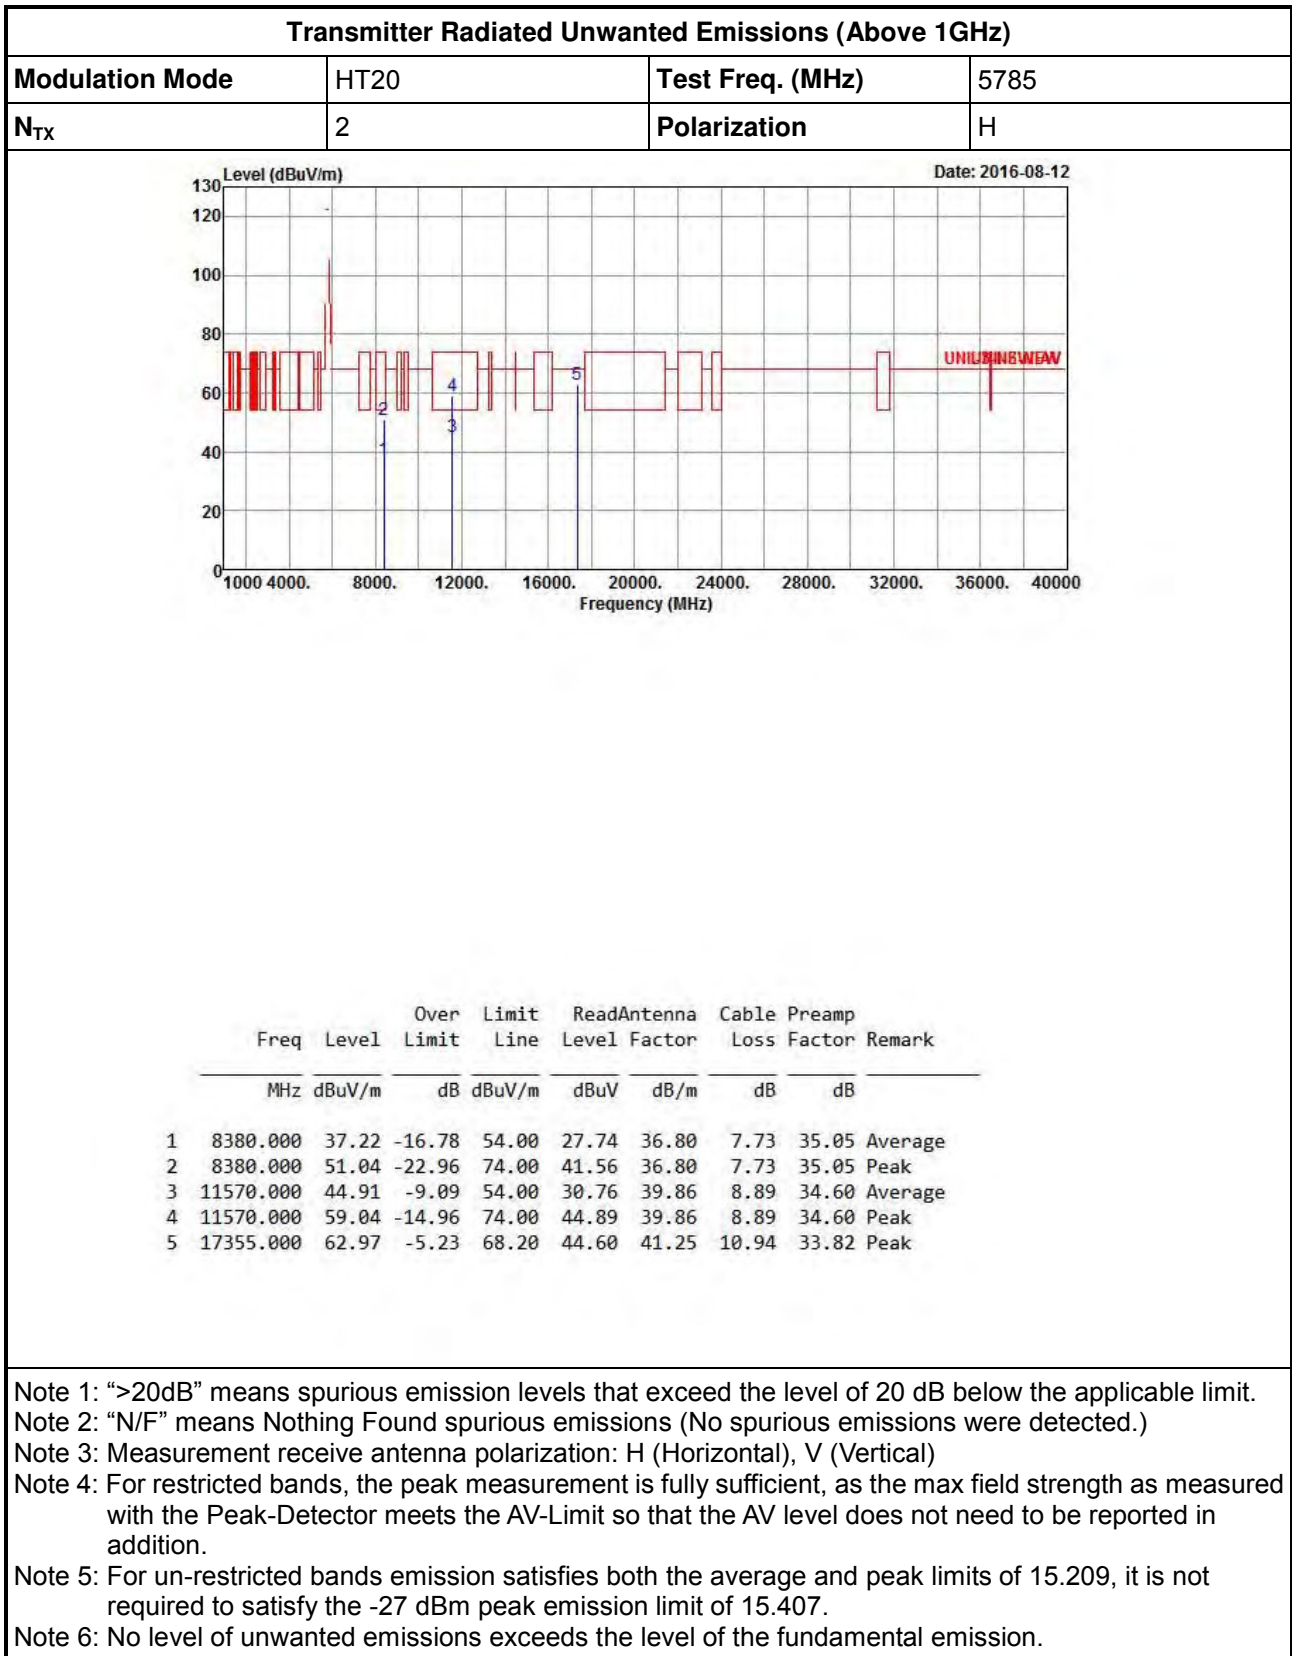

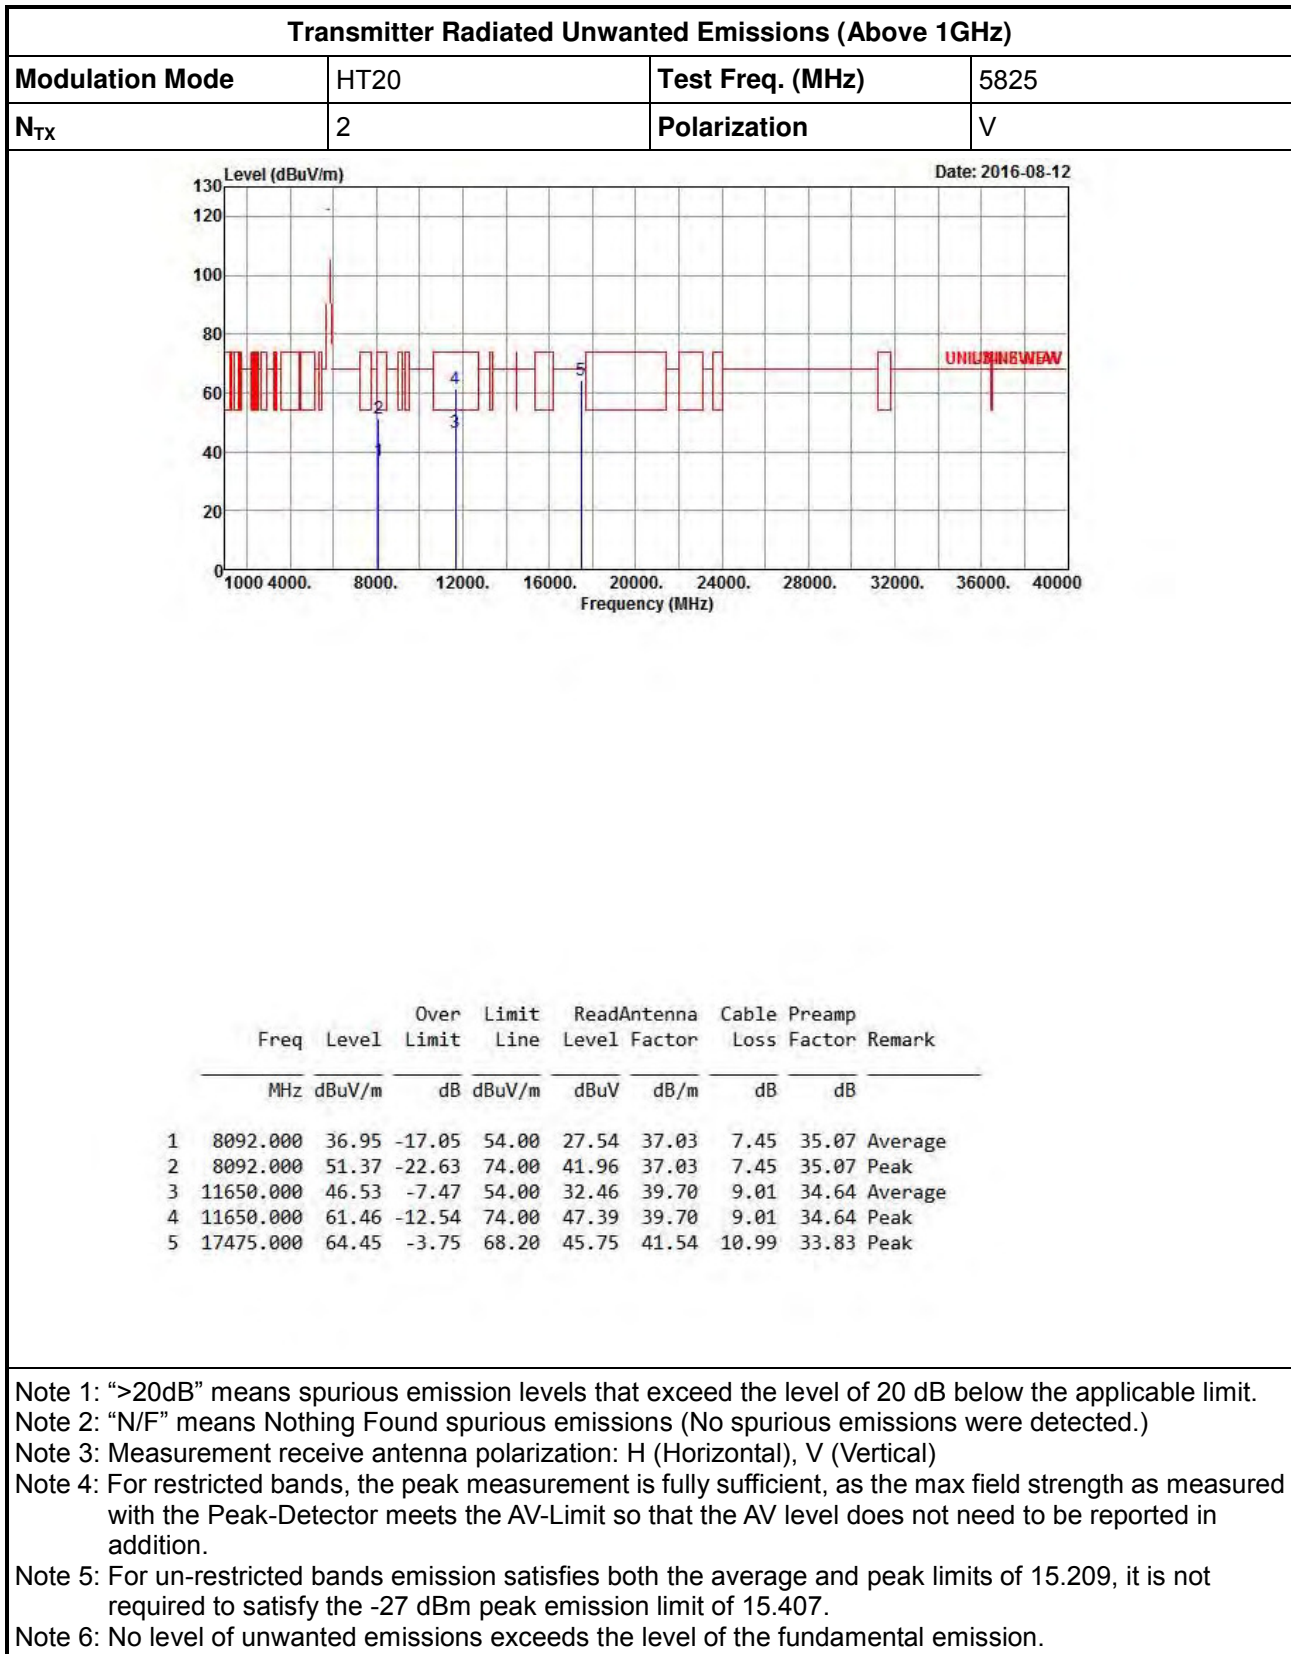

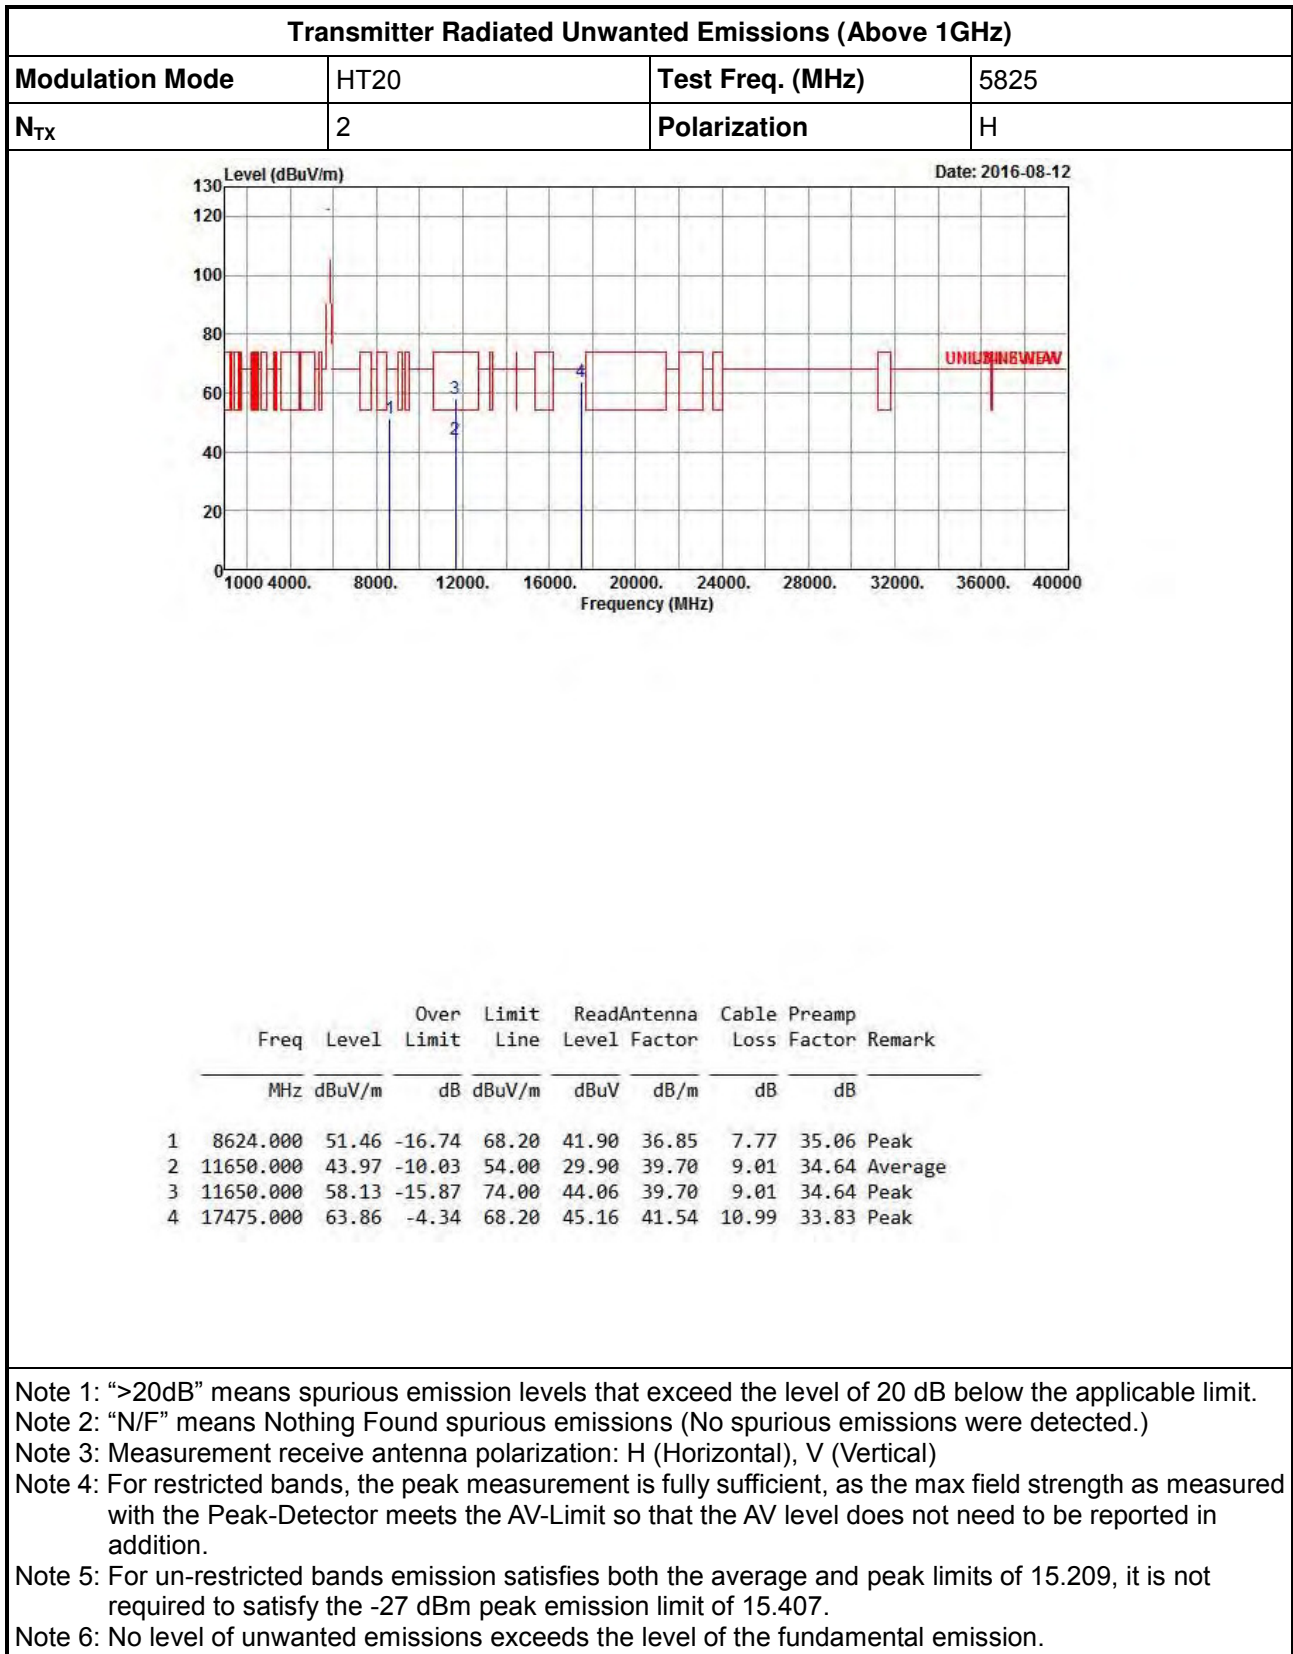

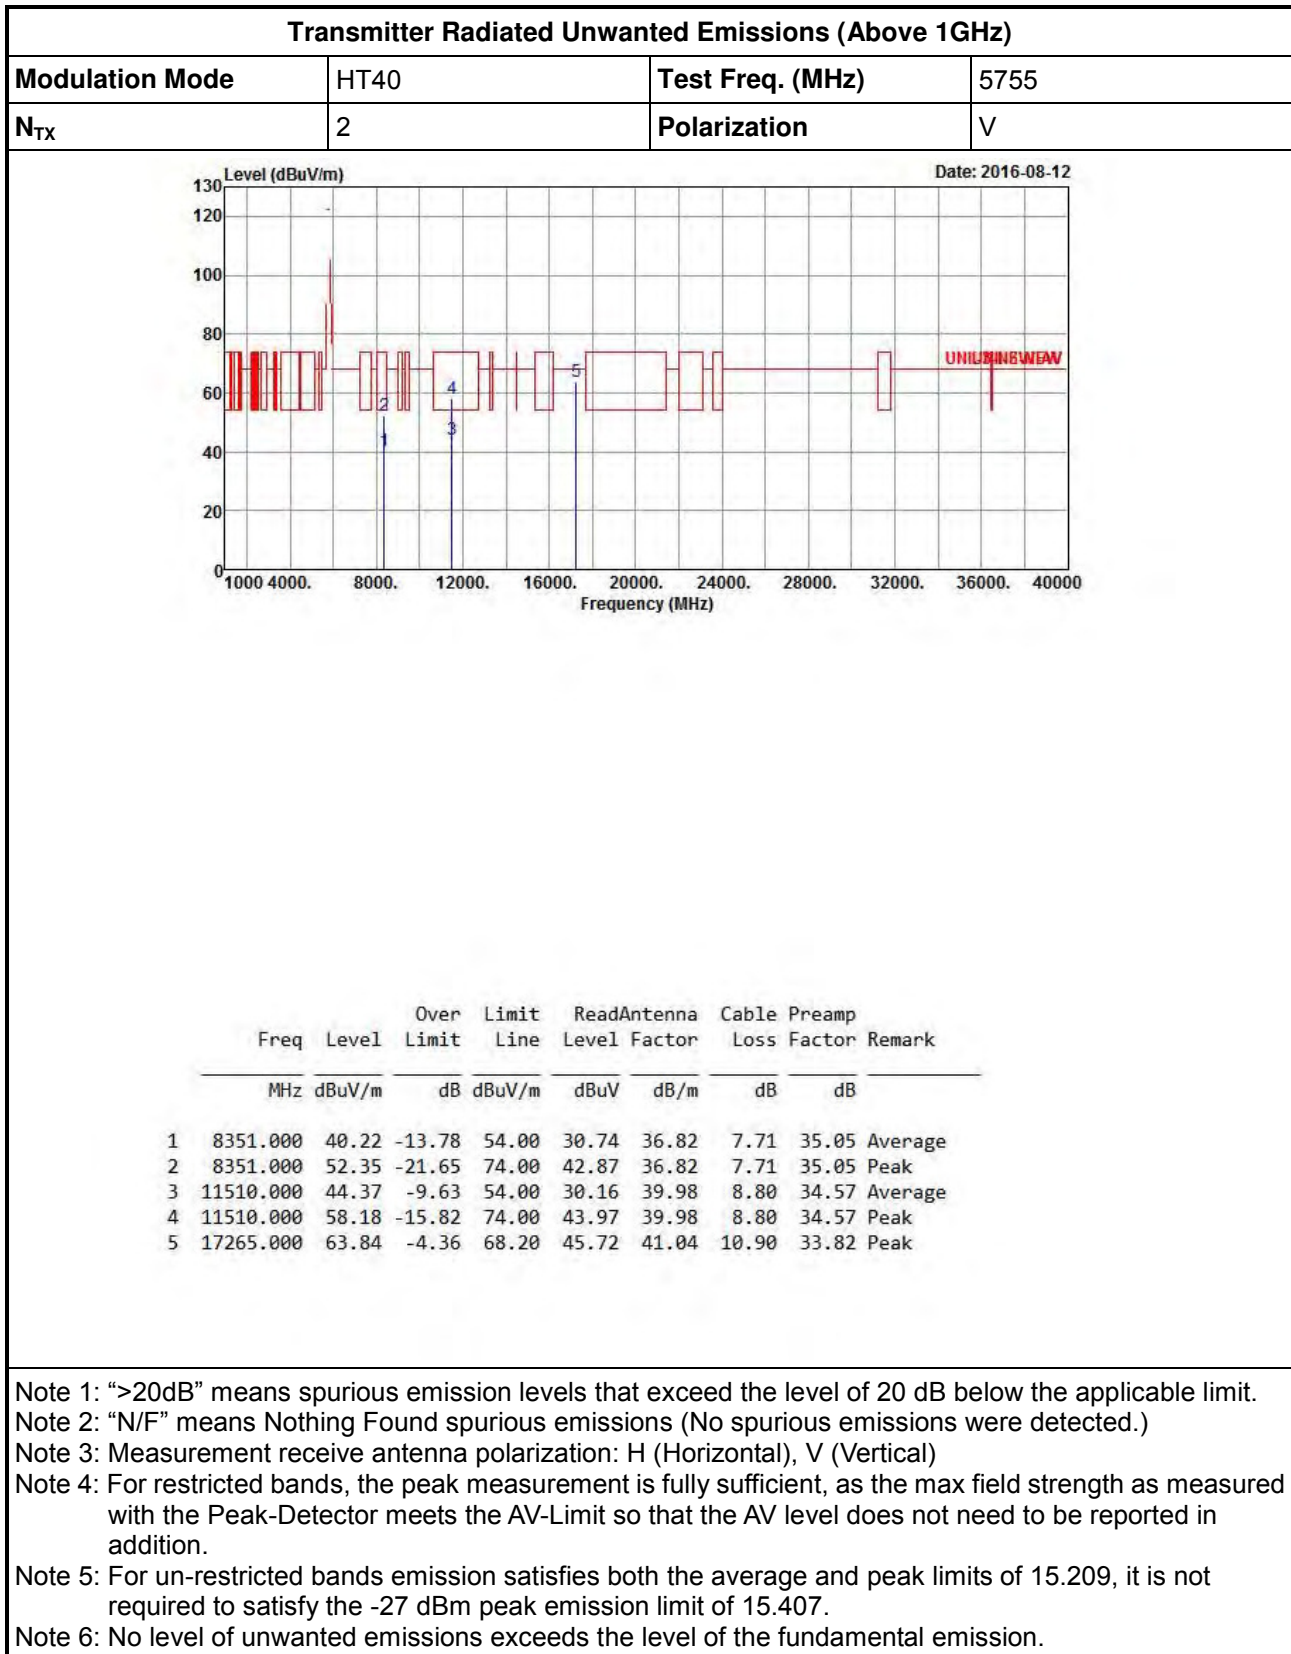

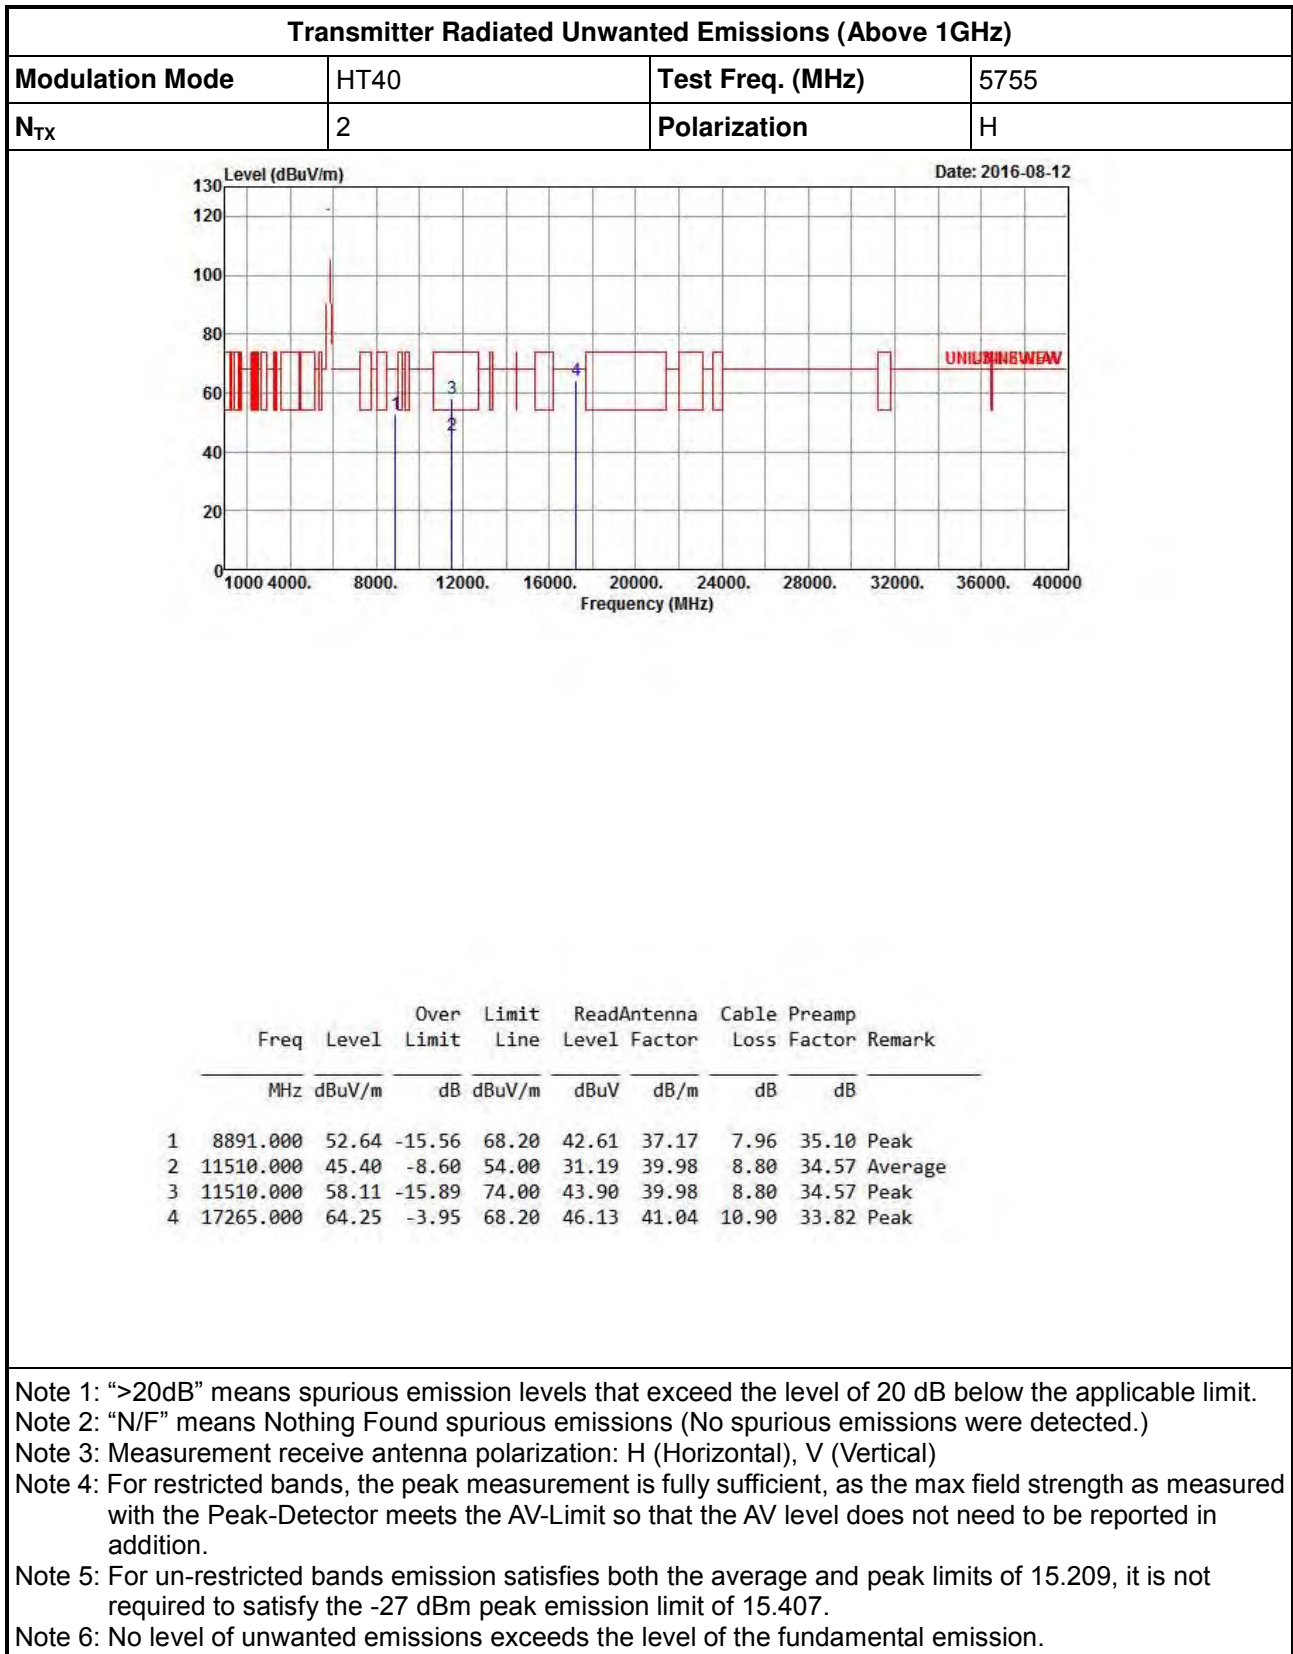







Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	HT40	Test Freq. (MHz)	5795
N <sub>TX</sub>	2	Polarization	V

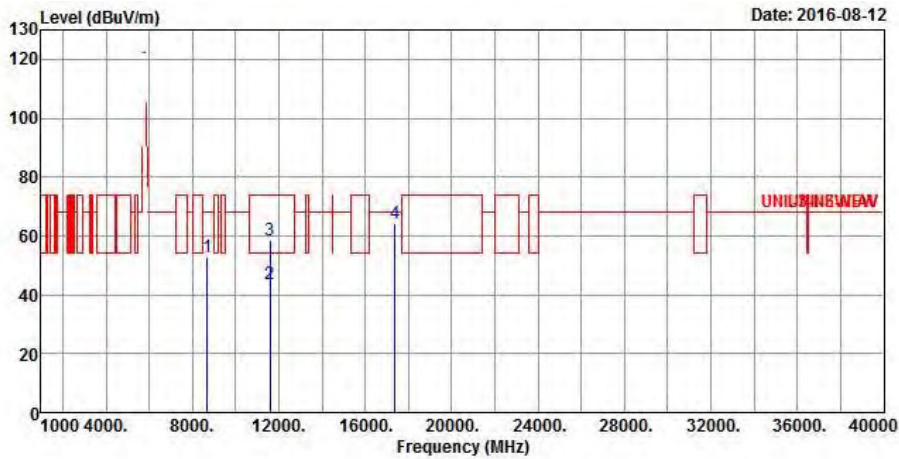


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	8704.000	52.54	-15.66	68.20	42.84	36.94	7.83	35.07 Peak
2	11590.000	43.66	-10.34	54.00	29.52	39.82	8.92	34.60 Average
3	11590.000	58.52	-15.48	74.00	44.38	39.82	8.92	34.60 Peak
4	17385.000	64.39	-3.81	68.20	45.94	41.32	10.95	33.82 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

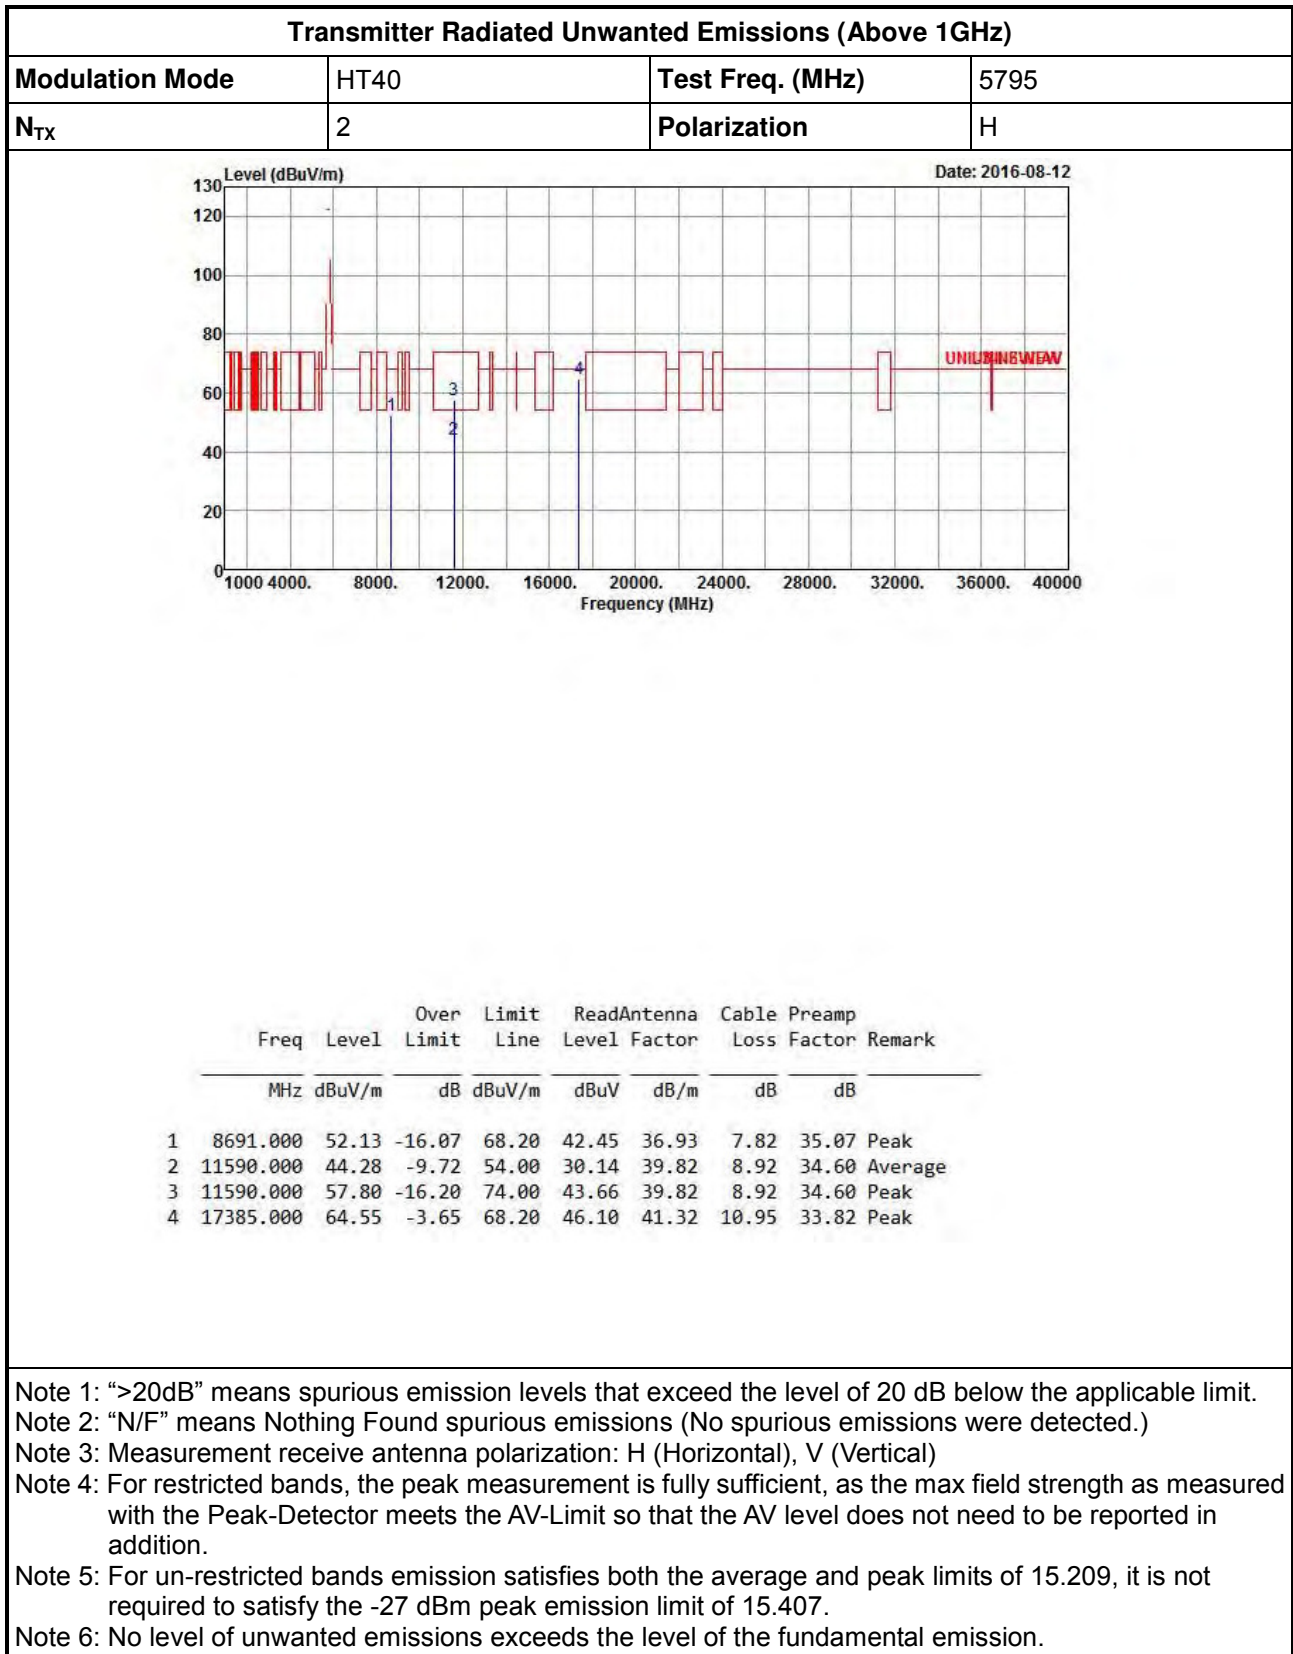

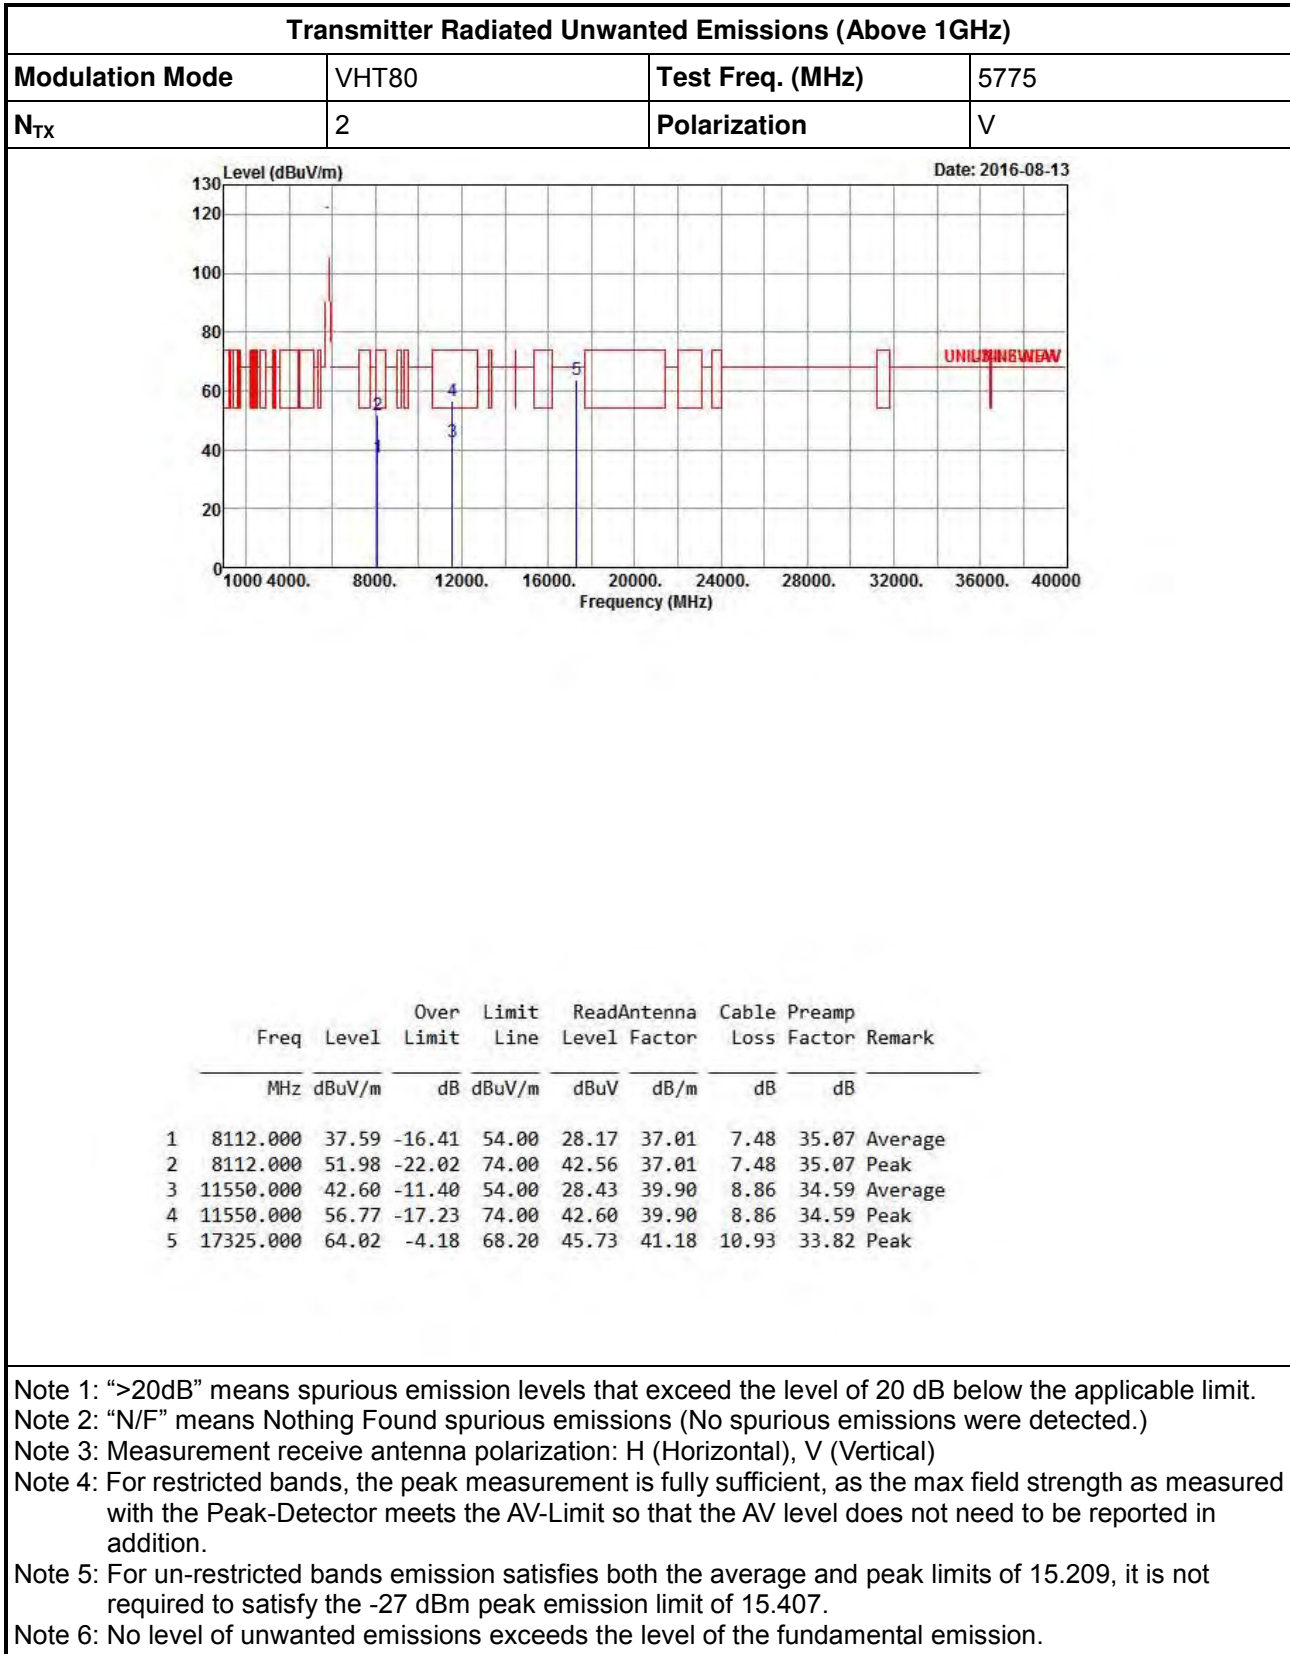

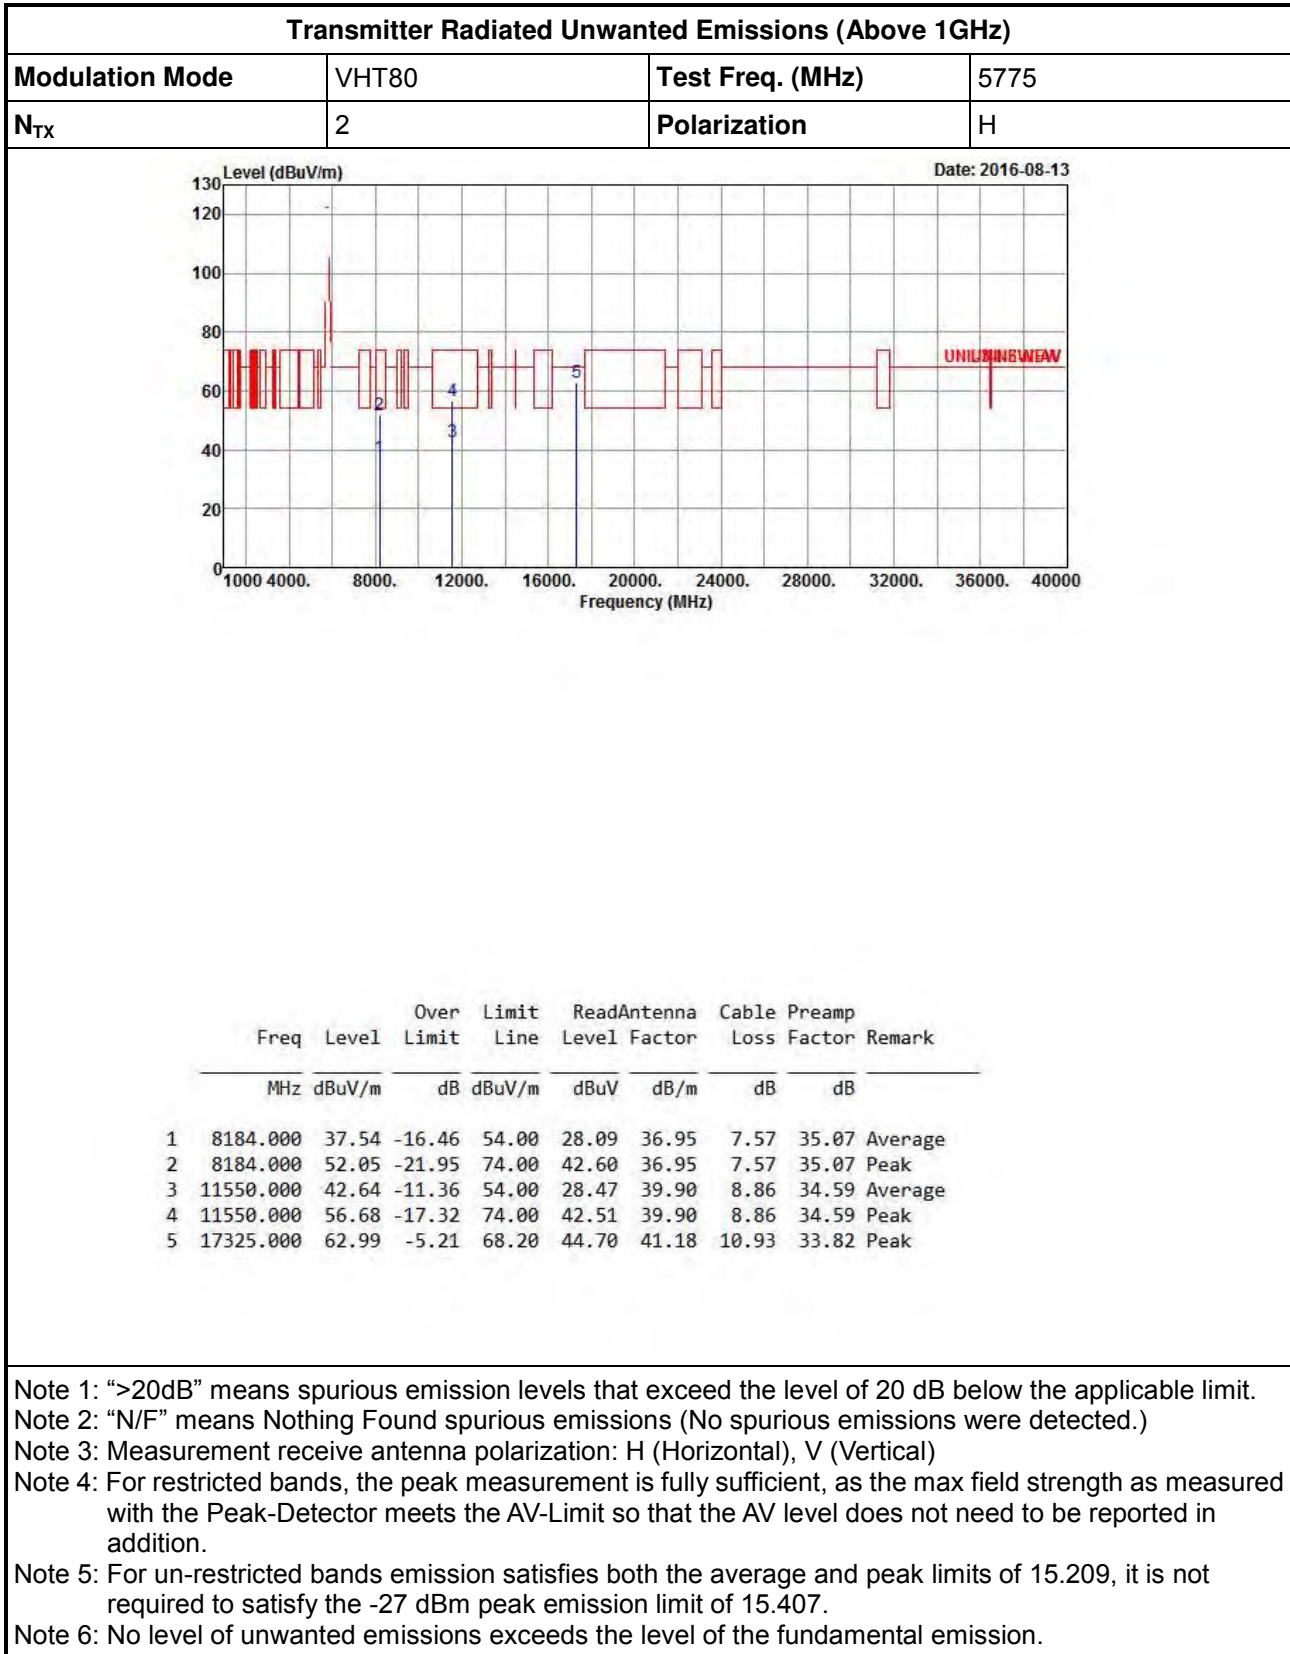



Summary

Mode	Result	Ch (Hz)	Center (Hz)	F1 (Hz)	Fh (Hz)	ppm	Limit (ppm)	Port	Remark
5.2G;11a;20;1;2;5200;M;T35,VN	Pass	5.2G	5.19990151G	NaN	NaN	18.941	20	1	0 min





Result

Mode	Result	Ch (Hz)	Center (Hz)	Fl (Hz)	Fh (Hz)	ppm	Limit (ppm)	Port	Remark
5.2G;11a;20;1;2;5200;M;TN,VL	Pass	5.2G	5.19995954G	NaN	NaN	7.781	20	1	0 min
5.2G;11a;20;1;2;5200;M;TN,VL	Pass	5.2G	5.19996337G	NaN	NaN	7.044	20	1	2 min
5.2G;11a;20;1;2;5200;M;TN,VL	Pass	5.2G	5.19996338G	NaN	NaN	7.043	20	1	5 min
5.2G;11a;20;1;2;5200;M;TN,VL	Pass	5.2G	5.19995951G	NaN	NaN	7.787	20	1	10 min
5.2G;11a;20;1;2;5200;M;TN,VH	Pass	5.2G	5.19995957G	NaN	NaN	7.776	20	1	0 min
5.2G;11a;20;1;2;5200;M;TN,VH	Pass	5.2G	5.19995956G	NaN	NaN	7.776	20	1	2 min
5.2G;11a;20;1;2;5200;M;TN,VH	Pass	5.2G	5.19995725G	NaN	NaN	8.221	20	1	5 min
5.2G;11a;20;1;2;5200;M;TN,VH	Pass	5.2G	5.19995958G	NaN	NaN	7.773	20	1	10 min
5.2G;11a;20;1;2;5200;M;T35,VN	Pass	5.2G	5.19990151G	NaN	NaN	18.941	20	1	0 min
5.2G;11a;20;1;2;5200;M;T35,VN	Pass	5.2G	5.19990171G	NaN	NaN	18.903	20	1	2 min
5.2G;11a;20;1;2;5200;M;T35,VN	Pass	5.2G	5.19990172G	NaN	NaN	18.901	20	1	5 min
5.2G;11a;20;1;2;5200;M;T35,VN	Pass	5.2G	5.19990175G	NaN	NaN	18.894	20	1	10 min
5.2G;11a;20;1;2;5200;M;T30,VN	Pass	5.2G	5.19994589G	NaN	NaN	10.406	20	1	0 min
5.2G;11a;20;1;2;5200;M;T30,VN	Pass	5.2G	5.19994592G	NaN	NaN	10.4	20	1	2 min
5.2G;11a;20;1;2;5200;M;T30,VN	Pass	5.2G	5.19994586G	NaN	NaN	10.412	20	1	5 min
5.2G;11a;20;1;2;5200;M;T30,VN	Pass	5.2G	5.19992497G	NaN	NaN	14.429	20	1	10 min
5.2G;11a;20;1;2;5200;M;T20,VN	Pass	5.2G	5.19995975G	NaN	NaN	7.74	20	1	0 min
5.2G;11a;20;1;2;5200;M;T20,VN	Pass	5.2G	5.19996361G	NaN	NaN	6.999	20	1	2 min
5.2G;11a;20;1;2;5200;M;T20,VN	Pass	5.2G	5.19995975G	NaN	NaN	7.74	20	1	5 min
5.2G;11a;20;1;2;5200;M;T20,VN	Pass	5.2G	5.1999636G	NaN	NaN	7	20	1	10 min
5.2G;11a;20;1;2;5200;M;T10,VN	Pass	5.2G	5.19996746G	NaN	NaN	6.257	20	1	0 min
5.2G;11a;20;1;2;5200;M;T10,VN	Pass	5.2G	5.19997242G	NaN	NaN	5.303	20	1	2 min
5.2G;11a;20;1;2;5200;M;T10,VN	Pass	5.2G	5.19996745G	NaN	NaN	6.259	20	1	5 min
5.2G;11a;20;1;2;5200;M;T10,VN	Pass	5.2G	5.19997267G	NaN	NaN	5.256	20	1	10 min
5.2G;11a;20;1;2;5200;M;T5,VN	Pass	5.2G	5.19996816G	NaN	NaN	6.123	20	1	0 min
5.2G;11a;20;1;2;5200;M;T5,VN	Pass	5.2G	5.19996815G	NaN	NaN	6.125	20	1	2 min
5.2G;11a;20;1;2;5200;M;T5,VN	Pass	5.2G	5.19996817G	NaN	NaN	6.122	20	1	5 min
5.2G;11a;20;1;2;5200;M;T5,VN	Pass	5.2G	5.19996825G	NaN	NaN	6.105	20	1	10 min