


## PHOTOGRAPHS OF THE TEST CONFIGURATION

### DFS

Set UUT as Client without radar detection mode (Radar injected into Master)

For 802.11n HT20, 802.11n HT40, 802.11ac VHT80

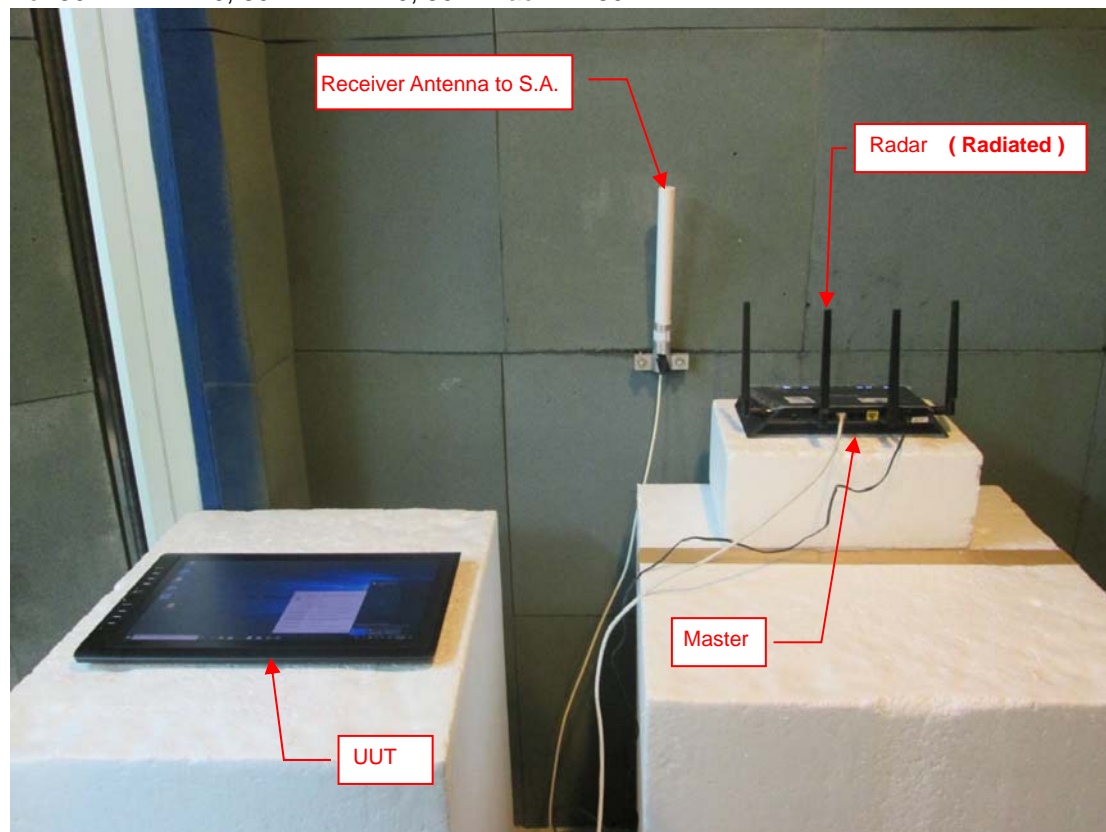

For 802.11ac VHT160

