




Transmitter Radiated Unwanted Emissions (Below 1GHz)

Transmitter Radiated Unwanted Emissions (Below 1GHz)			
Operating Mode	1	Polarization	V
Operating Function	VHT80 5530MHz, Adapter with charging mode		

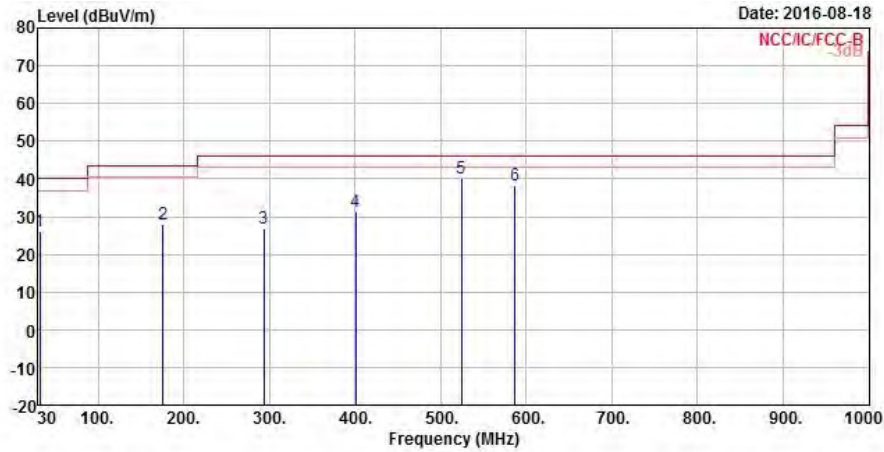


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	31.940	26.16	-13.84	40.00	39.37	23.85	0.33	37.39	Peak
2	175.500	27.83	-15.67	43.50	48.83	14.77	0.73	36.50	Peak
3	293.840	27.01	-18.99	46.00	43.77	18.68	0.96	36.40	Peak
4	400.540	31.27	-14.73	46.00	45.30	21.51	1.12	36.66	Peak
5	524.700	40.11	-5.89	46.00	52.24	23.60	1.32	37.05	Peak
6	586.780	38.17	-7.83	46.00	49.60	24.41	1.39	37.23	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Below 1GHz)			
Operating Mode	1	Polarization	H
Operating Function	VHT80 5530MHz, Adapter with charging mode		

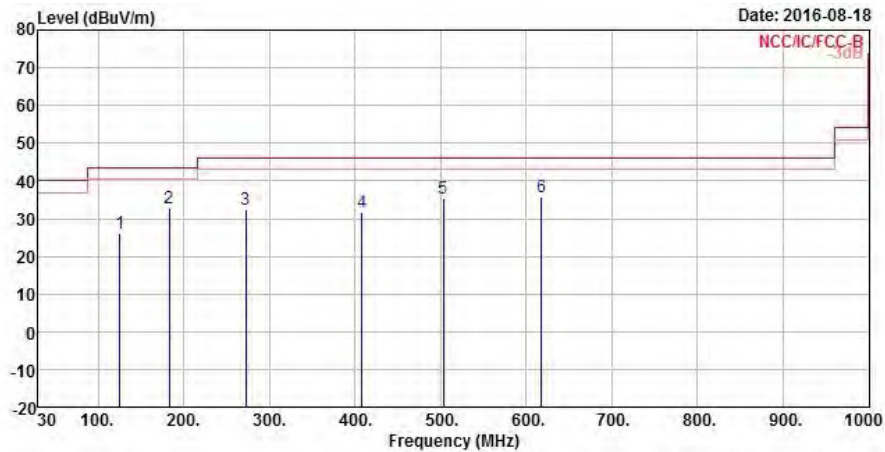


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor		
			dB	dBuV/m	dBuV	dB	dB		
1	125.060	26.14	-17.36	43.50	45.21	17.00	0.64	36.71	Peak
2	183.260	32.59	-10.91	43.50	53.76	14.53	0.76	36.46	Peak
3	272.500	32.24	-13.76	46.00	49.17	18.55	0.92	36.40	Peak
4	408.300	31.52	-14.48	46.00	45.43	21.65	1.13	36.69	Peak
5	503.360	35.36	-10.64	46.00	47.72	23.34	1.29	36.99	Peak
6	617.820	35.66	-10.34	46.00	46.65	24.89	1.43	37.31	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Polarization	V
Operating Function	VHT80 5775MHz , Adapter with charging mode		

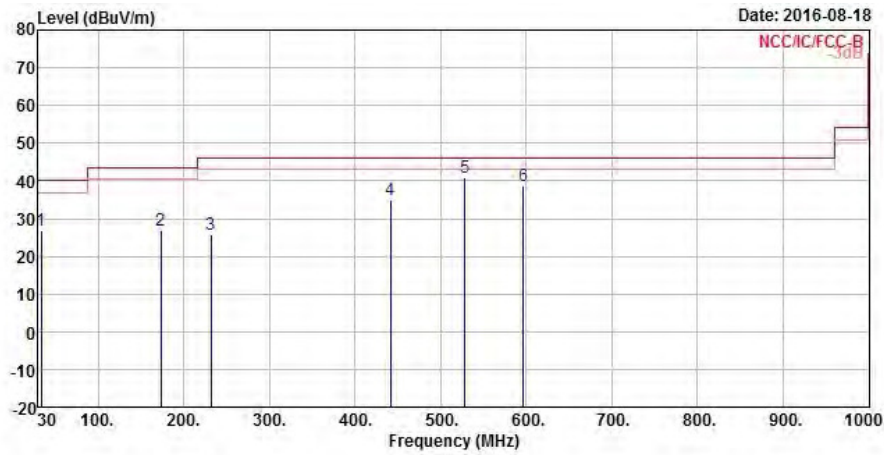


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor		
			dB	dBuV/m	dBuV	dB	dB		
1	33.880	26.97	-13.03	40.00	41.20	22.80	0.34	37.37	Peak
2	173.560	26.91	-16.59	43.50	47.80	14.89	0.73	36.51	Peak
3	231.760	25.85	-20.15	46.00	45.13	16.26	0.85	36.39	Peak
4	441.280	34.97	-11.03	46.00	48.33	22.24	1.19	36.79	Peak
5	528.580	40.89	-5.11	46.00	52.99	23.64	1.32	37.06	Peak
6	596.480	38.65	-7.35	46.00	49.95	24.55	1.41	37.26	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Below 1GHz)			
Operating Mode	1	Polarization	H
Operating Function	VHT80 5775MHz , Adapter with charging mode		

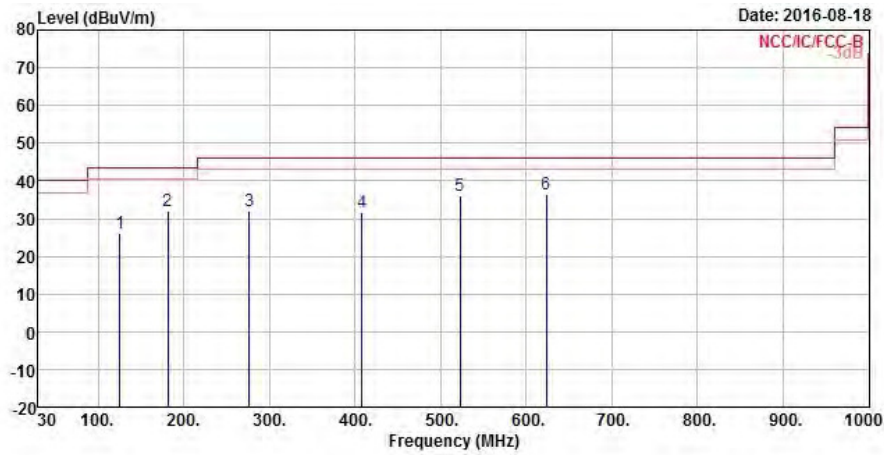


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor		
			dB	dBuV/m	dBuV	dB	dB		
1	125.060	26.11	-17.39	43.50	45.18	17.00	0.64	36.71	Peak
2	181.320	32.11	-11.39	43.50	53.31	14.51	0.76	36.47	Peak
3	276.380	32.02	-13.98	46.00	49.02	18.47	0.93	36.40	Peak
4	408.300	31.77	-14.23	46.00	45.68	21.65	1.13	36.69	Peak
5	522.760	35.99	-10.01	46.00	48.15	23.57	1.32	37.05	Peak
6	623.640	36.40	-9.60	46.00	47.30	24.98	1.44	37.32	Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5150-5250MHz

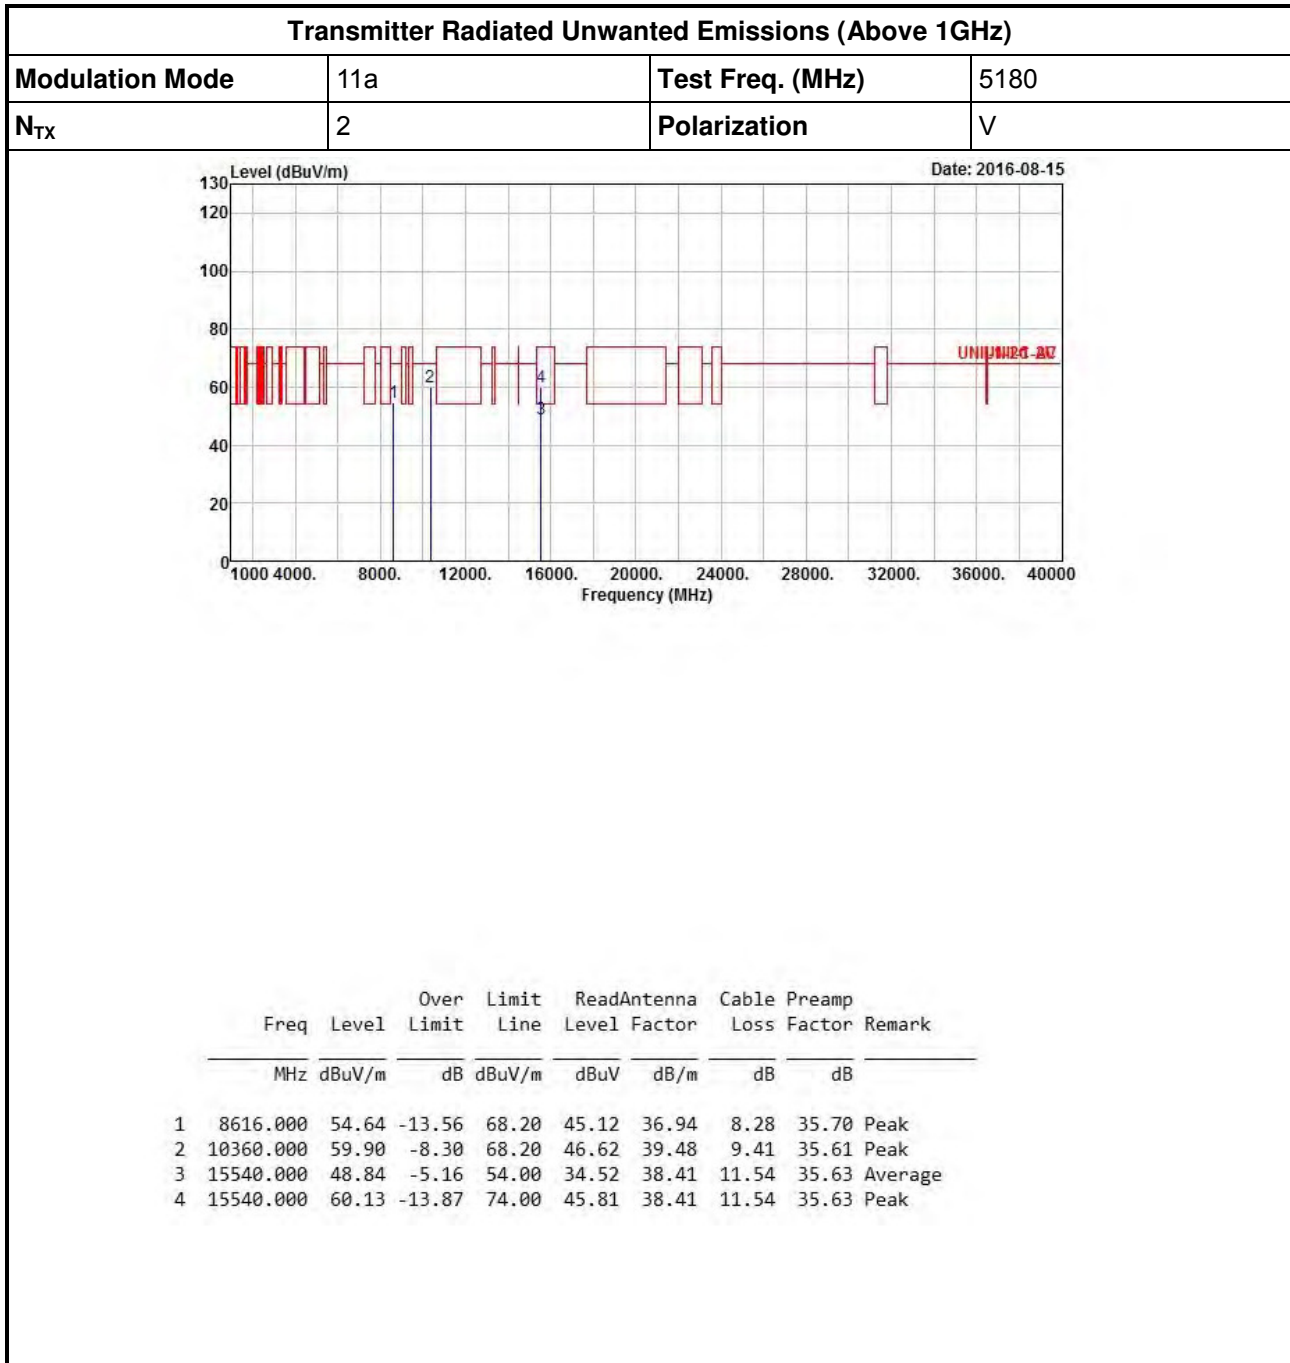

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

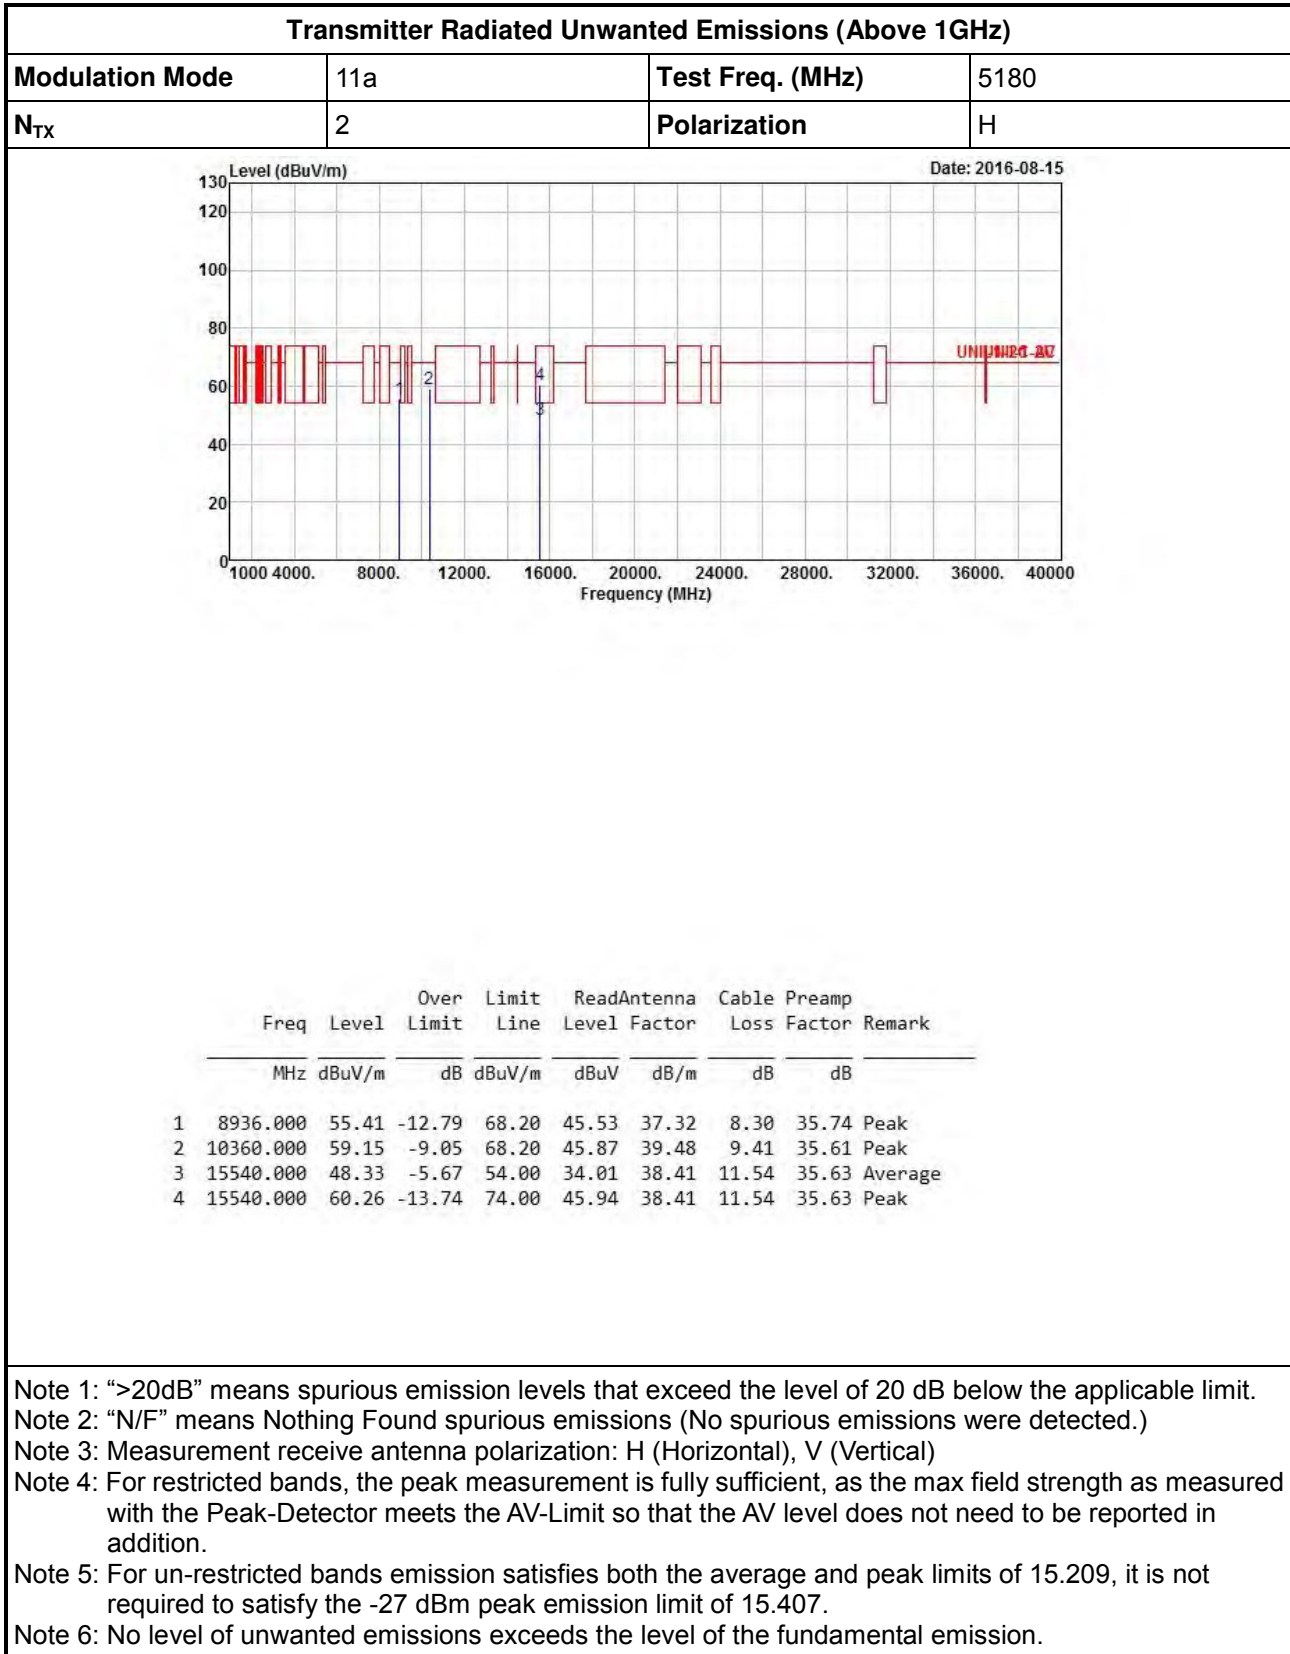


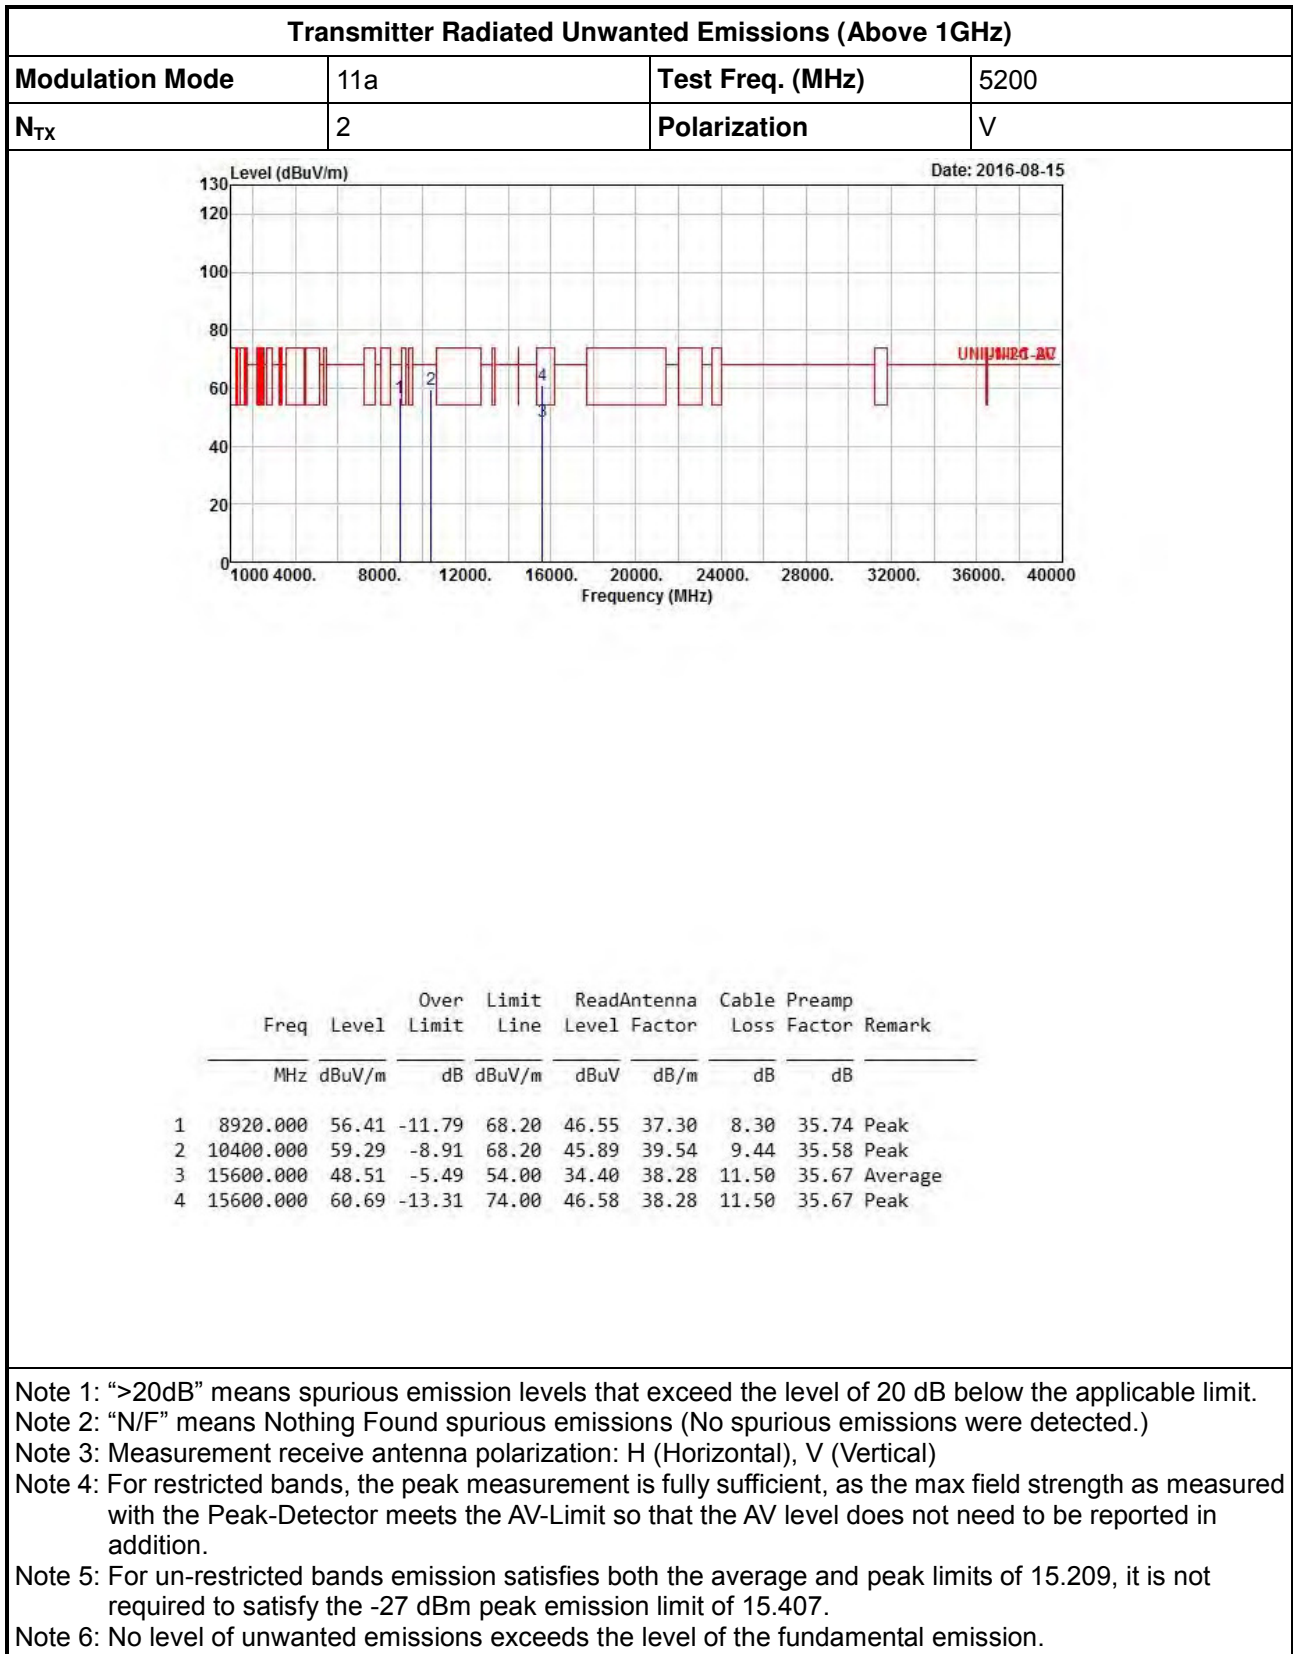




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	11a	Test Freq. (MHz)	5200
N _{TX}	2	Polarization	H

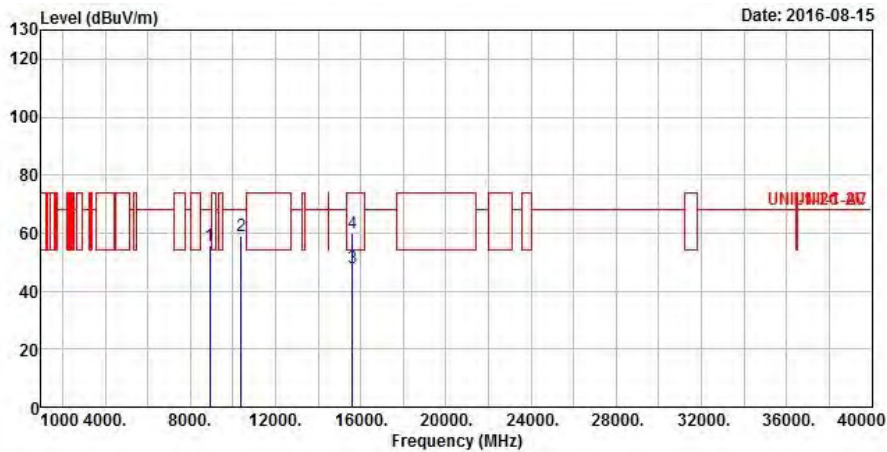

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	
			dB	dBuV/m	dBuV	dB	dB	
1	8912.000	55.54	-12.66	68.20	45.69	37.29	8.30	35.74 Peak
2	10400.000	59.01	-9.19	68.20	45.61	39.54	9.44	35.58 Peak
3	15600.000	48.14	-5.86	54.00	34.03	38.28	11.50	35.67 Average
4	15600.000	60.13	-13.87	74.00	46.02	38.28	11.50	35.67 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

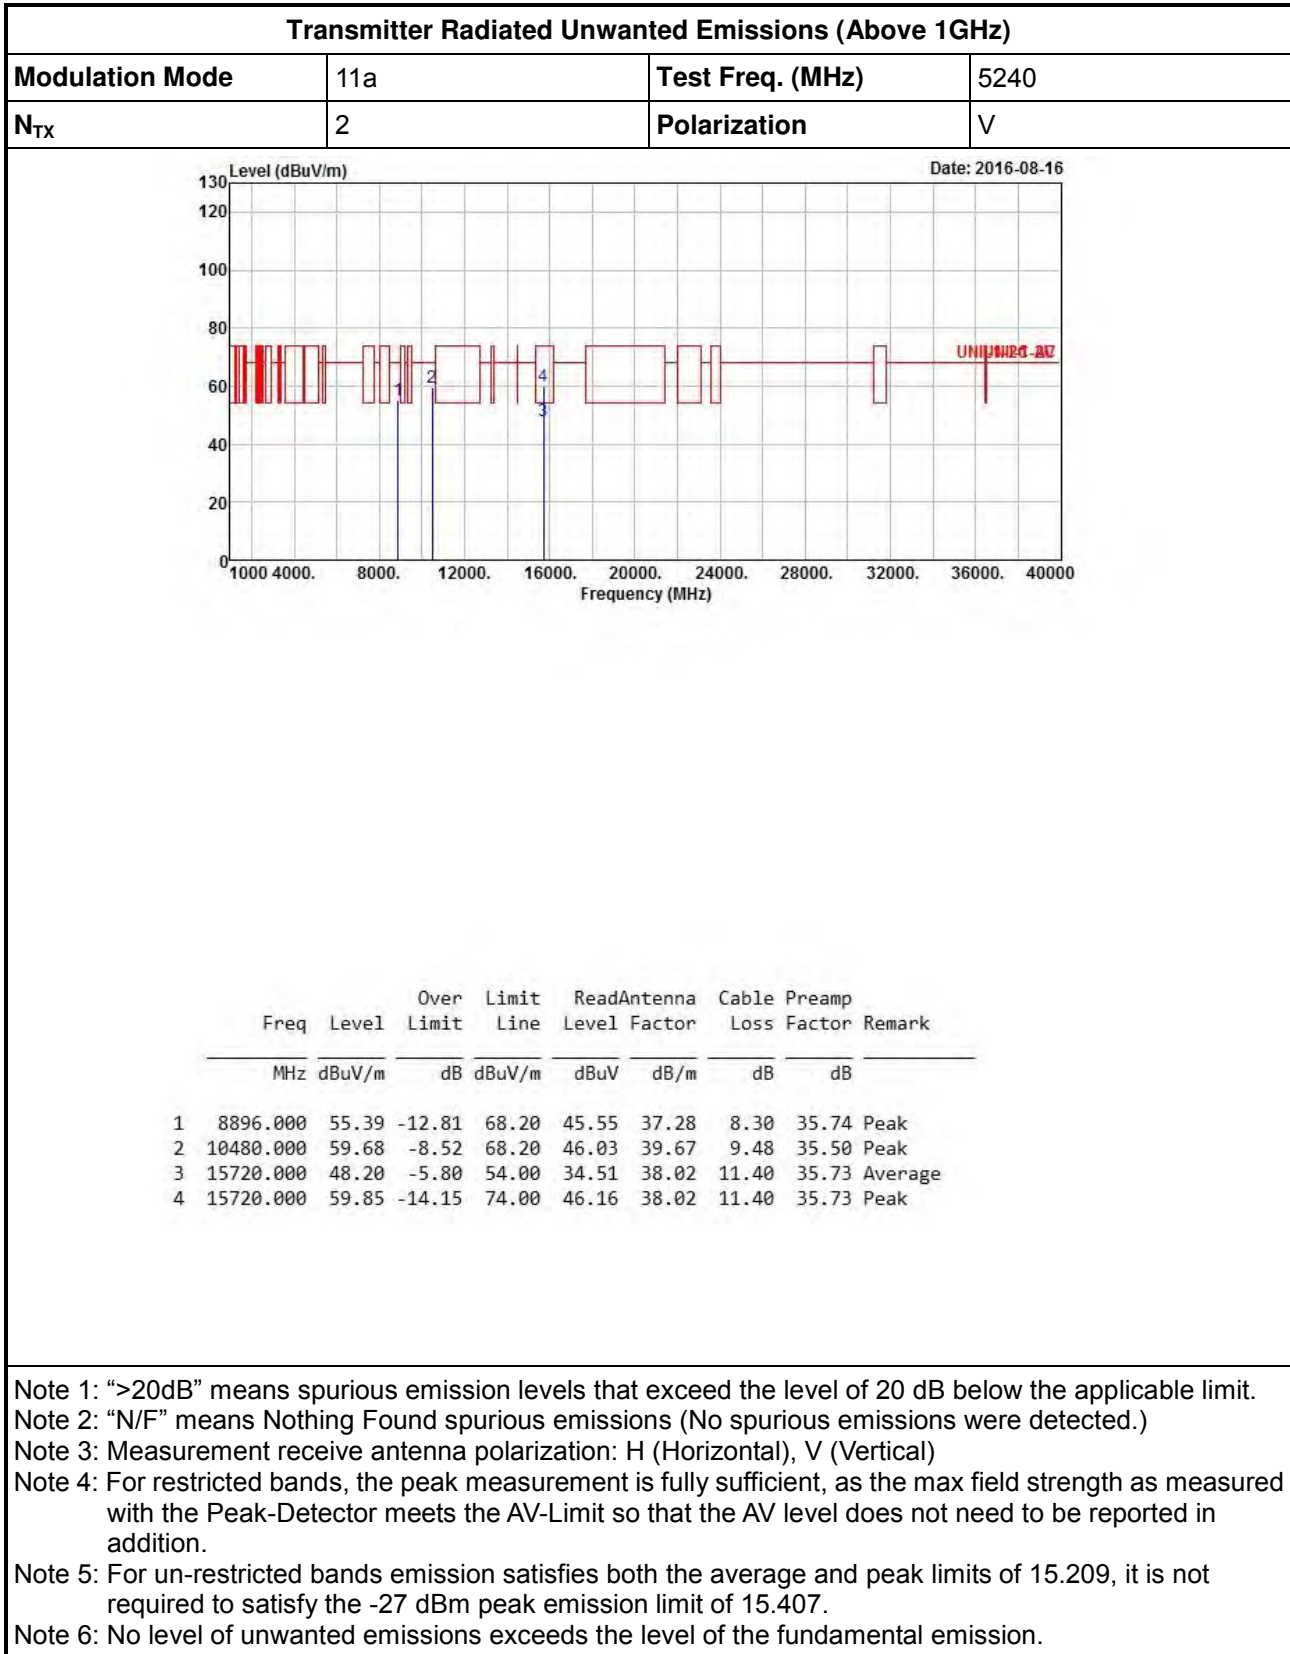


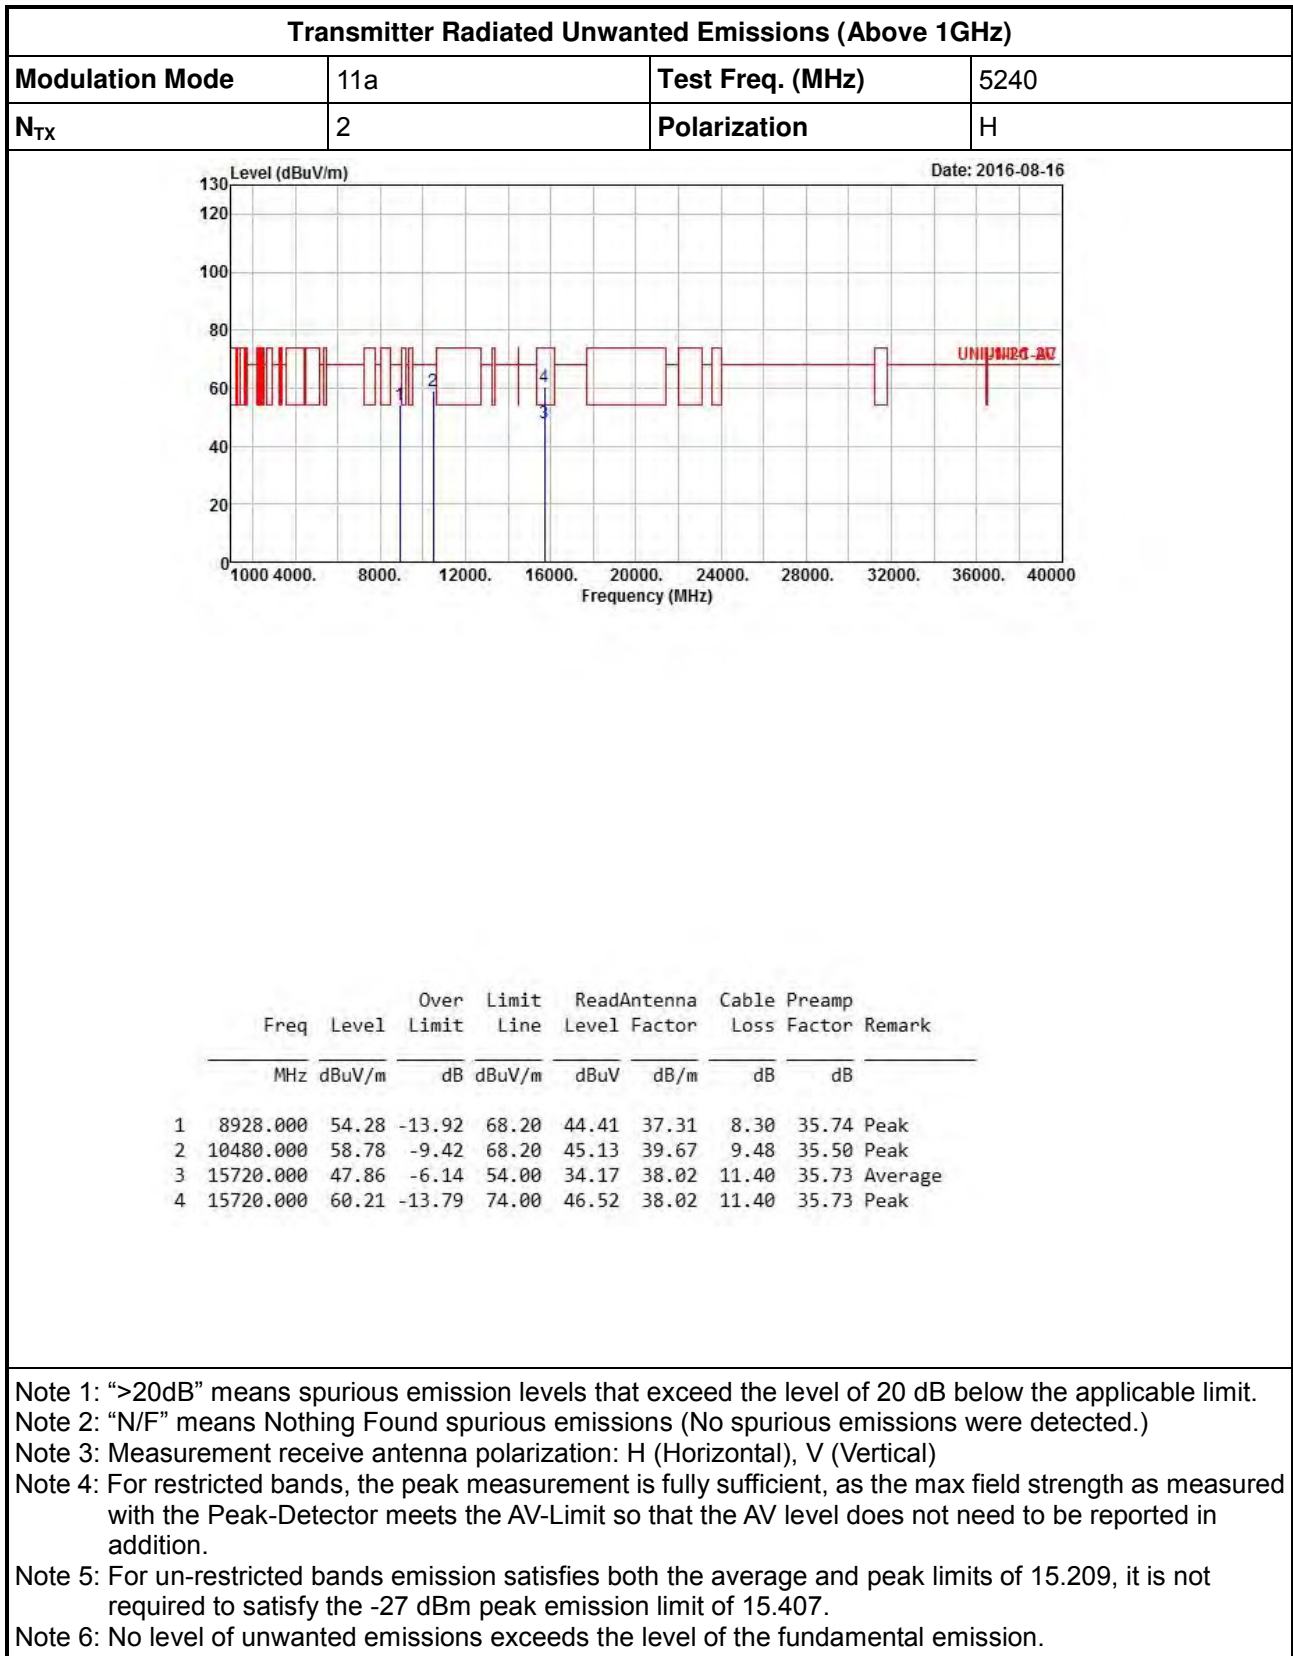




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	VHT20	Test Freq. (MHz)	5180
N _{TX}	2	Polarization	V

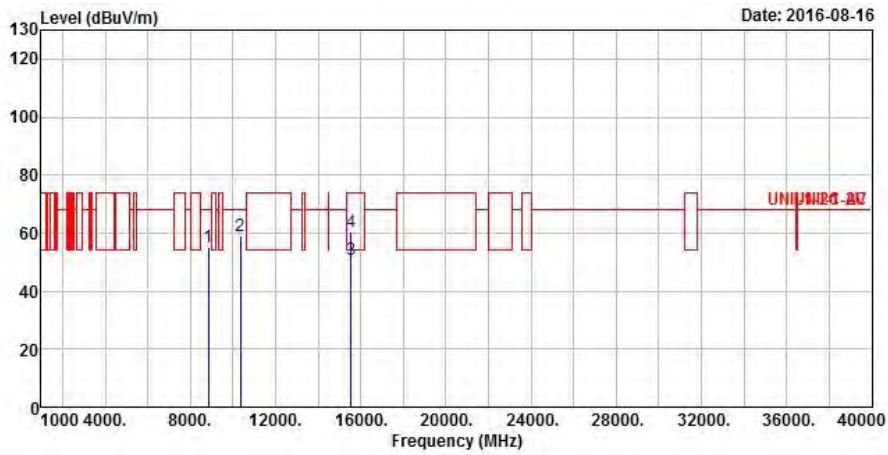



	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	
			dB	dBuV/m	dBuV	dB	dB	
1	8852.000	55.12	-13.08	68.20	45.33	37.22	8.30	35.73 Peak
2	10360.000	58.98	-9.22	68.20	45.70	39.48	9.41	35.61 Peak
3	15540.000	50.90	-3.10	54.00	36.58	38.41	11.54	35.63 Average
4	15540.000	60.44	-13.56	74.00	46.12	38.41	11.54	35.63 Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

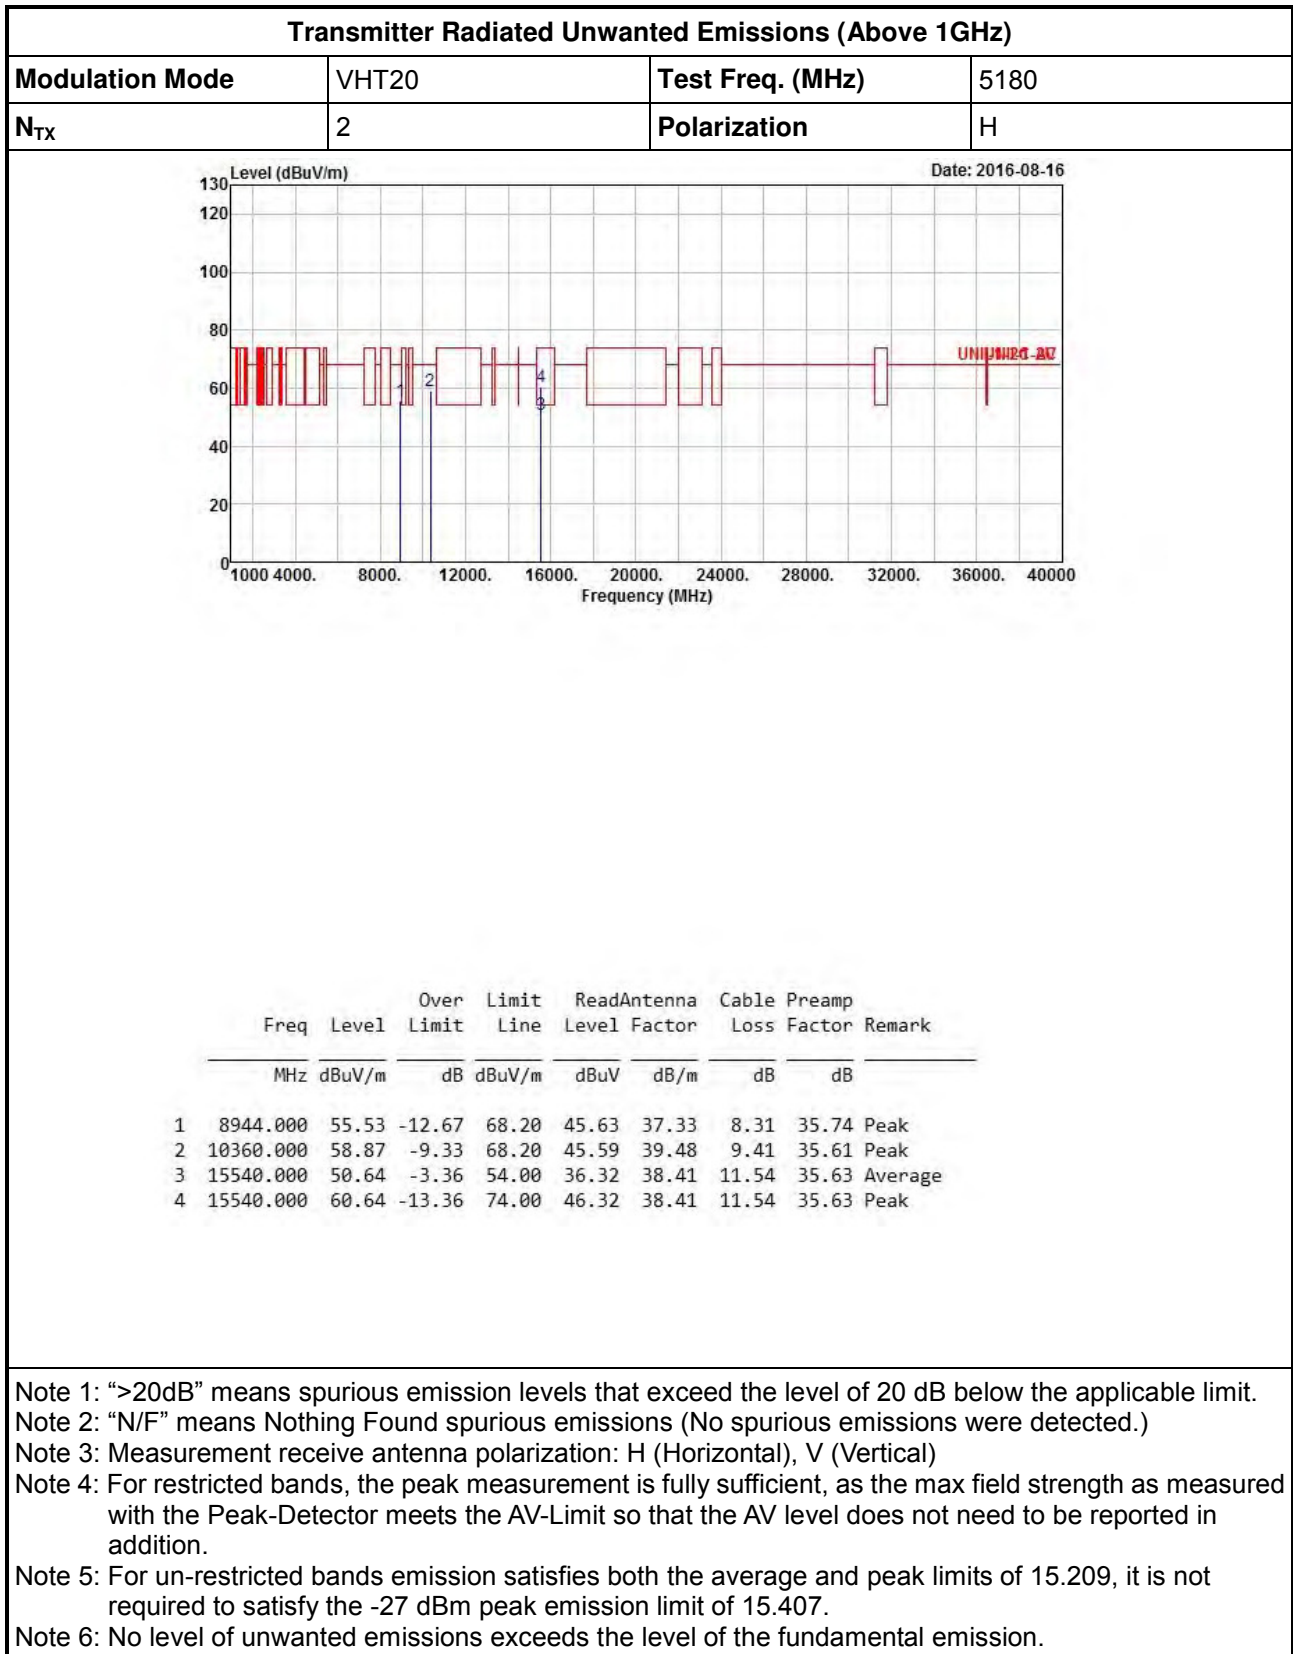


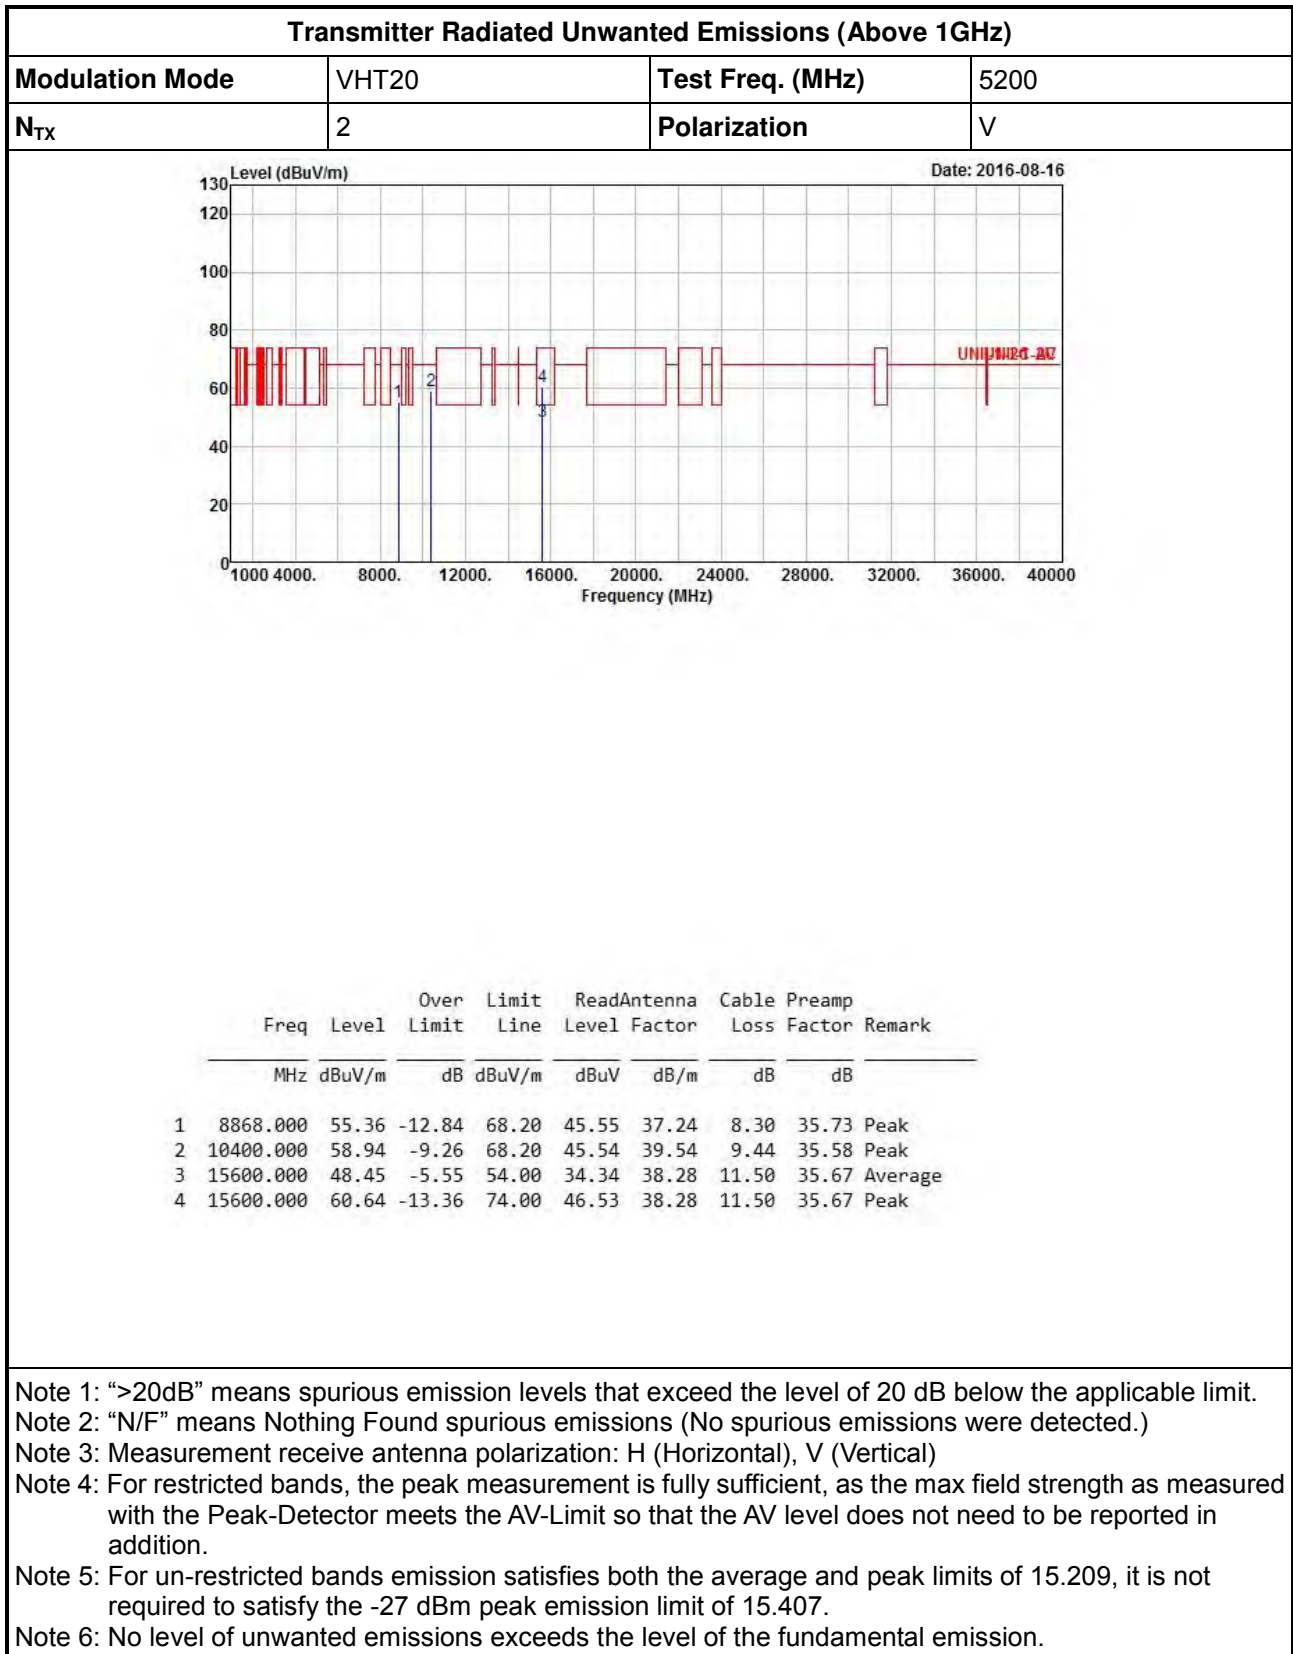


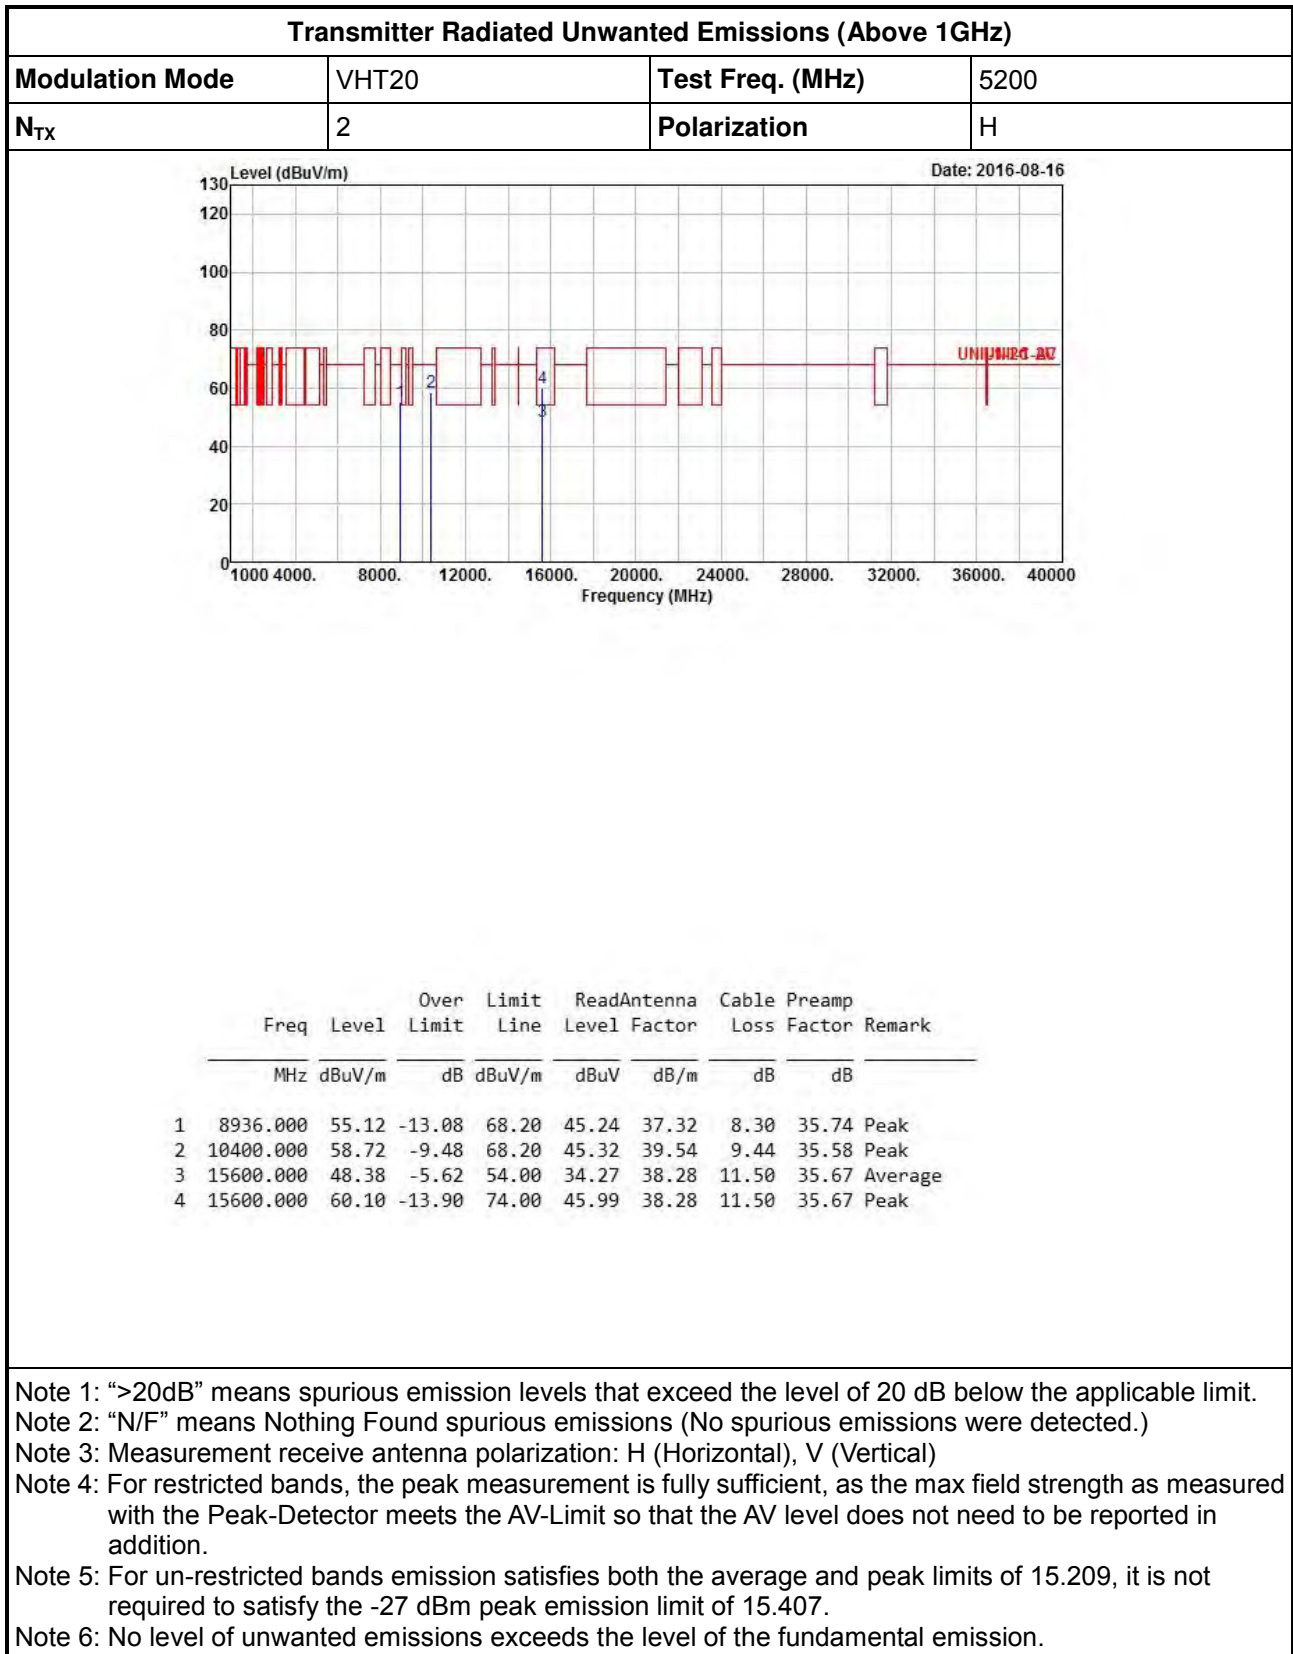


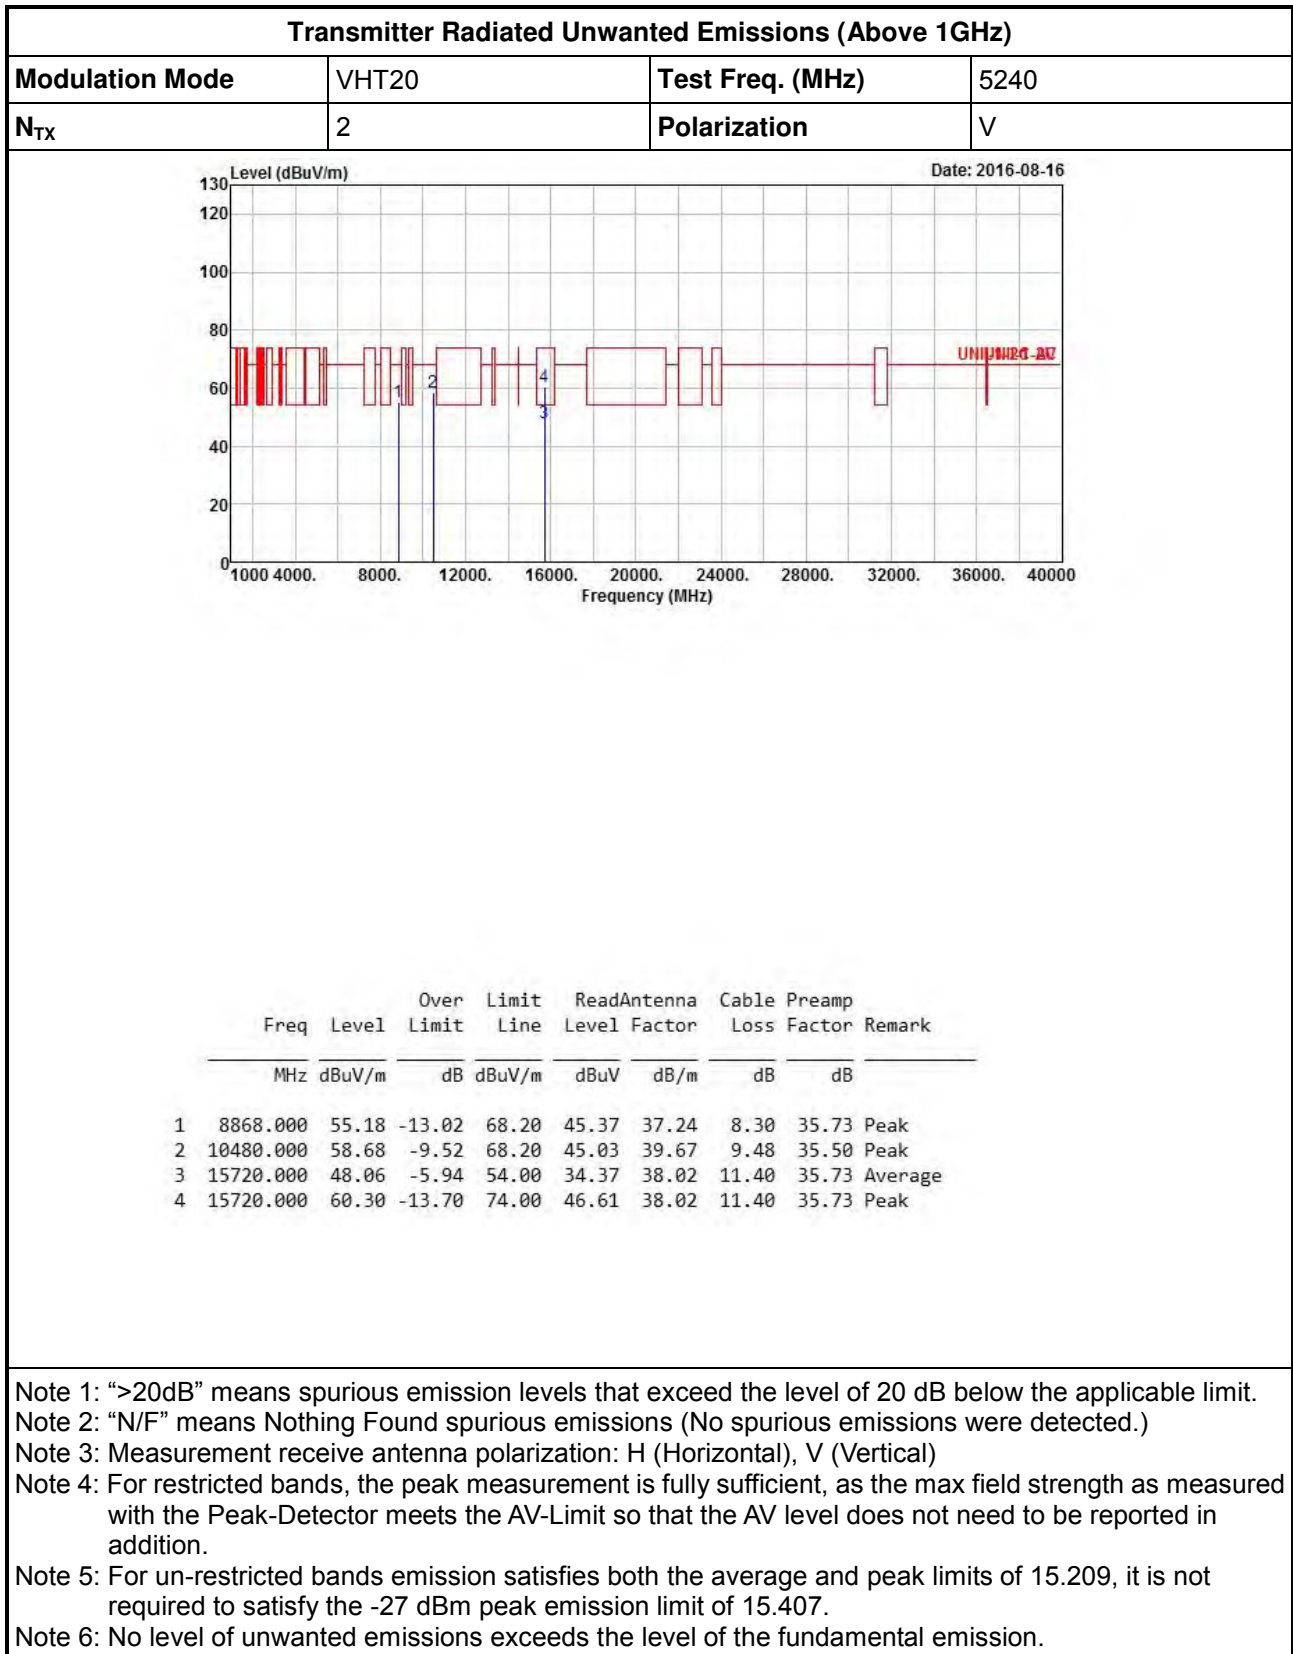


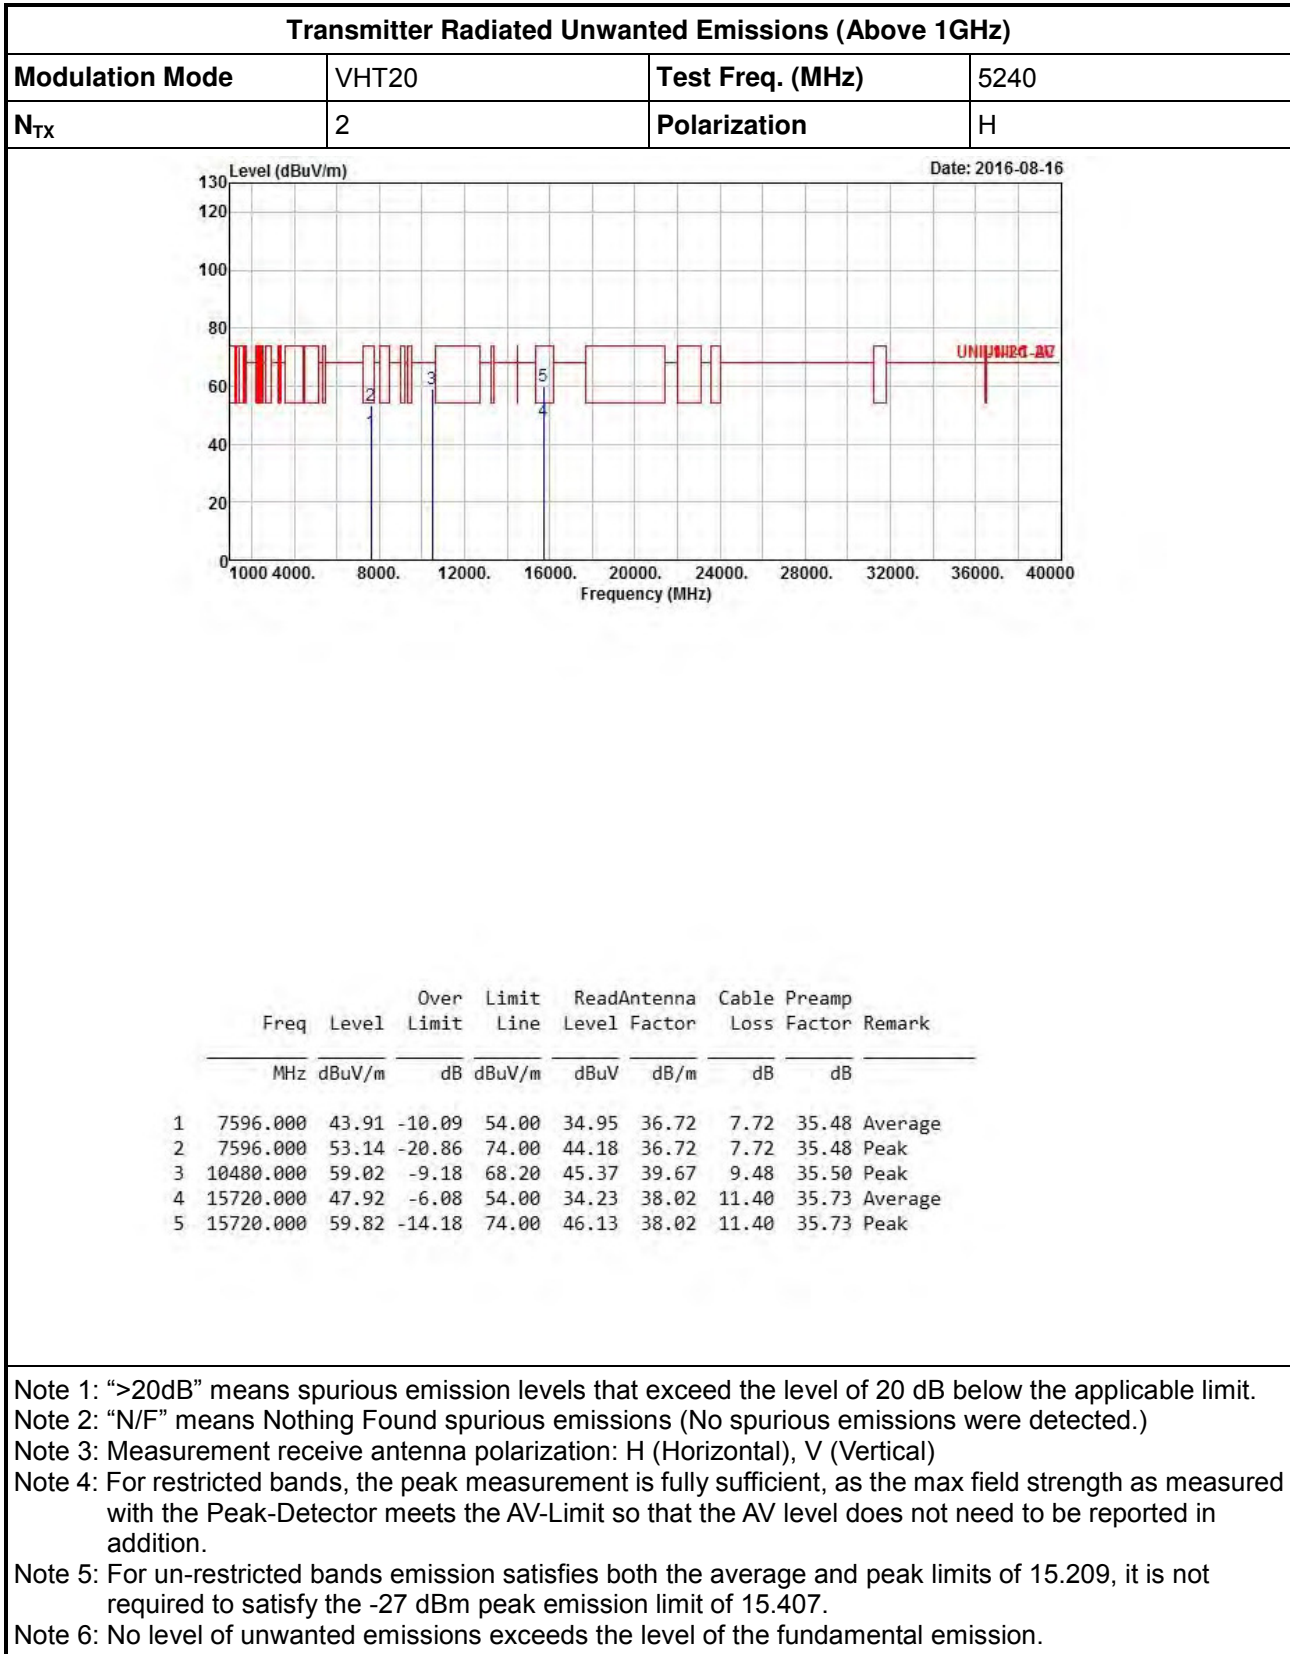


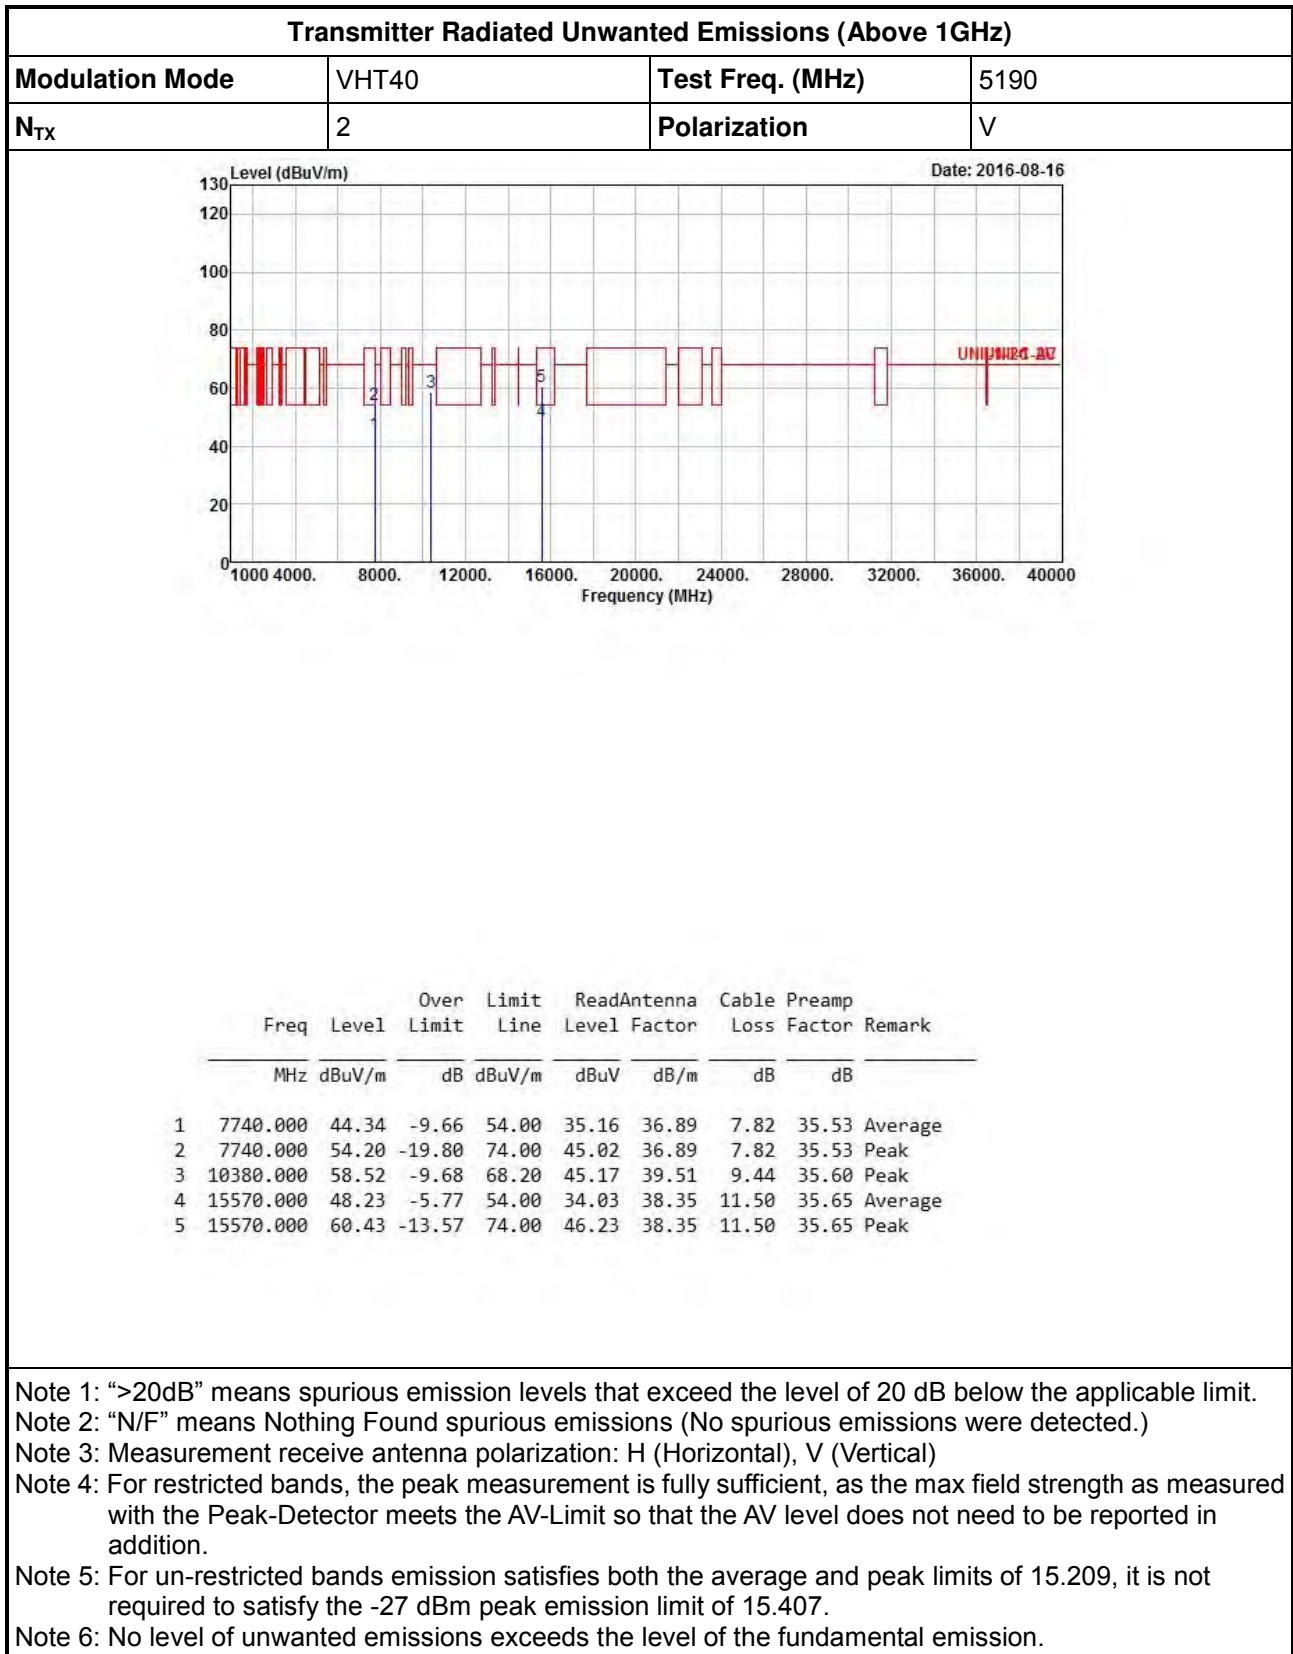


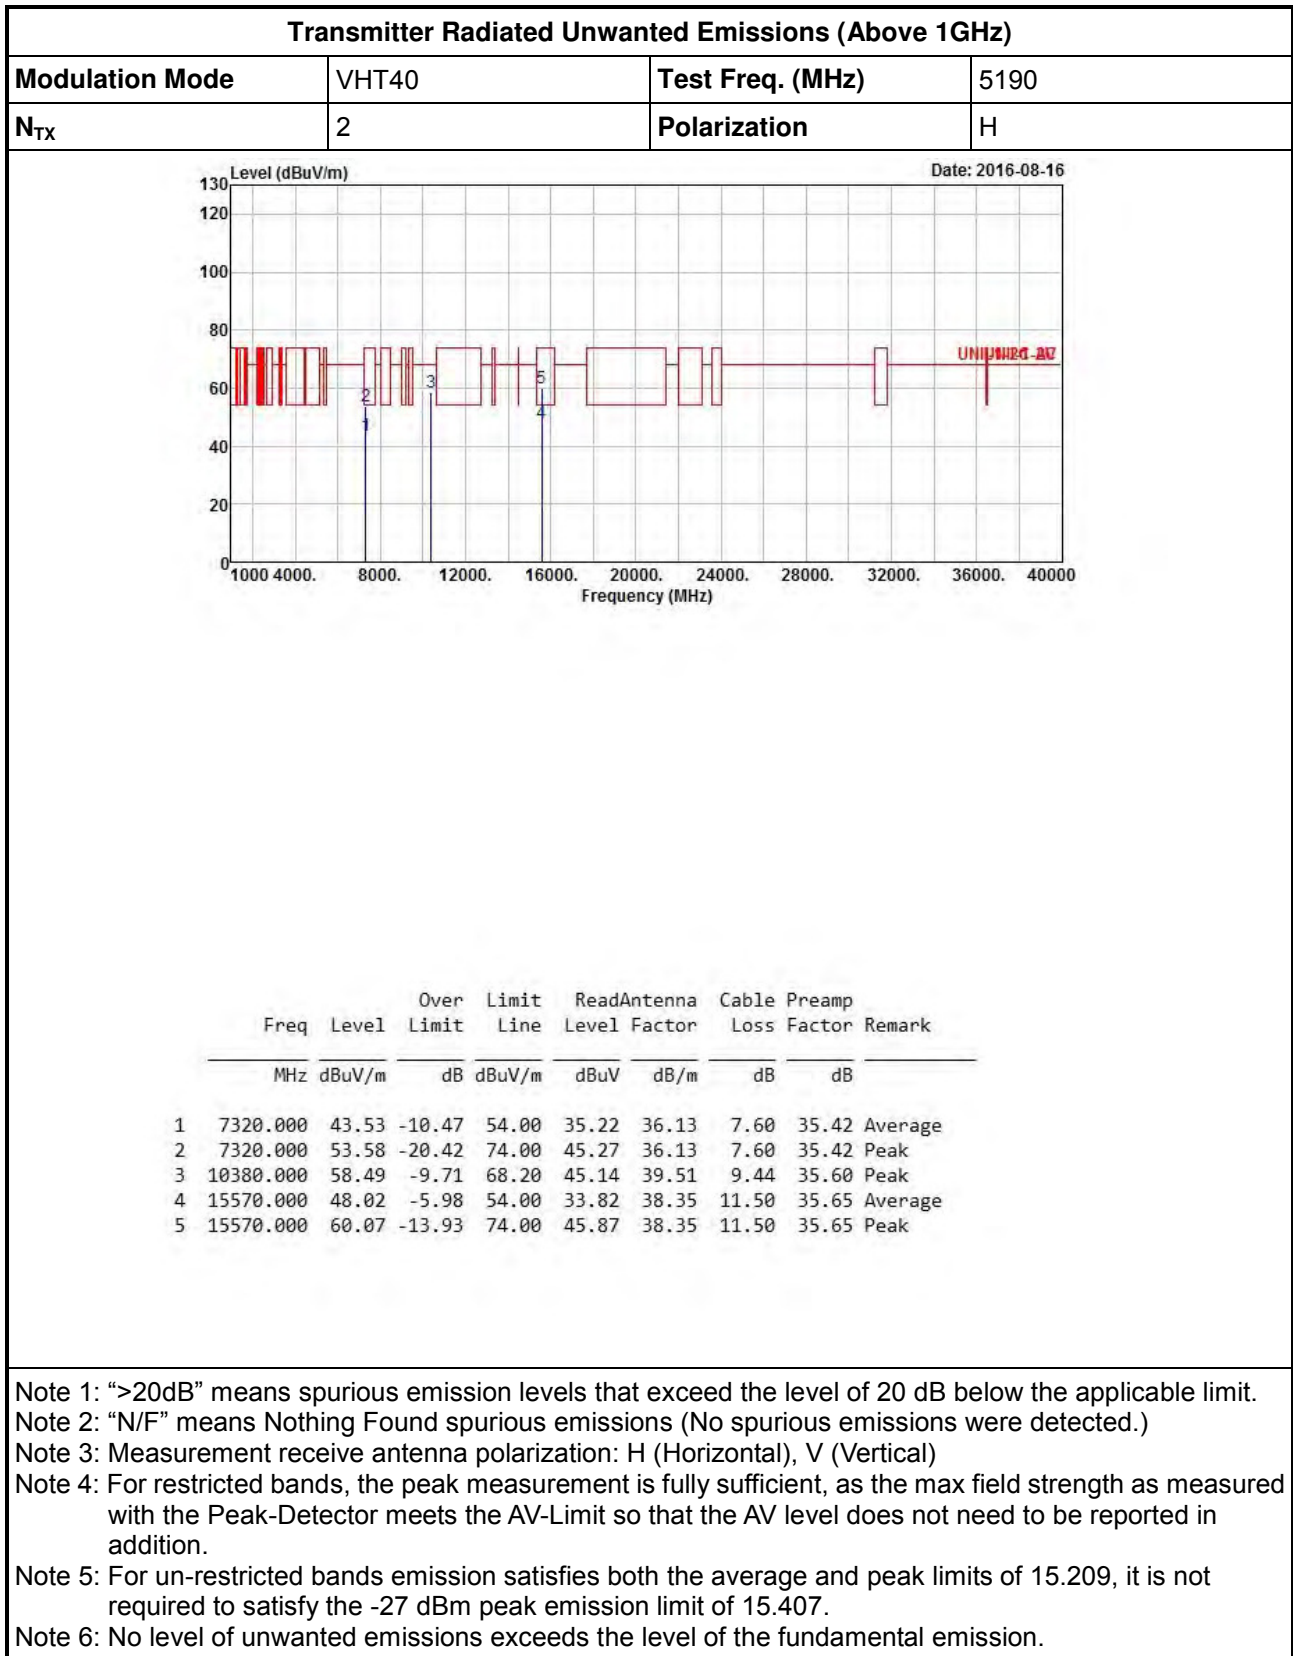

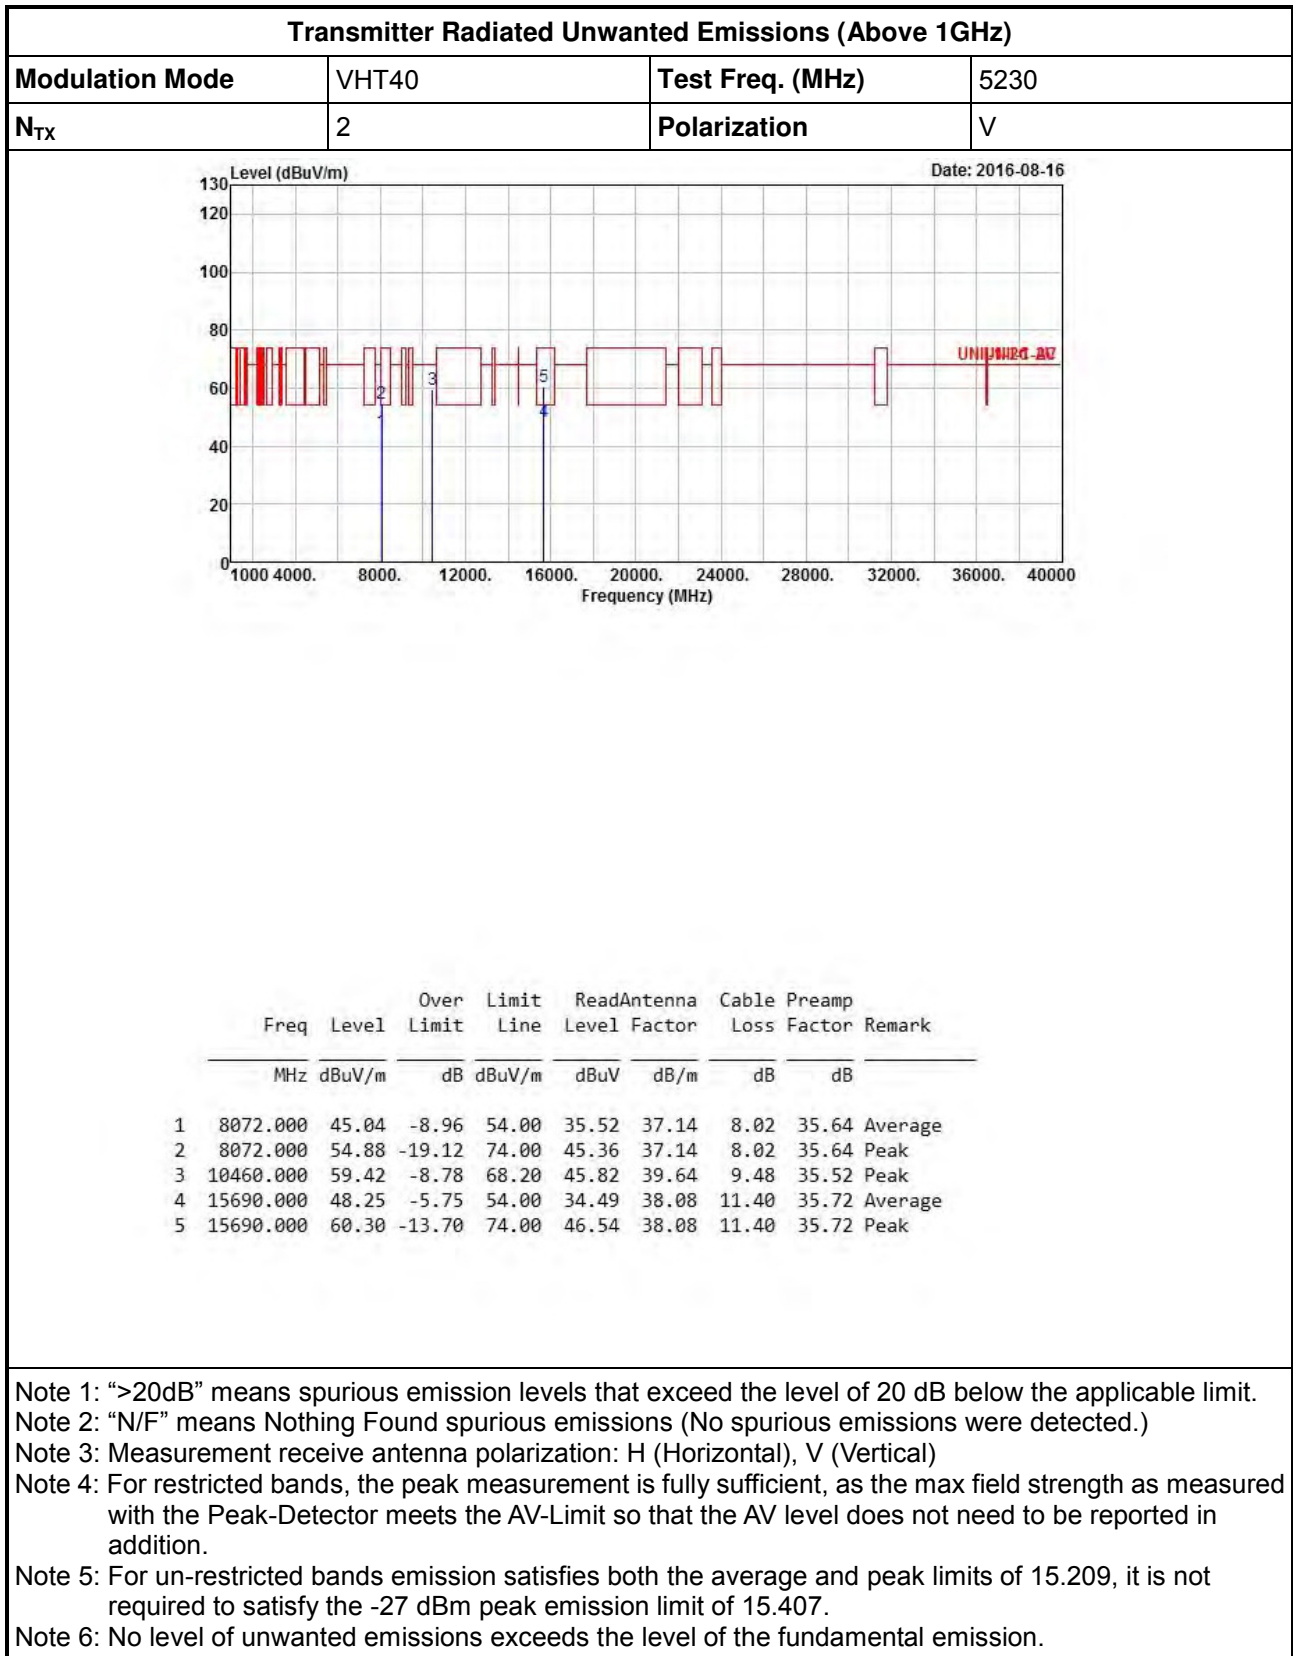

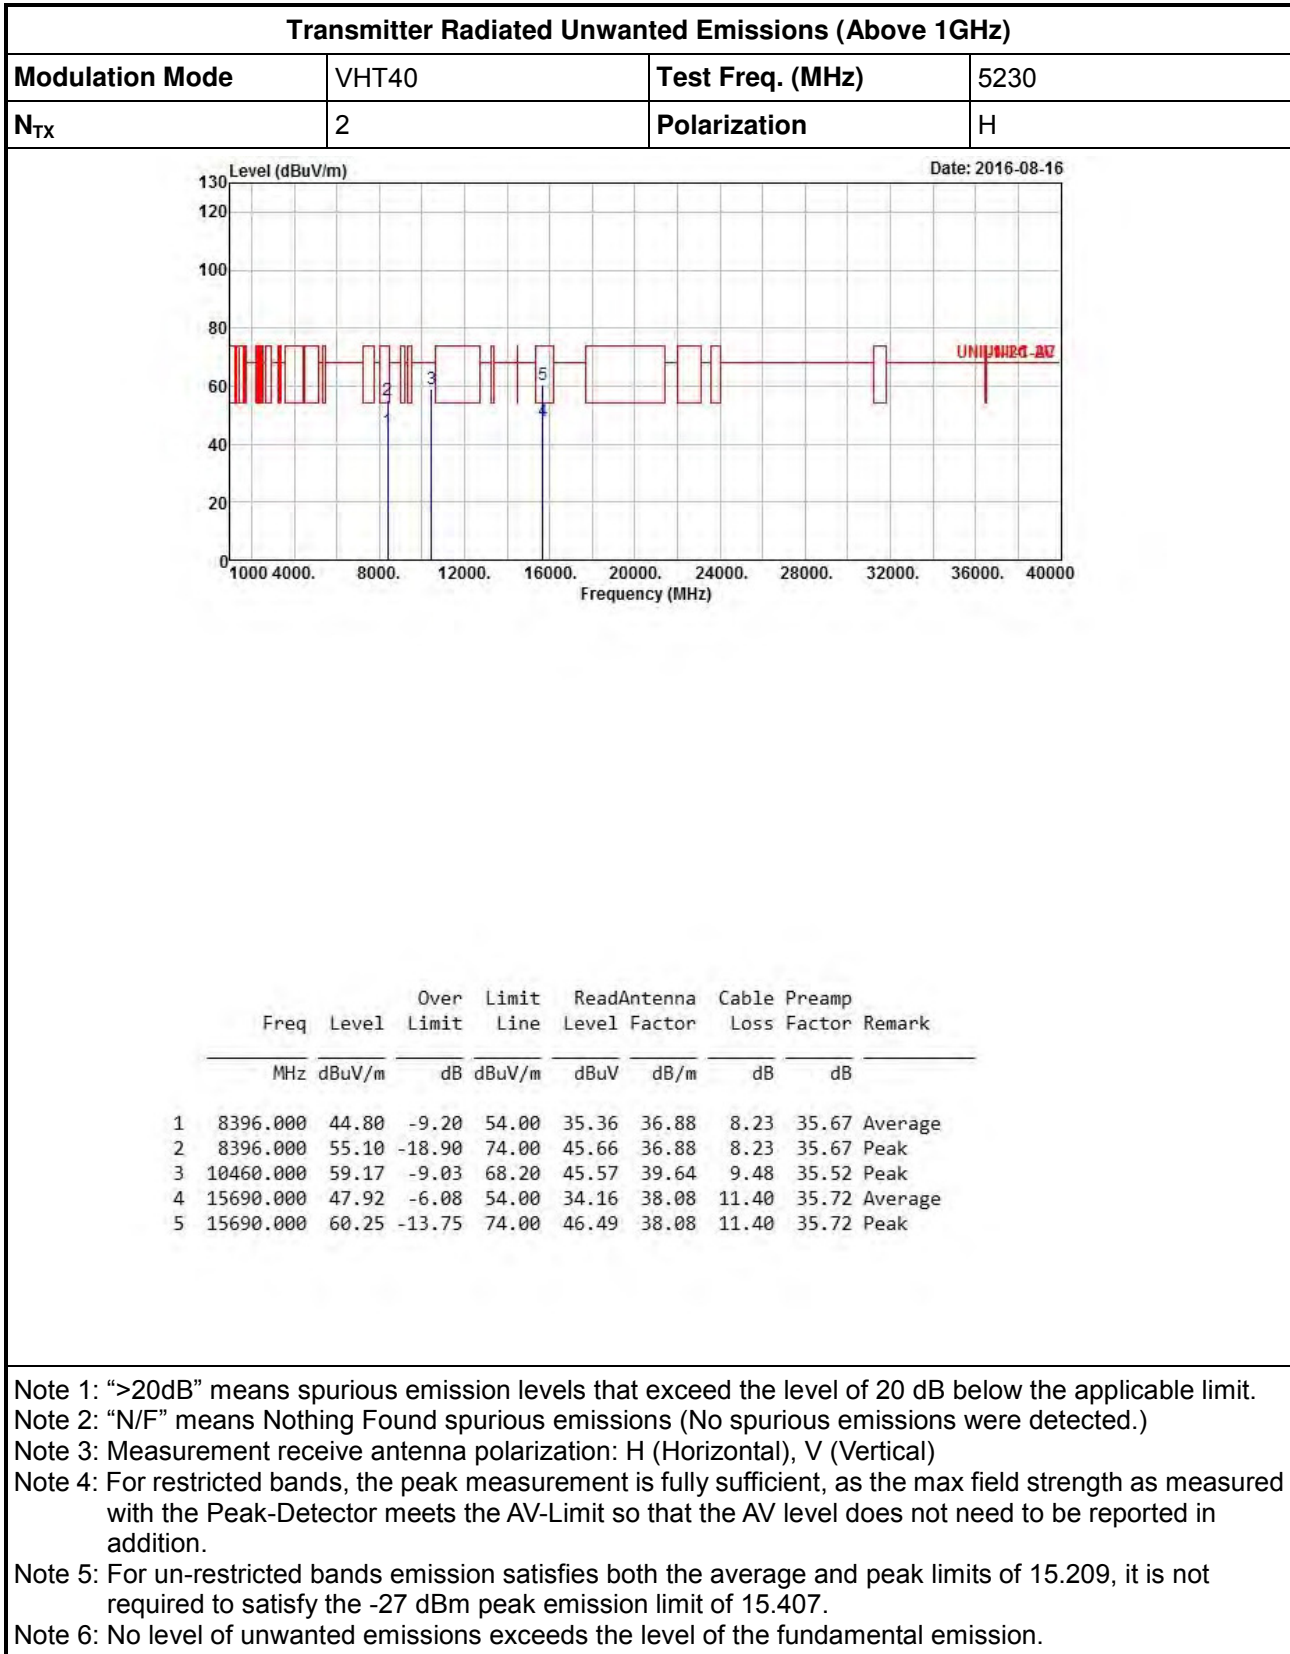

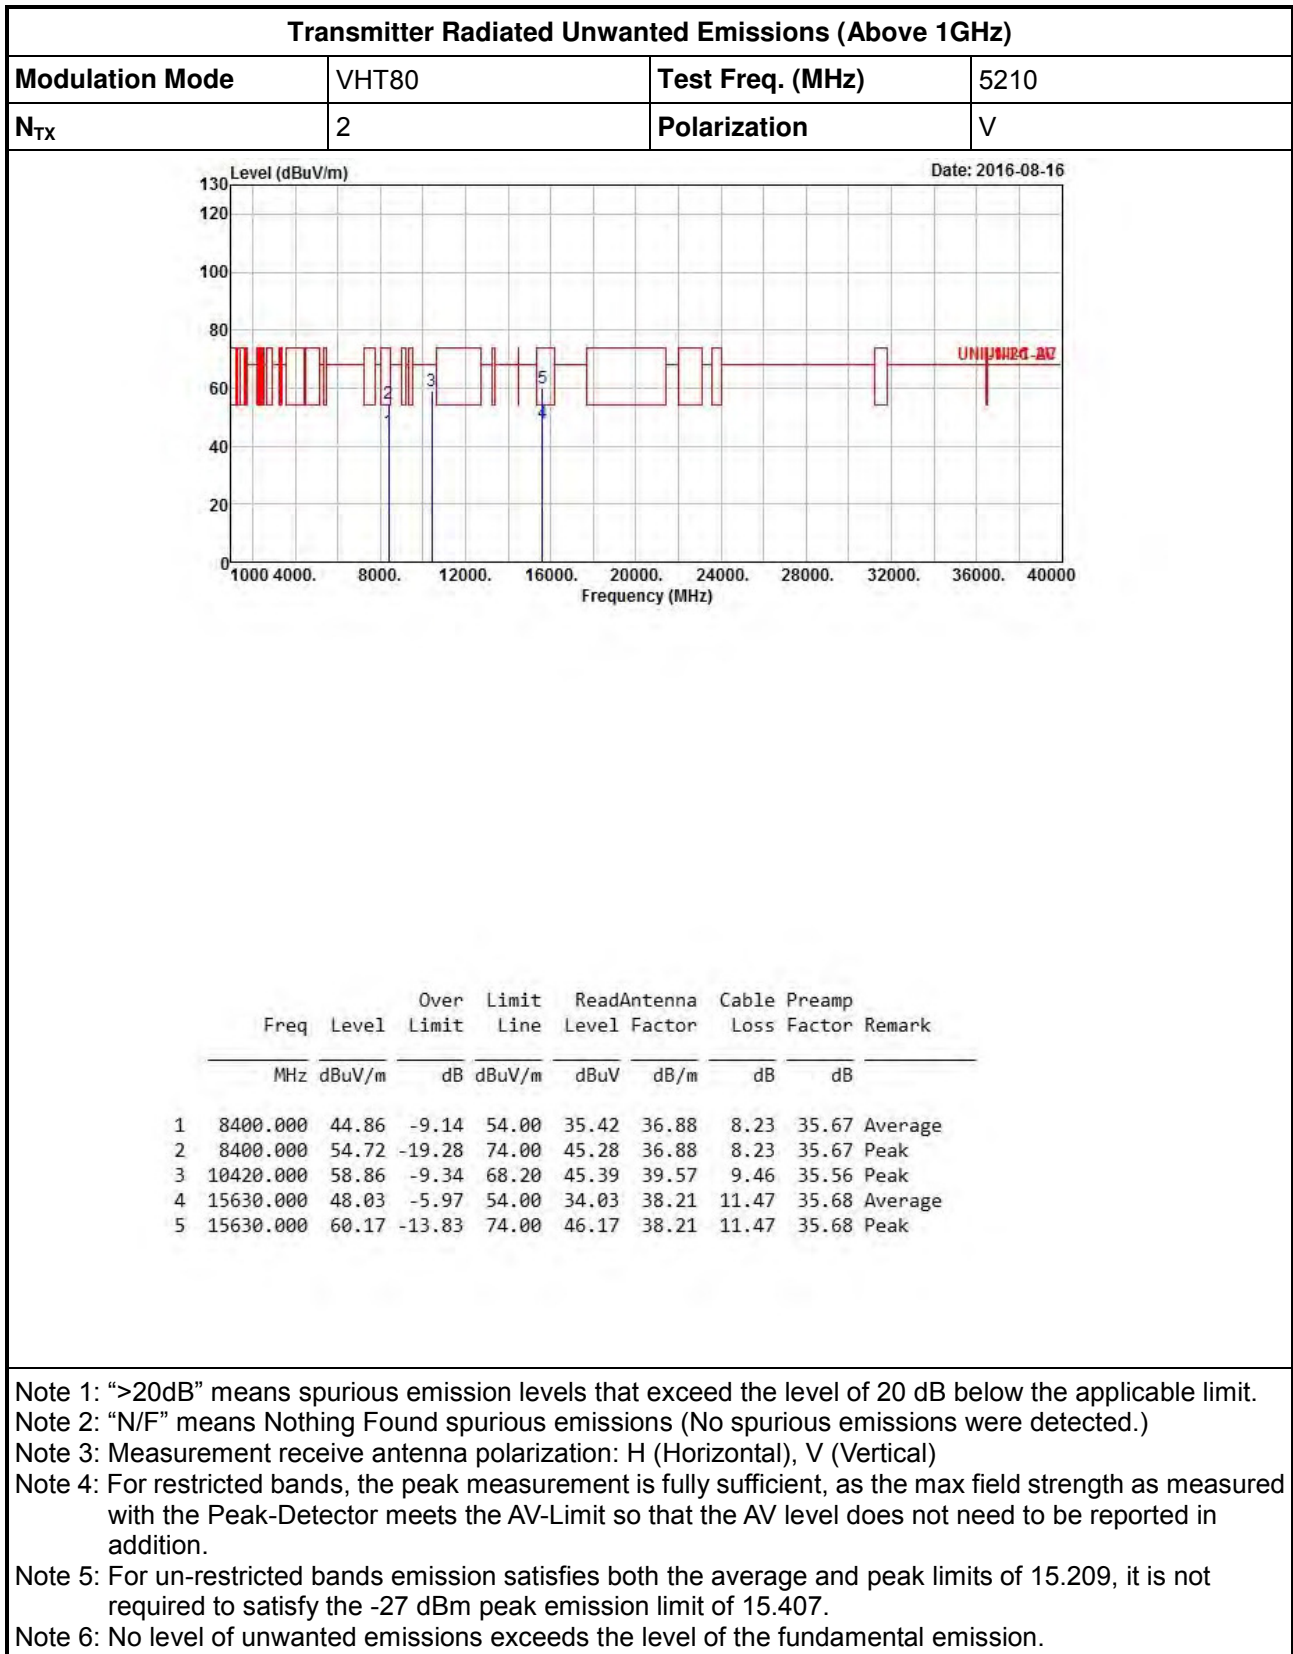


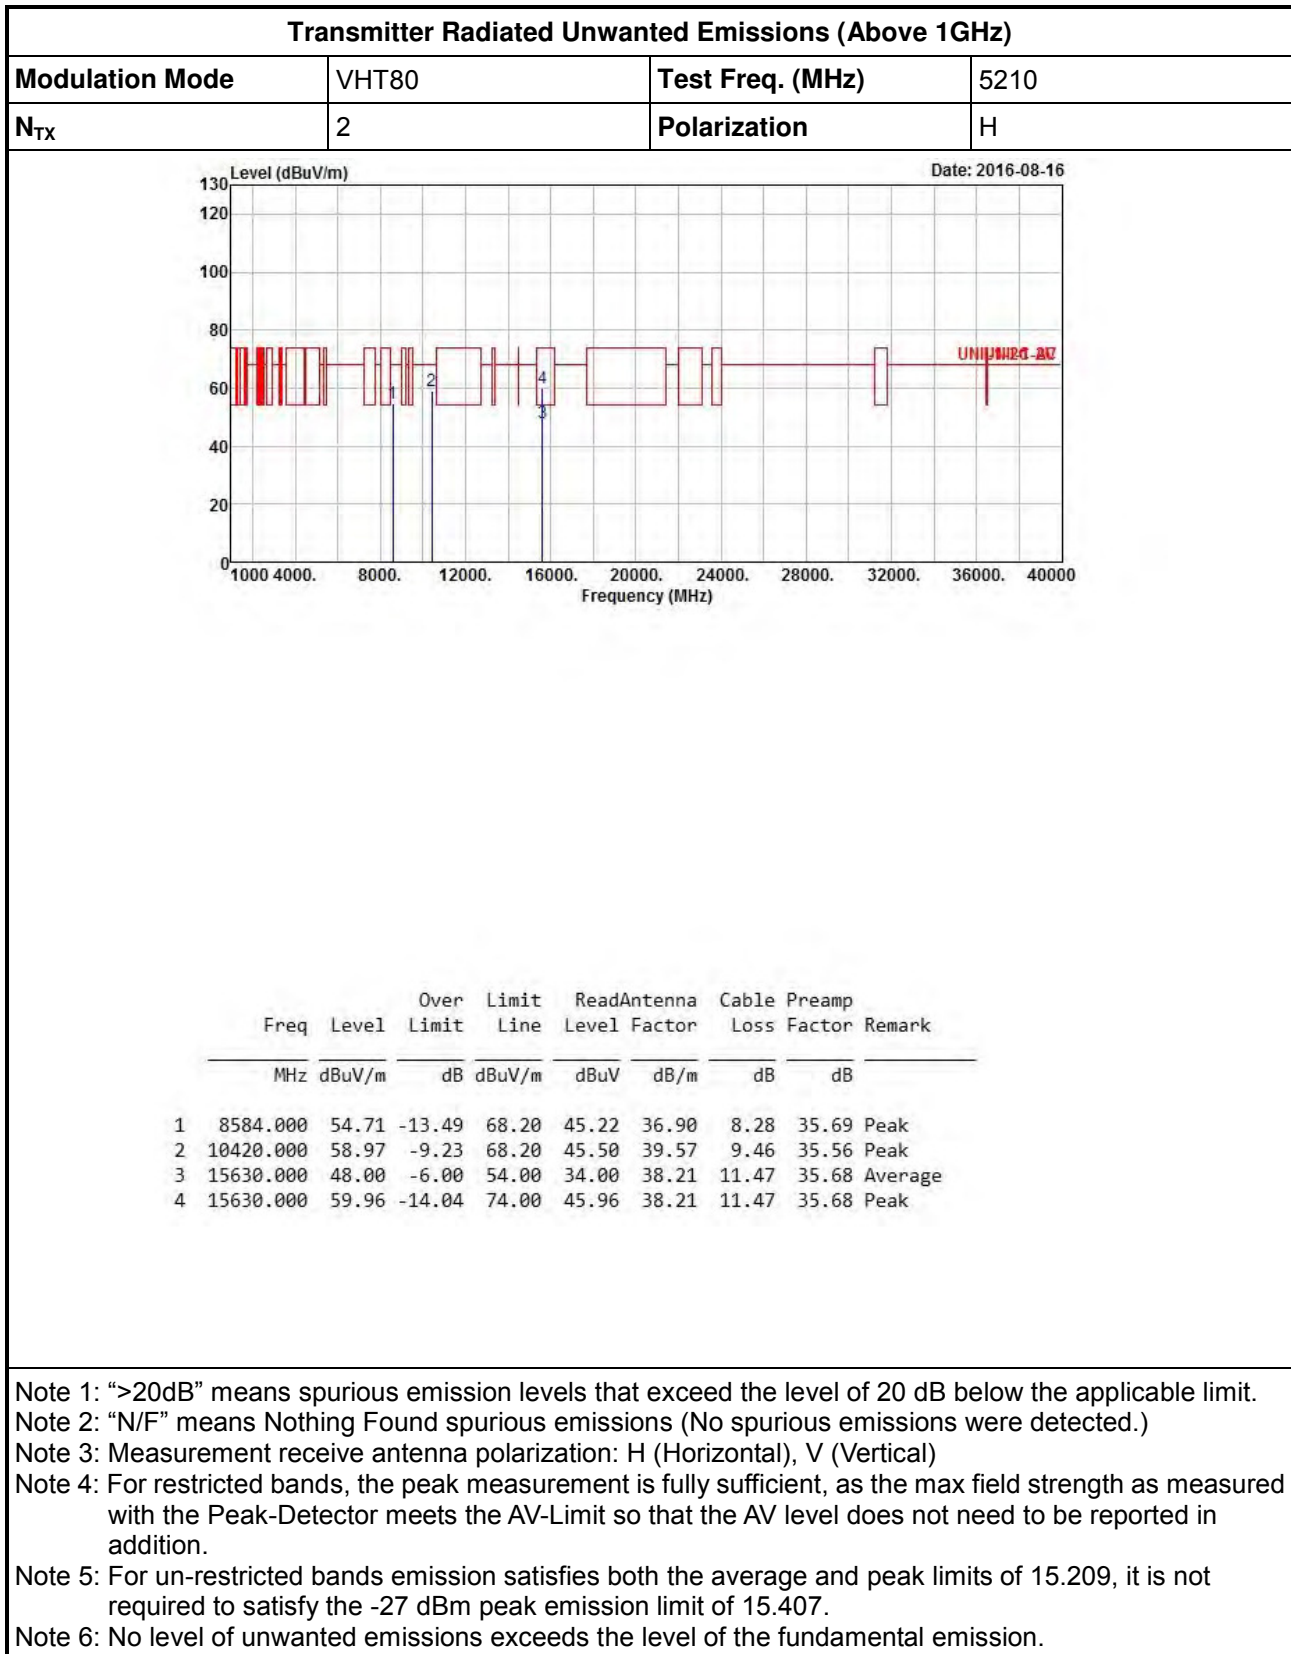




Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5250-5350MHz


Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11a	Test Freq. (MHz)	5260
N _{TX}	2	Polarization	V

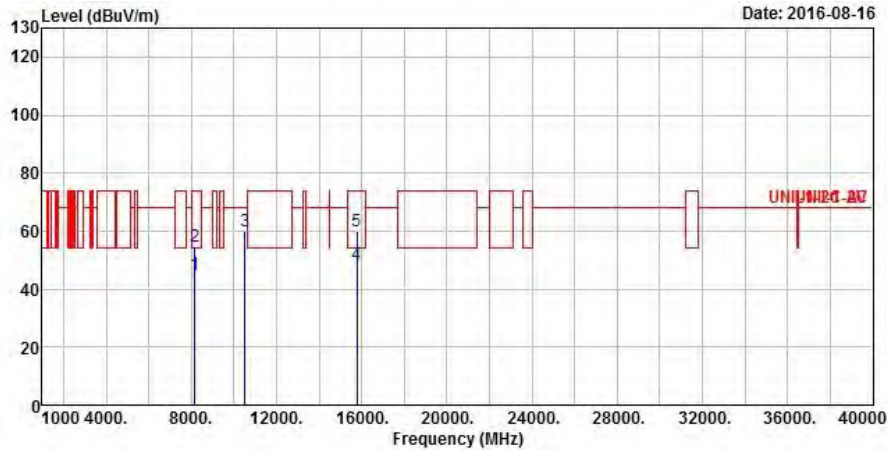



	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8152.000	44.95	-9.05	54.00	35.45	37.08	8.07	35.65	Average
2	8152.000	54.90	-19.10	74.00	45.40	37.08	8.07	35.65	Peak
3	10520.000	59.92	-8.28	68.20	46.17	39.72	9.50	35.47	Peak
4	15780.000	48.57	-5.43	54.00	35.13	37.88	11.33	35.77	Average
5	15780.000	60.01	-13.99	74.00	46.57	37.88	11.33	35.77	Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

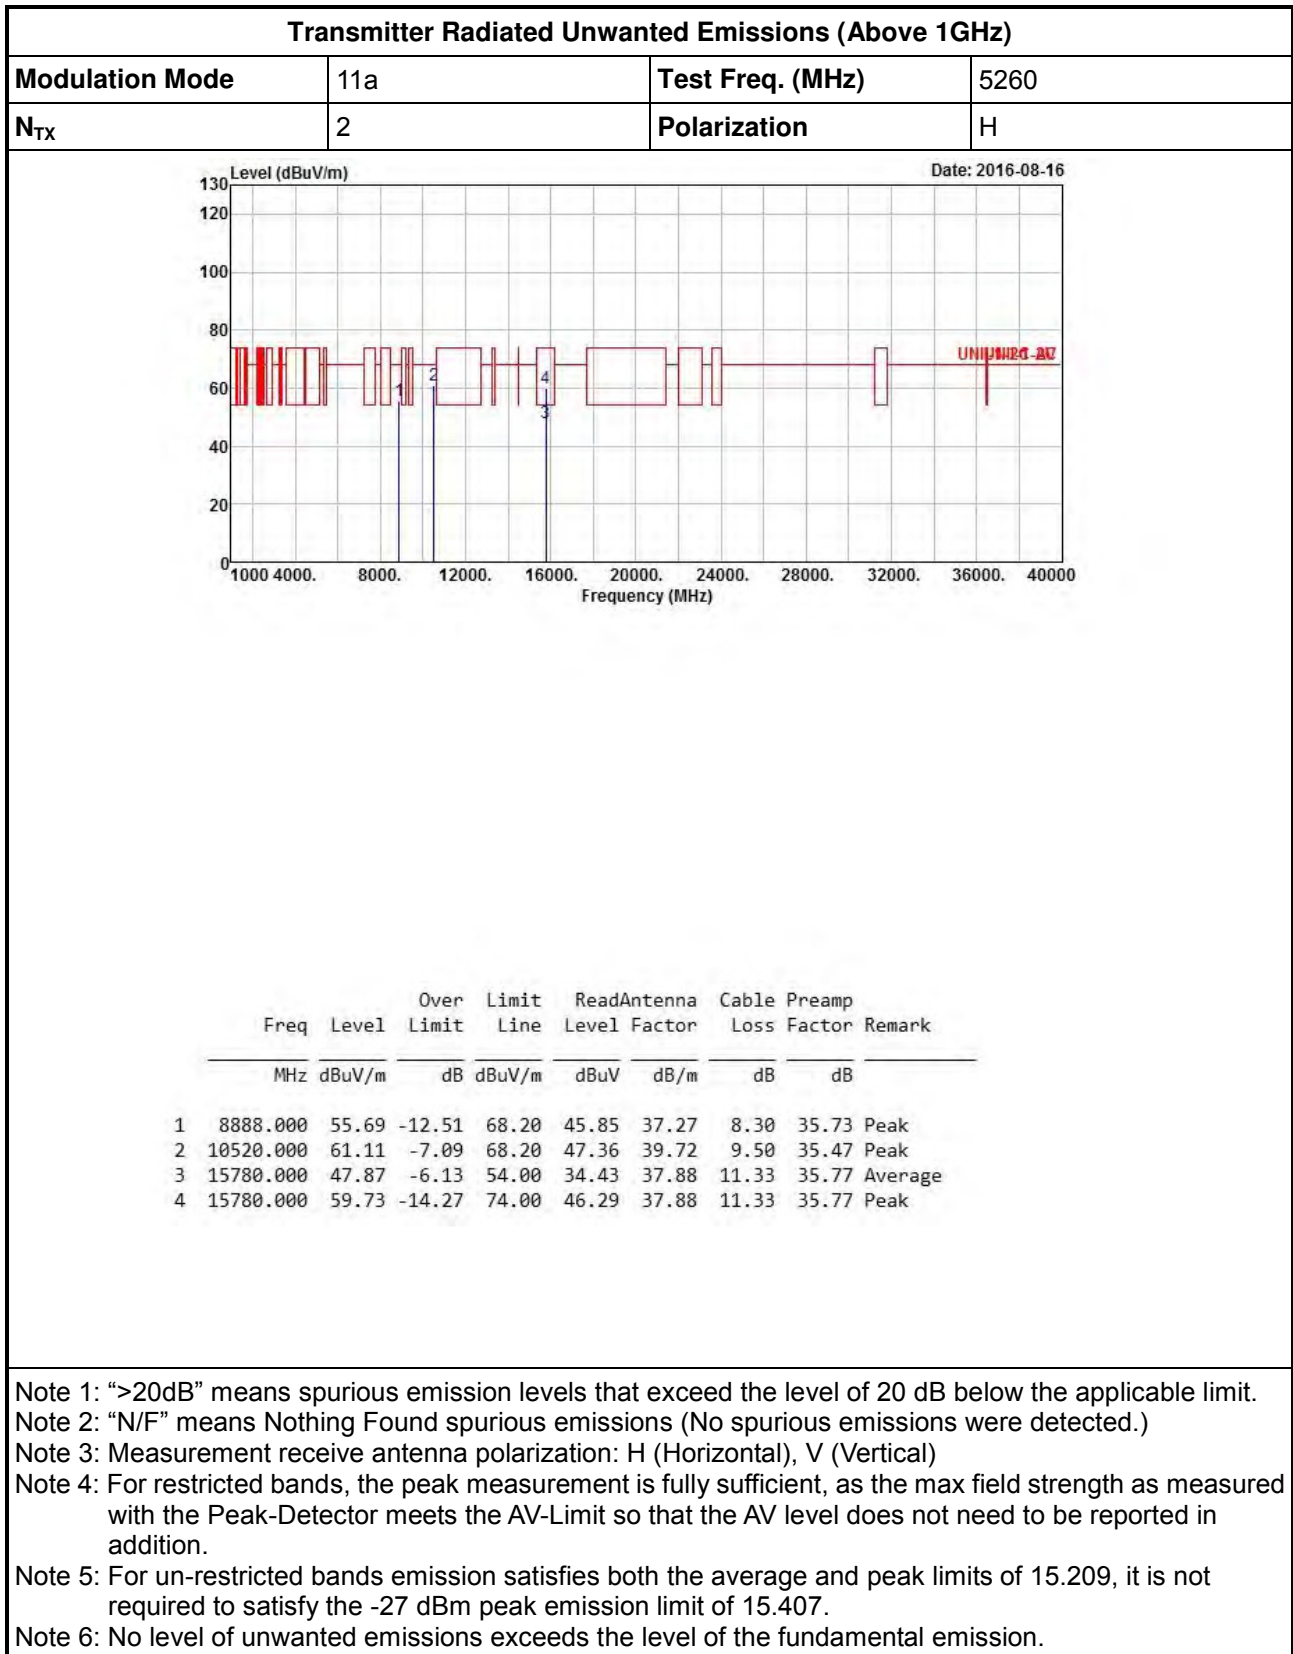

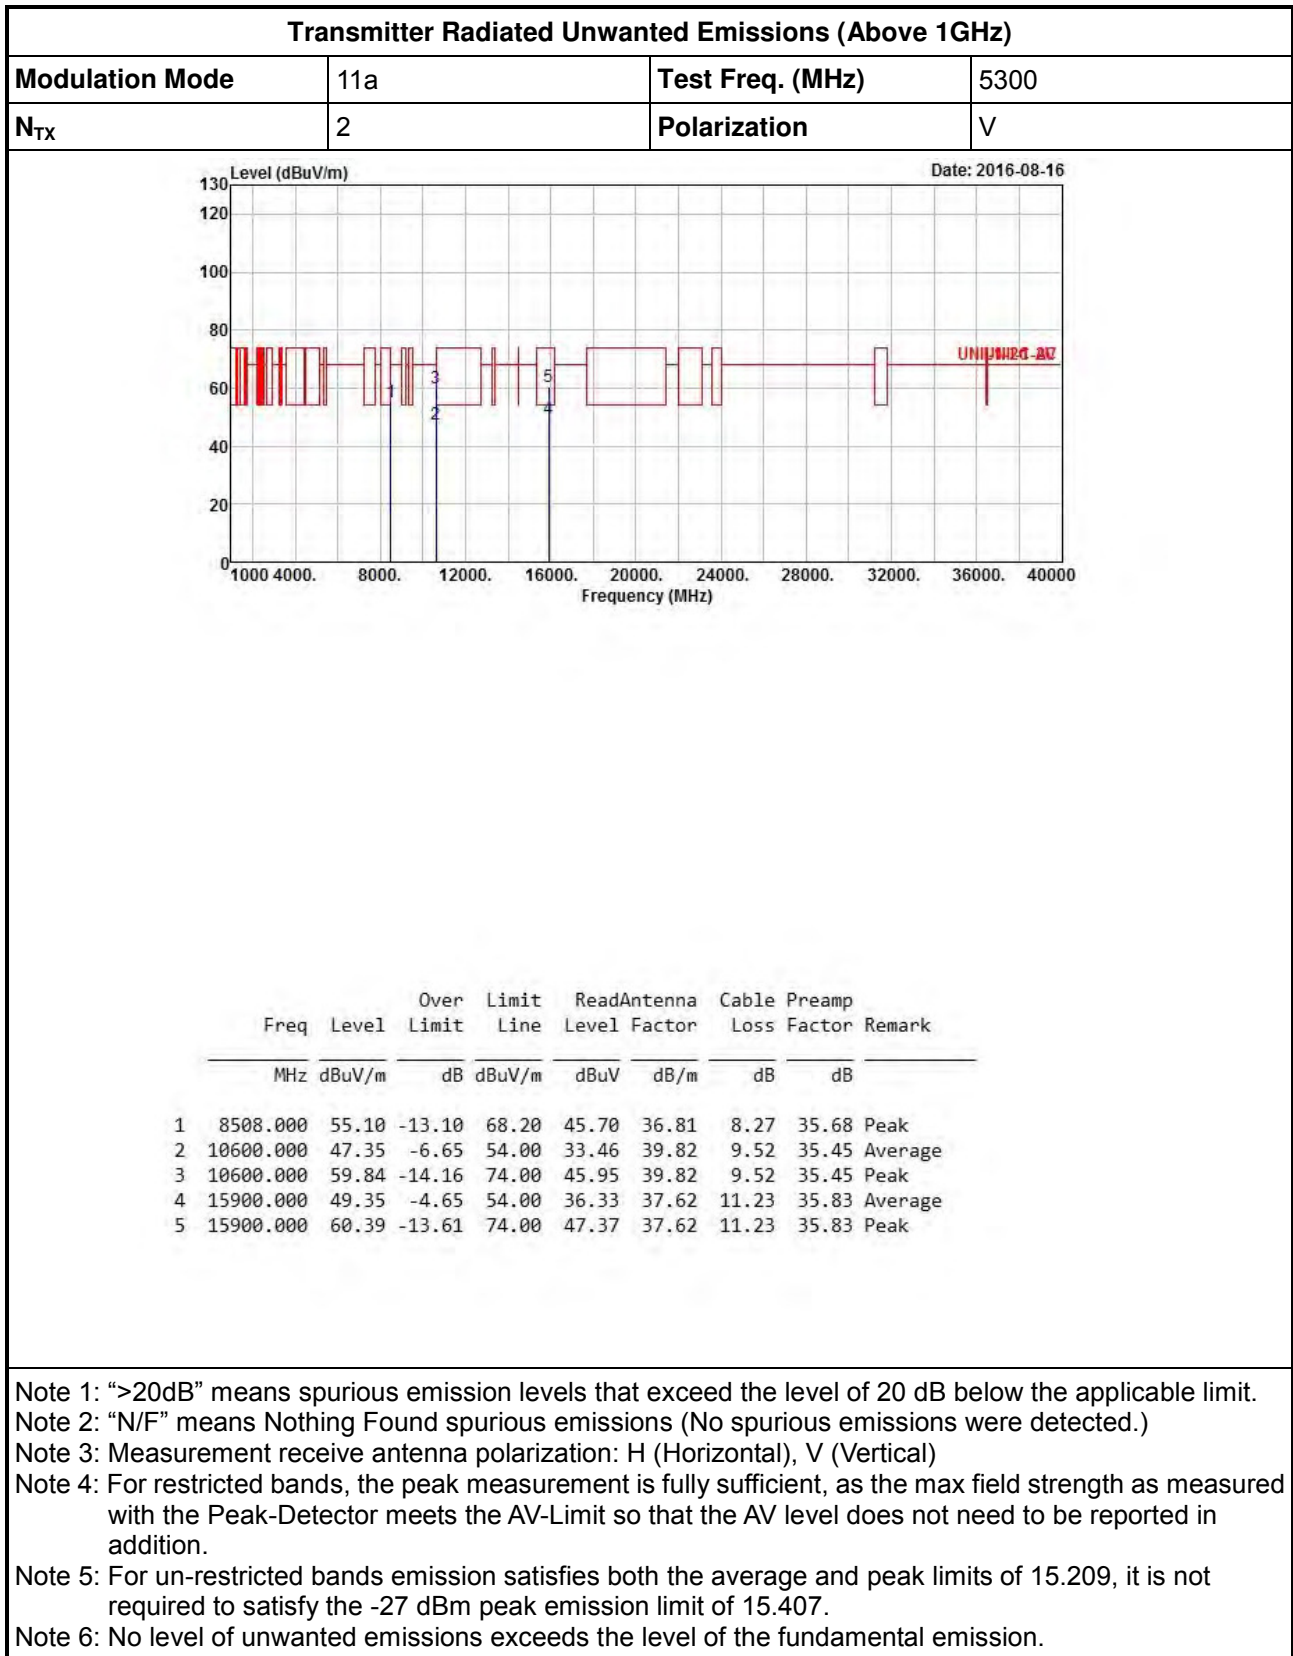

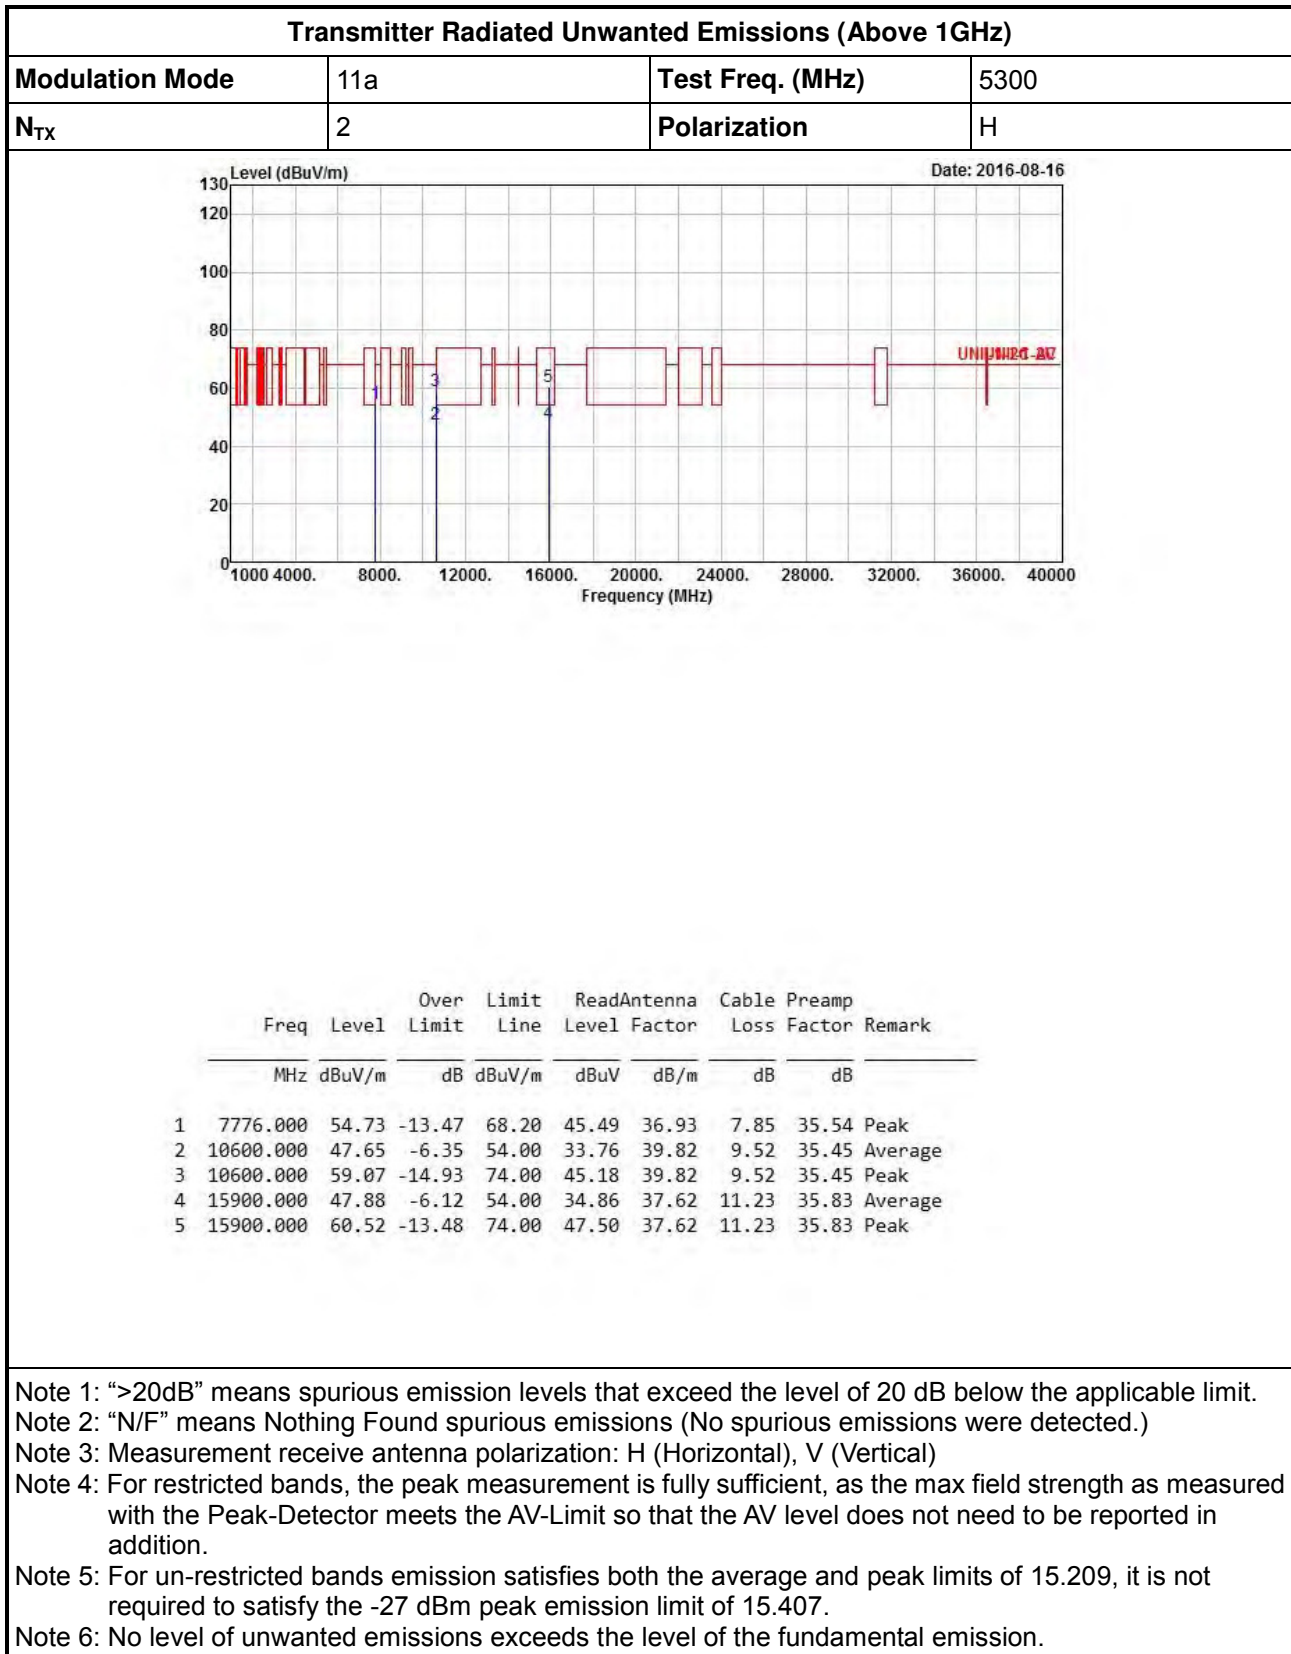

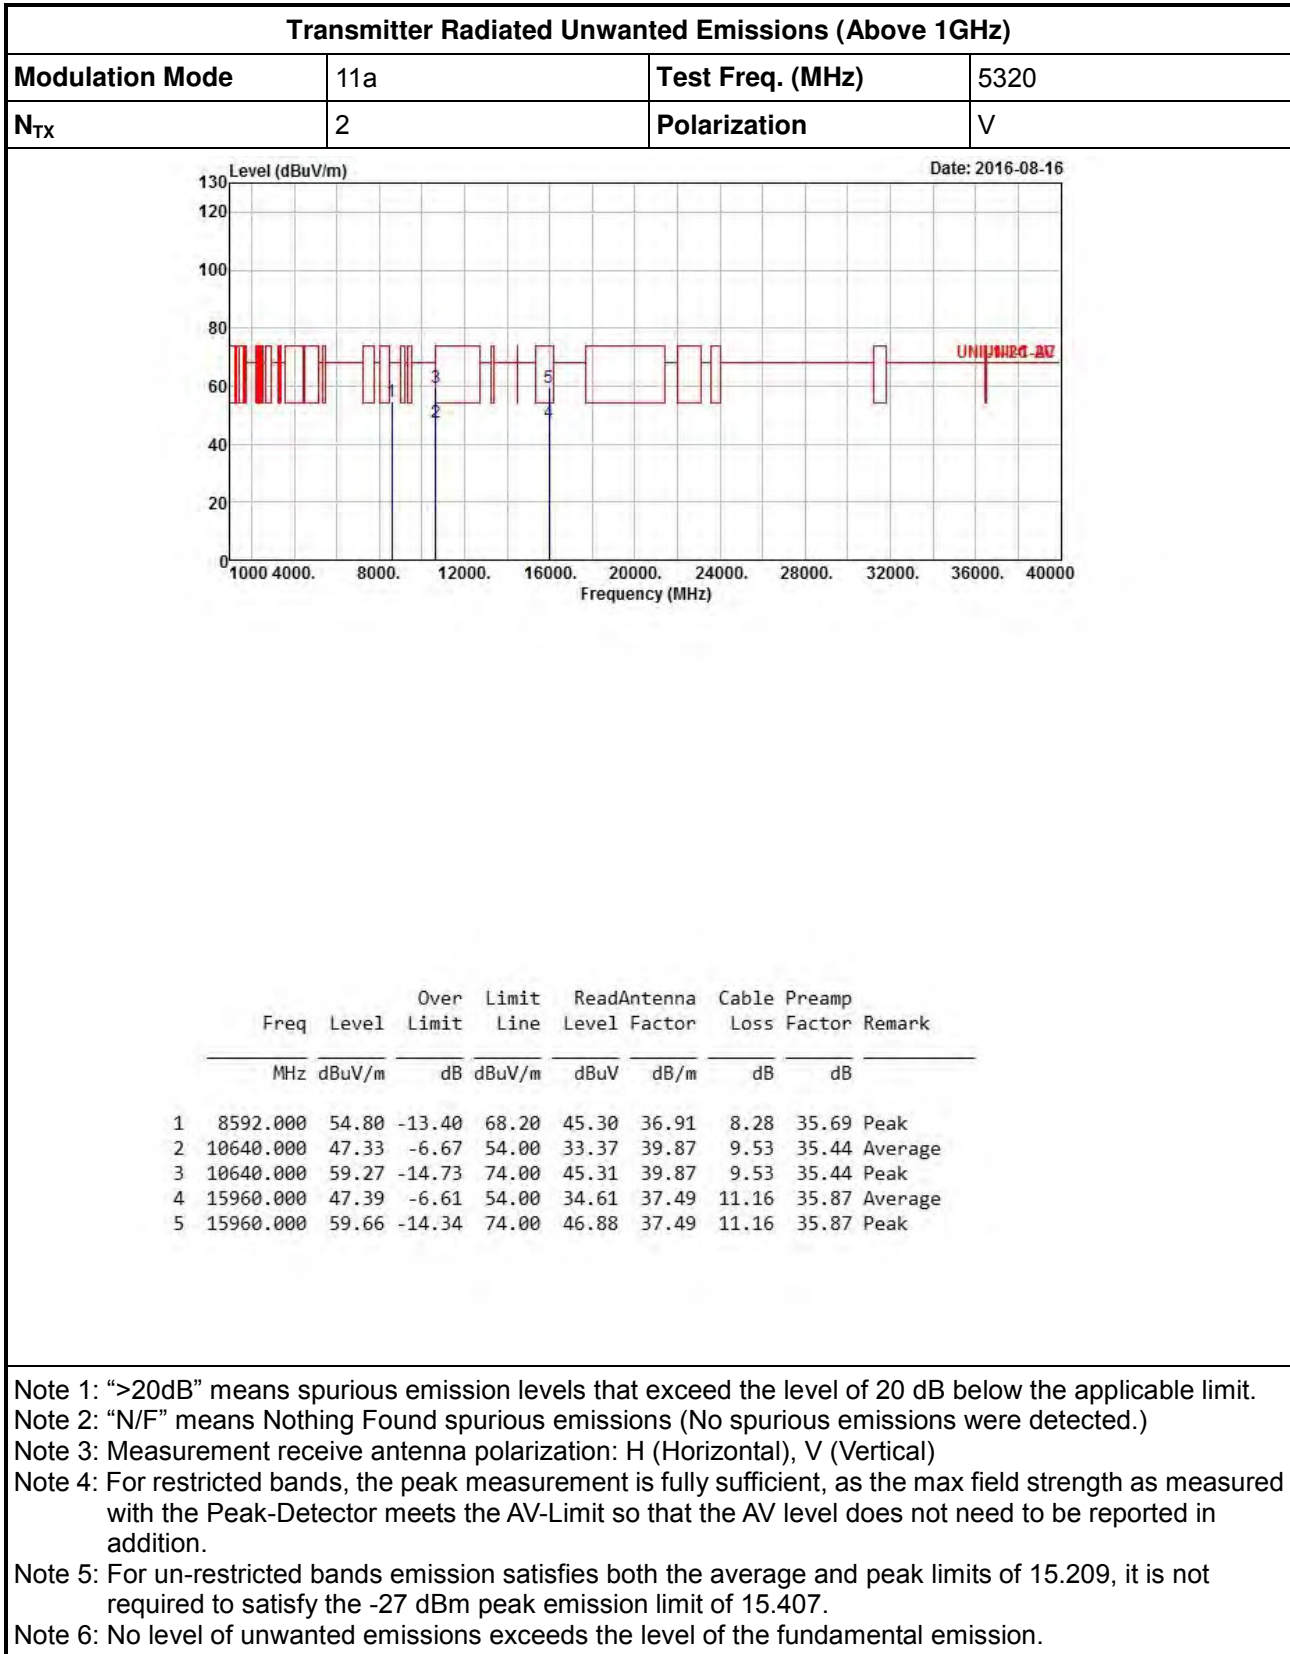


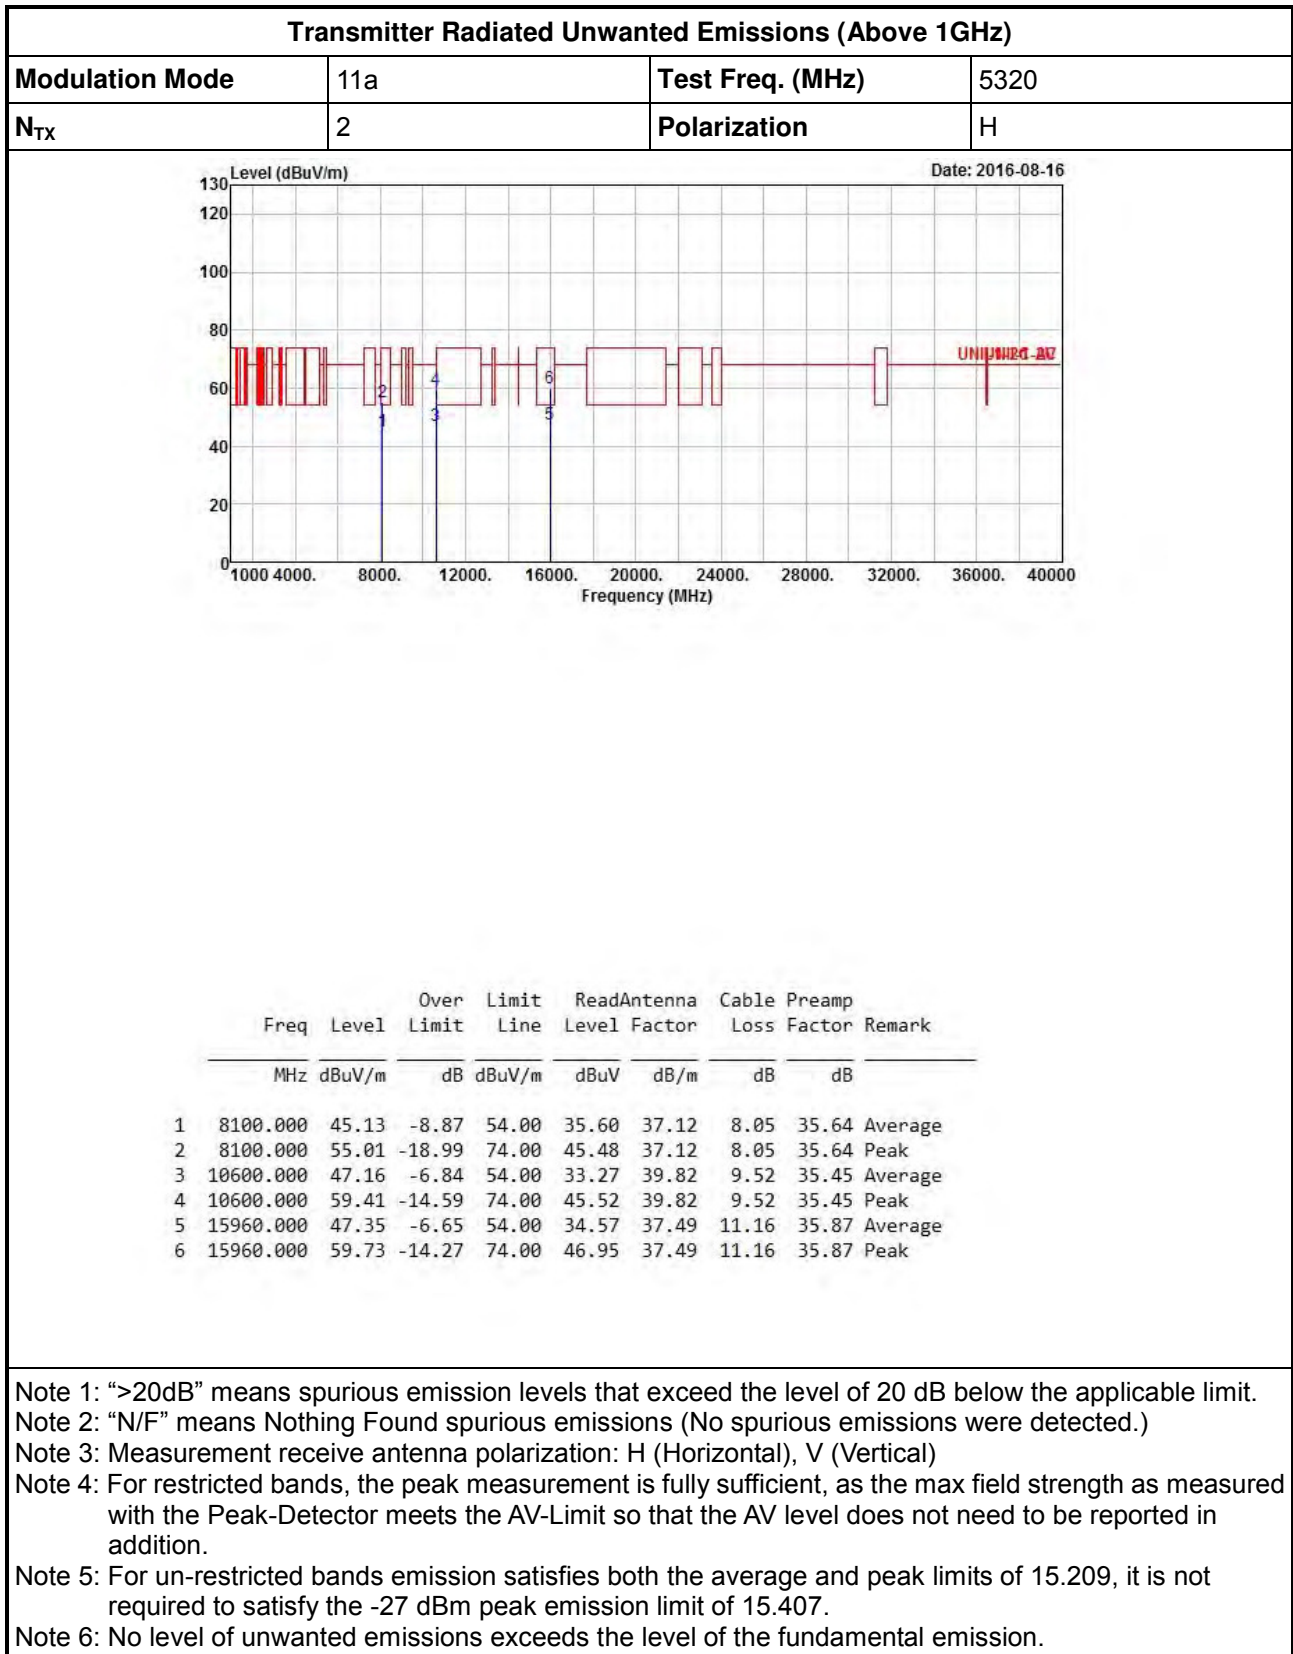




Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5260
N _{TX}	2	Polarization	V

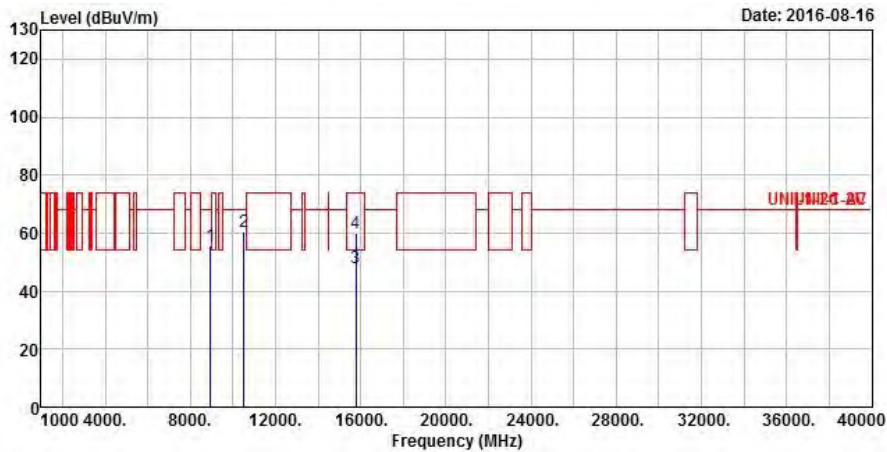

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	
			dB	dBuV/m	dBuV	dB	dB	
1	8960.000	55.52	-12.68	68.20	45.60	37.35	8.31	35.74 Peak
2	10520.000	60.61	-7.59	68.20	46.86	39.72	9.50	35.47 Peak
3	15780.000	47.75	-6.25	54.00	34.31	37.88	11.33	35.77 Average
4	15780.000	60.03	-13.97	74.00	46.59	37.88	11.33	35.77 Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

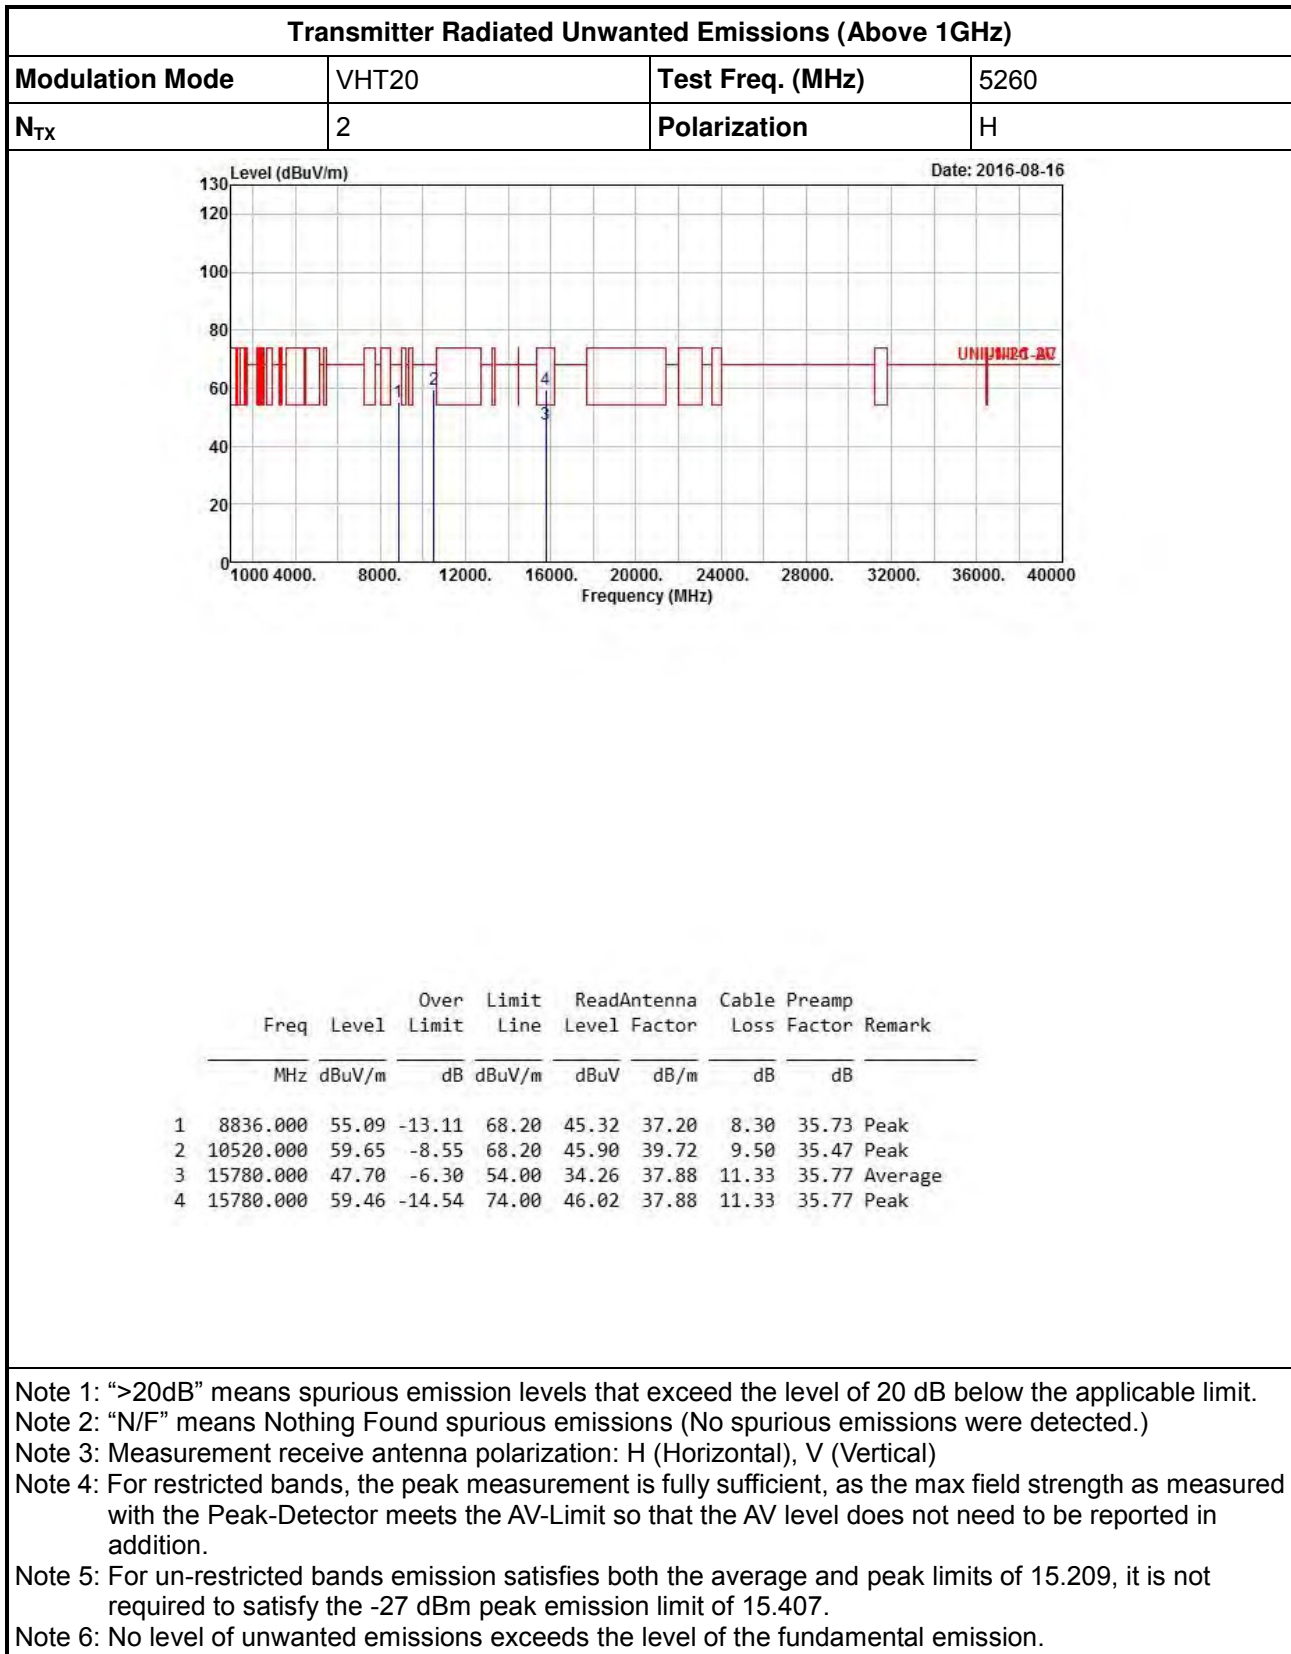




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	VHT20	Test Freq. (MHz)	5300
N _{TX}	2	Polarization	V

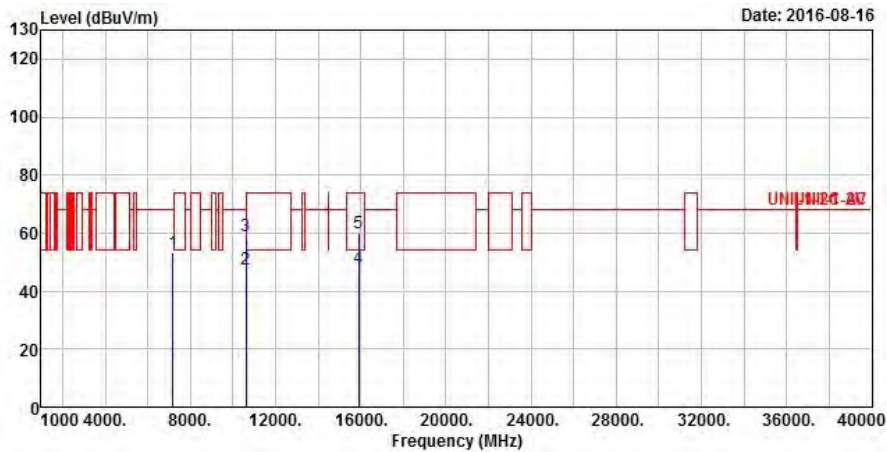



	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	
			dB	dBuV/m	dBuV	dB	dB	
1	7200.000	53.25	-14.95	68.20	45.28	35.82	7.56	35.41 Peak
2	10600.000	47.25	-6.75	54.00	33.36	39.82	9.52	35.45 Average
3	10600.000	59.01	-14.99	74.00	45.12	39.82	9.52	35.45 Peak
4	15900.000	47.95	-6.05	54.00	34.93	37.62	11.23	35.83 Average
5	15900.000	60.03	-13.97	74.00	47.01	37.62	11.23	35.83 Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

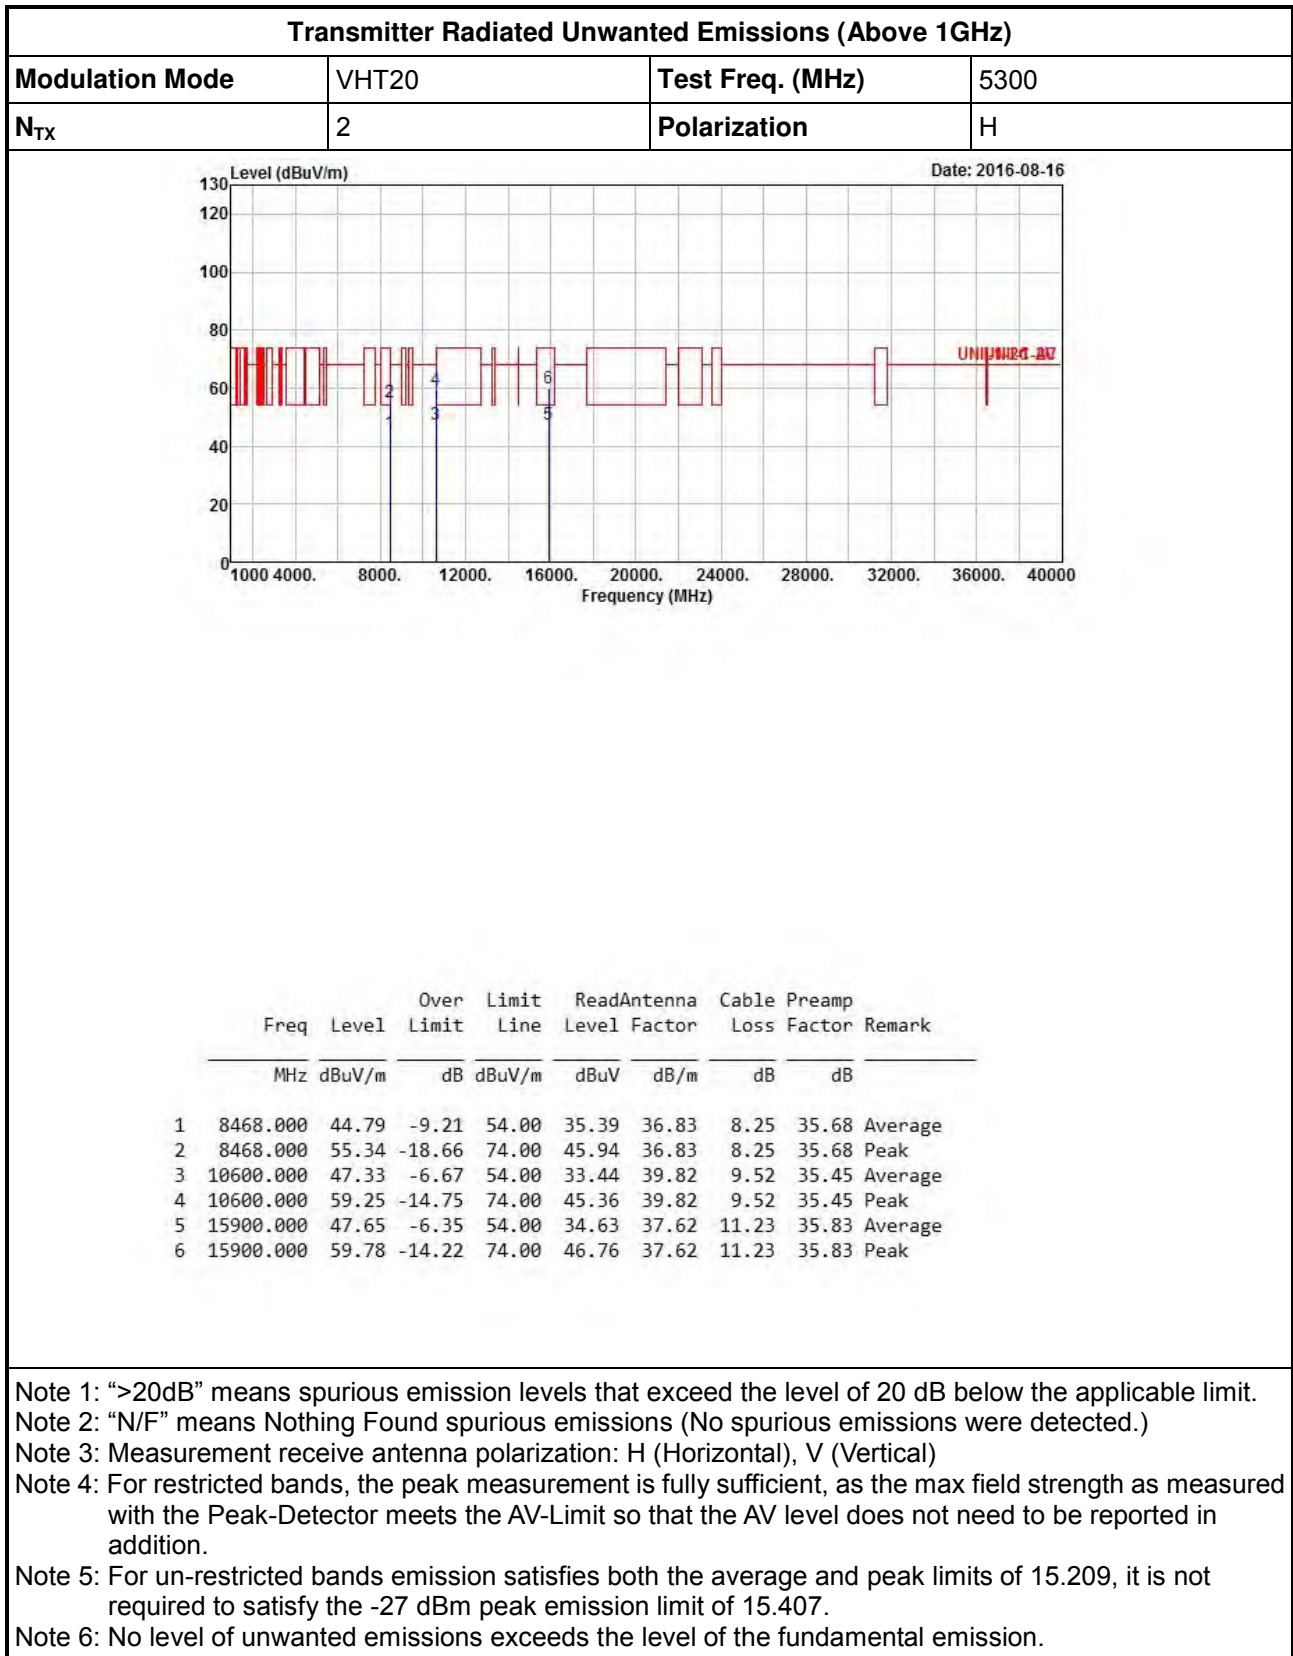


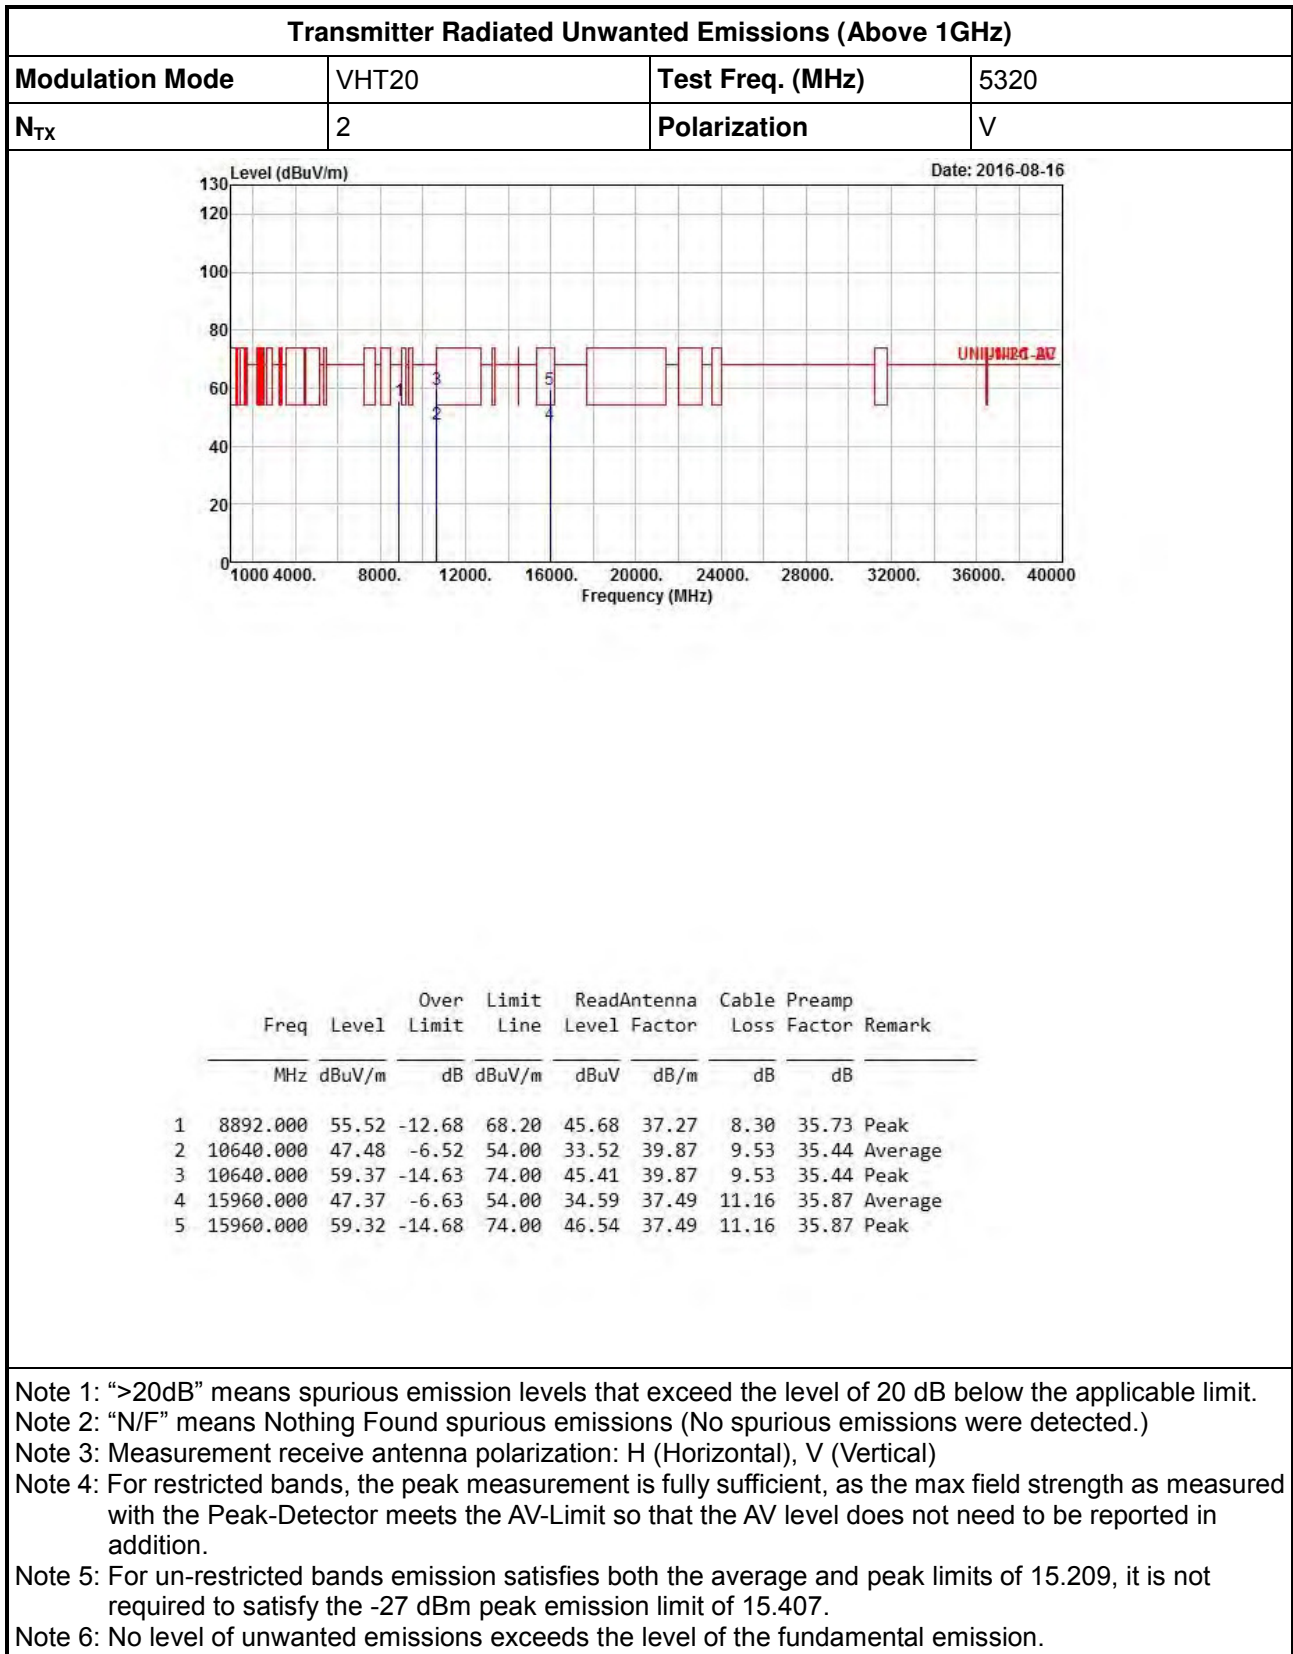

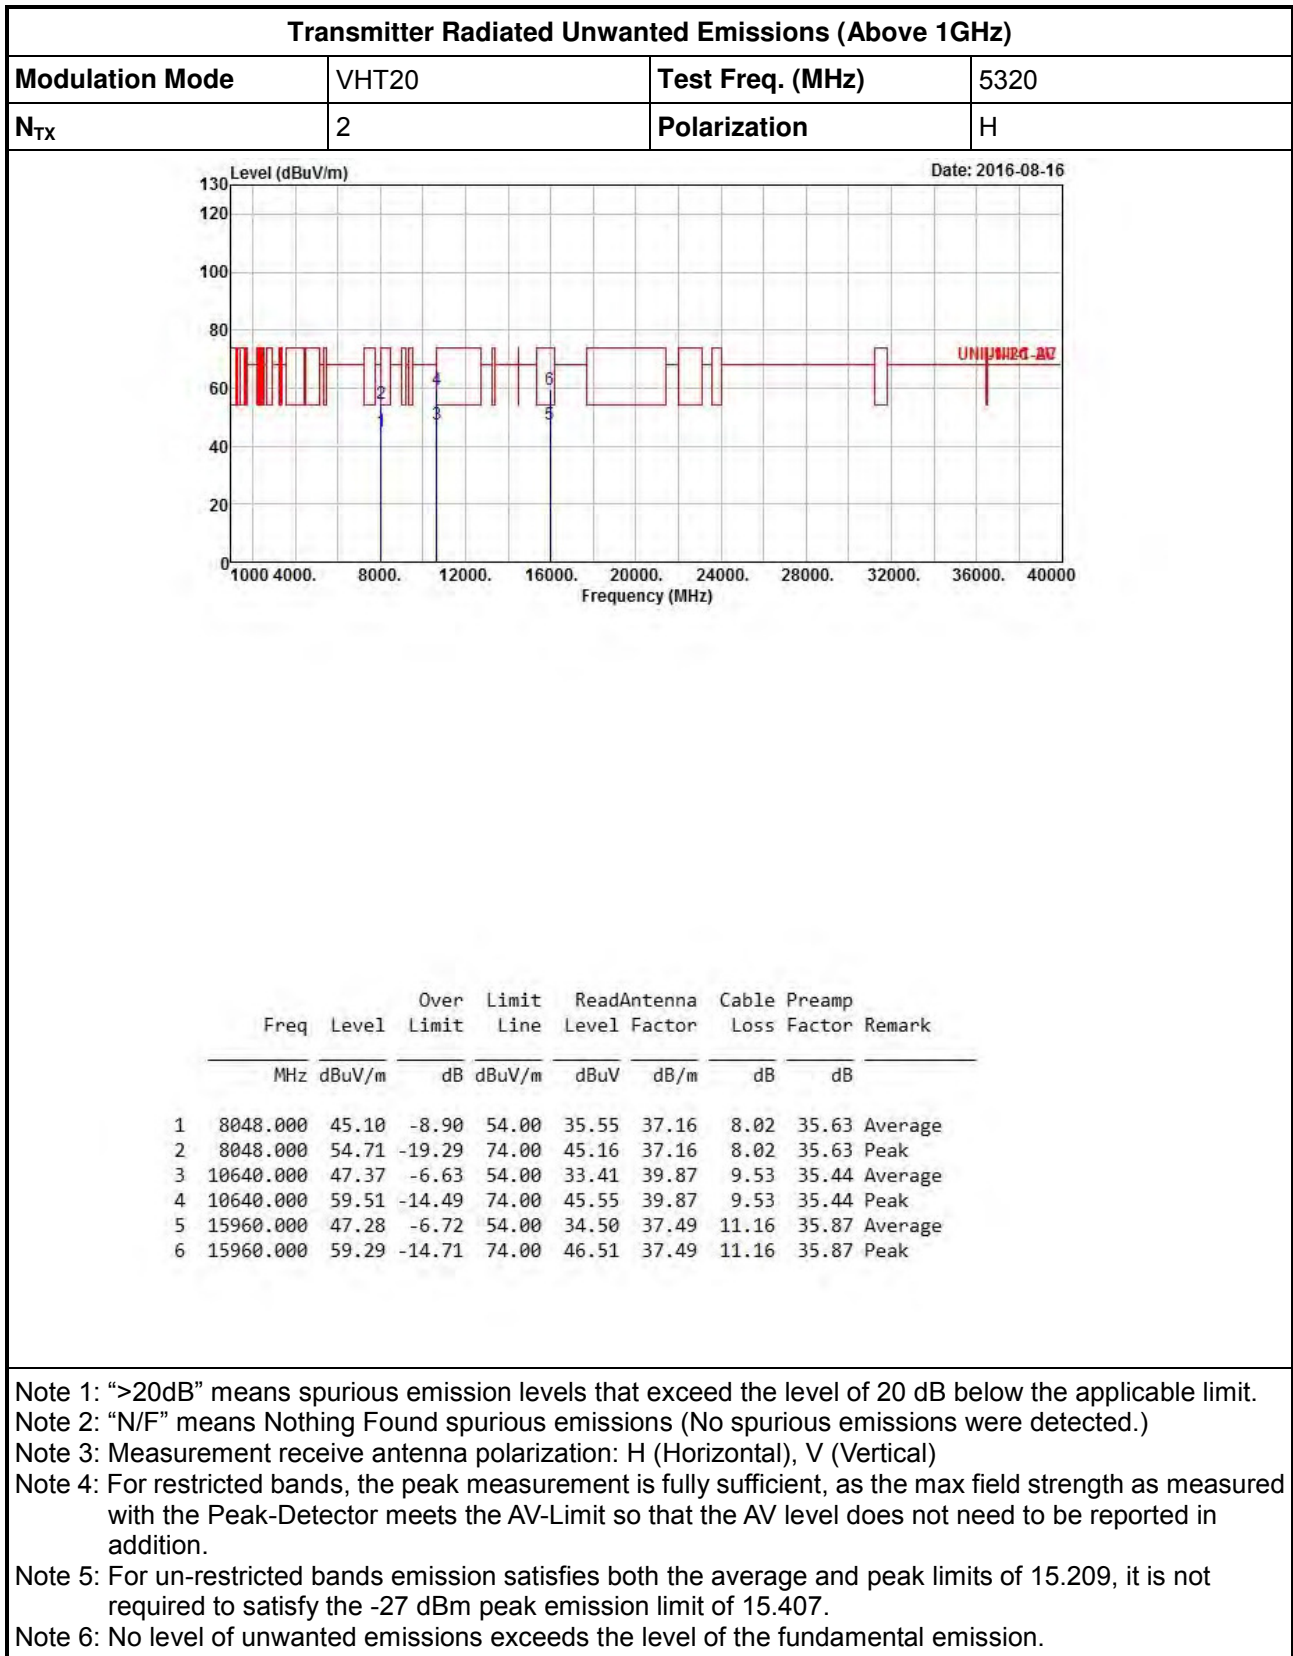

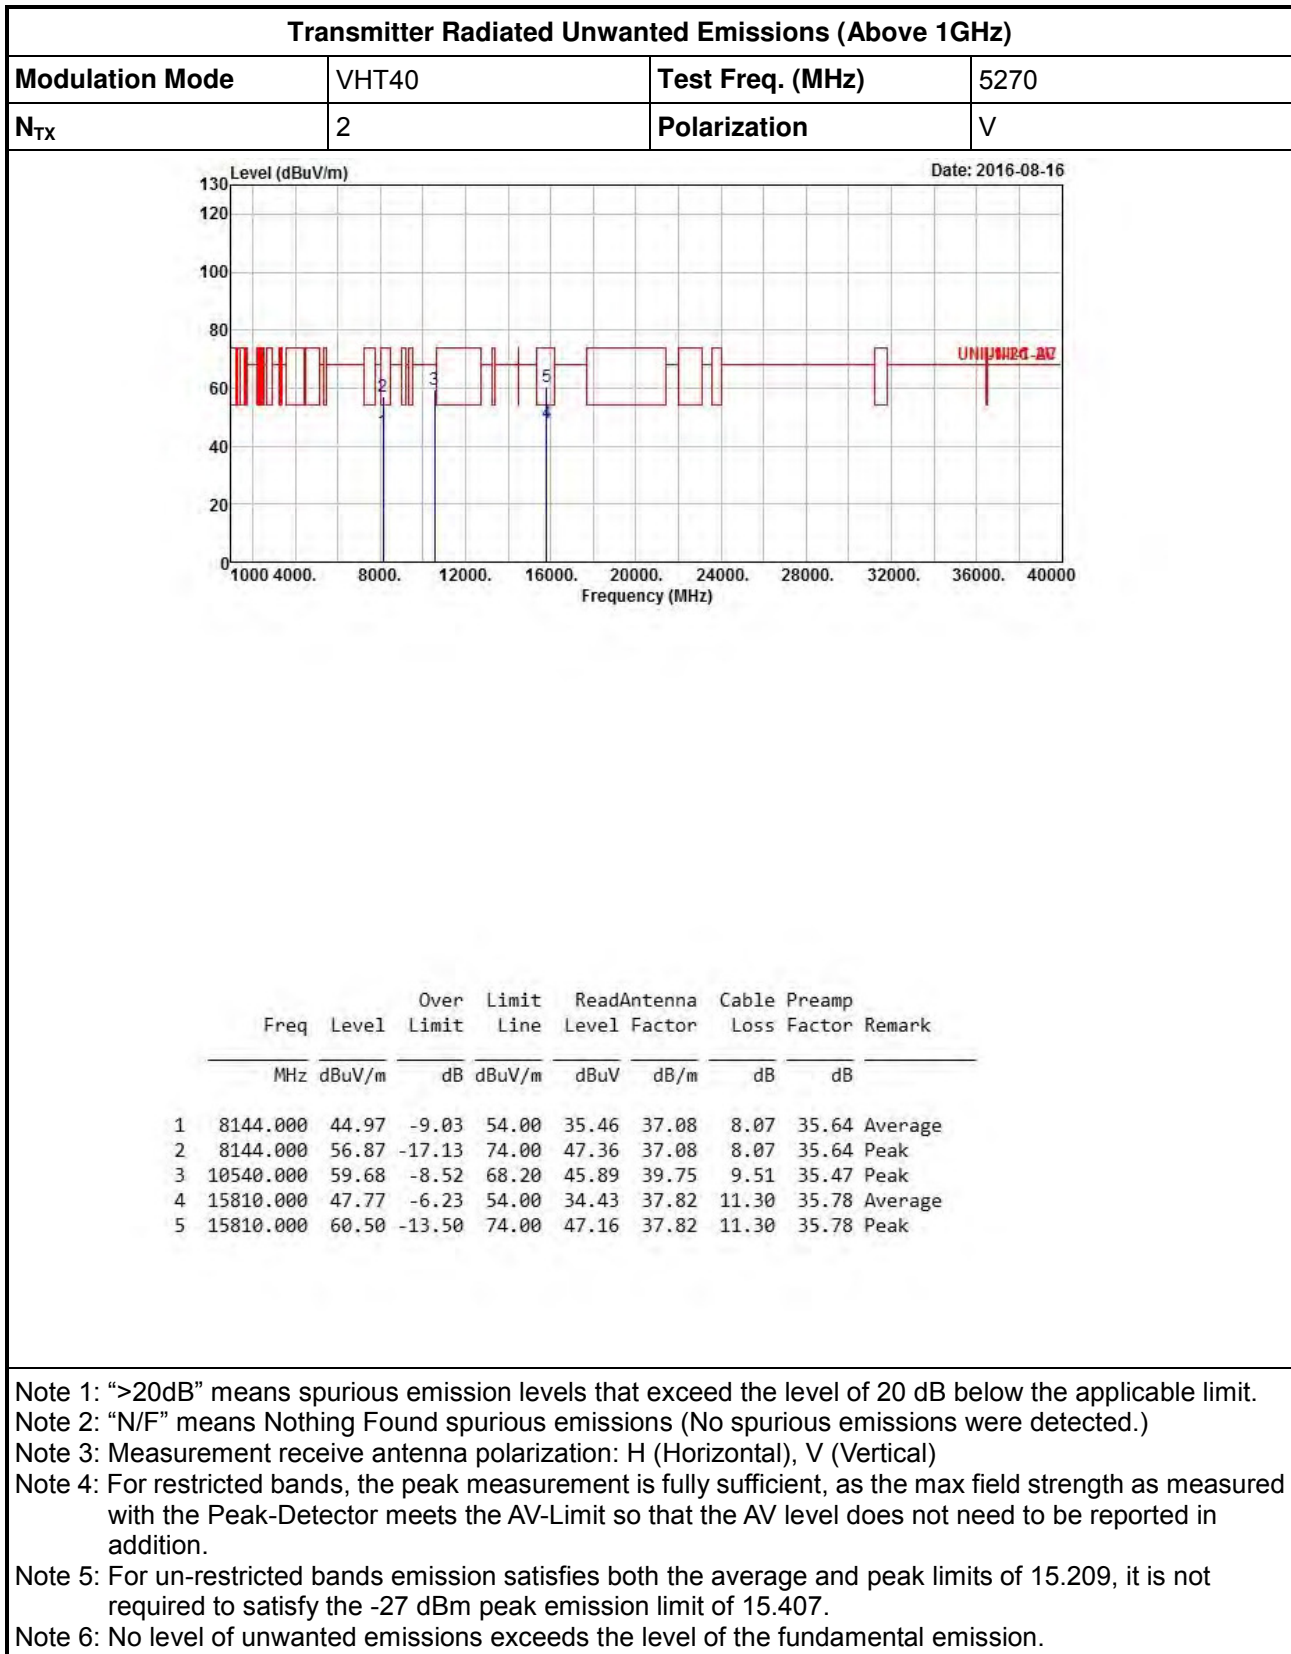

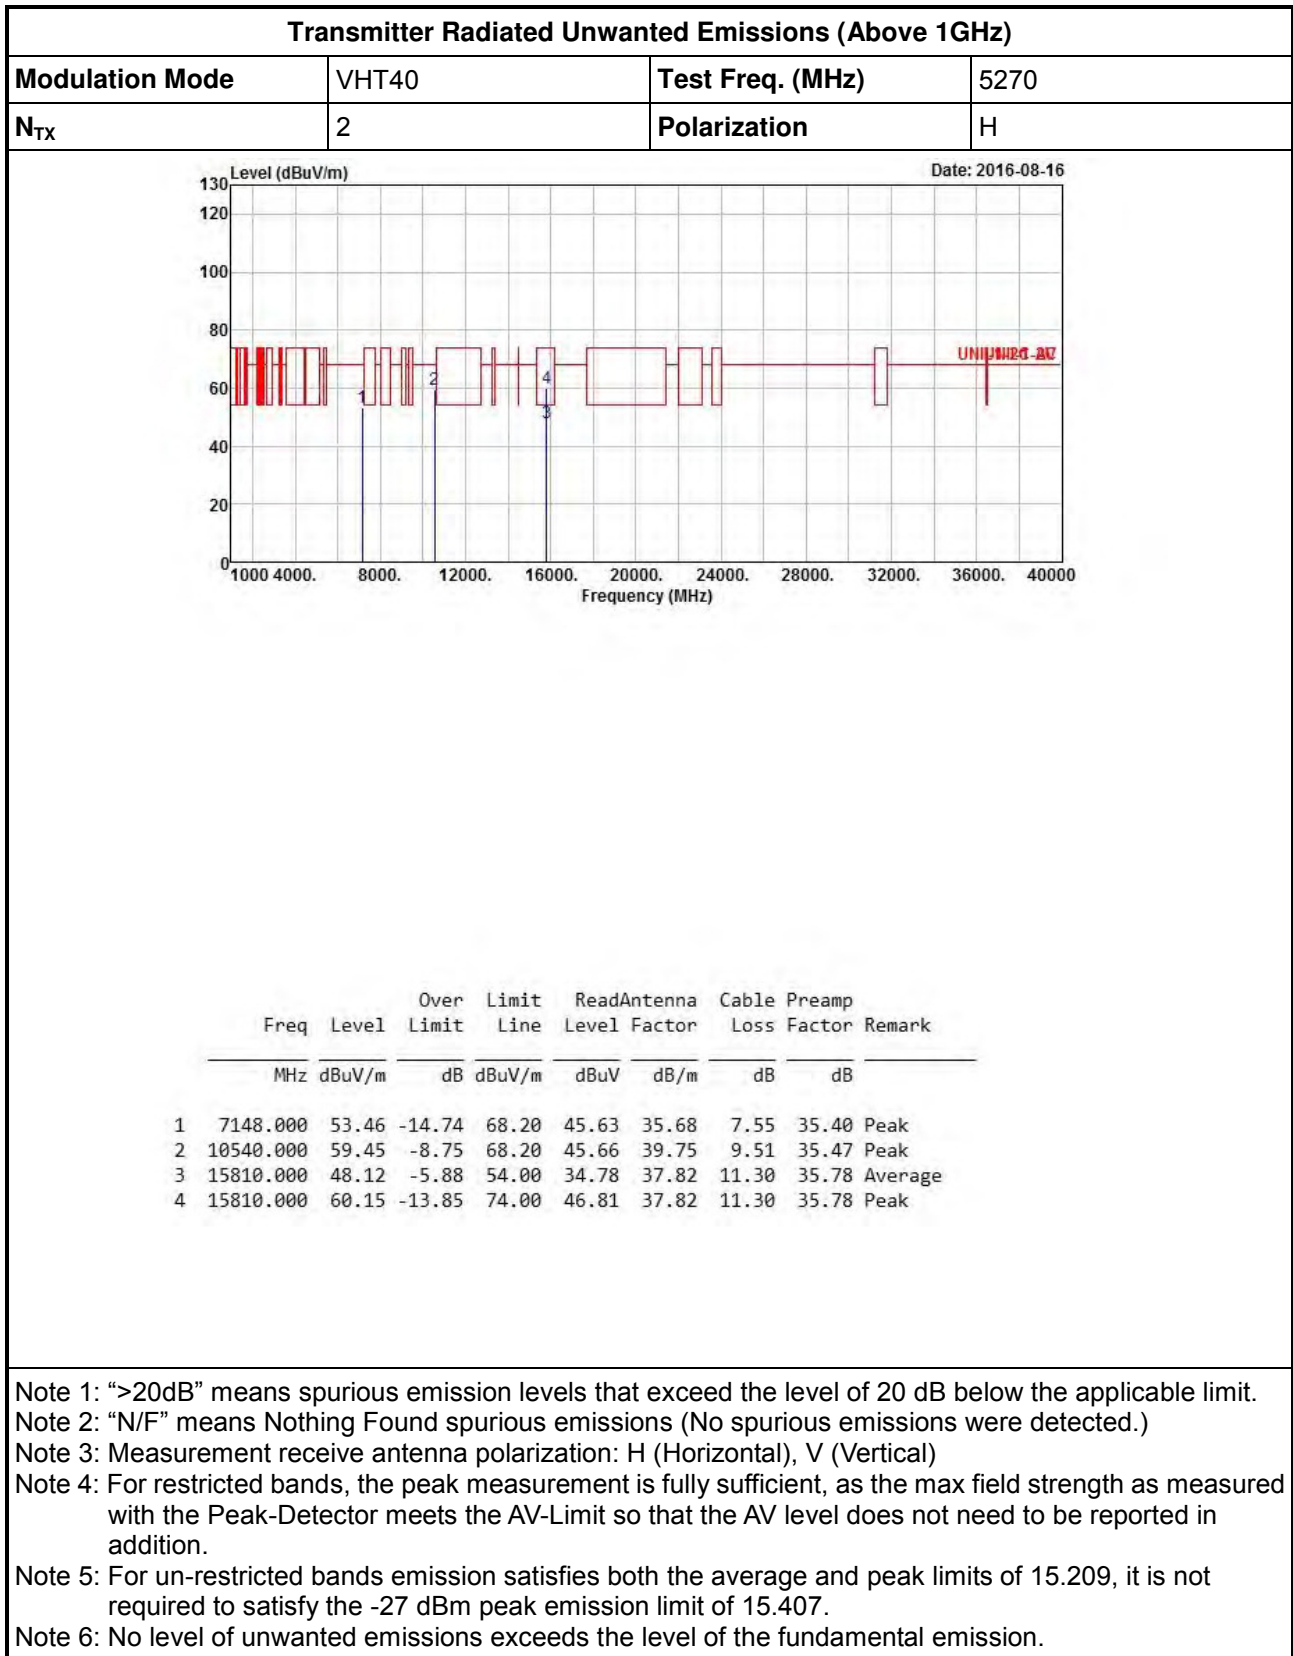


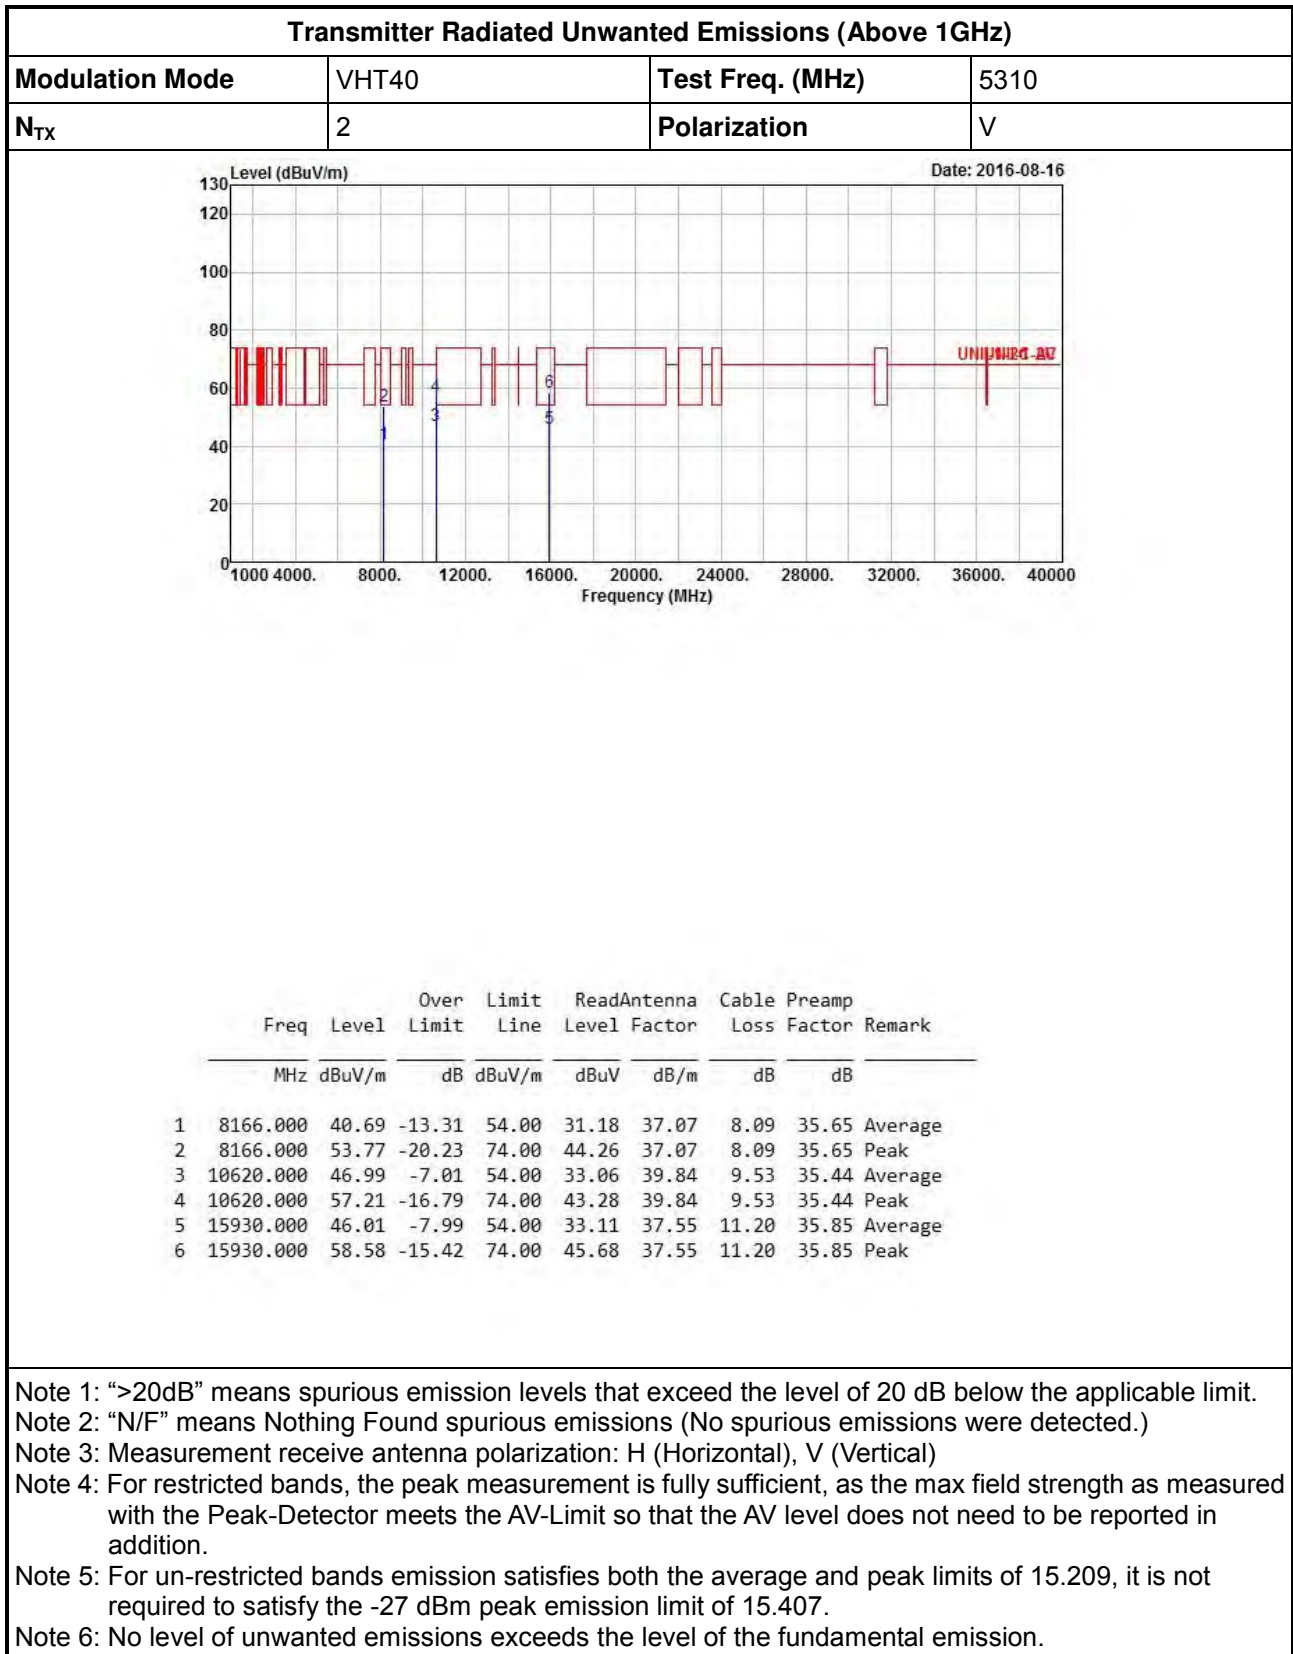



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5310
N _{TX}	2	Polarization	H

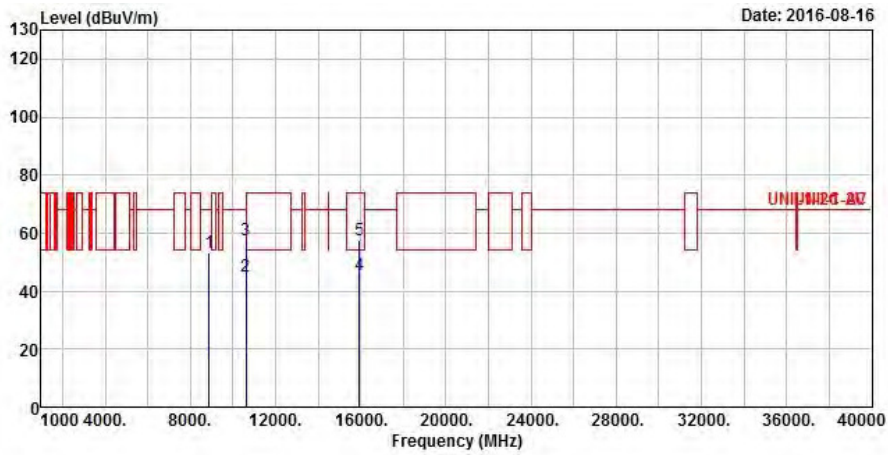


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	
			dB	dBuV/m	dBuV	dB	dB	
1	8872.000	53.21	-14.99	68.20	43.39	37.25	8.30	35.73 Peak
2	10620.000	45.31	-8.69	54.00	31.38	39.84	9.53	35.44 Average
3	10620.000	57.65	-16.35	74.00	43.72	39.84	9.53	35.44 Peak
4	15930.000	45.81	-8.19	54.00	32.91	37.55	11.20	35.85 Average
5	15930.000	57.40	-16.60	74.00	44.50	37.55	11.20	35.85 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5290
N _{TX}	2	Polarization	V

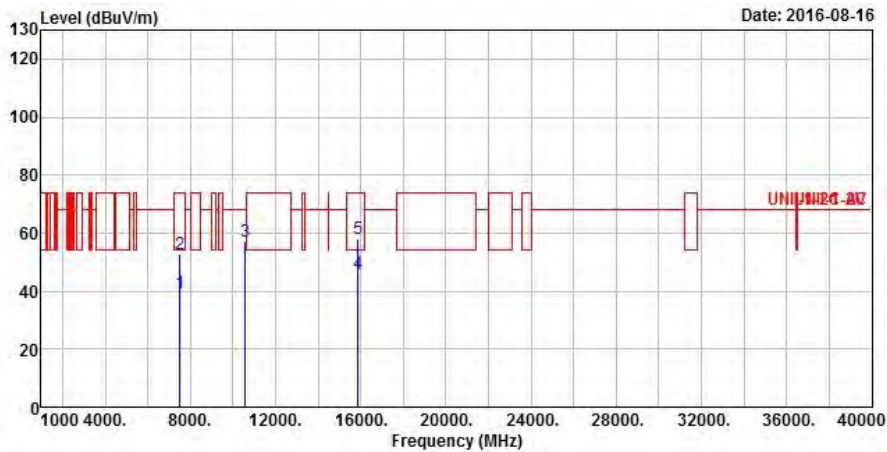

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	
			dB	dBuV/m	dBuV	dB	dB	
1	7522.000	39.53	-14.47	54.00	30.68	36.63	7.67	35.45 Average
2	7522.000	52.57	-21.43	74.00	43.72	36.63	7.67	35.45 Peak
3	10580.000	57.22	-10.98	68.20	43.35	39.80	9.52	35.45 Peak
4	15870.000	45.88	-8.12	54.00	32.74	37.69	11.27	35.82 Average
5	15870.000	57.84	-16.16	74.00	44.70	37.69	11.27	35.82 Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

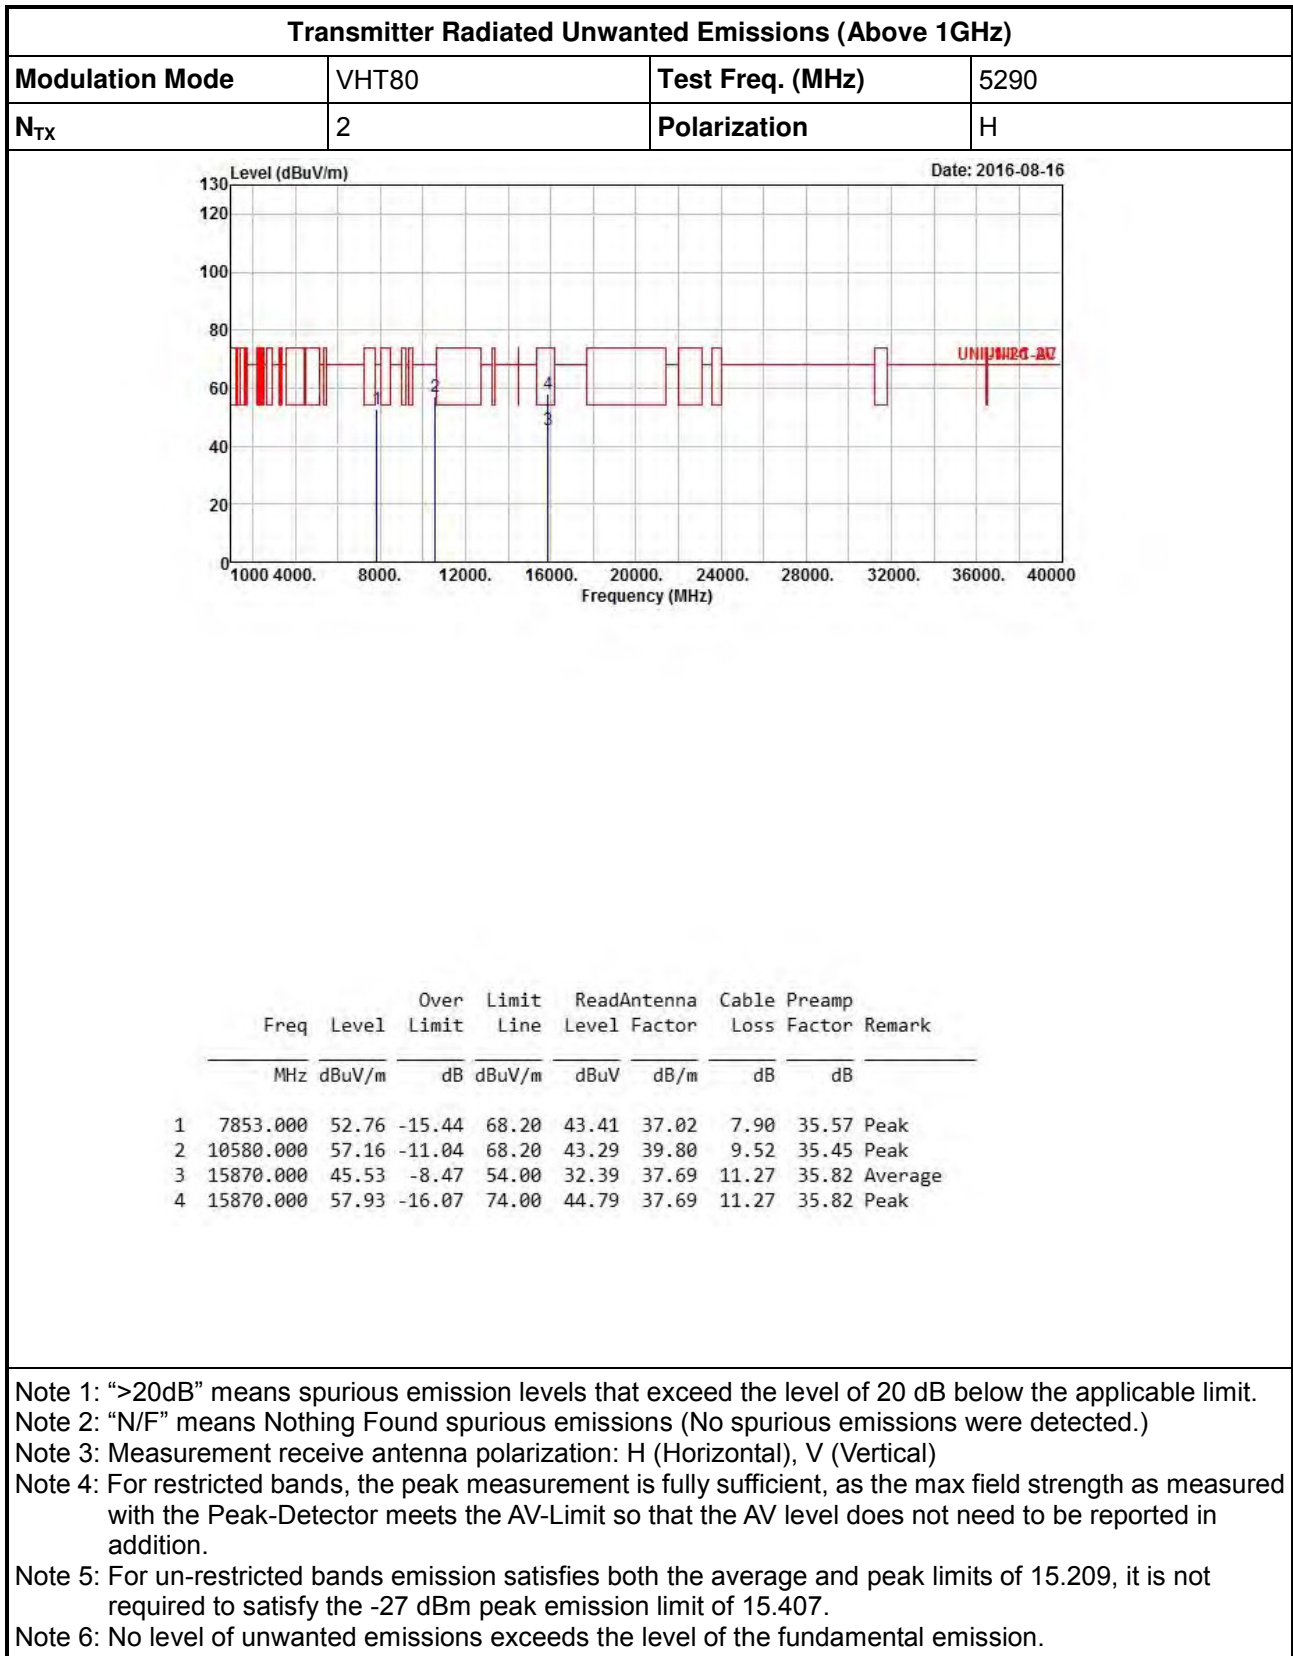



Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5470-5725MHz

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11a	Test Freq. (MHz)	5500
N _{TX}	2	Polarization	V

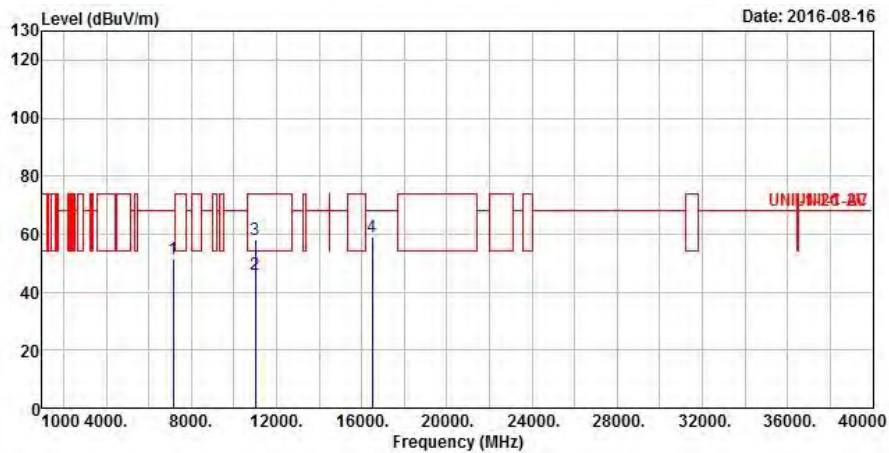


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Gain	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7157.000	51.56	-16.64	68.20	43.71	35.71	7.55	35.41	Peak
2	11000.000	46.28	-7.72	54.00	31.68	40.30	9.62	35.32	Average
3	11000.000	57.84	-16.16	74.00	43.24	40.30	9.62	35.32	Peak
4	16500.000	59.24	-8.96	68.20	44.59	38.80	11.35	35.50	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.





Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11a	Test Freq. (MHz)	5500
N _{TX}	2	Polarization	H

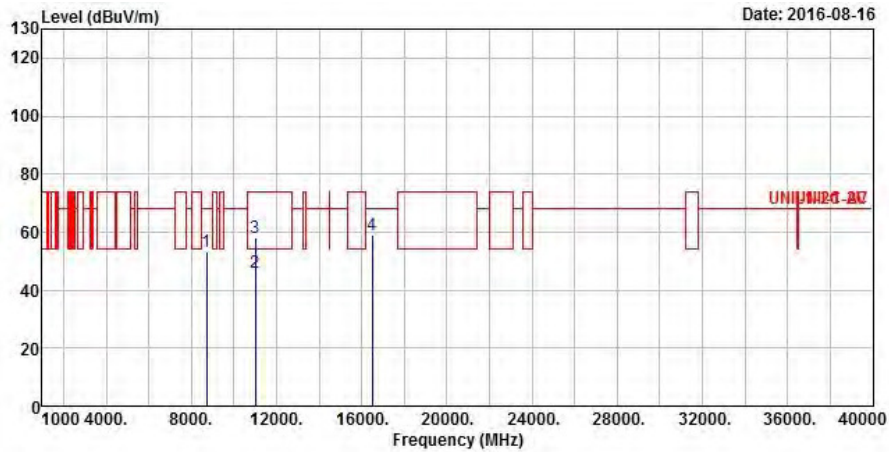



	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	
			dB	dBuV/m	dBuV	dB	dB	
1	8734.000	53.22	-14.98	68.20	43.56	37.08	8.29	35.71 Peak
2	11000.000	45.86	-8.14	54.00	31.26	40.30	9.62	35.32 Average
3	11000.000	57.97	-16.03	74.00	43.37	40.30	9.62	35.32 Peak
4	16500.000	59.15	-9.05	68.20	44.50	38.80	11.35	35.50 Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

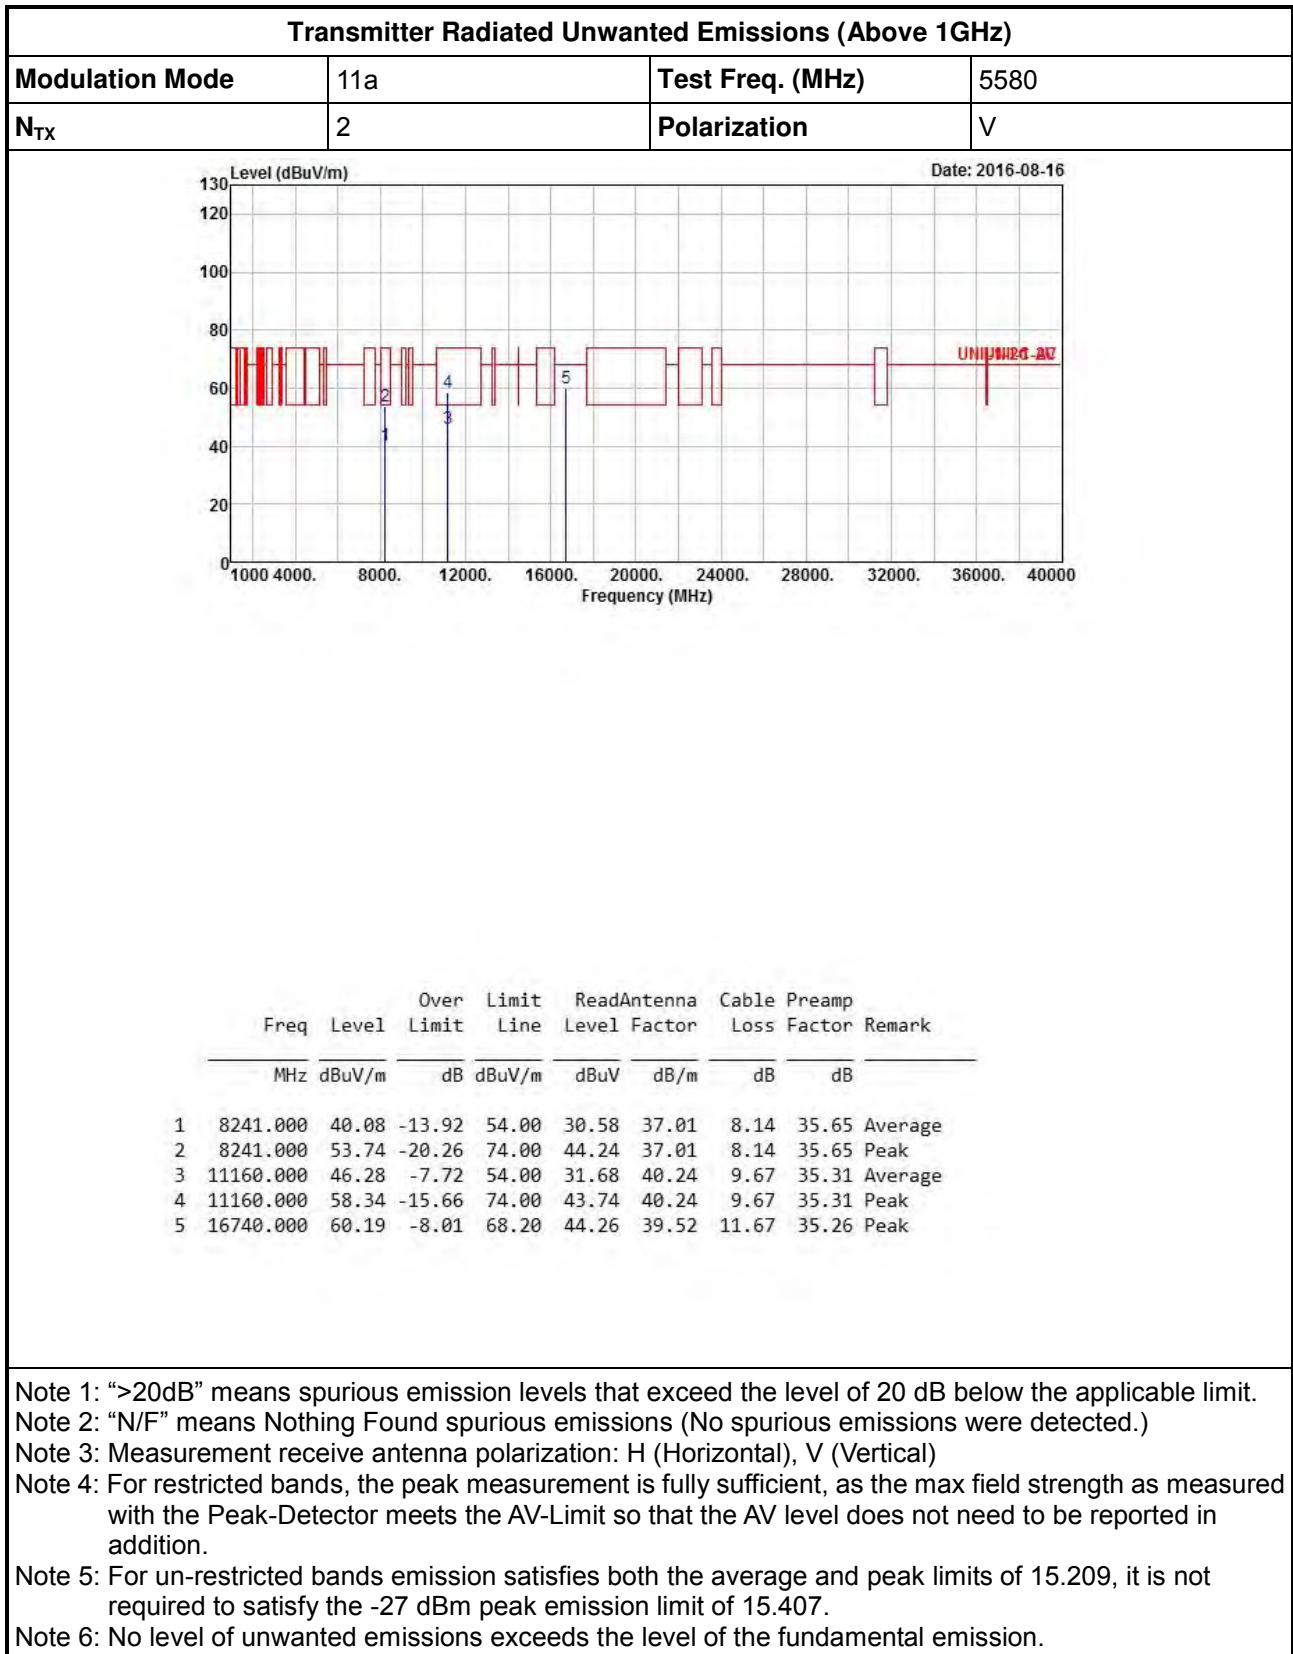


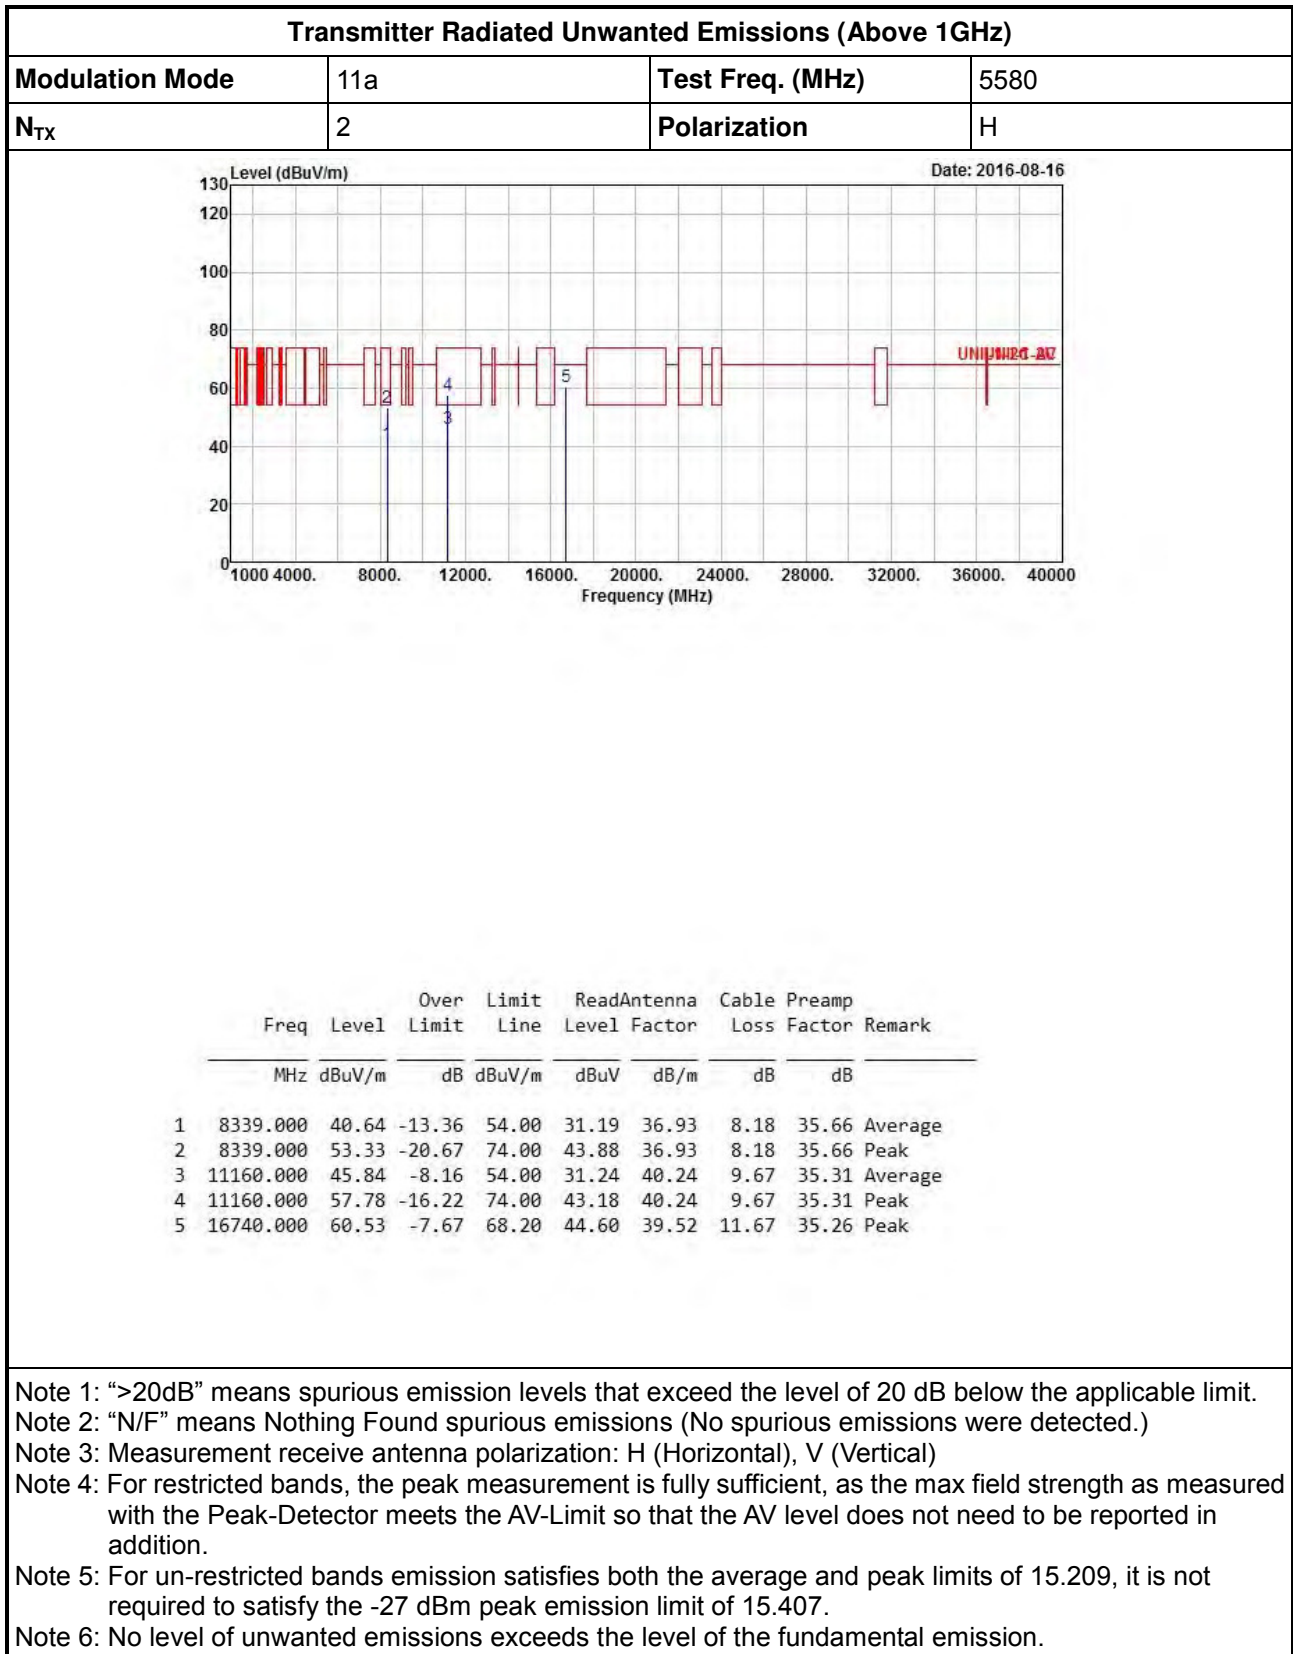


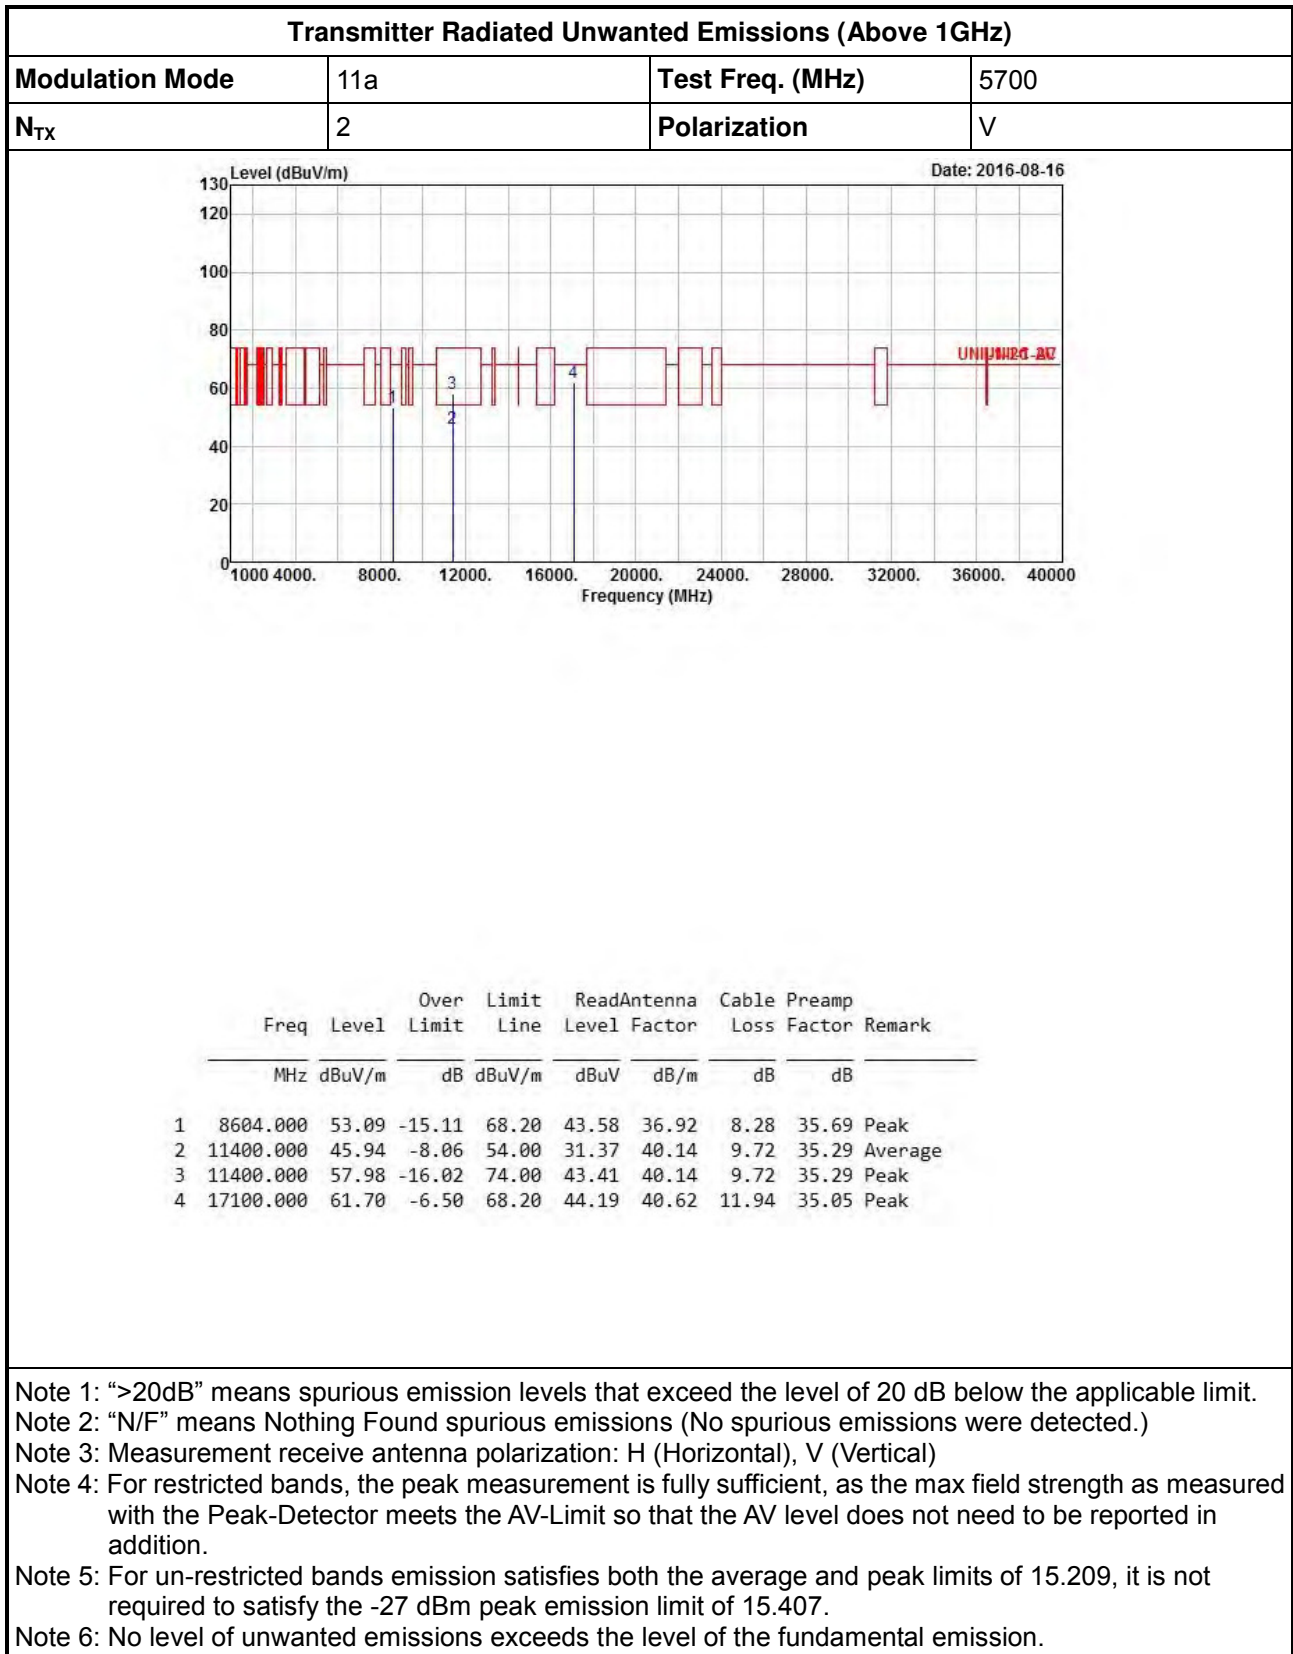


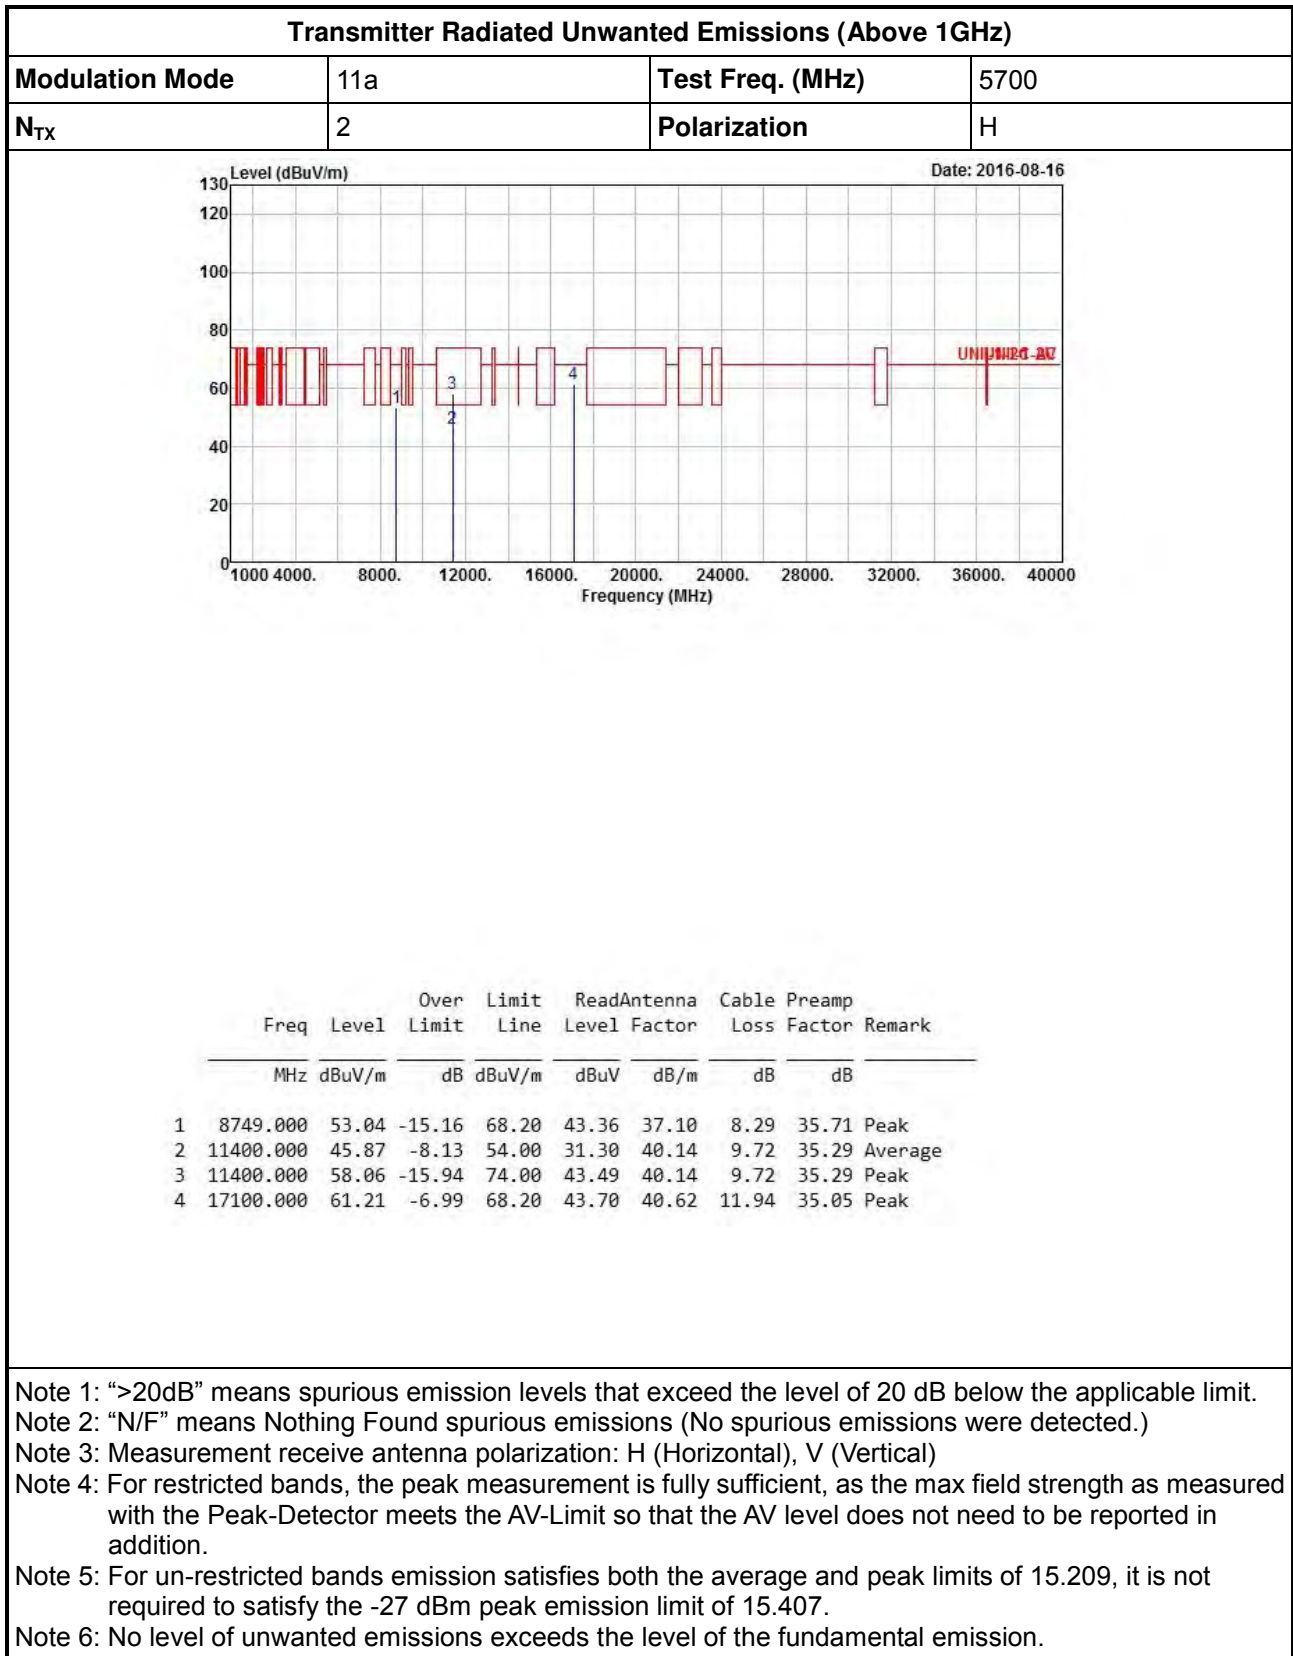

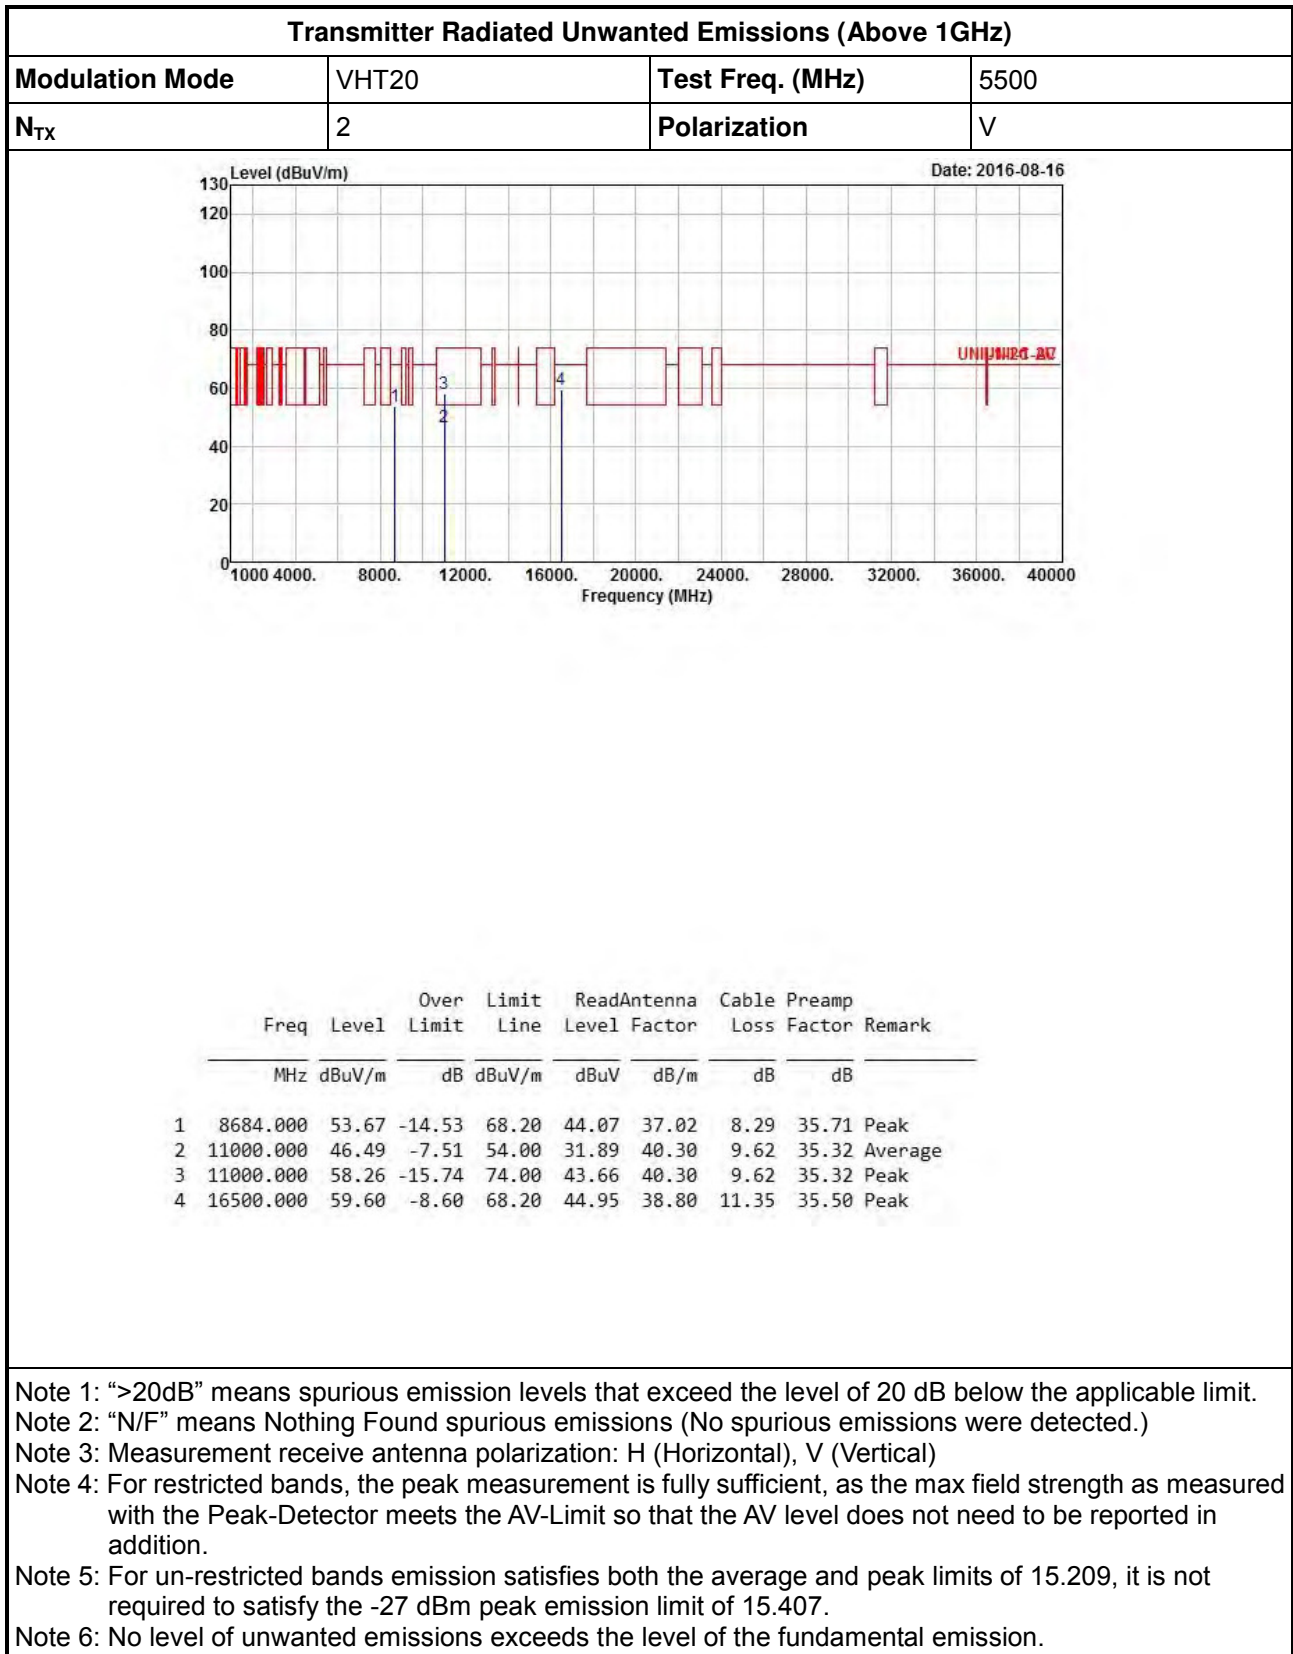

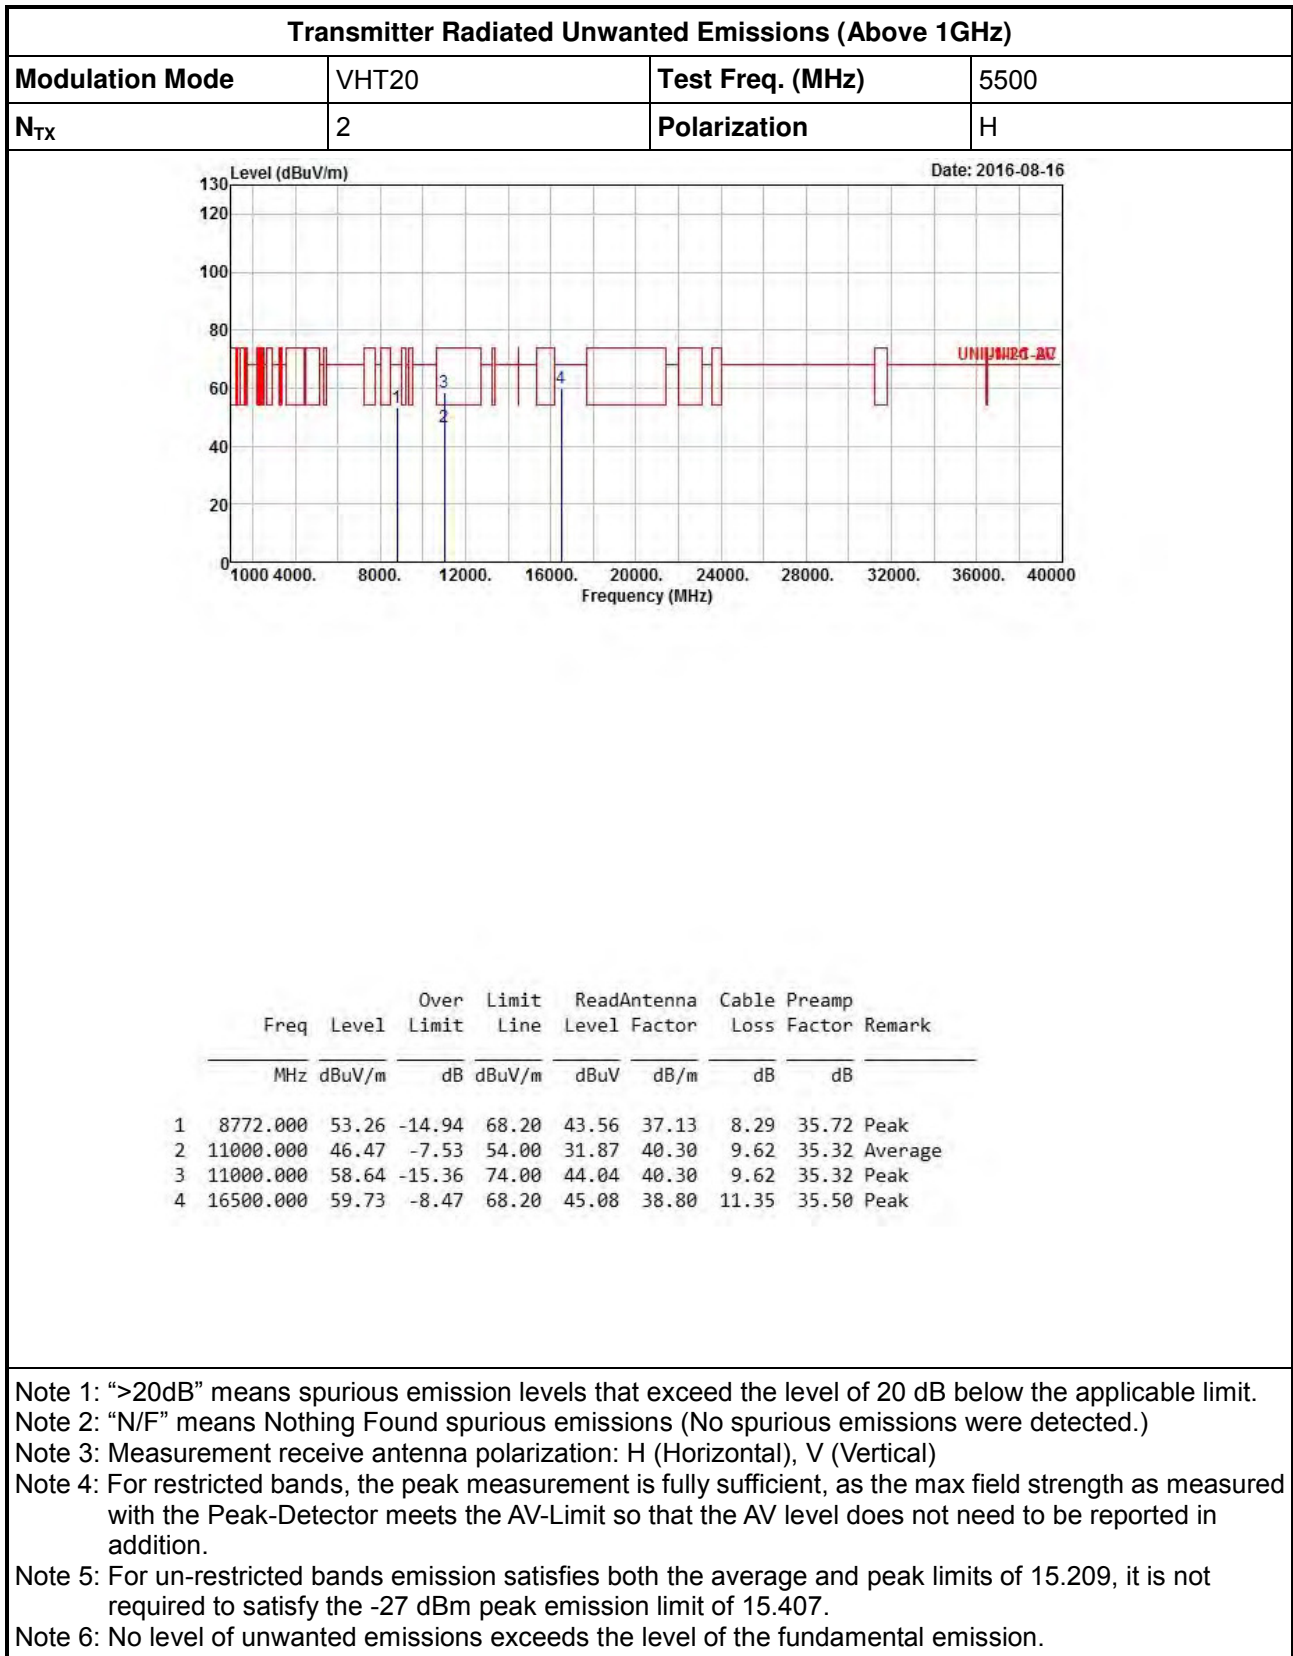

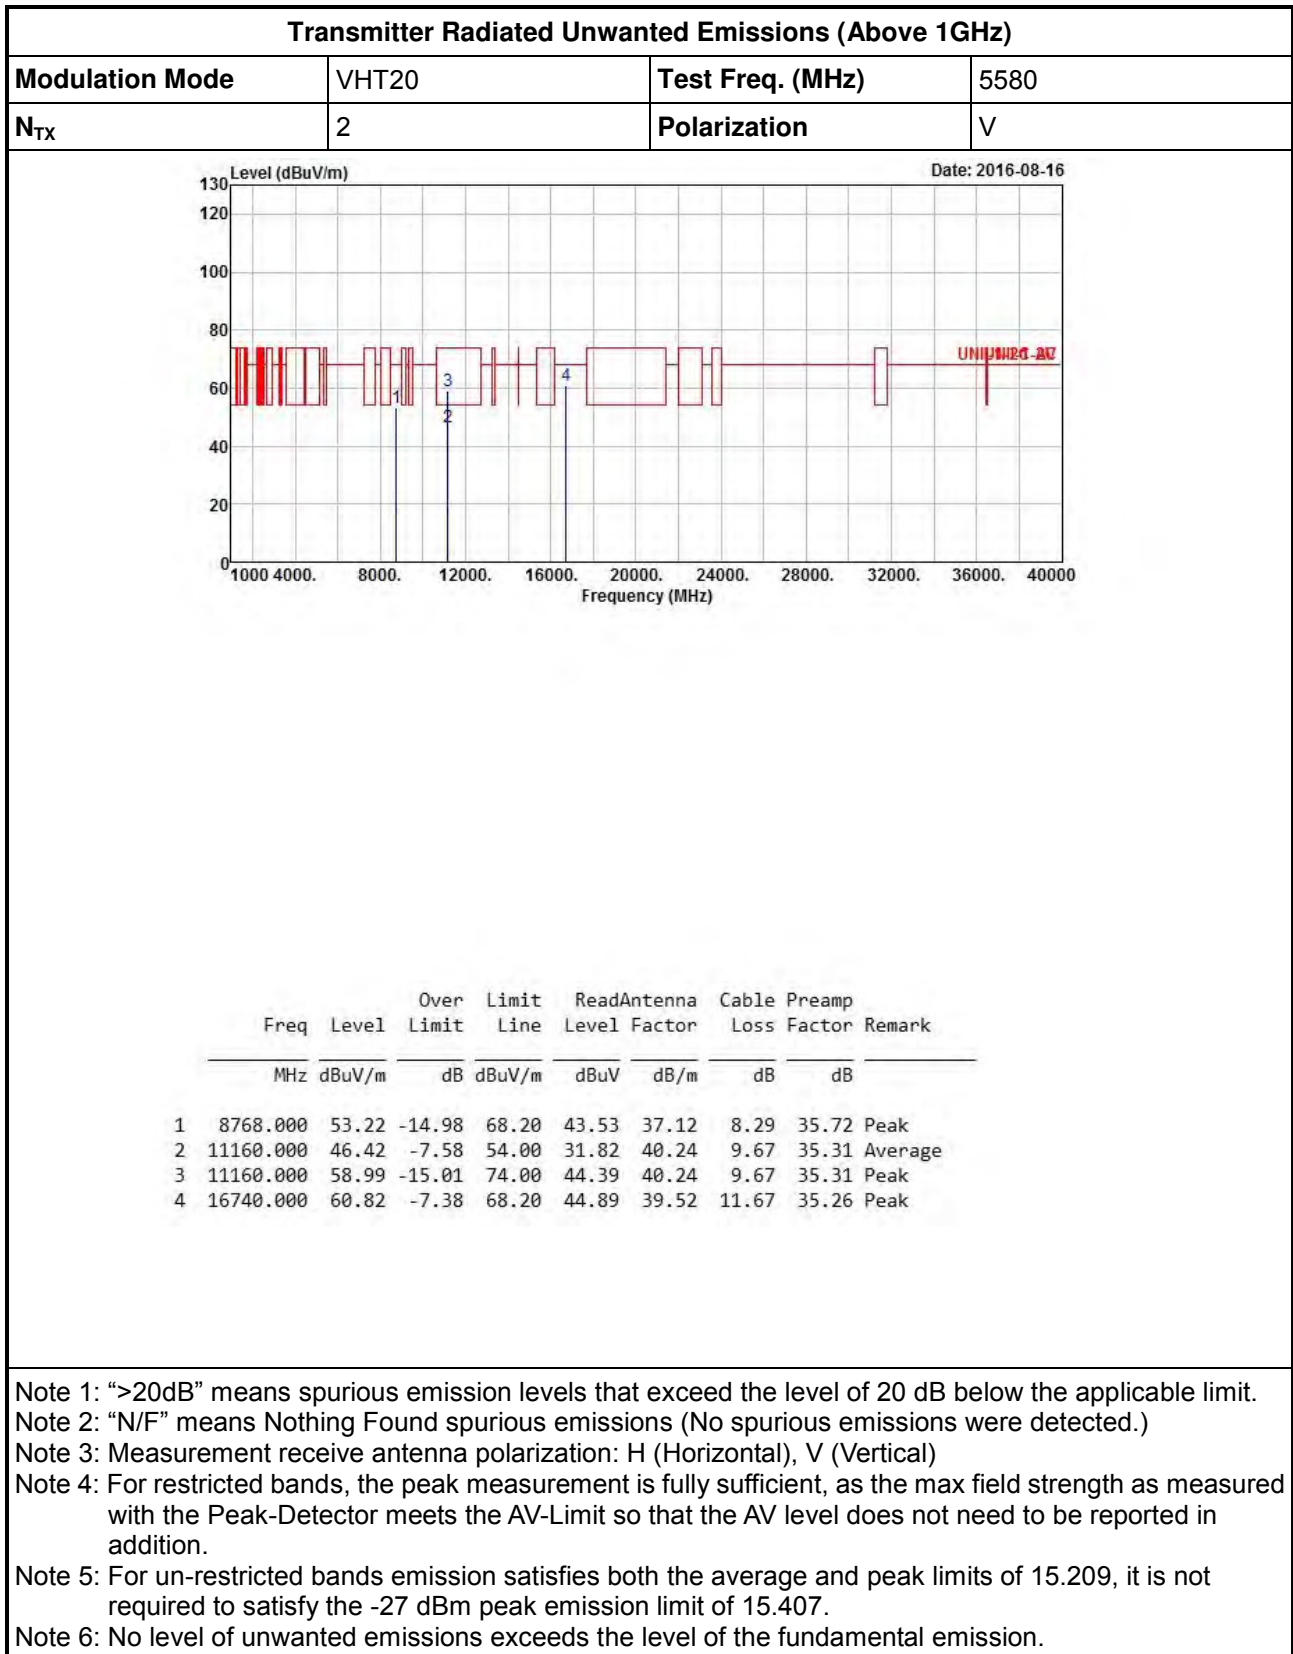


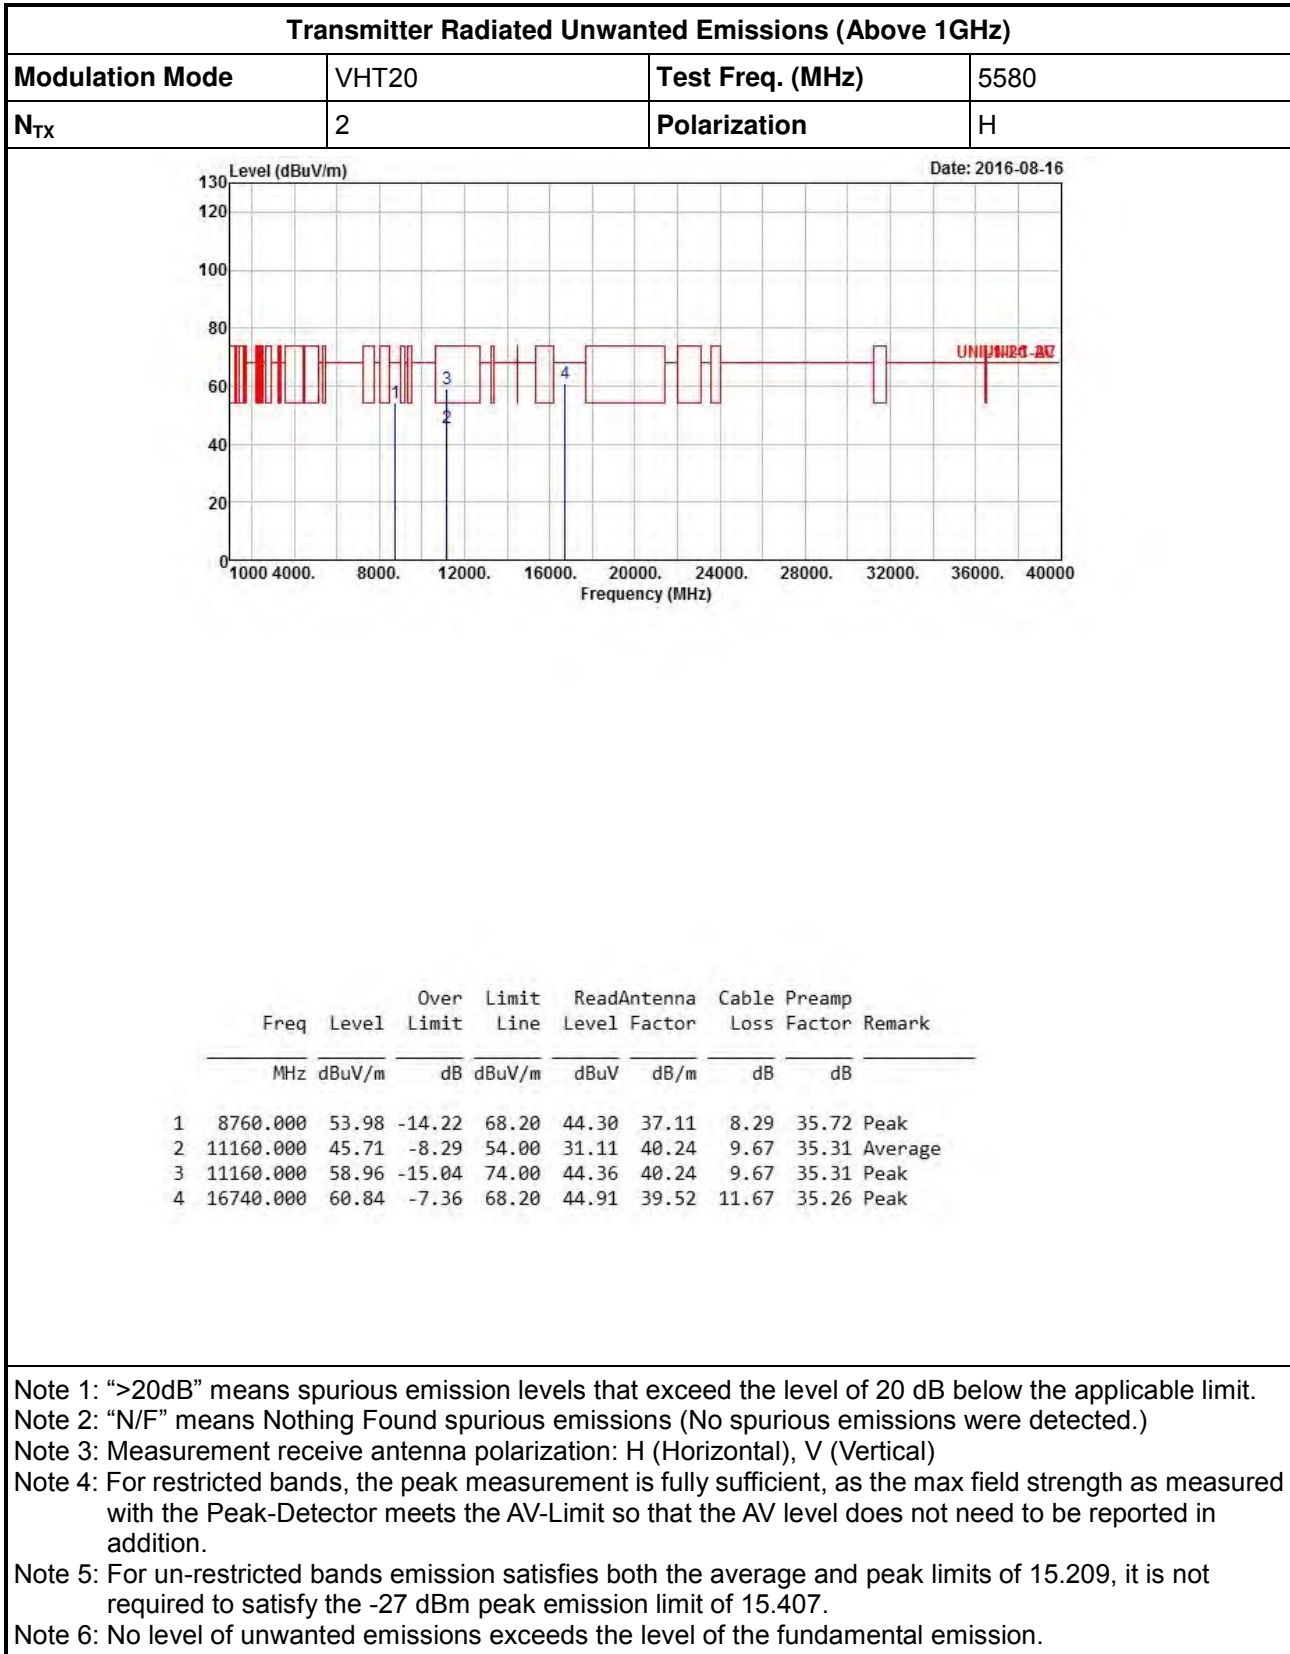




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	VHT20	Test Freq. (MHz)	5700
N _{TX}	2	Polarization	V

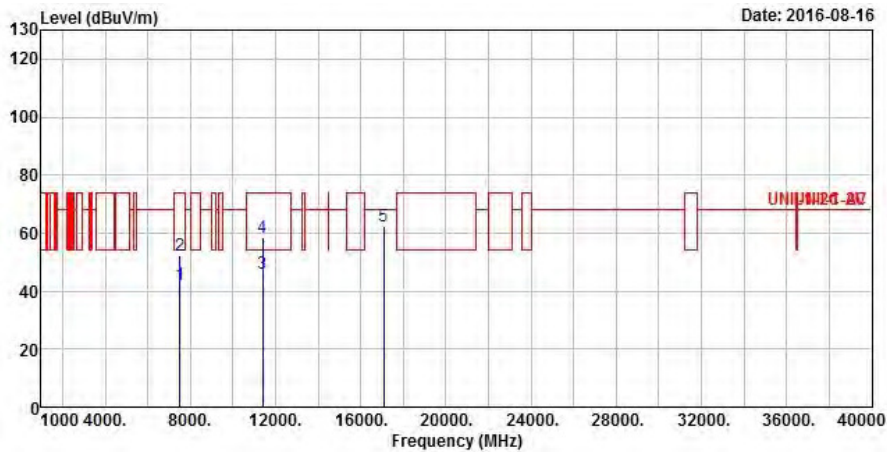



	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	
			dB	dBuV/m	dBuV	dB	dB	
1	7496.000	42.38	-11.62	54.00	33.56	36.59	7.67	35.44 Average
2	7496.000	52.31	-21.69	74.00	43.49	36.59	7.67	35.44 Peak
3	11400.000	46.09	-7.91	54.00	31.52	40.14	9.72	35.29 Average
4	11400.000	58.59	-15.41	74.00	44.02	40.14	9.72	35.29 Peak
5	17100.000	62.30	-5.90	68.20	44.79	40.62	11.94	35.05 Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

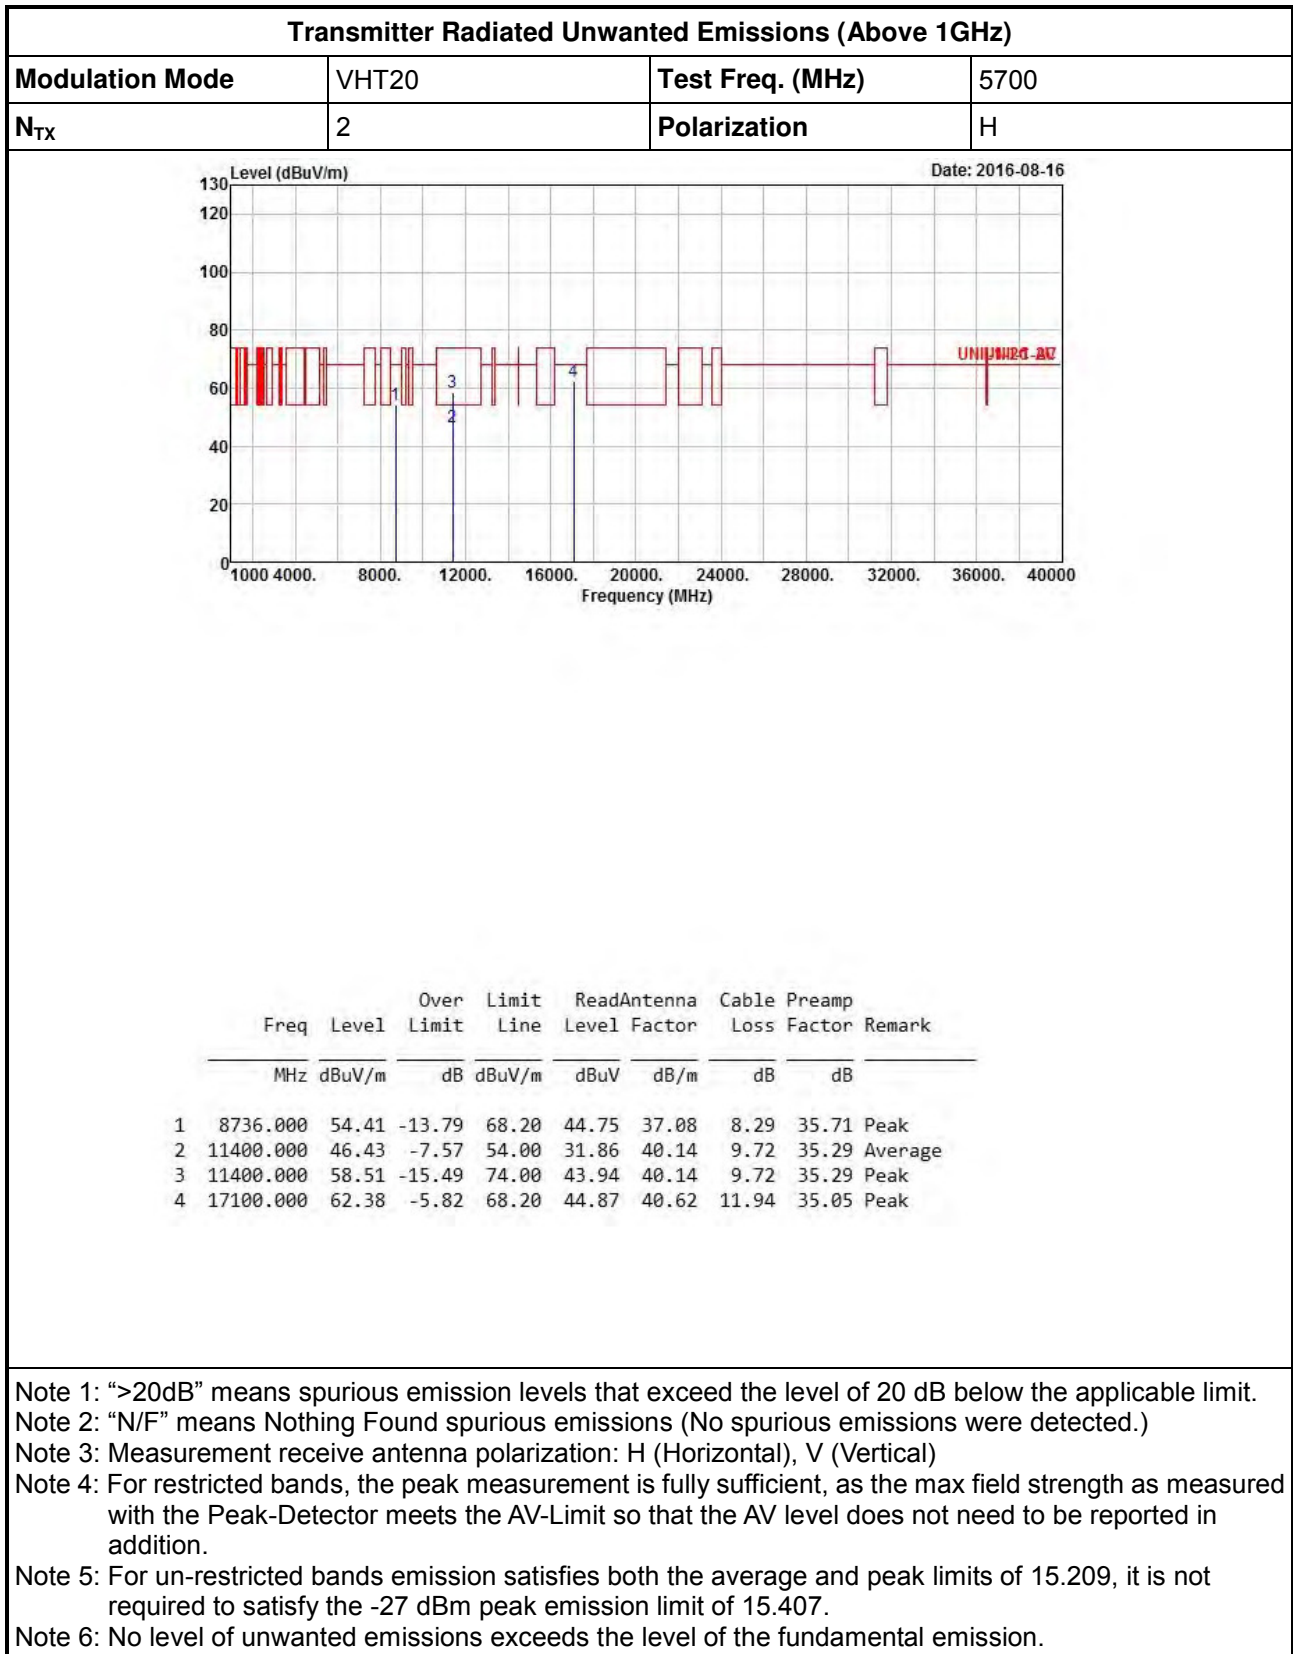


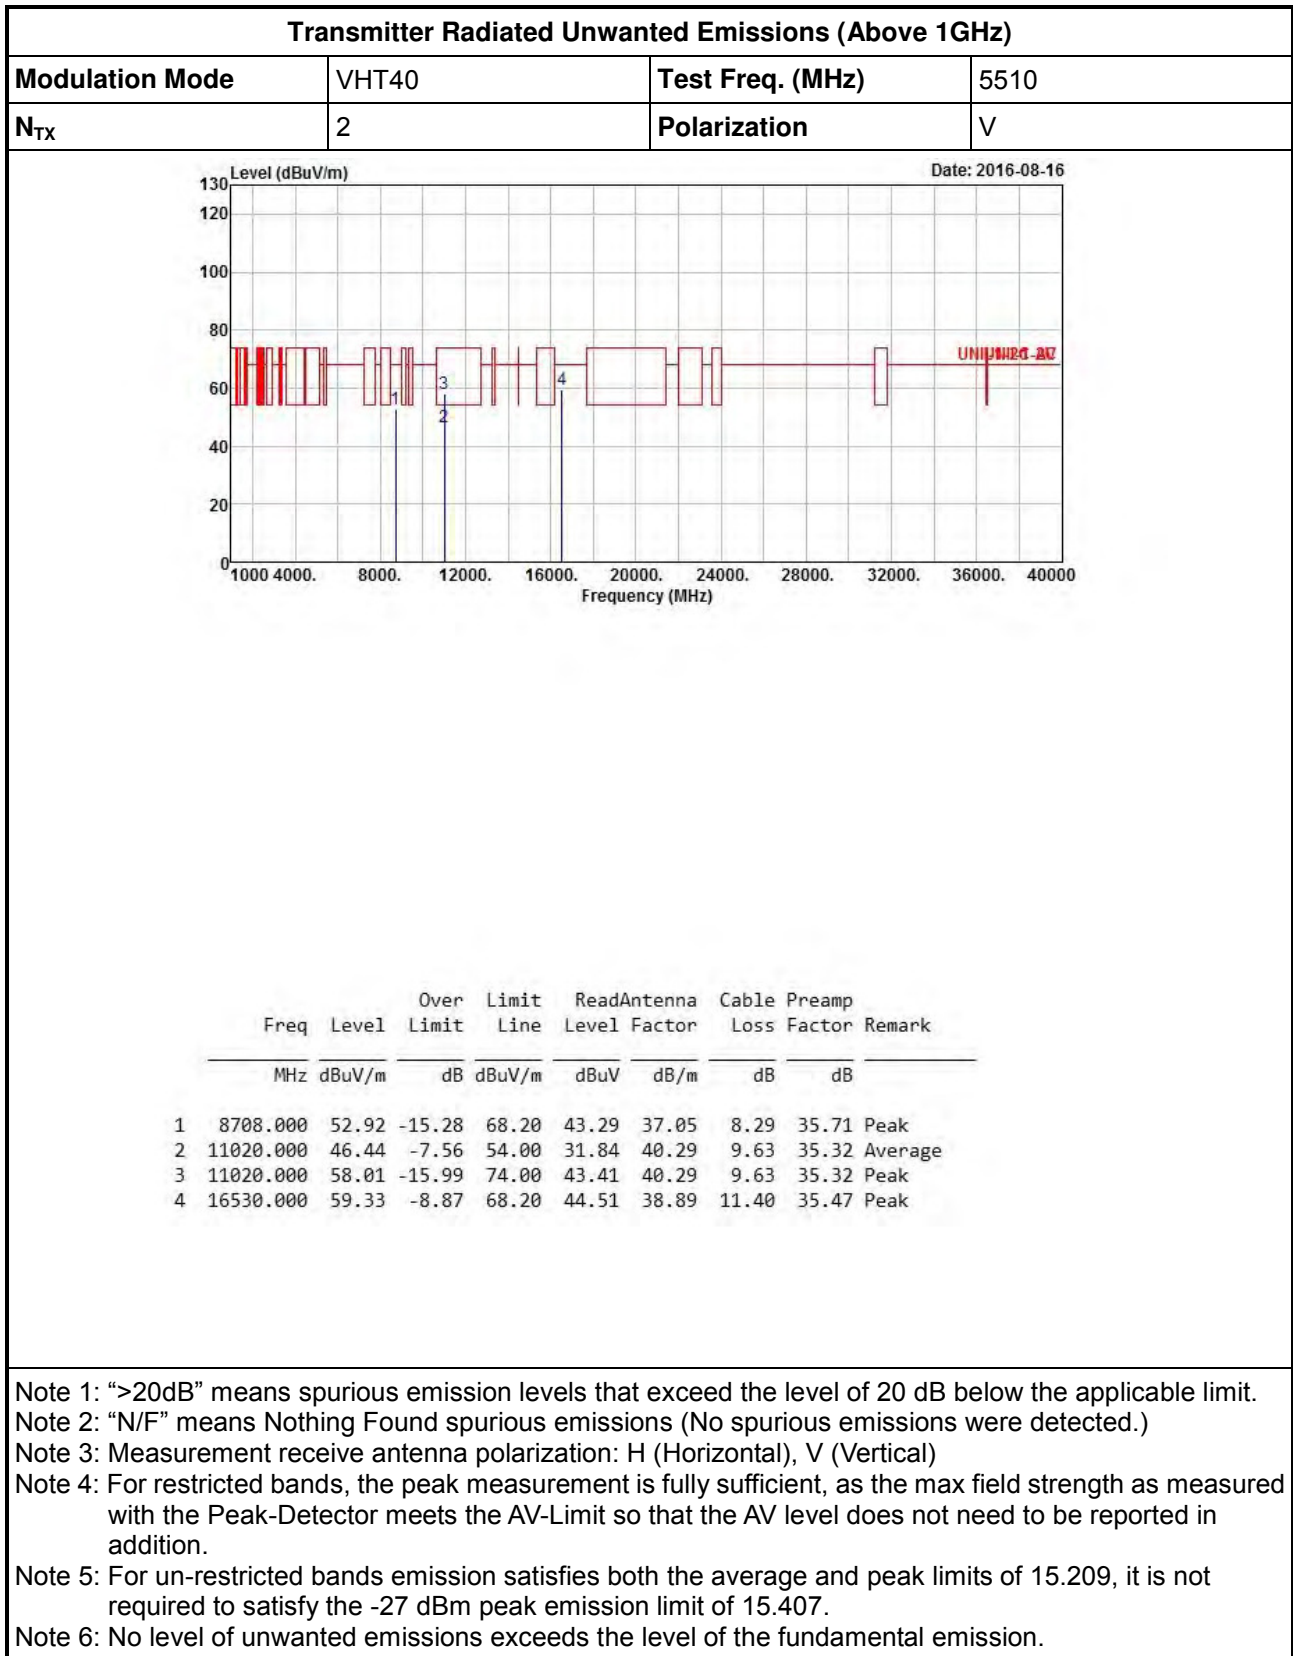


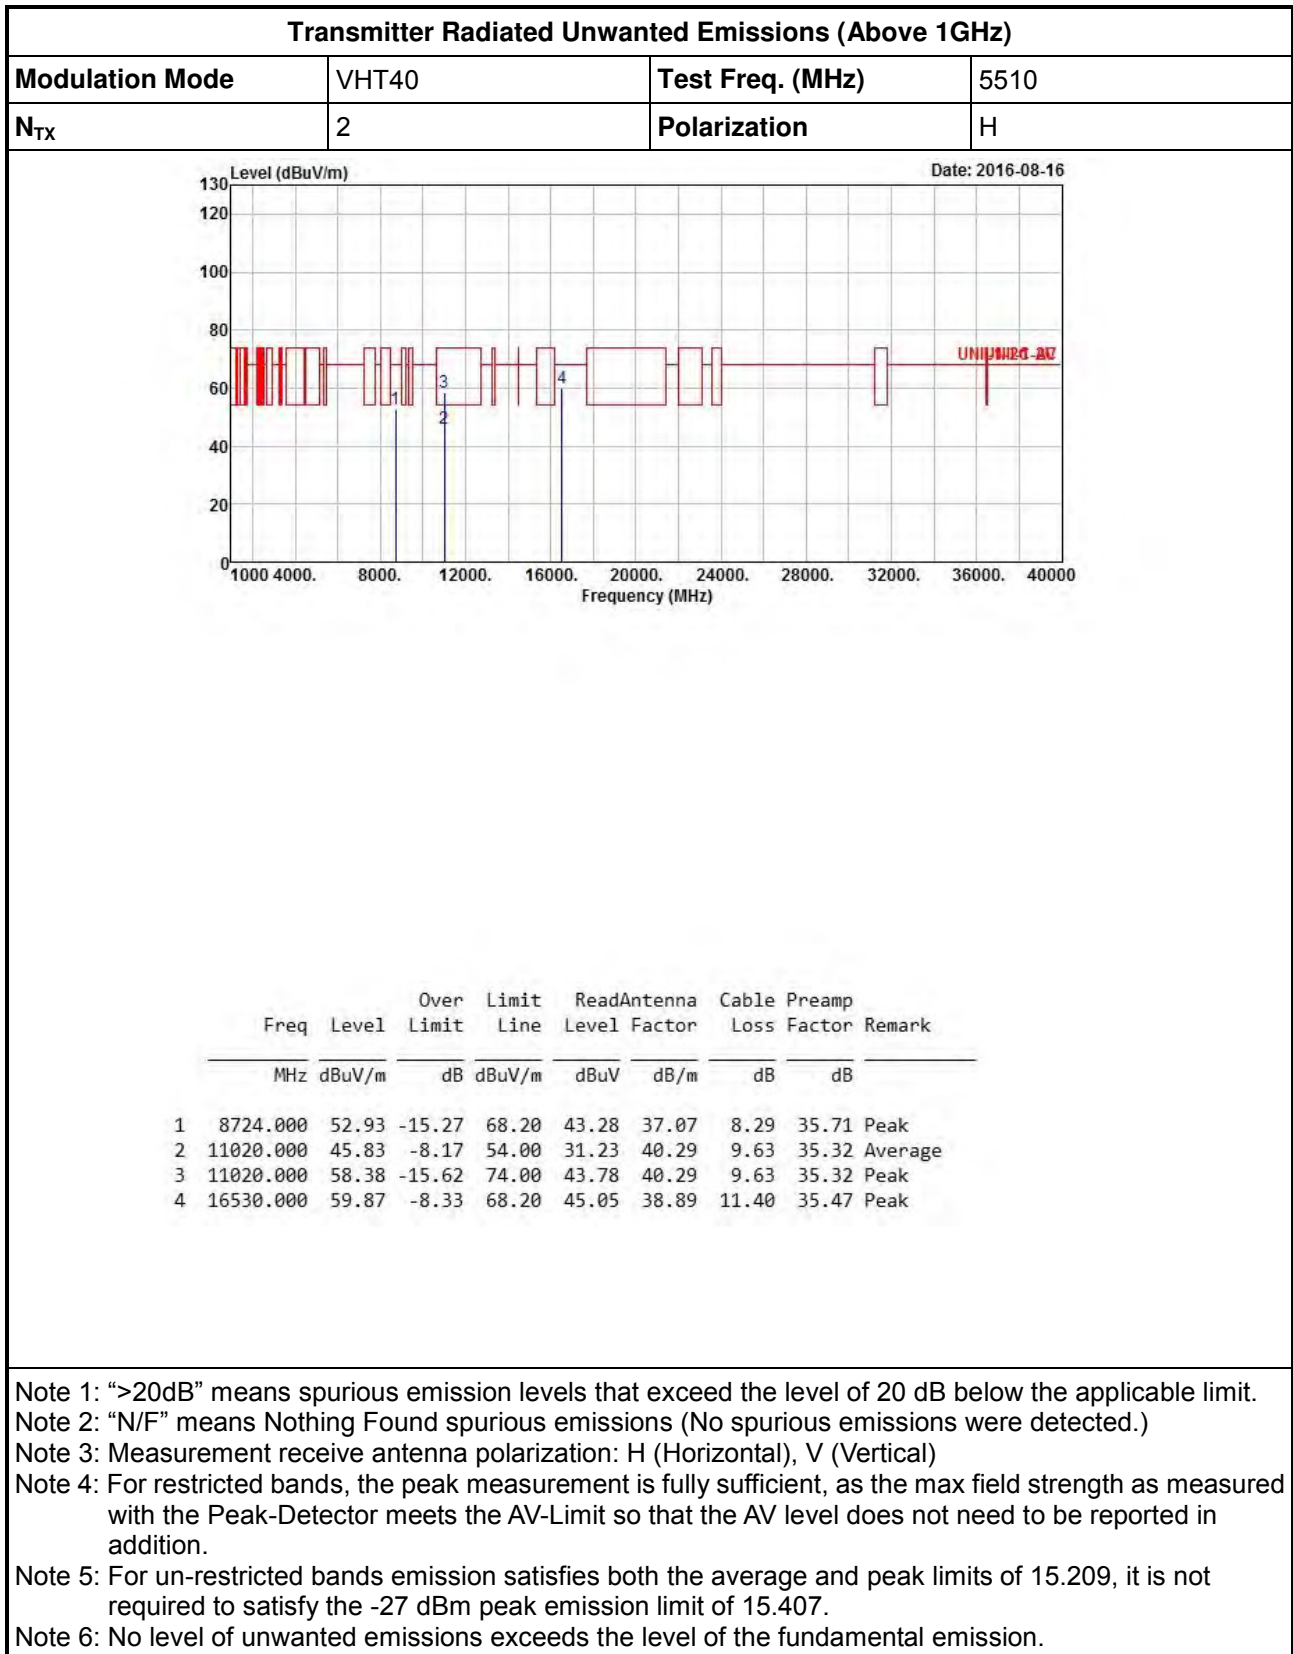


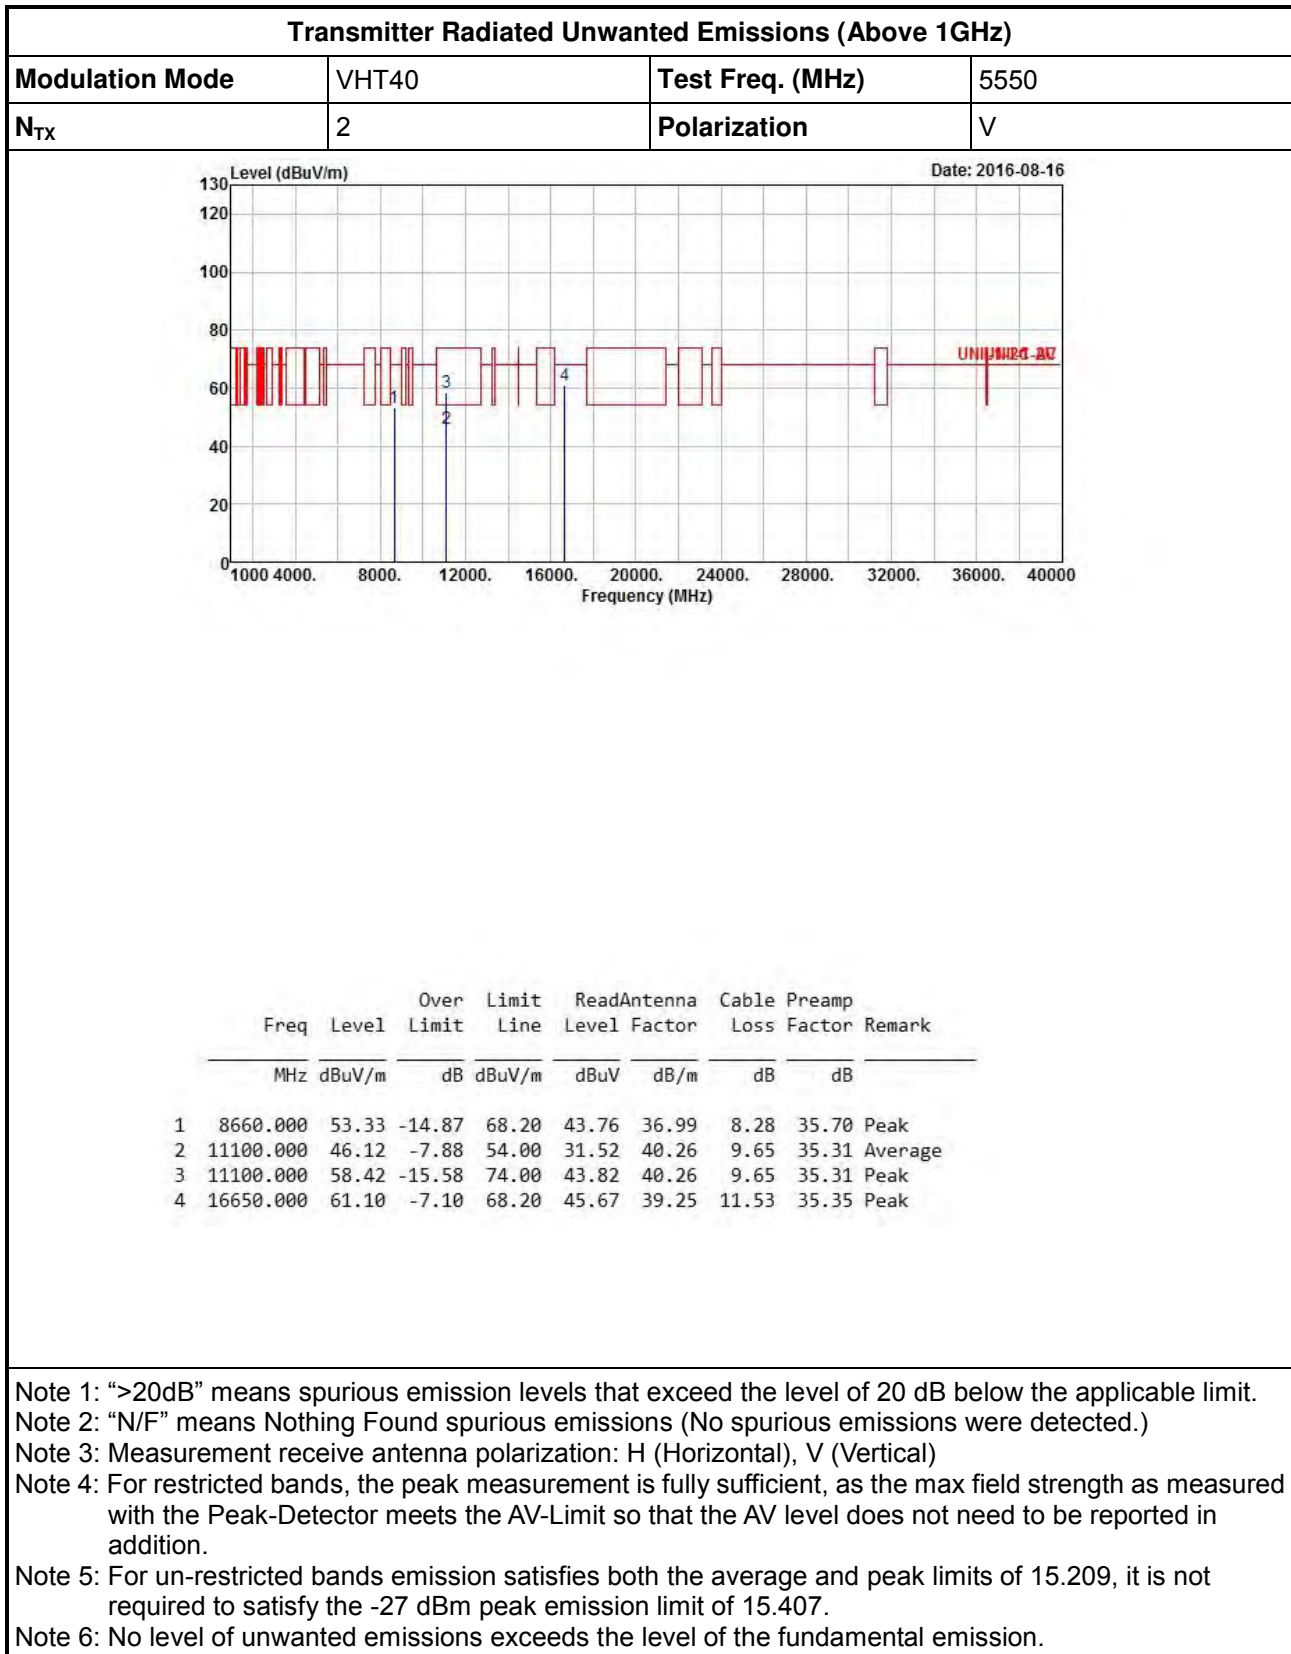


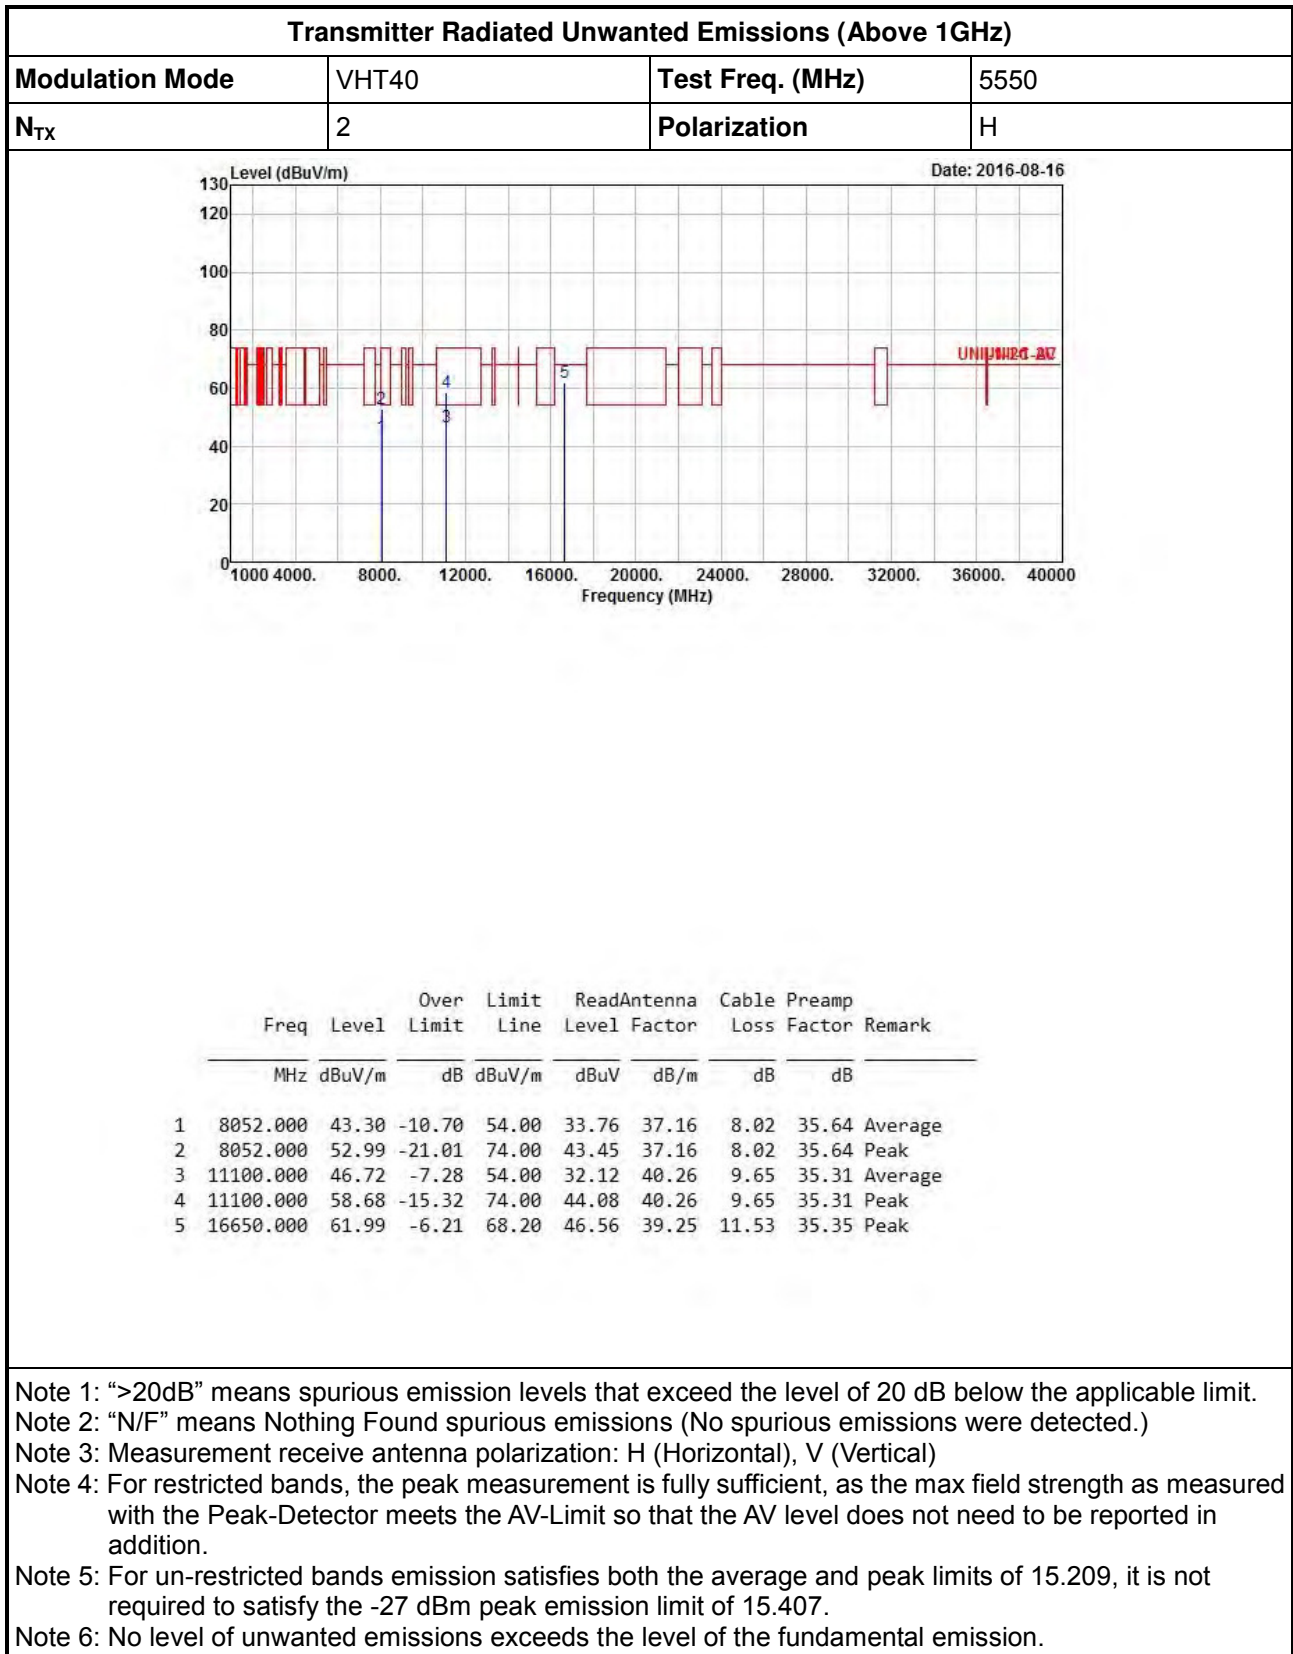

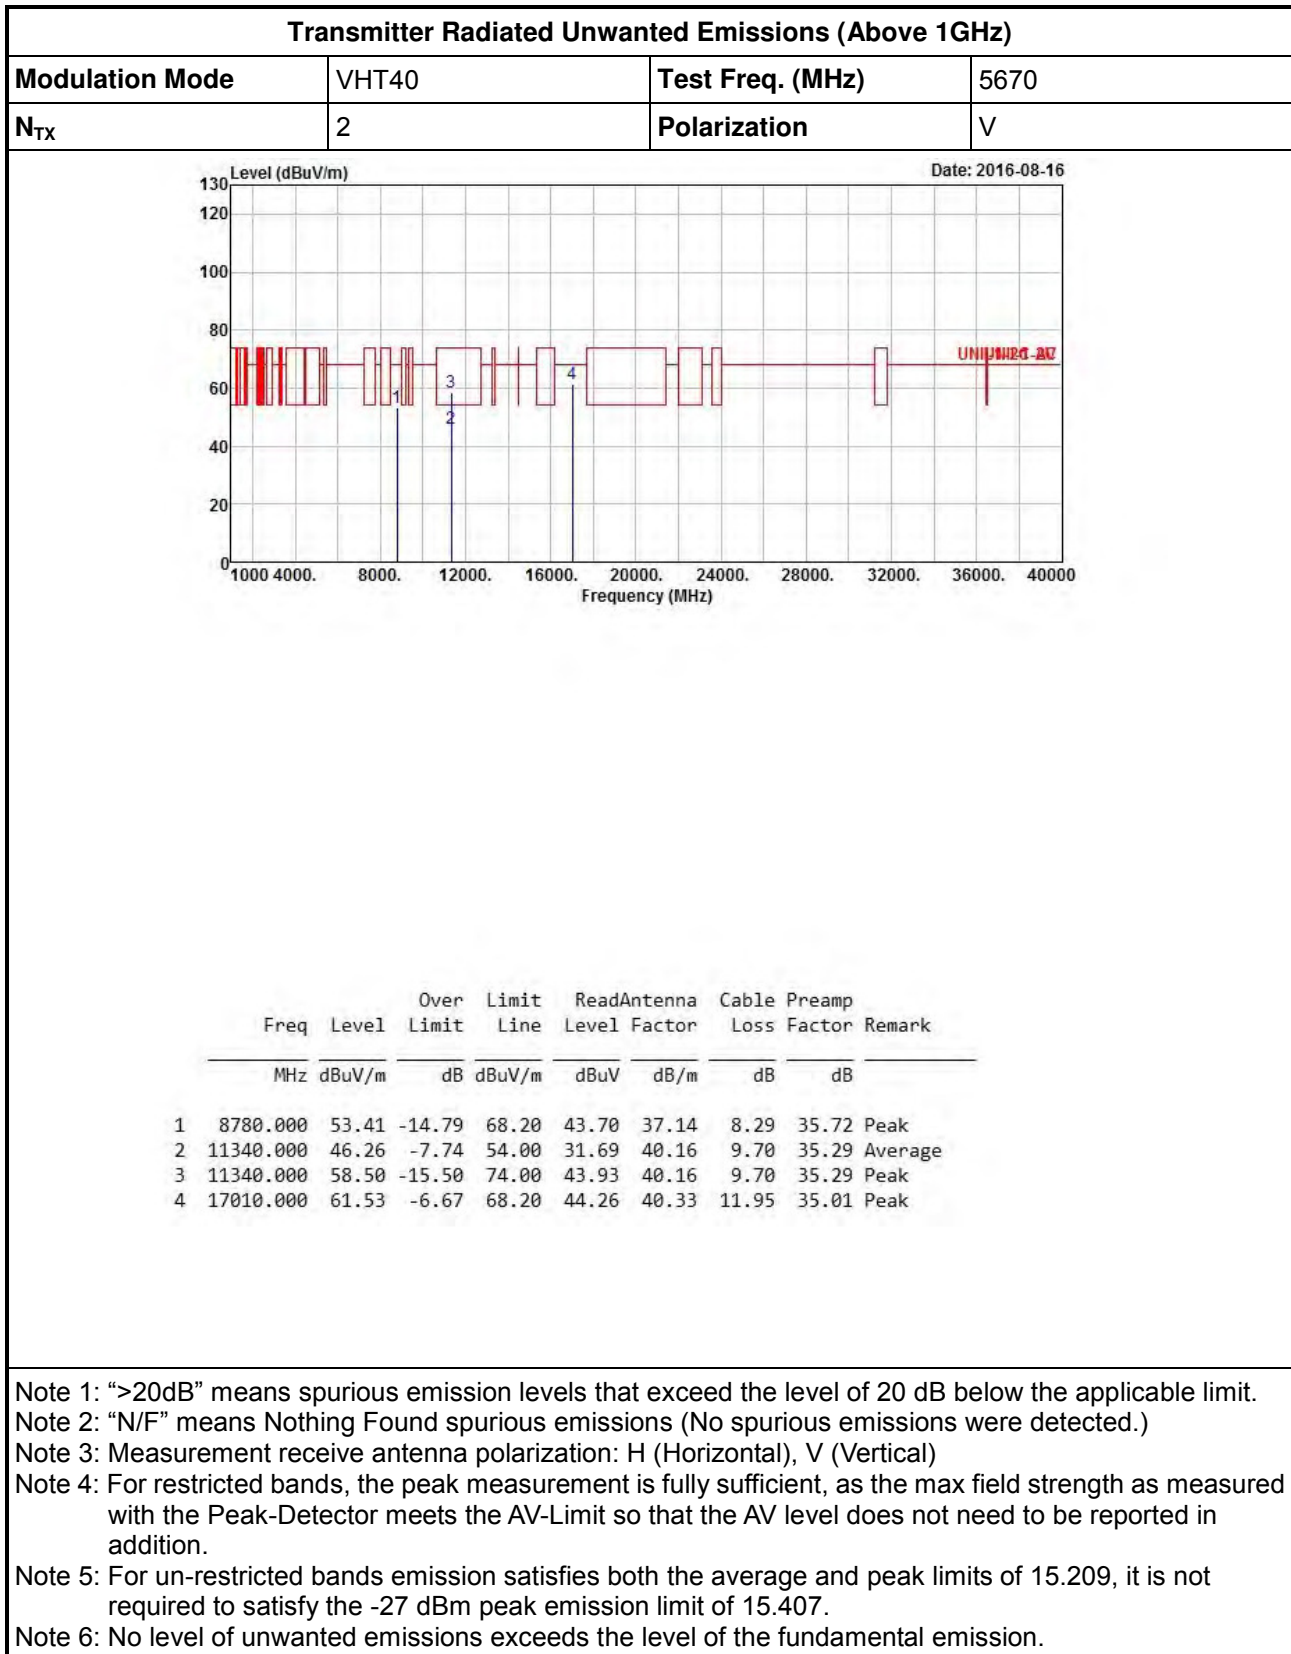

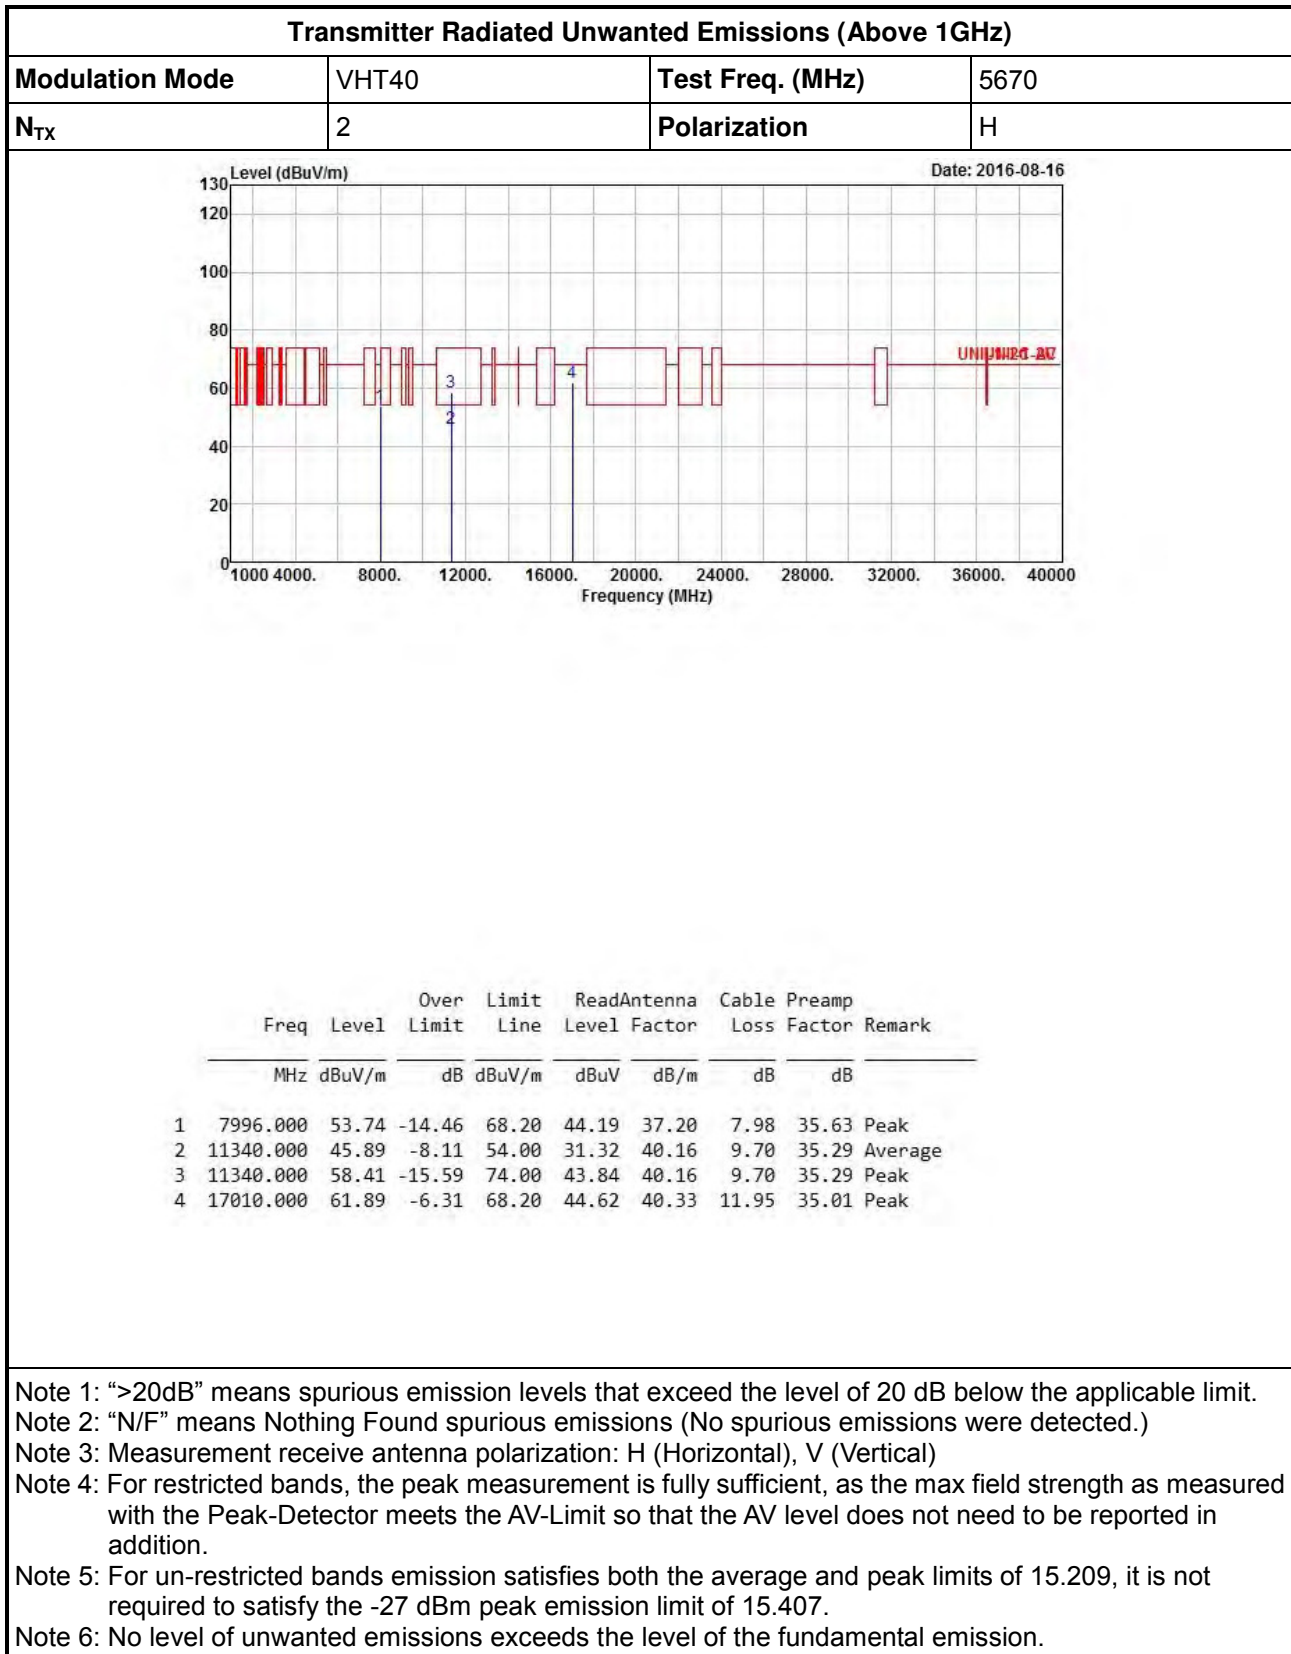

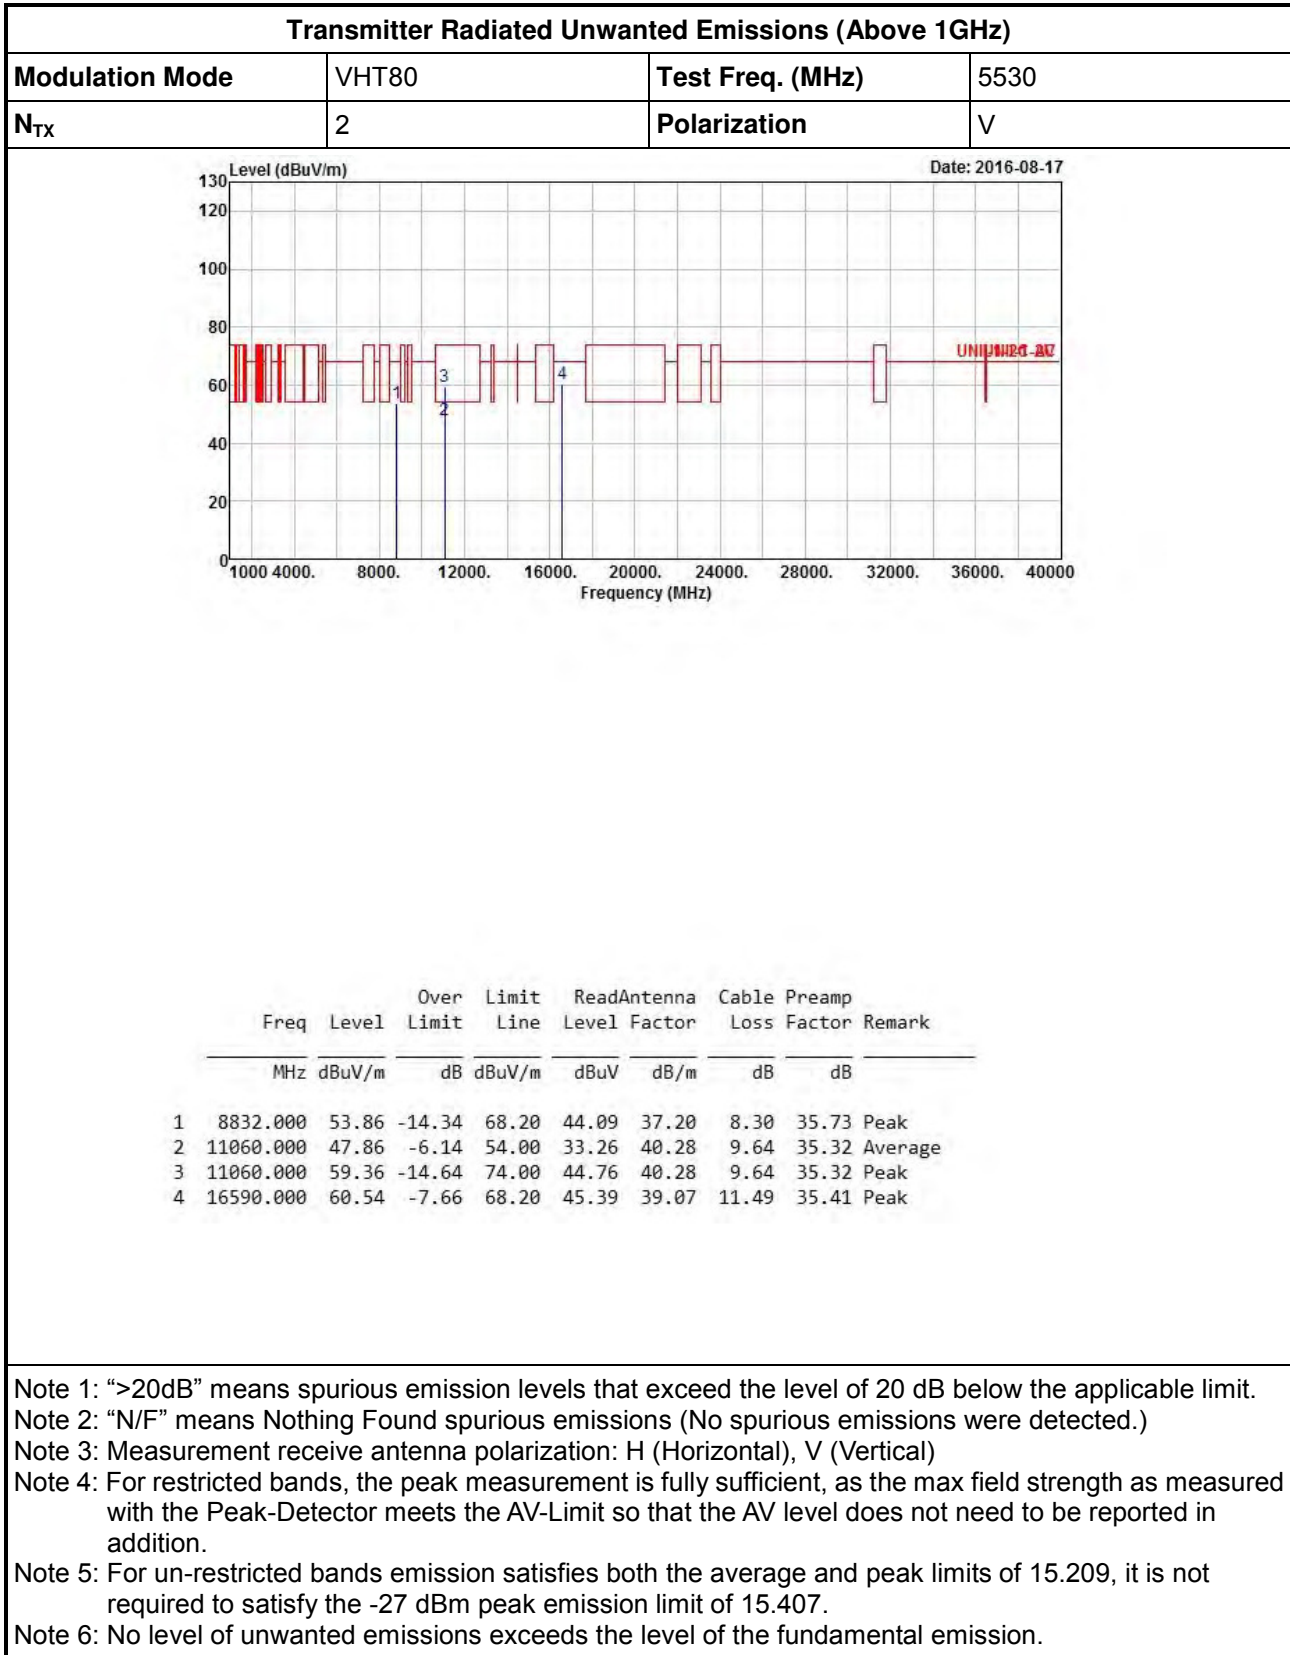


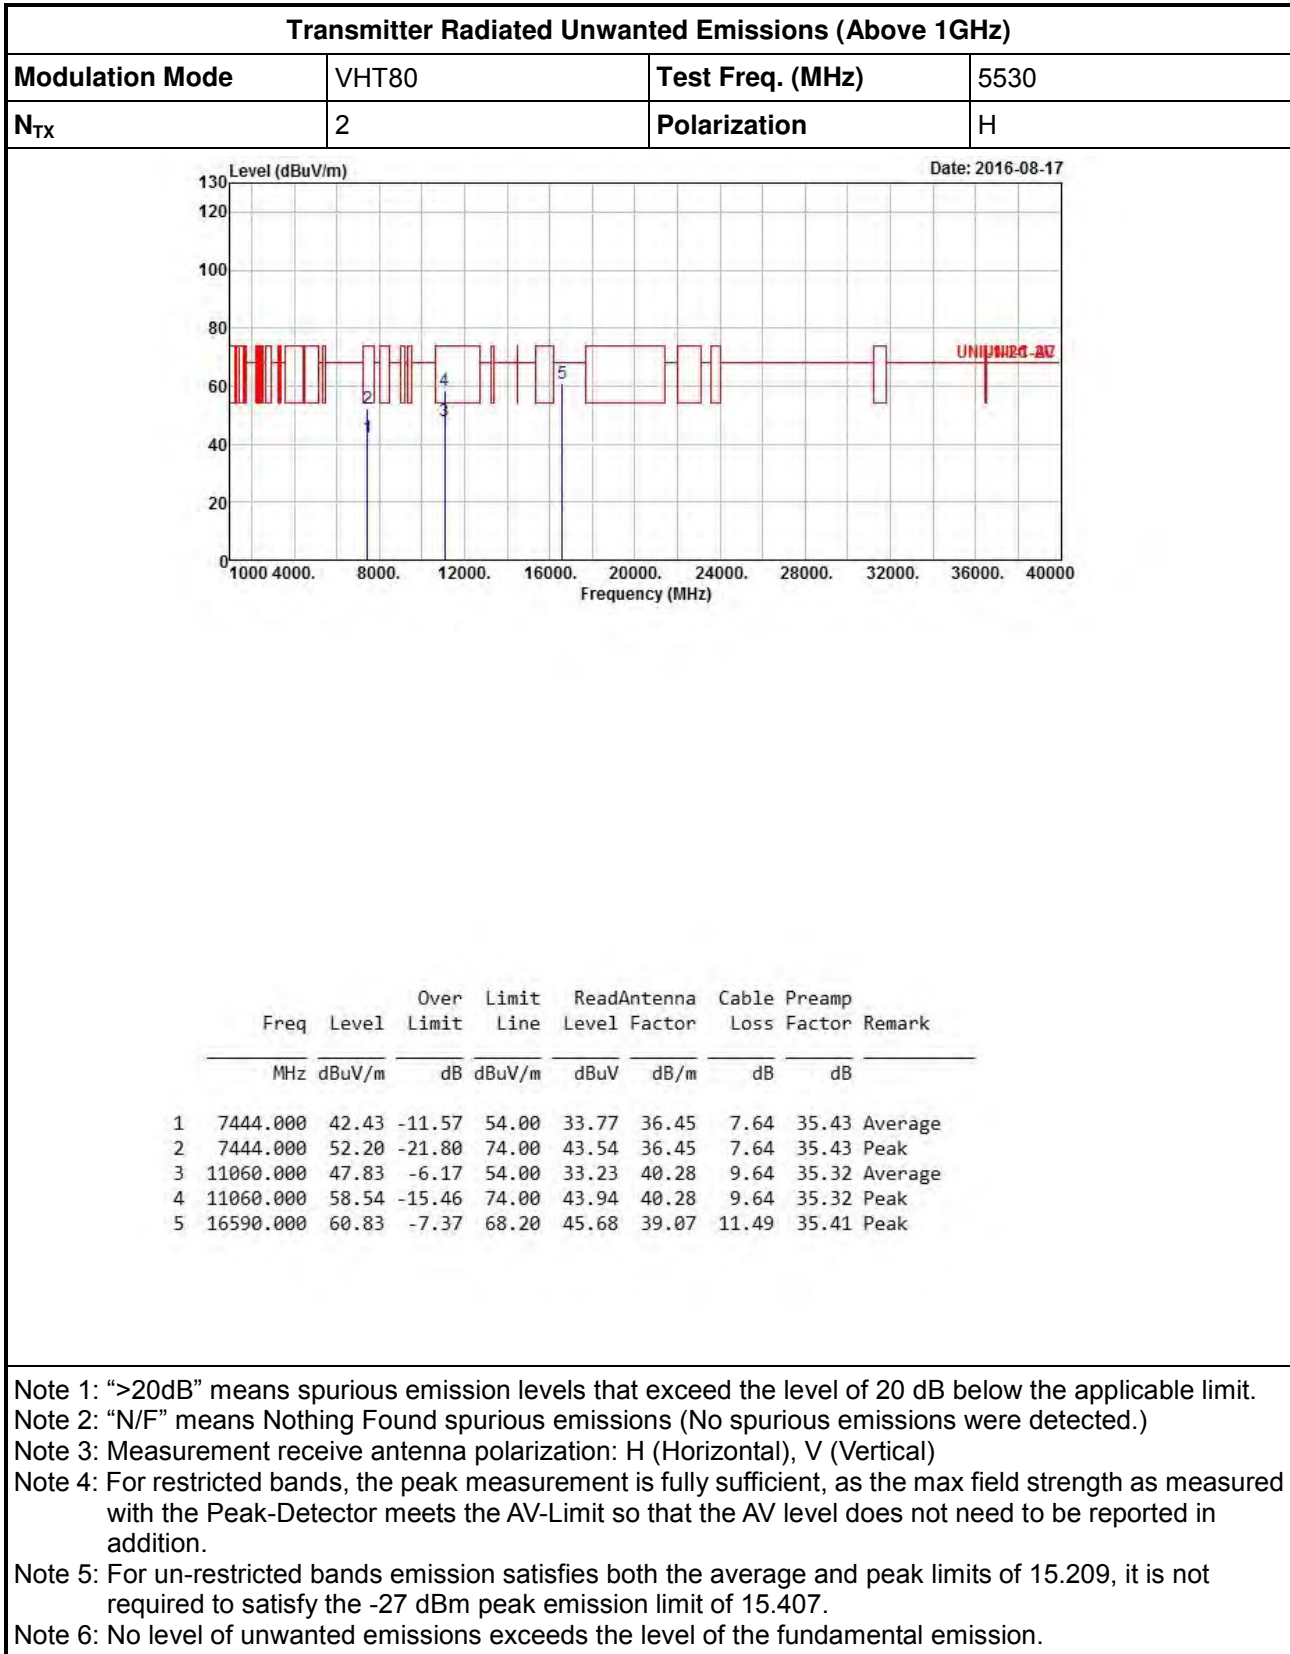



Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5725-5850MHz

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11a	Test Freq. (MHz)	5745
N _{TX}	2	Polarization	V

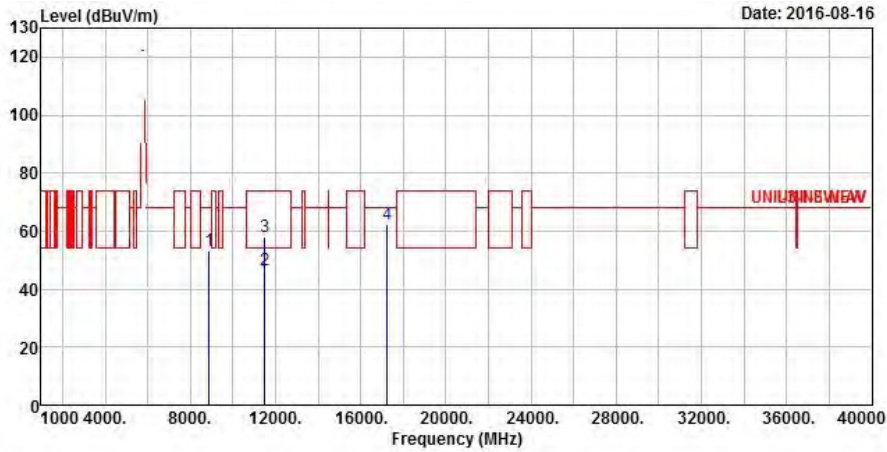


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8875.000	53.24	-14.96	68.20	43.42	37.25	8.30	35.73	Peak
2	11490.000	46.75	-7.25	54.00	32.19	40.10	9.74	35.28	Average
3	11490.000	58.24	-15.76	74.00	43.68	40.10	9.74	35.28	Peak
4	17235.000	62.40	-5.80	68.20	44.51	41.05	11.93	35.09	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	11a	Test Freq. (MHz)	5745
N _{TX}	2	Polarization	H

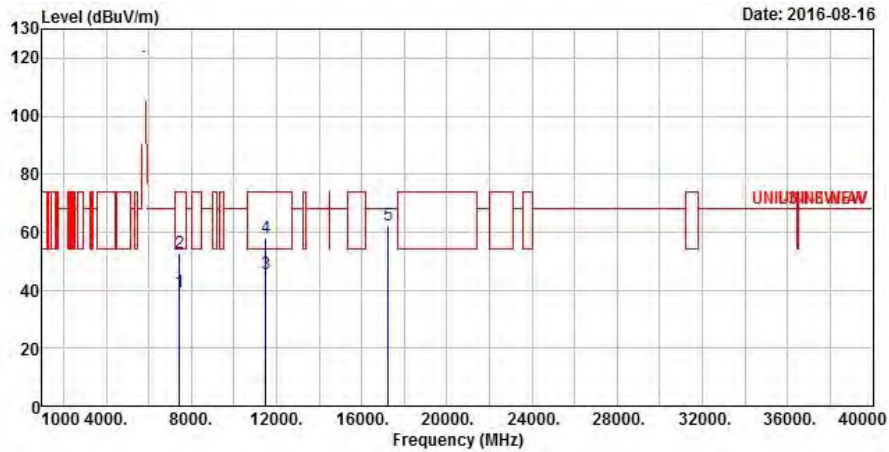


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7431.000	39.31	-14.69	54.00	30.68	36.42	7.64	35.43	Average
2	7431.000	52.65	-21.35	74.00	44.02	36.42	7.64	35.43	Peak
3	11490.000	45.74	-8.26	54.00	31.18	40.10	9.74	35.28	Average
4	11490.000	57.86	-16.14	74.00	43.30	40.10	9.74	35.28	Peak
5	17235.000	62.54	-5.66	68.20	44.65	41.05	11.93	35.09	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

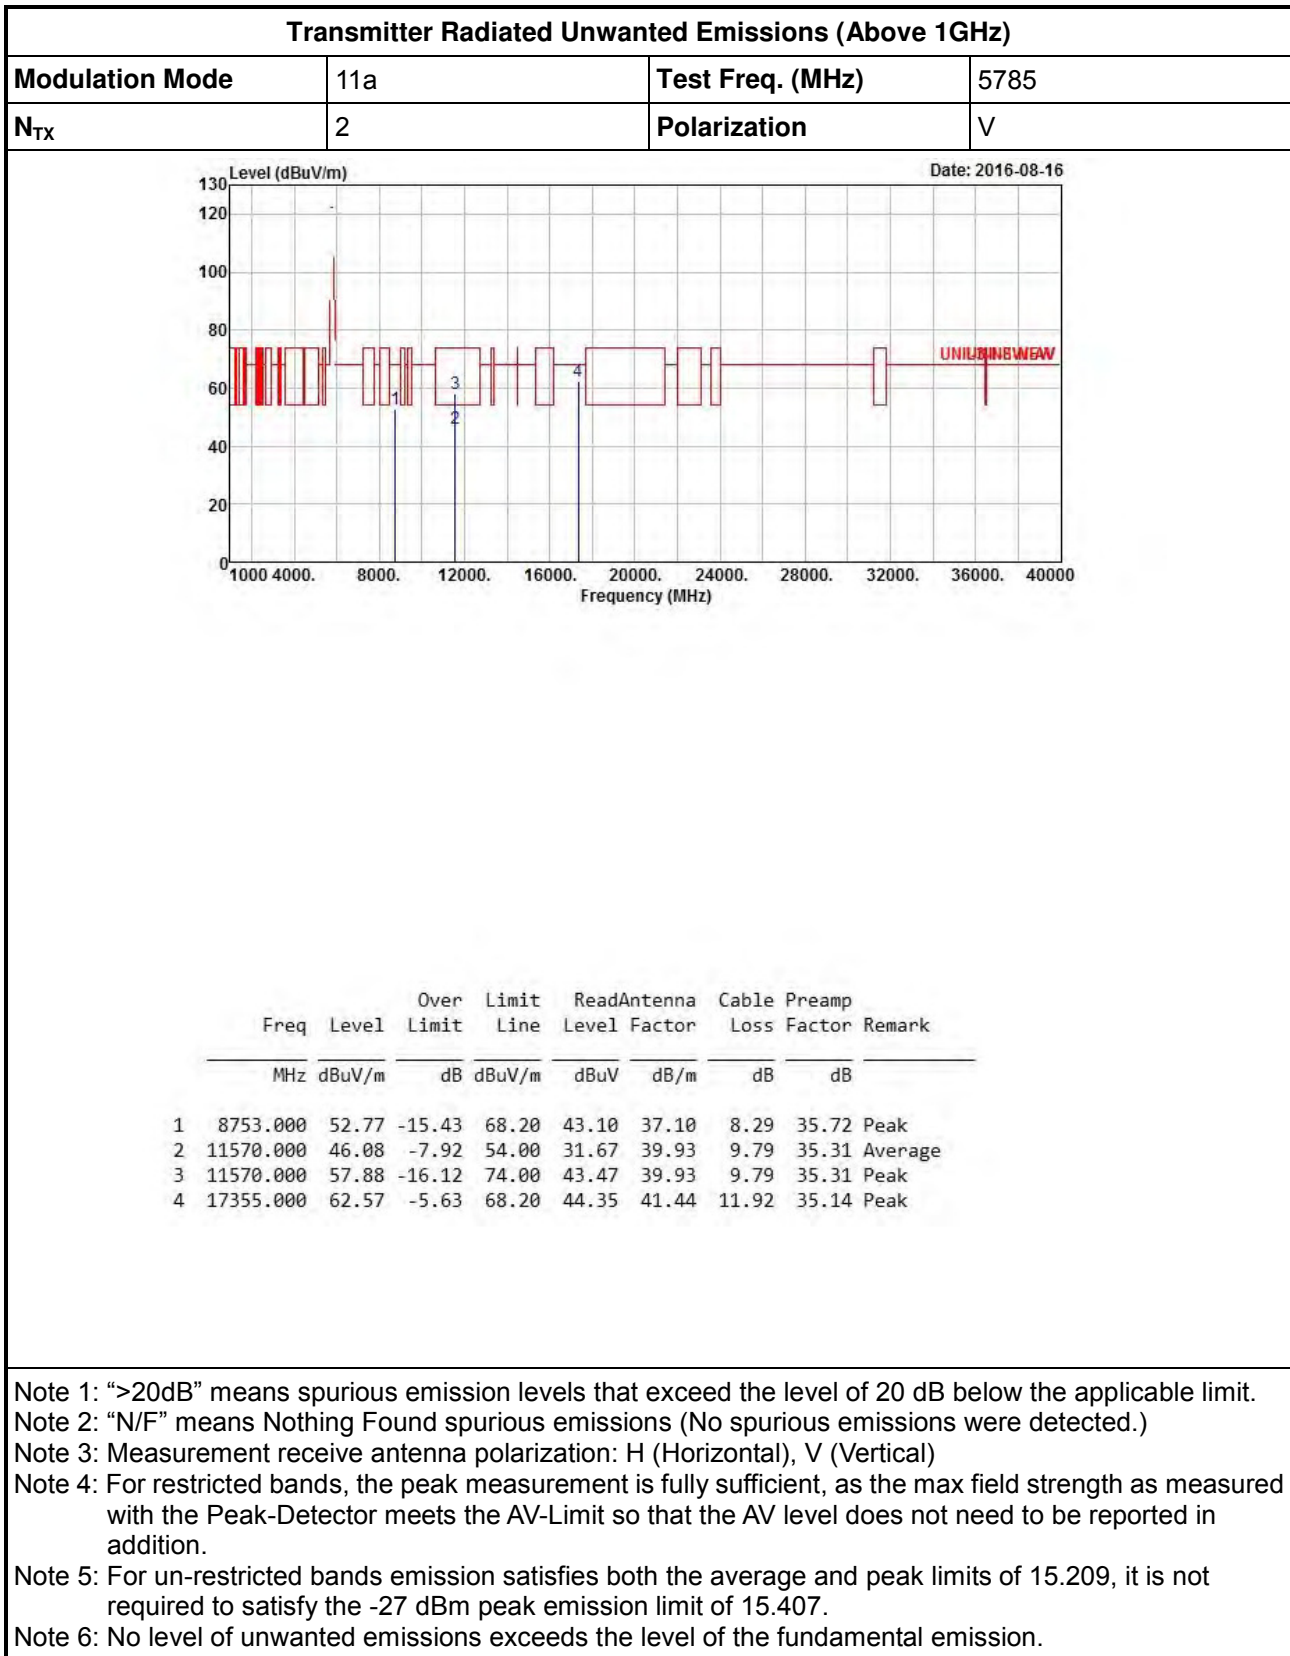

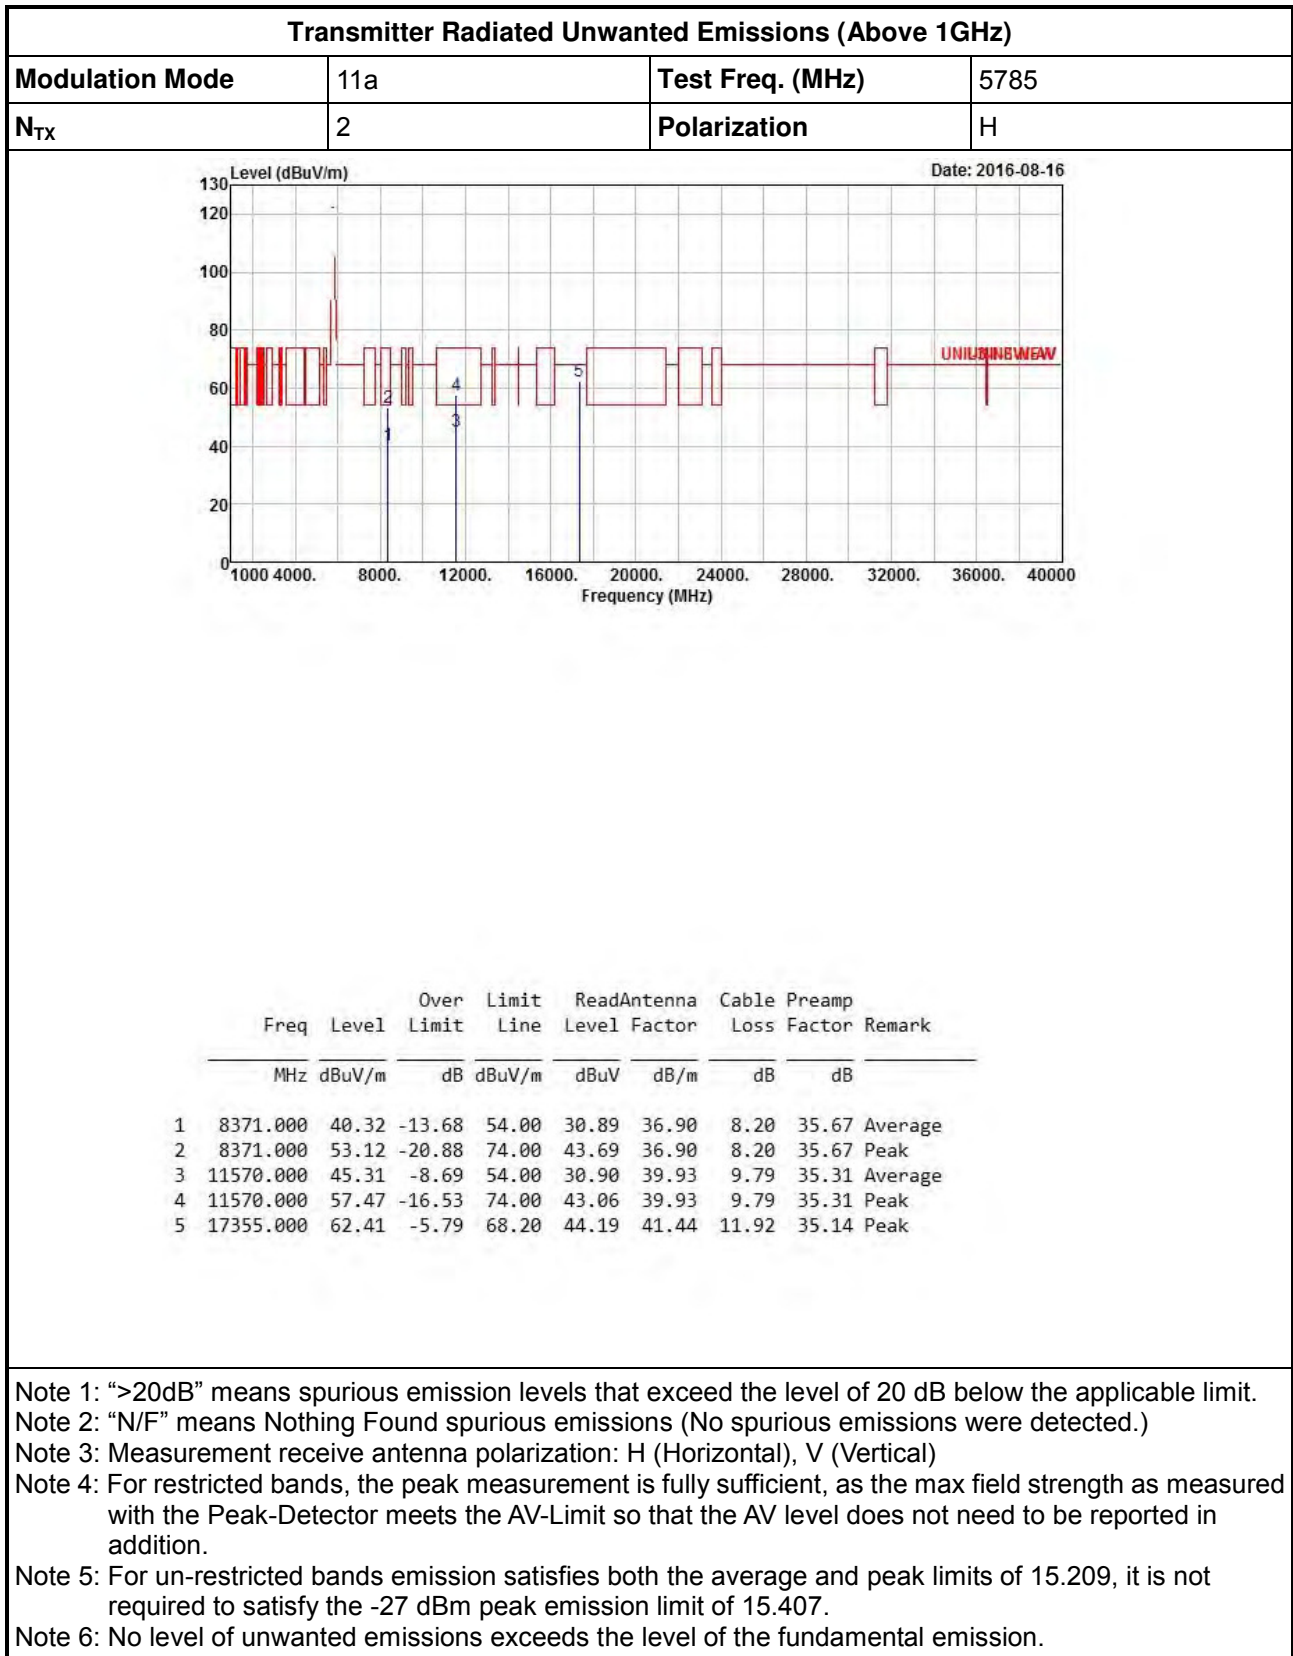


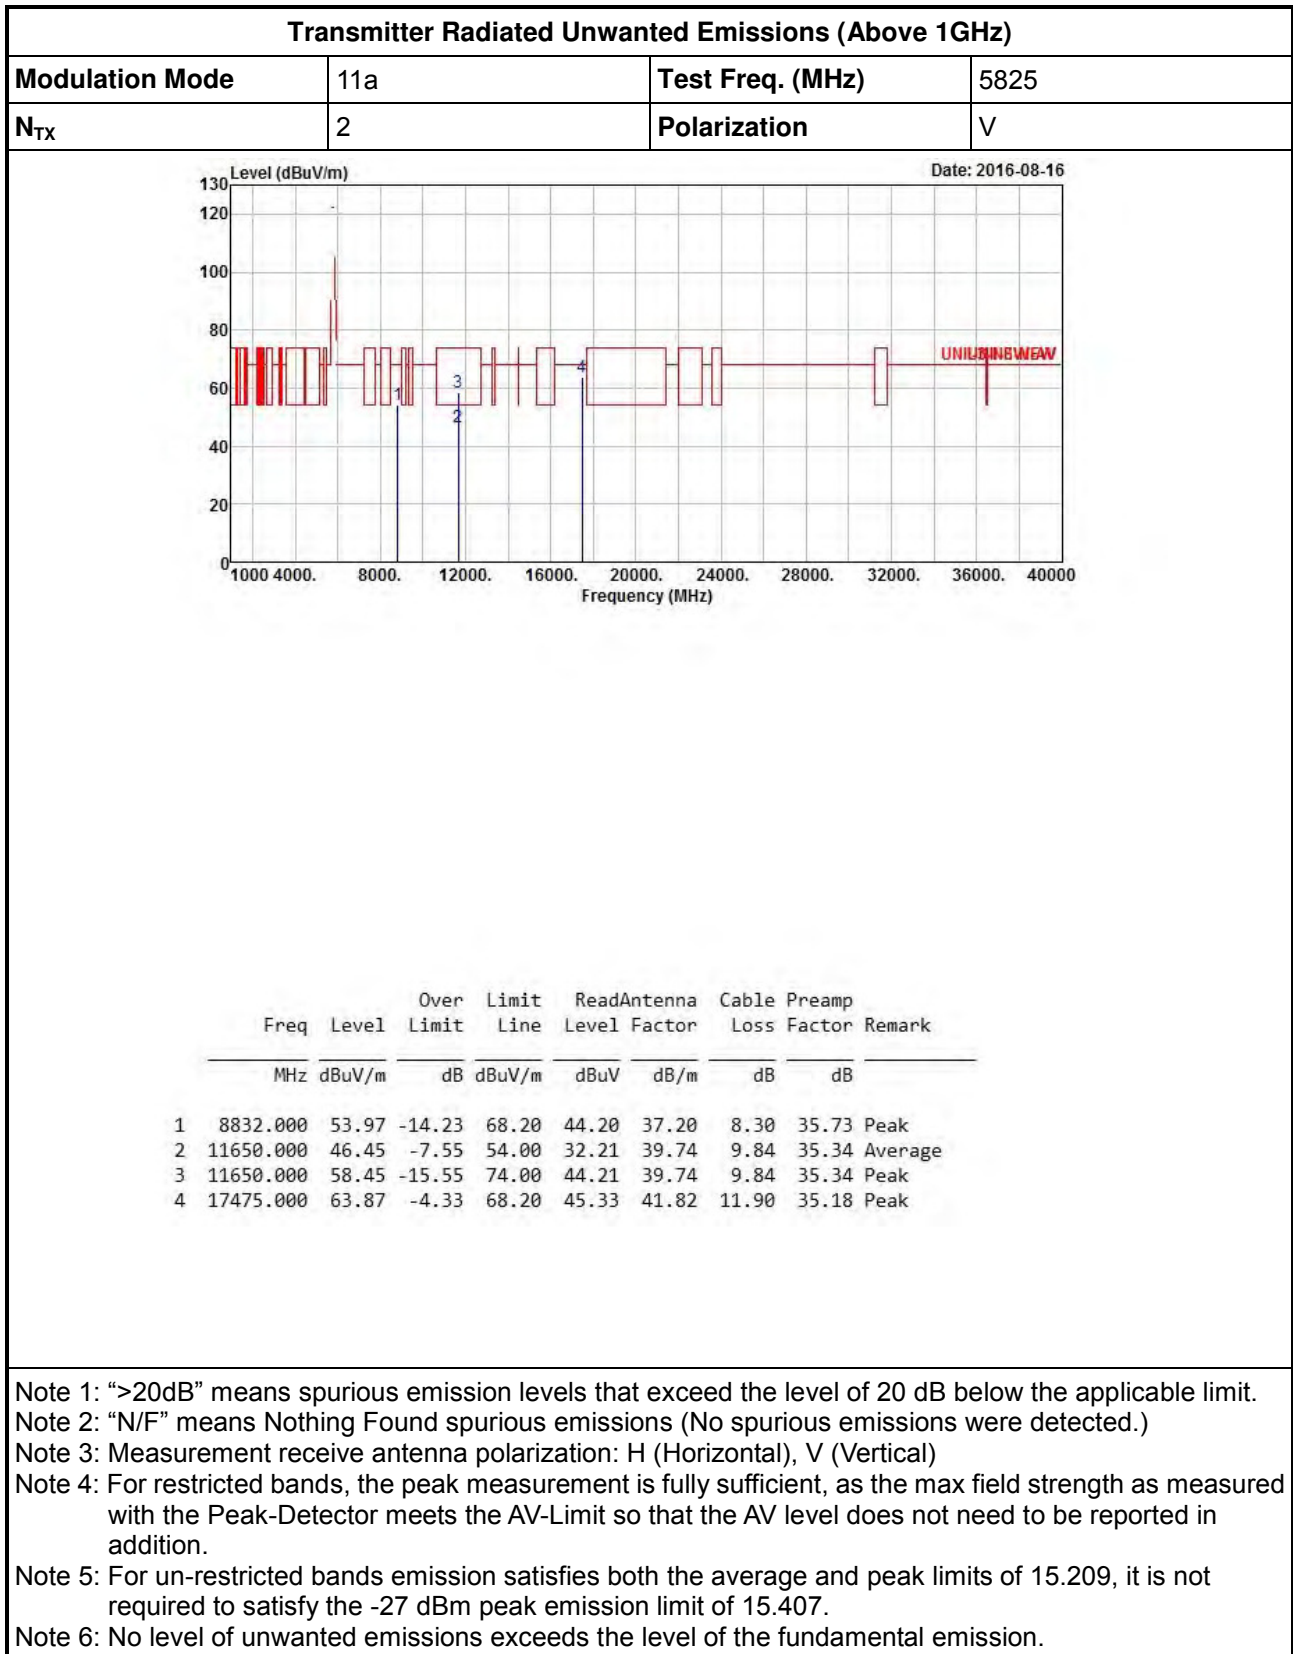



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5825
N _{TX}	2	Polarization	H

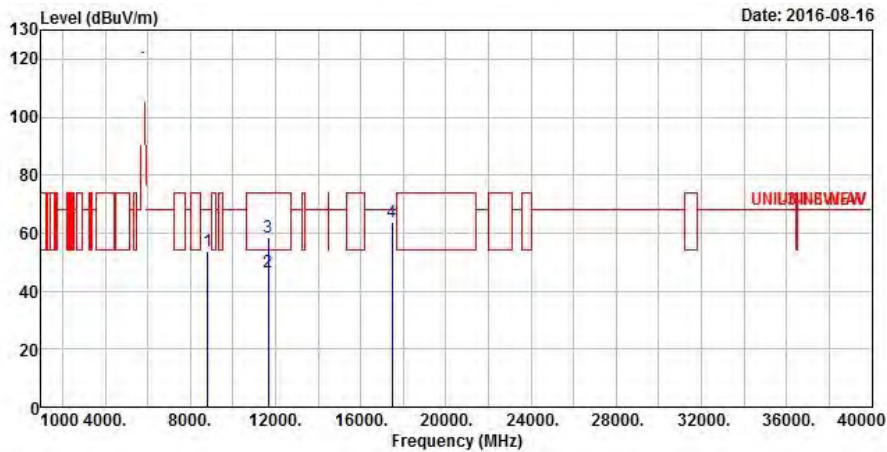


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	
			dB	dBuV/m	dBuV	dB	dB	
1	8812.000	53.53	-14.67	68.20	43.79	37.17	8.29	35.72 Peak
2	11650.000	46.35	-7.65	54.00	32.11	39.74	9.84	35.34 Average
3	11650.000	58.48	-15.52	74.00	44.24	39.74	9.84	35.34 Peak
4	17475.000	63.77	-4.43	68.20	45.23	41.82	11.90	35.18 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	VHT20	Test Freq. (MHz)	5745
N _{TX}	2	Polarization	V

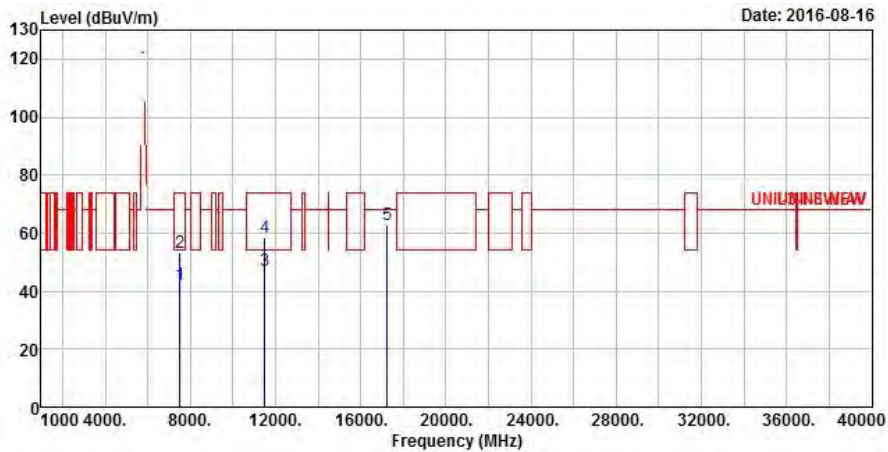



	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	
			dB	dBuV/m	dBuV	dB	dB	
1	7500.000	42.41	-11.59	54.00	33.58	36.60	7.67	35.44 Average
2	7500.000	53.06	-20.94	74.00	44.23	36.60	7.67	35.44 Peak
3	11490.000	46.84	-7.16	54.00	32.28	40.10	9.74	35.28 Average
4	11490.000	58.63	-15.37	74.00	44.07	40.10	9.74	35.28 Peak
5	17235.000	62.72	-5.48	68.20	44.83	41.05	11.93	35.09 Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

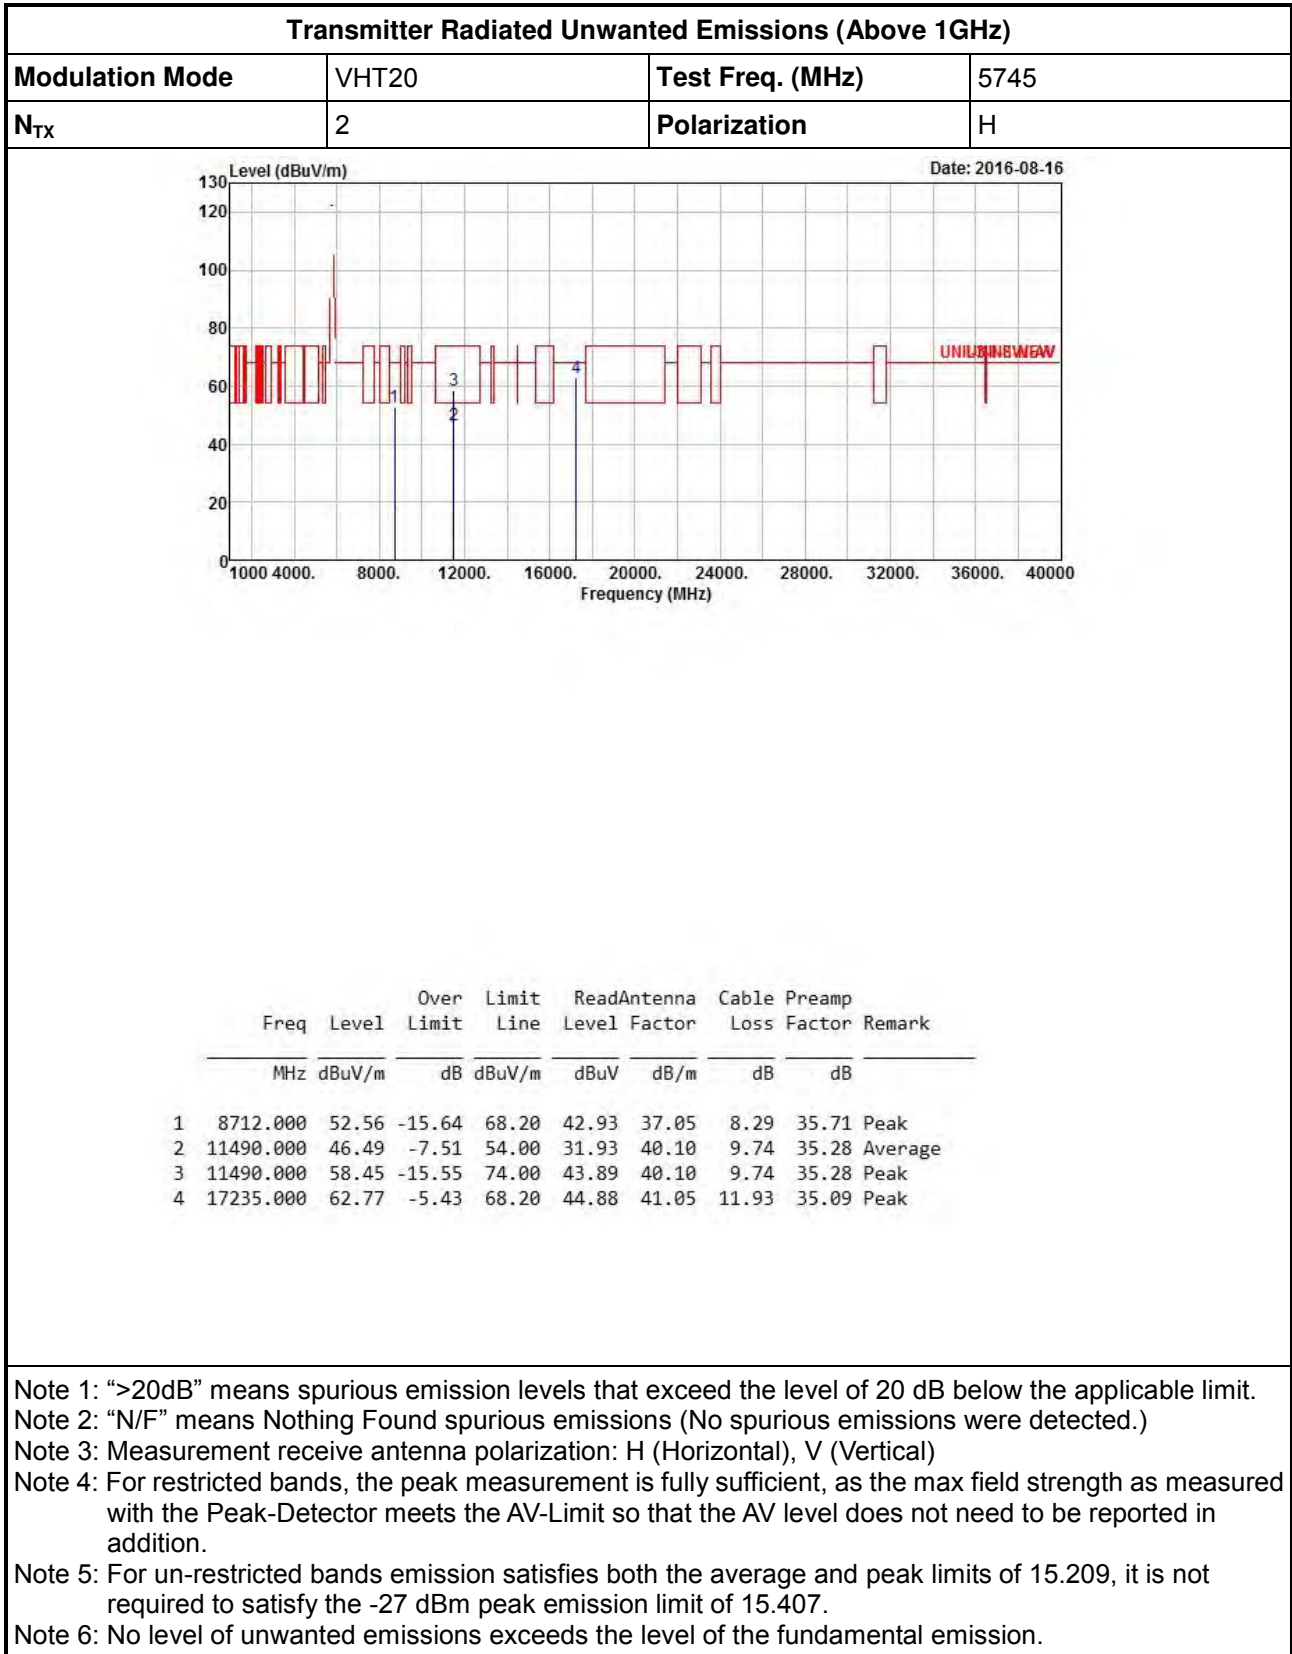


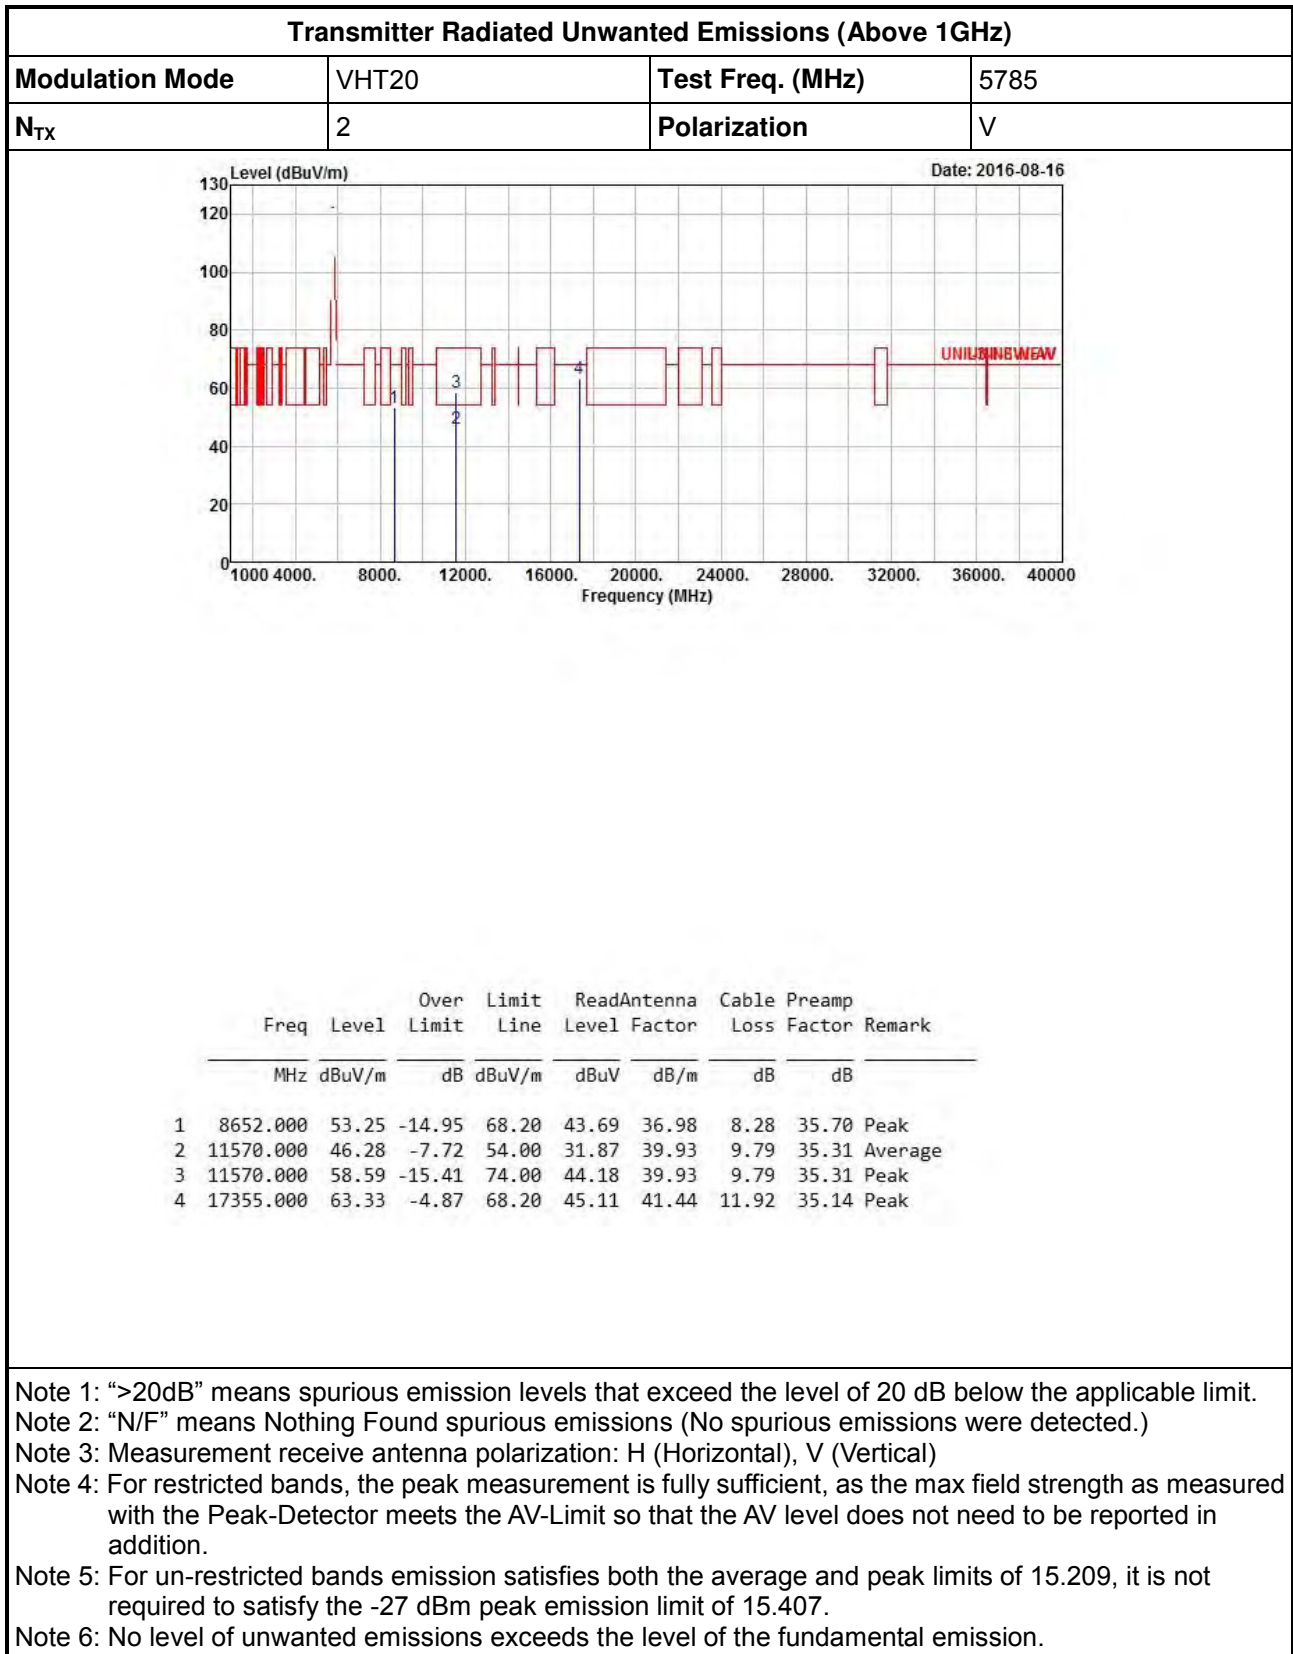


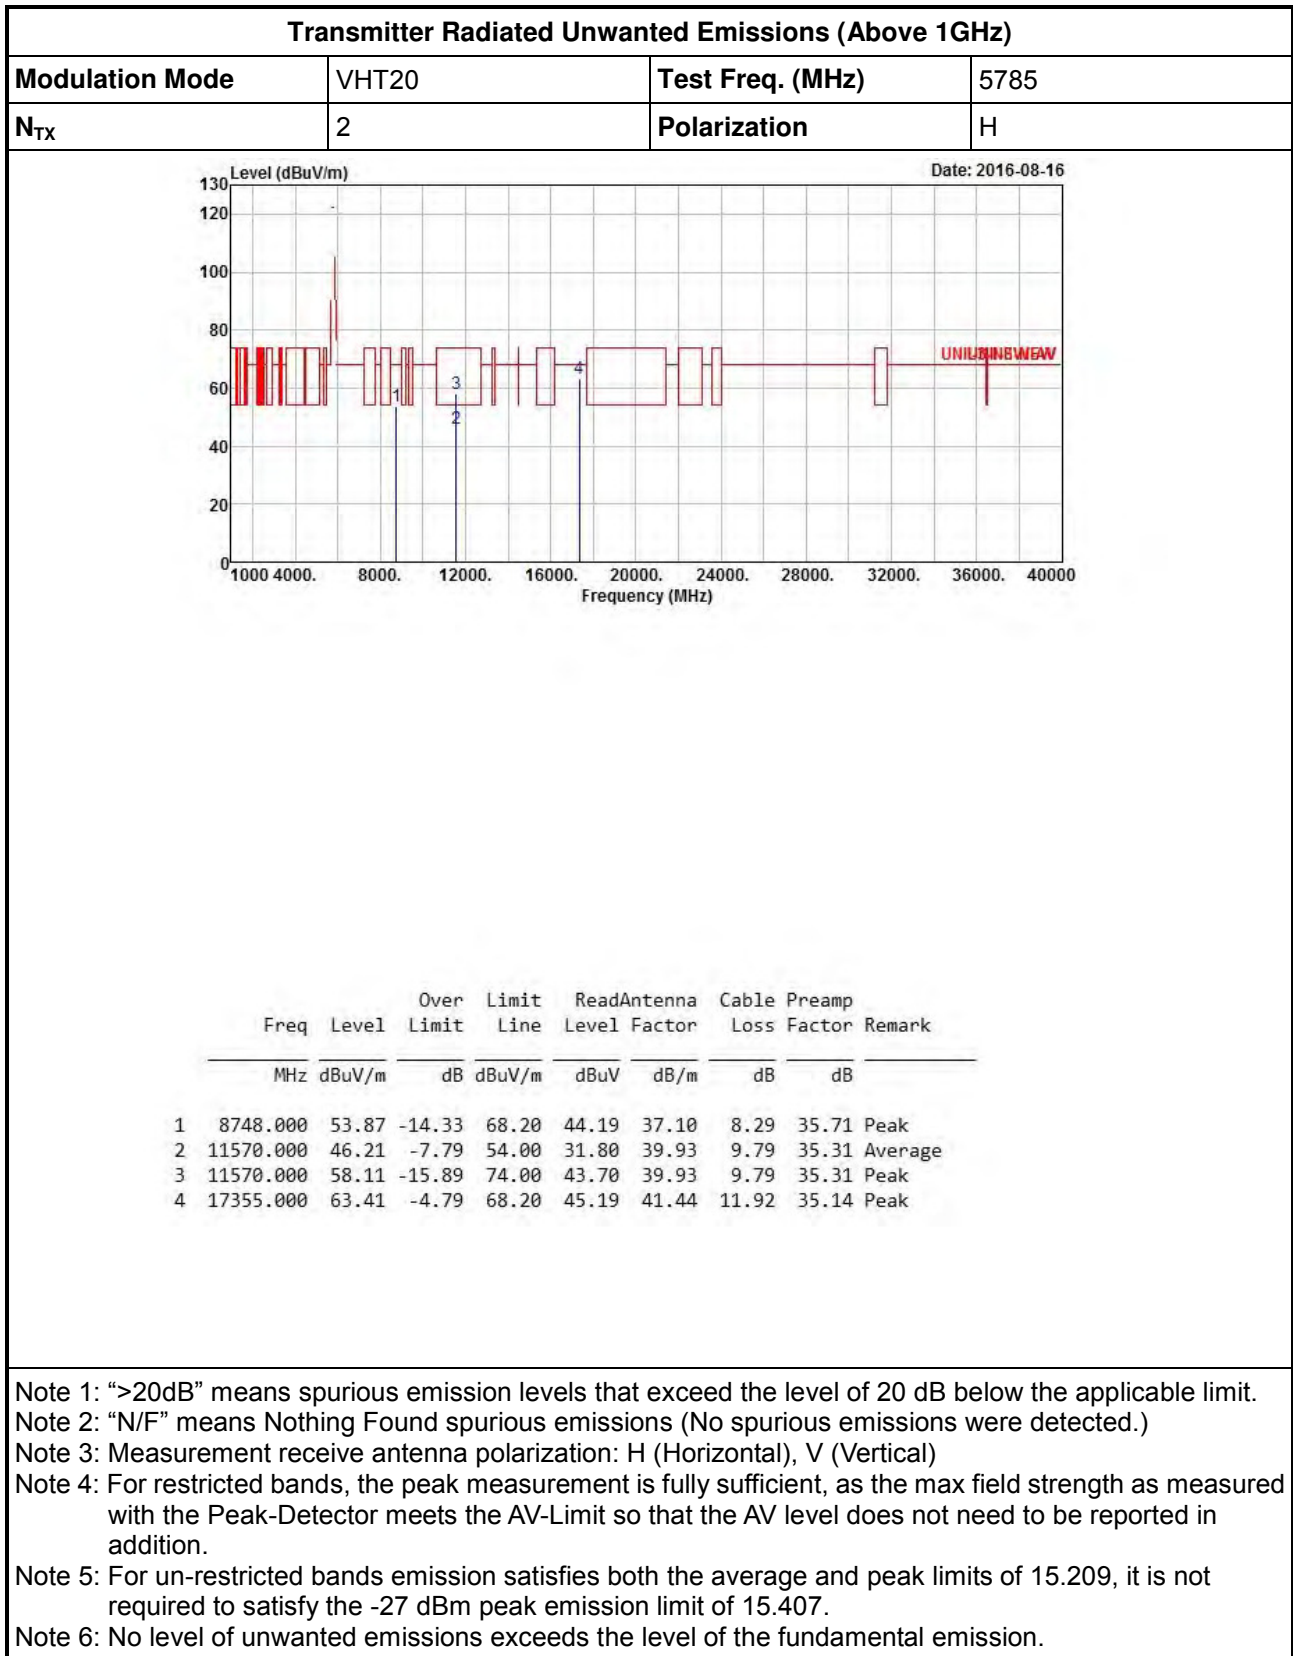


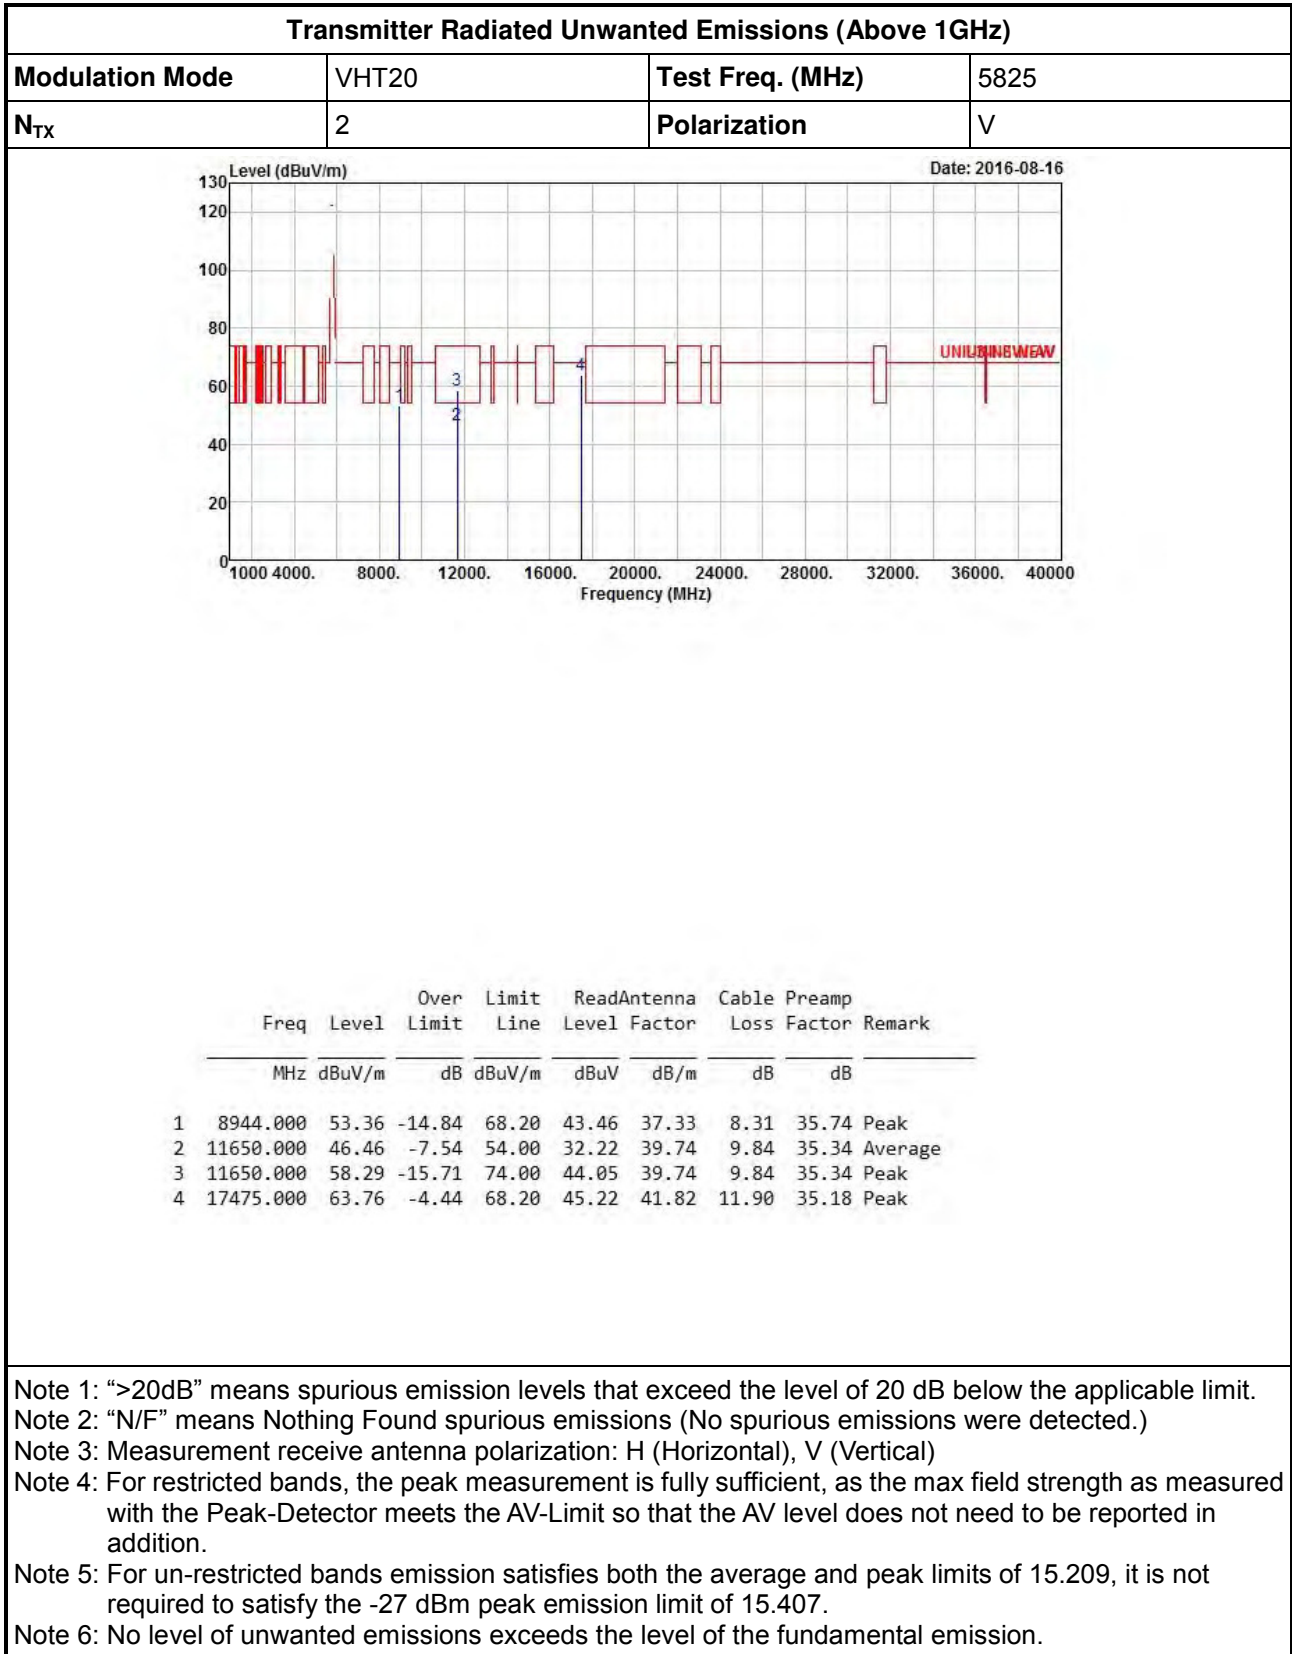


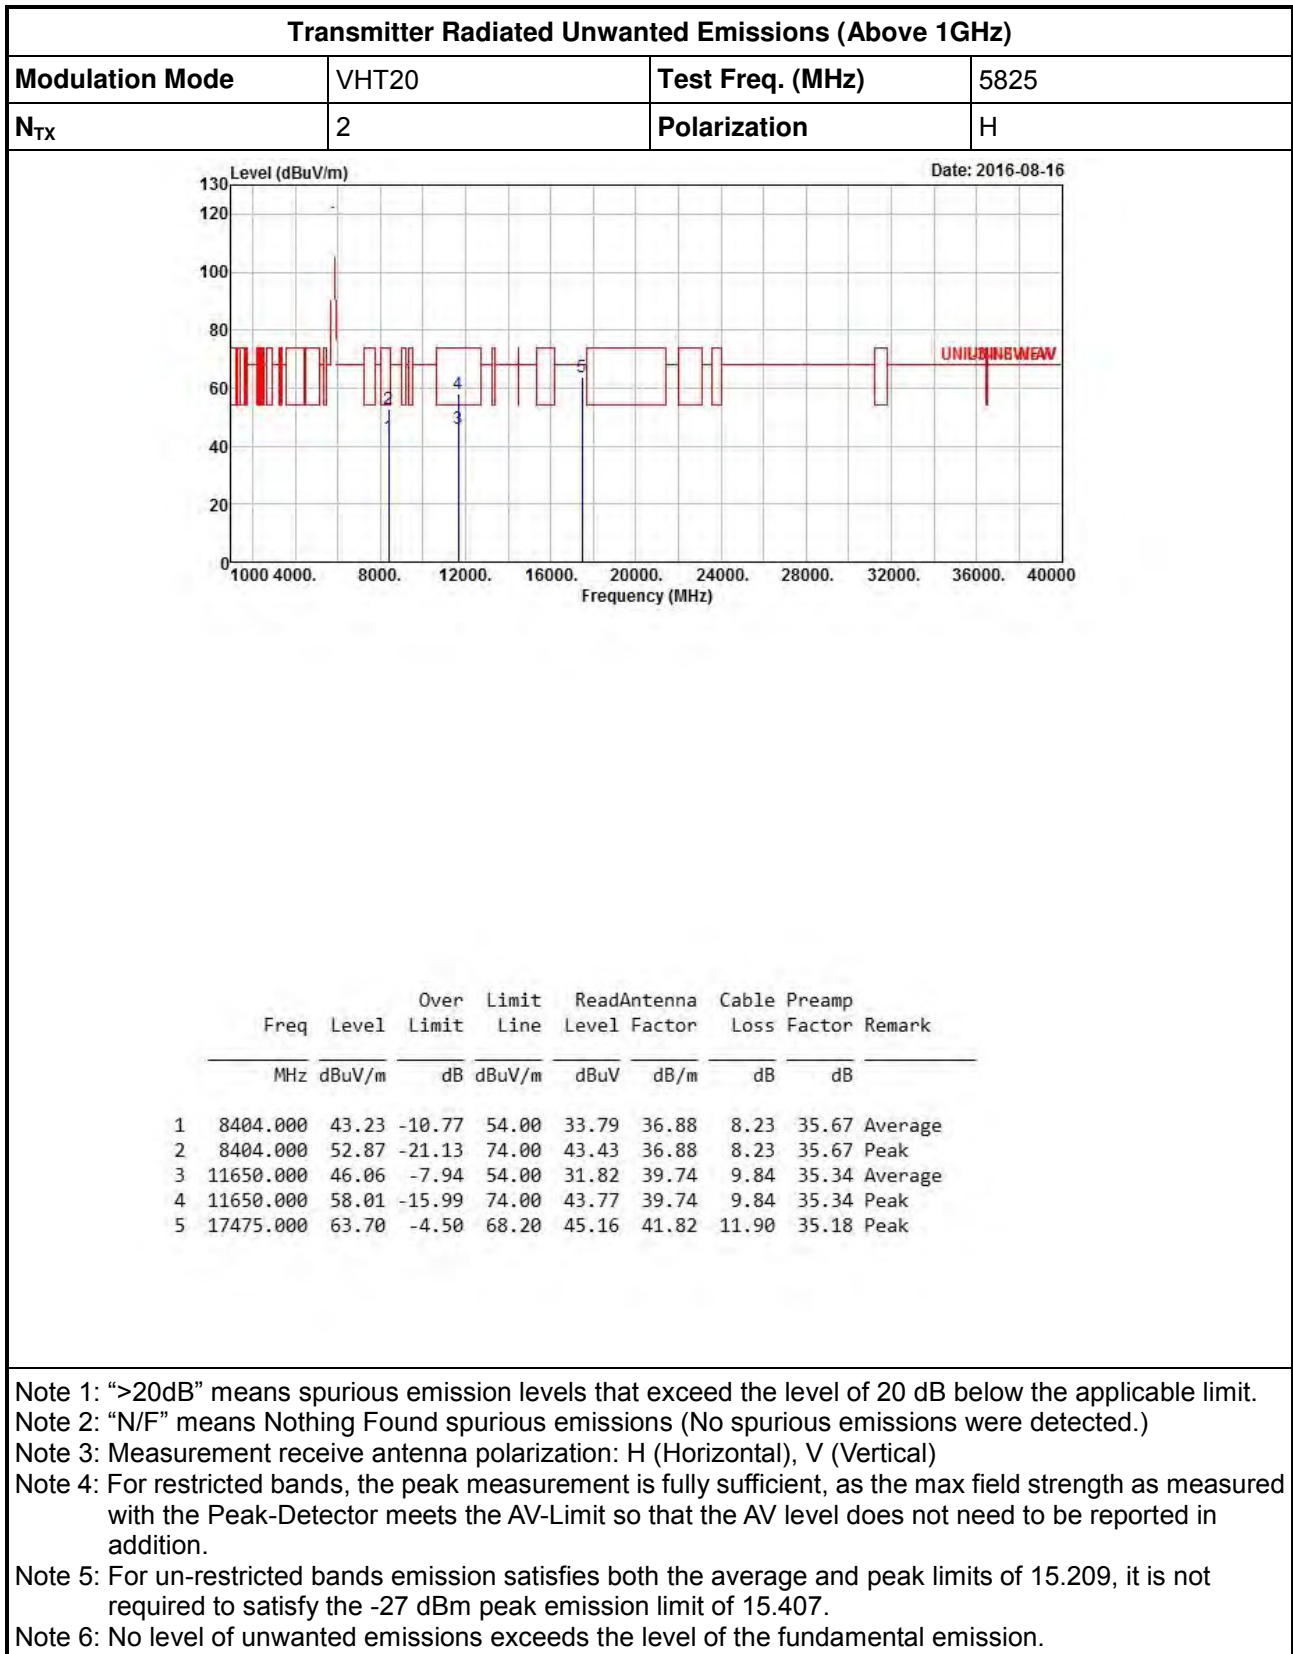


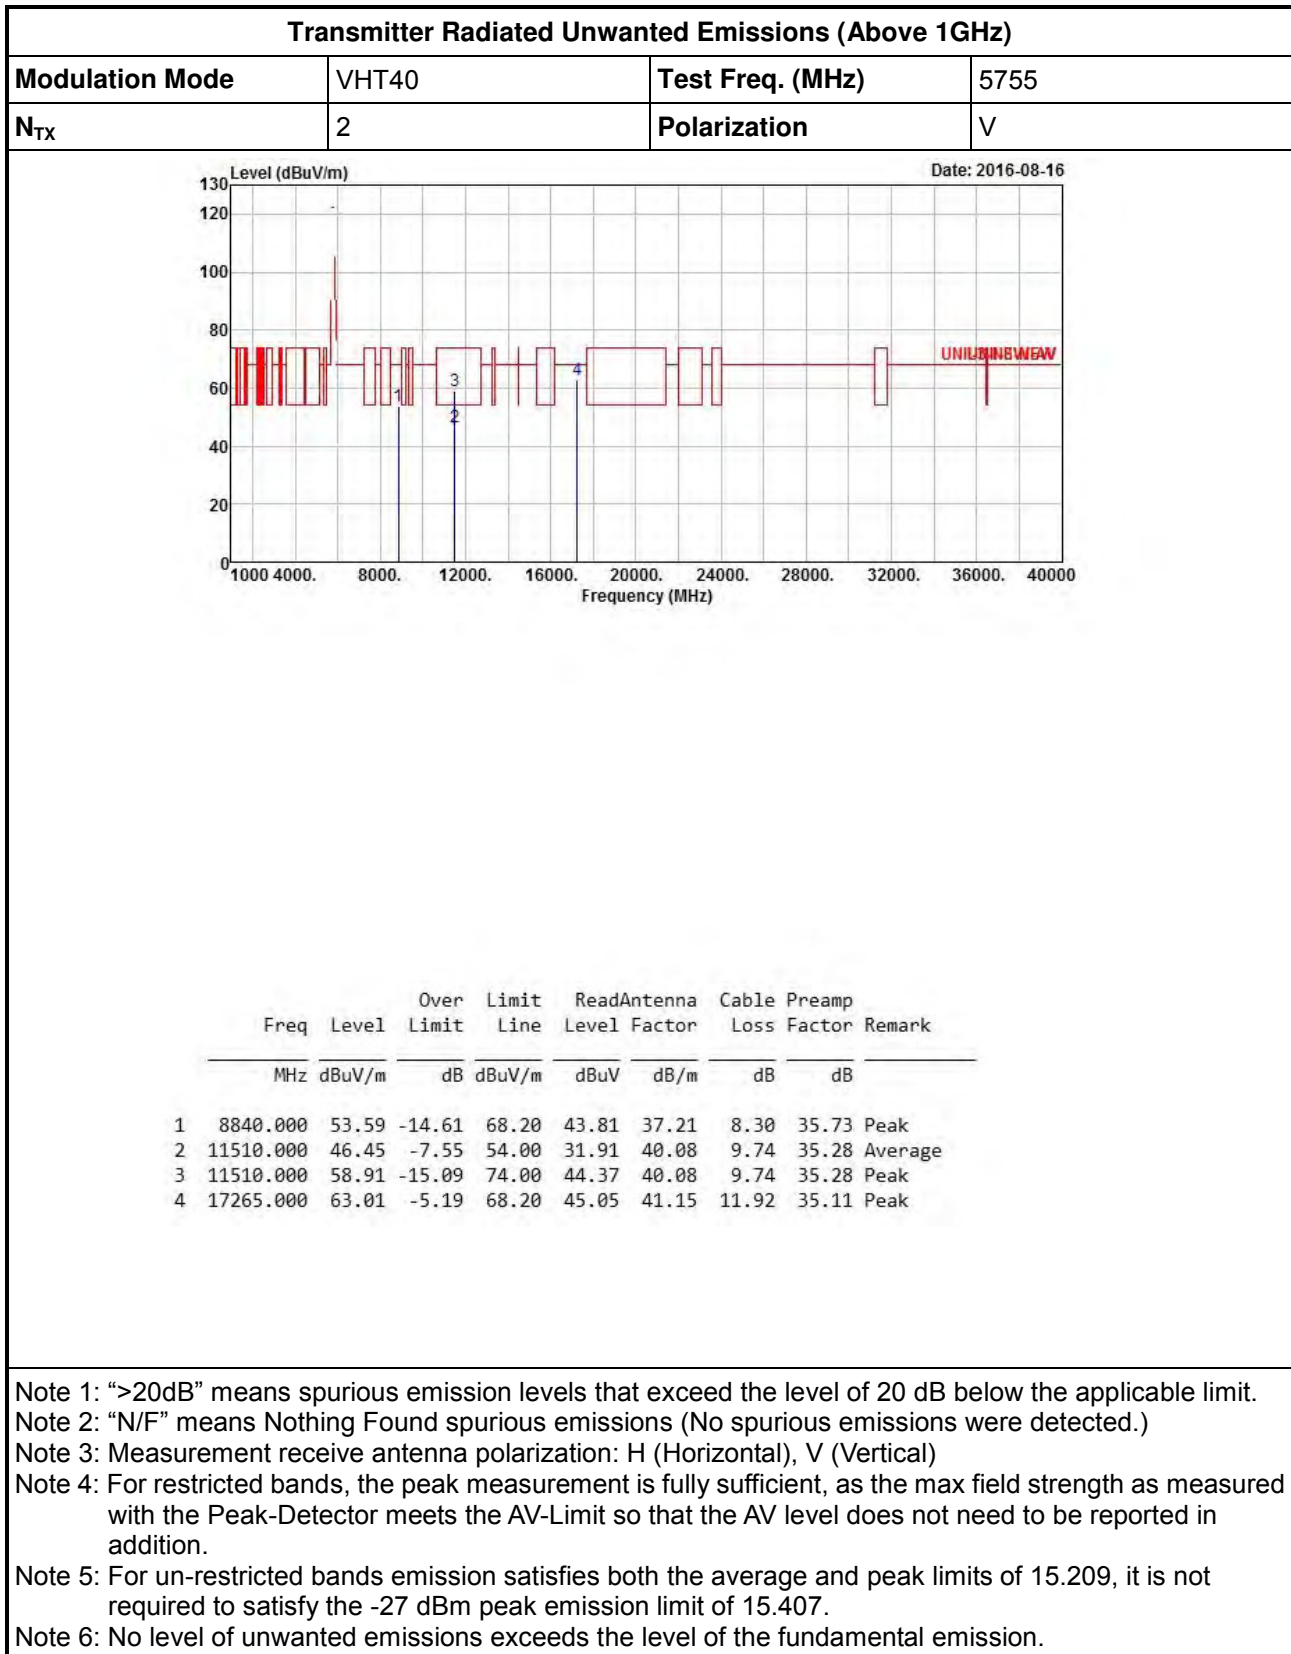

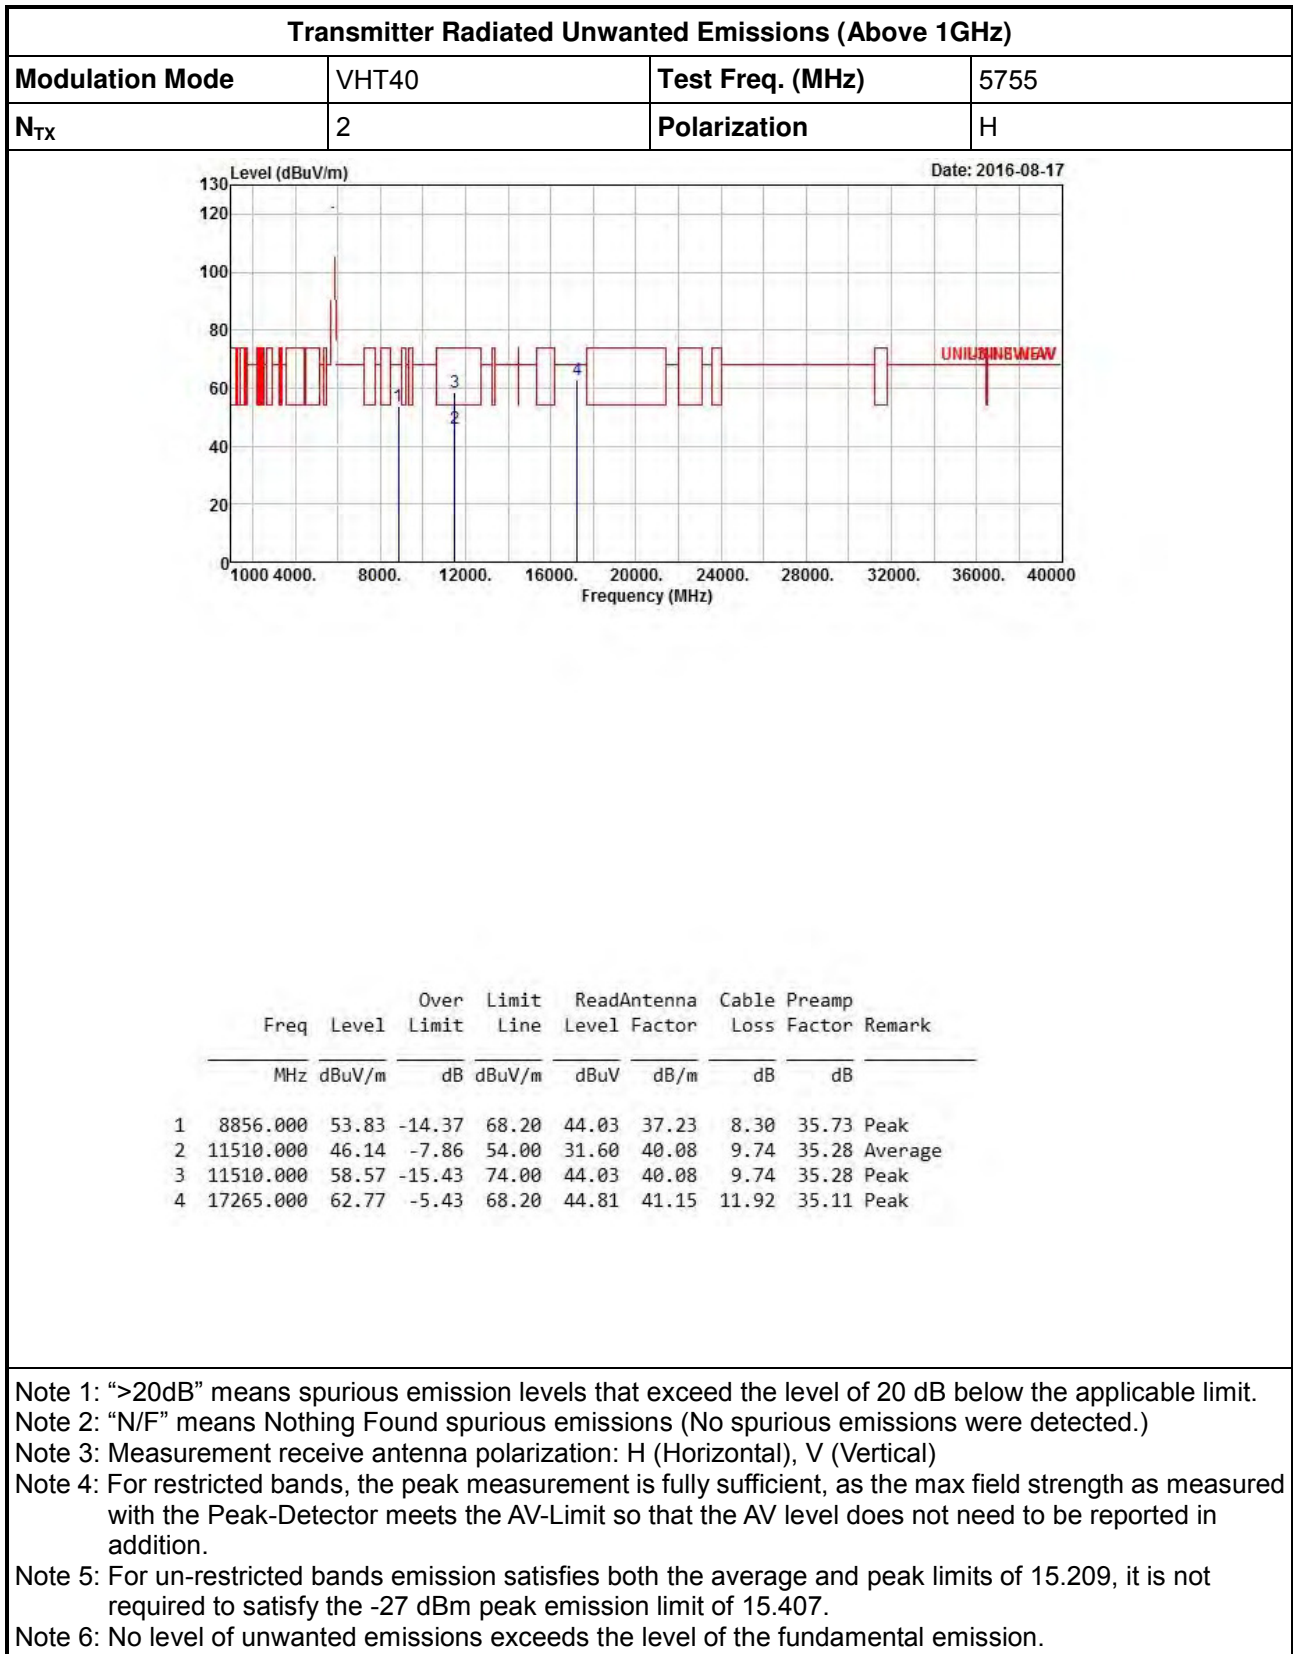

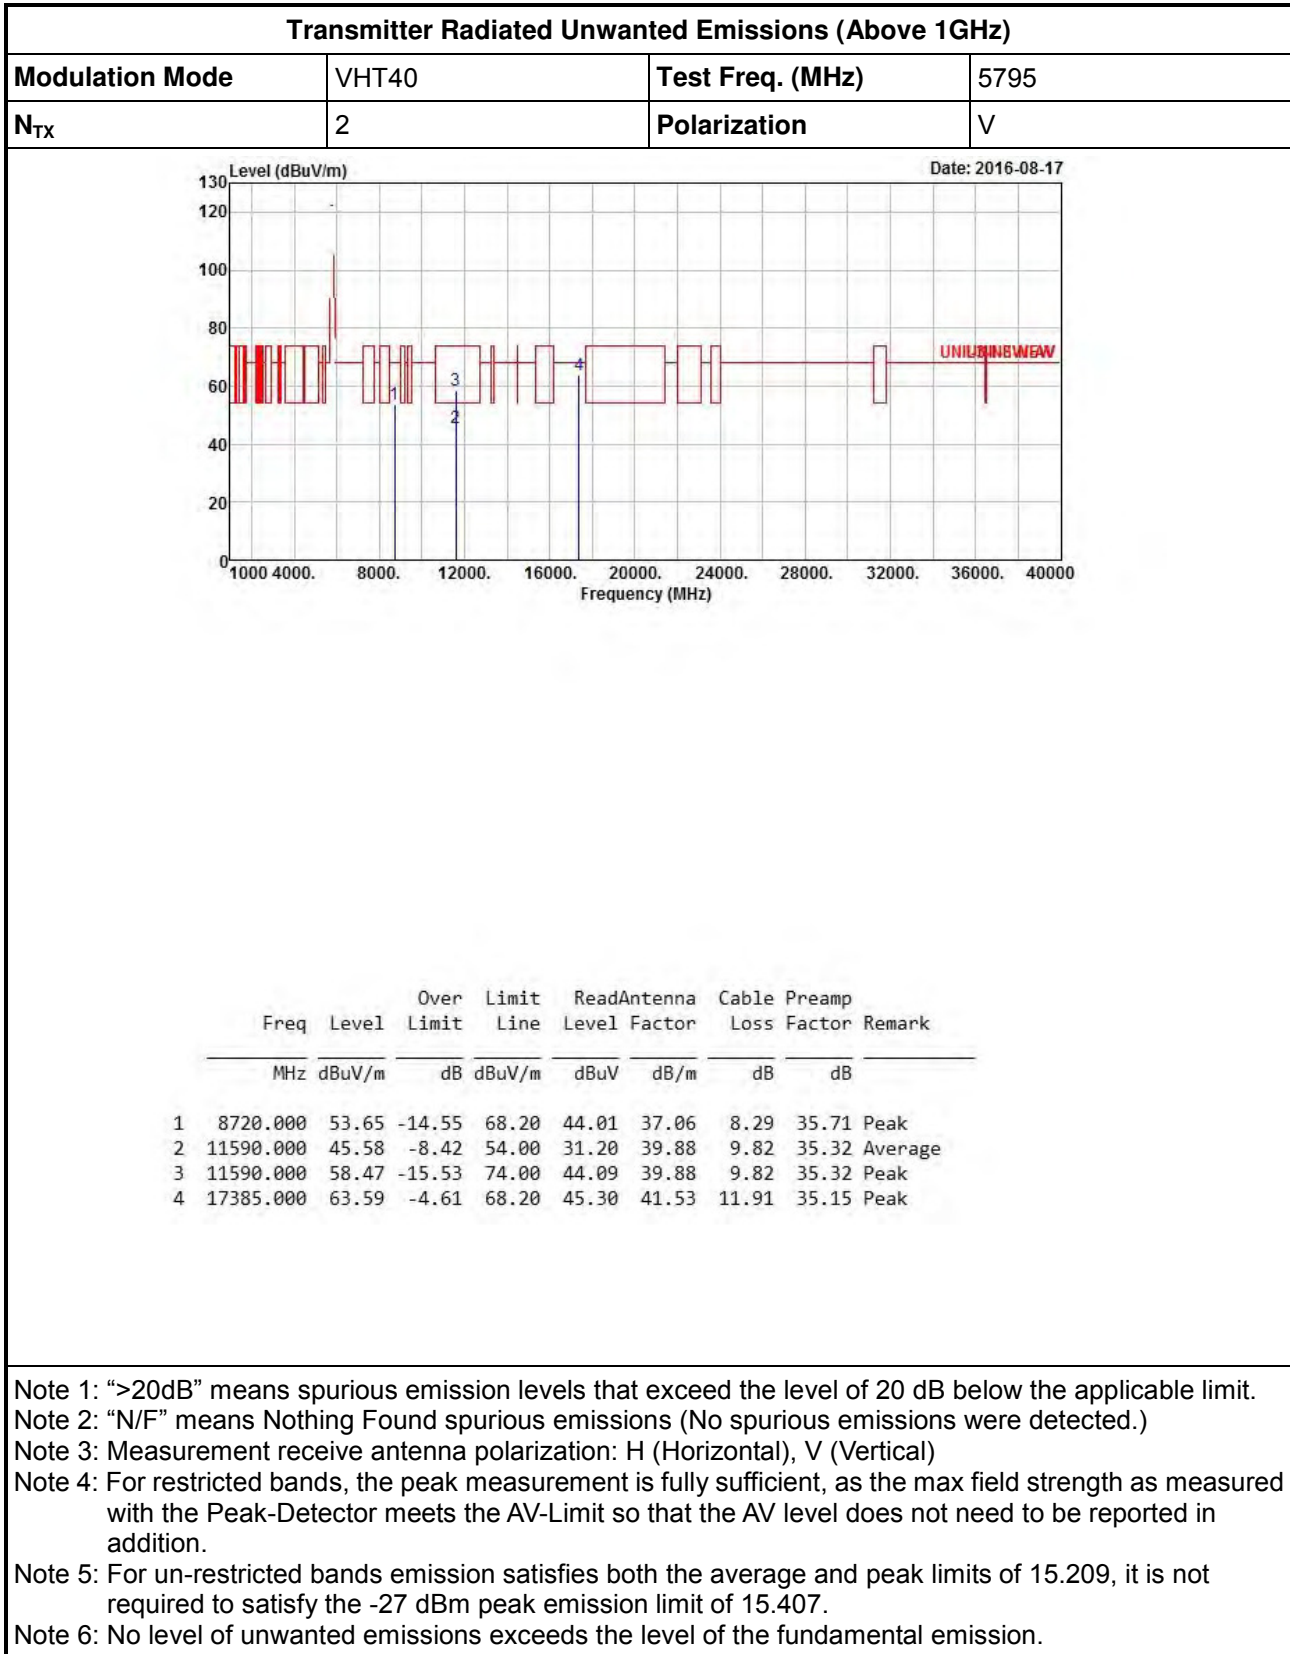

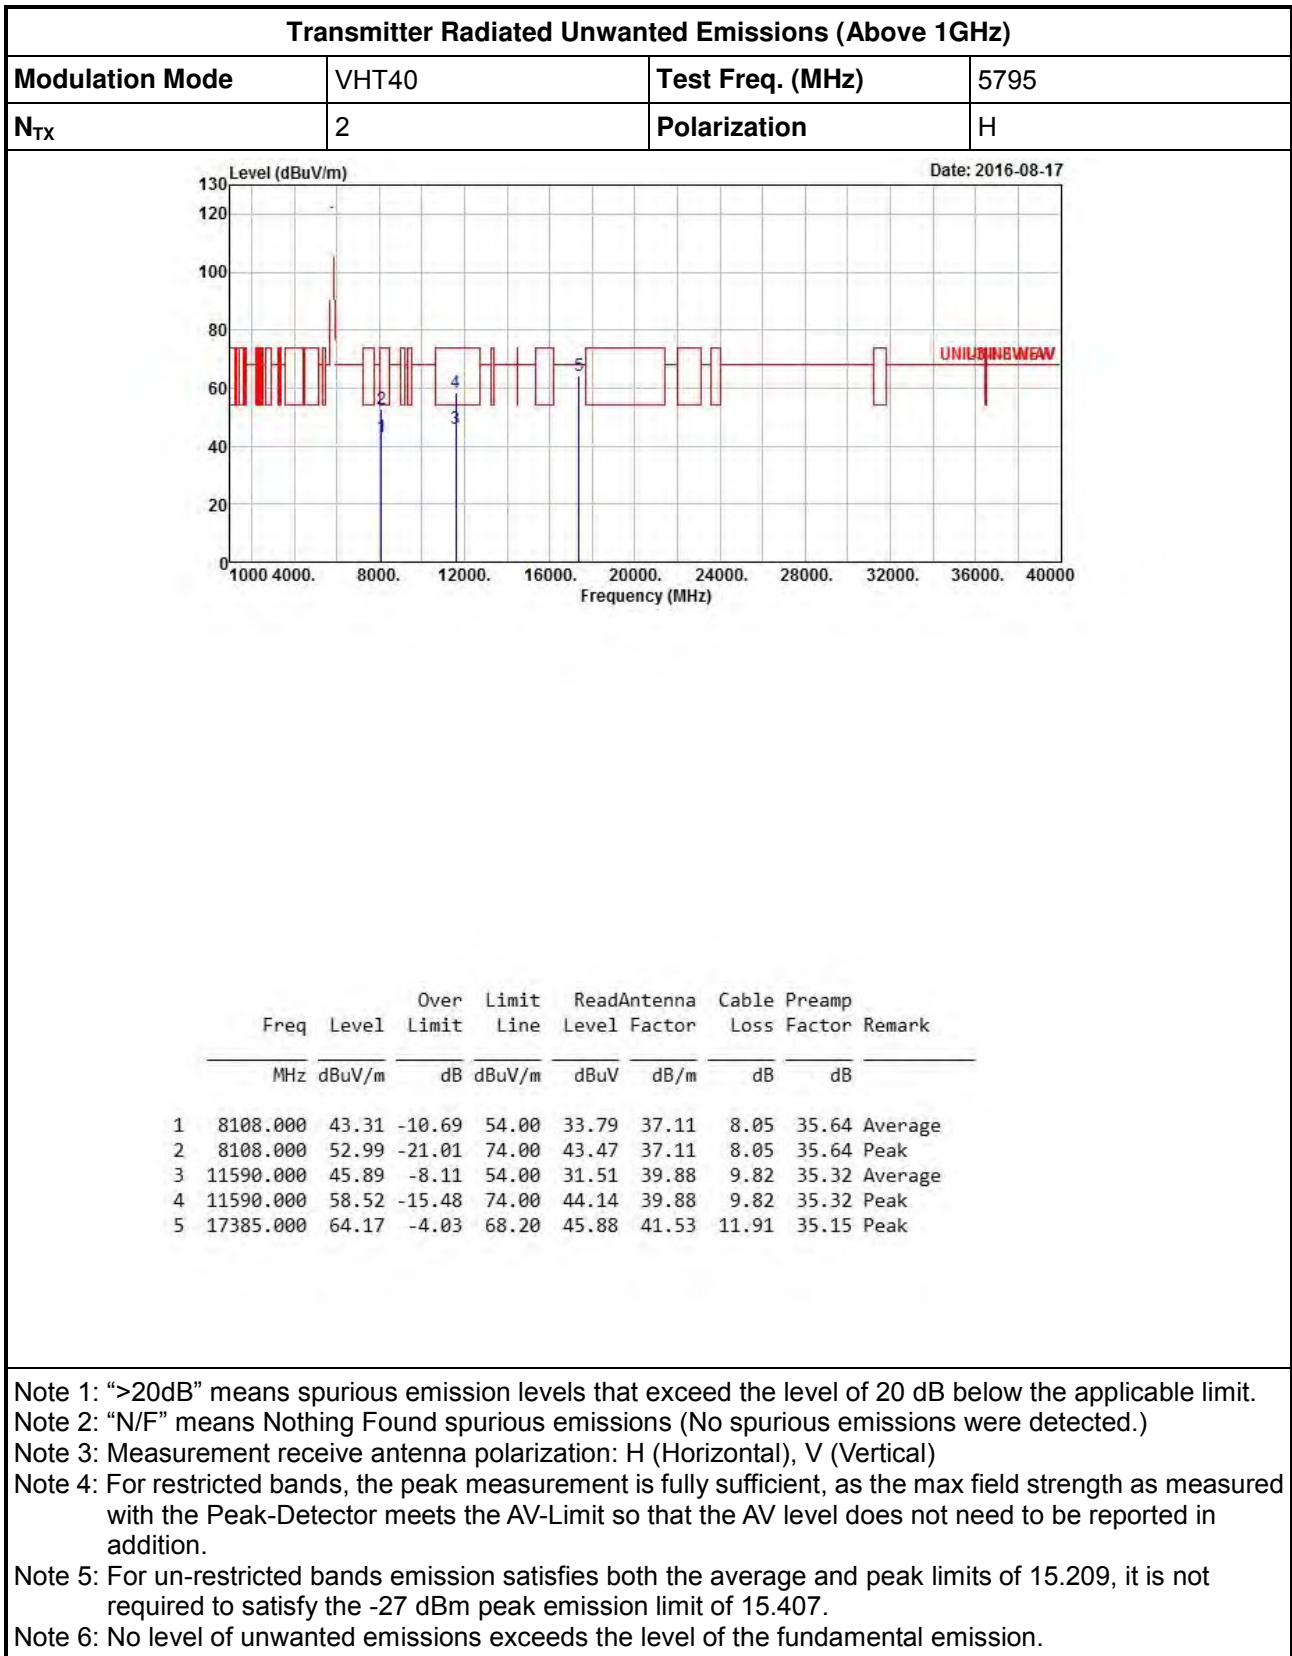


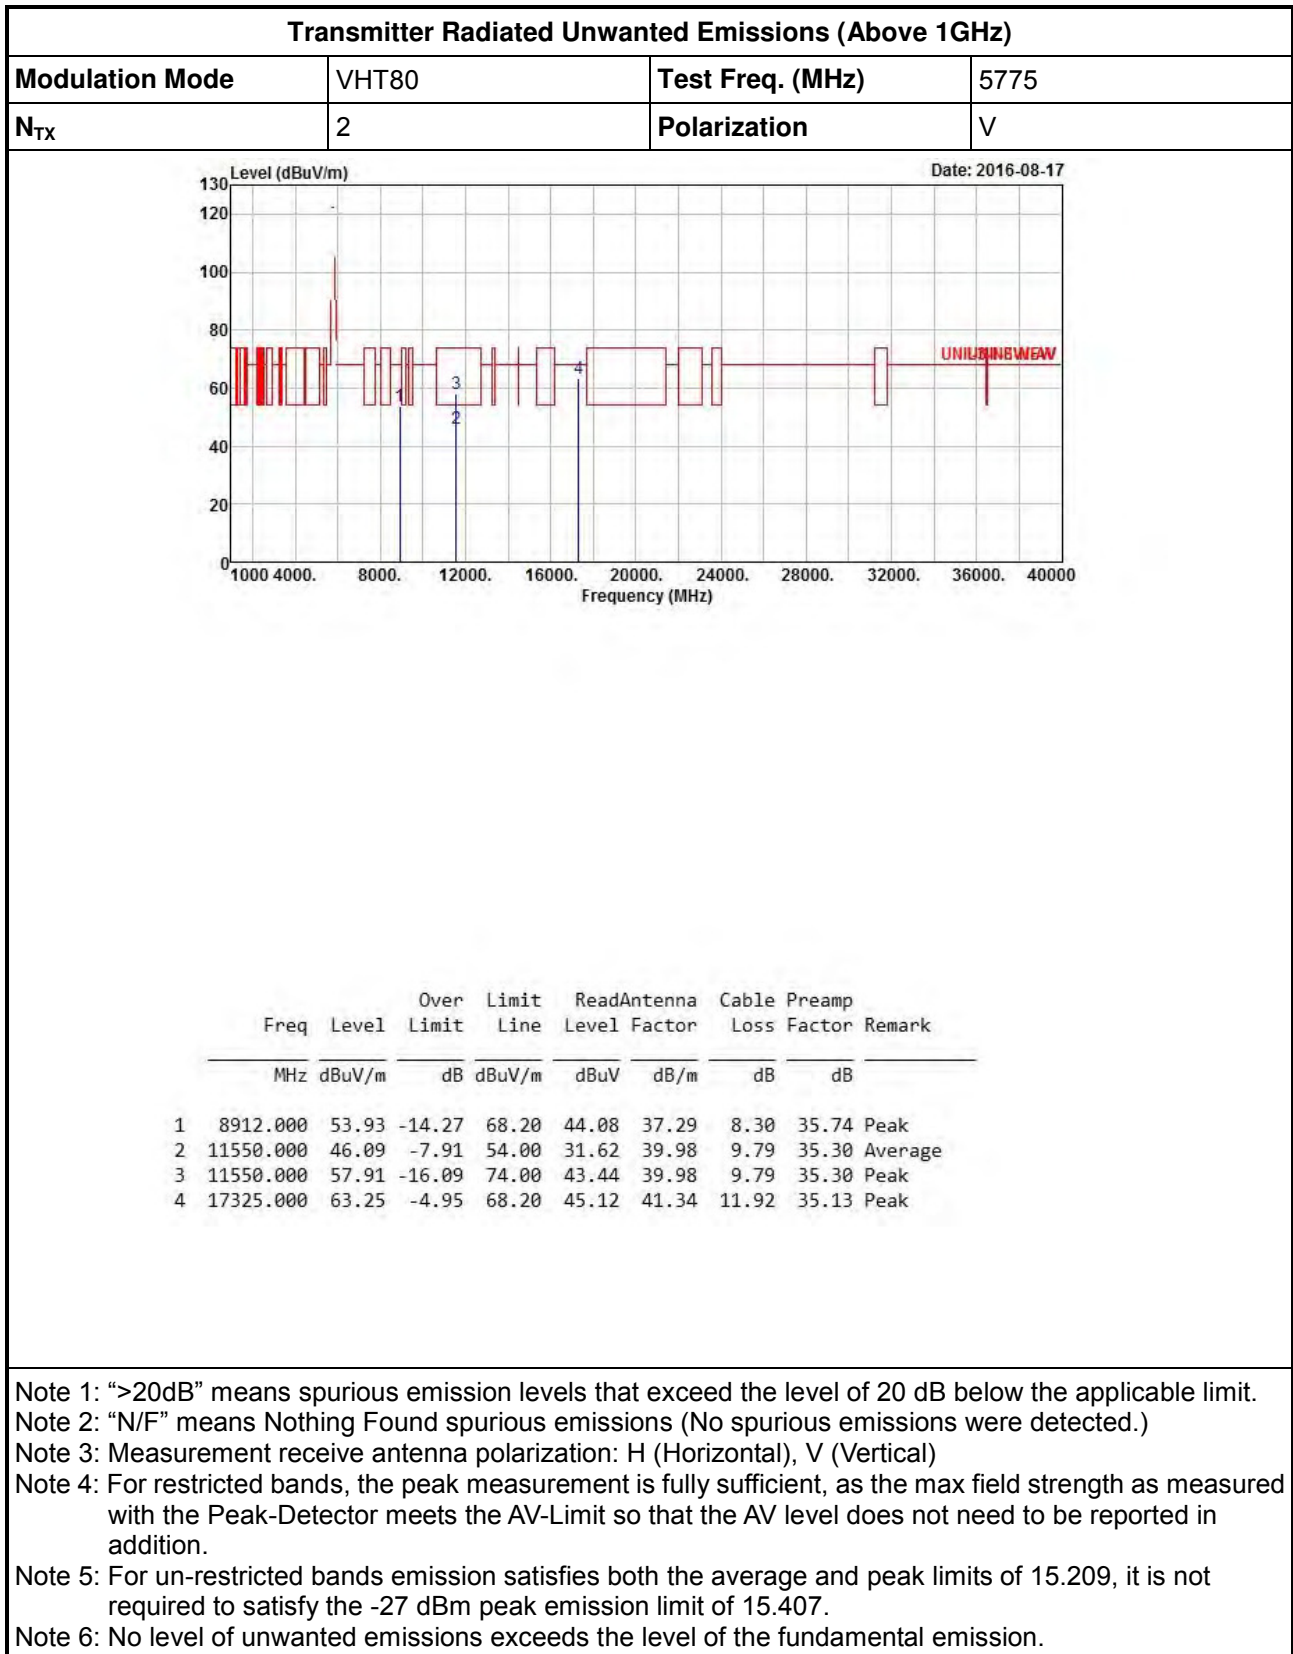



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5775
N _{TX}	2	Polarization	H

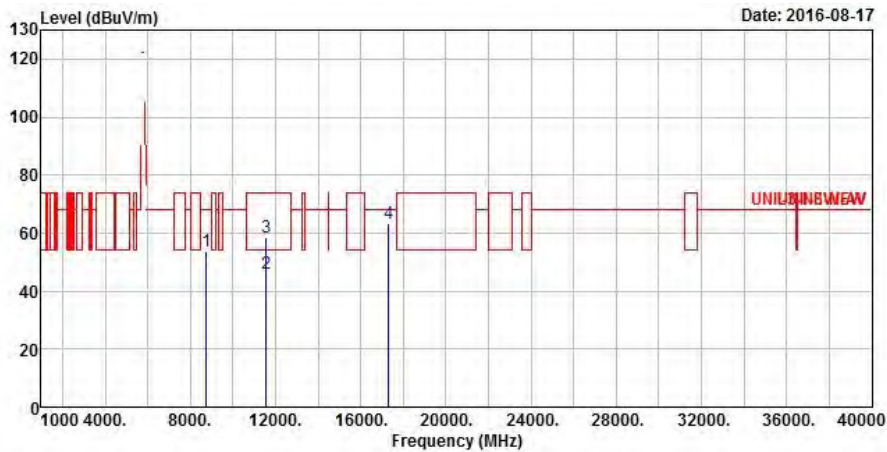

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8768.000	53.69	-14.51	68.20	44.00	37.12	8.29	35.72	Peak
2	11550.000	45.85	-8.15	54.00	31.38	39.98	9.79	35.30	Average
3	11550.000	58.36	-15.64	74.00	43.89	39.98	9.79	35.30	Peak
4	17325.000	63.21	-4.99	68.20	45.08	41.34	11.92	35.13	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Summary

Mode	Result	Ch (Hz)	Center (Hz)	F1 (Hz)	Fh (Hz)	ppm	Limit (ppm)	Port	Remark
5.2G;11a;20;1;2;5200;M;T35,VN	Pass	5.2G	5.19990151G	NaN	NaN	18.941	20	1	0 min



Result

Mode	Result	Ch (Hz)	Center (Hz)	Fl (Hz)	Fh (Hz)	ppm	Limit (ppm)	Port	Remark
5.2G;11a;20;1;2;5200;M;TN,VL	Pass	5.2G	5.19995954G	NaN	NaN	7.781	20	1	0 min
5.2G;11a;20;1;2;5200;M;TN,VL	Pass	5.2G	5.19996337G	NaN	NaN	7.044	20	1	2 min
5.2G;11a;20;1;2;5200;M;TN,VL	Pass	5.2G	5.19996338G	NaN	NaN	7.043	20	1	5 min
5.2G;11a;20;1;2;5200;M;TN,VL	Pass	5.2G	5.19995951G	NaN	NaN	7.787	20	1	10 min
5.2G;11a;20;1;2;5200;M;TN,VH	Pass	5.2G	5.19995957G	NaN	NaN	7.776	20	1	0 min
5.2G;11a;20;1;2;5200;M;TN,VH	Pass	5.2G	5.19995956G	NaN	NaN	7.776	20	1	2 min
5.2G;11a;20;1;2;5200;M;TN,VH	Pass	5.2G	5.19995725G	NaN	NaN	8.221	20	1	5 min
5.2G;11a;20;1;2;5200;M;TN,VH	Pass	5.2G	5.19995958G	NaN	NaN	7.773	20	1	10 min
5.2G;11a;20;1;2;5200;M;T35,VN	Pass	5.2G	5.19990151G	NaN	NaN	18.941	20	1	0 min
5.2G;11a;20;1;2;5200;M;T35,VN	Pass	5.2G	5.19990171G	NaN	NaN	18.903	20	1	2 min
5.2G;11a;20;1;2;5200;M;T35,VN	Pass	5.2G	5.19990172G	NaN	NaN	18.901	20	1	5 min
5.2G;11a;20;1;2;5200;M;T35,VN	Pass	5.2G	5.19990175G	NaN	NaN	18.894	20	1	10 min
5.2G;11a;20;1;2;5200;M;T30,VN	Pass	5.2G	5.19994589G	NaN	NaN	10.406	20	1	0 min
5.2G;11a;20;1;2;5200;M;T30,VN	Pass	5.2G	5.19994592G	NaN	NaN	10.4	20	1	2 min
5.2G;11a;20;1;2;5200;M;T30,VN	Pass	5.2G	5.19994586G	NaN	NaN	10.412	20	1	5 min
5.2G;11a;20;1;2;5200;M;T30,VN	Pass	5.2G	5.19992497G	NaN	NaN	14.429	20	1	10 min
5.2G;11a;20;1;2;5200;M;T20,VN	Pass	5.2G	5.19995975G	NaN	NaN	7.74	20	1	0 min
5.2G;11a;20;1;2;5200;M;T20,VN	Pass	5.2G	5.19996361G	NaN	NaN	6.999	20	1	2 min
5.2G;11a;20;1;2;5200;M;T20,VN	Pass	5.2G	5.19995975G	NaN	NaN	7.74	20	1	5 min
5.2G;11a;20;1;2;5200;M;T20,VN	Pass	5.2G	5.1999636G	NaN	NaN	7	20	1	10 min
5.2G;11a;20;1;2;5200;M;T10,VN	Pass	5.2G	5.19996746G	NaN	NaN	6.257	20	1	0 min
5.2G;11a;20;1;2;5200;M;T10,VN	Pass	5.2G	5.19997242G	NaN	NaN	5.303	20	1	2 min
5.2G;11a;20;1;2;5200;M;T10,VN	Pass	5.2G	5.19996745G	NaN	NaN	6.259	20	1	5 min
5.2G;11a;20;1;2;5200;M;T10,VN	Pass	5.2G	5.19997267G	NaN	NaN	5.256	20	1	10 min
5.2G;11a;20;1;2;5200;M;T5,VN	Pass	5.2G	5.19996816G	NaN	NaN	6.123	20	1	0 min
5.2G;11a;20;1;2;5200;M;T5,VN	Pass	5.2G	5.19996815G	NaN	NaN	6.125	20	1	2 min
5.2G;11a;20;1;2;5200;M;T5,VN	Pass	5.2G	5.19996817G	NaN	NaN	6.122	20	1	5 min
5.2G;11a;20;1;2;5200;M;T5,VN	Pass	5.2G	5.19996825G	NaN	NaN	6.105	20	1	10 min