


# FCC Test Report

**Equipment** : LCD Signature Pad  
**Brand Name** : Wacom  
**Model No.** : STU-300B  
**FCC ID** : HV4STU300B  
**Standard** : 47 CFR FCC Part 15.209  
**Operating Band** : 531.25kHz~593.75kHz  
**FCC Classification** : DCD  
**Applicant** : Wacom Co., Ltd.  
2-510-1, Toyonodai, Kazo-shi, Saitama 349-1148 Japan  
**Manufacturer** : Wacom Co., Ltd.  
2-510-1 Toyonodai Kazo-shi, Saitama 349-1148 Japan

The product sample received on Apr. 13, 2016 and completely tested on Apr. 22, 2016. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

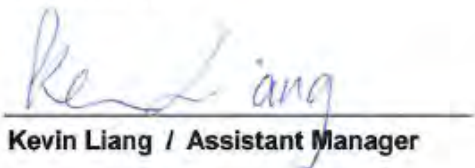  
Kevin Liang / Assistant Manager





# Table of Contents

- 1 GENERAL DESCRIPTION .....5**
- 1.1 Information.....5
- 1.2 Accessories and Support Equipment .....7
- 1.3 Testing Applied Standards .....7
- 1.4 Testing Location Information .....7
- 1.5 Measurement Uncertainty .....8
- 2 TEST CONFIGURATION OF EUT.....9**
- 2.1 The Worst Case Modulation Configuration .....9
- 2.2 Test Channel Frequencies Configuration.....9
- 2.3 The Worst Case Measurement Configuration .....9
- 2.4 Test Setup Diagram .....10
- 3 TRANSMITTER TEST RESULT .....11**
- 3.1 AC Power-line Conducted Emissions .....11
- 3.2 Transmitter Radiated Emissions .....15
- 3.3 Emission Bandwidth .....23
- 4 TEST EQUIPMENT AND CALIBRATION DATA.....25**

**APPENDIX A. TEST PHOTOS**

**APPENDIX B. PHOTOGRAPHS OF EUT**



### Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]:0.4933739MHz 36.39 (Margin 9.72dB) - AV 36.75 (Margin 19.36dB) - PK	FCC 15.207	Complied
3.2	15.209	Transmitter Radiated Emissions	[dBuV/m at 3m]:33.880MHz 52.16 (Margin 8.73dB) - QP	FCC 15.209	Complied
3.3	15.215(c)	Emission Bandwidth	99% Bandwidth 98.98 [kHz]	N/A	Complied





# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

RF General Information			
Frequency Range		531.25kHz~593.75kHz	
Modulation	Ch. Frequency (kHz)	Channel Number	Field Strength (dBuV/m)
Array Coil Pointing	531.25 / 562.5 / 593.75kHz	3	52.16

Note 1: Field strength performed peak level at 1m.

### 1.1.2 Antenna Information

Antenna Category	
<input type="checkbox"/>	Equipment placed on the market without antennas
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	External antenna (dedicated antennas)



1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input checked="" type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/>	Operated normally mode for worst duty cycle
<input checked="" type="checkbox"/>	Operated test mode for worst duty cycle
Test Signal Duty Cycle (x)	
<input checked="" type="checkbox"/>	100.00%

1.1.5 EUT Operational Condition

Supply Voltage	<input type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input type="checkbox"/> External DC adapter	<input checked="" type="checkbox"/> From System

## 1.2 Accessories and Support Equipment

Accessories Information				
USB Cable	Brand Name	Dongwei	Model Name	STJ-A355
	Signal Line	CABLE 2.0A/MINIUSB 3M, without ferrite core		
Stylus	Brand Name	Wacom	Model Name	UP-610-88A-1
LCD Panel	Brand Name	Unicorn	Model Name	MSGF014086-01

Support Equipment - AC Conduction and Radiated Emission			
No.	Equipment	Brand Name	Model Name
1	Notebook	DELL	E5540
2	AC Adapter for NB	DELL	LA65NS2-01

Support Equipment - RF Conducted			
No.	Equipment	Brand Name	Model Name
1	Notebook	DELL	E5540
2	AC Adapter for NB	DELL	HA65NM130

Support Equipment - Radiated Emission(9kHz~30MHz)			
No.	Equipment	Brand Name	Model Name
1	Notebook	DELL	E5540
2	AC Adapter for NB	DELL	LA65NS2-01

## 1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013

## 1.4 Testing Location Information

Testing Location			
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	
		TEL : 886-3-327-3456	FAX : 886-3-327-0973
Test Condition	Test Site No.	Test Engineer	Test Environment
AC Conduction	CO04-HY	Willy	23°C / 58%
RF Conducted	TH06-HY	Howard	25°C / 66%
Radiated Emission	03CH03-HY	Daniel	22.6°C / 55%

## 1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty		
Test Item		Uncertainty
AC power-line conducted emissions		±2.3 dB
Emission bandwidth, 26dB bandwidth		±0.5%
RF output power, conducted		±0.1 dB
Power density, conducted		±0.5 dB
Unwanted emissions, conducted	9 – 150 kHz	±0.4 dB
	0.15 – 30 MHz	±0.4 dB
	30 – 1000 MHz	±0.6 dB
	1 – 18 GHz	±0.5 dB
	18 – 40 GHz	±0.5 dB
	N/A	N/A
All emissions, radiated	9 – 150 kHz	±2.5 dB
	0.15 – 30 MHz	±2.3 dB
	30 – 1000 MHz	±2.6 dB
	1 – 18 GHz	±3.6 dB
	18 – 40 GHz	±3.8 dB
	N/A	N/A
Temperature		±0.8 °C
<b>Humidity</b>		±5 %
DC and low frequency voltages		±0.9%
Time		±1.4 %
Duty Cycle		±0.5 %



## 2 Test Configuration of EUT

### 2.1 The Worst Case Modulation Configuration




Modulation Mode	Field Strength (dBuV/m at 3m)
Array Coil Pointing	52.16

### 2.2 Test Channel Frequencies Configuration



Modulation Mode	Test Channel Frequencies (kHz)
Array Coil Pointing	562.5kHz

### 2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	EUT with Notebook via USB cable

The Worst Case Mode for Following Conformance Tests			
Tests Item	Emission Bandwidth, Field Strength of Fundamental Emissions Transmitter Radiated Unwanted Emissions		
Test Condition	Radiated measurement		
User Position	<input type="checkbox"/> EUT will be placed in fixed position.		
	<input checked="" type="checkbox"/> EUT will be placed in mobile position and operating multiple positions.		
	<input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed three orthogonal planes.		
Operating Mode	Operating Mode Description		
1	EUT with Notebook via USB Cable		
Modulation Mode	Array Coil Pointing		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT		V	

## 2.4 Test Setup Diagram

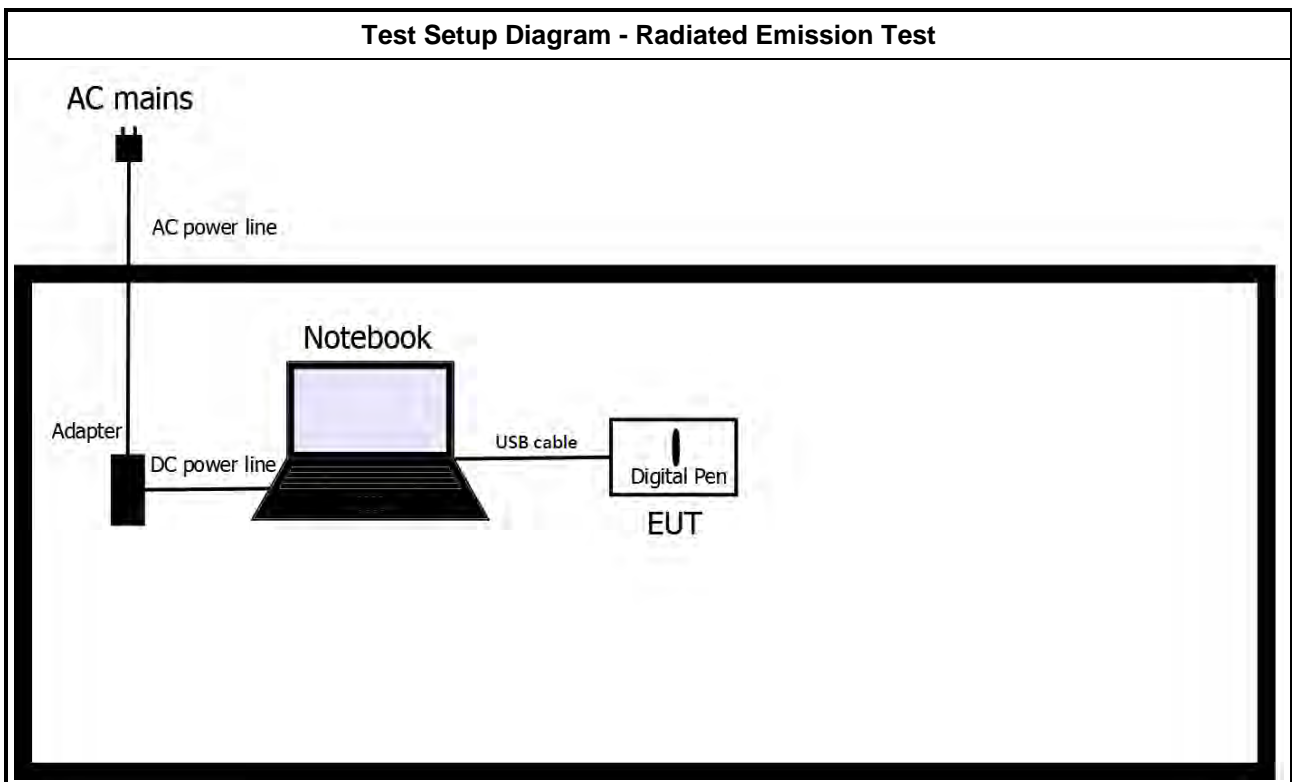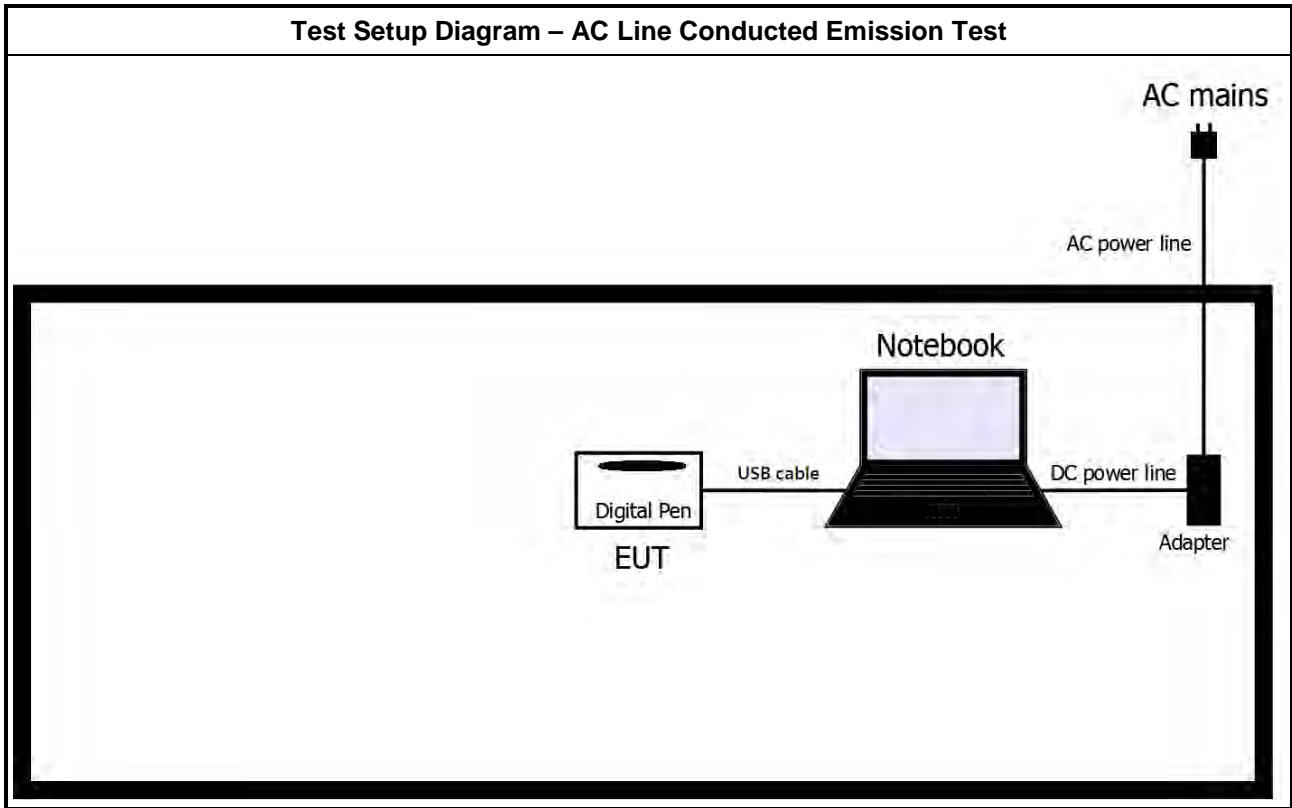

### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.
<input checked="" type="checkbox"/>	If AC conducted emissions fall in operating band, then following below test method confirm final result.
<input type="checkbox"/>	Accept measurements done with a suitable dummy load replacing the antenna under the following conditions: (1) Perform the AC line conducted tests with the antenna connected to determine compliance with FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load to determine compliance with FCC 15.207 limits within the transmitter's fundamental emission band.
<input checked="" type="checkbox"/>	For a device with a permanent antenna operating at or below 30 MHz, accept measurements done with a suitable dummy load, in lieu of the permanent antenna under the following conditions: (1) Perform the AC line conducted tests with the permanent antenna to determine compliance with the FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load in lieu of the permanent antenna to determine compliance with the FCC 15.207 limits within the transmitter's fundamental emission band.


### 3.1.4 Test Setup

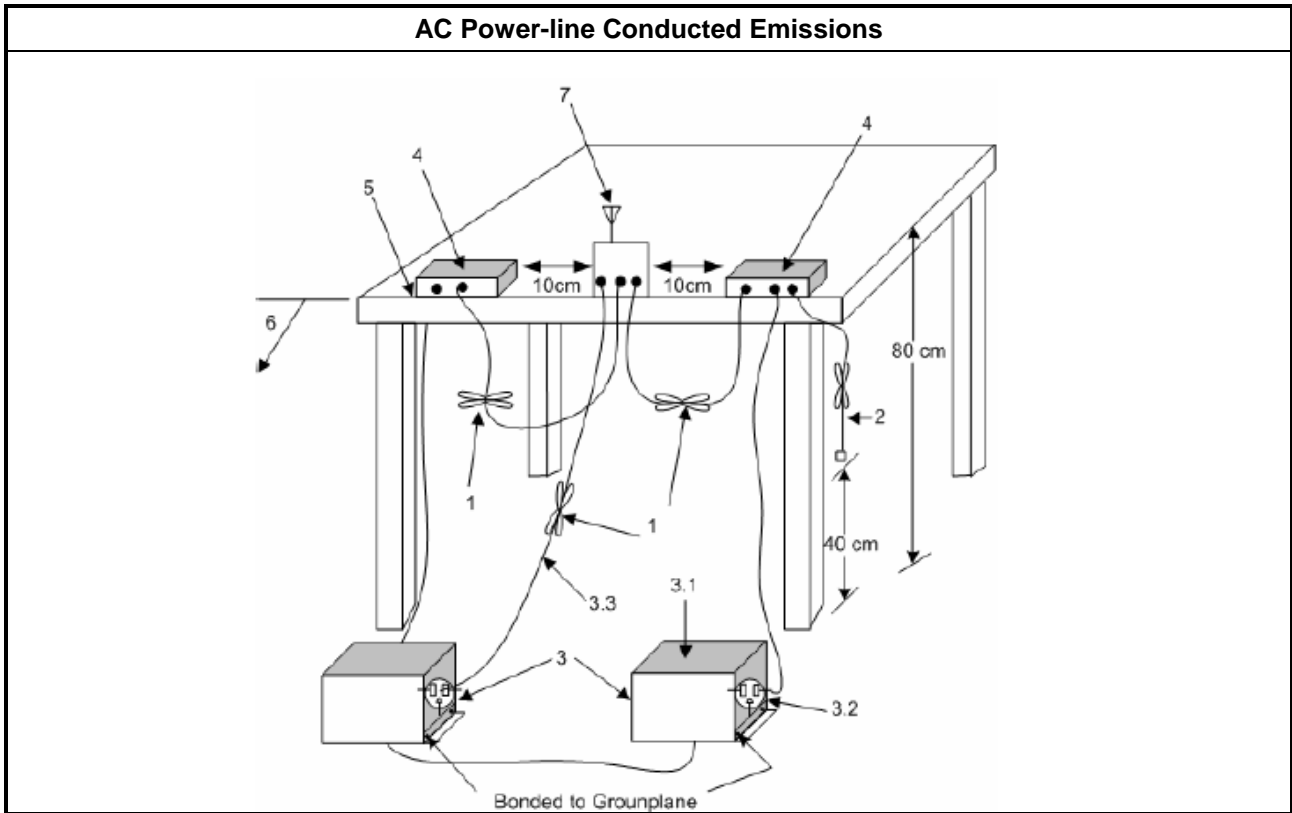



3.1.5 Test Result of DC Power-line Conducted Emissions

DC Power-line Conducted Emissions Result			
Operating Mode	1	Power Phase	Neutral
Ch. Frequency (kHz)	562.5		

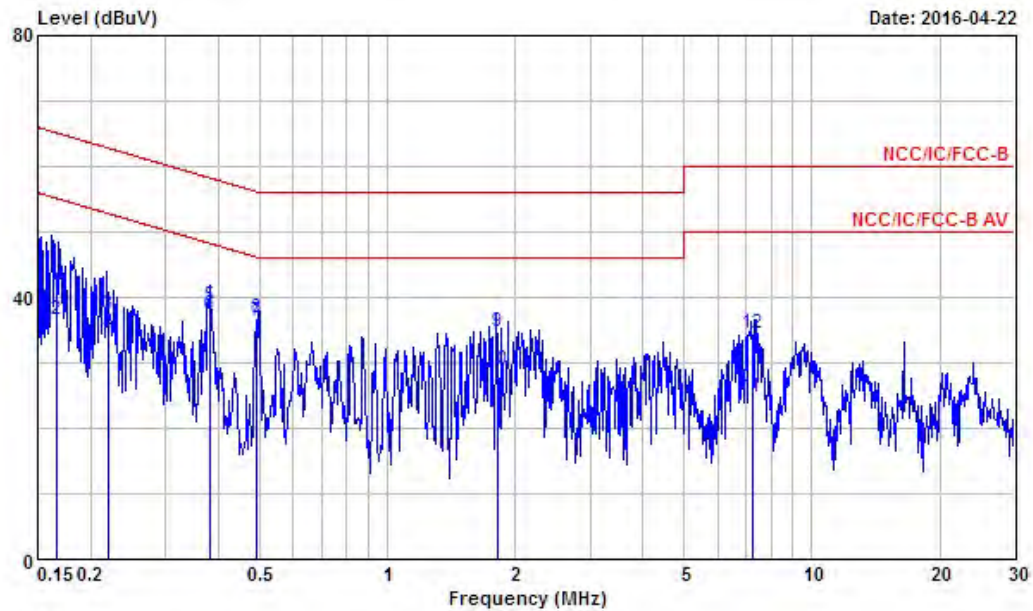


	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.1665500	40.76	-24.37	65.13	40.41	0.10	0.25	QP
2	0.1665500	36.52	-18.61	55.13	36.17	0.10	0.25	Average
3	0.2195070	37.29	-25.55	62.84	36.91	0.11	0.27	QP
4	0.2195070	34.42	-18.42	52.84	34.04	0.11	0.27	Average
5	0.3831540	38.58	-19.63	58.21	38.35	0.12	0.11	QP
6	0.3831540	37.31	-10.90	48.21	37.08	0.12	0.11	Average
7	0.4933730	36.39	-9.72	46.11	36.17	0.12	0.10	Average
8	0.4933730	36.75	-19.36	56.11	36.53	0.12	0.10	QP
9	1.810	34.68	-21.32	56.00	34.26	0.15	0.27	QP
10	1.810	28.98	-17.02	46.00	28.56	0.15	0.27	Average
11	7.223	24.82	-25.18	50.00	24.42	0.24	0.16	Average
12	7.223	34.57	-25.43	60.00	34.17	0.24	0.16	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)  
 Note 3: When emissions are in operating band over limits, retest with a dummy load for final in-band results.



**DC Power-line Conducted Emissions Result**

<b>Operating Mode</b>	1	<b>Power Phase</b>	Line
<b>Ch. Frequency (kHz)</b>	562.5		

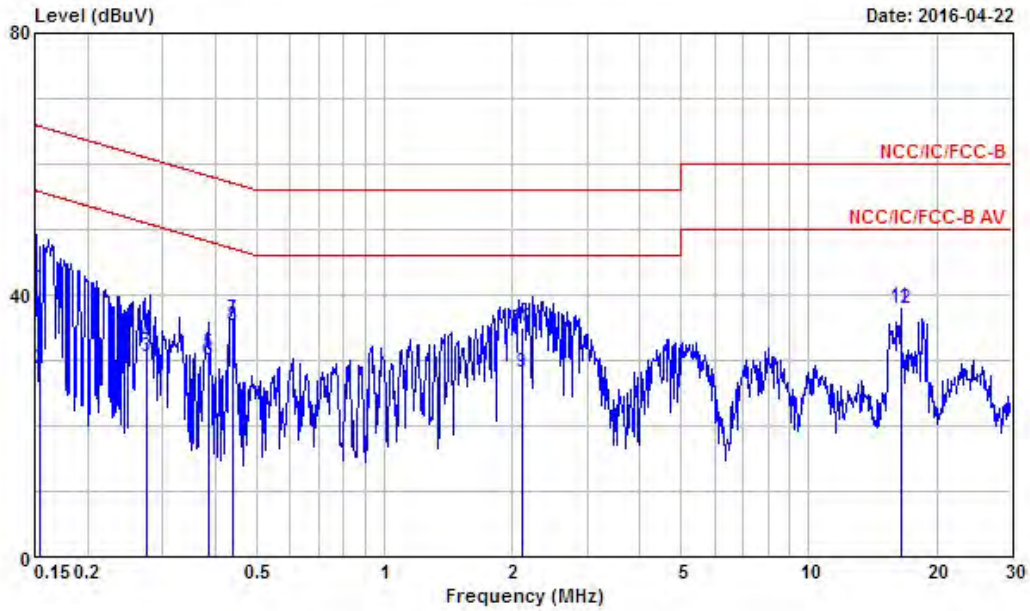

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1537970	41.10	-24.69	65.79	40.77	0.11	0.22	QP
2	0.1537970	28.62	-27.17	55.79	28.29	0.11	0.22	Average
3	0.2762930	30.43	-20.50	50.93	30.11	0.11	0.21	Average
4	0.2762930	32.52	-28.41	60.93	32.20	0.11	0.21	QP
5	0.3851900	31.02	-27.15	58.17	30.79	0.12	0.11	QP
6	0.3851900	29.97	-18.20	48.17	29.74	0.12	0.11	Average
7	0.4397440	36.35	-20.72	57.07	36.13	0.12	0.10	QP
8	0.4397440	35.30	-11.77	47.07	35.08	0.12	0.10	Average
9	2.120	28.11	-17.89	46.00	27.68	0.15	0.28	Average
10	2.120	35.09	-20.91	56.00	34.66	0.15	0.28	QP
11	16.465	38.29	-21.71	60.00	37.77	0.32	0.20	QP
12	16.465	37.91	-12.09	50.00	37.39	0.32	0.20	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)  
 Note 3: When emissions are in operating band over limits, retest with a dummy load for final in-band results.

### 3.2 Transmitter Radiated Emissions

#### 3.2.1 Transmitter Radiated Emissions Limit

Transmitter Radiated Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: the frequency bands 9-90 kHz, 110-490 kHz measurements employing an average detector and other below 1GHz measurements employing a CISPR quasi-peak detector.

#### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.






3.2.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz. The frequency bands 9-90 kHz, 110-490 kHz measurements employing an average detector and other below 30MHz measurements employing a CISPR quasi-peak detector. Test distance is 3m.
<input checked="" type="checkbox"/>	At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be following below methods.
<input type="checkbox"/>	The results shall be extrapolated to the specified distance by making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
<input checked="" type="checkbox"/>	The results shall be by using the square of an inverse linear distance extrapolation factor (40 dB/decade).
<input checked="" type="checkbox"/>	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.
<input checked="" type="checkbox"/>	The any unwanted emissions level shall not exceed the fundamental emission level.
<input checked="" type="checkbox"/>	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.




### 3.2.4 Test Setup

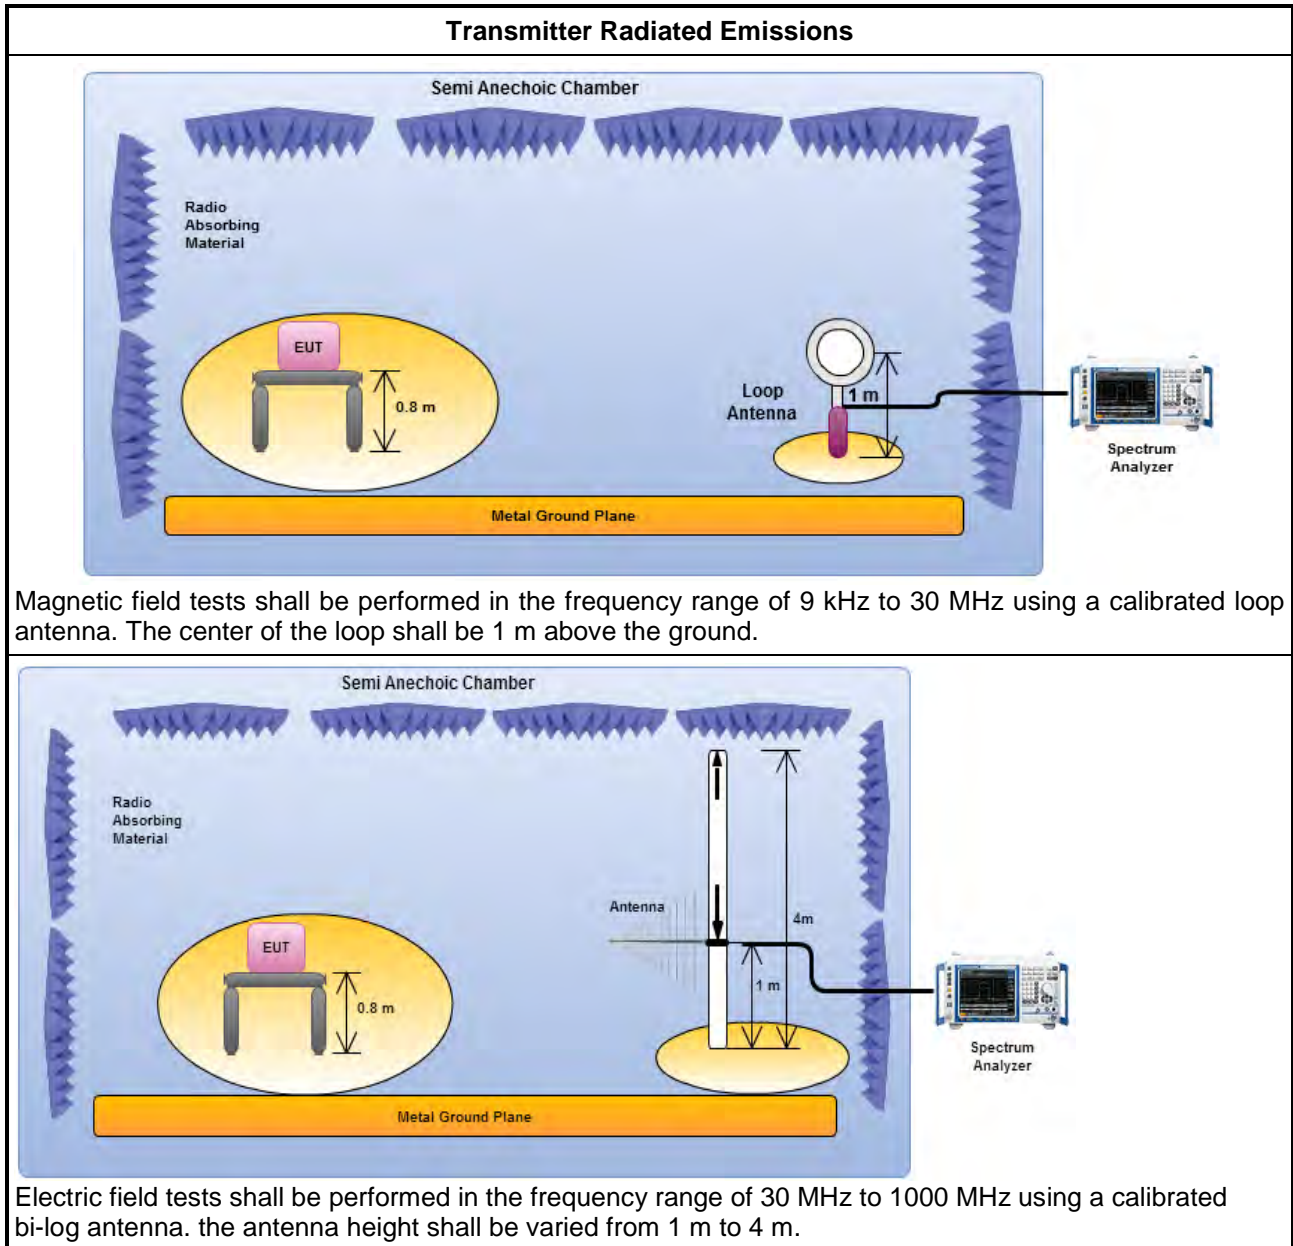



3.2.5 Transmitter Radiated Emissions (Below 30MHz)

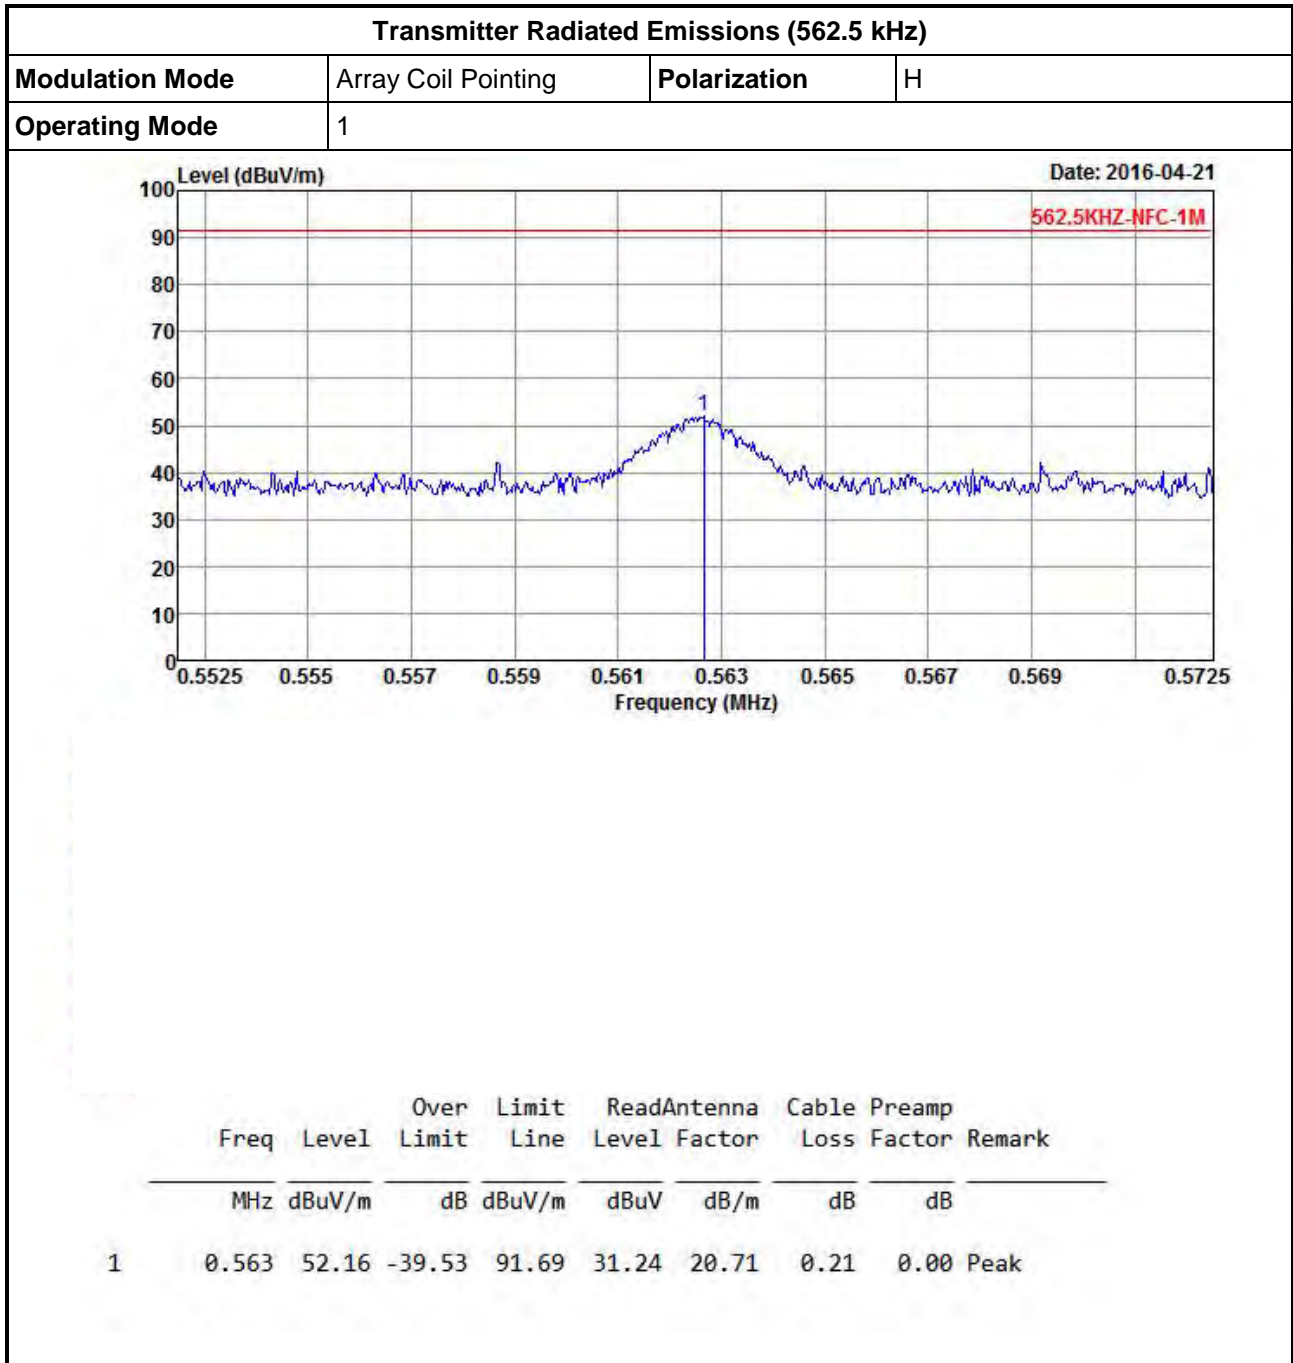


Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement worst emissions of receive antenna polarization: H (Horizontal).  
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.  
 Note 5: Except fundamental emission, other emissions from digital circuitry used to control additional panel functions or display capabilities other than the touch panel radio transmission. While disable touch panel radio transmission, other emissions have the same levels. Therefore other emissions level could be exceed the fundamental emission level.



Transmitter Radiated Emissions (9kHz~30MHz)

Modulation Mode	Array Coil Pointing	Polarization	H
Operating Mode	1		

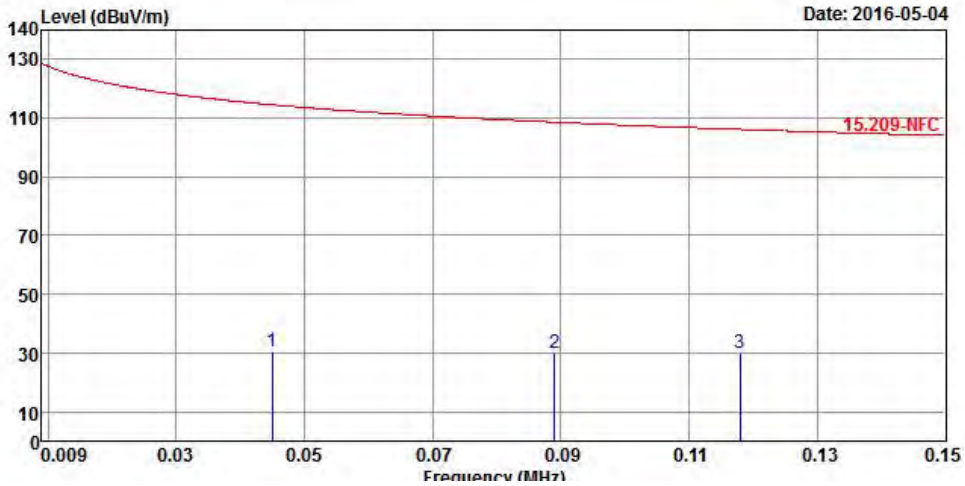


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	0.045	30.51	-84.03	114.54	9.46	20.90	0.15	0.00	Peak
2	0.089	29.95	-78.67	108.62	8.70	21.10	0.15	0.00	Peak
3	0.118	30.22	-75.96	106.18	9.00	21.06	0.16	0.00	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement worst emissions of receive antenna polarization: H (Horizontal).  
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.  
 Note 5: Except fundamental emission, other emissions from digital circuitry used to control additional panel functions or display capabilities other than the touch panel radio transmission. While disable touch panel radio transmission, other emissions have the same levels. Therefore other emissions level could be exceed the fundamental emission level.  
 Note 6 : Below 30MHz of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.



**Transmitter Radiated Emissions (9kHz~30MHz)**

<b>Modulation Mode</b>	Array Coil Pointing	<b>Polarization</b>	H
<b>Operating Mode</b>	1		

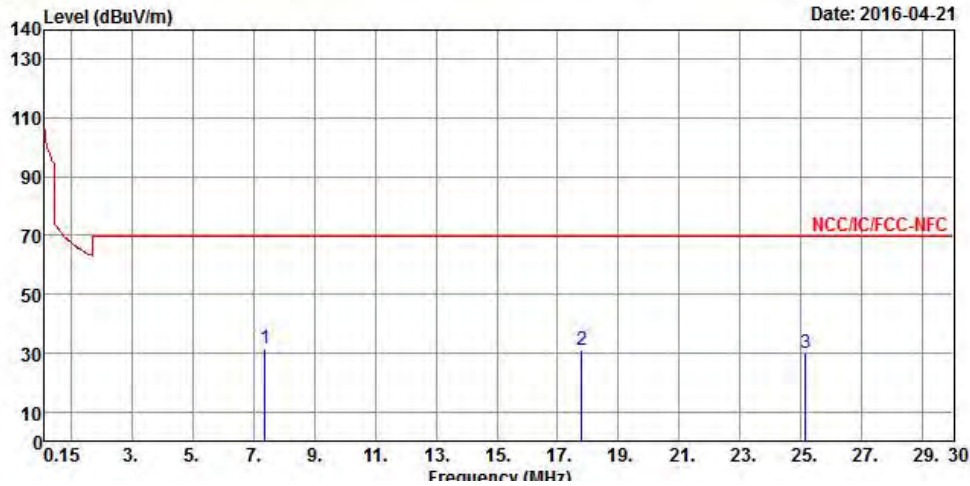


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7.388	31.62	-37.92	69.54	10.13	21.09	0.40	0.00	Peak
2	17.792	30.91	-38.63	69.54	8.85	21.46	0.60	0.00	Peak
3	25.130	30.01	-39.53	69.54	7.66	21.60	0.75	0.00	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement worst emissions of receive antenna polarization: H (Horizontal).  
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.  
 Note 5: Except fundamental emission, other emissions from digital circuitry used to control additional panel functions or display capabilities other than the touch panel radio transmission. While disable touch panel radio transmission, other emissions have the same levels. Therefore other emissions level could be exceed the fundamental emission level.  
 Note 6 : Below 30MHz of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.2.6 Transmitter Radiated Emissions (Above 30MHz)

Transmitter Radiated Emissions (Above 30MHz)			
Modulation Mode	Array Coil Pointing	Test Freq. (FX)	562.5 kHz
Operating Mode	1	Polarization	V

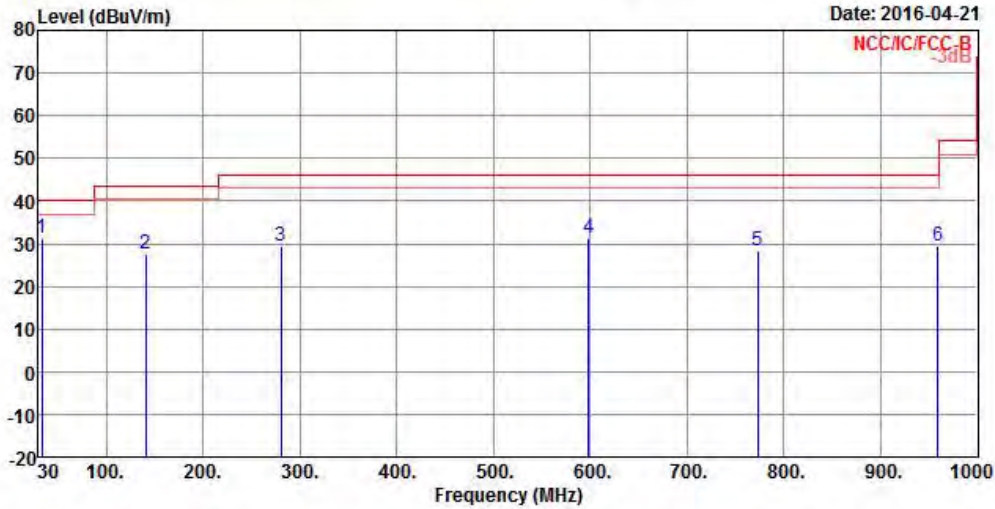


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	33.880	31.27	-8.73	40.00	34.80	23.20	0.83	27.56 QP
2	140.580	27.43	-16.07	43.50	35.01	17.77	1.84	27.19 QP
3	280.260	29.37	-16.63	46.00	34.11	19.43	2.55	26.72 QP
4	598.420	31.18	-14.82	46.00	30.28	24.83	4.06	27.99 QP
5	773.020	28.25	-17.75	46.00	25.11	26.42	4.54	27.82 QP
6	959.260	29.45	-16.55	46.00	23.67	27.98	5.19	27.39 QP

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).  
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.  
 Note 5: Except fundamental emission, other emissions from digital circuitry used to control additional panel functions or display capabilities other than the touch panel radio transmission. While disable touch panel radio transmission, other emissions have the same levels. Therefore other emissions level could be exceed the fundamental emission level.





Transmitter Radiated Emissions (Above 30MHz)			
Modulation Mode	Array Coil Pointing	Test Freq. (FX)	562.5 kHz
Operating Mode	1	Polarization	H

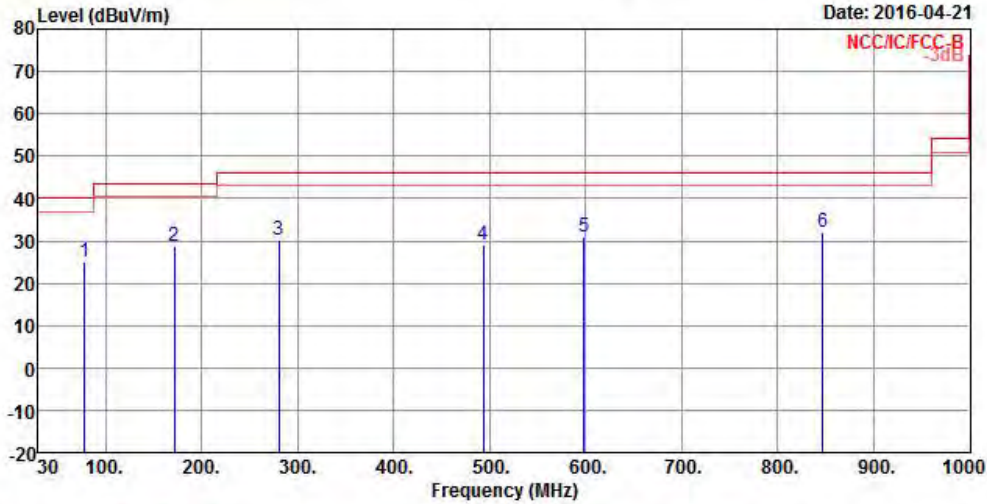

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	
1	78.500	25.02	-14.98	40.00	37.98	13.13	1.33 27.42 QP
2	171.620	28.55	-14.95	43.50	37.66	15.89	2.07 27.07 QP
3	280.260	30.24	-15.76	46.00	34.98	19.43	2.55 26.72 QP
4	493.660	28.94	-17.06	46.00	29.52	23.70	3.54 27.82 QP
5	598.420	30.97	-15.03	46.00	30.07	24.83	4.06 27.99 QP
6	846.740	31.87	-14.13	46.00	27.78	27.12	4.68 27.71 QP

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal). V (Vertical).  
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.  
 Note 5: Except fundamental emission, other emissions from digital circuitry used to control additional panel functions or display capabilities other than the touch panel radio transmission. While disable touch panel radio transmission, other emissions have the same levels. Therefore other emissions level could be exceed the fundamental emission level.

### 3.3 Emission Bandwidth

#### 3.3.1 Emission Bandwidth Limit

Emission Bandwidth Limit
N/A


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.3.3 Test Procedures


Test Method
<input checked="" type="checkbox"/> For the emission bandwidth refer ANSI C63.10, clause 6.9.2 for occupied bandwidth testing.
<input checked="" type="checkbox"/> For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.

#### 3.3.4 Test Setup

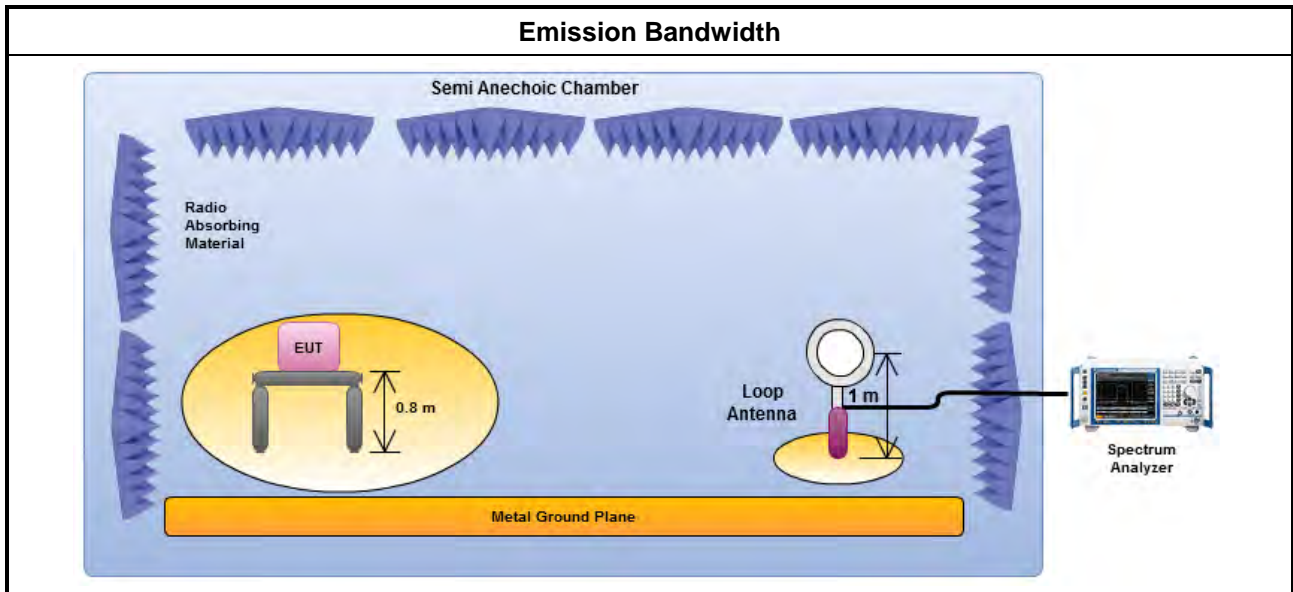

3.3.5 Test Result of Emission Bandwidth

Occupied Channel Bandwidth Result					
Modulation Mode	Frequency (kHz)	20dB Bandwidth (kHz)	F <sub>L</sub> at 20dB BW (kHz)	F <sub>H</sub> at 20dB BW (kHz)	99% Bandwidth (kHz)
Array Coil Pointing	562.5	46.31	536.45	582.76	98.98
Limit		N/A	N/A	N/A	N/A
Result		Complied			

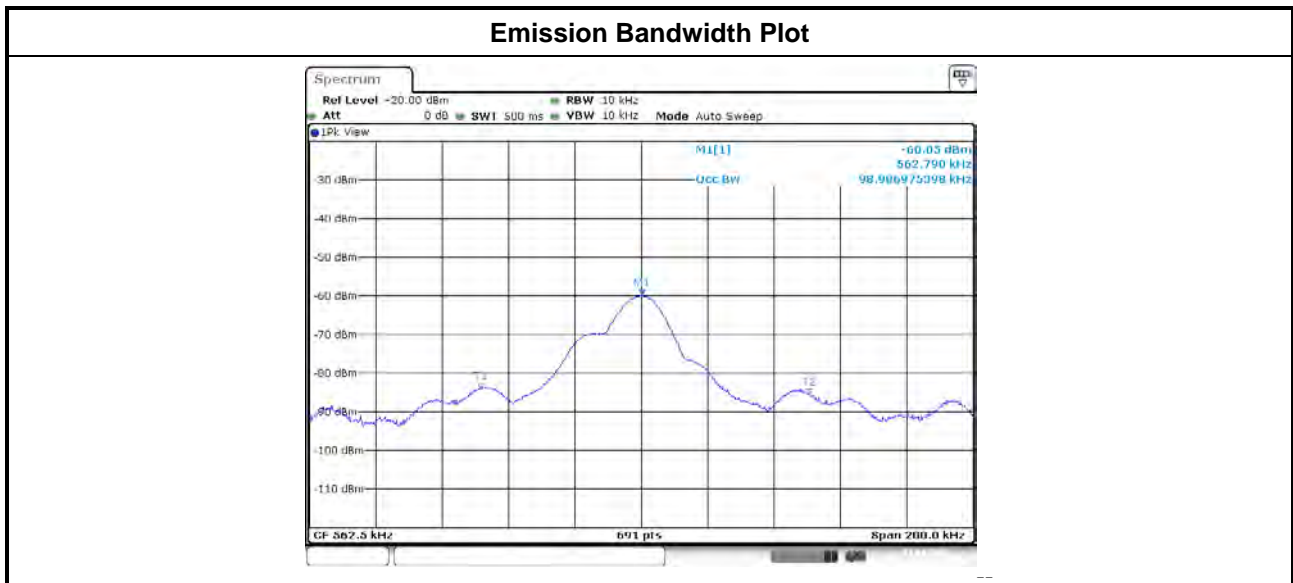





## 4 Test Equipment and Calibration Data

### AC Conduction

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Last Cal.	Calibration Due Date
EMC Receiver	KETSIGHT	N9038A	MY54130031	20Hz ~ 8.4GHz	Apr. 14, 2016	Apr. 13, 2017
LISN	SCHWARZBECK MESS-ELEKTR ONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 26, 2016	Jan. 25, 2017
RF Cable-CON	HUBER+SUHN ER	RG213/U	07611832020001	9kHz ~ 30MHz	Oct. 30, 2015	Oct. 29, 2016
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	NCR	NCR

### RF Conducted

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Last Cal.	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101500	9KHz~40GHz	May 06, 2015	May 05, 2016
B-Field Probe	Narda Safety Test Solutions GmbH	B-Field Probe 100 cm2	M-0652	50Hz~400KHz	Jun. 16, 2014	Jun. 15, 2016
Exposure Level Teste	Narda Safety Test Solutions GmbH	ELT-400	N-0210	100KHz~3MHz	Jun. 25, 2014	Jun. 24, 2016
Probe EF	Narda Safety Test Solutions GmbH	0391 E-Field	D-0667	0.1MHz ~ 3GHz	Jun. 23, 2014	Jun. 22, 2016
Broadband Field Meter	Narda Safety Test Solutions GmbH	NBM-550	E-0847	0.1MHz ~ 3GHz	Jun. 06, 2014	Jun. 05, 2016

### Radiation Emissions

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Last Cal.	Calibration Due Date
Spectrum	R&S	FSP40	100305	9kHz ~ 40GHz	Feb. 16, 2016	Feb. 15, 2017
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Nov. 28, 2015	Nov. 27, 2016
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May 11, 2015	May 10, 2016
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 18, 2015	Sep. 17, 2016
Spectrum	R&S	FSP40	100305	9kHz ~ 40GHz	Feb. 16, 2016	Feb. 15, 2017
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz~30 MHz	Feb. 02, 2015	Feb. 01, 2017