

EXHIBIT 3

Test Report

Test Report

TTEMC-F98130

APPLICATION FOR CERTIFICATION
Class II Permissive Change
On Behalf of
Mustek Systems Inc.
Scanner

Model : (1)1200 ED (2)9600 D
Project Name : C6E10

FCC ID : HWFA4SII

Prepared for : Mustek Systems Inc.
No. 25, R&D Road II, Science-
Based Industrial Park, Hsinchu,
Taiwan, R.O.C.

Prepared By : Taiwan Tokin EMC Eng. Corp.
No. 53-11, Tin-Fu Tsun, Lin-Kou,
Taipei Hsien, Taiwan, R.O.C.

Tel : (02) 2609-9301, 2609-2133

File Number : ATM-G98441
Report Number : TTEMC-F98130
Date of Test : Jul. 29/30, 1998
Date of Report : Aug. 07, 1998

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Tested Supporting System Details.....	5
1.3. Description of Test Facility.....	6
2. POWERLINE CONDUCTED TEST	7
2.1. Test Equipment.....	7
2.2. Block Diagram of Test Setup.....	7
2.3. Powerline Conducted Emission Limit (CISPR 22 Class B).....	7
2.4. EUT's Configuration during Compliance Measurement.....	8
2.5. Operating Condition of EUT.....	8
2.6. Test Procedure.....	9
2.7. Test Results.....	9
2.8. Line Conducted RF Voltage Measurement Results.....	10
3. RADIATED EMISSION TEST	16
3.1. Test Equipment.....	16
3.2. Block Diagram of Test Setup.....	16
3.3. Radiation Limit (CISPR 22 CLASS B).....	17
3.4. EUT's Configuration during Compliance Measurement.....	17
3.5. Operating Condition of EUT.....	17
3.6. Test Procedure.....	17
3.7. Test Results.....	17
3.8. Radiated Emission Measurement Results.....	18
4. DEVIATIONS TO TEST SPECIFICATIONS	22
5. PHOTOGRAPHS	23
5.1. Photos of Powerline Conducted Measurement.....	23
5.2. Photos of Radiated Measurement at Open Field Test Site.....	24

TEST REPORT CERTIFICATION

(Class II Permissive Change)

Applicant : Mustek Systems Inc.
 Manufacturer : Mustek Systems Inc.
 FCC ID : HWFA4SII
 EUT Description : Scanner

(A) MODEL NO. : (1)1200 ED (2)9600 D
 (B) PROJECT NAME : C6E10
 (C) SERIAL NO. : N/A
 (D) POWER SUPPLY : AC 120V/60Hz

Measurement Procedure Used :

FCC RULES AND CISPR 22 (DOCKET NO. 92-152, SEP. 1993) AND
 FCC / ANSI C63.4-1992

The device described above was tested by TAIWAN TOKIN EMC ENG. CORP. to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the CISPR 22 Class B limits both radiated and conducted emissions.

The measurement results are contained in this test report and TAIWAN TOKIN EMC ENG. CORP. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC official limits. TAIWAN TOKIN EMC ENG. CORP. recommends that this data can be submitted for FCC certification purposes if a 3dB margin below CISPR limits is obtained. This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Taiwan Tokin EMC Eng. corp.

Date of Test : Jul. 29/30, 1998

Prepared by : Julie Hsu 8/15/98
 (JULIE HSU)

Test Engineer : Allen Wang 8/15/98
 (ALLEN WANG)

Approve & Authorized Signer : Jackie Deng 8/18/98
 (JACKIE DENG)

Tok98-F058

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	Scanner
Model Number	:	(1)1200 ED (2)9600 D
		Above models are identical, except for packing style difference.
Project Name	:	C6E10
FCC ID	:	HWFA4SII
Applicant	:	Mustek Systems Inc. No. 25, R&D Road II, Science-Based Industrial Park, Hsinchu, Taiwan, R.O.C.
Manufacturer	:	Mustek Systems Inc. No. 25, R&D Road II, Science-Based Industrial Park, Hsinchu, Taiwan, R.O.C.
Power Adapter #1	:	HiTRON, M/N HES10B-12010-0-S Input : 100V-120Vac / 20VA; 50/60Hz Output : 12Vdc/1A Cable : Non-Shielded, Undetachable, 1.8m Bonded a ferrite core
Power Adapter #2	:	YHi, M/N YS-1012-U12 Input : 100V-120Vac, 60Hz, 0.45A Output : 12Vdc/1A Cable : Non-Shielded, Undetachable, 1.45m Bonded a ferrite core
Data Cable	:	Shielded, Detachable, 1.1m Bonded two ferrite cores
Data of Receipt of Sample	:	Jul. 28, 1998
Date of Test	:	Jul. 29/30, 1998

Remark : This EUT is a modified version of original FCC ID HWFA4SII. The difference are :

- (1) add two second source of Power Adapters
(HiTRON, M/N HES10B-12010-0-S and YHi, M/N YS-1010-U12)
- (2) Main board & CCD board re-layout.

1.2. Tested Supporting System Details

1.2.1. PERSONAL COMPUTER

Model Number	:	5/200MMX Series4DT
Serial Number	:	SG88802624
FCC ID	:	by DoC
Manufacturer	:	Hewlett Packard
VGA Card	:	Within Mother Board
Power Cord	:	Non-Shielded, Detachable, 2.5m

1.2.2. MONITOR

Model Number	:	PM36A
Serial Number	:	W70204674A
FCC ID	:	LLW9ZB1564
Manufacturer	:	Funai Electric Company of Taiwan
Data Cable	:	Shielded, Undetachable, 1.2m
Power Cord	:	Non-Shielded, Detachable, 1.5m

1.2.3. KEYBOARD

Model Number	:	BTC-5139
Serial Number	:	73B304245
FCC ID	:	E5XKBM111
Manufacturer	:	Behavior Tech Computer Corp.
Data Cable	:	Shielded, Undetachable, 1.2m

1.2.4. PRINTER

Model Number	:	2225C+
Serial Number	:	3007S68643
FCC ID	:	DSI6XU2225
Manufacturer	:	Hewlett Packard
Power Adapter	:	Hewlett Packard, M/N 82241A
Power Cord	:	Non-Shielded, Undetachable, 2.0m
Data Cable	:	Shielded, Detachable, 1.2m

1.2.5. MODEM

Model Number : 1414
 Serial Number : 970024521
 FCC ID : IFAXDM1414
 Manufacturer : Aceex
 Data Cable : Shielded, Detachable, 1.2m
 Power Adapter : Amigo, Model AM-91000A
 Non-Shielded, Undetachable, 1.8m

1.2.6. MOUSE

Model Number : M-S34
 Serial Number : LZA71066455
 FCC ID : DZL210472
 Manufacturer : Logitech

1.2.7. USB GAMEPAD #1

Model Number : INT-002
 Serial Number : N/A
 FCC ID : CETEAK032
 Manufacturer : Alps
 Data Cable : Shielded, Undetachable, 2.3m
 Bonded a ferrite core

1.2.8. USB GAMEPAD #2

Model Number : INT-003
 Serial Number : N/A
 FCC ID : CETEAK032
 Manufacturer : Alps
 Data Cable : Shielded, Undetachable, 2.3m
 Bonded a ferrite core
 Data Cable : Non-Shielded, Undetachable, 1.9m

1.3. Description of Test Facility

Site Description : May 14, 1997 Re-file on
 (No. 4 Open Site) Federal Communication Commission
 FCC Engineering Laboratory
 7435 Oakland Mills Road
 Columbia, MD 21046, U.S.A.

Name of Firm : Taiwan Tokin EMC Eng. Corp.

Site Location : No. 53-11, Tin-Fu Tsun, Lin-Kou,
 Taipei Hsien, Taiwan, R.O.C.

NVLAP Code : 200077-0


2. POWERLINE CONDUCTED TEST

2.1. Test Equipment

The following test equipments are used during the power line conducted tests :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESH3	886047/035	Jun.24, 98'	1 Year
2.	L.I.S.N. # 1	Kyoritsu	KNW-407	8-855-9	Apr.14, 98'	1 Year
3.	L.I.S.N. # 2	Kyoritsu	KNW-407	8-881-13	Apr.14, 98'	1 Year

2.2. Block Diagram of Test Setup

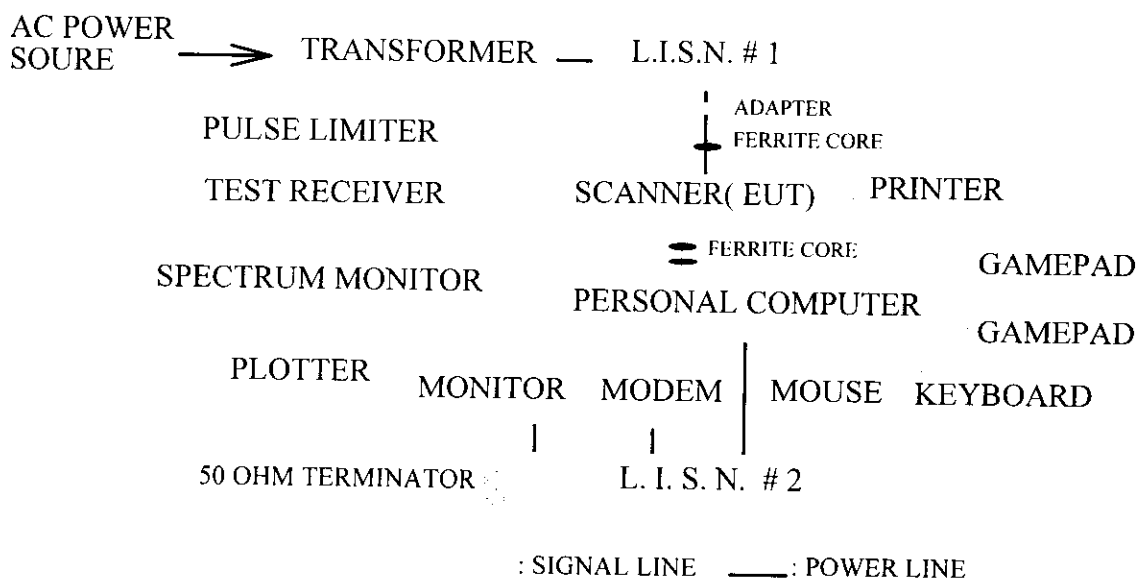

2.3. Powerline Conducted Emission Limit (CISPR 22 Class B)

FREQUENCY	MAXIMUM RF LINE VOLTAGE	
	QUASI-PEAK LEVEL	AVERAGE LEVEL
150KHz ~ 500KHz	66 ~ 56 dB	56 ~ 46 dB
500KHz ~ 5MHz	56 dB	46 dB
5MHz ~ 30MHz	60 dB	50dB

2.4. EUT's Configuration during Compliance Measurement

The following equipments were installed on RF LINE VOLTAGE measurement to meet the Commission requirement and operating in a manner which tended to maximize its emission characteristics in a normal application.

2.4.1. Scanner (EUT)

Model Number	:	(1)1200 ED (2)9600 D
Project Name	:	C6E10
FCC ID	:	HWFA4SII
Manufacturer	:	Mustek Systems Inc.
Power Adapter #1	:	HiTRON, M/N HES10B-12010-0-S Input : 100V-120Vac / 20VA; 50/60Hz Output : 12Vdc/1A Cable : Non-Shielded, Undetachable, 1.8m Bonded a ferrite core
Power Adapter #2	:	YHi, M/N YS-1012-U12 Input : 100V-120Vac, 60Hz, 0.45A Output : 12Vdc/1A Cable : Non-Shielded, Undetachable, 1.45m Bonded a ferrite core
Data Cable	:	Shielded, Detachable, 1.1m Bonded two ferrite cores

2.4.2. Supporting Simulators : As in Section 1.2

2.5. Operating Condition of EUT

- 2.5.1. Setup the EUT and simulator as shown on 2.2.
- 2.5.2. Turn on the power of all equipments.
- 2.5.3. Setup the personal computer to drive the EUT through the Mustek's scanner software driver.
- 2.5.4. Data was communicated between host personal computer and Scanner (EUT) through printer port.
- 2.5.5. Personal computer displayed the test software and scanning image by windows to monitor.
- 2.5.6. The other peripheral devices were drove and operated in turn during all testing.

2.6. Test Procedure

The EUT was connected EUT's Power Adapter to the power mains through a line impedance stabilization network (L.I.S.N. #1) and the other peripheral devices power cord were connected to the power mains through a line impedance stabilization network (L.I.S.N #2). This provided a 50 ohm coupling impedance for the measuring equipment. (Please refer to the block diagram of the test setup and photographs.) Both sides of A.C. line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions simulators of the interface cables should be manipulated according to FCC ANSI C63.4-1992 on conducted measurement.

The bandwidth of the R&S Test Receiver ESH3 was set at 10KHz.

The frequency range from 150KHz to 30MHz was checked.

EUT with two kinds of Power Adapter were done during conducted measurement and all the test results are listed in section 2.8.

2.7. Test Results

PASSED. Please refer to the following pages.


2.8. Line Conducted RF Voltage Measurement Results

All emissions not reported below are too low against the prescribed limits.

Date of Test : Jul. 29, 1998 Temperature : 27 °C
 EUT : Scanner Humidity : 59 %
 Test Mode : EUT w/HiTRON Power Adapter


Frequency MHz	Factor dB	Measurement (dBuV)				Reading (dBuV)				Limits (dBuV)	
		Phase A Neutral		Phase B Line		Phase A Neutral		Phase B Line		Q.P.	Average
		Q.P.	Average	Q.P.	Average	Q.P.	Average	Q.P.	Average		
0.1501	0.4	43.1	22.8	*	*	43.5	23.2	*	*	66.0	56.0
0.1512	0.4	*	*	42.2	28.4	*	*	42.6	28.8	65.9	55.9
0.2454	0.4	38.8	24.9	*	*	39.2	25.3	*	*	61.8	51.8
0.2553	0.4	*	*	34.1	31.5	*	*	34.5	31.9	61.6	51.6
0.3135	0.4	30.4	22.6	*	*	30.8	23.0	*	*	59.8	49.8
0.3644	0.4	*	*	33.4	26.3	*	*	33.8	26.7	58.6	48.6
0.5837	0.5	*	*	32.5	31.5	*	*	33.0	32.0	56.0	46.0
0.6115	0.5	30.1	26.9	*	*	30.6	27.4	*	*	56.0	46.0
0.7226	0.5	32.2	24.4	*	*	32.7	24.9	*	*	56.0	46.0
0.7341	0.5	*	*	35.1	22.9	*	*	35.6	23.4	56.0	46.0
0.8454	0.5	30.5	22.6	*	*	31.0	23.1	*	*	56.0	46.0
0.9010	0.5	*	*	34.1	23.2	*	*	34.6	23.7	56.0	46.0

- Remark :
1. All readings are Quasi-Peak and Average values.
 2. Factor = Insertion Loss + Cable Loss
 3. "*" means the emission level undetectable.

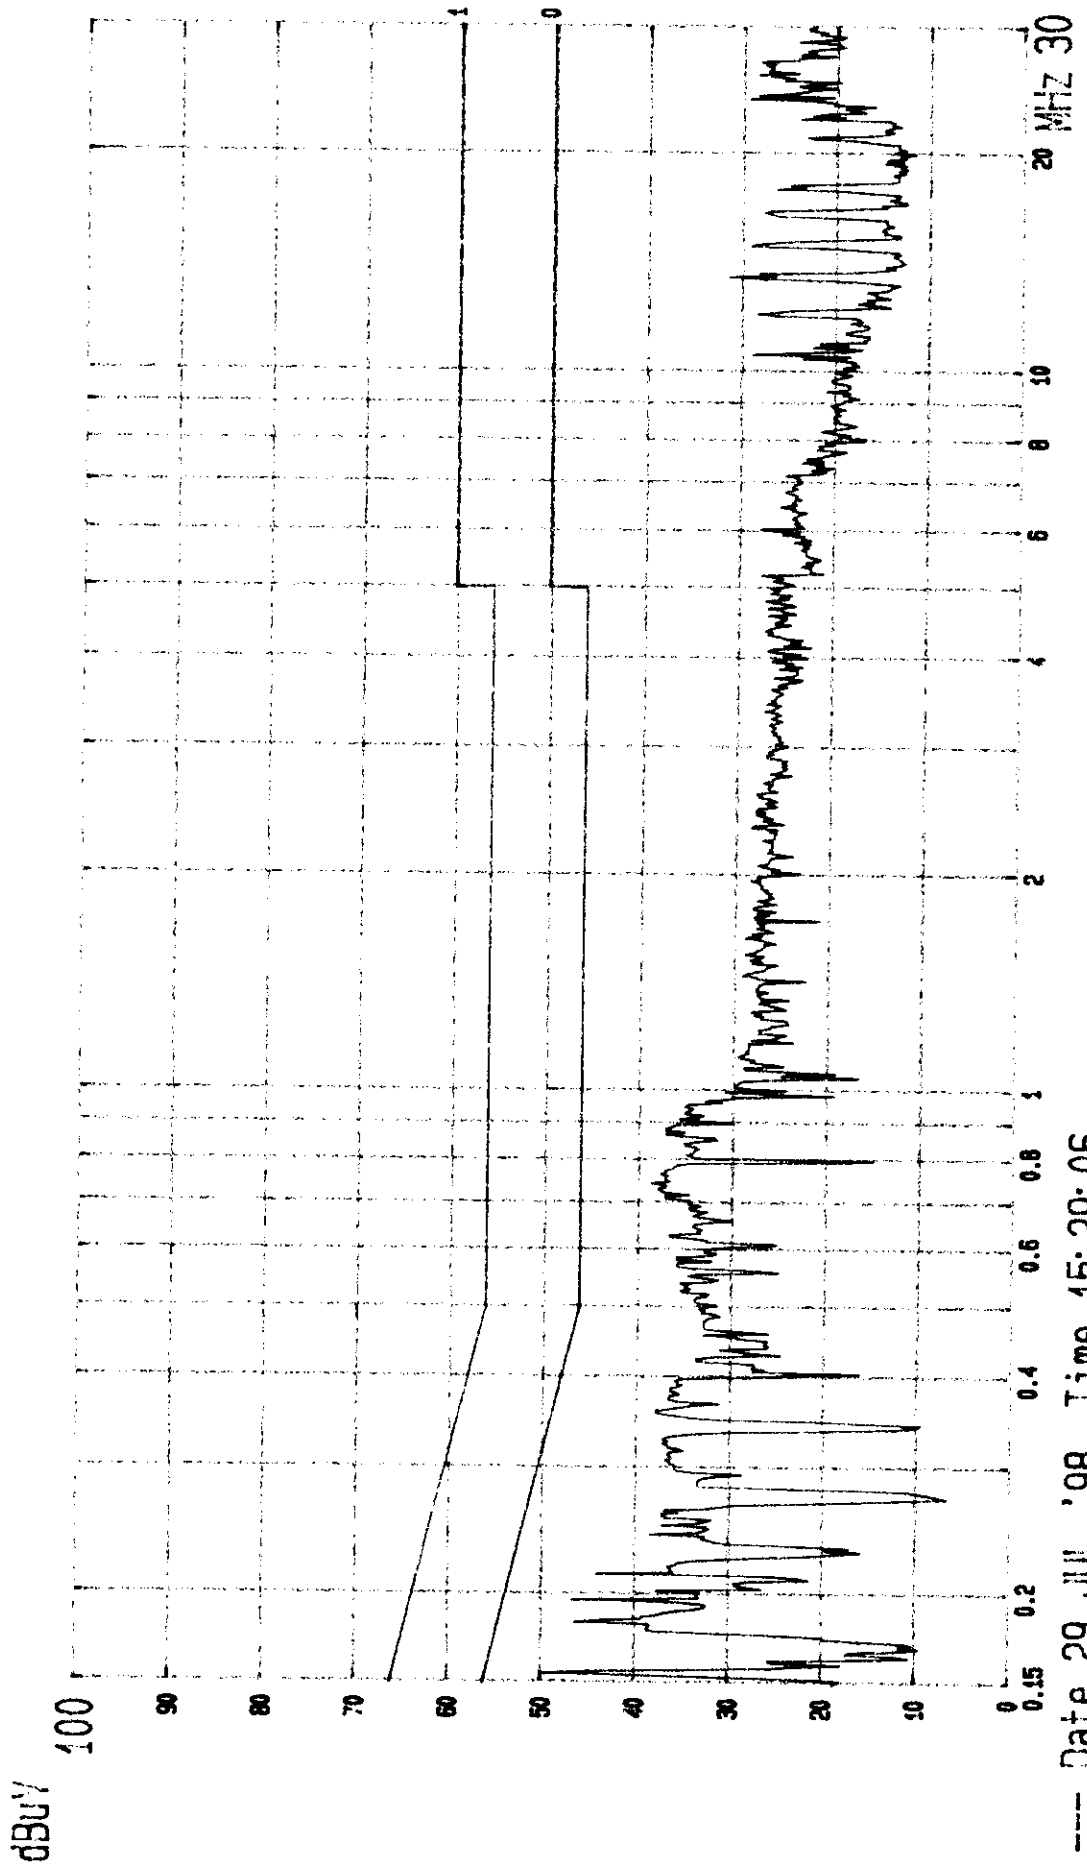

----- Date 29. JUL. '98 Time 15:29:06
Mustek EUT: Scanner M/N: 1200 ED/9600 D
LINE: VB. MEMO: W/Hi TRON

(PEAK VALUE) TTEMC.
PAGE: 001.

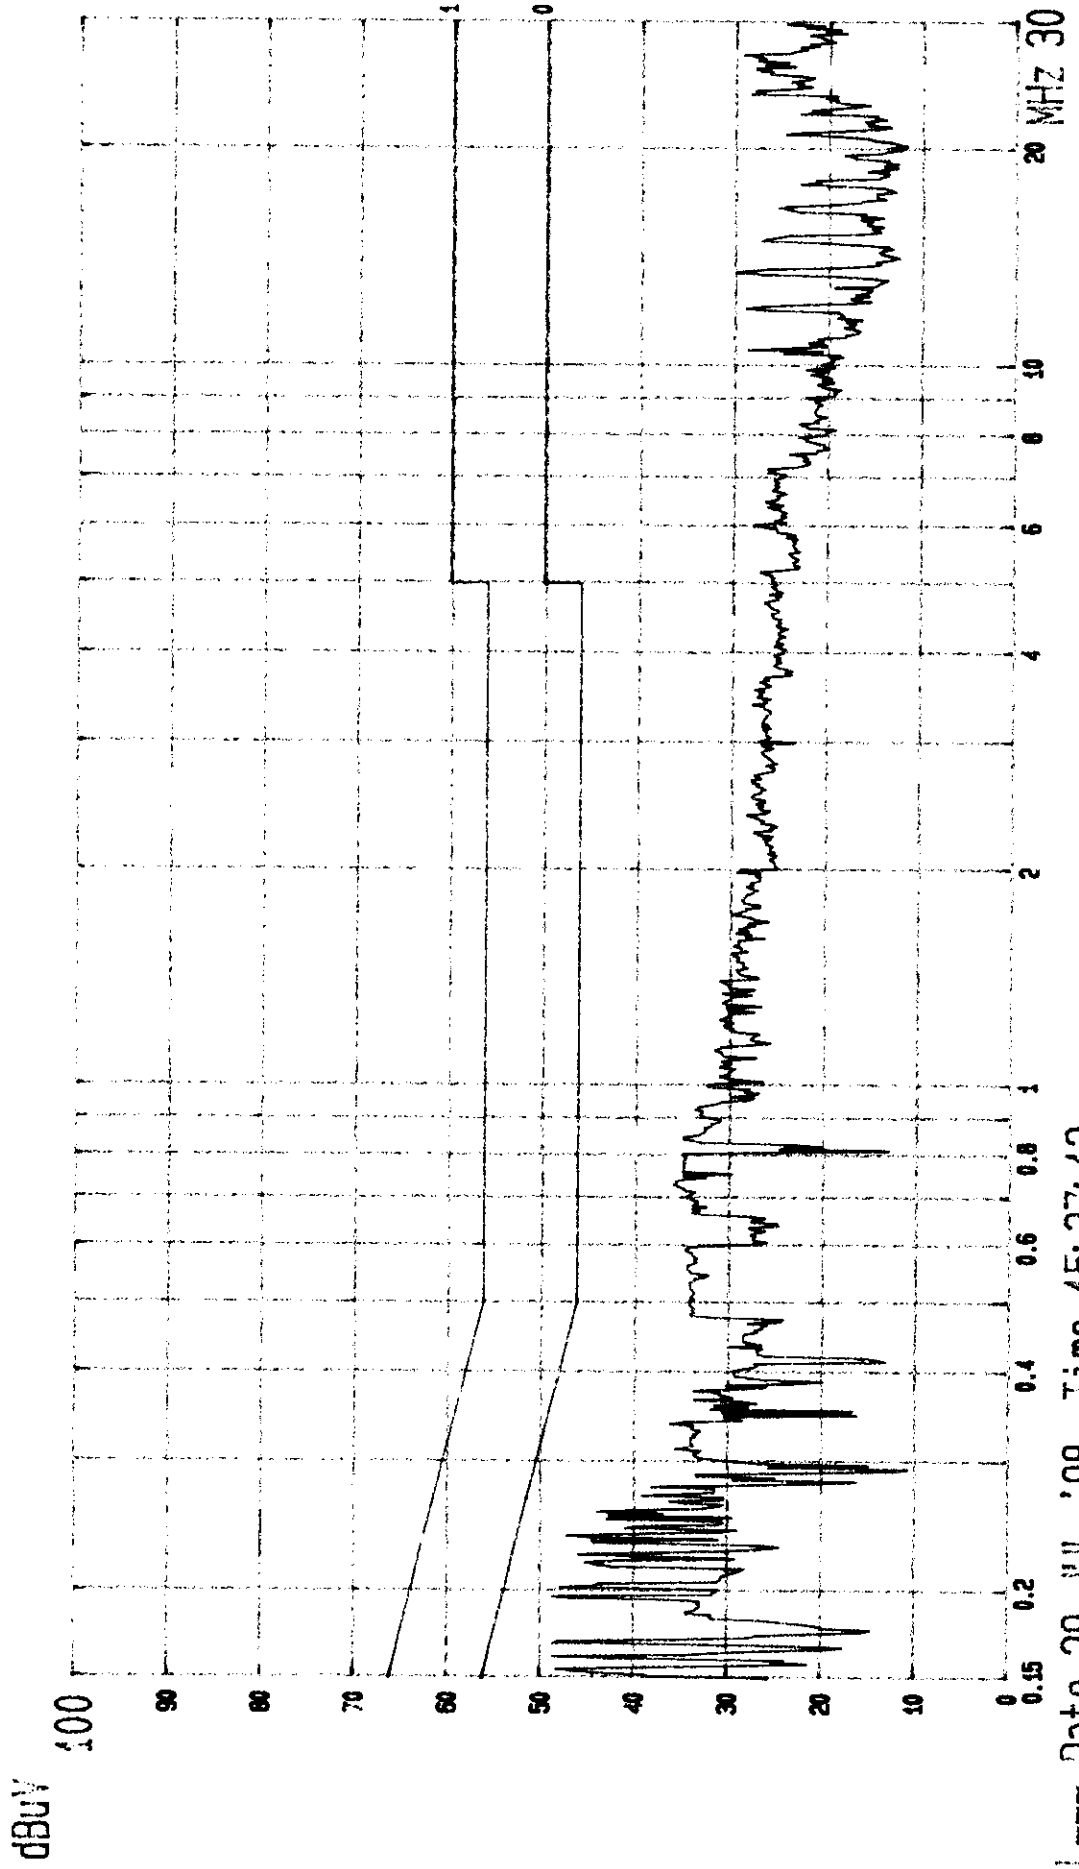


--- Date 29. JUL '98 Time 15:37:12
Mustek EUT:Scanner M/N: 1200 ED/9600 D
LINE: VA. MEMO: W/HI TRON

(PEAK VALUE) TTEMC. PAGE: 002.

Date of Test : Jul. 29, 1998 Temperature : 27 °C
 EUT : Scanner Humidity : 59 %
 Test Mode : EUT w/YHi Power Adapter


Frequency MHz	Factor dB	Measurement (dBuV)				Reading (dBuV)				Limits (dBuV)	
		Phase A Neutral		Phase B Line		Phase A Neutral		Phase B Line		Q.P.	Average
		Q.P.	Average	Q.P.	Average	Q.P.	Average	Q.P.	Average		
0.1658	0.4	*	*	50.9	45.7	*	*	51.3	46.1	65.2	55.2
0.1739	0.4	49.1	41.7	*	*	49.5	42.1	*	*	64.8	54.8
0.2540	0.4	38.1	28.7	*	*	38.5	29.1	*	*	61.6	51.6
0.3478	0.4	*	*	40.2	32.5	*	*	40.6	32.9	59.0	49.0
0.3676	0.4	36.6	32.2	*	*	37.0	32.6	*	*	58.4	48.4
0.4243	0.5	30.2	20.8	*	*	30.7	21.3	*	*	57.4	47.4
0.5987	0.5	*	*	37.4	24.2	*	*	37.9	24.7	56.0	46.0
0.6150	0.5	33.6	20.2	*	*	34.1	20.7	*	*	56.0	46.0
0.8654	0.5	*	*	36.6	22.7	*	*	37.1	23.2	56.0	46.0
2.0279	0.5	*	*	36.6	21.6	*	*	37.1	22.1	56.0	46.0
6.6528	0.8	*	*	37.9	24.3	*	*	37.7	25.1	60.0	50.0
6.6637	0.8	35.5	23.7	*	*	36.3	24.5	*	*	60.0	50.0

- Remark :
1. All readings are Quasi-Peak and Average values.
 2. Factor = Insertion Loss + Cable Loss
 3. "*" means the emission level undetectable.

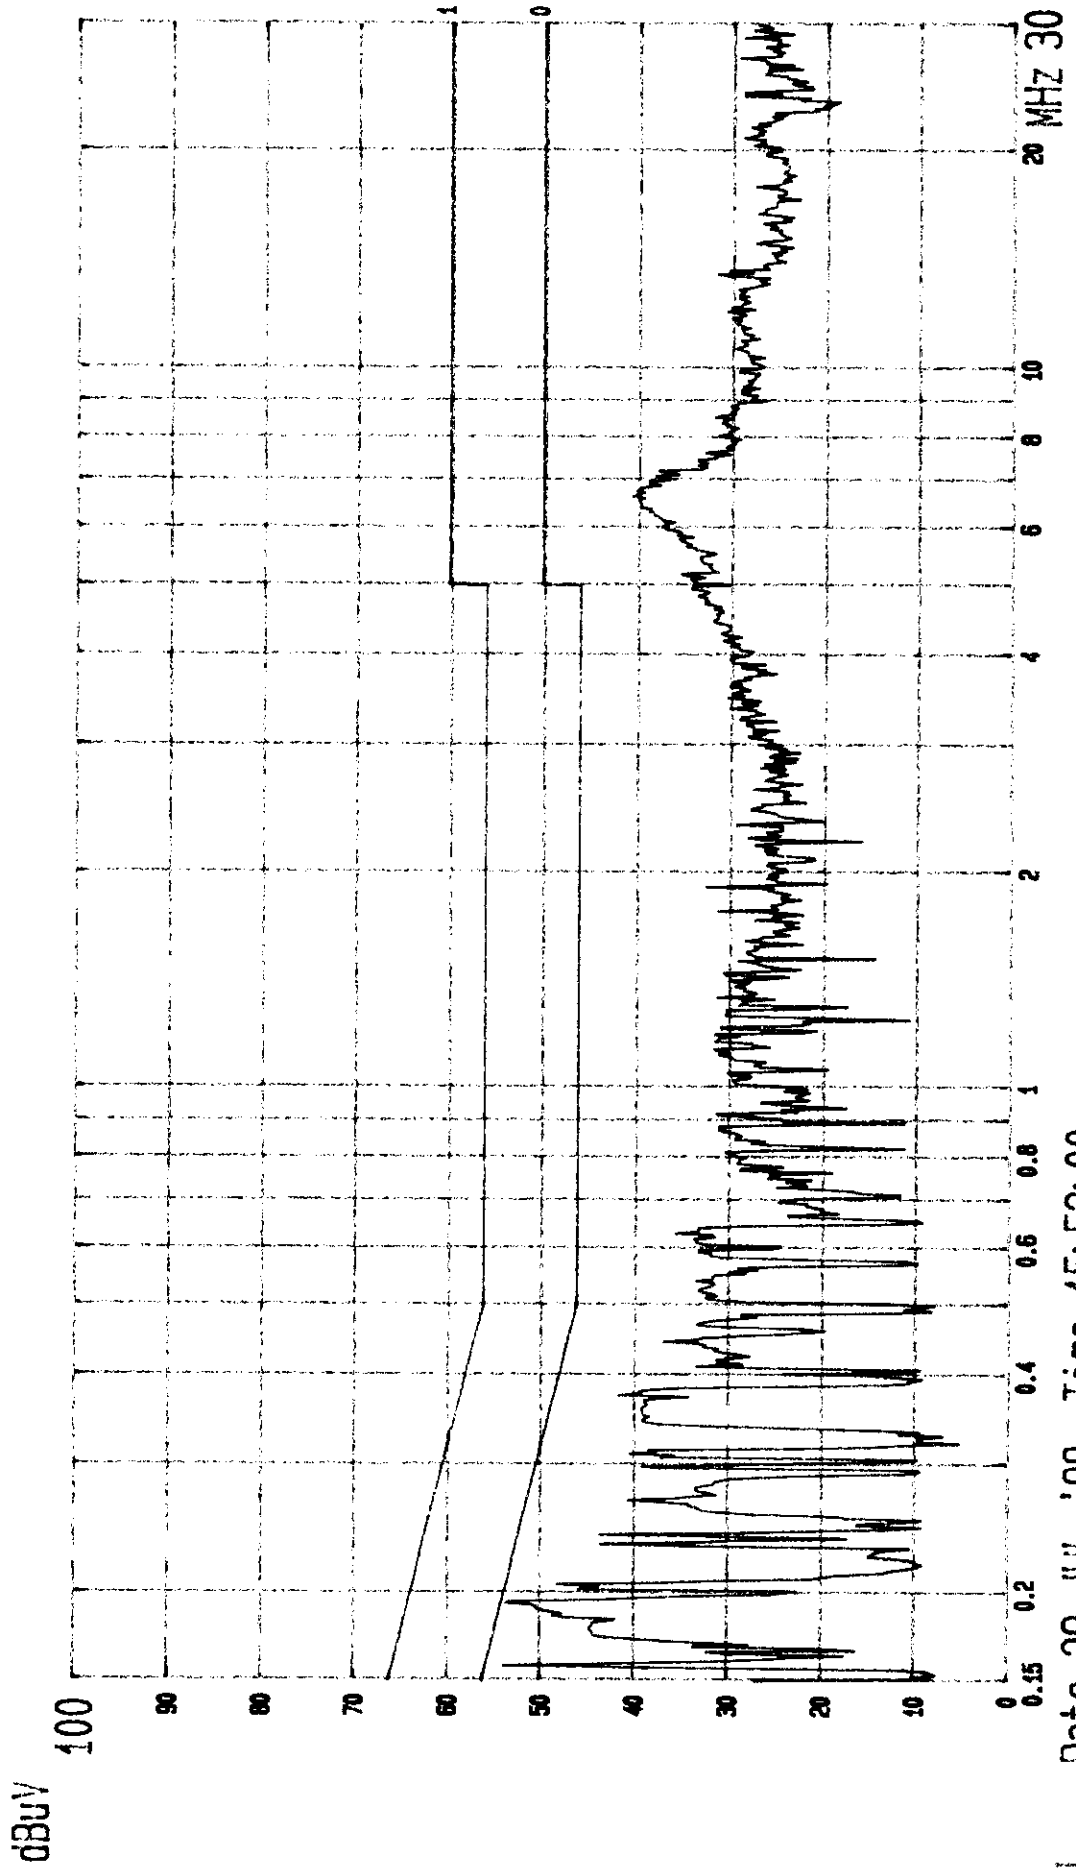

----- Date 29.JUL.'98 Time 15:52:00
Mustek EUT:Scanner M/N: 1200 ED/9600 D
LINE: VA. MEMO: W/VA-HSINN

(PEAK VALUE) ITEM: PAGE: 003.

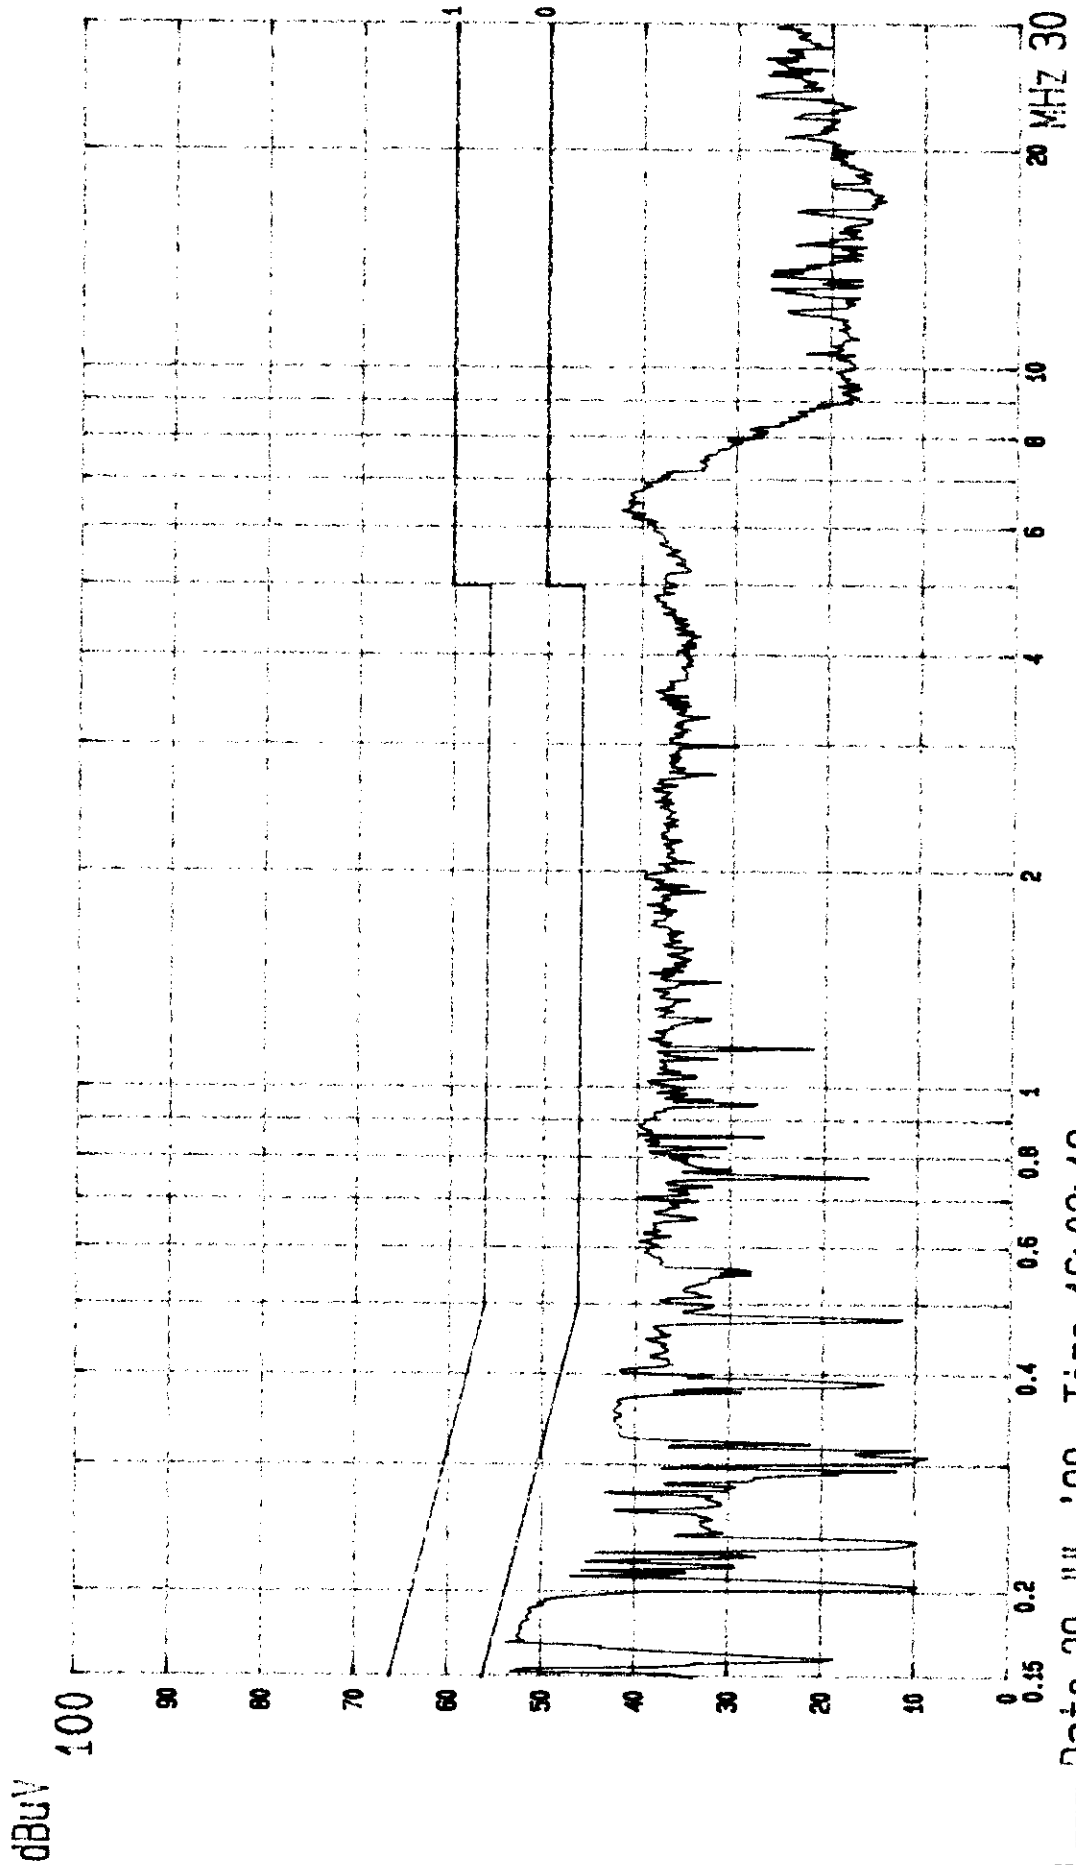

--- Date 29.JUL.'98 Time 16:02:12
Mustek EUT: Scanner M/N: 1200 ED/9600 D
LINE: VB. MEMO: N/VA-HSIND

(PEAK VALUE) PAGE: 004.
ITEMC.

3. RADIATED EMISSION TEST


3.1. Test Equipment

The following test equipments are used during the radiated emission tests :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESVS10	845165/018	Feb. 17, 98'	1 Year
2.	Broadband Antenna	Chase	VBA6106A	1227	Apr.29, 98'	1 Year
3.	Log Periodic Antenna	Chase	UPA6109	1020	Apr.29, 98'	1 Year

3.2. Block Diagram of Test Setup

3.2.1. Block Diagram of connection between EUT and simulators

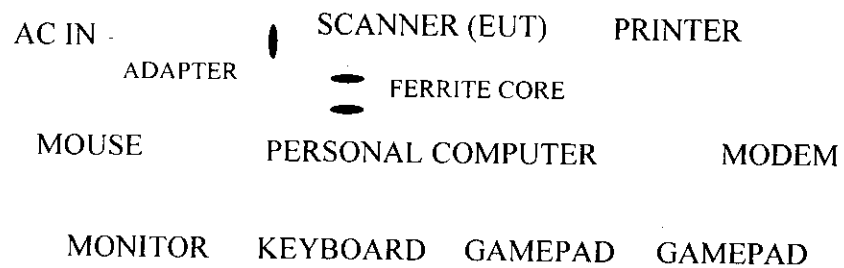

3.2.2. Open Field Test Site Setup Diagram

ANTENNA TOWER

ANTENNA ELEVATION VARIES FROM 1METER TO 4 METER

10 METERS

EUT

0.8
METER

TURN TABLE

GROUND PLANE

3.3. Radiation Limit (CISPR 22 CLASS B)

FREQUENCY	DISTANCE	FIELD STRENGTHS LIMITS
MHz	Meters	dBuV/m
30 ~ 230	10	30
230 ~ 1000	10	37

Remark : (1) The tighter limit applies at the edge between two frequency bands.
 (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. EUT's Configuration during Compliance Measurement

The configuration of EUT and its simulators were the same as those used in conducted measurement. Please refer to 2.4.

3.5. Operating Condition of EUT

Same as conducted measurement which is listed in 2.5.

3.6. Test Procedure

The EUT and its simulators were placed on a turn table which is 0.8 meter above ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set 10 meters away from the receiving antenna which is mounted on a antenna tower. The antenna moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated biconical and log periodical antenna) and dipole antenna were used as receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4-1992 requirement.

The bandwidth of the R&S Test Receiver ESVP was set at 120KHz.

The frequency range from 30MHz to 1000MHz was checked.

EUT with two kinds of Power Adapter were done during radiated measurement and all the test results are listed in section 3.8.

3.7. Test Results

PASSED. Please refer to the following pages.

3.8. Radiated Emission Measurement Results

The frequency spectrum from 30 MHz to 1000 MHz is investigated. All the emissions not reported below are too low against the CISPR 22 CLASS B limit..

Date of Test : Jul. 30, 1998 Temperature : 36 °C
 EUT : Scanner Humidity : 29 %
 Test Mode : EUT w/HiRON Power Adapter

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level		Margin dBuV/m
			Horizontal dBuV	Horizontal dBuV/m	Horizontal dBuV/m	Limits dBuV/m	
31.945	21.97	1.14	- 4.45	18.66	30.00	11.34	
51.542	14.75	1.51	- 0.23	16.03	30.00	13.97	
78.727	13.64	1.81	7.33	22.78	30.00	7.22	
119.647	19.46	2.32	- 1.33	20.45	30.00	9.55	
149.341	20.65	2.60	1.75	25.00	30.00	5.00	
152.367	20.92	2.65	2.00	25.57	30.00	4.43	
199.295	21.64	3.08	0.57	25.29	30.00	4.71	
205.505	21.70	3.14	0.66	25.50	30.00	4.50	
213.045	21.07	3.22	1.13	25.42	30.00	4.58	
229.599	22.23	3.34	2.41	27.98	30.00	2.02	
244.763	22.45	3.51	- 2.65	23.31	37.00	13.69	
308.830	15.50	3.99	- 0.25	19.24	37.00	17.76	
343.665	16.11	4.28	1.93	22.32	37.00	14.68	
357.500	16.27	4.37	- 2.03	18.61	37.00	18.39	
389.000	16.49	4.62	- 1.74	19.37	37.00	17.63	
421.100	16.99	4.82	- 1.83	19.98	37.00	17.02	
434.343	17.21	4.92	2.09	24.22	37.00	12.78	
459.300	17.62	5.08	- 1.58	21.12	37.00	15.88	
497.500	18.31	5.29	- 1.68	21.92	37.00	15.08	

Remark : 1. All readings are Quasi-Peak values.

Date of Test : Jul. 30, 1998 Temperature : 36 °C
 EUT : Scanner Humidity : 29 %
 Test Mode : EUT w/HiRON Power Adapter

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level		Margin dBuV/m
			Vertical dBuV	Vertical dBuV/m	Limits dBuV/m	Limits dBuV/m	
30.021	23.12	1.16	0.83	25.11	30.00	4.89	
33.017	21.89	1.19	1.36	24.44	30.00	5.56	
39.130	19.26	1.29	3.30	23.85	30.00	6.15	
42.147	18.05	1.31	3.44	22.80	30.00	7.20	
72.345	12.41	1.77	8.73	22.91	30.00	7.09	
108.802	18.17	2.17	3.21	23.55	30.00	6.45	
120.849	18.61	2.36	3.11	24.08	30.00	5.92	
146.335	19.91	2.55	3.48	25.94	30.00	4.06	
156.956	19.71	2.69	3.31	25.71	30.00	4.29	
203.848	21.40	3.12	1.86	26.38	30.00	3.62	
228.008	22.00	3.34	1.82	27.16	30.00	2.84	
250.590	22.36	3.58	1.12	27.06	37.00	9.94	
325.418	14.60	4.15	3.11	21.86	37.00	15.14	
336.075	14.92	4.22	-0.48	18.66	37.00	18.34	
343.658	15.13	4.28	0.39	19.80	37.00	17.20	
366.100	16.24	4.46	-1.50	19.20	37.00	17.80	
391.600	16.37	4.61	-1.75	19.23	37.00	17.77	
429.700	16.69	4.89	-1.60	19.98	37.00	17.02	
467.900	17.80	5.12	1.42	24.34	37.00	12.66	

Remark : 1. All readings are Quasi-Peak values.

Date of Test : Jul. 30, 1998 Temperature : 36 °C
 EUT : Scanner Humidity : 29 %
 Test Mode : EUT w/YHi Power Adapter

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level		Margin dBuV/m
			Horizontal dBuV	Horizontal dBuV/m	Limits dBuV/m		
34.884	21.35	1.23	- 0.20	22.38	30.00	7.62	
43.927	17.95	1.36	- 5.00	14.31	30.00	15.69	
79.184	13.64	1.81	10.96	26.41	30.00	3.59	
110.998	18.59	2.21	1.28	22.08	30.00	7.92	
144.628	20.16	2.55	3.13	25.84	30.00	4.16	
152.660	20.92	2.65	3.99	27.56	30.00	2.44	
160.290	21.15	2.74	- 0.71	23.18	30.00	6.82	
206.964	21.55	3.14	1.79	26.48	30.00	3.52	
* 228.012	22.19	3.34	3.35	28.88	30.00	1.12	
229.295	22.23	3.34	2.40	27.97	30.00	2.03	
256.993	23.15	3.59	- 1.00	25.74	37.00	11.26	
307.331	15.51	3.98	1.26	20.75	37.00	16.25	
325.417	15.57	4.15	2.90	22.62	37.00	14.38	
331.511	15.77	4.20	1.21	21.18	37.00	15.82	
379.700	16.22	4.52	- 2.00	18.74	37.00	18.26	
434.342	17.21	4.92	2.67	24.80	37.00	12.20	
464.700	17.74	5.10	- 1.69	21.15	37.00	15.85	
502.900	18.32	5.38	- 1.65	22.05	37.00	14.95	

- Remark : 1. All readings are Quasi-Peak values.
 2. The worst emission was detected at 228.012MHz with corrected signal level of 28.88dBuV/m (limit is 30dBuV/m) when the antenna was at horizontal polarization and was at 4m high and the turn table was at 130 ° .
 3. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Date of Test : Jul. 30, 1998 Temperature : 36 °C
 EUT : Scanner Humidity : 29 %
 Test Mode : EUT w/YHi Power Adapter

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level		Margin dBuV/m
			Vertical dBuV	Vertical dBuV/m	Limits dBuV/m		
41.491	18.05	1.31	4.14	23.50	30.00	6.50	
48.151	15.97	1.48	5.33	22.78	30.00	7.22	
72.307	12.11	1.78	10.86	24.75	30.00	5.25	
121.553	18.61	2.36	4.42	25.39	30.00	4.61	
126.068	19.22	2.40	3.84	25.46	30.00	4.54	
151.775	19.62	2.65	2.92	25.19	30.00	4.81	
181.575	21.35	2.90	0.82	25.07	30.00	4.93	
217.487	21.08	3.26	- 0.03	24.31	30.00	5.69	
225.029	21.86	3.35	2.53	27.74	30.00	2.26	
* 228.014	22.00	3.34	3.64	28.98	30.00	1.02	
250.599	22.36	3.58	2.61	28.55	37.00	8.45	
307.327	14.07	3.98	- 0.58	17.47	37.00	19.53	
325.413	14.60	4.15	3.49	22.24	37.00	14.76	
357.300	15.81	4.37	- 1.29	18.89	37.00	18.11	
372.292	16.21	4.49	2.64	23.34	37.00	13.66	
408.309	16.54	4.71	- 1.57	19.68	37.00	17.32	
446.500	17.24	4.96	- 1.48	20.72	37.00	16.28	
471.800	17.88	5.14	- 1.69	21.33	37.00	15.67	
497.300	18.41	5.29	- 1.57	22.13	37.00	14.87	

- Remark : 1. All readings are Quasi-Peak values.
 2. The worst emission was detected at 228.014MHz with corrected signal level of 28.98dBuV/m (limit is 30dBuV/m) when the antenna was at vertical polarization and was at 1m high and the turn table was at 140 ° .
 3. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna..

4. DEVIATIONS TO TEST SPECIFICATIONS

【 NONE 】