



Test Report

For

Applicant : Mustek Systems Inc.
Equipment Type : Scanner
Model : BearPaw 1200, 7600B USB
FCC ID : HWFBEARPAW
Project Name : C6U14K

Report No. : 99BH013F



QTE99-F040

Test Report Certification

Quietek Corporation

No.75-1, Wang-Yeh Valley, Yung-Hsing, Chiung-Lin,
Hsin-Chu County, Taiwan, R.O.C.
Tel : 886-3-592-8858, Fax: 886-3-592-8859
E-Mail : quietek@ms24.hinet.net

Accredited by NIST(NVLAP), VCCI, BSMI, DNV, TUV

Applicant : Mustek Systems Inc.

Address : No. 25, R&D Road II, Science-Based Industrial Park,
Hsin-Chu, Taiwan, R.O.C.

Equipment Type : Scanner

Model : BearPaw 1200, 7600B USB

FCC ID. : HWFBEARPAW

Measurement Standard : CISPR 22/1994

Measurement Procedure : ANSI C63.4 /1992

Operation Voltage : 110VAC/60Hz

Classification : Class B

Test Result : Complied

Test Date : November 17, 1999

Report No. : 99BH013F



The Test Results relate only to the samples tested.
The test report shall not be reproduced except in full without the written approval of Quietek Corporation.
This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government


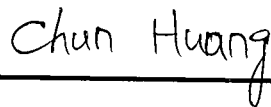
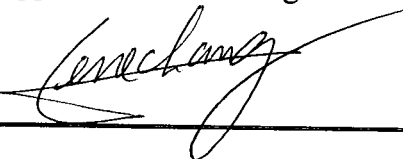
Documented by: Shelly Fun 	Test Engineer: Chun Huang 	Approved: Gene Chang 
--	--	---

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	4
1.1 EUT Description	4
1.2 Tested System Details	5
1.3 EUT Configuration.....	6
1.4 EUT Exercise Software.....	7
1.5 Test performed.....	7
1.6 Test Facility	8
2. CONDUCTED EMISSION	9
2.1 Test Equipment List	9
2.2 Test Setup.....	9
2.3 Limits	9
2.4 Test Procedure.....	10
2.5 Test Results	10
3. RADIATED EMISSION.....	11
3.1 Test Equipment.....	11
3.2 Test Setup.....	11
3.3 Limits	12
3.4 Test Procedure.....	12
3.5 Test Results	12
4. EMI REDUCTION METHOD DURING COMPLIANCE TESTING.....	13
5. ATTACHMENT	14
ATTACHMENT 1: SUMMARY OF TEST RESULTS	
ATTACHMENT 2: EUT TEST PHOTOGRAPHS	
ATTACHMENT 3: EUT DETAIL PHOTOGRAPHS	

1. General Information

1.1 EUT Description

Applicant : Mustek Systems Inc.

Address : No. 25, R&D Road II, Science-Based Industrial
Park, Hsin-Chu, Taiwan, R.O.C.

Equipment Type : Scanner

Model : BearPaw 1200, 7600B USB

FCC ID : HWFBEARPAW

Operation Voltage : 110VAC/60Hz

Data Cable : Shielded, 1.4m

Power Adapter : Mode 1: YHI, YS-1015-U12
S/N: 00000043
BSMI ID: 4872A185
Cable out: Non-Shielded, 1.5m *w/FERRITE CORE*
Mode 2: SIRTEC, HPW-1512A REV: C1
BSMI ID: 3872B620
Cable out: Non-Shielded, 1.8m *w/FERRITE CORE*

Remark:

1. This EUT is a Scanner with 600dpi and two type of power adapters. Both power adapters were test individually.
2. This EUT have two models, the different of then is only the package.
3. Quietek had verified the construction and function of the above model in typical operation, then shown in the test report.

1.2 Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

1.2.1 Host Personal Computer

Model Number : DESKPRO
Manufacturer : Compaq
Serial Number : N/A
FCC ID : DoC
Power Cord : Non-Shielded,1.8m

1.2.2 Monitor

Model Number : CM752ET-311
Serial Number : T8D003312
FCC ID : DoC
Manufacturer : HITACHI
Data Cable : Shielded, 1.6m
Power Cord : Shielded, 1.8m

1.2.3 Keyboard

Model Number : 6311-TW2C
Serial Number : N/A
FCC ID : DoC
Manufacturer : ACER
Data Cable : Shielded, 1.8m

1.2.4 Modem

Model Number : 1414
Serial Number : 980033041
FCC ID : IFAXDM1414
Manufacturer : ACEEX
Data Cable : Shielded, 1.5m
Power Adapter : ACCEX, M/N: SCP41-91000A
Cable Output : Shielded, 1.5m

1.2.5 Printer

Model Number : C2642A
Serial Number : MY75N1D2XN
FCC ID : B94C2642X
Manufacturer : HP
Data Cable : Shielded, 1.2m
Power Adapter : NMB, M/N: C2175A
Cable for AC IN: Non-Shielded, 0.7m
Cable for AC Out: Non-Shielded, 1.5m


1.2.6 Mouse

Model Number : M-S34
Serial Number : LZB75078428
FCC ID : DZL211029
Manufacturer : HP
Data Cable : Shielded, 1.8m

1.2.7 Video Camera

Model Number : Wcam 3X
Serial Number : N/A
FCC ID : DoC
Manufacturer : Mustek
Data Cable (USB) : Shielded, 1.5m

1.3 EUT Configuration

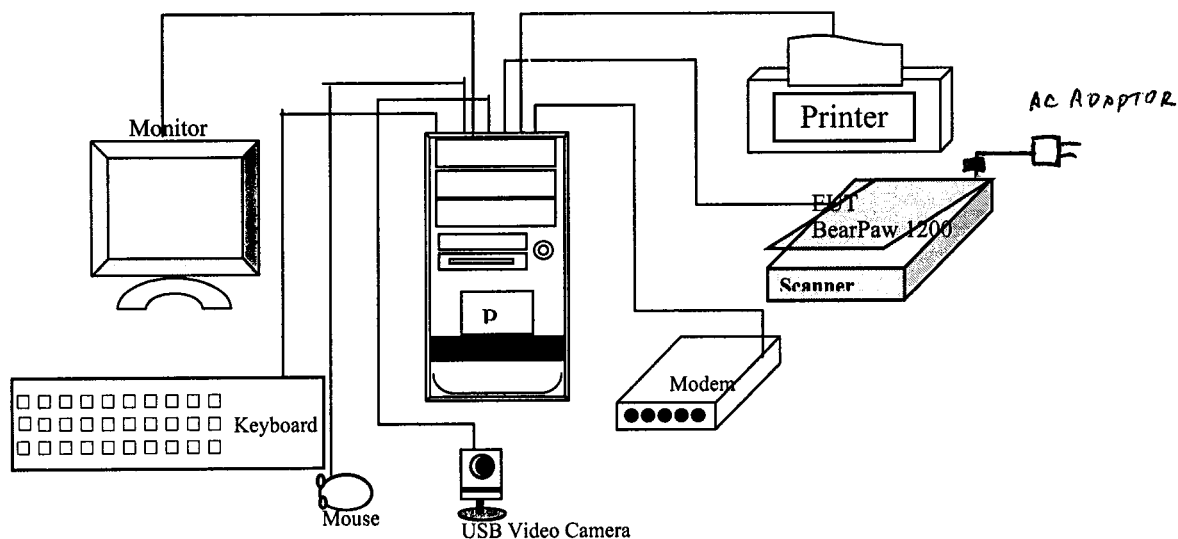

1.4 EUT Exercise Software

The EUT exercise program used during conducted testing was designed to exercise the EUT in a manner similar to a typical use. The exercise sequence is listed as below:

- 1.4.1 Setup the EUT and simulators as shown on 1.3
- 1.4.2 Turn on the power of all equipment.
- 1.4.3 Boot the PC from Hard Disk.
- 1.4.4 PC reads test software from the control BIOS of scanner and then sent to scanner.
- 1.4.5 The Scanner (EUT) will start to operate and scan the video figure into PC.
- 1.4.6 PC will display "video figure" on monitor.
- 1.4.7 Printer and modem will keep at standby mode during Scanner operation.
- 1.4.8 Repeat the above procedure 1.4.4 to 1.4.7

1.5 Test performed

Conducted emissions were investigated over the frequency range from **0.15MHz to 30MHz** using a receiver bandwidth of 9kHz.

Radiated emissions were investigated over the frequency range from **30MHz to 1000MHz** using a receiver bandwidth of 120kHz. Radiated testing was performed at an antenna to EUT distance of 10 meters .

1.6 Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: November 3, 1998 File on
 Federal Communications Commission
 FCC Engineering Laboratory
 7435 Oakland Mills Road
 Columbia, MD 21046
 Reference 31040/SIT1300F2



September 30, 1998 Accreditation on NVLAP
 NVLAP Lab Code: 200347-0

February 23, 1999 Accreditation on DNV
 Statement No. : 413-99-LAB11



December 8, 1998 Registration on VCCI
 Registration No. for No.2 Shielded Room C-858
 Registration No. for No.1 Open Area Test Site R-823
 Registration No. for No.2 Open Area Test Site R-835



January 04, 1999 Accreditation on TÜV Rheinland
 Certificate No.: I9865712-9901



Name of firm : QuieTek Corporation

Site location : No.75-1, Wang-Yeh Valley, Yung-Hsing Tsuen,
 Chiung-Lin, Hsin-Chu County, Taiwan, R.O.C.

2. Conducted Emission


2.1 Test Equipment List

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal..	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 1999	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 1999	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 1999	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	N/A	
5	N0.2 Shielded Room			N/A	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2.2 Test Setup

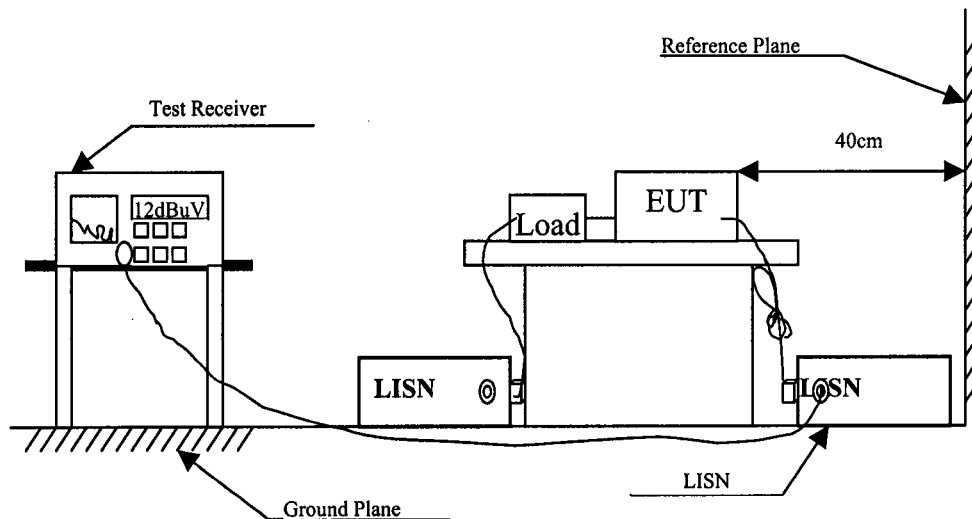

2.3 Limits

CISPR 22 Limits (dBuV)					FCC Part 15 Subpart B (dBuV)				
Frequency MHz	Class A		Class B		Frequency MHz	Class A		Class B	
	QP	AV	MHz	AV		uV	dBuV	uV	dBuV
0.15 - 0.50	79	66	66-56	56-46	0.45-1.705	1000	60.0	250	48.0
0.50-5.0	73	60	56	46	1.705-30	3000	69.5	250	48.0
5.0 - 30	73	60	60	50					

Remarks : In the above table, the tighter limit applies at the band edges.

2.4 Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 /1992 on conducted measurement.

The bandwidth of the field strength meter (R & S Test Receiver ESCS 30) is set at 9kHz.

2.5 Test Results

The conducted emission from the EUT is measured and shown in attachment 1 of test report. The acceptance criterion was met and the EUT passed the test.

3. Radiated Emission


3.1 Test Equipment

The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Site # 1	X	Test Receiver	R & S	ESCS 30 / 825442/14	May, 1999
		Spectrum Analyzer	Advantest	R3261C / 71720140	May, 1999
		Pre-Amplifier	HP	8447D/3307A01812	May, 1999
	X	Bilog Antenna	Chase	CBL6112B / 12452	Sep., 1999
	X	Horn Antenna	EM	EM6917 / 103325	May, 1999
Site # 2	X	Test Receiver	R & S	ESCS 30 / 825442/17	May, 1999
		Spectrum Analyzer	Advantest	R3261C / 71720609	May, 1999
		Pre-Amplifier	HP	8447D/3307A01814	May, 1999
	X	Bilog Antenna	Chase	CBL6112B / 2455	Sep., 1999
	X	Horn Antenna	EM	EM6917 / 103325	May, 1999

- Note:
1. All equipment upon which need to calibrated are with calibration period of 1 year.
 - 2.. Mark "X" test instruments are used to measure the final test results.

3.2 Test Setup

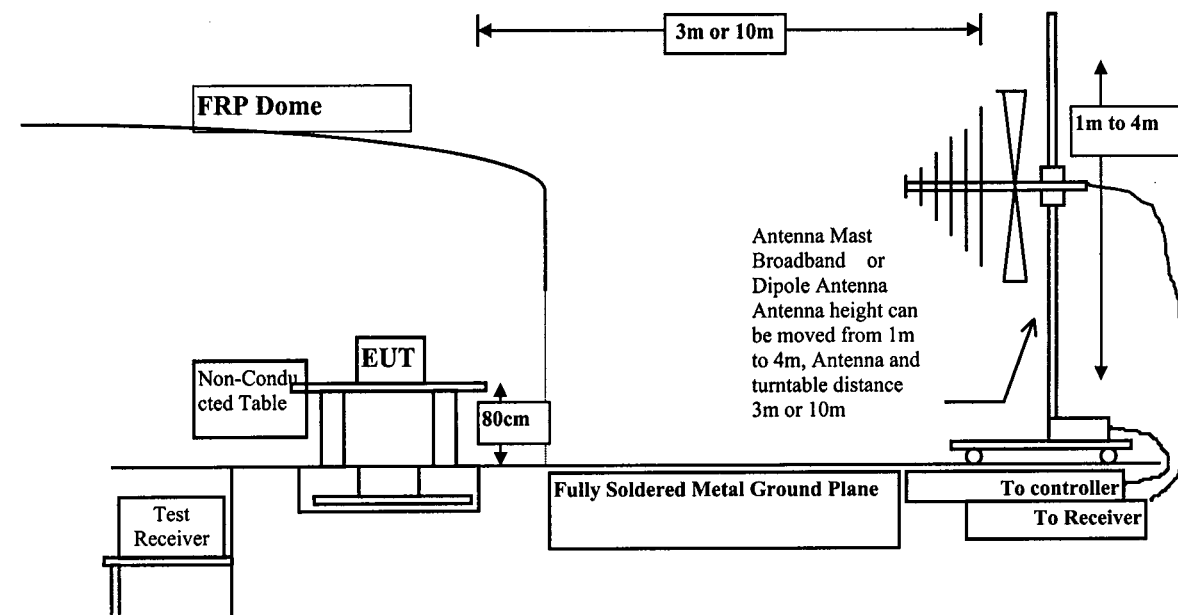

3.3 Limits

CISPR 22 Limits (dBuV)					FCC Part 15 Subpart B (dBuV)				
Frequency MHz	Class A		Class B		Frequency	Class A		Class B	
	Distance (m)	dBuV/m	Distance (m)	dBuV/m		uV	dBuV	uV	dBuV
30 – 230	10	40	10	30	30 – 88	90	39	100	40.0
230 – 1000	10	47	10	37	88 – 216	150	43.5	150	43.5
					216 – 960	210	46.5	200	46.0
					960 - 2000	300	49.5	500	54.0

Remark: 1. The tighter limit shall apply at the edge between two frequency bands.

2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3. RF Line Voltage (dBuV) = 20 log RF Line Voltage (uV)

3.4 Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 10 meters. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4 /1992 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30) is 120 kHz.

3.5 Test Results

The radiated emission from the EUT is measured and shown in attachment 1 of test report. The acceptance criterion was met and the EUT passed the test.

4. EMI Reduction Method During Compliance Testing

No modification was made during testing.



5. Attachment

Attachment 1: Summary of Test Results	Number of Pages: 5
Attachment 2: EUT Test Photographs	Number of Pages: 4
Attachment 3: EUT detailed photographs	Number of Pages: 11



Attachment 1 : Summary of Test Results

The test results in the emission were performed according to the requirements of measurement standard and process. QuieTek Corporation is assumed full responsibility for the accuracy and completeness of these measurements. The test data of the emission are listed as the attached data.

All the tests were carried out with the EUT in normal operation, which was defined as:

- (1) Mode 1: YHI Adapter
- (2) Mode 2: SIRTEC Adapter

The EUT passed all the tests.

The uncertainty is calculated in accordance with NAMAS NIS 81, The total uncertainty for this test is as follows:

➤ **Emission Test**

- Uncertainty in the Conducted Emission Test: $< \pm 2.0$ dB
- Uncertainty in the field strength measured: $< \pm 4.0$ dB

CONDUCTED EMISSION DATA

Date of Test : Nov. 17, 1999 EUT : Scanner
 Test Mode : Mode 1 Detect Mode : Quasi-Peak & Average

Frequency	Cable	LISN	Reading Level	Measurement Level	Limits
MHz	Loss	Factor	Line1	Line1	
	dB	dB	dBuV	dBuV	dBuV
* 0.151	0.00	0.10	51.08	51.18	65.95
0.227	0.02	0.10	41.52	41.64	62.57
0.397	0.05	0.10	30.21	30.36	57.92
0.541	0.07	0.10	26.92	27.09	56.00
1.652	0.13	0.12	22.57	22.82	56.00
17.779	0.34	0.41	22.04	22.79	60.00

Average:

0.151	0.00	0.10	32.90	33.00	55.94
0.227	0.02	0.10	25.20	25.32	52.56
0.397	0.05	0.10	11.40	11.55	47.92
0.541	0.07	0.10	13.10	13.27	46.00
1.651	0.13	0.12	7.90	8.15	46.00
17.780	0.34	0.41	20.70	21.45	50.00

Remarks :

1. " * " means that this data is the worst emission level.



CONDUCTED EMISSION DATA

Date of Test : Nov. 17, 1999 EUT : Scanner
 Test Mode : Mode 1 Detect Mode : Quasi-Peak & Average

Frequency	Cable Loss	LISN Factor	Reading Level	Measurement Level	Limits
MHz	dB	dB	Line2 dBuV	Line2 dBuV	dBuV
* 0.156	0.00	0.10	49.88	49.98	65.66
0.171	0.01	0.10	47.22	47.33	64.89
0.295	0.04	0.10	36.24	36.38	60.37
0.358	0.05	0.10	33.66	33.81	58.78
2.109	0.15	0.13	30.94	31.22	56.00
17.111	0.34	0.39	25.57	26.30	60.00

Average:

0.156	0.00	0.10	30.30	30.40	55.67
0.171	0.01	0.10	28.40	28.51	54.91
0.295	0.04	0.10	19.40	19.54	50.38
0.358	0.05	0.10	15.90	16.05	48.77
2.109	0.15	0.13	14.20	14.48	46.00
17.110	0.34	0.39	24.40	25.13	50.00

Remarks :

1. " * " means that this data is the worst emission level.

CONDUCTED EMISSION DATA

Date of Test : Nov. 17, 1999 EUT : Scanner
 Test Mode : Mode 2 Detect Mode : Quasi-Peak & Average

Frequency	Cable	LISN	Reading Level	Measurement Level	Limits
MHz	Loss	Factor	Line1	Line1	
	dB	dB	dBuV	dBuV	dBuV
* 0.151	0.00	0.10	51.54	51.64	65.94
0.201	0.02	0.10	47.93	48.05	63.55
0.340	0.04	0.10	40.29	40.43	59.21
0.742	0.08	0.10	36.16	36.34	56.00
2.613	0.16	0.14	37.66	37.96	56.00
17.554	0.34	0.40	26.44	27.18	60.00

Average:

0.151	0.00	0.10	29.10	29.20	55.94
0.201	0.02	0.10	33.60	33.72	53.57
0.340	0.04	0.10	31.90	32.04	49.20
0.742	0.08	0.10	23.90	24.08	46.00
2.613	0.16	0.14	24.90	25.20	46.00
17.553	0.34	0.40	25.10	25.84	50.00

Remarks :

1. " * " means that this data is the worst emission level.



CONDUCTED EMISSION DATA

Date of Test : Nov. 17, 1999 EUT : Scanner
 Test Mode : Mode 2 Detect Mode : Quasi-Peak & Average

Frequency	Cable Loss	LISN Factor	Reading Level	Measurement Level	Limits
MHz	dB	dB	Line2 dBuV	Line2 dBuV	dBuV
* 0.161	0.00	0.10	51.99	52.09	65.42
0.272	0.03	0.10	41.13	41.26	61.06
0.336	0.04	0.10	42.51	42.65	59.31
0.529	0.07	0.10	34.22	34.39	56.00
2.614	0.16	0.14	36.34	36.64	56.00
14.890	0.32	0.34	30.45	31.12	60.00

Average:

0.161	0.00	0.10	32.50	32.60	55.41
0.272	0.03	0.10	29.20	29.33	51.06
0.335	0.04	0.10	34.20	34.34	49.33
0.529	0.07	0.10	21.30	21.47	46.00
2.613	0.16	0.14	22.50	22.80	46.00
14.890	0.32	0.34	27.90	28.57	50.00

Remarks :

1. " * " means that this data is the worst emission level.

RADIATED EMISSION DATA

Date of Test : Nov. 17, 1999 EUT : Scanner
 Test Mode : Mode 1

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit	Ant	Turn
MHz	Loss	Factor	dB	Level	Horizontal	dB	dBuV/m	cm	deg
	dB	dB/m	dB	dBuV	dBuV/m				
* 151.337	2.32	10.90	0.00	14.76	27.98	2.02	30.00	401	19
167.339	2.47	9.59	0.00	11.89	23.94	6.06	30.00	401	19
199.249	2.78	9.30	0.00	12.71	24.79	5.21	30.00	331	194
212.006	2.91	9.13	0.00	12.76	24.80	5.20	30.00	401	182
254.000	3.31	13.06	0.00	11.75	28.12	8.88	37.00	401	87
260.670	3.37	13.95	0.00	10.94	28.27	8.73	37.00	401	79
262.000	3.38	14.08	0.00	9.53	26.99	10.01	37.00	401	87
266.670	3.43	13.64	0.00	8.95	26.02	10.98	37.00	401	88
302.000	3.77	13.18	0.00	6.03	22.98	14.02	37.00	401	48
357.323	4.05	14.45	0.00	4.35	22.86	14.14	37.00	401	67
370.672	4.12	14.84	0.00	10.57	29.53	7.47	37.00	401	128
378.003	4.16	14.85	0.00	9.21	28.22	8.78	37.00	401	86

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss

RADIATED EMISSION DATA

Date of Test : Nov. 17, 1999 EUT : Scanner
 Test Mode : Mode 1

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Measurement Vertical	Margin	Limit	Ant	Turn
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	cm	deg
* 132.046	2.13	11.49	0.00	11.72	25.35	4.65	30.00	99	162
158.666	2.39	10.38	0.00	5.68	18.45	11.55	30.00	105	151
178.000	2.58	9.18	0.00	3.38	15.14	14.86	30.00	105	194
198.070	2.77	8.97	0.00	10.32	22.06	7.94	30.00	99	122
207.360	2.86	9.42	0.00	4.26	16.54	13.46	30.00	105	80
229.337	3.06	10.13	0.00	5.56	18.76	11.24	30.00	105	170
253.590	3.31	13.01	0.00	3.20	19.52	17.48	37.00	105	35
274.668	3.50	12.74	0.00	7.99	24.23	12.77	37.00	105	43

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss

RADIATED EMISSION DATA

Date of Test : Nov. 17, 1999 EUT : Scanner
 Test Mode : Mode 2

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Measurement Horizontal	Margin	Limit	Ant	Turn
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	cm	deg
* 151.339	2.32	10.90	0.00	14.33	27.55	2.45	30.00	401	44
181.995	2.62	9.27	0.00	4.46	16.34	13.66	30.00	401	98
196.006	2.75	9.05	0.00	15.55	27.35	2.65	30.00	401	199
253.997	3.31	13.06	0.00	7.09	23.46	13.54	37.00	401	106
266.668	3.43	13.64	0.00	9.19	26.26	10.74	37.00	401	62
274.665	3.50	12.98	0.00	10.58	27.06	9.94	37.00	401	107
322.668	3.87	13.62	0.00	10.12	27.61	9.39	37.00	401	199
351.340	4.02	14.37	0.00	8.38	26.77	10.23	37.00	401	78
378.003	4.16	14.85	0.00	4.69	23.70	13.30	37.00	401	92

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss

RADIATED EMISSION DATA

Date of Test : Nov. 17, 1999 EUT : Scanner
 Test Mode : Mode 2

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Measurement Vertical	Margin	Limit	Ant	Turn
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	cm	deg
48.415	1.33	8.03	0.00	8.96	18.32	11.68	30.00	105	128
* 132.045	2.13	11.49	0.00	10.47	24.10	5.90	30.00	99	139
158.015	2.38	10.33	0.00	9.50	22.22	7.78	30.00	105	43
302.000	3.77	13.69	0.00	5.65	23.10	13.90	37.00	105	15
350.000	4.01	14.80	0.00	6.48	25.29	11.71	37.00	105	47
356.668	4.05	15.32	0.00	6.53	25.90	11.10	37.00	105	45
377.337	4.15	15.31	0.00	4.29	23.76	13.24	37.00	105	61

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss