

TEST RESULT SUMMARY

FCC PART 15 SUBPART C

Section 15.231(b)

MANUFACTURER'S NAME	Denso Corp
NAME OF EQUIPMENT	Transmitter for Remote Keyless Entry System
MODEL NUMBER	12BAN
MANUFACTURER'S ADDRESS	1-1 Showa-cho, Kariya-shi Aichi-ken, 448-8661 Japan
TEST REPORT NUMBER	W0421
TEST DATE	14 August 2000


According to testing performed at TÜV Product Service Inc, the above-mentioned unit is in compliance with the electromagnetic compatibility requirements defined in FCC Part 15. The transmitter has been certified by the FCC under FCC ID: HYQ12BAN. The transmitter is being retested due to a minor change in the layout of the printed circuit board to accommodate a new type of switch for the Switch 3 component. The test results vary by more than 3 dB from the results originally submitted, so a Class II permissive change is being requested.

It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics. Any modifications necessary for compliance made during testing on the above mentioned date(s) must be implemented in all production units for compliance to be maintained.


TÜV Product Service Inc, as an independent testing laboratory, declares that the equipment tested as specified above conforms to the requirements of FCC Part 15.

Date: 11 September 2000

Location: Taylors Falls MN
USA

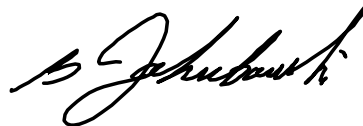

G. S. Jakubowski
Test Engineer

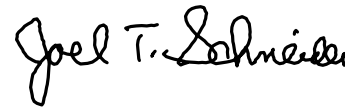

J. T. Schneider
NVLAP Signatory

EMC EMISSION - TEST REPORT

Test Report File No. : **WC1H042101** Date of issue: 11 September 2000

Model / Serial No. : **12BAN /**

Product Type : **Transmitter for Remote Keyless Entry System**

Applicant : **Denso Corp**

Manufacturer : **Denso Corp**

License holder : **Denso Corp**

Address : **1-1 Showa-cho, Kariya-shi**

: **Aichi-ken, 448-8661 Japan**

Test Result : **Positive** **Negative**

Test Project Number Reference(s) : **W0421**

Total pages including Appendices : **26**

TÜV Product Service Inc is a subcontractor to TÜV Product Service, GmbH according to the principles outlined in ISO/IEC Guide 25 and EN 45001.

TÜV Product Service Inc reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. TÜV Product Service Inc shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV Product Service Inc issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval. This report shall not be used by the client to claim product endorsement by NVLAP or any agency of the US government.

TÜV Product Service Inc and its professional staff hold government and professional organization certifications and are members of AAMI, ACIL, AEA, ANSI, IEEE, NVLAP, and VCCI

D I R E C T O R Y - E M I S S I O N S

		Page(s)
A) Documentation		
	Test report	<u>1 – 10</u>
	Directory	<u>2</u>
	Test Regulations	<u>3</u>
	Deviations from standard / Summary	<u>10</u>
	Test-setups (Photos)	<u>11 – 12</u>
	Test-setup (drawing)	<u>Appendix A</u>
B) Test data		
	Conducted emissions 10/150 kHz - 30 MHz	<u>5, 9</u>
	Radiated emissions 10 kHz - 30 MHz	<u>5, 9</u>
	Radiated emissions 30 MHz - 1000 MHz	<u>6, 9</u>
	Interference power 30 MHz - 300 MHz	<u>6, 9</u>
	Equivalent Radiated emissions 1 GHz - 18 GHz	<u>7, 9</u>
C) Appendix A		
	Test Data Sheets and Test Setup Drawing(s)	<u>A2 – A7</u>
D) Appendix B		
	Constructional Data Form	<u>B2</u>
	Product Information Form(s)	<u>B3 – B5</u>
E) Appendix C		
	Measurement Protocol	<u>C1 - C2</u>

EMISSIONS TEST REGULATIONS :

The emissions tests were performed according to following regulations:

- | | | |
|---------------------------------------------------------------------|-------------------------------------------------------------|------------------------------------|
| <input type="checkbox"/> - EN 50081-1 / 1991 | <input type="checkbox"/> - Group 1 | <input type="checkbox"/> - Group 2 |
| <input type="checkbox"/> - EN 55011 / 1991 | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |
| <input type="checkbox"/> - EN 55013 / 1990 | <input type="checkbox"/> - Household appliances and similar | |
| <input type="checkbox"/> - EN 55014 / 1987 | <input type="checkbox"/> - Portable tools | |
| | <input type="checkbox"/> - Semiconductor devices | |
| <input type="checkbox"/> - EN 55014 / A2:1990 | <input type="checkbox"/> - Household appliances and similar | |
| <input type="checkbox"/> - EN 55014 / 1993 | <input type="checkbox"/> - Portable tools | |
| | <input type="checkbox"/> - Semiconductor devices | |
| <input type="checkbox"/> - EN 55015 / 1987 | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |
| <input type="checkbox"/> - EN 55015 / A1:1990 | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |
| <input type="checkbox"/> - EN 55015 / 1993 | | |
| <input type="checkbox"/> - EN 55022 / 1987 | | |
| <input type="checkbox"/> - EN 55022 / 1994 | | |
| <input type="checkbox"/> - BS | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |
| <input type="checkbox"/> - VCCI | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |
| <input checked="" type="checkbox"/> - FCC Part 15 Section 15.231(b) | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |
| <input type="checkbox"/> - AS 3548 (1992) | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |
| <input type="checkbox"/> - CISPR 11 (1990) | <input type="checkbox"/> - Group 1 | <input type="checkbox"/> - Group 2 |
| | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |
| <input type="checkbox"/> - CISPR 22 (1993) | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |

Environmental conditions in the lab:

	<u>Actual</u>
Temperature	: 23 °C
Relative Humidity	: 68 %
Atmospheric pressure	: 98 kPa
Power supply system	: 3 VDC

Sign Explanations:

- not applicable
- applicable



Emissions Test Conditions: CONDUCTED EMISSIONS (Interference Voltage)

The *CONDUCTED EMISSIONS (INTERFERENCE VOLTAGE)* measurements were performed at the following test location:

- Test not applicable

- Wild River Lab Large Test Site (Open Area Test Site)
- Wild River Lab Small Test Site (Open Area Test Site)
- Oakwood Lab (Open Area Test Site)
- Wild River Lab Screen Room
- New Brighton Lab Shielded Room

Emissions Test Conditions: RADIATED EMISSIONS (Magnetic Field)


The *RADIATED EMISSIONS (MAGNETIC FIELD)* measurements were performed at the following test location:

- Wild River Lab Large Test Site (Open Area Test Site)
- Wild River Lab Small Test Site (Open Area Test Site)
- Oakwood Lab (Open Area Test Site)

at a test distance of :

- 3 meters
- 30 meters

- Test not applicable

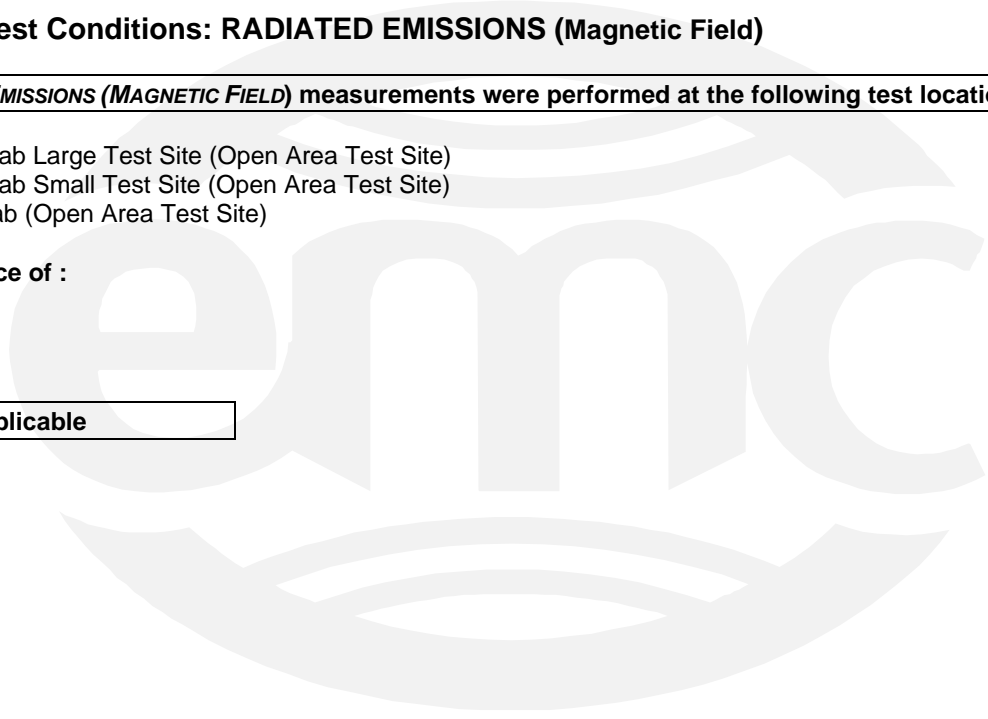

Emissions Test Conditions: RADIATED EMISSIONS (Electric Field)

The *RADIATED EMISSIONS (ELECTRIC FIELD)* measurements, in the frequency range of 30 MHz-1000 MHz, were tested in a horizontal and vertical polarization at the following test location :

- Test not applicable

- - Wild River Lab Large Test Site (Open Area Test Site) – NSA measurements made 7-00, due 7-01
- Wild River Lab Small Test Site (Open Area Test Site)
- Oakwood Lab (Open Area Test Site)

at a test distance of :

- - 3 meters
- 10 meters
- 30 meters

Test equipment used :

Model Number	Manufacturer	Description	Serial Number	Cal Due
■ - 8566B	Hewlett-Packard	Spectrum Analyzer	2221A01596	11-00
■ - 85662A	Hewlett-Packard	Analyzer Display	2152A03640	11-00
■ - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2811A01127	11-00
■ - ZHL-1042J	Mini-Circuits	Preamplifier	H072294-11	3-01
■ - EM-6917B	Electro-Metrics	Biconicalog Periodic	101	9-00

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST) and is calibrated annually.

Emissions Test Conditions: INTERFERENCE POWER

The *INTERFERENCE POWER* measurements were performed by using the absorbing clamp on the mains and interface cables in the frequency range 30 MHz - 300 MHz at the following test location :

■ - Test not applicable

- Wild River Lab Large Test Site (Open Area Test Site)
- Wild River Lab Small Test Site (Open Area Test Site)
- Oakwood Lab (Open Area Test Site)
- Wild River Lab Screen Room
- New Brighton Lab Shielded Room

Emissions Test Conditions: RADIATED EMISSIONS (Electric Field)

The *EQUIVALENT RADIATED EMISSIONS* measurements in the frequency range 1 GHz – 3.2 GHz were performed in a horizontal and vertical polarization at the following test location :

- Wild River Lab Large Test Site (Open Area Test Site)
- Wild River Lab Small Test Site (Open Area Test Site)
- Oakwood Lab (Open Area Test Site)
- Wild River Lab Screen Room

at a test distance of:

- 1 meters
- 3 meters
- 10 meters

- Test not applicable

Test equipment used :

Model Number	Manufacturer	Description	Serial Number	Cal Due
■ - 8566B	Hewlett-Packard	Spectrum Analyzer	2221A01596	11-00
■ - 85662A	Hewlett-Packard	Analyzer Display	2152A03640	11-00
■ - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2811A01127	11-00
■ - ZHL-1042J	Mini-Circuits	Preamplifier	H072294-11	3-01
■ - EM-6917B	Electro-Metrics	Biconicalog Periodic	101	9-00
■ - 3115	Electro-Mechanics (EMCO)	Ridge Guide Antenna	9001-3275	10-00

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST) and is calibrated annually.

Equipment Under Test (EUT) Test Operation Mode - Emission tests :

The device under test was operated under the following conditions during emissions testing:

- Standby
- Test program (H - Pattern)
- Test program (color bar)
- Test program (customer specific)
- Practice operation
- Normal Operating Mode
- Transmitter set up for continuous transmit.

Configuration of the device under test:

- See Constructional Data Form in Appendix B - Page B2
- See Product Information Form in Appendix B - beginning on Page B3

The following peripheral devices and interface cables were connected during the measurement:

- _____ Type : _____
- _____ Type : _____
- _____ Type : _____
- _____ Type : _____
- _____ Type : _____
- _____ Type : _____
- _____ Type : _____
- _____ Type : _____
- unshielded power cable
- unshielded cables
- shielded cables MPS.No.: _____
- customer specific cables
- _____
- _____

Emission Test Results:

Conducted emissions 450 kHz - 30 MHz

The requirements are - MET - NOT MET

Minimum limit margin _____ dB at _____ MHz

Maximum limit exceeding _____ dB at _____ MHz

Remarks: _____

Radiated emissions (magnetic field) 10 kHz - 30 MHz

The requirements are - MET - NOT MET

Minimum limit margin _____ dB at _____ MHz

Maximum limit exceeding _____ dB at _____ MHz

Remarks: _____

Radiated emissions (electric field) 30 MHz - 1000 MHz

The requirements are - MET - NOT MET

Minimum limit margin for fundamental _____ 0.3 dB at _____ 314.4 MHz

Minimum limit margin for harmonics _____ 19 dB at _____ 628.7 MHz

Remarks: The fundamental was measured to be 81.2 dBuV/m in peak mode, minus the duty cycle correction factor of 6 dB to get an average level of 75.2 dBuV/m (5754 uV/m) compared to an average limit of 75.5 dBuV/m (5956 uV/m). The second harmonic was measured to be 42.4 dBuV/m in peak mode, minus the duty cycle correction factor of 6 dB to get an average level of 36.4 dBuV/m (66 uV/m) compared to an average limit of 55.5 dBuV/m (595 uV/m). These levels compare favorably with those presented in original submittal.

Interference Power at the mains and interface cables 30 MHz - 300 MHz

The requirements are - MET - NOT MET

Minimum limit margin _____ dB at _____ MHz

Maximum limit exceeding _____ dB at _____ MHz

Remarks: _____

Radiated emissions 1 GHz – 3.2 GHz

The requirements are - MET - NOT MET

Minimum limit margin _____ 7 dB at _____ 1571.8 MHz

Maximum limit exceeding _____ dB at _____ MHz

Remarks: The fifth harmonic was measured to be 53.0 dBuV/m in peak mode, minus the duty cycle correction factor of 6 dB to get an average level of 47.0 dBuV/m (223 uV/m) compared to an average limit of 54 dBuV/m (500 uV/m). This level is 9 dB higher than the level presented in the original submittal.

DEVIATIONS FROM STANDARD:

None.

GENERAL REMARKS:

The transmitter sends 10 pulses of 1.6 msec width and 42 pulses of 0.8 msec width over a 100 msec span, which translates to 49.6 milliseconds on time in 100 milliseconds. $20 \log 49.6/100$ yields a duty cycle correction factor of -6 dB. Pages A6-A7 of A7 illustrate these pulses. The bandwidth of the fundamental must be less than 0.25% of the fundamental frequency, or 786 kHz. Page A5 of A7 shows the bandwidth to be less than 100 kHz.

SUMMARY:

The requirements according to the technical regulations are

- met
- **not** met.


The device under test does

- fulfill the general approval requirements mentioned on page 3.
- **not** fulfill the general approval requirements mentioned on page 3.

Testing Start Date: 14 August 2000

Testing End Date: 14 August 2000

- TÜV PRODUCT SERVICE INC -

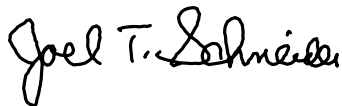


J. T. Schneider
NVLAP Signatory



Tested By:
G. S. Jakubowski


Test-setup photo(s):
Conducted emission 10/150 kHz - 30 MHz

Not Applicable

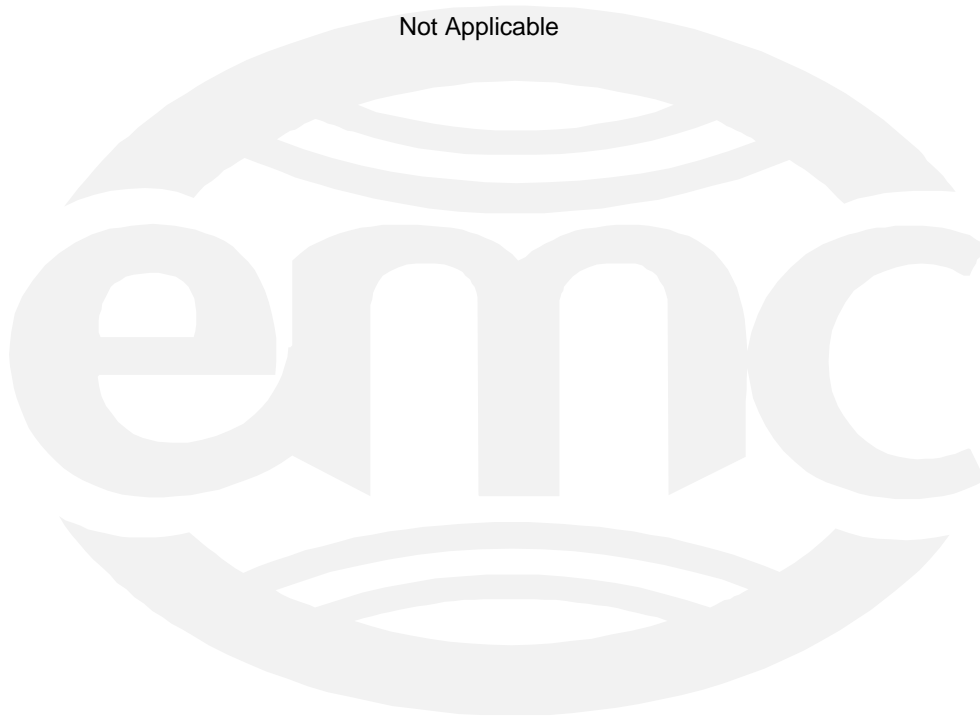


Test-setup photo(s):
Radiated emission 30 MHz - 3200 MHz

See Test- Setup Exhibit

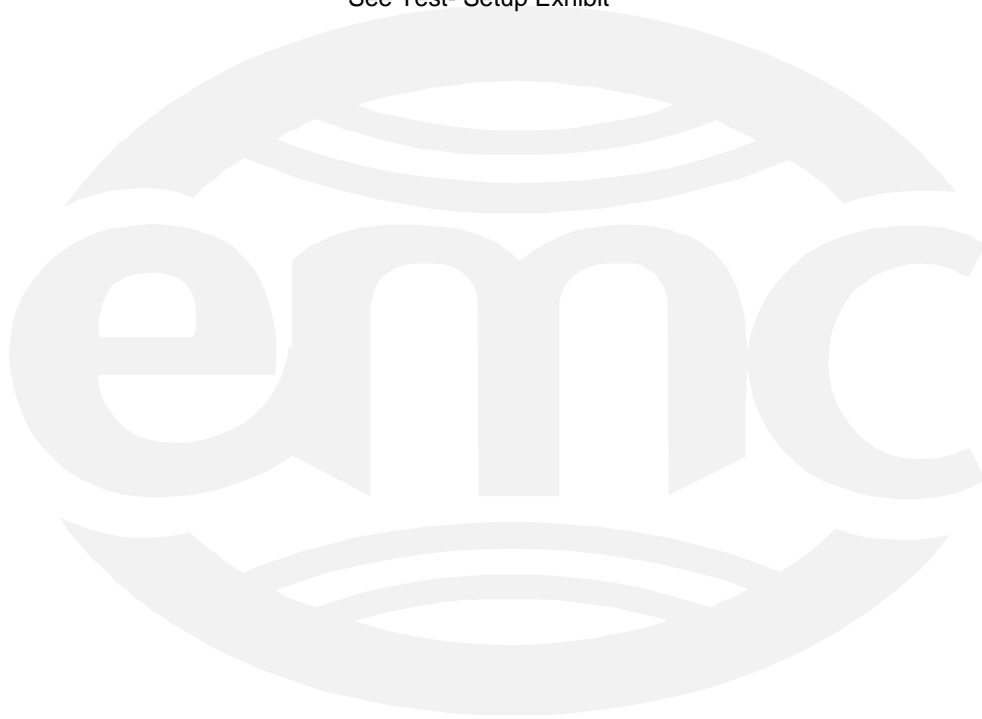

Appendix A

Test Data Sheets
and
Test Setup Drawing(s)

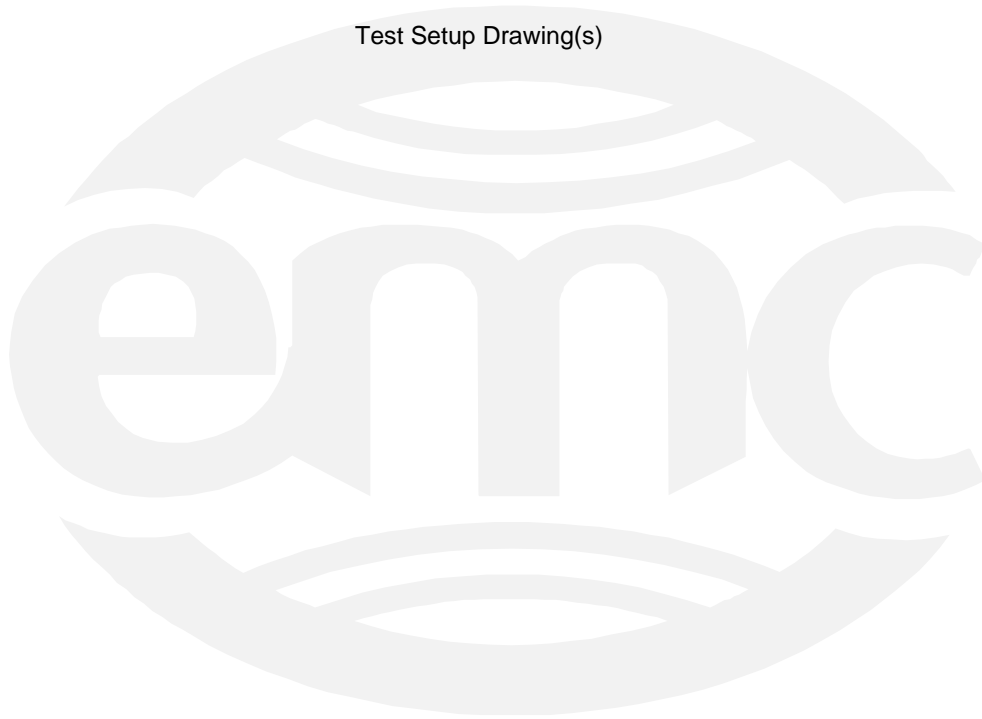

TEST SETUP FOR EMISSIONS TESTING

WILD RIVER LAB
Large Test Site

See Test-Setup Exhibit



File No. WC1H042101, Page A2 of A7

Radiated Electromagnetic Emissions

Test Report #:	W0421 Run 02	Test Area:	LTS 3m	Temperature:	23	°C
Test Method:	FCC Part 15 C 15.231	Test Date:	14-Aug-2000	Relative Humidity:	68	%
EUT Model #:	12BAN	EUT Power:	3VDC internal battery	Air Pressure:	98	kPa
EUT Serial #:				Page:	1 of 2	
Manufacturer:	DENSO					
EUT Description:	Keyless Entry Transmitter					
Notes:	RBW & VBW = 100 kHz below 1000 MHz					
	RBW & VBW = 1 MHz above 1000 MHz					

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB) (dB/m) (dB)	FINAL Peak (dBuV/m)	POL / HGT / AZ (m) (DEG)	Final Average (dBuV/m)	15.231(b) limit (dBuV/m)
All readings maximized – EUT on its back						
314.35	71.9 Pk	2.1 / 13.7 / 25.9	61.8	V / 2.6 / 23.0	55.8	75.5
314.35	91.3 Pk	2.1 / 13.7 / 25.9	81.2	H / 1.0 / 297.0	75.2	75.5
EUT Upright						
314.35	85.8 Pk	2.1 / 13.7 / 25.9	75.7	H / 1.4 / 0.0	69.7	75.5
314.35	88.0 Pk	2.1 / 13.7 / 25.9	77.8	V / 1.7 / 277.0	71.8	75.5
EUT on its side						
314.35	87.0 Pk	2.1 / 13.7 / 25.9	76.9	V / 1.7 / 96.0	70.9	75.5
314.35	87.0 Pk	2.1 / 13.7 / 25.9	76.9	H / 1.4 / 0.0	70.9	75.5
Following measurements with EUT on its back						
628.70	46.1 Pk	2.8 / 19.6 / 26.1	42.4	H / 1.1 / 304.0	36.4	55.5
943.06	39.3 Pk	3.5 / 22.0 / 25.6	39.2	H / 1.0 / 137.0	33.2	55.5
1257.47	39.1 Pk	4.0 / 24.5 / 25.2	42.5	H / 1.1 / 271.0	36.5	55.5
1571.82	46.1 Pk	4.8 / 27.6 / 25.5	53.0	V / 1.0 / 18.0	47.0	54.0
1886.17	33.1 Pk	6.3 / 28.2 / 25.9	41.7	H / 1.3 / 79.0	35.7	55.5
2829.22	36.1 Pk	5.9 / 30.9 / 26.6	46.4	H / 1.1 / 7.0	40.4	54.0
No other significant emissions detected						
Horizontal/Vertical, 1 to 4 meters high, 0 to 360 degrees						
30 to 3150 MHz						

Radiated Electromagnetic Emissions


Test Report #:	W0421 Run 02	Test Area:	LTS 3m	Temperature:	23	°C
Test Method:	FCC Part 15 C 15.231	Test Date:	14-Aug-2000	Relative Humidity:	68	%
EUT Model #:	12BAN	EUT Power:	3VDC internal battery	Air Pressure:	98	kPa
EUT Serial #:				Page:	2 of 2	
Manufacturer:	DENSO					
EUT Description:	Keyless Entry Transmitter					
Notes:	RBW & VBW = 100 kHz below 1000 MHz					
	RBW & VBW = 1 MHz above 1000 MHz					

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB) (dB/m) (dB)	FINAL Average (dBuV/m)	POL / HGT / AZ (m) (DEG)	15.231(b) limit (dBuV/m)	DELTA from limit DB
---------------	-----------------	------------------------------------------	------------------------------	--------------------------------	-----------------------------	------------------------

***** MEASUREMENT SUMMARY *****						
314.35	91.3 Pk	2.1 / 13.7 / 25.9	75.2	H / 1.0 / 297.0	75.5	-0.3
628.70	46.1 Pk	2.8 / 19.6 / 26.1	36.4	H / 1.1 / 304.0	55.5	-19.1
943.06	39.3 Pk	3.5 / 22.0 / 25.6	33.2	H / 1.0 / 137.0	55.5	-22.3
1257.47	39.1 Pk	4.0 / 24.5 / 25.2	36.5	H / 1.1 / 271.0	55.5	-19.0
1571.82	46.1 Pk	4.8 / 27.6 / 25.5	47.0	V / 1.0 / 18.0	54.0	-7.0
1886.17	33.1 Pk	6.3 / 28.2 / 25.9	35.7	H / 1.3 / 79.0	55.5	-19.8
2829.22	36.1 Pk	5.9 / 30.9 / 26.6	40.4	H / 1.1 / 7.0	54.0	-13.6

MKR 50.00 msec
30.00 dBµV

HP REF 80.0 dBµV ATTEN 10 dB

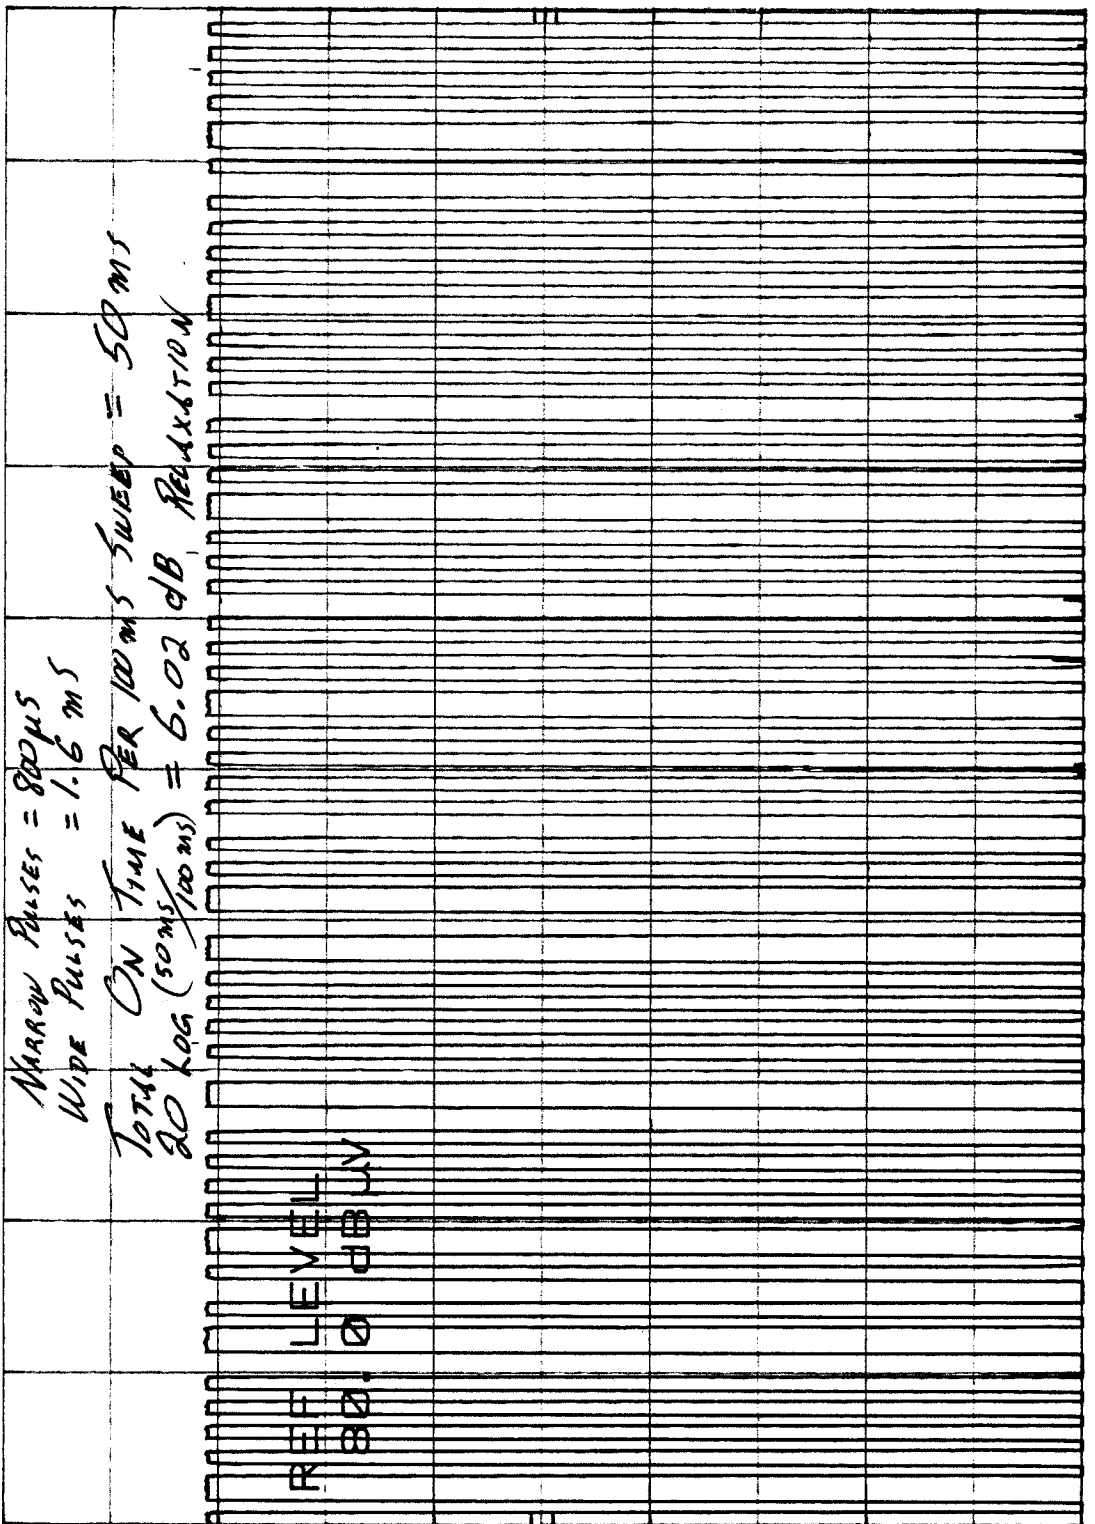

5 dB/

POS PK

CORR'D

CENTER 314.270 480 MHz OFS -70.000 KHZ
RES BW 100 KHZ VBW 1 MHz
SPAN 0 HZ
SWP 100 msec

MKR 10.00 msec
25.00 dB μ V


hp REF 75.0 dB μ V ATTEN 10 dB

5 dB/


POS PK

CORR'D

REF LEVEL
75.0 dB μ V

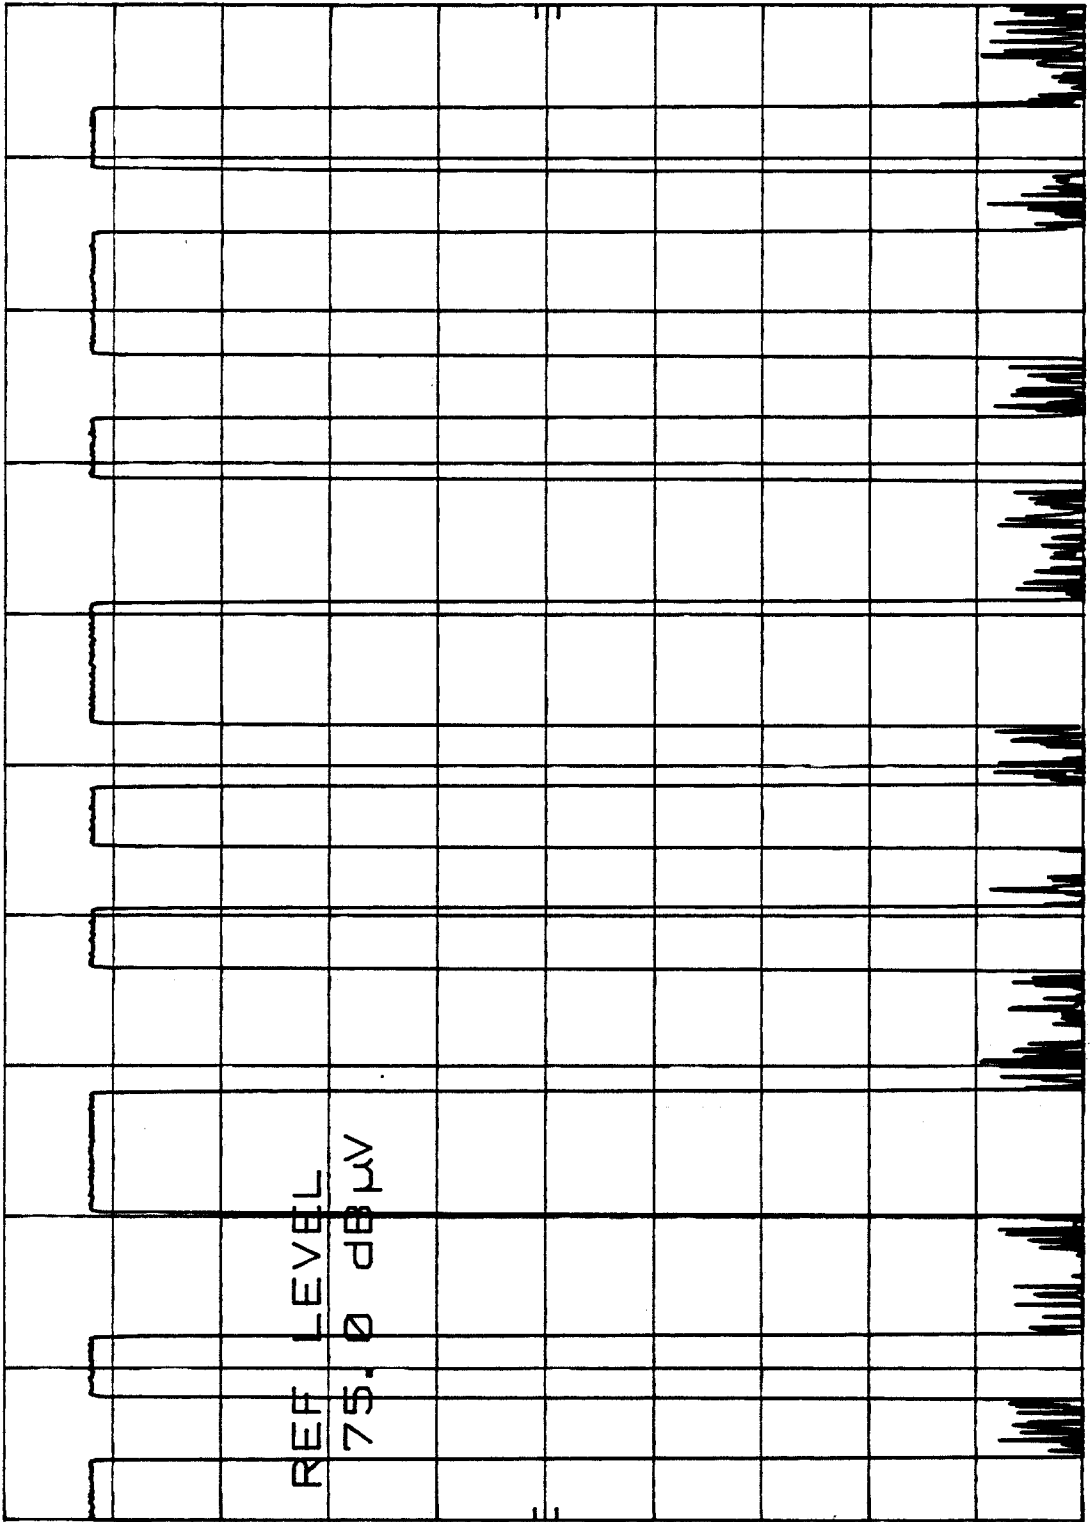


CENTER 314.270 480 MHZ OFS -70.000 KHZ
RES BW 100 KHZ VBW 1 MHZ
SPAN 0 HZ
SWP 20.0 msec

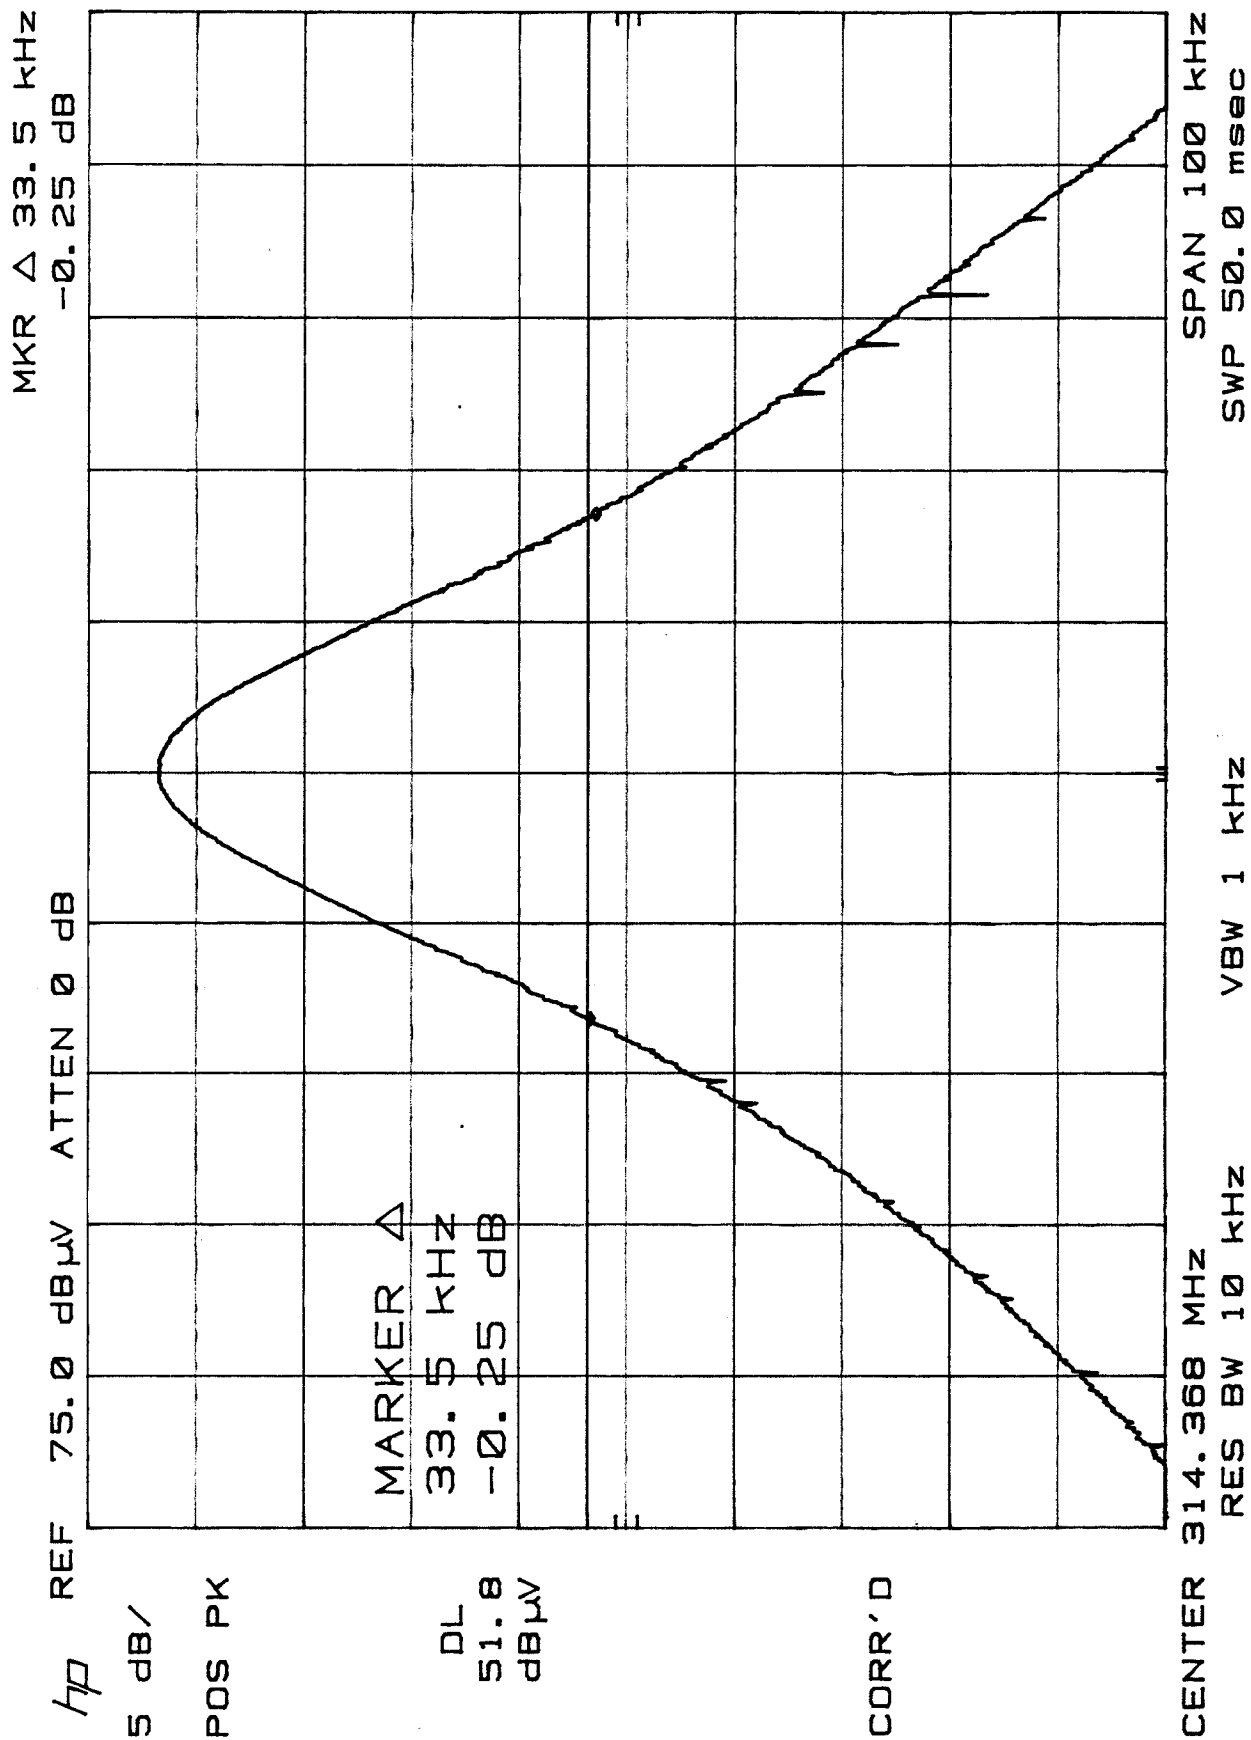

Appendix B

Constructional Data Form
and
Product Information Form(s)

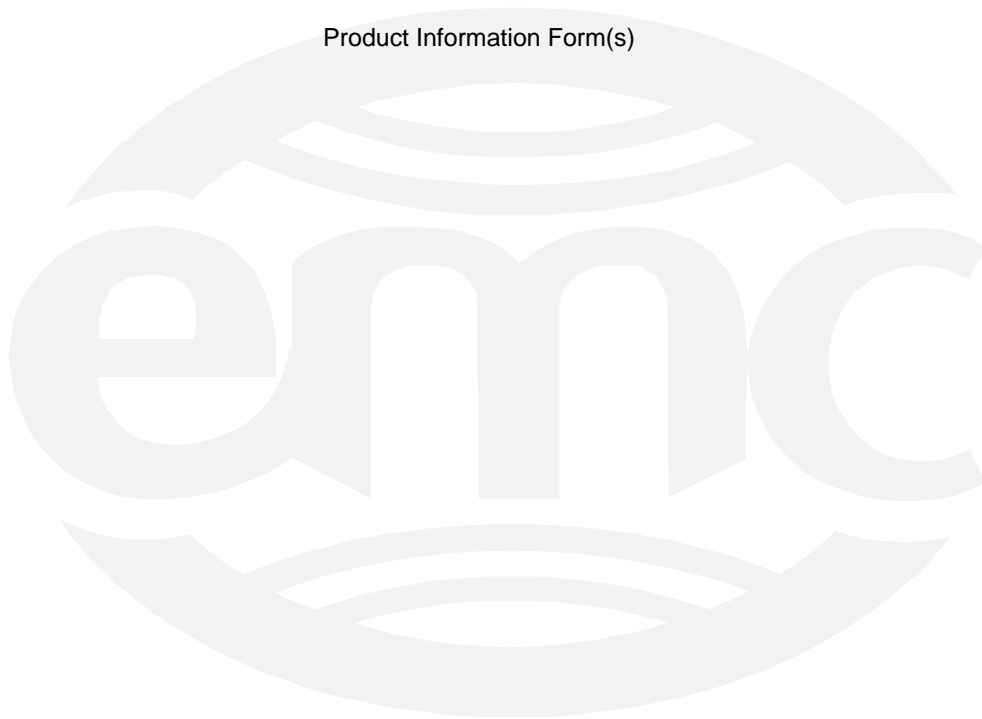

Constructional Data Form



Technical Description of the system

Type number

- Transmitter :12BAN

Specifications of transmitter

- Nominal frequency :314.35 MHz
- Oscillator frequency :314.35 MHz SAW resonator circuit
:1 MHz CR oscillator circuit
- Type of modulation :A1D
- Power supply
- Nominal supply voltage :3 VDC
- Type of battery :One lithium battery
- Antenna :Built-in type (fixed)

Description of the system operation

This system is mainly used for locking or unlocking the doors of the vehicle. The transmitter sends a radio wave signal while the button is pushed. The receiver becomes active in response to the signal from the transmitter.

Installation in vehicle

The receiver is installed inside the vehicle.

Summary of change for 12BAN

1. Changed Component

The following parts are changed. Also the slightly pattern around the switch is changed.

Item	Part name	Before	After
Switch 3	Switch	Photo1	Photo2

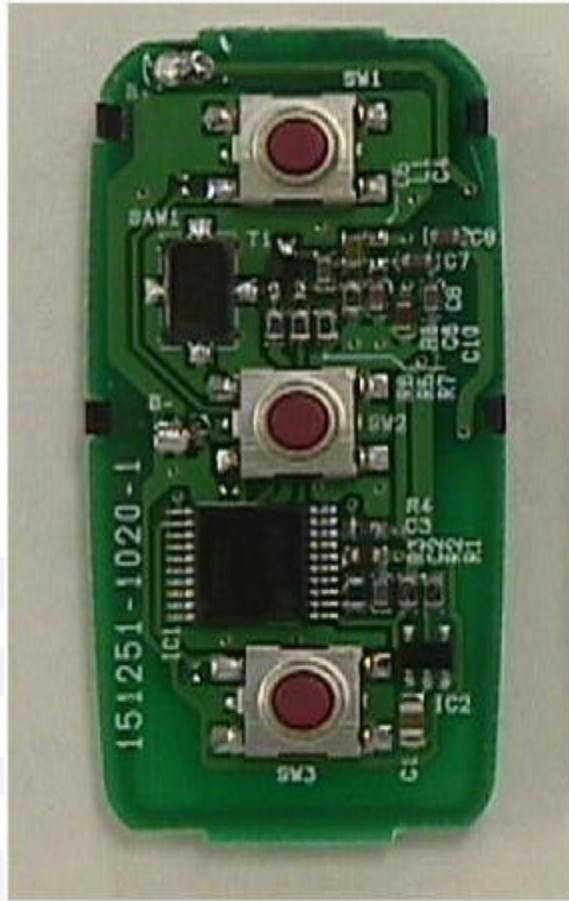


Photo 1

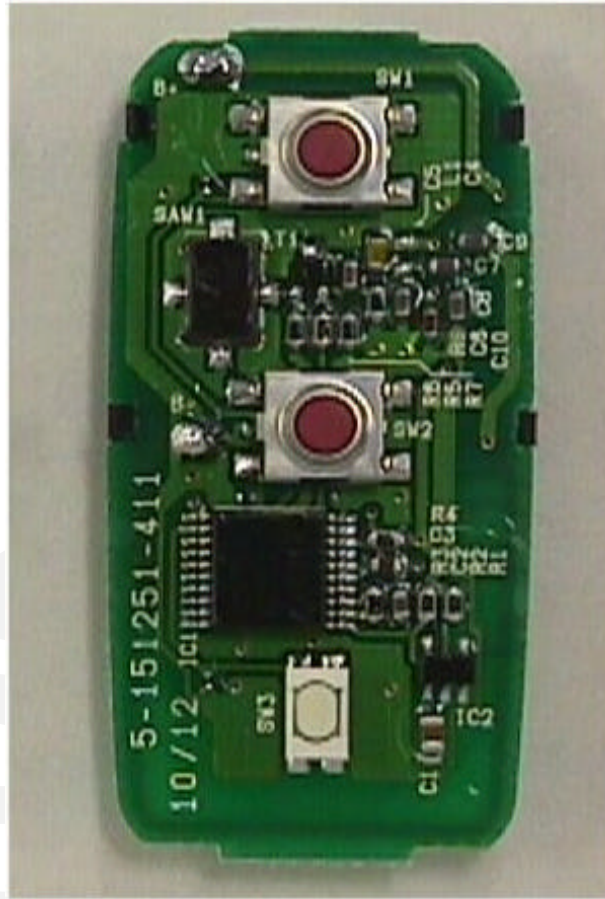


Photo 2

Appendix C

MEASUREMENT PROTOCOL

GENERAL INFORMATION

In compliance with FCC Docket 92-152, "Harmonization of Rules for Digital Devices Incorporate International Standards", testing for FCC compliance may be done following the ANSI C63.4-1992 procedures and using the CISPR 22 Limits.

Measurement Uncertainty

The test system for conducted emissions is defined as the LISN, tuned receiver or spectrum analyzer, and coaxial cable. The test system for radiated emissions is defined as the antenna, the pre-amplifier, the spectrum analyzer and the coaxial cable. These test systems have a measurement uncertainty of ± 4.5 dB. The equipment comprising the test systems are calibrated on an annual basis.

Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into it's characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum emissions from the unit.

CONDUCTED EMISSIONS

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the FCC limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

RADIATED EMISSIONS

The final level, expressed in dB μ V/m, is arrived at by taking the reading from the spectrum analyzer (Level dB μ V) and adding the antenna correction factor and cable loss factor, and subtracting the preamplifier gain, to it. This result then has the duty cycle correction factor subtracted from it to provide the final average reading.

Example:

FREQ (MHz)	LEVEL (dB μ V)	CABLE/ANT/PREAMP (dB)	FINALPk (dB)	FINALPk (dB μ V/m)	POL/HGT/AZ (m) (deg)	FINALAv/dBuV/m 15.231(c)
314.4	86.2Pk +	2.1 + 13.7 - 25.9 =	76.1		V 1.0 0.0	70.1

DETAILS OF TEST PROCEDURES

General Standard Information

The test methods used comply with ANSI C63.4-1992 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

Conducted Emissions

Conducted emissions on the 60 Hz power interface of the EUT are measured in the frequency range of 450 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection, and a Line Impedance Stabilization Network (LISN), with 50 Ω /50 μ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeters above the floor and is positioned 40 centimeters from the vertical ground plane (wall) of the screen room. In some cases, a pre-scan using a spectrum analyzer is initially performed on the units comprising the system under test to locate the highest emissions. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are re-measured using a tuned receiver or spectrum analyzer with quasi-peak and average detection and recorded on the data sheets.

Radiated Emissions

Radiated emissions from the EUT are measured in the frequency range of 30 to 1000 MHz using a spectrum analyzer and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection and measurements above 1000 MHz are made with a 1 MHz/6 dB bandwidth and peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimeters above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Interface cables that are closer than 40 centimeters to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimeters from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna is positioned 3 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarizations and the EUT are rotated 360 degrees. Intentional radiators are rotated through three orthogonal axes to determine the attitude that maximizes the emissions.