

APPENDIX 2: Data of EMI test

Radiated Emission


DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 3 Semi Anechoic Chamber
Date : 2009/10/26

Company : DENSO CORPORATION
Kind of EUT : Tire Pressure Monitoring System (Receiver)
Model No. : 13BDK
Serial No. : 1
Report No. : 30CE0101-HO-01
Power : DC 12.0 V
Temp./Humi. : 22deg. C. / 61%
Engineer : Tomohisa Nakagawa

Mode / Remarks : Receiving mode

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
All other spurious emissions were less than 20dB for the limit.

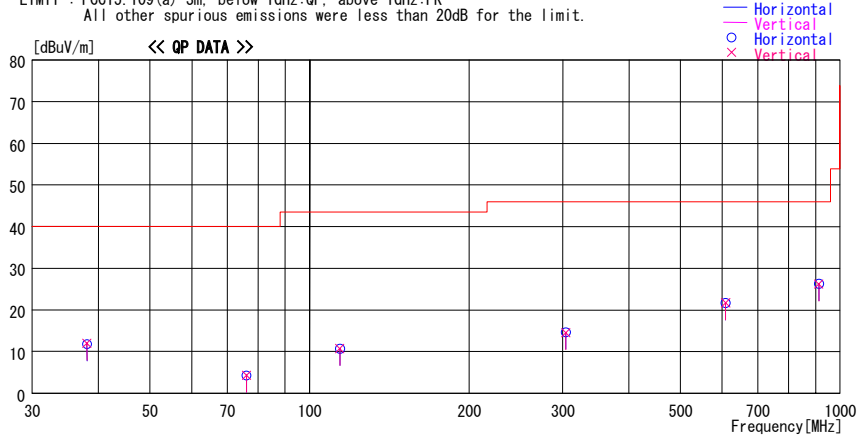

Frequency [MHz]	Reading [dBuV]	DET	Antenna Factor [dB/m]	Loss Gain [dB]	Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
38.035	22.1	QP	14.7	-25.0	11.8	0	100	Hori.	40.0	28.2	
38.035	22.3	QP	14.7	-25.0	12.0	0	100	Vert.	40.0	28.0	
76.070	22.5	QP	6.1	-24.3	4.3	0	100	Hori.	40.0	35.7	
76.070	22.5	QP	6.1	-24.3	4.3	0	100	Vert.	40.0	35.7	
114.105	22.4	QP	12.1	-23.8	10.7	0	100	Hori.	43.5	32.8	
114.105	22.4	QP	12.1	-23.8	10.7	0	100	Vert.	43.5	32.8	
304.280	21.9	QP	14.8	-22.1	14.6	0	100	Hori.	46.0	31.4	
304.280	21.8	QP	14.8	-22.1	14.5	0	100	Vert.	46.0	31.5	
608.560	22.0	QP	19.8	-20.1	21.7	0	100	Hori.	46.0	24.3	
608.560	22.0	QP	19.8	-20.1	21.7	0	100	Vert.	46.0	24.3	
912.840	21.6	QP	22.2	-17.5	26.3	0	100	Hori.	46.0	19.7	
912.840	21.5	QP	22.2	-17.5	26.2	0	100	Vert.	46.0	19.8	

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

*The limit is rounded down to one decimal place.
*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Emission

DATA OF RADIATED EMISSION TEST


UL Japan, Inc. Head Office EMC Lab. No. 3 Semi Anechoic Chamber
Date : 2009/10/26

Company : DENSO CORPORATION
Kind of EUT : Tire Pressure Monitoring System (Receiver)
Model No. : 13BDK
Serial No. : 1

Report No. : 30CE0101-HO-01
Power : DC 12.0 V
Temp./Humi. : 21deg.C / 53%
Engineer : Tomohisa Nakagawa

Mode / Remarks : Receiving mode

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

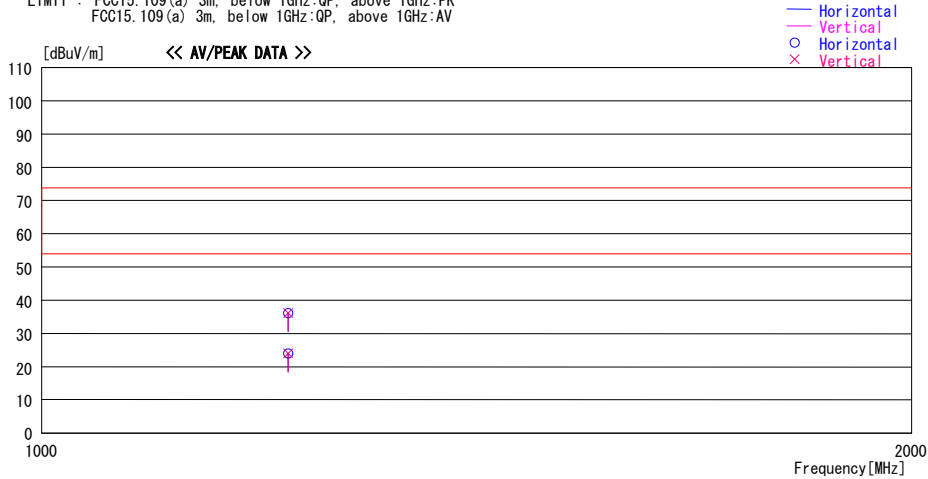

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Angle [Deg.]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Loss & Gain [dB]							
1217.120	43.4	PK	24.9	-32.2	36.1	0	100	Hori.	73.9	37.8	
1217.120	43.5	PK	24.9	-32.2	36.2	0	100	Vert.	73.9	37.7	
1217.120	31.3	AV	24.9	-32.2	24.0	0	100	Hori.	53.9	29.9	
1217.120	31.3	AV	24.9	-32.2	24.0	0	100	Vert.	53.9	29.9	

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

*The limit is rounded down to one decimal place.
*The test result is rounded off to one or two decimal places, so some differences might be observed.

APPENDIX 3: Test instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-03	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE	2009/02/02 * 12
MOS-13	Thermo-Hygrometer	Custom	CTH-180	-	RE	2009/02/06 * 12
MJM-06	Measure	PROMART	SEN1955	-	RE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE	-
MSA-09	Spectrum Analyzer	Advantest	R3273	95090115	RE	2008/12/24 * 12
MTR-08	Test Receiver	Rohde & Schwarz	ESCI	100767	RE	2009/06/30 * 12
MBA-03	Biconical Antenna	Schwarzbeck	BBA9106	1915	RE	2009/01/19 * 12
MLA-03	Logperiodic Antenna	Schwarzbeck	USLP9143	174	RE	2009/01/10 * 12
MCC-51	Coaxial cable	UL Japan	-	-	RE	2009/07/02 * 12
MAT-09	Attenuator(6dB)	Weinschel Corp	2	BK7973	RE	2008/11/14 * 12
MPA-13	Pre Amplifier	SONOMA INSTRUMENT	310	260834	RE	2009/03/18 * 12
MHA-20	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	258	RE	2009/04/30 * 12
MCC-56	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX104	174410(1m) / 284655(5m)	RE	2009/01/07 * 12
MPA-11	MicroWave System Amplifier	Agilent	83017A	MY39500779	RE	2009/03/19 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item:

RE: Radiated emission

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124