



# RADIO TEST REPORT

Test Report No. : 11358922H-A-R1

**Applicant** : DENSO CORPORATION  
**Type of Equipment** : Smart Card Key  
**Model No.** : 14CBG  
**Test regulation** : FCC Part 15 Subpart C: 2016  
**FCC ID** : HYQ14CBG  
**Test Result** : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. This report is a revised version of 11358922H-A. 11358922H-A is replaced with this report.

**Date of test:** July 13, 2016

**Representative test engineer:** T. Nakagawa  
Tomohisa Nakagawa  
Engineer  
Consumer Technology Division

**Approved by:** M. Imura  
Motoya Imura  
Engineer  
Consumer Technology Division



This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation. \*As for the range of Accreditation in NVLAP, you may refer to the WEB address, [http://japan.ul.com/resources/emc\\_accredited/](http://japan.ul.com/resources/emc_accredited/)



---

<b>CONTENTS</b>	<b>PAGE</b>
<b>SECTION 1: Customer information</b> .....	<b>4</b>
<b>SECTION 2: Equipment under test (E.U.T.)</b> .....	<b>4</b>
<b>SECTION 3: Test specification, procedures &amp; results</b> .....	<b>5</b>
<b>SECTION 4: Operation of E.U.T. during testing</b> .....	<b>8</b>
<b>SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission)</b> .....	<b>10</b>
<b>SECTION 6: Automatically deactivate</b> .....	<b>11</b>
<b>SECTION 7: -20dB and 99% Occupied Bandwidth</b> .....	<b>11</b>
<b>APPENDIX 1: Test data</b> .....	<b>12</b>
Automatically deactivate.....	12
Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission).....	13
-20dB and 99% Occupied Bandwidth.....	16
<b>APPENDIX 2: Test Instruments</b> .....	<b>18</b>
<b>APPENDIX 3: Photographs of test setup</b> .....	<b>19</b>
Radiated emission .....	19
Worst case position .....	20

## **SECTION 1: Customer information**

Company Name : DENSO CORPORATION  
Address : 1-1 Showa-cho, Kariya-shi, Aichi-ken, 448-8661 Japan  
Telephone Number : +81-566-61-5242  
Facsimile Number : +81-566-25-4837  
Contact Person : MASAYUKI YAMAMOTO

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Type of Equipment : Smart Card Key  
Model No. : 14CBG  
Serial No. : Refer to Clause 4.2  
Rating : DC 3.0 V  
Receipt Date of Sample : July 9, 2016  
Country of Mass-production : Japan  
Condition of EUT : Engineering prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification of EUT : No Modification by the test lab

### **2.2 Product Description**

Model No: 14CBG (referred to as the EUT in this report) is the Smart Card Key.

Radio Type : Transceiver  
Frequency of Operation : 314.35 MHz / 312.10 MHz\*  
\*These two different frequencies are not emitted simultaneously.  
Clock frequency(ies) in the system : 8 MHz (IC Clock)  
18.370 MHz (RF)  
Modulation : FSK (F1D)  
Power Supply (radio part input) : DC 3.0 V  
Type of Battery : One lithium battery  
Antenna type : Built-in type (Fixed)  
Receiving frequency of Operation : 134.2 kHz \*1)

\*1) The test of receiver part was performed separately from this test report, and the conformability is confirmed.

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### **SECTION 3: Test specification, procedures & results**

#### **3.1 Test Specification**

Test Specification : FCC Part 15 Subpart C  
FCC part 15 final revised on April 6, 2016.

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators  
Section 15.231 Periodic operation in the band 40.66 - 40.70MHz  
and above 70MHz

#### **3.2 Procedures and results**

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted emission	FCC: ANSI C63.10:2013 6 Standard test methods	FCC: Section 15.207	N/A	N/A*1)	-
	IC: RSS-Gen 8.8	IC: RSS-Gen 8.8			
Automatically Deactivate	FCC: ANSI C63.10:2013 6 Standard test methods	FCC: Section 15.231(a)(1)	N/A	Complied	Radiated
	IC: -	IC: RSS-210 A1.1.1			
Electric Field Strength of Fundamental Emission	FCC: ANSI C63.10:2013 6 Standard test methods	FCC: Section 15.231(b)	10.2 dB Horizontal PK with Duty factor (Tx 312.10 MHz)	Complied	Radiated
	IC: RSS-Gen 6.12	IC: RSS-210 A1.1.2			
Electric Field Strength of Spurious Emission	FCC: ANSI C63.10:2013 6 Standard test methods	FCC: Section 15.205 Section 15.209 Section 15.231(b)	8.4 dB 2808.900 MHz Horizontal PK with Duty factor (Tx 312.10 MHz)	Complied	Radiated
	IC: RSS-Gen 6.13	IC: RSS-210 A1.1.2, 2.5.1 RSS-Gen 8.9			
-20dB Bandwidth	FCC: ANSI C63.10:2013 6 Standard test methods	FCC: Section 15.231(c)	N/A	Complied	Radiated
	IC: -	IC: Reference data			

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.  
\*1) The test is not applicable since the EUT does not have AC Mains.

#### **FCC 15.31 (e)**

This test was performed with the New Battery (DC 3.0 V) and the constant voltage was supplied to the EUT during the tests. Therefore, the EUT complies with the requirement.

#### **FCC Part 15.203 Antenna requirement**

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### 3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99 % Occupied Bandwidth	IC: RSS-Gen 6.6	IC: RSS-210 A1.1.3	N/A	Complied	Radiated

Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

#### EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Polarity	Radiated emission (Below 1GHz)			
	(3 m*)(+dB)		(10 m*)(+dB)	
	30 – 200 MHz	200 – 1000MHz	30 – 200 MHz	200 – 1000MHz
Horizontal	4.9 dB	5.2 dB	4.9 dB	5.0 dB
Vertical	4.6 dB	5.9 dB	5.0 dB	5.0 dB

Radiated emission				
(3 m*)(+dB)		(1 m*)(+dB)		(10 m*)(+dB)
1 – 6GHz	6 – 18GHz	10 – 26.5 GHz	26.5 – 40GHz	1 -18 GHz
5.1 dB	5.3 dB	5.1 dB	5.1 dB	5.3 dB

\* Measurement distance

#### Radiated emission test (3m)

The data listed in this test report has enough margin, more than the site margin.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### 3.5 Test Location

UL Japan, Inc. Ise EMC Lab. \*NVLAP Lab. code: 200572-0  
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8999 Facsimile : +81 596 24 8124

	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	4.0 x 4.5 x 2.7m	4.0 x 4.5 m	-
No.6 measurement room	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	8.0 x 4.6 x 2.8m	2.4 x 2.4m	-
No.11 measurement room	-	6.2 x 4.7 x 3.0m	4.8 x 4.6m	-

\* Size of vertical conducting plane (for Conducted Emission test): 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

### 3.6 Test data, Test instruments, and Test set up.

Refer to APPENDIX.

## **SECTION 4: Operation of E.U.T. during testing**

### **4.1 Operating Modes**

<b>Test Item</b>	<b>Mode</b>
Automatically Deactivate	Normal use mode, 312.10 MHz *1)
Duty Cycle	Normal use mode, 314.35 MHz *1)
Electric Field Strength of Fundamental Emission	Transmitting mode (Tx), 312.10 MHz *2)
Electric Field Strength of Spurious Emission -20dB & 99% Occupied Bandwidth	Transmitting mode (Tx), 314.35 MHz *2)
<p>* The system was configured in typical fashion (as a customer would normally use it) for testing.</p> <p>*1) The EUT transmits only when it receives 134.2kHz radio signal. End users cannot change the settings of the output power of the product.</p> <p>*2) The software of this mode is the same as one of normal product, except that EUT continues to transmit when transmitter button is being pressed. This button was attached just for testing.(for making continuous transmission)</p>	

---

**UL Japan, Inc.**

**Ise EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124



## 4.2 Configuration and peripherals

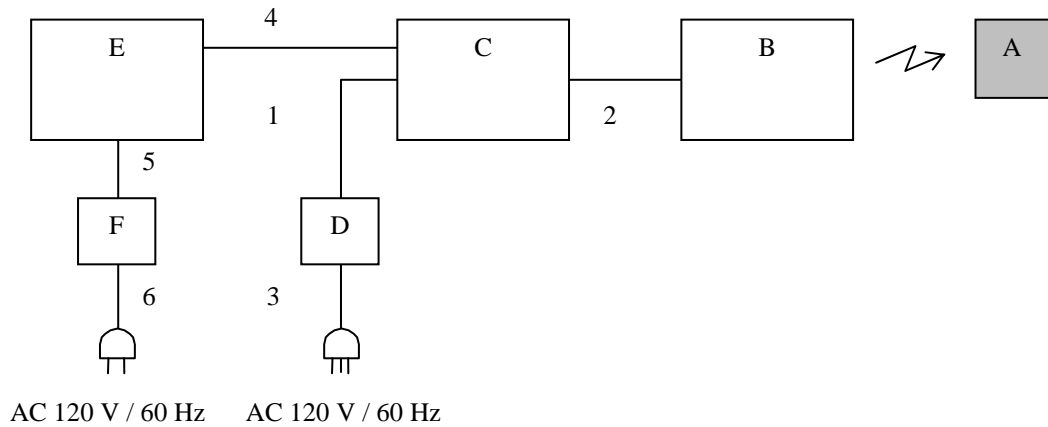

\* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

### Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Smart Card Key	14CBG	002	DENSO CORPORATION	EUT
B	Door handle unit	-	-	DENSO CORPORATION	*1)
C	Test bench	-	-	DENSO CORPORATION	*1)
D	AC Adapter	-	-	DENSO CORPORATION	*1)
E	Laptop PC	PB453JNA125A A71	8E053638H	TOSHIBA	*1)
F	AC Adapter	PA3917U- 1ACA	T02141000156 99A	TOSHIBA	*1)

\*1) Used for Normal use mode only.

### List of cables used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	DC Cable	1.5	Unshielded	Unshielded	*1)
2	DC and Signal Cable	0.8	Unshielded	Unshielded	*1)
3	AC Cable	2.0	Unshielded	Unshielded	*1)
4	USB Cable	1.8	Shielded	Shielded	*1)
5	DC Cable	1.7	Unshielded	Unshielded	*1)
6	AC Cable	0.9	Unshielded	Unshielded	*1)

\*1) Used for Normal use mode only.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

**SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission)**

**Test Procedure and conditions**

[For below 1GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength. Photographs of the set up are shown in Appendix 3.

**[Transmitting mode]  
(Below 30 MHz)**

The noise level was checked by moving a search-coil (Loop Antenna) close to the EUT.

**(Above 30 MHz)**

The Radiated Electric Field Strength has been measured on Semi anechoic chamber with a ground plane and at a distance of 3 m.

The measuring antenna height was varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization.

The radiated emission measurements were made with the following detector function of the test receiver / spectrum analyzer.

**Test Antennas are used as below;**

Frequency	Below 30 MHz	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Loop	Biconical	Logperiodic	Horn

	From 9kHz to 90kHz and From 110kHz to 150kHz	From 90kHz to 110kHz	From 150kHz to 490kHz	From 490kHz to 30MHz	From 30MHz to 1GHz	Above 1GHz
Detector Type	Peak	Peak	Peak	Peak	Peak and Peak with Duty factor	Peak and Peak with Duty factor
IF Bandwidth	200Hz	200Hz	9.1kHz	9.1kHz	120kHz	PK: S/A:RBW 1MHz, VBW 3MHz

- The carrier level (or, noise levels) was (or were) measured at each position of all three axes X, Y and Z, and the position that has the maximum noise was determined.

Noise levels of all the frequencies were measured at the position.

This EUT has two modes which mechanical key is inserted or not. The worst case was confirmed with and without mechanical key, as a result, the test with mechanical key was the worst case. Therefore the test with mechanical key was performed only.

\*The result is rounded off to the second decimal place, so some differences might be observed.

**Measurement range : 9 kHz-3.2 GHz**  
**Test data : APPENDIX**  
**Test result : Pass**

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **SECTION 6: Automatically deactivate**

### **Test Procedure**

The measurement was performed with Electric field strength using a spectrum analyzer.

**Test data** : APPENDIX  
**Test result** : Pass

## **SECTION 7: -20dB and 99% Occupied Bandwidth**

### **Test Procedure**

The test was measured with a spectrum analyzer using a test fixture.

Test	Span	RBW	VBW	Sweep	Detector	Trace	Instrument used
20 dB Bandwidth	150 kHz	1.5 kHz	5.1 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99 % Occupied Bandwidth	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak *1)	Max Hold *1)	Spectrum Analyzer

\*1) The measurement was performed with Peak detector, Max Hold since the duty cycle was not 100 %.  
Peak hold was applied as Worst-case measurement.

**Test data** : APPENDIX  
**Test result** : Pass

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124

**APPENDIX 1: Test data**

**Automatically deactivate**

Test place	Ise EMC Lab. No.4 measurement room
Report No.	11358922H
Date	07/13/2016
Temperature/ Humidity	25 deg. C / 43% RH
Engineer	Tomohisa Nakagawa
Mode	Normal use mode

Tx Freq	Time of Transmitting [sec]	Limit [sec]	Result
314.35 MHz	0.7228	5.00	Pass
312.10 MHz	0.7241	5.00	Pass

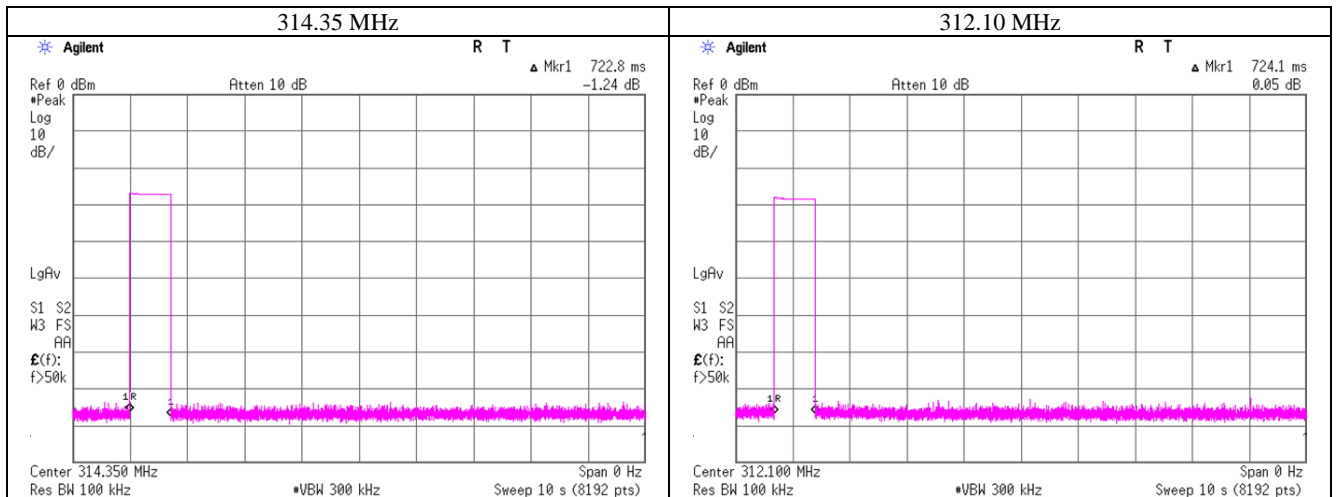

**Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)**

Test place Ise EMC Lab. No.4 Semi Anechoic Chamber  
Report No. 11358922H  
Date 07/13/2016 07/13/2016  
Temperature/ Humidity 25 deg. C / 43% RH 22 deg. C / 56% RH  
Engineer Tomohisa Nakagawa Satofumi Matsuyama  
(Below 1GHz) (Above 1GHz)  
Mode Transmitting mode 314.35MHz

**PK**

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit [dBuV/m]	Margin [dB]		Remark Inside or Outside of Restricted Bands
		Hor	Ver					Hor	Ver		Hor	Ver	
314.350	PK	73.1	70.4	13.8	9.9	31.9	-	64.9	62.2	95.5	30.6	33.3	Carrier
628.700	PK	36.8	36.2	19.3	11.7	32.2	-	35.6	35.0	75.5	39.9	40.5	Outside
943.050	PK	30.4	29.7	22.1	13.2	30.9	-	34.8	34.1	75.5	40.7	41.4	Outside
1257.400	PK	43.2	44.9	24.9	5.3	34.2	-	39.2	40.9	75.5	36.3	34.6	Outside
1571.750	PK	43.0	43.2	25.7	5.5	33.3	-	40.9	41.1	73.9	33.0	32.8	Inside
1886.100	PK	45.5	45.1	27.0	5.7	32.5	-	45.7	45.3	75.5	29.8	30.2	Outside
2200.450	PK	43.2	43.4	27.7	5.9	32.2	-	44.6	44.8	73.9	29.3	29.1	Inside
2514.800	PK	41.9	42.5	28.1	6.1	32.1	-	44.0	44.6	75.5	31.5	30.9	Outside
2829.150	PK	41.4	41.6	28.2	6.2	32.0	-	43.8	44.0	73.9	30.1	29.9	Inside
3143.500	PK	41.8	41.7	28.4	6.4	31.8	-	44.8	44.7	75.5	30.7	30.8	Outside

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

**PK with Duty factor**

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit [dBuV/m]	Margin [dB]		Remark
		Hor	Ver					Hor	Ver		Hor	Ver	
314.350	PK	73.1	70.4	13.8	9.9	31.9	0.0	64.9	62.2	75.5	10.6	13.3	Carrier
628.700	PK	36.8	36.2	19.3	11.7	32.2	0.0	35.6	35.0	55.5	19.9	20.5	Outside
943.050	PK	30.4	29.7	22.1	13.2	30.9	0.0	34.8	34.1	55.5	20.7	21.4	Outside
1257.400	PK	43.2	44.9	24.9	5.3	34.2	0.0	39.2	40.9	55.5	16.3	14.6	Outside
1571.750	PK	43.0	43.2	25.7	5.5	33.3	0.0	40.9	41.1	53.9	13.0	12.8	Inside
1886.100	PK	45.5	45.1	27.0	5.7	32.5	0.0	45.7	45.3	55.5	9.8	10.2	Outside
2200.450	PK	43.2	43.4	27.7	5.9	32.2	0.0	44.6	44.8	53.9	9.3	9.1	Inside
2514.800	PK	41.9	42.5	28.1	6.1	32.1	0.0	44.0	44.6	55.5	11.5	10.9	Outside
2829.150	PK	41.4	41.6	28.2	6.2	32.0	0.0	43.8	44.0	53.9	10.1	9.9	Inside
3143.500	PK	41.8	41.7	28.4	6.4	31.8	0.0	44.8	44.7	55.5	10.7	10.8	Outside

Sample calculation:

Result of PK = Reading + Ant Factor + Loss (Cable + Attenuator +Distance factor) - Gain (Amplifier)

Result of PK with Duty factor = Reading + Ant Factor + Loss (Cable + Attenuator + Distance factor) - Gain (Amplifier) + duty factor

For above 1GHz : Distance Factor:  $20 \times \log(4.45 \text{ m}/3.0 \text{ m}) = 3.42 \text{ dB}$

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Since the peak emission result satisfied the average limit, duty factor was omitted.

Although Duty of this product was 100% or less, the result of AV (PK with Duty factor) was calculated by applying Duty 100% as worst.

**Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)**

Test place : Ise EMC Lab. No.4 Semi Anechoic Chamber  
Report No. : 11358922H  
Date : 07/13/2016  
Temperature/ Humidity : 25 deg. C / 43% RH  
Engineer : Tomohisa Nakagawa  
Mode : Transmitting mode 312.10MHz

**PK**

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit [dBuV/m]	Margin [dB]		Remark Inside or Outside of Restricted Bands
		Hor	Ver					Hor	Ver		Hor	Ver	
312.100	PK	73.5	70.0	13.7	9.9	31.9	-	65.2	61.7	95.4	30.2	33.7	Carrier
624.200	PK	34.2	33.5	19.2	11.7	32.2	-	32.9	32.2	75.4	42.5	43.2	Outside
936.300	PK	30.6	31.3	22.0	13.2	31.0	-	34.8	35.5	75.4	40.6	39.9	Outside
1248.400	PK	43.7	44.5	24.9	5.3	34.2	-	39.7	40.5	75.4	35.7	34.9	Outside
1560.500	PK	42.2	42.4	25.6	5.5	33.3	-	40.0	40.2	73.9	33.9	33.7	Inside
1872.600	PK	44.1	44.1	27.0	5.7	32.6	-	44.2	44.2	75.4	31.2	31.2	Outside
2184.700	PK	43.1	43.7	27.7	5.9	32.2	-	44.5	45.1	75.4	30.9	30.3	Outside
2496.800	PK	42.3	43.0	28.1	6.1	32.1	-	44.4	45.1	73.9	29.5	28.8	Inside
2808.900	PK	43.1	41.6	28.2	6.2	32.0	-	45.5	44.0	73.9	28.4	29.9	Inside
3121.000	PK	42.2	42.7	28.4	6.4	31.9	-	45.1	45.6	75.4	30.3	29.8	Outside

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

**PK with Duty factor**

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit [dBuV/m]	Margin [dB]		Remark
		Hor	Ver					Hor	Ver		Hor	Ver	
312.100	PK	73.5	70.0	13.7	9.9	31.9	0.0	65.2	61.7	75.4	10.2	13.7	Carrier
624.200	PK	34.2	33.5	19.2	11.7	32.2	0.0	32.9	32.2	55.4	22.5	23.2	Outside
936.300	PK	30.6	31.3	22.0	13.2	31.0	0.0	34.8	35.5	55.4	20.6	19.9	Outside
1248.400	PK	43.7	44.5	24.9	5.3	34.2	0.0	39.7	40.5	55.4	15.7	14.9	Outside
1560.500	PK	42.2	42.4	25.6	5.5	33.3	0.0	40.0	40.2	53.9	13.9	13.7	Inside
1872.600	PK	44.1	44.1	27.0	5.7	32.6	0.0	44.2	44.2	55.4	11.2	11.2	Outside
2184.700	PK	43.1	43.7	27.7	5.9	32.2	0.0	44.5	45.1	55.4	10.9	10.3	Outside
2496.800	PK	42.3	43.0	28.1	6.1	32.1	0.0	44.4	45.1	53.9	9.5	8.8	Inside
2808.900	PK	43.1	41.6	28.2	6.2	32.0	0.0	45.5	44.0	53.9	8.4	9.9	Inside
3121.000	PK	42.2	42.7	28.4	6.4	31.9	0.0	45.1	45.6	55.4	10.3	9.8	Outside

Sample calculation:

Result of PK = Reading + Ant Factor + Loss (Cable + Attenuator +Distance factor) - Gain (Amplifier)

Result of PK with Duty factor = Reading + Ant Factor + Loss (Cable + Attenuator + Distance factor) - Gain (Amplifier) + duty factor

For above 1GHz : Distance Factor:  $20 \times \log(4.45 \text{ m}/3.0 \text{ m}) = 3.42 \text{ dB}$

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Since the peak emission result satisfied the average limit, duty factor was omitted.

Although Duty of this product was 100% or less, the result of AV (PK with Duty factor) was calculated by applying Duty 100% as worst.

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### Radiated Spurious Emission

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber	
Report No.	11358922H	
Date	07/13/2016	07/13/2016
Temperature/ Humidity	25 deg. C / 43% RH	22 deg. C / 56% RH
Engineer	Tomohisa Nakagawa (Below 1GHz)	Satofumi Matsuyama (Above 1GHz)
Mode	Transmitting mode 312.10MHz	

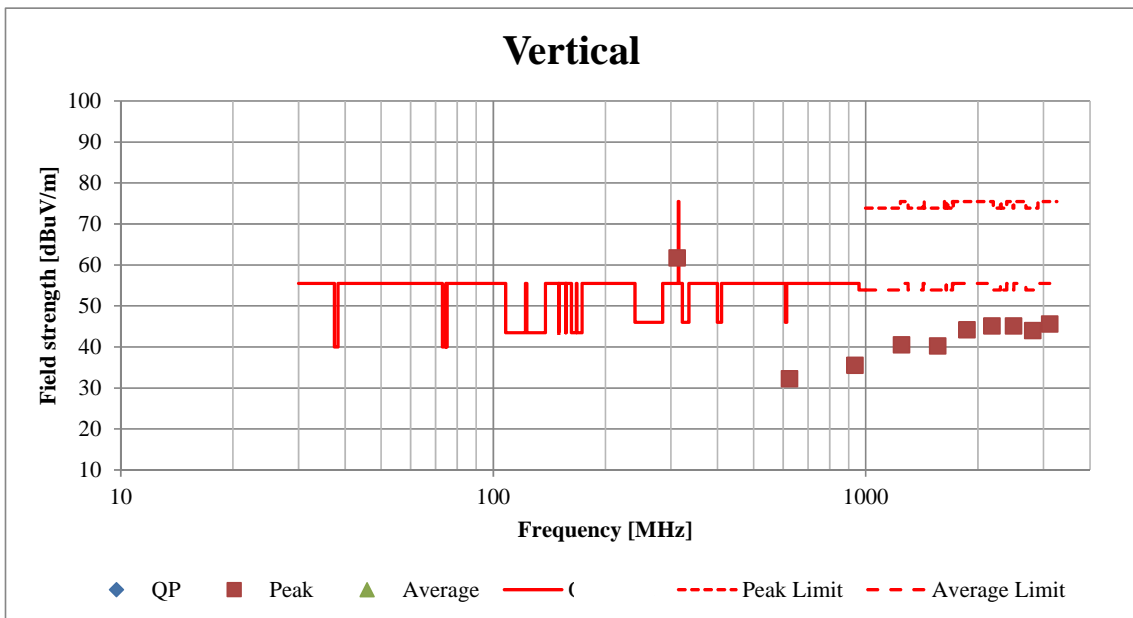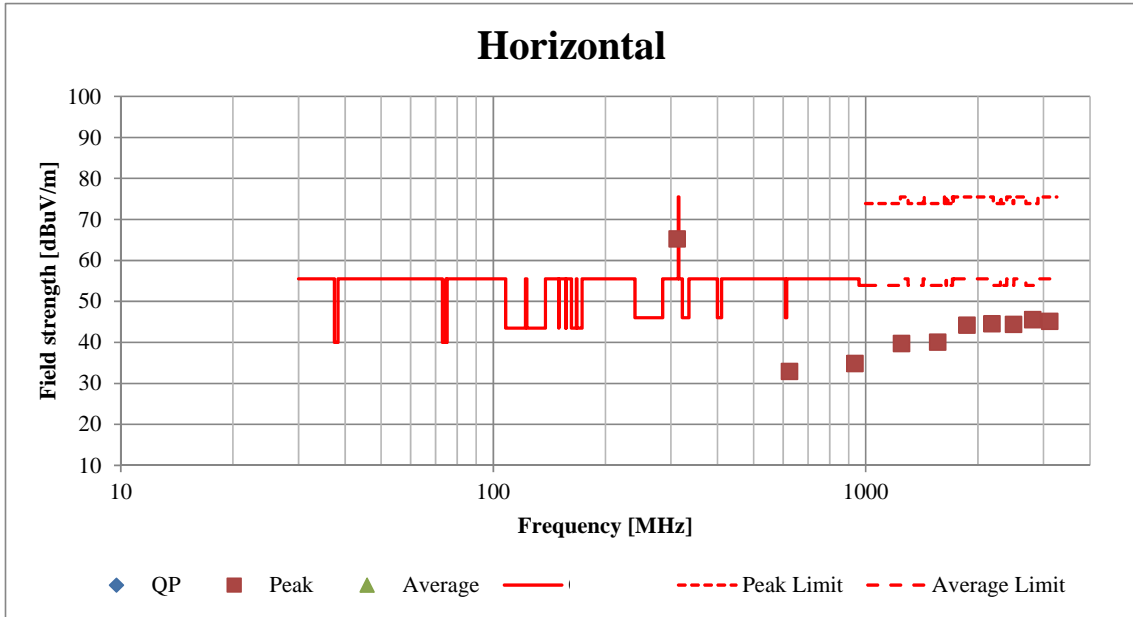

\*These plots data contains sufficient number to show the trend of characteristic features for EUT.

**-20dB and 99% Occupied Bandwidth**

Test place : Ise EMC Lab. No.4 measurement room  
Report No. : 11358922H  
Date : 07/13/2016  
Temperature/ Humidity : 25 deg. C / 24% RH  
Engineer : Tomohisa Nakagawa  
Mode : Transmitting mode 314.35MHz / 312.10MHz

Bandwidth Limit : Fundamental Frequency **312.10** MHz x 0.25% = 780.25 kHz

\* The above limit was calculated from more stringent nominal frequency.

\* Method of KDB 926416 for systems employing non sweeping frequencies was referred.

**314.35 MHz**

-20dB Bandwidth [kHz]
36.58

**312.10MHz**

-20dB Bandwidth [kHz]
36.78

-20dB Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
36.58 + 36.78 = 73.36	780.25	Pass

Bandwidth Limit : Fundamental Frequency **314.35** MHz x 0.25% = 785.88 kHz

99% Occupied Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
36.00	785.88	Pass

Bandwidth Limit : Fundamental Frequency **312.10** MHz x 0.25% = 780.25 kHz

99% Occupied Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
36.08	780.25	Pass

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124




**-20dB and 99% Occupied Bandwidth**

Test place : Ise EMC Lab. No.4 measurement room  
 Report No. : 11358922H  
 Date : 07/13/2016  
 Temperature/ Humidity : 25 deg. C / 24% RH  
 Engineer : Tomohisa Nakagawa  
 Mode : Transmitting mode 314.35MHz / 312.10MHz

[314.35MHz]

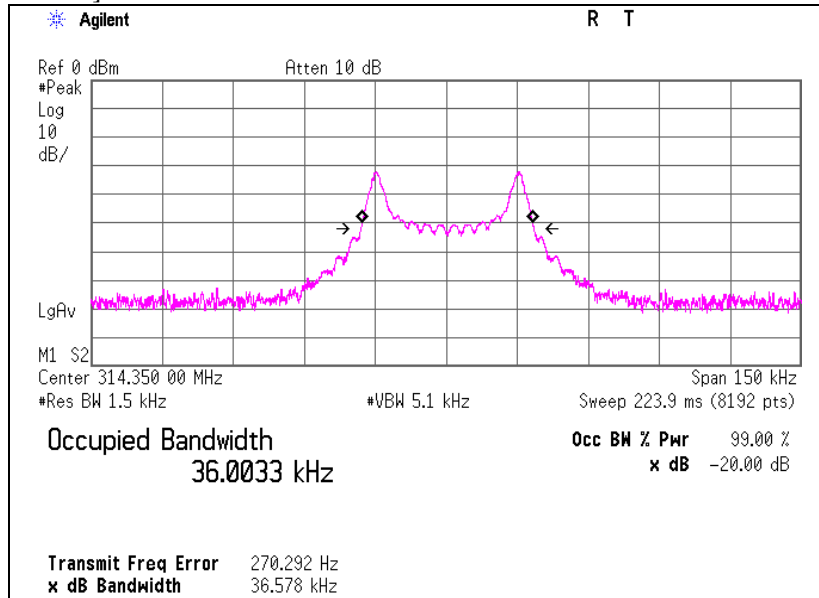

[312.10MHz]

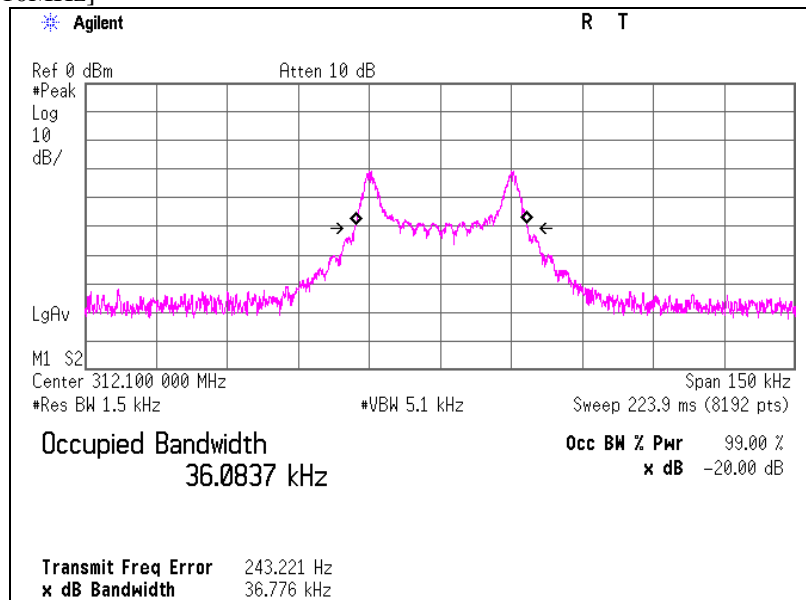

## **APPENDIX 2: Test Instruments**

### **EMI test equipment**

<b>Control No.</b>	<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Serial No</b>	<b>Test Item</b>	<b>Calibration Date * Interval(month)</b>
MAEC-04	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE	2015/10/02 * 12
MOS-15	Thermo-Hygrometer	Custom	CTH-180	1501	RE	2016/01/21 * 12
MJM-26	Measure	KOMELON	KMC-36	-	RE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE	-
MTR-10	EMI Test Receiver	Rohde & Schwarz	ESR26	101408	RE	2016/01/29 * 12
MBA-05	Biconical Antenna	Schwarzbeck	BBA9106	1302	RE	2015/11/02 * 12
MLA-23	Logperiodic Antenna(200-1000MHz)	Schwarzbeck	VUSLP9111B	911B-192	RE	2016/01/30 * 12
MCC-50	Coaxial Cable	UL Japan	-	-	RE	2016/06/20 * 12
MAT-68	Attenuator	Anritsu	MP721B	6200961025	RE	2015/11/12 * 12
MPA-14	Pre Amplifier	SONOMA INSTRUMENT	310	260833	RE	2016/03/18 * 12
MMM-10	DIGITAL HiTESTER	Hioki	3805	051201148	RE	2016/01/18 * 12
MOS-23	Thermo-Hygrometer	Custom	CTH-201	0004	RE	2015/12/08 * 12
MSA-04	Spectrum Analyzer	Agilent	E4448A	US44300523	RE	2015/11/06 * 12
MHA-21	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	9120D-557	RE	2015/08/10 * 12
MCC-141	Microwave Cable	Junkosha	MWX221	1305S002R(1m) / 1405S146(5m)	RE	2016/06/21 * 12
MPA-12	MicroWave System Amplifier	Agilent	83017A	00650	RE	2015/10/01 * 12
MLPA-07	Loop Antenna	UL Japan	-	-	RE	Pre Check

**The expiration date of the calibration is the end of the expired month.**

**All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.**

**As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.**

#### **Test Item:**

**RE: Radiated emission, 99% Occupied Bandwidth, -20dB bandwidth, and Automatically deactivate tests**

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124