




RADIO TEST REPORT


Test Report No. : 13523435H-A

Applicant : **DENSO CORPORATION**
Type of EUT : **Electronic Key**
Model Number of EUT : **14FLC**
FCC ID : **HYQ14FLC**
Test regulation : **FCC Part 15 Subpart C: 2020**
Test Result : **Complied (Refer to SECTION 3.2)**

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
8. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.
9. The information provided from the customer for this report is identified in Section 1.

Date of test: October 1, 2020

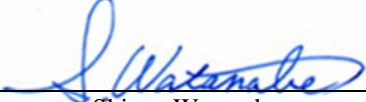Representative test engineer: 
Shinya Watanabe
Engineer
Consumer Technology Division

Approved by: 
Motoya Imura
Leader
Consumer Technology Division



CERTIFICATE 5107.02

- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
 There is no testing item of "Non-accreditation".

UL Japan, Inc.
Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8999
Facsimile : +81 596 24 8124

REVISION HISTORY

Original Test Report No.: 13523435H-A

| Revision | Test report No. | Date | Page revised | Contents |
|-----------------|-----------------|------------------|--------------|----------|
| - (Original) | 13523435H-A | October 15, 2020 | - | - |

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Reference: Abbreviations (Including words undescribed in this report)

| | | | |
|----------------|---|---------|---|
| A2LA | The American Association for Laboratory Accreditation | MCS | Modulation and Coding Scheme |
| AC | Alternating Current | MRA | Mutual Recognition Arrangement |
| AFH | Adaptive Frequency Hopping | N/A | Not Applicable |
| AM | Amplitude Modulation | NIST | National Institute of Standards and Technology |
| Amp, AMP | Amplifier | NS | No signal detect. |
| ANSI | American National Standards Institute | NSA | Normalized Site Attenuation |
| Ant, ANT | Antenna | NVLAP | National Voluntary Laboratory Accreditation Program |
| AP | Access Point | OBW | Occupied Band Width |
| ASK | Amplitude Shift Keying | OFDM | Orthogonal Frequency Division Multiplexing |
| Atten., ATT | Attenuator | P/M | Power meter |
| AV | Average | PCB | Printed Circuit Board |
| BPSK | Binary Phase-Shift Keying | PER | Packet Error Rate |
| BR | Bluetooth Basic Rate | PHY | Physical Layer |
| BT | Bluetooth | PK | Peak |
| BT LE | Bluetooth Low Energy | PN | Pseudo random Noise |
| BW | BandWidth | PRBS | Pseudo-Random Bit Sequence |
| Cal Int | Calibration Interval | PSD | Power Spectral Density |
| CCK | Complementary Code Keying | QAM | Quadrature Amplitude Modulation |
| Ch., CH | Channel | QP | Quasi-Peak |
| CISPR | Comite International Special des Perturbations Radioelectriques | QPSK | Quadri-Phase Shift Keying |
| CW | Continuous Wave | RBW | Resolution Band Width |
| DBPSK | Differential BPSK | RDS | Radio Data System |
| DC | Direct Current | RE | Radio Equipment |
| D-factor | Distance factor | RF | Radio Frequency |
| DFS | Dynamic Frequency Selection | RMS | Root Mean Square |
| DQPSK | Differential QPSK | RSS | Radio Standards Specifications |
| DSSS | Direct Sequence Spread Spectrum | Rx | Receiving |
| EDR | Enhanced Data Rate | SA, S/A | Spectrum Analyzer |
| EIRP, e.i.r.p. | Equivalent Isotropically Radiated Power | SG | Signal Generator |
| EMC | ElectroMagnetic Compatibility | SVSWR | Site-Voltage Standing Wave Ratio |
| EMI | ElectroMagnetic Interference | TR | Test Receiver |
| EN | European Norm | Tx | Transmitting |
| ERP, e.r.p. | Effective Radiated Power | VBW | Video BandWidth |
| EU | European Union | Vert. | Vertical |
| EUT | Equipment Under Test | WLAN | Wireless LAN |
| Fac. | Factor | | |
| FCC | Federal Communications Commission | | |
| FHSS | Frequency Hopping Spread Spectrum | | |
| FM | Frequency Modulation | | |
| Freq. | Frequency | | |
| FSK | Frequency Shift Keying | | |
| GFSK | Gaussian Frequency-Shift Keying | | |
| GNSS | Global Navigation Satellite System | | |
| GPS | Global Positioning System | | |
| Hori. | Horizontal | | |
| ICES | Interference-Causing Equipment Standard | | |
| IEC | International Electrotechnical Commission | | |
| IEEE | Institute of Electrical and Electronics Engineers | | |
| IF | Intermediate Frequency | | |
| ILAC | International Laboratory Accreditation Conference | | |
| ISED | Innovation, Science and Economic Development Canada | | |
| ISO | International Organization for Standardization | | |
| JAB | Japan Accreditation Board | | |
| LAN | Local Area Network | | |
| LIMS | Laboratory Information Management System | | |

| CONTENTS | PAGE |
|---|-------------|
| SECTION 1: Customer information | 5 |
| SECTION 2: Equipment under test (EUT)..... | 5 |
| SECTION 3: Test specification, procedures & results | 6 |
| SECTION 4: Operation of EUT during testing..... | 9 |
| SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission)..... | 10 |
| SECTION 6: Automatically deactivate | 12 |
| SECTION 7: -20 dB and 99 % Occupied Bandwidth | 12 |
| APPENDIX 1: Test data | 13 |
| Automatically deactivate | 13 |
| Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)..... | 14 |
| -20 dB and 99% Occupied Bandwidth..... | 17 |
| APPENDIX 2: Test instruments | 19 |
| APPENDIX 3: Photographs of test setup..... | 20 |
| Radiated emission | 20 |
| Worst case position | 22 |

SECTION 1: Customer information

Company Name : DENSO CORPORATION
Address : 1-1, Showa-cho, Kariya-shi, Aichi-ken, 448-8661, Japan
Telephone Number : +81-566-20-3955
Facsimile Number : +81-566-25-4837
Contact Person : TAKAYUKI HATTORI

The information provided from the customer is as follows;

- Applicant, Type of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
 - Operating/Test Mode(s) (Mode(s)) on all the relevant pages
 - SECTION 1: Customer information
 - SECTION 2: Equipment under test (EUT) other than the Receipt Date
 - SECTION 4: Operation of EUT during testing
- * The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment under test (EUT)

2.1 Identification of EUT

Type : Electronic Key
Model Number : 14FLC
Serial Number : Refer to SECTION 4.2
Rating : DC 3.0 V
Receipt Date : September 28, 2020
Country of Mass-production : Japan, United States of America, China
Condition of EUT : Engineering prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification : No Modification by the test lab

2.2 Product Description

Model: 14FLC (referred to as the EUT in this report) is a Electronic Key.

Radio Specification

Radio Type : Transceiver
Frequency of Operation : 312.10 MHz / 314.35 MHz*
*These two different frequencies are not emitted simultaneously.
Modulation : FSK (F1D)
Type of Battery : One lithium battery
Antenna type : Built-in type (Fixed)
Clock frequency (Maximum) : 32 MHz (Internal clock)

Radio Type : Receiver
Frequency of Operation : 134.2 kHz *1)

*1) The test of receiver part was performed separately from this test report, and the conformability is confirmed.

* Original model: 14FLC has two types; Type A and Type B.
The worst case was confirmed with Type A and Type B at pre check.
The test was performed with Type A as representative since there is no difference the worst result between those models.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
FCC Part 15 final revised on June 26, 2020 and effective July 27, 2020

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.231 Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

3.2 Procedures and results

| Item | Test Procedure | Specification | Worst margin | Results | Remarks |
|--|---|--|--|-----------------|----------|
| Conducted emission | FCC: ANSI C63.10:2013 6 Standard test methods ----- ISED: RSS-Gen 8.8 | FCC: Section 15.207 ----- ISED: RSS-Gen 8.8 | N/A | N/A | *1) |
| Automatically Deactivate | FCC: ANSI C63.10:2013 6 Standard test methods ----- ISED: - | FCC: Section 15.231(a)(1) ----- ISED: RSS-210 A1.1 | N/A | Complied a) | Radiated |
| Electric Field Strength of Fundamental Emission | FCC: ANSI C63.10:2013 6 Standard test methods ----- ISED: RSS-Gen 6.12 | FCC: Section 15.231(b) ----- ISED: RSS-210 A1.2 | 2.9 dB 312.10 MHz / 314.350 MHz Horizontal PK with Duty Factor | Complied# b) | Radiated |
| Electric Field Strength of Spurious Emission | FCC: ANSI C63.10:2013 6 Standard test methods ----- ISED: RSS-Gen 6.13 | FCC: Section 15.205 Section 15.209 Section 15.231(b) ----- ISED: RSS-210 A1.2 RSS-Gen 8.9 | 9.7 dB 2829.150 MHz Vertical PK with Duty Factor <314.35 MHz > | Complied b) | Radiated |
| -20dB Bandwidth | FCC: ANSI C63.10:2013 6 Standard test methods ----- ISED: - | FCC: Section 15.231(c) ----- ISED: Reference data | N/A | Complied c) | Radiated |

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) The test is not applicable since the EUT does not have AC Mains.

a) Refer to APPENDIX 1 (data of Automatically deactivate)

b) Refer to APPENDIX 1 (data of Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission))

c) Refer to APPENDIX 1 (data of -20 dB and 99 % Occupied Bandwidth)

Symbols:

Complied The data of this test item has enough margin, more than the measurement uncertainty.

Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.

FCC Part 15.31 (e)

This test was performed with the New Battery (DC 3.0 V) and the constant voltage was supplied to the EUT during the tests. Therefore, the EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.3 Addition to standard

| Item | Test Procedure | Specification | Worst margin | Results | Remarks |
|-------------------------|-------------------|--------------------|--------------|---------|----------|
| 99 % Occupied Bandwidth | ISED: RSS-Gen 6.7 | ISED: RSS-210 A1.3 | N/A | - | Radiated |

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the following results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Radiated emission

| Measurement distance | Frequency range | Uncertainty (+/-) |
|----------------------|--|-------------------|
| 3 m | 9 kHz to 30 MHz | 3.3 dB |
| 10 m | | 3.2 dB |
| 3 m | 30 MHz to 200 MHz (Horizontal) (Vertical) | 4.8 dB |
| | | 5.0 dB |
| | 200 MHz to 1000 MHz (Horizontal) (Vertical) | 5.2 dB |
| | | 6.3 dB |
| 10 m | 30 MHz to 200 MHz (Horizontal) (Vertical) | 4.8 dB |
| | | 4.8 dB |
| | 200 MHz to 1000 MHz (Horizontal) (Vertical) | 5.0 dB |
| | | 5.0 dB |
| 3 m | 1 GHz to 6 GHz | 4.9 dB |
| | 6 GHz to 18 GHz | 5.2 dB |
| 1 m | 10 GHz to 26.5 GHz | 5.5 dB |
| | 26.5 GHz to 40 GHz | 5.5 dB |
| 10 m | 1 GHz to 18 GHz | 5.2 dB |

Antenna Terminal test

| Test Item | Uncertainty (+/-) |
|---|-------------------|
| Automatically Deactivate | 0.10 % |
| -20 dB Emission Bandwidth / 99 % Occupied Bandwidth | 0.96 % |

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

*A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 199967 / ISED Lab Company Number: 2973C
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

| Test site | Width x Depth x Height (m) | Size of reference ground plane (m) / horizontal conducting plane | Other rooms | Maximum measurement distance |
|----------------------------|----------------------------|--|------------------------|------------------------------|
| No.1 semi-anechoic chamber | 19.2 x 11.2 x 7.7 | 7.0 x 6.0 | No.1 Power source room | 10 m |
| No.2 semi-anechoic chamber | 7.5 x 5.8 x 5.2 | 4.0 x 4.0 | - | 3 m |
| No.3 semi-anechoic chamber | 12.0 x 8.5 x 5.9 | 6.8 x 5.75 | No.3 Preparation room | 3 m |
| No.3 shielded room | 4.0 x 6.0 x 2.7 | N/A | - | - |
| No.4 semi-anechoic chamber | 12.0 x 8.5 x 5.9 | 6.8 x 5.75 | No.4 Preparation room | 3 m |
| No.4 shielded room | 4.0 x 6.0 x 2.7 | N/A | - | - |
| No.5 semi-anechoic chamber | 6.0 x 6.0 x 3.9 | 6.0 x 6.0 | - | - |
| No.5 measurement room | 6.4 x 6.4 x 3.0 | 6.4 x 6.4 | - | - |
| No.6 shielded room | 4.0 x 4.5 x 2.7 | 4.0 x 4.5 | - | - |
| No.6 measurement room | 4.75 x 5.4 x 3.0 | 4.75 x 4.15 | - | - |
| No.7 shielded room | 4.7 x 7.5 x 2.7 | 4.7 x 7.5 | - | - |
| No.8 measurement room | 3.1 x 5.0 x 2.7 | 3.1 x 5.0 | - | - |
| No.9 measurement room | 8.8 x 4.6 x 2.8 | 2.4 x 2.4 | - | - |
| No.11 measurement room | 6.2 x 4.7 x 3.0 | 4.8 x 4.6 | - | - |

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)

| Test Item* | Mode |
|---|----------------------------|
| Automatically Deactivate | Normal use mode |
| Electric Field Strength of Fundamental Emission Electric Field Strength of Spurious Emission -20 dB & 99 % Occupied Bandwidth | Transmitting mode (Tx) *1) |
| <p>* The system was configured in typical fashion (as a user would normally use it) for testing.</p> <p>*1) The software of this mode is the same as one of normal product, except that EUT continues to transmit when transmitter button is being pressed (For Normal use mode, EUT stops to transmit in a given time, even if transceiver button is being pressed.)</p> <p>* EUT was set by the software as follows; Software: Product program Version 00001103 (Date: *2020/08/07, Storage location: EUT memory)</p> <p>*This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.</p> | |

4.2 Configuration and peripherals



* Setup was taken into consideration and test data was taken under worse case conditions.

Description of EUT

| No. | Item | Model number | Serial number | Manufacturer | Remarks |
|------------|----------------|---------------------|----------------------|----------------------|----------------|
| A | Electronic Key | 14FLC | No.1 *1) No.2 *2) | DENSO CORPORATION | EUT |

*1) Used for Normal use mode

*2) Used for Transmitting mode

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission)

Test Procedure and conditions

[For below 30 MHz]

The noise level was checked by moving a search-coil (Loop Antenna) close to the EUT.

[For 30 MHz to 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The measuring antenna height was varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The measurements were performed for both vertical and horizontal antenna polarization.

The radiated emission measurements were made with the following detector function of the test receiver / spectrum analyzer.


Test Antennas are used as below;

| Frequency | Below 30 MHz | 30 MHz to 200 MHz | 200 MHz to 1 GHz | Above 1 GHz |
|--------------|--------------|-------------------|------------------|-------------|
| Antenna Type | Loop | Biconical | Logperiodic | Horn |

| | From 9 kHz to 90 kHz and From 110 kHz to 150 kHz | From 90 kHz to 110 kHz | From 150 kHz to 490 kHz | From 490 kHz to 30 MHz | From 30 MHz to 1 GHz | Above 1 GHz |
|---------------|--|------------------------|-------------------------|------------------------|--------------------------------|--------------------------------|
| Detector Type | Peak | Peak | Peak | Peak | Peak and Peak with Duty factor | Peak and Peak with Duty factor |
| IF Bandwidth | 200 Hz | 200 Hz | 9.1 kHz | 9.1 kHz | 120 kHz | PK: S/A: RBW 1 MHz, VBW: 3 MHz |

[Test Setup]


Below 1 GHz

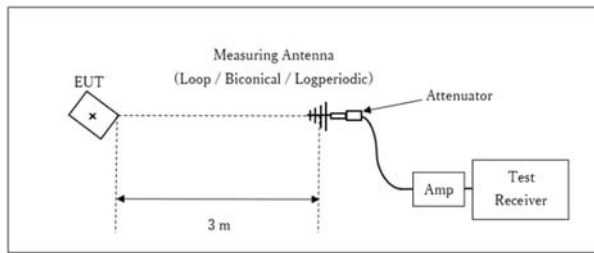

× : Center of turn table

Test Distance: 3 m

1 GHz - 10 GHz

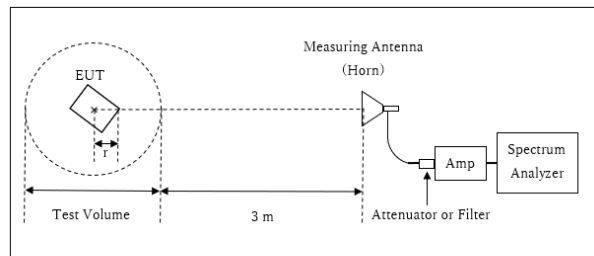

r : Radius of an outer periphery of EUT
× : Center of turn table

Distance Factor: $20 \times \log(4.0 \text{ m} / 3.0 \text{ m}) = 2.50 \text{ dB}$

* Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 4.0 \text{ m}$

SVSWR Volume : 2.0 m

(SVSWR Volume has been calibrated based on CISPR 16-1-4.)

$r = 0.0 \text{ m}$

* The test was performed with $r = 0.0 \text{ m}$ since EUT is small and it was the rather conservative condition.

- The carrier level (or, noise levels) was (or were) measured at each position of all three axes X, Y and Z, and the position that has the maximum noise was determined.

Noise levels of all the frequencies were measured at the position.

This EUT has two modes which mechanical key is inserted or not. The worst case was confirmed with and without mechanical key, as a result, the test with mechanical key was the worst case. Therefore, the test with mechanical key was performed only.

*The result is rounded off to the second decimal place, so some differences might be observed.

Measurement range : 9 kHz - 3.2 GHz
Test data : APPENDIX
Test result : Pass

SECTION 6: Automatically deactivate

Test Procedure

The measurement was performed with Electric field strength using a spectrum analyzer.

Test data : APPENDIX
Test result : Pass

SECTION 7: -20 dB and 99 % Occupied Bandwidth

Test Procedure

The test was measured with a spectrum analyzer using a test fixture.

| Test | Span | RBW | VBW | Sweep | Detector | Trace | Instrument used |
|-------------------------|---|-----------------|--------------------|--------------|-----------------|--------------|------------------------|
| 20 dB Bandwidth | 150 kHz | 1 kHz | 3 kHz | Auto | Peak | Max Hold | Spectrum Analyzer |
| 99 % Occupied Bandwidth | Enough width to display emission skirts | 1 to 5 % of OBW | Three times of RBW | Auto | Peak | Max Hold | Spectrum Analyzer |

Peak hold was applied as Worst-case measurement.


Test data : APPENDIX
Test result : Pass

APPENDIX 1: Test data

Automatically deactivate

Report No. 13523435H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date October 01, 2020
Temperature / Humidity 23 deg. C / 62 % RH
Engineer Shinya Watanabe
Mode Normal use mode 312.10 MHz / 314.35 MHz

| Tx Frequency [MHz] | Time of Transmitting [sec] | Limit [sec] | Result |
|-----------------------|----------------------------------|----------------|--------|
| 312.10 | 0.733 | 5.00 | Pass |
| 314.35 | 0.733 | 5.00 | Pass |

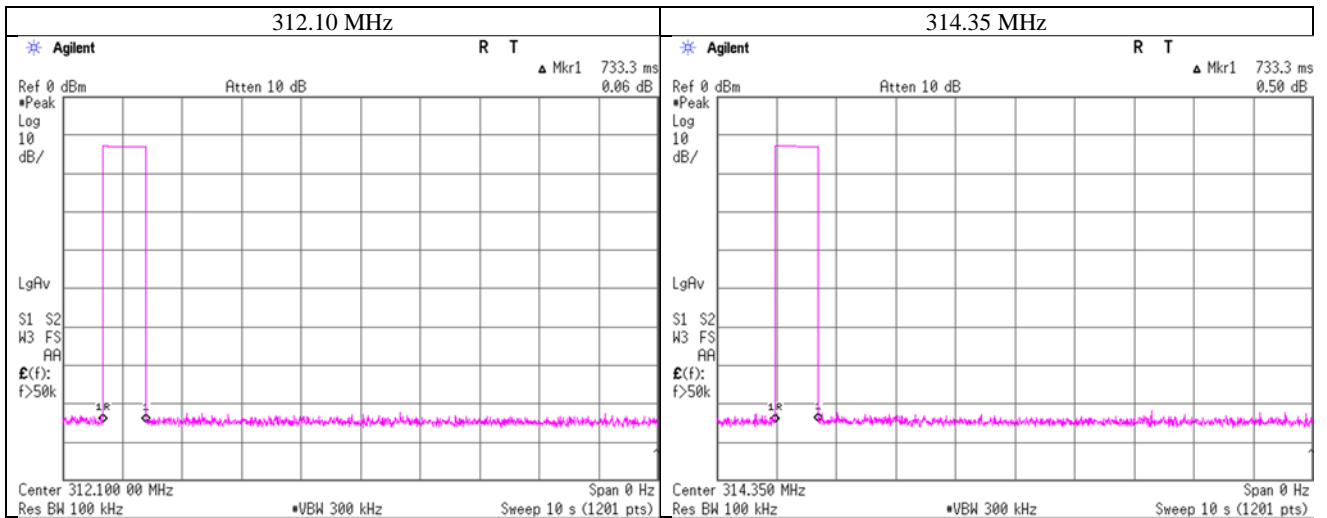

* The EUT transmits UHF when LF signal is received from a car or a button on the EUT is pressed. In both cases, the UHF transmission is stopped within 5 seconds. So the test was performed by a button-pressed operation as the worst case. Please refer to the “Theory of Operation” for details.

Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)

Report No. 13523435H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date October 01, 2020
Temperature / Humidity 23 deg. C / 62 % RH
Engineer Shinya Watanabe
Mode Transmitting mode 312.10 MHz

PK

| Frequency [MHz] | Detector | Reading [dBuV] | | Ant Factor [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | | Limit dBuV/m | Margin [dB] | | Remark Inside or Outside of Restricted Bands |
|--------------------|----------|-------------------|------|-------------------------|--------------|--------------|------------------------|--------------------|------|-----------------|----------------|------|--|
| | | Hor | Ver | | | | | Hor | Ver | | Hor | Ver | |
| 312.100 | PK | 80.7 | 76.4 | 13.7 | 10.1 | 32.0 | - | 72.5 | 68.3 | 95.4 | 22.9 | 27.1 | Carrier |
| 624.200 | PK | NS | NS | - | - | - | - | - | - | 75.4 | - | - | Outside |
| 936.300 | PK | NS | NS | - | - | - | - | - | - | 75.4 | - | - | Outside |
| 1248.400 | PK | NS | NS | - | - | - | - | - | - | 75.4 | - | - | Outside |
| 1560.500 | PK | 47.5 | 47.9 | 25.0 | 4.5 | 34.0 | - | 43.0 | 43.3 | 73.9 | 30.9 | 30.6 | Inside |
| 1872.600 | PK | NS | NS | - | - | - | - | - | - | 75.4 | - | - | Outside |
| 2184.700 | PK | NS | NS | - | - | - | - | - | - | 75.4 | - | - | Outside |
| 2496.800 | PK | NS | NS | - | - | - | - | - | - | 73.9 | - | - | Inside |
| 2808.900 | PK | 42.7 | 42.4 | 28.5 | 5.2 | 32.6 | - | 43.9 | 43.5 | 73.9 | 30.0 | 30.4 | Inside |
| 3121.000 | PK | 43.4 | 43.6 | 28.9 | 5.4 | 32.4 | - | 45.2 | 45.5 | 75.4 | 30.2 | 30.0 | Outside |

PK with Duty factor

| Frequency [MHz] | Detector | Reading [dBuV] | | Ant Factor [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | | Limit dBuV/m | Margin [dB] | | Remark |
|--------------------|----------|-------------------|------|-------------------------|--------------|--------------|------------------------|--------------------|------|-----------------|----------------|------|---------|
| | | Hor | Ver | | | | | Hor | Ver | | Hor | Ver | |
| 312.100 | PK | 80.7 | 76.4 | 13.7 | 10.1 | 32.0 | 0.0 | 72.5 | 68.3 | 75.4 | 2.9 | 7.1 | Carrier |
| 624.200 | PK | NS | NS | - | - | - | 0.0 | - | - | 55.4 | - | - | Outside |
| 936.300 | PK | NS | NS | - | - | - | 0.0 | - | - | 55.4 | - | - | Outside |
| 1248.400 | PK | NS | NS | - | - | - | 0.0 | - | - | 55.4 | - | - | Outside |
| 1560.500 | PK | 47.5 | 47.9 | 25.0 | 4.5 | 34.0 | 0.0 | 43.0 | 43.3 | 53.9 | 10.9 | 10.6 | Inside |
| 1872.600 | PK | NS | NS | - | - | - | 0.0 | - | - | 55.4 | - | - | Outside |
| 2184.700 | PK | NS | NS | - | - | - | 0.0 | - | - | 55.4 | - | - | Outside |
| 2496.800 | PK | NS | NS | - | - | - | 0.0 | - | - | 53.9 | - | - | Inside |
| 2808.900 | PK | 42.7 | 42.4 | 28.5 | 5.2 | 32.6 | 0.0 | 43.9 | 43.5 | 53.9 | 10.0 | 10.4 | Inside |
| 3121.000 | PK | 43.4 | 43.6 | 28.9 | 5.4 | 32.4 | 0.0 | 45.2 | 45.5 | 55.4 | 10.2 | 10.0 | Outside |

NS: No signal detected

Sample calculation:

Result of PK = Reading + Ant Factor + Loss {Cable + Attenuator + Filter (above 1GHz) +Distance factor (above 1 GHz)} - Gain (Amplifier)

Result of PK with Duty factor = Reading + Ant Factor + Loss {Cable + Attenuator + Filter (above 1 GHz) +Distance factor (above 1 GHz)} - Gain (Amplifier) + Duty factor

For above 1GHz : Distance Factor: $20 \times \log(4.0 \text{ m}/3.0 \text{ m}) = 2.50 \text{ dB}$

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Since the peak emission result satisfied the average limit, duty factor was omitted.

Although Duty of this product was 100% or less, the result of AV (PK with Duty factor) was calculated by applying Duty 100% as worst.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)

Report No. 13523435H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date October 01, 2020
Temperature / Humidity 23 deg. C / 62 % RH
Engineer Shinya Watanabe
Mode Transmitting mode 314.35 MHz

PK

| Frequency [MHz] | Detector | Reading [dBuV] | | Ant Factor [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | | Limit dBuV/m | Margin [dB] | | Remark Inside or Outside of Restricted Bands |
|--------------------|----------|-------------------|------|-------------------------|--------------|--------------|------------------------|--------------------|------|-----------------|----------------|------|--|
| | | Hor | Ver | | | | | Hor | Ver | | Hor | Ver | |
| 314.350 | PK | 80.7 | 76.5 | 13.8 | 10.2 | 32.0 | - | 72.7 | 68.5 | 95.5 | 22.9 | 27.0 | Carrier |
| 628.700 | PK | NS | NS | - | - | - | - | - | - | 75.5 | - | - | Outside |
| 943.050 | PK | NS | NS | - | - | - | - | - | - | 75.5 | - | - | Outside |
| 1257.400 | PK | NS | NS | - | - | - | - | - | - | 75.5 | - | - | Outside |
| 1571.750 | PK | 42.3 | 42.6 | 25.0 | 5.5 | 33.2 | - | 39.6 | 39.9 | 73.9 | 34.3 | 34.0 | Inside |
| 1886.100 | PK | NS | NS | - | - | - | - | - | - | 75.5 | - | - | Outside |
| 2200.450 | PK | NS | NS | - | - | - | - | - | - | 73.9 | - | - | Inside |
| 2514.800 | PK | NS | NS | - | - | - | - | - | - | 75.5 | - | - | Outside |
| 2829.150 | PK | 41.1 | 41.6 | 28.5 | 5.8 | 31.7 | - | 43.7 | 44.2 | 73.9 | 30.2 | 29.7 | Inside |
| 3143.500 | PK | 42.3 | 42.4 | 28.8 | 5.9 | 31.6 | - | 45.4 | 45.5 | 75.5 | 30.1 | 30.0 | Outside |

PK with Duty factor

| Frequency [MHz] | Detector | Reading [dBuV] | | Ant Factor [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | | Limit dBuV/m | Margin [dB] | | Remark |
|--------------------|----------|-------------------|------|-------------------------|--------------|--------------|------------------------|--------------------|------|-----------------|----------------|------|---------|
| | | Hor | Ver | | | | | Hor | Ver | | Hor | Ver | |
| 314.350 | PK | 80.7 | 76.5 | 13.8 | 10.2 | 32.0 | 0.0 | 72.7 | 68.5 | 75.5 | 2.9 | 7.0 | Carrier |
| 628.700 | PK | NS | NS | - | - | - | 0.0 | - | - | 55.5 | - | - | Outside |
| 943.050 | PK | NS | NS | - | - | - | 0.0 | - | - | 55.5 | - | - | Outside |
| 1257.400 | PK | NS | NS | - | - | - | 0.0 | - | - | 55.5 | - | - | Outside |
| 1571.750 | PK | 42.3 | 42.6 | 25.0 | 5.5 | 33.2 | 0.0 | 39.6 | 39.9 | 53.9 | 14.3 | 14.0 | Inside |
| 1886.100 | PK | NS | NS | - | - | - | 0.0 | - | - | 55.5 | - | - | Outside |
| 2200.450 | PK | NS | NS | - | - | - | 0.0 | - | - | 53.9 | - | - | Inside |
| 2514.800 | PK | NS | NS | - | - | - | 0.0 | - | - | 55.5 | - | - | Outside |
| 2829.150 | PK | 41.1 | 41.6 | 28.5 | 5.8 | 31.7 | 0.0 | 43.7 | 44.2 | 53.9 | 10.2 | 9.7 | Inside |
| 3143.500 | PK | 42.3 | 42.4 | 28.8 | 5.9 | 31.6 | 0.0 | 45.4 | 45.5 | 55.5 | 10.1 | 10.0 | Outside |

NS: No signal detected

Sample calculation:

Result of PK = Reading + Ant Factor + Loss {Cable + Attenuator + Filter (above 1GHz) + Distance factor (above 1 GHz)} - Gain (Amplifier)

Result of PK with Duty factor = Reading + Ant Factor + Loss {Cable + Attenuator + Filter (above 1 GHz) + Distance factor (above 1 GHz)} - Gain (Amplifier) + Duty factor

For above 1GHz : Distance Factor: $20 \times \log(4.0 \text{ m}/3.0 \text{ m}) = 2.50 \text{ dB}$

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Since the peak emission result satisfied the average limit, duty factor was omitted.

Although Duty of this product was 100% or less, the result of AV (PK with Duty factor) was calculated by applying Duty 100% as worst.

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission
(Plot data, Worst case)

Report No. 13523435H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date October 01, 2020
Temperature / Humidity 23 deg. C / 62 % RH
Engineer Shinya Watanabe
Mode Transmitting mode 312.10 MHz

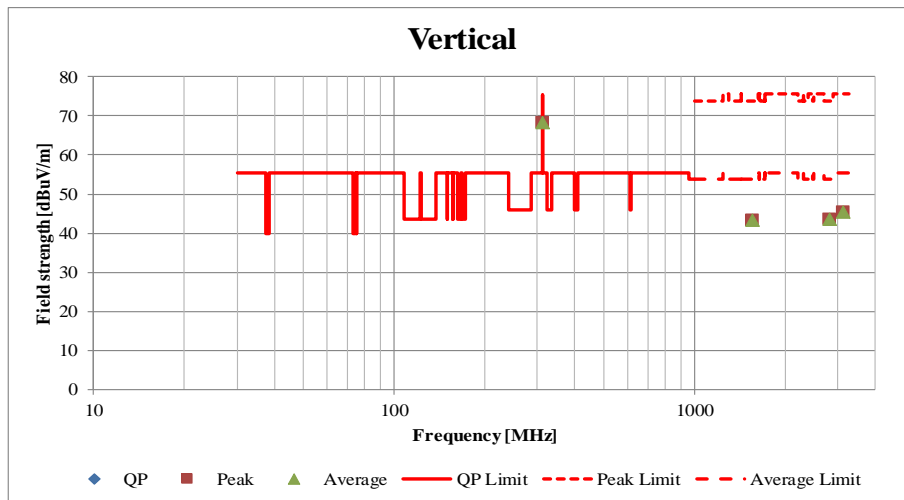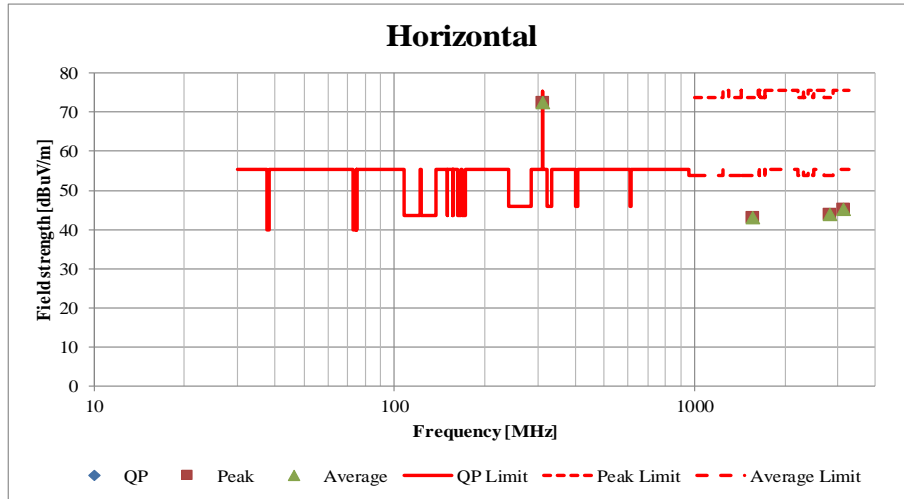

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

-20 dB and 99 % Occupied Bandwidth

Report No. 13523435H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date October 01, 2020
Temperature / Humidity 23 deg. C / 62 % RH
Engineer Shinya Watanabe
Mode Transmitting mode 312.10 MHz / 314.35 MHz

Bandwidth Limit : Fundamental Frequency **312.10** MHz x 0.25% = 780.25 kHz

* The above limit was calculated from more stringent nominal frequency.

* Method of KDB 926416 for systems employing non sweeping frequencies was referred.

312.10MHz

| |
|--------------------------|
| -20dB Bandwidth [kHz] |
| 38.280 |

314.35MHz

| |
|--------------------------|
| -20dB Bandwidth [kHz] |
| 38.249 |

| -20dB Bandwidth [kHz] | Bandwidth Limit [kHz] | Result |
|--------------------------|--------------------------|--------|
| 76.529 | 780.25 | Pass |

Bandwidth Limit : Fundamental Frequency **312.10** MHz x 0.25% = 780.25 kHz

| 99% Occupied Bandwidth [kHz] | Bandwidth Limit [kHz] | Result |
|---------------------------------|--------------------------|--------|
| 38.6402 | 780.25 | Pass |


Bandwidth Limit : Fundamental Frequency **314.35** MHz x 0.25% = 785.88 kHz

| 99% Occupied Bandwidth [kHz] | Bandwidth Limit [kHz] | Result |
|---------------------------------|--------------------------|--------|
| 38.5732 | 785.88 | Pass |


-20 dB and 99 % Occupied Bandwidth

Report No. 13523435H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.3
Date October 01, 2020
Temperature / Humidity 23 deg. C / 62 % RH
Engineer Shinya Watanabe
Mode Transmitting mode 312.10 MHz / 314.35 MHz

[312.10 MHz]

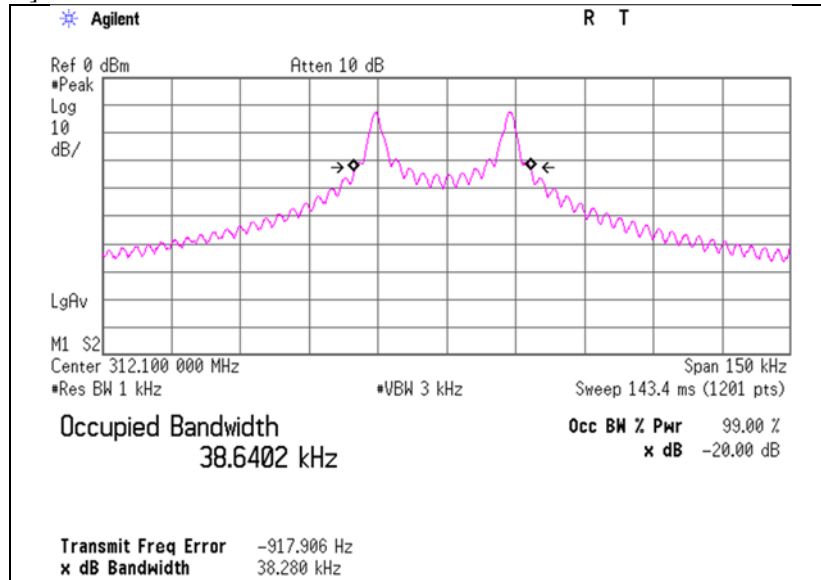

[314.35 MHz]

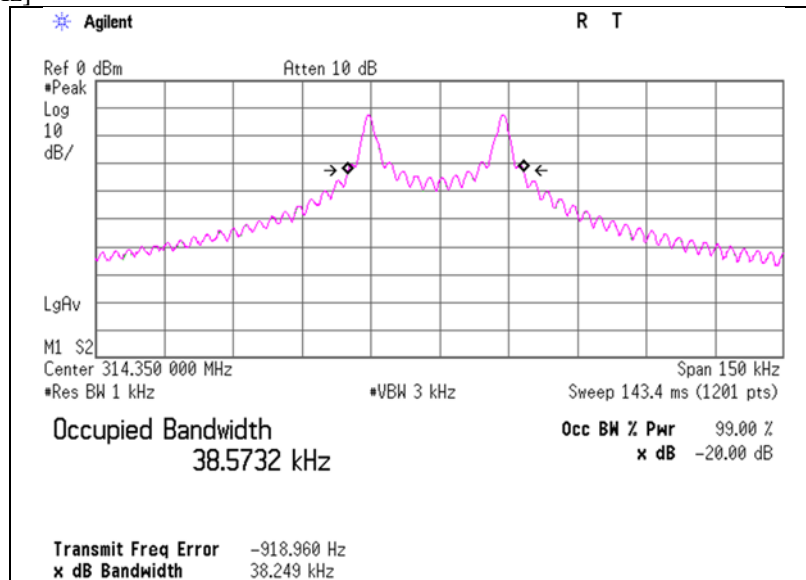

APPENDIX 2: Test instruments

Test equipment

| Test Item | Local ID | LIMS ID | Description | Manufacturer | Model | Serial | Last Calibration Date | Cal Int |
|-----------|---------------|---------|--------------------------------------|----------------------------------|-----------------------------|-------------------------------|-----------------------|---------|
| RE | MAEC-03 | 142008 | AC3_Semi Anechoic Chamber(NSA) | TDK | Semi Anechoic Chamber 3m | DA-10005 | 05/22/2020 | 24 |
| RE | MAEC-03-SVSWR | 142013 | AC3_Semi Anechoic Chamber(SVSWR) | TDK | Semi Anechoic Chamber 3m | DA-10005 | 04/08/2019 | 24 |
| RE | MOS-13 | 141554 | Thermo-Hygrometer | CUSTOM. Inc | CTH-201 | 1301 | 01/07/2020 | 12 |
| RE | MBA-03 | 141424 | Biconical Antenna | Schwarzbeck Mess - Elektronik | VHA9103+BBA9106 | 1915 | 08/13/2020 | 12 |
| RE | MLA-22 | 141266 | Logperiodic Antenna (200-1000MHz) | Schwarzbeck Mess - Elektronik | VUSLP9111B | 9111B-191 | 08/13/2020 | 12 |
| RE | MAT-95 | 142314 | Attenuator | Pasternack | PE7390-6 | D/C 1504 | 06/17/2020 | 12 |
| RE | MCC-51 | 141323 | Coaxial cable | UL Japan | - | - | 07/06/2020 | 12 |
| RE | MPA-13 | 141582 | Pre Amplifier | SONOMA INSTRUMENT | 310 | 260834 | 02/10/2020 | 12 |
| RE | MHA-21 | 141508 | Horn Antenna 1-18GHz | Schwarzbeck Mess - Elektronik | BBHA9120D | 557 | 05/22/2020 | 12 |
| RE | MCC-231 | 177964 | Microwave Cable | Junkosha INC. | MMX221 | 1901S329(1m)/ 1902S579(5m) | 03/02/2020 | 12 |
| RE | MPA-11 | 141580 | MicroWave System Amplifier | Keysight Technologies Inc | 83017A | MY39500779 | 03/24/2020 | 12 |
| RE | MSA-03 | 141884 | Spectrum Analyzer | Keysight Technologies Inc | E4448A | MY44020357 | 03/04/2020 | 12 |
| RE | MTR-03 | 141942 | Test Receiver | Rohde & Schwarz | ESCI | 100300 | 08/18/2020 | 12 |
| RE | MLPA-07 | 142645 | Loop Antenna | UL Japan | - | - | - | - |

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

RE: Radiated emission, 99 % Occupied Bandwidth, -20 dB bandwidth, and Automatically deactivate tests

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124